

Document Number: Dxxxx
Date: 2018-07-04
Revises: N4750
Reply to: Richard Smith
Google Inc
cxxeditor@gmail.com

Working Draft, Standard for Programming Language C++

Note: this is an early draft. It's known to be incomplet and incorrekt, and it has lots of bad fomattting.

Contents

1	Scope	1
2	Normative references	2
3	Terms and definitions	3
4	General principles	6
4.1	Implementation compliance	6
4.2	Structure of this document	8
4.3	Syntax notation	8
4.4	Acknowledgments	8
5	Lexical conventions	9
5.1	Separate translation	9
5.2	Phases of translation	9
5.3	Character sets	10
5.4	Preprocessing tokens	11
5.5	Alternative tokens	12
5.6	Tokens	12
5.7	Comments	12
5.8	Header names	12
5.9	Preprocessing numbers	13
5.10	Identifiers	13
5.11	Keywords	14
5.12	Operators and punctuators	15
5.13	Literals	15
6	Basics	24
6.1	Declarations and definitions	24
6.2	One-definition rule	26
6.3	Scope	29
6.4	Name lookup	34
6.5	Program and linkage	46
6.6	Memory and objects	48
6.7	Types	58
6.8	Program execution	63
7	Standard conversions	75
7.1	Lvalue-to-rvalue conversion	76
7.2	Array-to-pointer conversion	76
7.3	Function-to-pointer conversion	76
7.4	Temporary materialization conversion	76
7.5	Qualification conversions	77
7.6	Integral promotions	77
7.7	Floating-point promotion	78
7.8	Integral conversions	78
7.9	Floating-point conversions	78
7.10	Floating-integral conversions	78
7.11	Pointer conversions	78
7.12	Pointer-to-member conversions	79
7.13	Function pointer conversions	79
7.14	Boolean conversions	79

8 Expressions	80
8.1 Preamble	80
8.2 Properties of expressions	80
8.3 Usual arithmetic conversions	83
8.4 Primary expressions	84
8.5 Compound expressions	99
8.6 Constant expressions	126
9 Statements	131
9.1 Labeled statement	131
9.2 Expression statement	132
9.3 Compound statement or block	132
9.4 Selection statements	132
9.5 Iteration statements	134
9.6 Jump statements	136
9.7 Declaration statement	138
9.8 Ambiguity resolution	138
10 Declarations	140
10.1 Specifiers	141
10.2 Enumeration declarations	157
10.3 Namespaces	160
10.4 The <code>asm</code> declaration	172
10.5 Linkage specifications	172
10.6 Attributes	174
11 Declarators	185
11.1 Type names	186
11.2 Ambiguity resolution	187
11.3 Meaning of declarators	188
11.4 Function definitions	198
11.5 Structured binding declarations	201
11.6 Initializers	202
12 Classes	218
12.1 Class names	220
12.2 Class members	221
12.3 Unions	231
12.4 Local class declarations	233
13 Derived classes	235
13.1 Multiple base classes	236
13.2 Member name lookup	237
13.3 Virtual functions	240
13.4 Abstract classes	244
14 Member access control	246
14.1 Access specifiers	247
14.2 Accessibility of base classes and base class members	248
14.3 Friends	250
14.4 Protected member access	253
14.5 Access to virtual functions	253
14.6 Multiple access	254
14.7 Nested classes	254
15 Special member functions	255
15.1 Constructors	255
15.2 Temporary objects	257
15.3 Conversions	260
15.4 Destructors	263

15.5	Free store	265
15.6	Initialization	267
15.7	Construction and destruction	273
15.8	Copying and moving class objects	275
15.9	Comparisons	282
16	Overloading	284
16.1	Overloadable declarations	284
16.2	Declaration matching	286
16.3	Overload resolution	287
16.4	Address of overloaded function	306
16.5	Overloaded operators	308
16.6	Built-in operators	311
17	Templates	315
17.1	Template parameters	316
17.2	Names of template specializations	321
17.3	Template arguments	323
17.4	Template constraints	328
17.5	Type equivalence	332
17.6	Template declarations	333
17.7	Name resolution	351
17.8	Template instantiation and specialization	365
17.9	Function template specializations	377
17.10	Deduction guides	395
18	Exception handling	397
18.1	Throwing an exception	398
18.2	Constructors and destructors	399
18.3	Handling an exception	400
18.4	Exception specifications	401
18.5	Special functions	404
19	Preprocessing directives	406
19.1	Conditional inclusion	407
19.2	Source file inclusion	409
19.3	Macro replacement	410
19.4	Line control	416
19.5	Error directive	416
19.6	Pragma directive	416
19.7	Null directive	416
19.8	Predefined macro names	416
19.9	Pragma operator	419
20	Library introduction	420
20.1	General	420
20.2	The C standard library	421
20.3	Definitions	421
20.4	Method of description (Informative)	424
20.5	Library-wide requirements	429
21	Language support library	450
21.1	General	450
21.2	Common definitions	450
21.3	Implementation properties	454
21.4	Integer types	464
21.5	Start and termination	465
21.6	Dynamic memory management	466
21.7	Type identification	473

21.8	Contract violation handling	475
21.9	Exception handling	476
21.10	Initializer lists	480
21.11	Comparisons	481
21.12	Other runtime support	488
22	Concepts library	491
22.1	General	491
22.2	Equality preservation	491
22.3	Header <code><concepts></code> synopsis	492
22.4	Language-related concepts	494
22.5	Comparison concepts	498
22.6	Object concepts	500
22.7	Callable concepts	501
23	Diagnostics library	503
23.1	General	503
23.2	Exception classes	503
23.3	Assertions	506
23.4	Error numbers	507
23.5	System error support	508
24	General utilities library	518
24.1	General	518
24.2	Utility components	518
24.3	Compile-time integer sequences	522
24.4	Pairs	523
24.5	Tuples	527
24.6	Optional objects	536
24.7	Variants	549
24.8	Storage for any type	560
24.9	Bitsets	565
24.10	Memory	570
24.11	Smart pointers	584
24.12	Memory resources	610
24.13	Class template <code>scoped_allocator_adaptor</code>	619
24.14	Function objects	624
24.15	Metaprogramming and type traits	646
24.16	Compile-time rational arithmetic	669
24.17	Time utilities	672
24.18	Class <code>type_index</code>	764
24.19	Execution policies	765
24.20	Primitive numeric conversions	767
25	Strings library	770
25.1	General	770
25.2	Character traits	770
25.3	String classes	775
25.4	String view classes	806
25.5	Null-terminated sequence utilities	815
26	Localization library	820
26.1	General	820
26.2	Header <code><locale></code> synopsis	820
26.3	Locales	821
26.4	Standard <code>locale</code> categories	828
26.5	C library locales	858

27 Containers library	860
27.1 General	860
27.2 Container requirements	860
27.3 Sequence containers	893
27.4 Associative containers	919
27.5 Unordered associative containers	936
27.6 Container adaptors	956
27.7 Views	963
28 Iterators library	970
28.1 General	970
28.2 Iterator requirements	970
28.3 Header <code><iterator></code> synopsis	975
28.4 Iterator primitives	978
28.5 Iterator adaptors	980
28.6 Stream iterators	990
28.7 Range access	996
28.8 Container and view access	997
29 Algorithms library	998
29.1 General	998
29.2 Header <code><algorithm></code> synopsis	998
29.3 Algorithms requirements	1015
29.4 Parallel algorithms	1016
29.5 Non-modifying sequence operations	1019
29.6 Mutating sequence operations	1027
29.7 Sorting and related operations	1036
29.8 C library algorithms	1053
30 Numerics library	1055
30.1 General	1055
30.2 Definitions	1055
30.3 Numeric type requirements	1055
30.4 The floating-point environment	1056
30.5 Complex numbers	1057
30.6 Bit manipulation	1065
30.7 Random number generation	1066
30.8 Numeric arrays	1104
30.9 Generalized numeric operations	1123
30.10 Mathematical functions for floating-point types	1135
31 Input/output library	1150
31.1 General	1150
31.2 Iostreams requirements	1150
31.3 Forward declarations	1151
31.4 Standard iostream objects	1153
31.5 Iostreams base classes	1155
31.6 Stream buffers	1170
31.7 Formatting and manipulators	1178
31.8 String-based streams	1201
31.9 File-based streams	1210
31.10 Synchronized output streams	1223
31.11 File systems	1228
31.12 C library files	1273
32 Regular expressions library	1277
32.1 General	1277
32.2 Definitions	1277
32.3 Requirements	1278

32.4	Header <code><regex></code> synopsis	1279
32.5	Namespace <code>std::regex_constants</code>	1285
32.6	Class <code>regex_error</code>	1288
32.7	Class template <code>regex_traits</code>	1288
32.8	Class template <code>basic_regex</code>	1290
32.9	Class template <code>sub_match</code>	1295
32.10	Class template <code>match_results</code>	1299
32.11	Regular expression algorithms	1304
32.12	Regular expression iterators	1308
32.13	Modified ECMAScript regular expression grammar	1313
33	Atomic operations library	1316
33.1	General	1316
33.2	Header <code><atomic></code> synopsis	1316
33.3	Type aliases	1320
33.4	Order and consistency	1320
33.5	Lock-free property	1321
33.6	Class template <code>atomic_ref</code>	1322
33.7	Class template <code>atomic</code>	1328
33.8	Non-member functions	1336
33.9	Flag type and operations	1336
33.10	Fences	1337
34	Thread support library	1339
34.1	General	1339
34.2	Requirements	1339
34.3	Threads	1341
34.4	Mutual exclusion	1346
34.5	Condition variables	1364
34.6	Futures	1370
A	Grammar summary	1384
A.1	Keywords	1384
A.2	Lexical conventions	1384
A.3	Basics	1388
A.4	Expressions	1388
A.5	Statements	1392
A.6	Declarations	1393
A.7	Declarators	1397
A.8	Classes	1399
A.9	Derived classes	1400
A.10	Special member functions	1400
A.11	Overloading	1400
A.12	Templates	1401
A.13	Exception handling	1402
A.14	Preprocessing directives	1402
B	Implementation quantities	1404
C	Compatibility	1406
C.1	C++ and ISO C	1406
C.2	C++ and ISO C++ 2003	1414
C.3	C++ and ISO C++ 2011	1419
C.4	C++ and ISO C++ 2014	1421
C.5	C++ and ISO C++ 2017	1424
C.6	C standard library	1428

D Compatibility features	1430
D.1 Arithmetic conversion on enumerations	1430
D.2 Implicit capture of <code>*this</code> by reference	1430
D.3 Array comparisons	1430
D.4 Redeclaration of <code>static constexpr</code> data members	1430
D.5 Implicit declaration of copy functions	1431
D.6 C standard library headers	1431
D.7 Relational operators	1432
D.8 <code>char*</code> streams	1432
D.9 Deprecated type traits	1440
D.10 Deprecated iterator primitives	1440
D.11 Deprecated <code>shared_ptr</code> atomic access	1441
D.12 Deprecated <code>basic_string</code> capacity	1443
D.13 Deprecated standard code conversion facets	1443
D.14 Deprecated convenience conversion interfaces	1444
Bibliography	1449
Cross references	1450
Cross references from ISO C++ 2017	1470
Index	1471
Index of grammar productions	1501
Index of library headers	1506
Index of library names	1508
Index of implementation-defined behavior	1569

1 Scope

[intro.scope]

- ¹ This document specifies requirements for implementations of the C++ programming language. The first such requirement is that they implement the language, so this document also defines C++. Other requirements and relaxations of the first requirement appear at various places within this document.
- ² C++ is a general purpose programming language based on the C programming language as described in ISO/IEC 9899:2011 *Programming languages — C* (hereinafter referred to as the *C standard*). C++ provides many facilities beyond those provided by C, including additional data types, classes, templates, exceptions, namespaces, operator overloading, function name overloading, references, free store management operators, and additional library facilities.

2 Normative references

[intro.refs]

¹ The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- (1.1) — Ecma International, *ECMAScript Language Specification*, Standard Ecma-262, third edition, 1999.
- (1.2) — INTERNET ENGINEERING TASK FORCE (IETF). RFC 6557: Procedures for Maintaining the Time Zone Database [online]. Edited by E. Lear, P. Eggert. February 2012 [viewed 2018-03-26]. Available at <https://www.ietf.org/rfc/rfc6557.txt>
- (1.3) — ISO/IEC 2382 (all parts), *Information technology — Vocabulary*
- (1.4) — ISO 8601:2004, *Data elements and interchange formats — Information interchange — Representation of dates and times*
- (1.5) — ISO/IEC 9899:2011, *Programming languages — C*
- (1.6) — ISO/IEC 9945:2003, *Information Technology — Portable Operating System Interface (POSIX)*
- (1.7) — ISO/IEC 10646, *Information technology — Universal Coded Character Set (UCS)*
- (1.8) — ISO/IEC 10646-1:1993, *Information technology — Universal Multiple-Octet Coded Character Set (UCS) — Part 1: Architecture and Basic Multilingual Plane*
- (1.9) — ISO/IEC/IEEE 60559:2011, *Information technology — Microprocessor Systems — Floating-Point arithmetic*
- (1.10) — ISO 80000-2:2009, *Quantities and units — Part 2: Mathematical signs and symbols to be used in the natural sciences and technology*

² The library described in Clause 7 of ISO/IEC 9899:2011 is hereinafter called the *C standard library*.¹

³ The operating system interface described in ISO/IEC 9945:2003 is hereinafter called *POSIX*.

⁴ The ECMAScript Language Specification described in Standard Ecma-262 is hereinafter called *ECMA-262*.

⁵ [Note: References to ISO/IEC 10646-1:1993 are used only to support deprecated features (D.13). — end note]

¹ With the qualifications noted in Clause 21 through Clause 34 and in C.6, the C standard library is a subset of the C++ standard library.

3 Terms and definitions

[intro.defs]

- ¹ For the purposes of this document, the terms and definitions given in ISO/IEC 2382-1:1993, the terms, definitions, and symbols given in ISO 80000-2:2009, and the following apply.
- ² ISO and IEC maintain terminological databases for use in standardization at the following addresses:
 - (2.1) — ISO Online browsing platform: available at <http://www.iso.org/obp>
 - (2.2) — IEC Electropedia: available at <http://www.electropedia.org/>
- ³ 20.3 defines additional terms that are used only in Clause 20 through Clause 34 and Annex D.
- ⁴ Terms that are used only in a small portion of this document are defined where they are used and italicized where they are defined.

3.1 [defns.access]

access

⟨execution-time action⟩ read or modify the value of an object

3.2 [defns.argument]

argument

⟨function call expression⟩ expression in the comma-separated list bounded by the parentheses (8.5.1.2)

3.3 [defns.argument.macro]

argument

⟨function-like macro⟩ sequence of preprocessing tokens in the comma-separated list bounded by the parentheses (19.3)

3.4 [defns.argument.throw]

argument

⟨throw expression⟩ operand of `throw` (8.5.17)

3.5 [defns.argument.templ]

argument

⟨template instantiation⟩ *constant-expression*, *type-id*, or *id-expression* in the comma-separated list bounded by the angle brackets (17.3)

3.6 [defns.block]

block

wait for some condition (other than for the implementation to execute the execution steps of the thread of execution) to be satisfied before continuing execution past the blocking operation

3.7 [defns.cond.suppl]

conditionally-supported

program construct that an implementation is not required to support

[*Note 1 to entry:* Each implementation documents all conditionally-supported constructs that it does not support. — *end note*]

3.8 [defns.diagnostic]

diagnostic message

message belonging to an implementation-defined subset of the implementation's output messages

3.9 [defns.dynamic.type]

dynamic type

⟨glvalue⟩ type of the most derived object (6.6.2) to which the glvalue refers

[*Example:* If a pointer (11.3.1) `p` whose static type is “pointer to class B” is pointing to an object of class D, derived from B (Clause 13), the dynamic type of the expression `*p` is “D”. References (11.3.2) are treated similarly. — *end example*]

- 3.10** [defns.dynamic.type.prvalue]
dynamic type
 ⟨prvalue⟩ static type of the prvalue expression
- 3.11** [defns.ill.formed]
ill-formed program
 program that is not well-formed (3.29)
- 3.12** [defns.impl.defined]
implementation-defined behavior
 behavior, for a well-formed program construct and correct data, that depends on the implementation and that each implementation documents
- 3.13** [defns.impl.limits]
implementation limits
 restrictions imposed upon programs by the implementation
- 3.14** [defns.locale.specific]
locale-specific behavior
 behavior that depends on local conventions of nationality, culture, and language that each implementation documents
- 3.15** [defns.multibyte]
multibyte character
 sequence of one or more bytes representing a member of the extended character set of either the source or the execution environment
 [Note 1 to entry: The extended character set is a superset of the basic character set (5.3). — end note]
- 3.16** [defns.parameter]
parameter
 ⟨function or catch clause⟩ object or reference declared as part of a function declaration or definition or in the catch clause of an exception handler that acquires a value on entry to the function or handler
- 3.17** [defns.parameter.macro]
parameter
 ⟨function-like macro⟩ identifier from the comma-separated list bounded by the parentheses immediately following the macro name
- 3.18** [defns.parameter.templ]
parameter
 ⟨template⟩ member of a *template-parameter-list*
- 3.19** [defns.signature]
signature
 ⟨function⟩ name, parameter type list (11.3.5), enclosing namespace (if any), and trailing *requires-clause* (Clause 11) (if any)
 [Note 1 to entry: Signatures are used as a basis for name mangling and linking. — end note]
- 3.20** [defns.signature.templ]
signature
 ⟨function template⟩ name, parameter type list (11.3.5), enclosing namespace (if any), return type, *template-head*, and trailing *requires-clause* (Clause 11) (if any)
- 3.21** [defns.signature.spec]
signature
 ⟨function template specialization⟩ signature of the template of which it is a specialization and its template arguments (whether explicitly specified or deduced)

3.22 [defns.signature.member]

signature

⟨class member function⟩ name, parameter type list (11.3.5), class of which the function is a member, *cv*-qualifiers (if any), *ref-qualifier* (if any), and trailing *requires-clause* (Clause 11) (if any)

3.23 [defns.signature.member.templ]

signature

⟨class member function template⟩ name, parameter type list (11.3.5), class of which the function is a member, *cv*-qualifiers (if any), *ref-qualifier* (if any), return type (if any), *template-head*, and trailing *requires-clause* (Clause 11) (if any)

3.24 [defns.signature.member.spec]

signature

⟨class member function template specialization⟩ signature of the member function template of which it is a specialization and its template arguments (whether explicitly specified or deduced)

3.25 [defns.static.type]

static type

type of an expression (6.7) resulting from analysis of the program without considering execution semantics
 [Note 1 to entry: The static type of an expression depends only on the form of the program in which the expression appears, and does not change while the program is executing. — end note]

3.26 [defns.unblock]

unblock

satisfy a condition that one or more blocked threads of execution are waiting for

3.27 [defns.undefined]

undefined behavior

behavior for which this document imposes no requirements

[Note 1 to entry: Undefined behavior may be expected when this document omits any explicit definition of behavior or when a program uses an erroneous construct or erroneous data. Permissible undefined behavior ranges from ignoring the situation completely with unpredictable results, to behaving during translation or program execution in a documented manner characteristic of the environment (with or without the issuance of a diagnostic message), to terminating a translation or execution (with the issuance of a diagnostic message). Many erroneous program constructs do not engender undefined behavior; they are required to be diagnosed. Evaluation of a constant expression never exhibits behavior explicitly specified as undefined in Clause 4 through Clause 19 of this document (8.6). — end note]

3.28 [defns.unspecified]

unspecified behavior

behavior, for a well-formed program construct and correct data, that depends on the implementation

[Note 1 to entry: The implementation is not required to document which behavior occurs. The range of possible behaviors is usually delineated by this document. — end note]

3.29 [defns.well.formed]

well-formed program

C++ program constructed according to the syntax rules, diagnosable semantic rules, and the one-definition rule (6.2)

4 General principles

[intro]

4.1 Implementation compliance

[intro.compliance]

- ¹ The set of *diagnosable rules* consists of all syntactic and semantic rules in this document except for those rules containing an explicit notation that “no diagnostic is required” or which are described as resulting in “undefined behavior”.
- ² Although this document states only requirements on C++ implementations, those requirements are often easier to understand if they are phrased as requirements on programs, parts of programs, or execution of programs. Such requirements have the following meaning:
 - (2.1) — If a program contains no violations of the rules in this document, a conforming implementation shall, within its resource limits, accept and correctly execute² that program.
 - (2.2) — If a program contains a violation of any diagnosable rule or an occurrence of a construct described in this document as “conditionally-supported” when the implementation does not support that construct, a conforming implementation shall issue at least one diagnostic message.
 - (2.3) — If a program contains a violation of a rule for which no diagnostic is required, this document places no requirement on implementations with respect to that program.

[*Note*: During template argument deduction and substitution, certain constructs that in other contexts require a diagnostic are treated differently; see 17.9.2. — *end note*]

- ³ For classes and class templates, the library Clauses specify partial definitions. Private members (Clause 14) are not specified, but each implementation shall supply them to complete the definitions according to the description in the library Clauses.
- ⁴ For functions, function templates, objects, and values, the library Clauses specify declarations. Implementations shall supply definitions consistent with the descriptions in the library Clauses.
- ⁵ The names defined in the library have namespace scope (10.3). A C++ translation unit (5.2) obtains access to these names by including the appropriate standard library header (19.2).
- ⁶ The templates, classes, functions, and objects in the library have external linkage (6.5). The implementation provides definitions for standard library entities, as necessary, while combining translation units to form a complete C++ program (5.2).
- ⁷ Two kinds of implementations are defined: a *hosted implementation* and a *freestanding implementation*. For a hosted implementation, this document defines the set of available libraries. A freestanding implementation is one in which execution may take place without the benefit of an operating system, and has an implementation-defined set of libraries that includes certain language-support libraries (20.5.1.3).
- ⁸ A conforming implementation may have extensions (including additional library functions), provided they do not alter the behavior of any well-formed program. Implementations are required to diagnose programs that use such extensions that are ill-formed according to this document. Having done so, however, they can compile and execute such programs.
- ⁹ Each implementation shall include documentation that identifies all conditionally-supported constructs that it does not support and defines all locale-specific characteristics.³

4.1.1 Abstract machine

[intro.abstract]

- ¹ The semantic descriptions in this document define a parameterized nondeterministic abstract machine. This document places no requirement on the structure of conforming implementations. In particular, they need not copy or emulate the structure of the abstract machine. Rather, conforming implementations are required to emulate (only) the observable behavior of the abstract machine as explained below.⁴

² “Correct execution” can include undefined behavior, depending on the data being processed; see Clause 3 and 6.8.1.

³ This documentation also defines implementation-defined behavior; see 6.8.1.

⁴ This provision is sometimes called the “as-if” rule, because an implementation is free to disregard any requirement of this document as long as the result is *as if* the requirement had been obeyed, as far as can be determined from the observable behavior of the program. For instance, an actual implementation need not evaluate part of an expression if it can deduce that its value is not used and that no side effects affecting the observable behavior of the program are produced.

- 2 Certain aspects and operations of the abstract machine are described in this document as implementation-defined (for example, `sizeof(int)`). These constitute the parameters of the abstract machine. Each implementation shall include documentation describing its characteristics and behavior in these respects.⁵ Such documentation shall define the instance of the abstract machine that corresponds to that implementation (referred to as the “corresponding instance” below).
- 3 Certain other aspects and operations of the abstract machine are described in this document as unspecified (for example, order of evaluation of arguments in a function call (8.5.1.2)). Where possible, this document defines a set of allowable behaviors. These define the nondeterministic aspects of the abstract machine. An instance of the abstract machine can thus have more than one possible execution for a given program and a given input.
- 4 Certain other operations are described in this document as undefined (for example, the effect of attempting to modify a `const` object). [Note: This document imposes no requirements on the behavior of programs that contain undefined behavior. — *end note*]
- 5 A conforming implementation executing a well-formed program shall produce the same observable behavior as one of the possible executions of the corresponding instance of the abstract machine with the same program and the same input. However, if any such execution contains an undefined operation, this document places no requirement on the implementation executing that program with that input (not even with regard to operations preceding the first undefined operation).
- 6 The least requirements on a conforming implementation are:
- (6.1) — Accesses through volatile glvalues are evaluated strictly according to the rules of the abstract machine.
- (6.2) — At program termination, all data written into files shall be identical to one of the possible results that execution of the program according to the abstract semantics would have produced.
- (6.3) — The input and output dynamics of interactive devices shall take place in such a fashion that prompting output is actually delivered before a program waits for input. What constitutes an interactive device is implementation-defined.

These collectively are referred to as the *observable behavior* of the program. [Note: More stringent correspondences between abstract and actual semantics may be defined by each implementation. — *end note*]

- 7 [Note: Operators can be regrouped according to the usual mathematical rules only where the operators really are associative or commutative.⁶ For example, in the following fragment

```
int a, b;
/* ... */
a = a + 32760 + b + 5;
```

the expression statement behaves exactly the same as

```
a = (((a + 32760) + b) + 5);
```

due to the associativity and precedence of these operators. Thus, the result of the sum `(a + 32760)` is next added to `b`, and that result is then added to 5 which results in the value assigned to `a`. On a machine in which overflows produce an exception and in which the range of values representable by an `int` is `[-32768, +32767]`, the implementation cannot rewrite this expression as

```
a = ((a + b) + 32765);
```

since if the values for `a` and `b` were, respectively, `-32754` and `-15`, the sum `a + b` would produce an exception while the original expression would not; nor can the expression be rewritten either as

```
a = ((a + 32765) + b);
```

or

```
a = (a + (b + 32765));
```

since the values for `a` and `b` might have been, respectively, `4` and `-8` or `-17` and `12`. However on a machine in which overflows do not produce an exception and in which the results of overflows are reversible, the above expression statement can be rewritten by the implementation in any of the above ways because the same result will occur. — *end note*

⁵) This documentation also includes conditionally-supported constructs and locale-specific behavior. See 4.1.

⁶) Overloaded operators are never assumed to be associative or commutative.

4.2 Structure of this document [intro.structure]

- 1 [Clause 5](#) through [Clause 19](#) describe the C++ programming language. That description includes detailed syntactic specifications in a form described in [4.3](#). For convenience, [Annex A](#) repeats all such syntactic specifications.
- 2 [Clause 21](#) through [Clause 34](#) and [Annex D](#) (the *library clauses*) describe the C++ standard library. That description includes detailed descriptions of the entities and macros that constitute the library, in a form described in [Clause 20](#).
- 3 [Annex B](#) recommends lower bounds on the capacity of conforming implementations.
- 4 [Annex C](#) summarizes the evolution of C++ since its first published description, and explains in detail the differences between C++ and C. Certain features of C++ exist solely for compatibility purposes; [Annex D](#) describes those features.
- 5 Throughout this document, each example is introduced by “[*Example*: ” and terminated by “ — *end example*]”. Each note is introduced by “[*Note*: ” and terminated by “ — *end note*]”. Examples and notes may be nested.

4.3 Syntax notation [syntax]

- 1 In the syntax notation used in this document, syntactic categories are indicated by *italic* type, and literal words and characters in **constant width** type. Alternatives are listed on separate lines except in a few cases where a long set of alternatives is marked by the phrase “one of”. If the text of an alternative is too long to fit on a line, the text is continued on subsequent lines indented from the first one. An optional terminal or non-terminal symbol is indicated by the subscript “*opt*”, so

{ *expression_{opt}* }

indicates an optional expression enclosed in braces.

- 2 Names for syntactic categories have generally been chosen according to the following rules:

- (2.1) — *X-name* is a use of an identifier in a context that determines its meaning (e.g., *class-name*, *typedef-name*).
- (2.2) — *X-id* is an identifier with no context-dependent meaning (e.g., *qualified-id*).
- (2.3) — *X-seq* is one or more *X*’s without intervening delimiters (e.g., *declaration-seq* is a sequence of declarations).
- (2.4) — *X-list* is one or more *X*’s separated by intervening commas (e.g., *identifier-list* is a sequence of identifiers separated by commas).

4.4 Acknowledgments [intro.ack]

- 1 The C++ programming language as described in this document is based on the language as described in Chapter R (Reference Manual) of Stroustrup: *The C++ Programming Language* (second edition, Addison-Wesley Publishing Company, ISBN 0-201-53992-6, copyright ©1991 AT&T). That, in turn, is based on the C programming language as described in Appendix A of Kernighan and Ritchie: *The C Programming Language* (Prentice-Hall, 1978, ISBN 0-13-110163-3, copyright ©1978 AT&T).
- 2 Portions of the library Clauses of this document are based on work by P.J. Plauger, which was published as *The Draft Standard C++ Library* (Prentice-Hall, ISBN 0-13-117003-1, copyright ©1995 P.J. Plauger).
- 3 POSIX® is a registered trademark of the Institute of Electrical and Electronic Engineers, Inc.
- 4 ECMAScript® is a registered trademark of Ecma International.
- 5 All rights in these originals are reserved.

5 Lexical conventions [lex]

5.1 Separate translation [lex.separate]

- ¹ The text of the program is kept in units called *source files* in this document. A source file together with all the headers (20.5.1.2) and source files included (19.2) via the preprocessing directive `#include`, less any source lines skipped by any of the conditional inclusion (19.1) preprocessing directives, is called a *translation unit*. [Note: A C++ program need not all be translated at the same time. — end note]
- ² [Note: Previously translated translation units and instantiation units can be preserved individually or in libraries. The separate translation units of a program communicate (6.5) by (for example) calls to functions whose identifiers have external linkage, manipulation of objects whose identifiers have external linkage, or manipulation of data files. Translation units can be separately translated and then later linked to produce an executable program (6.5). — end note]

5.2 Phases of translation [lex.phases]

- ¹ The precedence among the syntax rules of translation is specified by the following phases.⁷
1. Physical source file characters are mapped, in an implementation-defined manner, to the basic source character set (introducing new-line characters for end-of-line indicators) if necessary. The set of physical source file characters accepted is implementation-defined. Any source file character not in the basic source character set (5.3) is replaced by the *universal-character-name* that designates that character. An implementation may use any internal encoding, so long as an actual extended character encountered in the source file, and the same extended character expressed in the source file as a *universal-character-name* (e.g., using the `\uXXXX` notation), are handled equivalently except where this replacement is reverted (5.4) in a raw string literal.
 2. Each instance of a backslash character (`\`) immediately followed by a new-line character is deleted, splicing physical source lines to form logical source lines. Only the last backslash on any physical source line shall be eligible for being part of such a splice. Except for splices reverted in a raw string literal, if a splice results in a character sequence that matches the syntax of a *universal-character-name*, the behavior is undefined. A source file that is not empty and that does not end in a new-line character, or that ends in a new-line character immediately preceded by a backslash character before any such splicing takes place, shall be processed as if an additional new-line character were appended to the file.
 3. The source file is decomposed into preprocessing tokens (5.4) and sequences of white-space characters (including comments). A source file shall not end in a partial preprocessing token or in a partial comment.⁸ Each comment is replaced by one space character. New-line characters are retained. Whether each nonempty sequence of white-space characters other than new-line is retained or replaced by one space character is unspecified. The process of dividing a source file's characters into preprocessing tokens is context-dependent. [Example: See the handling of `<` within a `#include` preprocessing directive. — end example]
 4. Preprocessing directives are executed, macro invocations are expanded, and `_Pragma` unary operator expressions are executed. If a character sequence that matches the syntax of a *universal-character-name* is produced by token concatenation (19.3.3), the behavior is undefined. A `#include` preprocessing directive causes the named header or source file to be processed from phase 1 through phase 4, recursively. All preprocessing directives are then deleted.
 5. Each source character set member in a character literal or a string literal, as well as each escape sequence and *universal-character-name* in a character literal or a non-raw string literal, is converted to the corresponding member of the execution character set (5.13.3, 5.13.5); if there is no corresponding member, it is converted to an implementation-defined member other than the null (wide) character.⁹

⁷ Implementations must behave as if these separate phases occur, although in practice different phases might be folded together.

⁸ A partial preprocessing token would arise from a source file ending in the first portion of a multi-character token that requires a terminating sequence of characters, such as a *header-name* that is missing the closing `"` or `>`. A partial comment would arise from a source file ending with an unclosed `/*` comment.

⁹ An implementation need not convert all non-corresponding source characters to the same execution character.

6. Adjacent string literal tokens are concatenated.
7. White-space characters separating tokens are no longer significant. Each preprocessing token is converted into a token (5.6). The resulting tokens are syntactically and semantically analyzed and translated as a translation unit. [Note: The process of analyzing and translating the tokens may occasionally result in one token being replaced by a sequence of other tokens (17.2). — end note] [Note: Source files, translation units and translated translation units need not necessarily be stored as files, nor need there be any one-to-one correspondence between these entities and any external representation. The description is conceptual only, and does not specify any particular implementation. — end note]
8. Translated translation units and instantiation units are combined as follows: [Note: Some or all of these may be supplied from a library. — end note] Each translated translation unit is examined to produce a list of required instantiations. [Note: This may include instantiations which have been explicitly requested (17.8.2). — end note] The definitions of the required templates are located. It is implementation-defined whether the source of the translation units containing these definitions is required to be available. [Note: An implementation could encode sufficient information into the translated translation unit so as to ensure the source is not required here. — end note] All the required instantiations are performed to produce *instantiation units*. [Note: These are similar to translated translation units, but contain no references to uninstantiated templates and no template definitions. — end note] The program is ill-formed if any instantiation fails.
9. All external entity references are resolved. Library components are linked to satisfy external references to entities not defined in the current translation. All such translator output is collected into a program image which contains information needed for execution in its execution environment.

5.3 Character sets

[lex.charset]

- ¹ The *basic source character set* consists of 96 characters: the space character, the control characters representing horizontal tab, vertical tab, form feed, and new-line, plus the following 91 graphical characters:¹⁰

```

a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
0 1 2 3 4 5 6 7 8 9
_ { } [ ] # ( ) < > % : ; . ? * + - / ^ & | ~ ! = , \ " '

```

- ² The *universal-character-name* construct provides a way to name other characters.

hex-quad:

hexadecimal-digit hexadecimal-digit hexadecimal-digit hexadecimal-digit

universal-character-name:

`\u hex-quad`

`\U hex-quad hex-quad`

The character designated by the *universal-character-name* `\UNNNNNNNN` is that character whose character short name in ISO/IEC 10646 is `NNNNNNNN`; the character designated by the *universal-character-name* `\uNNNN` is that character whose character short name in ISO/IEC 10646 is `0000NNNN`. If the hexadecimal value for a *universal-character-name* corresponds to a surrogate code point (in the range `0xD800–0xDFFF`, inclusive), the program is ill-formed. Additionally, if the hexadecimal value for a *universal-character-name* outside the *c-char-sequence*, *s-char-sequence*, or *r-char-sequence* of a character or string literal corresponds to a control character (in either of the ranges `0x00–0x1F` or `0x7F–0x9F`, both inclusive) or to a character in the basic source character set, the program is ill-formed.¹¹

- ³ The *basic execution character set* and the *basic execution wide-character set* shall each contain all the members of the basic source character set, plus control characters representing alert, backspace, and carriage return, plus a *null character* (respectively, *null wide character*), whose value is 0. For each basic execution character set, the values of the members shall be non-negative and distinct from one another. In both the source and execution basic character sets, the value of each character after 0 in the above list of decimal digits shall be one greater than the value of the previous. The *execution character set* and the *execution wide-character set* are implementation-defined supersets of the basic execution character set and the basic

¹⁰ The glyphs for the members of the basic source character set are intended to identify characters from the subset of ISO/IEC 10646 which corresponds to the ASCII character set. However, because the mapping from source file characters to the source character set (described in translation phase 1) is specified as implementation-defined, an implementation is required to document how the basic source characters are represented in source files.

¹¹ A sequence of characters resembling a *universal-character-name* in an *r-char-sequence* (5.13.5) does not form a *universal-character-name*.

execution wide-character set, respectively. The values of the members of the execution character sets and the sets of additional members are locale-specific.

5.4 Preprocessing tokens

[lex.ptoken]

preprocessing-token:

header-name

identifier

pp-number

character-literal

user-defined-character-literal

string-literal

user-defined-string-literal

preprocessing-op-or-punc

each non-white-space character that cannot be one of the above

- 1 Each preprocessing token that is converted to a token (5.6) shall have the lexical form of a keyword, an identifier, a literal, an operator, or a punctuator.
- 2 A preprocessing token is the minimal lexical element of the language in translation phases 3 through 6. The categories of preprocessing token are: header names, identifiers, preprocessing numbers, character literals (including user-defined character literals), string literals (including user-defined string literals), preprocessing operators and punctuators, and single non-white-space characters that do not lexically match the other preprocessing token categories. If a ' or a " character matches the last category, the behavior is undefined. Preprocessing tokens can be separated by white space; this consists of comments (5.7), or white-space characters (space, horizontal tab, new-line, vertical tab, and form-feed), or both. As described in Clause 19, in certain circumstances during translation phase 4, white space (or the absence thereof) serves as more than preprocessing token separation. White space can appear within a preprocessing token only as part of a header name or between the quotation characters in a character literal or string literal.
- 3 If the input stream has been parsed into preprocessing tokens up to a given character:
 - (3.1) — If the next character begins a sequence of characters that could be the prefix and initial double quote of a raw string literal, such as R", the next preprocessing token shall be a raw string literal. Between the initial and final double quote characters of the raw string, any transformations performed in phases 1 and 2 (*universal-character-names* and line splicing) are reverted; this reversion shall apply before any *d-char*, *r-char*, or delimiting parenthesis is identified. The raw string literal is defined as the shortest sequence of characters that matches the raw-string pattern


```
encoding-prefixopt R raw-string
```
 - (3.2) — Otherwise, if the next three characters are <: and the subsequent character is neither : nor >, the <: is treated as a preprocessing token by itself and not as the first character of the alternative token <:.
 - (3.3) — Otherwise, the next preprocessing token is the longest sequence of characters that could constitute a preprocessing token, even if that would cause further lexical analysis to fail, except that a *header-name* (5.8) is only formed within a #include directive (19.2).

[Example:

```
#define R "x"
const char* s = R"y";           // ill-formed raw string, not "x" "y"
```

— end example]

- 4 [Example: The program fragment 0xe+foo is parsed as a preprocessing number token (one that is not a valid floating or integer literal token), even though a parse as three preprocessing tokens 0xe, +, and foo might produce a valid expression (for example, if foo were a macro defined as 1). Similarly, the program fragment 1E1 is parsed as a preprocessing number (one that is a valid floating literal token), whether or not E is a macro name. — end example]
- 5 [Example: The program fragment x++++y is parsed as x ++ ++ + y, which, if x and y have integral types, violates a constraint on increment operators, even though the parse x ++ + ++ y might yield a correct expression. — end example]

5.5 Alternative tokens

[lex.digraph]

- ¹ Alternative token representations are provided for some operators and punctuators.¹²
- ² In all respects of the language, each alternative token behaves the same, respectively, as its primary token, except for its spelling.¹³ The set of alternative tokens is defined in Table 1.

Table 1 — Alternative tokens

Alternative	Primary	Alternative	Primary	Alternative	Primary
<%	{	and	&&	and_eq	&=
%>	}	bitor		or_eq	=
<:	[or		xor_eq	^=
:>]	xor	^	not	!
%:	#	compl	~	not_eq	!=
%:%:	##	bitand	&		

5.6 Tokens

[lex.token]

token:

identifier
keyword
literal
operator
punctuator

- ¹ There are five kinds of tokens: identifiers, keywords, literals,¹⁴ operators, and other separators. Blanks, horizontal and vertical tabs, newlines, formfeeds, and comments (collectively, “white space”), as described below, are ignored except as they serve to separate tokens. [*Note:* Some white space is required to separate otherwise adjacent identifiers, keywords, numeric literals, and alternative tokens containing alphabetic characters. — *end note*]

5.7 Comments

[lex.comment]

- ¹ The characters `/*` start a comment, which terminates with the characters `*/`. These comments do not nest. The characters `//` start a comment, which terminates immediately before the next new-line character. If there is a form-feed or a vertical-tab character in such a comment, only white-space characters shall appear between it and the new-line that terminates the comment; no diagnostic is required. [*Note:* The comment characters `//`, `/*`, and `*/` have no special meaning within a `//` comment and are treated just like other characters. Similarly, the comment characters `//` and `/*` have no special meaning within a `/*` comment. — *end note*]

5.8 Header names

[lex.header]

header-name:

< *h-char-sequence* >
 " *q-char-sequence* "

h-char-sequence:

h-char
h-char-sequence h-char

h-char:

any member of the source character set except new-line and >

q-char-sequence:

q-char
q-char-sequence q-char

q-char:

any member of the source character set except new-line and "

¹² These include “digraphs” and additional reserved words. The term “digraph” (token consisting of two characters) is not perfectly descriptive, since one of the alternative *preprocessing-tokens* is `%:~:` and of course several primary tokens contain two characters. Nonetheless, those alternative tokens that aren’t lexical keywords are colloquially known as “digraphs”.

¹³ Thus the “stringized” values (19.3.2) of `[` and `<:` will be different, maintaining the source spelling, but the tokens can otherwise be freely interchanged.

¹⁴ Literals include strings and character and numeric literals.

- ¹ [Note: Header name preprocessing tokens only appear within a `#include` preprocessing directive (see 5.4). — end note] The sequences in both forms of *header-names* are mapped in an implementation-defined manner to headers or to external source file names as specified in 19.2.
- ² The appearance of either of the characters `'` or `\` or of either of the character sequences `/*` or `//` in a *q-char-sequence* or an *h-char-sequence* is conditionally-supported with implementation-defined semantics, as is the appearance of the character `"` in an *h-char-sequence*.¹⁵

5.9 Preprocessing numbers

[lex.ppnumber]

pp-number:

- digit*
- `.` *digit*
- pp-number digit*
- pp-number identifier-nondigit*
- pp-number ' digit*
- pp-number ' nondigit*
- pp-number e sign*
- pp-number E sign*
- pp-number p sign*
- pp-number P sign*
- pp-number .*

- ¹ Preprocessing number tokens lexically include all integer literal tokens (5.13.2) and all floating literal tokens (5.13.4).
- ² A preprocessing number does not have a type or a value; it acquires both after a successful conversion to an integer literal token or a floating literal token.

5.10 Identifiers

[lex.name]

identifier:

- identifier-nondigit*
- identifier identifier-nondigit*
- identifier digit*

identifier-nondigit:

- nondigit*
- universal-character-name*

nondigit: one of

```
a b c d e f g h i j k l m
n o p q r s t u v w x y z
A B C D E F G H I J K L M
N O P Q R S T U V W X Y Z _
```

digit: one of

```
0 1 2 3 4 5 6 7 8 9
```

- ¹ An identifier is an arbitrarily long sequence of letters and digits. Each *universal-character-name* in an identifier shall designate a character whose encoding in ISO/IEC 10646 falls into one of the ranges specified in Table 2. The initial element shall not be a *universal-character-name* designating a character whose encoding falls into one of the ranges specified in Table 3. Upper- and lower-case letters are different. All characters are significant.¹⁶
- ² The identifiers in Table 4 have a special meaning when appearing in a certain context. When referred to in the grammar, these identifiers are used explicitly rather than using the *identifier* grammar production. Unless otherwise specified, any ambiguity as to whether a given *identifier* has a special meaning is resolved to interpret the token as a regular *identifier*.
- ³ In addition, some identifiers are reserved for use by C++ implementations and shall not be used otherwise; no diagnostic is required.

¹⁵) Thus, a sequence of characters that resembles an escape sequence might result in an error, be interpreted as the character corresponding to the escape sequence, or have a completely different meaning, depending on the implementation.

¹⁶) On systems in which linkers cannot accept extended characters, an encoding of the *universal-character-name* may be used in forming valid external identifiers. For example, some otherwise unused character or sequence of characters may be used to encode the `\u` in a *universal-character-name*. Extended characters may produce a long external identifier, but C++ does not place a translation limit on significant characters for external identifiers. In C++, upper- and lower-case letters are considered different for all identifiers, including external identifiers.

Table 2 — Ranges of characters allowed

00A8	00AA	00AD	00AF	00B2-00B5
00B7-00BA	00BC-00BE	00C0-00D6	00D8-00F6	00F8-00FF
0100-167F	1681-180D	180F-1FFF		
200B-200D	202A-202E	203F-2040	2054	2060-206F
2070-218F	2460-24FF	2776-2793	2C00-2DFF	2E80-2FFF
3004-3007	3021-302F	3031-D7FF		
F900-FD3D	FD40-FDCF	FDF0-FE44	FE47-FFFF	
10000-1FFFFD	20000-2FFFFD	30000-3FFFFD	40000-4FFFFD	50000-5FFFFD
60000-6FFFFD	70000-7FFFFD	80000-8FFFFD	90000-9FFFFD	A0000-AFFFFD
B0000-BFFFFD	C0000-CFFFFD	D0000-DFFFFD	E0000-EFFFFD	

Table 3 — Ranges of characters disallowed initially (combining characters)

0300-036F	1DC0-1DFF	20D0-20FF	FE20-FE2F
-----------	-----------	-----------	-----------

Table 4 — Identifiers with special meaning

audit	axiom	final	override
-------	-------	-------	----------

- (3.1) — Each identifier that contains a double underscore `__` or begins with an underscore followed by an uppercase letter is reserved to the implementation for any use.
- (3.2) — Each identifier that begins with an underscore is reserved to the implementation for use as a name in the global namespace.

5.11 Keywords

[lex.key]

- ¹ The identifiers shown in Table 5 are reserved for use as keywords (that is, they are unconditionally treated as keywords in phase 7) except in an *attribute-token* (10.6.1):

Table 5 — Keywords

alignas	const_cast	for	public	thread_local
alignof	continue	friend	register	throw
asm	decltype	goto	reinterpret_cast	true
auto	default	if	requires	try
bool	delete	inline	return	typedef
break	do	int	short	typeid
case	double	long	signed	typename
catch	dynamic_cast	mutable	sizeof	union
char	else	namespace	static	unsigned
char16_t	enum	new	static_assert	using
char32_t	explicit	noexcept	static_cast	virtual
class	export	nullptr	struct	void
concept	extern	operator	switch	volatile
const	false	private	template	wchar_t
constexpr	float	protected	this	while

[Note: The `export` and `register` keywords are unused but are reserved for future use. — end note]

- ² Furthermore, the alternative representations shown in Table 6 for certain operators and punctuators (5.5) are reserved and shall not be used otherwise:

Table 6 — Alternative representations

and	and_eq	bitand	bitor	compl	not
not_eq	or	or_eq	xor	xor_eq	

5.12 Operators and punctuators

[lex.operators]

- ¹ The lexical representation of C++ programs includes a number of preprocessing tokens which are used in the syntax of the preprocessor or are converted into tokens for operators and punctuators:

preprocessing-op-or-punc: one of

{	}	[]	#	##	()	
<	:	<%	%>	%:	%::	;	:	...
new	delete	?	::	.	.*	->	->*	~
!	+	-	*	/	%	^	&	
=	+=	-=	*=	/=	%=	^=	&=	=
==	!=	<	>	<=	>=	<=>	&&	
<<	>>	<<=	>>=	++	--	,		
and	or	xor	not	bitand	bitor	compl		
and_eq	or_eq	xor_eq	not_eq					

Each *preprocessing-op-or-punc* is converted to a single token in translation phase 7 (5.2).

5.13 Literals

[lex.literal]

5.13.1 Kinds of literals

[lex.literal.kinds]

- ¹ There are several kinds of literals.¹⁷

literal:

integer-literal
character-literal
floating-literal
string-literal
boolean-literal
pointer-literal
user-defined-literal

5.13.2 Integer literals

[lex.icon]

integer-literal:

*binary-literal integer-suffix*_{opt}
*octal-literal integer-suffix*_{opt}
*decimal-literal integer-suffix*_{opt}
*hexadecimal-literal integer-suffix*_{opt}

binary-literal:

0b *binary-digit*
 0B *binary-digit*
binary-literal ' _{opt} *binary-digit*

octal-literal:

0
octal-literal ' _{opt} *octal-digit*

decimal-literal:

nonzero-digit
decimal-literal ' _{opt} *digit*

hexadecimal-literal:

hexadecimal-prefix hexadecimal-digit-sequence

binary-digit: one of

0 1

octal-digit: one of

0 1 2 3 4 5 6 7

nonzero-digit: one of

1 2 3 4 5 6 7 8 9

hexadecimal-prefix: one of

0x 0X

hexadecimal-digit-sequence:

hexadecimal-digit
hexadecimal-digit-sequence ' _{opt} *hexadecimal-digit*

¹⁷) The term “literal” generally designates, in this document, those tokens that are called “constants” in ISO C.

hexadecimal-digit: one of
 0 1 2 3 4 5 6 7 8 9
 a b c d e f
 A B C D E F

integer-suffix:
unsigned-suffix long-suffix_{opt}
unsigned-suffix long-long-suffix_{opt}
long-suffix unsigned-suffix_{opt}
long-long-suffix unsigned-suffix_{opt}

unsigned-suffix: one of
 u U

long-suffix: one of
 l L

long-long-suffix: one of
 ll LL

- ¹ An *integer literal* is a sequence of digits that has no period or exponent part, with optional separating single quotes that are ignored when determining its value. An integer literal may have a prefix that specifies its base and a suffix that specifies its type. The lexically first digit of the sequence of digits is the most significant. A *binary integer literal* (base two) begins with 0b or 0B and consists of a sequence of binary digits. A *octal integer literal* (base eight) begins with the digit 0 and consists of a sequence of octal digits.¹⁸ A *decimal integer literal* (base ten) begins with a digit other than 0 and consists of a sequence of decimal digits. A *hexadecimal integer literal* (base sixteen) begins with 0x or 0X and consists of a sequence of hexadecimal digits, which include the decimal digits and the letters a through f and A through F with decimal values ten through fifteen. [Example: The number twelve can be written 12, 014, 0XC, or 0b1100. The integer literals 1048576, 1'048'576, 0X100000, 0x10'0000, and 0'004'000'000 all have the same value. — end example]
- ² The type of an integer literal is the first of the corresponding list in Table 7 in which its value can be represented.

Table 7 — Types of integer literals

Suffix	Decimal literal	Binary, octal, or hexadecimal literal
none	int long int long long int	int unsigned int long int unsigned long int long long int unsigned long long int
u or U	unsigned int unsigned long int unsigned long long int	unsigned int unsigned long int unsigned long long int
l or L	long int long long int	long int unsigned long int long long int unsigned long long int
Both u or U and l or L	unsigned long int unsigned long long int	unsigned long int unsigned long long int
ll or LL	long long int	long long int unsigned long long int
Both u or U and ll or LL	unsigned long long int	unsigned long long int

- ³ If an integer literal cannot be represented by any type in its list and an extended integer type (6.7.1) can represent its value, it may have that extended integer type. If all of the types in the list for the integer literal are signed, the extended integer type shall be signed. If all of the types in the list for the integer literal are unsigned, the extended integer type shall be unsigned. If the list contains both signed and unsigned types,

¹⁸) The digits 8 and 9 are not octal digits.

the extended integer type may be signed or unsigned. A program is ill-formed if one of its translation units contains an integer literal that cannot be represented by any of the allowed types.

5.13.3 Character literals

[lex.ccon]

character-literal:

*encoding-prefix*_{opt} ' *c-char-sequence* '

encoding-prefix: one of

u8 u U L

c-char-sequence:

c-char

c-char-sequence *c-char*

c-char:

any member of the source character set except the single-quote ' , backslash \ , or new-line character

escape-sequence

universal-character-name

escape-sequence:

simple-escape-sequence

octal-escape-sequence

hexadecimal-escape-sequence

simple-escape-sequence: one of

\ ' \ " \ ? \ \

\ a \ b \ f \ n \ r \ t \ v

octal-escape-sequence:

\ *octal-digit*

\ *octal-digit* *octal-digit*

\ *octal-digit* *octal-digit* *octal-digit*

hexadecimal-escape-sequence:

\ x *hexadecimal-digit*

hexadecimal-escape-sequence *hexadecimal-digit*

- ¹ A character literal is one or more characters enclosed in single quotes, as in 'x', optionally preceded by u8, u, U, or L, as in u8'w', u'x', U'y', or L'z', respectively.
- ² A character literal that does not begin with u8, u, U, or L is an *ordinary character literal*. An ordinary character literal that contains a single *c-char* representable in the execution character set has type `char`, with value equal to the numerical value of the encoding of the *c-char* in the execution character set. An ordinary character literal that contains more than one *c-char* is a *multicharacter literal*. A multicharacter literal, or an ordinary character literal containing a single *c-char* not representable in the execution character set, is conditionally-supported, has type `int`, and has an implementation-defined value.
- ³ A character literal that begins with u8, such as u8'w', is a character literal of type `char`, known as a *UTF-8 character literal*. The value of a UTF-8 character literal is equal to its ISO/IEC 10646 code point value, provided that the code point value is representable with a single UTF-8 code unit (that is, provided it is in the C0 Controls and Basic Latin Unicode block). If the value is not representable with a single UTF-8 code unit, the program is ill-formed. A UTF-8 character literal containing multiple *c-chars* is ill-formed.
- ⁴ A character literal that begins with the letter u, such as u'x', is a character literal of type `char16_t`. The value of a `char16_t` character literal containing a single *c-char* is equal to its ISO/IEC 10646 code point value, provided that the code point value is representable with a single 16-bit code unit (that is, provided it is in the basic multi-lingual plane). If the value is not representable with a single 16-bit code unit, the program is ill-formed. A `char16_t` character literal containing multiple *c-chars* is ill-formed.
- ⁵ A character literal that begins with the letter U, such as U'y', is a character literal of type `char32_t`. The value of a `char32_t` character literal containing a single *c-char* is equal to its ISO/IEC 10646 code point value. A `char32_t` character literal containing multiple *c-chars* is ill-formed.
- ⁶ A character literal that begins with the letter L, such as L'z', is a *wide-character literal*. A wide-character literal has type `wchar_t`.¹⁹ The value of a wide-character literal containing a single *c-char* has value equal to the numerical value of the encoding of the *c-char* in the execution wide-character set, unless the *c-char* has no representation in the execution wide-character set, in which case the value is implementation-defined.

¹⁹ They are intended for character sets where a character does not fit into a single byte.

[*Note*: The type `wchar_t` is able to represent all members of the execution wide-character set (see 6.7.1). — *end note*] The value of a wide-character literal containing multiple *c-chars* is implementation-defined.

- 7 Certain non-graphic characters, the single quote `'`, the double quote `"`, the question mark `?`,²⁰ and the backslash `\`, can be represented according to Table 8. The double quote `"` and the question mark `?`, can be represented as themselves or by the escape sequences `\"` and `\?` respectively, but the single quote `'` and the backslash `\` shall be represented by the escape sequences `\'` and `\\` respectively. Escape sequences in which the character following the backslash is not listed in Table 8 are conditionally-supported, with implementation-defined semantics. An escape sequence specifies a single character.

Table 8 — Escape sequences

new-line	NL(LF)	<code>\n</code>
horizontal tab	HT	<code>\t</code>
vertical tab	VT	<code>\v</code>
backspace	BS	<code>\b</code>
carriage return	CR	<code>\r</code>
form feed	FF	<code>\f</code>
alert	BEL	<code>\a</code>
backslash	<code>\</code>	<code>\\</code>
question mark	<code>?</code>	<code>\?</code>
single quote	<code>'</code>	<code>\'</code>
double quote	<code>"</code>	<code>\"</code>
octal number	<i>ooo</i>	<code>\ooo</code>
hex number	<i>hhh</i>	<code>\xhhh</code>

- 8 The escape `\ooo` consists of the backslash followed by one, two, or three octal digits that are taken to specify the value of the desired character. The escape `\xhhh` consists of the backslash followed by `x` followed by one or more hexadecimal digits that are taken to specify the value of the desired character. There is no limit to the number of digits in a hexadecimal sequence. A sequence of octal or hexadecimal digits is terminated by the first character that is not an octal digit or a hexadecimal digit, respectively. The value of a character literal is implementation-defined if it falls outside of the implementation-defined range defined for `char` (for character literals with no prefix) or `wchar_t` (for character literals prefixed by `L`). [*Note*: If the value of a character literal prefixed by `u`, `u8`, or `U` is outside the range defined for its type, the program is ill-formed. — *end note*]
- 9 A *universal-character-name* is translated to the encoding, in the appropriate execution character set, of the character named. If there is no such encoding, the *universal-character-name* is translated to an implementation-defined encoding. [*Note*: In translation phase 1, a *universal-character-name* is introduced whenever an actual extended character is encountered in the source text. Therefore, all extended characters are described in terms of *universal-character-names*. However, the actual compiler implementation may use its own native character set, so long as the same results are obtained. — *end note*]

5.13.4 Floating literals

[lex.fcon]

floating-literal:

decimal-floating-literal

hexadecimal-floating-literal

decimal-floating-literal:

fractional-constant *exponent-part*_{opt} *floating-suffix*_{opt}

digit-sequence *exponent-part* *floating-suffix*_{opt}

hexadecimal-floating-literal:

hexadecimal-prefix *hexadecimal-fractional-constant* *binary-exponent-part* *floating-suffix*_{opt}

hexadecimal-prefix *hexadecimal-digit-sequence* *binary-exponent-part* *floating-suffix*_{opt}

fractional-constant:

*digit-sequence*_{opt} `.` *digit-sequence*

digit-sequence `.`

²⁰⁾ Using an escape sequence for a question mark is supported for compatibility with ISO C++ 2014 and ISO C.

hexadecimal-fractional-constant:
*hexadecimal-digit-sequence*_{opt} . *hexadecimal-digit-sequence*
hexadecimal-digit-sequence .

exponent-part:
e *sign*_{opt} *digit-sequence*
E *sign*_{opt} *digit-sequence*

binary-exponent-part:
p *sign*_{opt} *digit-sequence*
P *sign*_{opt} *digit-sequence*

sign: one of
+ -

digit-sequence:
digit
digit-sequence ' _{opt} *digit*

floating-suffix: one of
f l F L

- ¹ A floating literal consists of an optional prefix specifying a base, an integer part, a radix point, a fraction part, an **e**, **E**, **p** or **P**, an optionally signed integer exponent, and an optional type suffix. The integer and fraction parts both consist of a sequence of decimal (base ten) digits if there is no prefix, or hexadecimal (base sixteen) digits if the prefix is **0x** or **0X**. The floating literal is a *decimal floating literal* in the former case and a *hexadecimal floating literal* in the latter case. Optional separating single quotes in a *digit-sequence* or *hexadecimal-digit-sequence* are ignored when determining its value. [*Example*: The floating literals **1.602'176'565e-19** and **1.602176565e-19** have the same value. — *end example*] Either the integer part or the fraction part (not both) can be omitted. Either the radix point or the letter **e** or **E** and the exponent (not both) can be omitted from a decimal floating literal. The radix point (but not the exponent) can be omitted from a hexadecimal floating literal. The integer part, the optional radix point, and the optional fraction part, form the *significand* of the floating literal. In a decimal floating literal, the exponent, if present, indicates the power of 10 by which the significand is to be scaled. In a hexadecimal floating literal, the exponent indicates the power of 2 by which the significand is to be scaled. [*Example*: The floating literals **49.625** and **0xC.68p+2** have the same value. — *end example*] If the scaled value is in the range of representable values for its type, the result is the scaled value if representable, else the larger or smaller representable value nearest the scaled value, chosen in an implementation-defined manner. The type of a floating literal is **double** unless explicitly specified by a suffix. The suffixes **f** and **F** specify **float**, the suffixes **l** and **L** specify **long double**. If the scaled value is not in the range of representable values for its type, the program is ill-formed.

5.13.5 String literals

[lex.string]

string-literal:
*encoding-prefix*_{opt} " *s-char-sequence*_{opt} "
*encoding-prefix*_{opt} **R** *raw-string*

s-char-sequence:
s-char
s-char-sequence *s-char*

s-char:
any member of the source character set except the double-quote **"**, backslash ****, or new-line character
escape-sequence
universal-character-name

raw-string:
" *d-char-sequence*_{opt} (*r-char-sequence*_{opt}) *d-char-sequence*_{opt} "

r-char-sequence:
r-char
r-char-sequence *r-char*

r-char:
any member of the source character set, except a right parenthesis **)** followed by
the initial *d-char-sequence* (which may be empty) followed by a double quote **"**.

d-char-sequence:
d-char
d-char-sequence *d-char*

d-char:

any member of the basic source character set except:

space, the left parenthesis (, the right parenthesis), the backslash \, and the control characters representing horizontal tab, vertical tab, form feed, and newline.

- 1 A *string-literal* is a sequence of characters (as defined in 5.13.3) surrounded by double quotes, optionally prefixed by R, u8, u8R, u, uR, U, UR, L, or LR, as in "...", R"(...)", u8"...", u8R"**(...)**", u"...", uR"*~(...)*~", U"...", UR"zzz(...)zzz", L"...", or LR"(...)", respectively.
- 2 A *string-literal* that has an R in the prefix is a *raw string literal*. The *d-char-sequence* serves as a delimiter. The terminating *d-char-sequence* of a *raw-string* is the same sequence of characters as the initial *d-char-sequence*. A *d-char-sequence* shall consist of at most 16 characters.

3 [Note: The characters ' (' and ') ' are permitted in a *raw-string*. Thus, R"delimiter((a|b))delimiter" is equivalent to "(a|b)". — end note]

4 [Note: A source-file new-line in a raw string literal results in a new-line in the resulting execution string literal. Assuming no whitespace at the beginning of lines in the following example, the assert will succeed:

```
const char* p = R"(a\
b
c)";
assert(std::strcmp(p, "a\\nb\\nc") == 0);
```

— end note]

5 [Example: The raw string

```
R"a(
)\
a"
)a"
```

is equivalent to "\n)\\\na\"n". The raw string

```
R"(x = "\"y\"")"
```

is equivalent to "x = \"\\\"y\\\"\"". — end example]

- 6 After translation phase 6, a *string-literal* that does not begin with an *encoding-prefix* is an *ordinary string literal*, and is initialized with the given characters.
- 7 A *string-literal* that begins with u8, such as u8"asdf", is a *UTF-8 string literal*.
- 8 Ordinary string literals and UTF-8 string literals are also referred to as narrow string literals. A narrow string literal has type “array of *n* const char”, where *n* is the size of the string as defined below, and has static storage duration (6.6.4).
- 9 For a UTF-8 string literal, each successive element of the object representation (6.7) has the value of the corresponding code unit of the UTF-8 encoding of the string.
- 10 A *string-literal* that begins with u, such as u"asdf", is a char16_t string literal. A char16_t string literal has type “array of *n* const char16_t”, where *n* is the size of the string as defined below; it is initialized with the given characters. A single *c-char* may produce more than one char16_t character in the form of surrogate pairs.
- 11 A *string-literal* that begins with U, such as U"asdf", is a char32_t string literal. A char32_t string literal has type “array of *n* const char32_t”, where *n* is the size of the string as defined below; it is initialized with the given characters.
- 12 A *string-literal* that begins with L, such as L"asdf", is a *wide string literal*. A wide string literal has type “array of *n* const wchar_t”, where *n* is the size of the string as defined below; it is initialized with the given characters.
- 13 In translation phase 6 (5.2), adjacent *string-literals* are concatenated. If both *string-literals* have the same *encoding-prefix*, the resulting concatenated string literal has that *encoding-prefix*. If one *string-literal* has no *encoding-prefix*, it is treated as a *string-literal* of the same *encoding-prefix* as the other operand. If a UTF-8 string literal token is adjacent to a wide string literal token, the program is ill-formed. Any other concatenations are conditionally-supported with implementation-defined behavior. [Note: This concatenation is an interpretation, not a conversion. Because the interpretation happens in translation phase 6 (after each character from a string literal has been translated into a value from the appropriate character set), a

string-literal's initial rawness has no effect on the interpretation or well-formedness of the concatenation. — *end note*] Table 9 has some examples of valid concatenations.

Table 9 — String literal concatenations

Source		Means	Source		Means	Source		Means
u"a"	u"b"	u"ab"	U"a"	U"b"	U"ab"	L"a"	L"b"	L"ab"
u"a"	"b"	u"ab"	U"a"	"b"	U"ab"	L"a"	"b"	L"ab"
"a"	u"b"	u"ab"	"a"	U"b"	U"ab"	"a"	L"b"	L"ab"

Characters in concatenated strings are kept distinct.

[*Example:*

```
"\xA" "B"
```

contains the two characters 'xA' and 'B' after concatenation (and not the single hexadecimal character 'xAB'). — *end example*]

- 14 After any necessary concatenation, in translation phase 7 (5.2), '\0' is appended to every string literal so that programs that scan a string can find its end.
- 15 Escape sequences and *universal-character-names* in non-raw string literals have the same meaning as in character literals (5.13.3), except that the single quote ' is representable either by itself or by the escape sequence \', and the double quote " shall be preceded by a \, and except that a *universal-character-name* in a `char16_t` string literal may yield a surrogate pair. In a narrow string literal, a *universal-character-name* may map to more than one `char` element due to *multibyte encoding*. The size of a `char32_t` or wide string literal is the total number of escape sequences, *universal-character-names*, and other characters, plus one for the terminating U'\0' or L'\0'. The size of a `char16_t` string literal is the total number of escape sequences, *universal-character-names*, and other characters, plus one for each character requiring a surrogate pair, plus one for the terminating u'\0'. [Note: The size of a `char16_t` string literal is the number of code units, not the number of characters. — *end note*] Within `char32_t` and `char16_t` string literals, any *universal-character-names* shall be within the range 0x0 to 0x10FFFF. The size of a narrow string literal is the total number of escape sequences and other characters, plus at least one for the multibyte encoding of each *universal-character-name*, plus one for the terminating '\0'.
- 16 Evaluating a *string-literal* results in a string literal object with static storage duration, initialized from the given characters as specified above. Whether all string literals are distinct (that is, are stored in nonoverlapping objects) and whether successive evaluations of a *string-literal* yield the same or a different object is unspecified. [Note: The effect of attempting to modify a string literal is undefined. — *end note*]

5.13.6 Boolean literals

[lex.bool]

boolean-literal:

```
false
true
```

- 1 The Boolean literals are the keywords `false` and `true`. Such literals are prvalues and have type `bool`.

5.13.7 Pointer literals

[lex.nullptr]

pointer-literal:

```
nullptr
```

- 1 The pointer literal is the keyword `nullptr`. It is a prvalue of type `std::nullptr_t`. [Note: `std::nullptr_t` is a distinct type that is neither a pointer type nor a pointer-to-member type; rather, a prvalue of this type is a null pointer constant and can be converted to a null pointer value or null member pointer value. See 7.11 and 7.12. — *end note*]

5.13.8 User-defined literals

[lex.ext]

user-defined-literal:

```
user-defined-integer-literal
user-defined-floating-literal
user-defined-string-literal
user-defined-character-literal
```

user-defined-integer-literal:
decimal-literal ud-suffix
octal-literal ud-suffix
hexadecimal-literal ud-suffix
binary-literal ud-suffix

user-defined-floating-literal:
fractional-constant exponent-part_{opt} ud-suffix
digit-sequence exponent-part ud-suffix
hexadecimal-prefix hexadecimal-fractional-constant binary-exponent-part ud-suffix
hexadecimal-prefix hexadecimal-digit-sequence binary-exponent-part ud-suffix

user-defined-string-literal:
string-literal ud-suffix

user-defined-character-literal:
character-literal ud-suffix

ud-suffix:
identifier

- ¹ If a token matches both *user-defined-literal* and another *literal* kind, it is treated as the latter. [Example: 123_km is a *user-defined-literal*, but 12LL is an *integer-literal*. — end example] The syntactic non-terminal preceding the *ud-suffix* in a *user-defined-literal* is taken to be the longest sequence of characters that could match that non-terminal.
- ² A *user-defined-literal* is treated as a call to a literal operator or literal operator template (16.5.8). To determine the form of this call for a given *user-defined-literal* *L* with *ud-suffix* *X*, the *literal-operator-id* whose literal suffix identifier is *X* is looked up in the context of *L* using the rules for unqualified name lookup (6.4.1). Let *S* be the set of declarations found by this lookup. *S* shall not be empty.
- ³ If *L* is a *user-defined-integer-literal*, let *n* be the literal without its *ud-suffix*. If *S* contains a literal operator with parameter type `unsigned long long`, the literal *L* is treated as a call of the form

```
operator "" X(nULL)
```

Otherwise, *S* shall contain a raw literal operator or a numeric literal operator template (16.5.8) but not both. If *S* contains a raw literal operator, the literal *L* is treated as a call of the form

```
operator "" X("n")
```

Otherwise (*S* contains a numeric literal operator template), *L* is treated as a call of the form

```
operator "" X<'c1', 'c2', ... 'ck'>()
```

where *n* is the source character sequence $c_1c_2\dots c_k$. [Note: The sequence $c_1c_2\dots c_k$ can only contain characters from the basic source character set. — end note]

- ⁴ If *L* is a *user-defined-floating-literal*, let *f* be the literal without its *ud-suffix*. If *S* contains a literal operator with parameter type `long double`, the literal *L* is treated as a call of the form

```
operator "" X(fL)
```

Otherwise, *S* shall contain a raw literal operator or a numeric literal operator template (16.5.8) but not both. If *S* contains a raw literal operator, the *literal* *L* is treated as a call of the form

```
operator "" X("f")
```

Otherwise (*S* contains a numeric literal operator template), *L* is treated as a call of the form

```
operator "" X<'c1', 'c2', ... 'ck'>()
```

where *f* is the source character sequence $c_1c_2\dots c_k$. [Note: The sequence $c_1c_2\dots c_k$ can only contain characters from the basic source character set. — end note]

- ⁵ If *L* is a *user-defined-string-literal*, let *str* be the literal without its *ud-suffix* and let *len* be the number of code units in *str* (i.e., its length excluding the terminating null character). If *S* contains a literal operator template with a non-type template parameter for which *str* is a well-formed *template-argument*, the literal *L* is treated as a call of the form

```
operator "" X<str>()
```

Otherwise, the literal *L* is treated as a call of the form

```
operator "" X(str, len)
```

- ⁶ If *L* is a *user-defined-character-literal*, let *ch* be the literal without its *ud-suffix*. *S* shall contain a literal operator (16.5.8) whose only parameter has the type of *ch* and the literal *L* is treated as a call of the form

```
operator "" X(ch)
```

- ⁷ [Example:

```
long double operator "" _w(long double);
std::string operator "" _w(const char16_t*, std::size_t);
unsigned operator "" _w(const char*);
int main() {
    1.2_w;      // calls operator "" _w(1.2L)
    u"one"_w;   // calls operator "" _w(u"one", 3)
    12_w;      // calls operator "" _w("12")
    "two"_w;   // error: no applicable literal operator
}
```

— end example]

- ⁸ In translation phase 6 (5.2), adjacent string literals are concatenated and *user-defined-string-literals* are considered string literals for that purpose. During concatenation, *ud-suffixes* are removed and ignored and the concatenation process occurs as described in 5.13.5. At the end of phase 6, if a string literal is the result of a concatenation involving at least one *user-defined-string-literal*, all the participating *user-defined-string-literals* shall have the same *ud-suffix* and that suffix is applied to the result of the concatenation.

- ⁹ [Example:

```
int main() {
    L"A" "B" "C"_x; // OK: same as L"ABC"_x
    "P"_x "Q" "R"_y; // error: two different ud-suffixes
}
```

— end example]

6 Basics

[basic]

- ¹ [Note: This Clause presents the basic concepts of the C++ language. It explains the difference between an object and a name and how they relate to the value categories for expressions. It introduces the concepts of a declaration and a definition and presents C++'s notion of type, scope, linkage, and storage duration. The mechanisms for starting and terminating a program are discussed. Finally, this Clause presents the fundamental types of the language and lists the ways of constructing compound types from these. — *end note*]
- ² [Note: This Clause does not cover concepts that affect only a single part of the language. Such concepts are discussed in the relevant Clauses. — *end note*]
- ³ An *entity* is a value, object, reference, structured binding, function, enumerator, type, class member, bit-field, template, template specialization, namespace, or pack.
- ⁴ A *name* is a use of an *identifier* (5.10), *operator-function-id* (16.5), *literal-operator-id* (16.5.8), *conversion-function-id* (15.3.2), or *template-id* (17.2) that denotes an entity or label (9.6.4, 9.1).
- ⁵ Every name that denotes an entity is introduced by a *declaration*. Every name that denotes a label is introduced either by a *goto* statement (9.6.4) or a *labeled-statement* (9.1).
- ⁶ A *variable* is introduced by the declaration of a reference other than a non-static data member or of an object. The variable's name, if any, denotes the reference or object.
- ⁷ A *local entity* is a variable with automatic storage duration (6.6.4.3), a structured binding (11.5) whose corresponding variable is such an entity, or the **this* object (8.4.2).
- ⁸ Some names denote types or templates. In general, whenever a name is encountered it is necessary to determine whether that name denotes one of these entities before continuing to parse the program that contains it. The process that determines this is called *name lookup* (6.4).
- ⁹ Two names are *the same* if
- (9.1) — they are *identifiers* composed of the same character sequence, or
 - (9.2) — they are *operator-function-ids* formed with the same operator, or
 - (9.3) — they are *conversion-function-ids* formed with the same type, or
 - (9.4) — they are *template-ids* that refer to the same class, function, or variable (17.5), or
 - (9.5) — they are the names of literal operators (16.5.8) formed with the same literal suffix identifier.
- ¹⁰ A name used in more than one translation unit can potentially refer to the same entity in these translation units depending on the linkage (6.5) of the name specified in each translation unit.

6.1 Declarations and definitions

[basic.def]

- ¹ A declaration (Clause 10) may introduce one or more names into a translation unit or redeclare names introduced by previous declarations. If so, the declaration specifies the interpretation and attributes of these names. A declaration may also have effects including:
- (1.1) — a static assertion (Clause 10),
 - (1.2) — controlling template instantiation (17.8.2),
 - (1.3) — guiding template argument deduction for constructors (17.10),
 - (1.4) — use of attributes (Clause 10), and
 - (1.5) — nothing (in the case of an *empty-declaration*).
- ² Each entity declared by a *declaration* is also *defined* by that declaration unless:
- (2.1) — it declares a function without specifying the function's body (11.4),
 - (2.2) — it contains the **extern** specifier (10.1.1) or a *linkage-specification*²¹ (10.5) and neither an *initializer* nor a *function-body*,

²¹) Appearing inside the brace-enclosed *declaration-seq* in a *linkage-specification* does not affect whether a declaration is a definition.

- (2.3) — it declares a non-inline static data member in a class definition (12.2, 12.2.3),
- (2.4) — it declares a static data member outside a class definition and the variable was defined within the class with the `constexpr` specifier (this usage is deprecated; see D.4),
- (2.5) — it is introduced by an *elaborated-type-specifier* (12.1),
- (2.6) — it is an *opaque-enum-declaration* (10.2),
- (2.7) — it is a *template-parameter* (17.1),
- (2.8) — it is a *parameter-declaration* (11.3.5) in a function declarator that is not the *declarator* of a *function-definition*,
- (2.9) — it is a `typedef` declaration (10.1.3),
- (2.10) — it is an *alias-declaration* (10.1.3),
- (2.11) — it is a *using-declaration* (10.3.3),
- (2.12) — it is a *deduction-guide* (17.10),
- (2.13) — it is a *static_assert-declaration* (Clause 10),
- (2.14) — it is an *attribute-declaration* (Clause 10),
- (2.15) — it is an *empty-declaration* (Clause 10),
- (2.16) — it is a *using-directive* (10.3.4),
- (2.17) — it is an explicit instantiation declaration (17.8.2), or
- (2.18) — it is an explicit specialization (17.8.3) whose *declaration* is not a definition.

A declaration is said to be a *definition* of each entity that it defines. [*Example*: All but one of the following are definitions:

```

int a;                // defines a
extern const int c = 1; // defines c
int f(int x) { return x+a; } // defines f and defines x
struct S { int a; int b; }; // defines S, S::a, and S::b
struct X {           // defines X
    int x;           // defines non-static data member x
    static int y;    // declares static data member y
    X(): x(0) { }    // defines a constructor of X
};
int X::y = 1;        // defines X::y
enum { up, down };  // defines up and down
namespace N { int d; } // defines N and N::d
namespace N1 = N;   // defines N1
X anX;              // defines anX

```

whereas these are just declarations:

```

extern int a;         // declares a
extern const int c;  // declares c
int f(int);          // declares f
struct S;            // declares S
typedef int Int;     // declares Int
extern X anotherX;   // declares anotherX
using N::d;          // declares d

```

— *end example*]

- ³ [*Note*: In some circumstances, C++ implementations implicitly define the default constructor (15.1), copy constructor (15.8), move constructor (15.8), copy assignment operator (15.8), move assignment operator (15.8), or destructor (15.4) member functions. — *end note*] [*Example*: Given

```

#include <string>

struct C {
    std::string s; // std::string is the standard library class (Clause 25)
};

```

```
int main() {
    C a;
    C b = a;
    b = a;
}
```

the implementation will implicitly define functions to make the definition of `C` equivalent to

```
struct C {
    std::string s;
    C() : s() { }
    C(const C& x): s(x.s) { }
    C(C&& x): s(static_cast<std::string&&>(x.s)) { }
    // : s(std::move(x.s)) { }
    C& operator=(const C& x) { s = x.s; return *this; }
    C& operator=(C&& x) { s = static_cast<std::string&&>(x.s); return *this; }
    // { s = std::move(x.s); return *this; }
    ~C() { }
};
```

— end example]

⁴ [Note: A class name can also be implicitly declared by an *elaborated-type-specifier* (10.1.7.3). — end note]

⁵ In the definition of an object, the type of that object shall not be an incomplete type (6.7), an abstract class type (13.4), or a (possibly multi-dimensional) array thereof.

6.2 One-definition rule

[basic.def.odr]

¹ No translation unit shall contain more than one definition of any variable, function, class type, enumeration type, or template.

² An expression is *potentially evaluated* unless it is an unevaluated operand (8.2) or a subexpression thereof. The set of *potential results* of an expression `e` is defined as follows:

- (2.1) — If `e` is an *id-expression* (8.4.4), the set contains only `e`.
- (2.2) — If `e` is a subscripting operation (8.5.1.1) with an array operand, the set contains the potential results of that operand.
- (2.3) — If `e` is a class member access expression (8.5.1.5), the set contains the potential results of the object expression.
- (2.4) — If `e` is a pointer-to-member expression (8.5.4) whose second operand is a constant expression, the set contains the potential results of the object expression.
- (2.5) — If `e` has the form `(e1)`, the set contains the potential results of `e1`.
- (2.6) — If `e` is a glvalue conditional expression (8.5.16), the set is the union of the sets of potential results of the second and third operands.
- (2.7) — If `e` is a comma expression (8.5.19), the set contains the potential results of the right operand.
- (2.8) — Otherwise, the set is empty.

[Note: This set is a (possibly-empty) set of *id-expressions*, each of which is either `e` or a subexpression of `e`.
[Example: In the following example, the set of potential results of the initializer of `n` contains the first `S::x` subexpression, but not the second `S::x` subexpression.

```
struct S { static const int x = 0; };
const int &f(const int &r);
int n = b ? (1, S::x)           // S::x is not odr-used here
           : f(S::x);         // S::x is odr-used here, so a definition is required
```

— end example] — end note]

³ A function is *named by an expression* as follows:

- (3.1) — A function whose name appears in an expression is named by that expression if it is the unique lookup result or the selected member of a set of overloaded functions (6.4, 16.3, 16.4), unless it is a pure virtual function and either its name is not explicitly qualified or the expression forms a pointer to member (8.5.2.1). [Note: This covers taking the address of functions (7.3, 8.5.2.1), calls to named functions (8.5.1.2), operator overloading (Clause 16), user-defined conversions (15.3.2), allocation

functions for placement *new-expressions* (8.5.2.4), as well as non-default initialization (11.6). A constructor selected to copy or move an object of class type is considered to be named by an expression even if the call is actually elided by the implementation (15.8). — *end note*]

- (3.2) — An allocation or deallocation function for a class is named by a *new-expression* as specified in 8.5.2.4 and 15.5.
- (3.3) — A deallocation function for a class is named by a delete expression as specified in 8.5.2.5 and 15.5.
- 4 A variable *x* whose name appears as a potentially-evaluated expression *ex* is *odr-used* by *ex* unless applying the lvalue-to-rvalue conversion (7.1) to *x* yields a constant expression (8.6) that does not invoke any non-trivial functions and, if *x* is an object, *ex* is an element of the set of potential results of an expression *e*, where either the lvalue-to-rvalue conversion (7.1) is applied to *e*, or *e* is a discarded-value expression (8.2).
- 5 A structured binding is odr-used if it appears as a potentially-evaluated expression.
- 6 **this* is odr-used if *this* appears as a potentially-evaluated expression (including as the result of the implicit transformation in the body of a non-static member function (12.2.2)).
- 7 A virtual member function is odr-used if it is not pure. A function is odr-used if it is named by a potentially-evaluated expression. A non-placement allocation or deallocation function for a class is odr-used by the definition of a constructor of that class. A non-placement deallocation function for a class is odr-used by the definition of the destructor of that class, or by being selected by the lookup at the point of definition of a virtual destructor (15.4).²²
- 8 An assignment operator function in a class is odr-used by an implicitly-defined copy-assignment or move-assignment function for another class as specified in 15.8. A constructor for a class is odr-used as specified in 11.6. A destructor for a class is odr-used if it is potentially invoked (15.4).
- 9 A local entity (Clause 6) is *odr-usable* in a declarative region (6.3.1) if:
 - (9.1) — the local entity is either not **this*, or an enclosing class or non-lambda function parameter scope exists and, if the innermost such scope is a function parameter scope, it corresponds to a non-static member function, and
 - (9.2) — for each intervening declarative region (6.3.1) between the point at which the entity is introduced and the region (where **this* is considered to be introduced within the innermost enclosing class or non-lambda function definition scope), either:
 - (9.2.1) — the declarative region is a block scope, or
 - (9.2.2) — the declarative region is the function parameter scope of a *lambda-expression* that has a *simple-capture* naming the entity or has a *capture-default*.

If a local entity is odr-used in a declarative region in which it is not odr-usable, the program is ill-formed. [*Example*:

```
void f(int n) {
  [] { n = 1; };           // error, n is not odr-usable due to intervening lambda-expression
  struct A {
    void f() { n = 2; }    // error, n is not odr-usable due to intervening function definition scope
  };
  void g(int = n);        // error, n is not odr-usable due to intervening function parameter scope
  [&] { [n]{ return n; }; }; // OK
}
```

— *end example*]

- 10 Every program shall contain exactly one definition of every non-inline function or variable that is odr-used in that program outside of a discarded statement (9.4.1); no diagnostic required. The definition can appear explicitly in the program, it can be found in the standard or a user-defined library, or (when appropriate) it is implicitly defined (see 15.1, 15.4 and 15.8). An inline function or variable shall be defined in every translation unit in which it is odr-used outside of a discarded statement.
- 11 Exactly one definition of a class is required in a translation unit if the class is used in a way that requires the class type to be complete. [*Example*: The following complete translation unit is well-formed, even though it never defines *X*:

²²) An implementation is not required to call allocation and deallocation functions from constructors or destructors; however, this is a permissible implementation technique.

```

struct X;           // declare X as a struct type
struct X* x1;      // use X in pointer formation
X* x2;             // use X in pointer formation

```

— *end example*] [Note: The rules for declarations and expressions describe in which contexts complete class types are required. A class type T must be complete if:

- (11.1) — an object of type T is defined (6.1), or
- (11.2) — a non-static class data member of type T is declared (12.2), or
- (11.3) — T is used as the allocated type or array element type in a *new-expression* (8.5.2.4), or
- (11.4) — an lvalue-to-rvalue conversion is applied to a glvalue referring to an object of type T (7.1), or
- (11.5) — an expression is converted (either implicitly or explicitly) to type T (Clause 7, 8.5.1.3, 8.5.1.7, 8.5.1.9, 8.5.3), or
- (11.6) — an expression that is not a null pointer constant, and has type other than *cv void**, is converted to the type pointer to T or reference to T using a standard conversion (Clause 7), a `dynamic_cast` (8.5.1.7) or a `static_cast` (8.5.1.9), or
- (11.7) — a class member access operator is applied to an expression of type T (8.5.1.5), or
- (11.8) — the `typeid` operator (8.5.1.8) or the `sizeof` operator (8.5.2.3) is applied to an operand of type T, or
- (11.9) — a function with a return type or argument type of type T is defined (6.1) or called (8.5.1.2), or
- (11.10) — a class with a base class of type T is defined (Clause 13), or
- (11.11) — an lvalue of type T is assigned to (8.5.18), or
- (11.12) — the type T is the subject of an `alignof` expression (8.5.2.6), or
- (11.13) — an *exception-declaration* has type T, reference to T, or pointer to T (18.3).

— *end note*]

- ¹² There can be more than one definition of a class type (Clause 12), enumeration type (10.2), inline function with external linkage (10.1.6), inline variable with external linkage (10.1.6), class template (Clause 17), non-static function template (17.6.6), concept (17.6.8), static data member of a class template (17.6.1.3), member function of a class template (17.6.1.1), or template specialization for which some template parameters are not specified (17.8, 17.6.5) in a program provided that each definition appears in a different translation unit, and provided the definitions satisfy the following requirements. Given such an entity named D defined in more than one translation unit, then

- (12.1) — each definition of D shall consist of the same sequence of tokens; and
- (12.2) — in each definition of D, corresponding names, looked up according to 6.4, shall refer to an entity defined within the definition of D, or shall refer to the same entity, after overload resolution (16.3) and after matching of partial template specialization (17.9.3), except that a name can refer to
 - (12.2.1) — a non-volatile const object with internal or no linkage if the object
 - (12.2.1.1) — has the same literal type in all definitions of D,
 - (12.2.1.2) — is initialized with a constant expression (8.6),
 - (12.2.1.3) — is not odr-used in any definition of D, and
 - (12.2.1.4) — has the same value in all definitions of D,
 - or
 - (12.2.2) — a reference with internal or no linkage initialized with a constant expression such that the reference refers to the same entity in all definitions of D;
- and
- (12.3) — in each definition of D, corresponding entities shall have the same language linkage; and
- (12.4) — in each definition of D, the overloaded operators referred to, the implicit calls to conversion functions, constructors, operator new functions and operator delete functions, shall refer to the same function, or to a function defined within the definition of D; and
- (12.5) — in each definition of D, a default argument used by an (implicit or explicit) function call is treated as if its token sequence were present in the definition of D; that is, the default argument is subject to the

requirements described in this paragraph (and, if the default argument has subexpressions with default arguments, this requirement applies recursively)²³; and

- (12.6) — if D invokes a function with a precondition, or is a function that contains an assertion or has a contract condition (10.6.4), it is implementation-defined under which conditions all definitions of D shall be translated using the same build level and violation continuation mode; and
- (12.7) — if D is a class with an implicitly-declared constructor (15.1), it is as if the constructor was implicitly defined in every translation unit where it is odr-used, and the implicit definition in every translation unit shall call the same constructor for a subobject of D. [Example:

```

// translation unit 1:
struct X {
    X(int, int);
    X(int, int, int);
};
X::X(int, int = 0) { }
class D {
    X x = 0;
};
D d1;                                     // X(int, int) called by D()

// translation unit 2:
struct X {
    X(int, int);
    X(int, int, int);
};
X::X(int, int = 0, int = 0) { }
class D {
    X x = 0;
};
D d2;                                     // X(int, int, int) called by D();
                                           // D() 's implicit definition violates the ODR

— end example]

```

If D is a template and is defined in more than one translation unit, then the preceding requirements shall apply both to names from the template’s enclosing scope used in the template definition (17.7.3), and also to dependent names at the point of instantiation (17.7.2). If the definitions of D satisfy all these requirements, then the behavior is as if there were a single definition of D. [Note: The entity is still declared in multiple translation units, and 6.5 still applies to these declarations. In particular, *lambda-expressions* (8.4.5) appearing in the type of D may result in the different declarations having distinct types. — end note] If the definitions of D do not satisfy these requirements, then the behavior is undefined.

6.3 Scope

[basic.scope]

6.3.1 Declarative regions and scopes

[basic.scope.declarative]

- ¹ Every name is introduced in some portion of program text called a *declarative region*, which is the largest part of the program in which that name is valid, that is, in which that name may be used as an unqualified name to refer to the same entity. In general, each particular name is valid only within some possibly discontinuous portion of program text called its *scope*. To determine the scope of a declaration, it is sometimes convenient to refer to the *potential scope* of a declaration. The scope of a declaration is the same as its potential scope unless the potential scope contains another declaration of the same name. In that case, the potential scope of the declaration in the inner (contained) declarative region is excluded from the scope of the declaration in the outer (containing) declarative region.

- ² [Example: In

```

int j = 24;
int main() {
    int i = j, j;
    j = 42;
}

```

²³) 11.3.6 describes how default argument names are looked up.

the identifier *j* is declared twice as a name (and used twice). The declarative region of the first *j* includes the entire example. The potential scope of the first *j* begins immediately after that *j* and extends to the end of the program, but its (actual) scope excludes the text between the `,` and the `}`. The declarative region of the second declaration of *j* (the *j* immediately before the semicolon) includes all the text between `{` and `}`, but its potential scope excludes the declaration of *i*. The scope of the second declaration of *j* is the same as its potential scope. — *end example*]

- 3 The names declared by a declaration are introduced into the scope in which the declaration occurs, except that the presence of a `friend` specifier (14.3), certain uses of the *elaborated-type-specifier* (10.1.7.3), and *using-directives* (10.3.4) alter this general behavior.
- 4 Given a set of declarations in a single declarative region, each of which specifies the same unqualified name,
 - (4.1) — they shall all refer to the same entity, or all refer to functions and function templates; or
 - (4.2) — exactly one declaration shall declare a class name or enumeration name that is not a typedef name and the other declarations shall all refer to the same variable, non-static data member, or enumerator, or all refer to functions and function templates; in this case the class name or enumeration name is hidden (6.3.10). [*Note*: A namespace name or a class template name must be unique in its declarative region (10.3.2, Clause 17). — *end note*]

[*Note*: These restrictions apply to the declarative region into which a name is introduced, which is not necessarily the same as the region in which the declaration occurs. In particular, *elaborated-type-specifiers* (10.1.7.3) and friend declarations (14.3) may introduce a (possibly not visible) name into an enclosing namespace; these restrictions apply to that region. Local extern declarations (6.5) may introduce a name into the declarative region where the declaration appears and also introduce a (possibly not visible) name into an enclosing namespace; these restrictions apply to both regions. — *end note*]

- 5 For a given declarative region *R* and a point *P* outside *R*, the set of *intervening* declarative regions between *P* and *R* comprises all declarative regions that are or enclose *R* and do not enclose *P*.
- 6 [*Note*: The name lookup rules are summarized in 6.4. — *end note*]

6.3.2 Point of declaration

[basic.scope.pdecl]

- 1 The *point of declaration* for a name is immediately after its complete declarator (Clause 11) and before its *initializer* (if any), except as noted below. [*Example*:

```
unsigned char x = 12;
{ unsigned char x = x; }
```

Here the second *x* is initialized with its own (indeterminate) value. — *end example*]

- 2 [*Note*: A name from an outer scope remains visible up to the point of declaration of the name that hides it. [*Example*:

```
const int i = 2;
{ int i[i]; }
```

declares a block-scope array of two integers. — *end example*] — *end note*]

- 3 The point of declaration for a class or class template first declared by a *class-specifier* is immediately after the *identifier* or *simple-template-id* (if any) in its *class-head* (Clause 12). The point of declaration for an enumeration is immediately after the *identifier* (if any) in either its *enum-specifier* (10.2) or its first *opaque-enum-declaration* (10.2), whichever comes first. The point of declaration of an alias or alias template immediately follows the *defining-type-id* to which the alias refers.
- 4 The point of declaration of a *using-declarator* that does not name a constructor is immediately after the *using-declarator* (10.3.3).
- 5 The point of declaration for an enumerator is immediately after its *enumerator-definition*. [*Example*:

```
const int x = 12;
{ enum { x = x }; }
```

Here, the enumerator *x* is initialized with the value of the constant *x*, namely 12. — *end example*]

- 6 After the point of declaration of a class member, the member name can be looked up in the scope of its class. [*Note*: This is true even if the class is an incomplete class. For example,

```
struct X {
    enum E { z = 16 };
```

```

    int b[X::z];    // OK
};
— end note]

```

7 The point of declaration of a class first declared in an *elaborated-type-specifier* is as follows:

(7.1) — for a declaration of the form

```
class-key attribute-specifier-seqopt identifier ;
```

the *identifier* is declared to be a *class-name* in the scope that contains the declaration, otherwise

(7.2) — for an *elaborated-type-specifier* of the form

```
class-key identifier
```

if the *elaborated-type-specifier* is used in the *decl-specifier-seq* or *parameter-declaration-clause* of a function defined in namespace scope, the *identifier* is declared as a *class-name* in the namespace that contains the declaration; otherwise, except as a friend declaration, the *identifier* is declared in the smallest namespace or block scope that contains the declaration. [Note: These rules also apply within templates. — end note] [Note: Other forms of *elaborated-type-specifier* do not declare a new name, and therefore must refer to an existing *type-name*. See 6.4.4 and 10.1.7.3. — end note]

8 The point of declaration for an injected-class-name (Clause 12) is immediately following the opening brace of the class definition.

9 The point of declaration for a function-local predefined variable (11.4.1) is immediately before the *function-body* of a function definition.

10 The point of declaration of a structured binding (11.5) is immediately after the *identifier-list* of the structured binding declaration.

11 The point of declaration for the variable or the structured bindings declared in the *for-range-declaration* of a range-based *for* statement (9.5.4) is immediately after the *for-range-initializer*.

12 The point of declaration for a template parameter is immediately after its complete *template-parameter*. [Example:

```

typedef unsigned char T;
template<class T
= T      // lookup finds the typedef name of unsigned char
, T      // lookup finds the template parameter
N = 0> struct A { };

```

— end example]

13 [Note: Friend declarations refer to functions or classes that are members of the nearest enclosing namespace, but they do not introduce new names into that namespace (10.3.1.2). Function declarations at block scope and variable declarations with the *extern* specifier at block scope refer to declarations that are members of an enclosing namespace, but they do not introduce new names into that scope. — end note]

14 [Note: For point of instantiation of a template, see 17.7.4.1. — end note]

6.3.3 Block scope

[basic.scope.block]

1 A name declared in a block (9.3) is local to that block; it has *block scope*. Its potential scope begins at its point of declaration (6.3.2) and ends at the end of its block. A variable declared at block scope is a *local variable*.

2 The name declared in an *exception-declaration* is local to the *handler* and shall not be redeclared in the outermost block of the *handler*.

3 Names declared in the *init-statement*, the *for-range-declaration*, and in the *condition* of *if*, *while*, *for*, and *switch* statements are local to the *if*, *while*, *for*, or *switch* statement (including the controlled statement), and shall not be redeclared in a subsequent condition of that statement nor in the outermost block (or, for the *if* statement, any of the outermost blocks) of the controlled statement; see 9.4.

6.3.4 Function parameter scope

[basic.scope.param]

1 A function parameter (including one appearing in a *lambda-declarator*) or function-local predefined variable (11.4) has *function parameter scope*. The potential scope of a parameter or function-local predefined variable begins at its point of declaration. If the nearest enclosing function declarator is not the declarator of a

function definition, the potential scope ends at the end of that function declarator. Otherwise, if the function has a *function-try-block* the potential scope ends at the end of the last associated handler. Otherwise the potential scope ends at the end of the outermost block of the function definition. A parameter name shall not be redeclared in the outermost block of the function definition nor in the outermost block of any handler associated with a *function-try-block*.

6.3.5 Function scope [basic.funscope]

- 1 Labels (9.1) have *function scope* and may be used anywhere in the function in which they are declared. Only labels have function scope.

6.3.6 Namespace scope [basic.scope.namespace]

- 1 The declarative region of a *namespace-definition* is its *namespace-body*. Entities declared in a *namespace-body* are said to be *members* of the namespace, and names introduced by these declarations into the declarative region of the namespace are said to be *member names* of the namespace. A namespace member name has namespace scope. Its potential scope includes its namespace from the name's point of declaration (6.3.2) onwards; and for each *using-directive* (10.3.4) that nominates the member's namespace, the member's potential scope includes that portion of the potential scope of the *using-directive* that follows the member's point of declaration. [Example:

```
namespace N {
    int i;
    int g(int a) { return a; }
    int j();
    void q();
}
namespace { int l=1; }
// the potential scope of l is from its point of declaration to the end of the translation unit
```

```
namespace N {
    int g(char a) { // overloads N::g(int)
        return l+a; // l is from unnamed namespace
    }

    int i; // error: duplicate definition
    int j(); // OK: duplicate function declaration

    int j() { // OK: definition of N::j()
        return g(i); // calls N::g(int)
    }
    int q(); // error: different return type
}
```

— end example]

- 2 A namespace member can also be referred to after the `::` scope resolution operator (8.4.4.2) applied to the name of its namespace or the name of a namespace which nominates the member's namespace in a *using-directive*; see 6.4.3.2.
- 3 The outermost declarative region of a translation unit is also a namespace, called the *global namespace*. A name declared in the global namespace has *global namespace scope* (also called *global scope*). The potential scope of such a name begins at its point of declaration (6.3.2) and ends at the end of the translation unit that is its declarative region. A name with global namespace scope is said to be a *global name*.

6.3.7 Class scope [basic.scope.class]

- 1 The potential scope of a name declared in a class consists not only of the declarative region following the name's point of declaration, but also of all complete-class contexts (12.2) of that class.
- 2 A name *N* used in a class *S* shall refer to the same declaration in its context and when re-evaluated in the completed scope of *S*. No diagnostic is required for a violation of this rule.
- 3 A name declared within a member function hides a declaration of the same name whose scope extends to or past the end of the member function's class.
- 4 The potential scope of a declaration that extends to or past the end of a class definition also extends to the regions defined by its member definitions, even if the members are defined lexically outside the class (this

includes static data member definitions, nested class definitions, and member function definitions, including the member function body and any portion of the declarator part of such definitions which follows the *declarator-id*, including a *parameter-declaration-clause* and any default arguments (11.3.6).

⁵ [Example:

```
typedef int c;
enum { i = 1 };

class X {
  char v[i];           // error: i refers to ::i but when reevaluated is X::i
  int f() { return sizeof(c); } // OK: X::c
  char c;
  enum { i = 2 };
};

typedef char* T;
struct Y {
  T a;                 // error: T refers to ::T but when reevaluated is Y::T
  typedef long T;
  T b;
};

typedef int I;
class D {
  typedef I I;        // error, even though no reordering involved
};
```

— end example]

⁶ The name of a class member shall only be used as follows:

- (6.1) — in the scope of its class (as described above) or a class derived (Clause 13) from its class,
- (6.2) — after the . operator applied to an expression of the type of its class (8.5.1.5) or a class derived from its class,
- (6.3) — after the -> operator applied to a pointer to an object of its class (8.5.1.5) or a class derived from its class,
- (6.4) — after the :: scope resolution operator (8.4.4.2) applied to the name of its class or a class derived from its class.

6.3.8 Enumeration scope

[basic.scope.enum]

- ¹ The name of a scoped enumerator (10.2) has *enumeration scope*. Its potential scope begins at its point of declaration and terminates at the end of the *enum-specifier*.

6.3.9 Template parameter scope

[basic.scope.temp]

- ¹ The declarative region of the name of a template parameter of a template *template-parameter* is the smallest *template-parameter-list* in which the name was introduced.
- ² The declarative region of the name of a template parameter of a template is the smallest *template-declaration* in which the name was introduced. Only template parameter names belong to this declarative region; any other kind of name introduced by the *declaration* of a *template-declaration* is instead introduced into the same declarative region where it would be introduced as a result of a non-template declaration of the same name. [Example:

```
namespace N {
  template<class T> struct A { };           // #1
  template<class U> void f(U) { }         // #2
  struct B {
    template<class V> friend int g(struct C*); // #3
  };
}
```

The declarative regions of T, U and V are the *template-declarations* on lines #1, #2, and #3, respectively. But the names A, f, g and C all belong to the same declarative region — namely, the *namespace-body* of N.

(*g* is still considered to belong to this declarative region in spite of its being hidden during qualified and unqualified name lookup.) — *end example*]

- 3 The potential scope of a template parameter name begins at its point of declaration (6.3.2) and ends at the end of its declarative region. [Note: This implies that a *template-parameter* can be used in the declaration of subsequent *template-parameters* and their default arguments but cannot be used in preceding *template-parameters* or their default arguments. For example,

```
template<class T, T* p, class U = T> class X { /* ... */ };
template<class T> void f(T* p = new T);
```

This also implies that a *template-parameter* can be used in the specification of base classes. For example,

```
template<class T> class X : public Array<T> { /* ... */ };
template<class T> class Y : public T { /* ... */ };
```

The use of a template parameter as a base class implies that a class used as a template argument must be defined and not just declared when the class template is instantiated. — *end note*]

- 4 The declarative region of the name of a template parameter is nested within the immediately-enclosing declarative region. [Note: As a result, a *template-parameter* hides any entity with the same name in an enclosing scope (6.3.10). [Example:

```
typedef int N;
template<N X, typename N, template<N Y> class T> struct A;
```

Here, *X* is a non-type template parameter of type `int` and *Y* is a non-type template parameter of the same type as the second template parameter of *A*. — *end example*] — *end note*]

- 5 [Note: Because the name of a template parameter cannot be redeclared within its potential scope (17.7.1), a template parameter’s scope is often its potential scope. However, it is still possible for a template parameter name to be hidden; see 17.7.1. — *end note*]

6.3.10 Name hiding

[basic.scope.hiding]

- 1 A declaration of a name in a nested declarative region hides a declaration of the same name in an enclosing declarative region; see 6.3.1 and 6.4.1.
- 2 If a class name (12.1) or enumeration name (10.2) and a variable, data member, function, or enumerator are declared in the same declarative region (in any order) with the same name (excluding declarations made visible via *using-directives* (6.4.1)), the class or enumeration name is hidden wherever the variable, data member, function, or enumerator name is visible.
- 3 In a member function definition, the declaration of a name at block scope hides the declaration of a member of the class with the same name; see 6.3.7. The declaration of a member in a derived class (Clause 13) hides the declaration of a member of a base class of the same name; see 13.2.
- 4 During the lookup of a name qualified by a namespace name, declarations that would otherwise be made visible by a *using-directive* can be hidden by declarations with the same name in the namespace containing the *using-directive*; see 6.4.3.2.
- 5 If a name is in scope and is not hidden it is said to be *visible*.

6.4 Name lookup

[basic.lookup]

- 1 The name lookup rules apply uniformly to all names (including *typedef-names* (10.1.3), *namespace-names* (10.3), and *class-names* (12.1)) wherever the grammar allows such names in the context discussed by a particular rule. Name lookup associates the use of a name with a set of declarations (6.1) of that name. The declarations found by name lookup shall either all denote the same entity or shall all denote functions or function templates; in the latter case, the declarations are said to form a set of overloaded functions (16.1). Overload resolution (16.3) takes place after name lookup has succeeded. The access rules (Clause 14) are considered only once name lookup and function overload resolution (if applicable) have succeeded. Only after name lookup, function overload resolution (if applicable) and access checking have succeeded are the attributes introduced by the name’s declaration used further in expression processing (Clause 8).
- 2 A name “looked up in the context of an expression” is looked up as an unqualified name in the scope where the expression is found.
- 3 The injected-class-name of a class (Clause 12) is also considered to be a member of that class for the purposes of name hiding and lookup.

- 4 [Note: 6.5 discusses linkage issues. The notions of scope, point of declaration and name hiding are discussed in 6.3. — *end note*]

6.4.1 Unqualified name lookup [basic.lookup.unqual]

- 1 In all the cases listed in 6.4.1, the scopes are searched for a declaration in the order listed in each of the respective categories; name lookup ends as soon as a declaration is found for the name. If no declaration is found, the program is ill-formed.
- 2 The declarations from the namespace nominated by a *using-directive* become visible in a namespace enclosing the *using-directive*; see 10.3.4. For the purpose of the unqualified name lookup rules described in 6.4.1, the declarations from the namespace nominated by the *using-directive* are considered members of that enclosing namespace.
- 3 The lookup for an unqualified name used as the *postfix-expression* of a function call is described in 6.4.2. [Note: For purposes of determining (during parsing) whether an expression is a *postfix-expression* for a function call, the usual name lookup rules apply. In some cases a name followed by < is treated as a *template-name* even though name lookup did not find a *template-name* (see 17.2). For example,

```
int h;
void g();
namespace N {
    struct A {};
    template <class T> int f(T);
    template <class T> int g(T);
    template <class T> int h(T);
}

int x = f<N::A>(N::A());           // OK: lookup of f finds nothing, f treated as template name
int y = g<N::A>(N::A());           // OK: lookup of g finds a function, g treated as template name
int z = h<N::A>(N::A());           // error: h< does not begin a template-id
```

The rules in 6.4.2 have no effect on the syntactic interpretation of an expression. For example,

```
typedef int f;
namespace N {
    struct A {
        friend void f(A &);
        operator int();
        void g(A a) {
            int i = f(a);           // f is the typedef, not the friend function: equivalent to int(a)
        }
    };
};
```

Because the expression is not a function call, the argument-dependent name lookup (6.4.2) does not apply and the friend function *f* is not found. — *end note*]

- 4 A name used in global scope, outside of any function, class or user-declared namespace, shall be declared before its use in global scope.
- 5 A name used in a user-declared namespace outside of the definition of any function or class shall be declared before its use in that namespace or before its use in a namespace enclosing its namespace.
- 6 In the definition of a function that is a member of namespace *N*, a name used after the function's *declarator-id*²⁴ shall be declared before its use in the block in which it is used or in one of its enclosing blocks (9.3) or shall be declared before its use in namespace *N* or, if *N* is a nested namespace, shall be declared before its use in one of *N*'s enclosing namespaces. [Example:

```
namespace A {
    namespace N {
        void f();
    }
}
void A::N::f() {
    i = 5;
```

²⁴) This refers to unqualified names that occur, for instance, in a type or default argument in the *parameter-declaration-clause* or used in the function body.

```

// The following scopes are searched for a declaration of i:
// 1) outermost block scope of A::N::f, before the use of i
// 2) scope of namespace N
// 3) scope of namespace A
// 4) global scope, before the definition of A::N::f
}

```

— end example]

7 A name used in the definition of a class X²⁵ outside of a complete-class context (12.2) of X shall be declared in one of the following ways:

- (7.1) — before its use in class X or be a member of a base class of X (13.2), or
- (7.2) — if X is a nested class of class Y (12.2.5), before the definition of X in Y, or shall be a member of a base class of Y (this lookup applies in turn to Y's enclosing classes, starting with the innermost enclosing class),²⁶ or
- (7.3) — if X is a local class (12.4) or is a nested class of a local class, before the definition of class X in a block enclosing the definition of class X, or
- (7.4) — if X is a member of namespace N, or is a nested class of a class that is a member of N, or is a local class or a nested class within a local class of a function that is a member of N, before the definition of class X in namespace N or in one of N's enclosing namespaces.

[Example:

```

namespace M {
    class B { };
}

namespace N {
    class Y : public M::B {
        class X {
            int a[i];
        };
    };
}

```

```

// The following scopes are searched for a declaration of i:
// 1) scope of class N::Y::X, before the use of i
// 2) scope of class N::Y, before the definition of N::Y::X
// 3) scope of N::Y's base class M::B
// 4) scope of namespace N, before the definition of N::Y
// 5) global scope, before the definition of N

```

— end example] [Note: When looking for a prior declaration of a class or function introduced by a friend declaration, scopes outside of the innermost enclosing namespace scope are not considered; see 10.3.1.2. — end note] [Note: 6.3.7 further describes the restrictions on the use of names in a class definition. 12.2.5 further describes the restrictions on the use of names in nested class definitions. 12.4 further describes the restrictions on the use of names in local class definitions. — end note]

8 For the members of a class X, a name used in a complete-class context (12.2) of X or in the definition of a class member outside of the definition of X, following the member's *declarator-id*²⁷, shall be declared in one of the following ways:

- (8.1) — before its use in the block in which it is used or in an enclosing block (9.3), or
- (8.2) — shall be a member of class X or be a member of a base class of X (13.2), or
- (8.3) — if X is a nested class of class Y (12.2.5), shall be a member of Y, or shall be a member of a base class of Y (this lookup applies in turn to Y's enclosing classes, starting with the innermost enclosing class),²⁸ or

²⁵) This refers to unqualified names following the class name; such a name may be used in a *base-specifier* or in the *member-specification* of the class definition.

²⁶) This lookup applies whether the definition of X is nested within Y's definition or whether X's definition appears in a namespace scope enclosing Y's definition (12.2.5).

²⁷) That is, an unqualified name that occurs, for instance, in a type in the *parameter-declaration-clause* or in the *noexcept-specifier*.

²⁸) This lookup applies whether the member function is defined within the definition of class X or whether the member function is defined in a namespace scope enclosing X's definition.

- (8.4) — if X is a local class (12.4) or is a nested class of a local class, before the definition of class X in a block enclosing the definition of class X, or
- (8.5) — if X is a member of namespace N, or is a nested class of a class that is a member of N, or is a local class or a nested class within a local class of a function that is a member of N, before the use of the name, in namespace N or in one of N's enclosing namespaces.

[Example:

```
class B { };
namespace M {
  namespace N {
    class X : public B {
      void f();
    };
  }
}
void M::N::X::f() {
  i = 16;
}
```

```
// The following scopes are searched for a declaration of i:
// 1) outermost block scope of M::N::X::f, before the use of i
// 2) scope of class M::N::X
// 3) scope of M::N::X's base class B
// 4) scope of namespace M::N
// 5) scope of namespace M
// 6) global scope, before the definition of M::N::X::f
```

— end example] [Note: 12.2.1 and 12.2.3 further describe the restrictions on the use of names in member function definitions. 12.2.5 further describes the restrictions on the use of names in the scope of nested classes. 12.4 further describes the restrictions on the use of names in local class definitions. — end note]

- 9 Name lookup for a name used in the definition of a friend function (14.3) defined inline in the class granting friendship shall proceed as described for lookup in member function definitions. If the friend function is not defined in the class granting friendship, name lookup in the friend function definition shall proceed as described for lookup in namespace member function definitions.
- 10 In a friend declaration naming a member function, a name used in the function declarator and not part of a *template-argument* in the *declarator-id* is first looked up in the scope of the member function's class (13.2). If it is not found, or if the name is part of a *template-argument* in the *declarator-id*, the look up is as described for unqualified names in the definition of the class granting friendship. [Example:

```
struct A {
  typedef int AT;
  void f1(AT);
  void f2(float);
  template <class T> void f3();
};
struct B {
  typedef char AT;
  typedef float BT;
  friend void A::f1(AT); // parameter type is A::AT
  friend void A::f2(BT); // parameter type is B::BT
  friend void A::f3<AT>(); // template argument is B::AT
};
```

— end example]

- 11 During the lookup for a name used as a default argument (11.3.6) in a function *parameter-declaration-clause* or used in the *expression* of a *mem-initializer* for a constructor (15.6.2), the function parameter names are visible and hide the names of entities declared in the block, class or namespace scopes containing the function declaration. [Note: 11.3.6 further describes the restrictions on the use of names in default arguments. 15.6.2 further describes the restrictions on the use of names in a *ctor-initializer*. — end note]
- 12 During the lookup of a name used in the *constant-expression* of an *enumerator-definition*, previously declared *enumerators* of the enumeration are visible and hide the names of entities declared in the block, class, or namespace scopes containing the *enum-specifier*.

13 A name used in the definition of a **static** data member of class X (12.2.3.2) (after the *qualified-id* of the static member) is looked up as if the name was used in a member function of X. [Note: 12.2.3.2 further describes the restrictions on the use of names in the definition of a **static** data member. — end note]

14 If a variable member of a namespace is defined outside of the scope of its namespace then any name that appears in the definition of the member (after the *declarator-id*) is looked up as if the definition of the member occurred in its namespace. [Example:

```
namespace N {
    int i = 4;
    extern int j;
}
```

```
int i = 2;
```

```
int N::j = i;      // N::j == 4
```

— end example]

15 A name used in the handler for a *function-try-block* (Clause 18) is looked up as if the name was used in the outermost block of the function definition. In particular, the function parameter names shall not be redeclared in the *exception-declaration* nor in the outermost block of a handler for the *function-try-block*. Names declared in the outermost block of the function definition are not found when looked up in the scope of a handler for the *function-try-block*. [Note: But function parameter names are found. — end note]

16 [Note: The rules for name lookup in template definitions are described in 17.7. — end note]

6.4.2 Argument-dependent name lookup

[basic.lookup.argdep]

1 When the *postfix-expression* in a function call (8.5.1.2) is an *unqualified-id*, other namespaces not considered during the usual unqualified lookup (6.4.1) may be searched, and in those namespaces, namespace-scope friend function or function template declarations (14.3) not otherwise visible may be found. These modifications to the search depend on the types of the arguments (and for template template arguments, the namespace of the template argument). [Example:

```
namespace N {
    struct S { };
    void f(S);
}
```

```
void g() {
```

```
    N::S s;
```

```
    f(s);
```

```
        // OK: calls N::f
```

```
    (f)(s);
```

```
        // error: N::f not considered; parentheses prevent argument-dependent lookup
```

```
}
```

— end example]

2 For each argument type T in the function call, there is a set of zero or more *associated namespaces* and a set of zero or more *associated classes* to be considered. The sets of namespaces and classes are determined entirely by the types of the function arguments (and the namespace of any template template argument). Typedef names and *using-declarations* used to specify the types do not contribute to this set. The sets of namespaces and classes are determined in the following way:

(2.1) — If T is a fundamental type, its associated sets of namespaces and classes are both empty.

(2.2) — If T is a class type (including unions), its associated classes are: the class itself; the class of which it is a member, if any; and its direct and indirect base classes. Its associated namespaces are the innermost enclosing namespaces of its associated classes. Furthermore, if T is a class template specialization, its associated namespaces and classes also include: the namespaces and classes associated with the types of the template arguments provided for template type parameters (excluding template template parameters); the namespaces of which any template template arguments are members; and the classes of which any member templates used as template template arguments are members. [Note: Non-type template arguments do not contribute to the set of associated namespaces. — end note]

(2.3) — If T is an enumeration type, its associated namespace is the innermost enclosing namespace of its declaration. If it is a class member, its associated class is the member's class; else it has no associated class.

- (2.4) — If *T* is a pointer to *U* or an array of *U*, its associated namespaces and classes are those associated with *U*.
- (2.5) — If *T* is a function type, its associated namespaces and classes are those associated with the function parameter types and those associated with the return type.
- (2.6) — If *T* is a pointer to a member function of a class *X*, its associated namespaces and classes are those associated with the function parameter types and return type, together with those associated with *X*.
- (2.7) — If *T* is a pointer to a data member of class *X*, its associated namespaces and classes are those associated with the member type together with those associated with *X*.

If an associated namespace is an inline namespace (10.3.1), its enclosing namespace is also included in the set. If an associated namespace directly contains inline namespaces, those inline namespaces are also included in the set. In addition, if the argument is the name or address of a set of overloaded functions and/or function templates, its associated classes and namespaces are the union of those associated with each of the members of the set, i.e., the classes and namespaces associated with its parameter types and return type. Additionally, if the aforementioned set of overloaded functions is named with a *template-id*, its associated classes and namespaces also include those of its type *template-arguments* and its template *template-arguments*.

- ³ Let *X* be the lookup set produced by unqualified lookup (6.4.1) and let *Y* be the lookup set produced by argument dependent lookup (defined as follows). If *X* contains

- (3.1) — a declaration of a class member, or
- (3.2) — a block-scope function declaration that is not a *using-declaration*, or
- (3.3) — a declaration that is neither a function nor a function template

then *Y* is empty. Otherwise *Y* is the set of declarations found in the namespaces associated with the argument types as described below. The set of declarations found by the lookup of the name is the union of *X* and *Y*. [Note: The namespaces and classes associated with the argument types can include namespaces and classes already considered by the ordinary unqualified lookup. — end note] [Example:

```
namespace NS {
    class T { };
    void f(T);
    void g(T, int);
}
NS::T parm;
void g(NS::T, float);
int main() {
    f(parm); // OK: calls NS::f
    extern void g(NS::T, float);
    g(parm, 1); // OK: calls g(NS::T, float)
}
```

— end example]

- ⁴ When considering an associated namespace, the lookup is the same as the lookup performed when the associated namespace is used as a qualifier (6.4.3.2) except that:

- (4.1) — Any *using-directives* in the associated namespace are ignored.
- (4.2) — Any namespace-scope friend functions or friend function templates (14.3) declared in associated classes are visible within their respective namespaces even if they are not visible during an ordinary lookup (10.3.1.2).
- (4.3) — All names except those of (possibly overloaded) functions and function templates are ignored.

6.4.3 Qualified name lookup

[basic.lookup.qual]

- ¹ The name of a class or namespace member or enumerator can be referred to after the `::` scope resolution operator (8.4.4.2) applied to a *nested-name-specifier* that denotes its class, namespace, or enumeration. If a `::` scope resolution operator in a *nested-name-specifier* is not preceded by a *decltype-specifier*, lookup of the name preceding that `::` considers only namespaces, types, and templates whose specializations are types. If the name found does not designate a namespace or a class, enumeration, or dependent type, the program is ill-formed. [Example:

```
class A {
public:
    static int n;
```

```

};
int main() {
    int A;
    A::n = 42;           // OK
    A b;                // ill-formed: A does not name a type
}

```

— end example]

- ² [Note: Multiply qualified names, such as `N1::N2::N3::n`, can be used to refer to members of nested classes (12.2.5) or members of nested namespaces. — end note]
- ³ In a declaration in which the *declarator-id* is a *qualified-id*, names used before the *qualified-id* being declared are looked up in the defining namespace scope; names following the *qualified-id* are looked up in the scope of the member's class or namespace. [Example:

```

class X { };
class C {
    class X { };
    static const int number = 50;
    static X arr[number];
};
X C::arr[number]; // ill-formed:
                  // equivalent to ::X C::arr[C::number];
                  // and not to C::X C::arr[C::number];

```

— end example]

- ⁴ A name prefixed by the unary scope operator `::` (8.4.4.2) is looked up in global scope, in the translation unit where it is used. The name shall be declared in global namespace scope or shall be a name whose declaration is visible in global scope because of a *using-directive* (6.4.3.2). The use of `::` allows a global name to be referred to even if its identifier has been hidden (6.3.10).
- ⁵ A name prefixed by a *nested-name-specifier* that nominates an enumeration type shall represent an *enumerator* of that enumeration.
- ⁶ If a *pseudo-destructor-name* (8.5.1.4) contains a *nested-name-specifier*, the *type-names* are looked up as types in the scope designated by the *nested-name-specifier*. Similarly, in a *qualified-id* of the form:

*nested-name-specifier*_{opt} *class-name* :: ~ *class-name*

the second *class-name* is looked up in the same scope as the first. [Example:

```

struct C {
    typedef int I;
};
typedef int I1, I2;
extern int* p;
extern int* q;
p->C::I::~~I(); // I is looked up in the scope of C
q->I1::~~I2(); // I2 is looked up in the scope of the postfix-expression

struct A {
    ~A();
};
typedef A AB;
int main() {
    AB* p;
    p->AB::~~AB(); // explicitly calls the destructor for A
}

```

— end example] [Note: 6.4.5 describes how name lookup proceeds after the `.` and `->` operators. — end note]

6.4.3.1 Class members

[class.qual]

- ¹ If the *nested-name-specifier* of a *qualified-id* nominates a class, the name specified after the *nested-name-specifier* is looked up in the scope of the class (13.2), except for the cases listed below. The name shall represent one or more members of that class or of one of its base classes (Clause 13). [Note: A class member can be referred to using a *qualified-id* at any point in its potential scope (6.3.7). — end note] The exceptions to the name lookup rule above are the following:

- (1.1) — the lookup for a destructor is as specified in 6.4.3;
 - (1.2) — a *conversion-type-id* of a *conversion-function-id* is looked up in the same manner as a *conversion-type-id* in a class member access (see 6.4.5);
 - (1.3) — the names in a *template-argument* of a *template-id* are looked up in the context in which the entire *postfix-expression* occurs.
 - (1.4) — the lookup for a name specified in a *using-declaration* (10.3.3) also finds class or enumeration names hidden within the same scope (6.3.10).
- ² In a lookup in which function names are not ignored²⁹ and the *nested-name-specifier* nominates a class **C**:
- (2.1) — if the name specified after the *nested-name-specifier*, when looked up in **C**, is the injected-class-name of **C** (Clause 12), or
 - (2.2) — in a *using-declarator* of a *using-declaration* (10.3.3) that is a *member-declaration*, if the name specified after the *nested-name-specifier* is the same as the *identifier* or the *simple-template-id*'s *template-name* in the last component of the *nested-name-specifier*,

the name is instead considered to name the constructor of class **C**. [Note: For example, the constructor is not an acceptable lookup result in an *elaborated-type-specifier* so the constructor would not be used in place of the injected-class-name. — end note] Such a constructor name shall be used only in the *declarator-id* of a declaration that names a constructor or in a *using-declaration*. [Example:

```
struct A { A(); };
struct B: public A { B(); };

A::A() { }
B::B() { }

B::A ba;           // object of type A
A::A a;            // error, A::A is not a type name
struct A::A a2;    // object of type A
```

— end example]

- ³ A class member name hidden by a name in a nested declarative region or by the name of a derived class member can still be found if qualified by the name of its class followed by the `::` operator.

6.4.3.2 Namespace members

[namespace.qual]

- ¹ If the *nested-name-specifier* of a *qualified-id* nominates a namespace (including the case where the *nested-name-specifier* is `::`, i.e., nominating the global namespace), the name specified after the *nested-name-specifier* is looked up in the scope of the namespace. The names in a *template-argument* of a *template-id* are looked up in the context in which the entire *postfix-expression* occurs.
- ² For a namespace **X** and name **m**, the namespace-qualified lookup set $S(X, m)$ is defined as follows: Let $S'(X, m)$ be the set of all declarations of **m** in **X** and the inline namespace set of **X** (10.3.1). If $S'(X, m)$ is not empty, $S(X, m)$ is $S'(X, m)$; otherwise, $S(X, m)$ is the union of $S(N_i, m)$ for all namespaces N_i nominated by *using-directives* in **X** and its inline namespace set.
- ³ Given **X**::**m** (where **X** is a user-declared namespace), or given `::m` (where **X** is the global namespace), if $S(X, m)$ is the empty set, the program is ill-formed. Otherwise, if $S(X, m)$ has exactly one member, or if the context of the reference is a *using-declaration* (10.3.3), $S(X, m)$ is the required set of declarations of **m**. Otherwise if the use of **m** is not one that allows a unique declaration to be chosen from $S(X, m)$, the program is ill-formed. [Example:

```
int x;
namespace Y {
    void f(float);
    void h(int);
}

namespace Z {
    void h(double);
}
```

²⁹ Lookups in which function names are ignored include names appearing in a *nested-name-specifier*, an *elaborated-type-specifier*, or a *base-specifier*.

```

namespace A {
    using namespace Y;
    void f(int);
    void g(int);
    int i;
}

namespace B {
    using namespace Z;
    void f(char);
    int i;
}

namespace AB {
    using namespace A;
    using namespace B;
    void g();
}

void h()
{
    AB::g();           // g is declared directly in AB, therefore S is {AB::g()} and AB::g() is chosen

    AB::f(1);         // f is not declared directly in AB so the rules are applied recursively to A and B;
                    // namespace Y is not searched and Y::f(float) is not considered;
                    // S is {A::f(int),B::f(char)} and overload resolution chooses A::f(int)

    AB::f('c');      // as above but resolution chooses B::f(char)

    AB::x++;         // x is not declared directly in AB, and is not declared in A or B, so the rules
                    // are applied recursively to Y and Z, S is {} so the program is ill-formed

    AB::i++;         // i is not declared directly in AB so the rules are applied recursively to A and B,
                    // S is {A::i,B::i} so the use is ambiguous and the program is ill-formed

    AB::h(16.8);     // h is not declared directly in AB and not declared directly in A or B so the rules
                    // are applied recursively to Y and Z, S is {Y::h(int),Z::h(double)} and
                    // overload resolution chooses Z::h(double)
}

```

— end example]

- ⁴ [Note: The same declaration found more than once is not an ambiguity (because it is still a unique declaration).

[Example:

```

namespace A {
    int a;
}

namespace B {
    using namespace A;
}

namespace C {
    using namespace A;
}

namespace BC {
    using namespace B;
    using namespace C;
}

void f()
{
    BC::a++;         // OK: S is {A::a,A::a}
}

```

```

}

namespace D {
    using A::a;
}

namespace BD {
    using namespace B;
    using namespace D;
}

void g()
{
    BD::a++;           // OK: S is {A::a, A::a}
}

```

— end example] — end note]

- ⁵ [Example: Because each referenced namespace is searched at most once, the following is well-defined:

```

namespace B {
    int b;
}

namespace A {
    using namespace B;
    int a;
}

namespace B {
    using namespace A;
}

void f()
{
    A::a++;           // OK: a declared directly in A, S is {A::a}
    B::a++;           // OK: both A and B searched (once), S is {A::a}
    A::b++;           // OK: both A and B searched (once), S is {B::b}
    B::b++;           // OK: b declared directly in B, S is {B::b}
}

```

— end example]

- ⁶ During the lookup of a qualified namespace member name, if the lookup finds more than one declaration of the member, and if one declaration introduces a class name or enumeration name and the other declarations either introduce the same variable, the same enumerator or a set of functions, the non-type name hides the class or enumeration name if and only if the declarations are from the same namespace; otherwise (the declarations are from different namespaces), the program is ill-formed. [Example:

```

namespace A {
    struct x { };
    int x;
    int y;
}

namespace B {
    struct y { };
}

namespace C {
    using namespace A;
    using namespace B;
    int i = C::x;     // OK, A::x (of type int)
    int j = C::y;     // ambiguous, A::y or B::y
}

```

— end example]

- ⁷ In a declaration for a namespace member in which the *declarator-id* is a *qualified-id*, given that the *qualified-id* for the namespace member has the form

nested-name-specifier unqualified-id

the *unqualified-id* shall name a member of the namespace designated by the *nested-name-specifier* or of an element of the inline namespace set (10.3.1) of that namespace. [Example:

```
namespace A {
  namespace B {
    void f1(int);
  }
  using namespace B;
}
void A::f1(int){ } // ill-formed, f1 is not a member of A
```

— end example] However, in such namespace member declarations, the *nested-name-specifier* may rely on *using-directives* to implicitly provide the initial part of the *nested-name-specifier*. [Example:

```
namespace A {
  namespace B {
    void f1(int);
  }
}

namespace C {
  namespace D {
    void f1(int);
  }
}

using namespace A;
using namespace C::D;
void B::f1(int){ } // OK, defines A::B::f1(int)
```

— end example]

6.4.4 Elaborated type specifiers

[basic.lookup.elab]

- ¹ An *elaborated-type-specifier* (10.1.7.3) may be used to refer to a previously declared *class-name* or *enum-name* even though the name has been hidden by a non-type declaration (6.3.10).
- ² If the *elaborated-type-specifier* has no *nested-name-specifier*, and unless the *elaborated-type-specifier* appears in a declaration with the following form:

class-key attribute-specifier-seq_{opt} identifier ;

the *identifier* is looked up according to 6.4.1 but ignoring any non-type names that have been declared. If the *elaborated-type-specifier* is introduced by the `enum` keyword and this lookup does not find a previously declared *type-name*, the *elaborated-type-specifier* is ill-formed. If the *elaborated-type-specifier* is introduced by the *class-key* and this lookup does not find a previously declared *type-name*, or if the *elaborated-type-specifier* appears in a declaration with the form:

class-key attribute-specifier-seq_{opt} identifier ;

the *elaborated-type-specifier* is a declaration that introduces the *class-name* as described in 6.3.2.

- ³ If the *elaborated-type-specifier* has a *nested-name-specifier*, qualified name lookup is performed, as described in 6.4.3, but ignoring any non-type names that have been declared. If the name lookup does not find a previously declared *type-name*, the *elaborated-type-specifier* is ill-formed. [Example:

```
struct Node {
  struct Node* Next;           // OK: Refers to Node at global scope
  struct Data* Data;          // OK: Declares type Data at global scope and member Data
};

struct Data {
  struct Node* Node;           // OK: Refers to Node at global scope
  friend struct ::Glob;        // error: Glob is not declared, cannot introduce a qualified type (10.1.7.3)
  friend struct Glob;          // OK: Refers to (as yet) undeclared Glob at global scope.
```

```

    /* ... */
};

struct Base {
    struct Data; // OK: Declares nested Data
    struct ::Data* thatData; // OK: Refers to ::Data
    struct Base::Data* thisData; // OK: Refers to nested Data
    friend class ::Data; // OK: global Data is a friend
    friend class Data; // OK: nested Data is a friend
    struct Data { /* ... */ }; // Defines nested Data
};

struct Data; // OK: Redeclares Data at global scope
struct ::Data; // error: cannot introduce a qualified type (10.1.7.3)
struct Base::Data; // error: cannot introduce a qualified type (10.1.7.3)
struct Base::Datum; // error: Datum undefined
struct Base::Data* pBase; // OK: refers to nested Data
— end example]

```

6.4.5 Class member access [basic.lookup.classref]

- ¹ In a class member access expression (8.5.1.5), if the `.` or `->` token is immediately followed by an *identifier* followed by a `<`, the identifier must be looked up to determine whether the `<` is the beginning of a template argument list (17.2) or a less-than operator. The identifier is first looked up in the class of the object expression. If the identifier is not found, it is then looked up in the context of the entire *postfix-expression* and shall name a class template.
- ² If the *id-expression* in a class member access (8.5.1.5) is an *unqualified-id*, and the type of the object expression is of a class type *C*, the *unqualified-id* is looked up in the scope of class *C*. For a pseudo-destructor call (8.5.1.4), the *unqualified-id* is looked up in the context of the complete *postfix-expression*.
- ³ If the *unqualified-id* is *~type-name*, the *type-name* is looked up in the context of the entire *postfix-expression*. If the type *T* of the object expression is of a class type *C*, the *type-name* is also looked up in the scope of class *C*. At least one of the lookups shall find a name that refers to *cv T*. [Example:

```

struct A { };

struct B {
    struct A { };
    void f(::A* a);
};

void B::f(::A* a) {
    a->~A(); // OK: lookup in *a finds the injected-class-name
}

```

— end example]

- ⁴ If the *id-expression* in a class member access is a *qualified-id* of the form

```
class-name-or-namespace-name::...
```

the *class-name-or-namespace-name* following the `.` or `->` operator is first looked up in the class of the object expression and the name, if found, is used. Otherwise it is looked up in the context of the entire *postfix-expression*. [Note: See 6.4.3, which describes the lookup of a name before `::`, which will only find a type or namespace name. — end note]

- ⁵ If the *qualified-id* has the form

```
::class-name-or-namespace-name::...
```

the *class-name-or-namespace-name* is looked up in global scope as a *class-name* or *namespace-name*.

- ⁶ If the *nested-name-specifier* contains a *simple-template-id* (17.2), the names in its *template-arguments* are looked up in the context in which the entire *postfix-expression* occurs.
- ⁷ If the *id-expression* is a *conversion-function-id*, its *conversion-type-id* is first looked up in the class of the object expression and the name, if found, is used. Otherwise it is looked up in the context of the entire

postfix-expression. In each of these lookups, only names that denote types or templates whose specializations are types are considered. [Example:

```
struct A { };
namespace N {
    struct A {
        void g() { }
        template <class T> operator T();
    };
}

int main() {
    N::A a;
    a.operator A();           // calls N::A::operator N::A
}
```

— end example]

6.4.6 Using-directives and namespace aliases [basic.lookup.udir]

- ¹ In a *using-directive* or *namespace-alias-definition*, during the lookup for a *namespace-name* or for a name in a *nested-name-specifier* only namespace names are considered.

6.5 Program and linkage [basic.link]

- ¹ A *program* consists of one or more *translation units* (Clause 5) linked together. A translation unit consists of a sequence of declarations.

translation-unit:
declaration-seq_{opt}

- ² A name is said to have *linkage* when it might denote the same object, reference, function, type, template, namespace or value as a name introduced by a declaration in another scope:

- (2.1) — When a name has *external linkage*, the entity it denotes can be referred to by names from scopes of other translation units or from other scopes of the same translation unit.
- (2.2) — When a name has *internal linkage*, the entity it denotes can be referred to by names from other scopes in the same translation unit.
- (2.3) — When a name has *no linkage*, the entity it denotes cannot be referred to by names from other scopes.

- ³ A name having namespace scope (6.3.6) has internal linkage if it is the name of

- (3.1) — a variable, function or function template that is explicitly declared **static**; or,
- (3.2) — a non-inline variable of non-volatile const-qualified type that is neither explicitly declared **extern** nor previously declared to have external linkage; or
- (3.3) — a data member of an anonymous union.

- ⁴ An unnamed namespace or a namespace declared directly or indirectly within an unnamed namespace has internal linkage. All other namespaces have external linkage. A name having namespace scope that has not been given internal linkage above has the same linkage as the enclosing namespace if it is the name of

- (4.1) — a variable; or
- (4.2) — a function; or
- (4.3) — a named class (Clause 12), or an unnamed class defined in a typedef declaration in which the class has the typedef name for linkage purposes (10.1.3); or
- (4.4) — a named enumeration (10.2), or an unnamed enumeration defined in a typedef declaration in which the enumeration has the typedef name for linkage purposes (10.1.3); or
- (4.5) — a template.

- ⁵ In addition, a member function, static data member, a named class or enumeration of class scope, or an unnamed class or enumeration defined in a class-scope typedef declaration such that the class or enumeration has the typedef name for linkage purposes (10.1.3), has the same linkage, if any, as the name of the class of which it is a member.

- ⁶ The name of a function declared in block scope and the name of a variable declared by a block scope **extern** declaration have linkage. If there is a visible declaration of an entity with linkage having the same name and

type, ignoring entities declared outside the innermost enclosing namespace scope, the block scope declaration declares that same entity and receives the linkage of the previous declaration. If there is more than one such matching entity, the program is ill-formed. Otherwise, if no matching entity is found, the block scope entity receives external linkage. If, within a translation unit, the same entity is declared with both internal and external linkage, the program is ill-formed. [Example:

```
static void f();
static int i = 0;           // #1
void g() {
    extern void f();       // internal linkage
    int i;                 // #2: i has no linkage
    {
        extern void f();   // internal linkage
        extern int i;      // #3: external linkage, ill-formed
    }
}
```

Without the declaration at line #2, the declaration at line #3 would link with the declaration at line #1. Because the declaration with internal linkage is hidden, however, #3 is given external linkage, making the program ill-formed. — end example]

- 7 When a block scope declaration of an entity with linkage is not found to refer to some other declaration, then that entity is a member of the innermost enclosing namespace. However such a declaration does not introduce the member name in its namespace scope. [Example:

```
namespace X {
    void p() {
        q();           // error: q not yet declared
        extern void q(); // q is a member of namespace X
    }

    void middle() {
        q();           // error: q not yet declared
    }

    void q() { /* ... */ } // definition of X::q
}

void q() { /* ... */ } // some other, unrelated q
```

— end example]

- 8 Names not covered by these rules have no linkage. Moreover, except as noted, a name declared at block scope (6.3.3) has no linkage.
- 9 A type is said to have linkage if and only if:
- (9.1) — it is a class or enumeration type that is named (or has a name for linkage purposes (10.1.3)) and the name has linkage; or
 - (9.2) — it is an unnamed class or unnamed enumeration that is a member of a class with linkage; or
 - (9.3) — it is a specialization of a class template (Clause 17)³⁰; or
 - (9.4) — it is a fundamental type (6.7.1); or
 - (9.5) — it is a compound type (6.7.2) other than a class or enumeration, compounded exclusively from types that have linkage; or
 - (9.6) — it is a cv-qualified (6.7.3) version of a type that has linkage.

[Note: In other words, a type without linkage contains a class or enumeration that cannot be named outside its translation unit. Classes with linkage may contain members whose types do not have linkage. Typedef names are ignored in the determination of whether a type has linkage. — end note]

[Example:

```
template <class T> struct B {
    void g(T) { }
```

³⁰) A class template has the linkage of the innermost enclosing class or namespace in which it is declared.

```

    void h(T);
    friend void i(B, T) { }
};

void f() {
    struct A { int x; }; // no linkage
    A a = { 1 };
    B<A> ba; // declares B<A>::g(A) and B<A>::h(A)
    ba.g(a); // OK
    ba.h(a); // error: B<A>::h(A) not defined; A cannot be named in another translation unit
    i(ba, a); // OK
}

```

— end example]

- 10 Two names that are the same (Clause 6) and that are declared in different scopes shall denote the same variable, function, type, template or namespace if
- (10.1) — both names have external linkage or else both names have internal linkage and are declared in the same translation unit; and
- (10.2) — both names refer to members of the same namespace or to members, not by inheritance, of the same class; and
- (10.3) — when both names denote functions, the parameter-type-lists of the functions (11.3.5) are identical; and
- (10.4) — when both names denote function templates, the signatures (17.6.6.1) are the same.
- 11 After all adjustments of types (during which typedefs (10.1.3) are replaced by their definitions), the types specified by all declarations referring to a given variable or function shall be identical, except that declarations for an array object can specify array types that differ by the presence or absence of a major array bound (11.3.4). A violation of this rule on type identity does not require a diagnostic.
- 12 [Note: Linkage to non-C++ declarations can be achieved using a *linkage-specification* (10.5). — end note]

6.6 Memory and objects

[basic.memobj]

6.6.1 Memory model

[intro.memory]

- 1 The fundamental storage unit in the C++ memory model is the *byte*. A byte is at least large enough to contain any member of the basic execution character set (5.3) and the eight-bit code units of the Unicode UTF-8 encoding form and is composed of a contiguous sequence of bits,³¹ the number of which is implementation-defined. The least significant bit is called the *low-order bit*; the most significant bit is called the *high-order bit*. The memory available to a C++ program consists of one or more sequences of contiguous bytes. Every byte has a unique address.
- 2 [Note: The representation of types is described in 6.7. — end note]
- 3 A *memory location* is either an object of scalar type or a maximal sequence of adjacent bit-fields all having nonzero width. [Note: Various features of the language, such as references and virtual functions, might involve additional memory locations that are not accessible to programs but are managed by the implementation. — end note] Two or more threads of execution (6.8.2) can access separate memory locations without interfering with each other.
- 4 [Note: Thus a bit-field and an adjacent non-bit-field are in separate memory locations, and therefore can be concurrently updated by two threads of execution without interference. The same applies to two bit-fields, if one is declared inside a nested struct declaration and the other is not, or if the two are separated by a zero-length bit-field declaration, or if they are separated by a non-bit-field declaration. It is not safe to concurrently update two bit-fields in the same struct if all fields between them are also bit-fields of nonzero width. — end note]
- 5 [Example: A structure declared as

```

    struct {
        char a;
    };

```

³¹) The number of bits in a byte is reported by the macro CHAR_BIT in the header <climits>.


```

    int b:5,
    c:11,
    :0,
    d:8;
    struct {int ee:8;} e;
}

```

contains four separate memory locations: The member `a` and bit-fields `d` and `e.ee` are each separate memory locations, and can be modified concurrently without interfering with each other. The bit-fields `b` and `c` together constitute the fourth memory location. The bit-fields `b` and `c` cannot be concurrently modified, but `b` and `a`, for example, can be. — *end example*]

6.6.2 Object model

[intro.object]

¹ The constructs in a C++ program create, destroy, refer to, access, and manipulate objects. An *object* is created by a definition (6.1), by a *new-expression* (8.5.2.4), when implicitly changing the active member of a union (12.3), or when a temporary object is created (7.4, 15.2). An object occupies a region of storage in its period of construction (15.7), throughout its lifetime (6.6.3), and in its period of destruction (15.7). [Note: A function is not an object, regardless of whether or not it occupies storage in the way that objects do. — *end note*] The properties of an object are determined when the object is created. An object can have a name (Clause 6). An object has a storage duration (6.6.4) which influences its lifetime (6.6.3). An object has a type (6.7). Some objects are polymorphic (13.3); the implementation generates information associated with each such object that makes it possible to determine that object’s type during program execution. For other objects, the interpretation of the values found therein is determined by the type of the *expressions* (8.5) used to access them.

² Objects can contain other objects, called *subobjects*. A subobject can be a *member subobject* (12.2), a *base class subobject* (Clause 13), or an array element. An object that is not a subobject of any other object is called a *complete object*. If an object is created in storage associated with a member subobject or array element *e* (which may or may not be within its lifetime), the created object is a subobject of *e*’s containing object if:

- (2.1) — the lifetime of *e*’s containing object has begun and not ended, and
- (2.2) — the storage for the new object exactly overlays the storage location associated with *e*, and
- (2.3) — the new object is of the same type as *e* (ignoring cv-qualification).

[Note: If the subobject contains a reference member or a `const` subobject, the name of the original subobject cannot be used to access the new object (6.6.3). — *end note*] [Example:

```

struct X { const int n; };
union U { X x; float f; };
void tong() {
    U u = {{ 1 }};
    u.f = 5.f; // OK, creates new subobject of u (12.3)
    X *p = new (&u.x) X {2}; // OK, creates new subobject of u
    assert(p->n == 2); // OK
    assert(*std::launder(&u.x.n) == 2); // OK
    assert(u.x.n == 2); // undefined behavior, u.x does not name new subobject
}

```

— *end example*]

³ If a complete object is created (8.5.2.4) in storage associated with another object *e* of type “array of *N* unsigned char” or of type “array of *N* `std::byte`” (21.2.1), that array *provides storage* for the created object if:

- (3.1) — the lifetime of *e* has begun and not ended, and
- (3.2) — the storage for the new object fits entirely within *e*, and
- (3.3) — there is no smaller array object that satisfies these constraints.

[Note: If that portion of the array previously provided storage for another object, the lifetime of that object ends because its storage was reused (6.6.3). — *end note*] [Example:

```

template<typename ...T>
struct AlignedUnion {
    alignas(T...) unsigned char data[max(sizeof(T)...)];
};
int f() {
    AlignedUnion<int, char> au;
    int *p = new (au.data) int;           // OK, au.data provides storage
    char *c = new (au.data) char();      // OK, ends lifetime of *p
    char *d = new (au.data + 1) char();
    return *c + *d; // OK
}

struct A { unsigned char a[32]; };
struct B { unsigned char b[16]; };
A a;
B *b = new (a.a + 8) B;                 // a.a provides storage for *b
int *p = new (b->b + 4) int;            // b->b provides storage for *p
                                        // a.a does not provide storage for *p (directly),
                                        // but *p is nested within a (see below)

```

— end example]

4 An object *a* is *nested within* another object *b* if:

(4.1) — *a* is a subobject of *b*, or

(4.2) — *b* provides storage for *a*, or

(4.3) — there exists an object *c* where *a* is nested within *c*, and *c* is nested within *b*.

5 For every object *x*, there is some object called the *complete object of x*, determined as follows:

(5.1) — If *x* is a complete object, then the complete object of *x* is itself.

(5.2) — Otherwise, the complete object of *x* is the complete object of the (unique) object that contains *x*.

6 If a complete object, a data member (12.2), or an array element is of class type, its type is considered the *most derived class*, to distinguish it from the class type of any base class subobject; an object of a most derived class type or of a non-class type is called a *most derived object*.

7 A *potentially-overlapping subobject* is either:

(7.1) — a base class subobject, or

(7.2) — a non-static data member declared with the `no_unique_address` attribute (10.6.11).

8 An object has nonzero size if it

(8.1) — is not a potentially-overlapping subobject, or

(8.2) — is not of class type, or

(8.3) — is of a class type with virtual member functions or virtual base classes, or

(8.4) — has subobjects of nonzero size or bit-fields of nonzero length.

Otherwise, if the object is a base class subobject of a standard-layout class type with no non-static data members, it has zero size. Otherwise, the circumstances under which the object has zero size are implementation-defined. Unless it is a bit-field (12.2.4), an object with nonzero size shall occupy one or more bytes of storage, including every byte that is occupied in full or in part by any of its subobjects. An object of trivially copyable or standard-layout type (6.7) shall occupy contiguous bytes of storage.

9 Unless an object is a bit-field or a subobject of zero size, the address of that object is the address of the first byte it occupies. Two objects with overlapping lifetimes that are not bit-fields may have the same address if one is nested within the other, or if at least one is a subobject of zero size and they are of different types; otherwise, they have distinct addresses and occupy disjoint bytes of storage.³² [Example:

```

static const char test1 = 'x';
static const char test2 = 'x';
const bool b = &test1 != &test2;           // always true

```

³² Under the “as-if” rule an implementation is allowed to store two objects at the same machine address or not store an object at all if the program cannot observe the difference (6.8.1).

— *end example*] The address of a non-bit-field subobject of zero size is the address of an unspecified byte of storage occupied by the complete object of that subobject.

- 10 [Note: C++ provides a variety of fundamental types and several ways of composing new types from existing types (6.7). — *end note*]

6.6.3 Object lifetime

[basic.life]

- 1 The *lifetime* of an object or reference is a runtime property of the object or reference. An object is said to have *non-vacuous initialization* if it is of a class or aggregate type and it or one of its subobjects is initialized by a constructor other than a trivial default constructor. [Note: Initialization by a trivial copy/move constructor is non-vacuous initialization. — *end note*] The lifetime of an object of type T begins when:
 - (1.1) — storage with the proper alignment and size for type T is obtained, and
 - (1.2) — if the object has non-vacuous initialization, its initialization is complete,
 except that if the object is a union member or subobject thereof, its lifetime only begins if that union member is the initialized member in the union (11.6.1, 15.6.2), or as described in 12.3. The lifetime of an object *o* of type T ends when:
 - (1.3) — if T is a class type with a non-trivial destructor (15.4), the destructor call starts, or
 - (1.4) — the storage which the object occupies is released, or is reused by an object that is not nested within *o* (6.6.2).
- 2 The lifetime of a reference begins when its initialization is complete. The lifetime of a reference ends as if it were a scalar object.
- 3 [Note: 15.6.2 describes the lifetime of base and member subobjects. — *end note*]
- 4 The properties ascribed to objects and references throughout this document apply for a given object or reference only during its lifetime. [Note: In particular, before the lifetime of an object starts and after its lifetime ends there are significant restrictions on the use of the object, as described below, in 15.6.2 and in 15.7. Also, the behavior of an object under construction and destruction might not be the same as the behavior of an object whose lifetime has started and not ended. 15.6.2 and 15.7 describe the behavior of objects during the construction and destruction phases. — *end note*]
- 5 A program may end the lifetime of any object by reusing the storage which the object occupies or by explicitly calling the destructor for an object of a class type with a non-trivial destructor. For an object of a class type with a non-trivial destructor, the program is not required to call the destructor explicitly before the storage which the object occupies is reused or released; however, if there is no explicit call to the destructor or if a *delete-expression* (8.5.2.5) is not used to release the storage, the destructor shall not be implicitly called and any program that depends on the side effects produced by the destructor has undefined behavior.
- 6 Before the lifetime of an object has started but after the storage which the object will occupy has been allocated³³ or, after the lifetime of an object has ended and before the storage which the object occupied is reused or released, any pointer that represents the address of the storage location where the object will be or was located may be used but only in limited ways. For an object under construction or destruction, see 15.7. Otherwise, such a pointer refers to allocated storage (6.6.4.4.1), and using the pointer as if the pointer were of type `void*`, is well-defined. Indirection through such a pointer is permitted but the resulting lvalue may only be used in limited ways, as described below. The program has undefined behavior if:
 - (6.1) — the object will be or was of a class type with a non-trivial destructor and the pointer is used as the operand of a *delete-expression*,
 - (6.2) — the pointer is used to access a non-static data member or call a non-static member function of the object, or
 - (6.3) — the pointer is implicitly converted (7.11) to a pointer to a virtual base class, or
 - (6.4) — the pointer is used as the operand of a `static_cast` (8.5.1.9), except when the conversion is to pointer to *cv void*, or to pointer to *cv void* and subsequently to pointer to *cv char*, *cv unsigned char*, or *cv std::byte* (21.2.1), or
 - (6.5) — the pointer is used as the operand of a `dynamic_cast` (8.5.1.7).

[Example:

```
#include <cstdlib>
```

³³ For example, before the construction of a global object that is initialized via a user-provided constructor (15.7).

```

struct B {
    virtual void f();
    void mutate();
    virtual ~B();
};

struct D1 : B { void f(); };
struct D2 : B { void f(); };

void B::mutate() {
    new (this) D2;    // reuses storage — ends the lifetime of *this
    f();             // undefined behavior
    ... = this;     // OK, this points to valid memory
}

void g() {
    void* p = std::malloc(sizeof(D1) + sizeof(D2));
    B* pb = new (p) D1;
    pb->mutate();
    *pb;            // OK: pb points to valid memory
    void* q = pb;   // OK: pb points to valid memory
    pb->f();        // undefined behavior, lifetime of *pb has ended
}

```

— end example]

- 7 Similarly, before the lifetime of an object has started but after the storage which the object will occupy has been allocated or, after the lifetime of an object has ended and before the storage which the object occupied is reused or released, any glvalue that refers to the original object may be used but only in limited ways. For an object under construction or destruction, see 15.7. Otherwise, such a glvalue refers to allocated storage (6.6.4.4.1), and using the properties of the glvalue that do not depend on its value is well-defined. The program has undefined behavior if:

- (7.1) — the glvalue is used to access the object, or
- (7.2) — the glvalue is used to call a non-static member function of the object, or
- (7.3) — the glvalue is bound to a reference to a virtual base class (11.6.3), or
- (7.4) — the glvalue is used as the operand of a `dynamic_cast` (8.5.1.7) or as the operand of `typeid`.

- 8 If, after the lifetime of an object has ended and before the storage which the object occupied is reused or released, a new object is created at the storage location which the original object occupied, a pointer that pointed to the original object, a reference that referred to the original object, or the name of the original object will automatically refer to the new object and, once the lifetime of the new object has started, can be used to manipulate the new object, if:

- (8.1) — the storage for the new object exactly overlays the storage location which the original object occupied, and
- (8.2) — the new object is of the same type as the original object (ignoring the top-level cv-qualifiers), and
- (8.3) — the type of the original object is not const-qualified, and, if a class type, does not contain any non-static data member whose type is const-qualified or a reference type, and
- (8.4) — neither the original object nor the new object is a potentially-overlapping subobject (6.6.2).

[Example:

```

struct C {
    int i;
    void f();
    const C& operator=( const C& );
};

const C& C::operator=( const C& other) {
    if ( this != &other ) {
        this->~C();           // lifetime of *this ends
        new (this) C(other); // new object of type C created
        f();                 // well-defined
    }
}

```

```

    }
    return *this;
}

C c1;
C c2;
c1 = c2;           // well-defined
c1.f();           // well-defined; c1 refers to a new object of type C

```

— *end example*] [Note: If these conditions are not met, a pointer to the new object can be obtained from a pointer that represents the address of its storage by calling `std::launder` (21.6). — *end note*]

- ⁹ If a program ends the lifetime of an object of type T with static (6.6.4.1), thread (6.6.4.2), or automatic (6.6.4.3) storage duration and if T has a non-trivial destructor,³⁴ the program must ensure that an object of the original type occupies that same storage location when the implicit destructor call takes place; otherwise the behavior of the program is undefined. This is true even if the block is exited with an exception. [*Example*:

```

class T { };
struct B {
    ~B();
};

void h() {
    B b;
    new (&b) T;
}           // undefined behavior at block exit

```

— *end example*]

- ¹⁰ Creating a new object within the storage that a const complete object with static, thread, or automatic storage duration occupies, or within the storage that such a const object used to occupy before its lifetime ended, results in undefined behavior. [*Example*:

```

struct B {
    B();
    ~B();
};

const B b;

void h() {
    b.~B();
    new (const_cast<B*>(&b)) const B;   // undefined behavior
}

```

— *end example*]

- ¹¹ In this subclause, “before” and “after” refer to the “happens before” relation (6.8.2). [Note: Therefore, undefined behavior results if an object that is being constructed in one thread is referenced from another thread without adequate synchronization. — *end note*]

6.6.4 Storage duration

[basic.stc]

- ¹ The *storage duration* is the property of an object that defines the minimum potential lifetime of the storage containing the object. The storage duration is determined by the construct used to create the object and is one of the following:

- (1.1) — static storage duration
- (1.2) — thread storage duration
- (1.3) — automatic storage duration
- (1.4) — dynamic storage duration

³⁴ That is, an object for which a destructor will be called implicitly—upon exit from the block for an object with automatic storage duration, upon exit from the thread for an object with thread storage duration, or upon exit from the program for an object with static storage duration.

- 2 Static, thread, and automatic storage durations are associated with objects introduced by declarations (6.1) and implicitly created by the implementation (15.2). The dynamic storage duration is associated with objects created by a *new-expression* (8.5.2.4).
- 3 The storage duration categories apply to references as well.
- 4 When the end of the duration of a region of storage is reached, the values of all pointers representing the address of any part of that region of storage become invalid pointer values (6.7.2). Indirection through an invalid pointer value and passing an invalid pointer value to a deallocation function have undefined behavior. Any other use of an invalid pointer value has implementation-defined behavior.³⁵

6.6.4.1 Static storage duration

[basic.stc.static]

- 1 All variables which do not have dynamic storage duration, do not have thread storage duration, and are not local have *static storage duration*. The storage for these entities shall last for the duration of the program (6.8.3.2, 6.8.3.4).
- 2 If a variable with static storage duration has initialization or a destructor with side effects, it shall not be eliminated even if it appears to be unused, except that a class object or its copy/move may be eliminated as specified in 15.8.
- 3 The keyword `static` can be used to declare a local variable with static storage duration. [Note: 9.7 describes the initialization of local `static` variables; 6.8.3.4 describes the destruction of local `static` variables. — *end note*]
- 4 The keyword `static` applied to a class data member in a class definition gives the data member static storage duration.

6.6.4.2 Thread storage duration

[basic.stc.thread]

- 1 All variables declared with the `thread_local` keyword have *thread storage duration*. The storage for these entities shall last for the duration of the thread in which they are created. There is a distinct object or reference per thread, and use of the declared name refers to the entity associated with the current thread.
- 2 A variable with thread storage duration shall be initialized before its first odr-use (6.2) and, if constructed, shall be destroyed on thread exit.

6.6.4.3 Automatic storage duration

[basic.stc.auto]

- 1 Block-scope variables not explicitly declared `static`, `thread_local`, or `extern` have *automatic storage duration*. The storage for these entities lasts until the block in which they are created exits.
- 2 [Note: These variables are initialized and destroyed as described in 9.7. — *end note*]
- 3 If a variable with automatic storage duration has initialization or a destructor with side effects, an implementation shall not destroy it before the end of its block nor eliminate it as an optimization, even if it appears to be unused, except that a class object or its copy/move may be eliminated as specified in 15.8.

6.6.4.4 Dynamic storage duration

[basic.stc.dynamic]

- 1 Objects can be created dynamically during program execution (6.8.1), using *new-expressions* (8.5.2.4), and destroyed using *delete-expressions* (8.5.2.5). A C++ implementation provides access to, and management of, dynamic storage via the global *allocation functions* `operator new` and `operator new[]` and the global *deallocation functions* `operator delete` and `operator delete[]`. [Note: The non-allocating forms described in 21.6.2.3 do not perform allocation or deallocation. — *end note*]
- 2 The library provides default definitions for the global allocation and deallocation functions. Some global allocation and deallocation functions are replaceable (21.6.2). A C++ program shall provide at most one definition of a replaceable allocation or deallocation function. Any such function definition replaces the default version provided in the library (20.5.4.6). The following allocation and deallocation functions (21.6) are implicitly declared in global scope in each translation unit of a program.

```
[[nodiscard]] void* operator new(std::size_t);
[[nodiscard]] void* operator new(std::size_t, std::align_val_t);
```

³⁵) Some implementations might define that copying an invalid pointer value causes a system-generated runtime fault.

```

void operator delete(void*) noexcept;
void operator delete(void*, std::size_t) noexcept;
void operator delete(void*, std::align_val_t) noexcept;
void operator delete(void*, std::size_t, std::align_val_t) noexcept;

[[nodiscard]] void* operator new[](std::size_t);
[[nodiscard]] void* operator new[](std::size_t, std::align_val_t);

void operator delete[](void*) noexcept;
void operator delete[](void*, std::size_t) noexcept;
void operator delete[](void*, std::align_val_t) noexcept;
void operator delete[](void*, std::size_t, std::align_val_t) noexcept;

```

These implicit declarations introduce only the function names `operator new`, `operator new[]`, `operator delete`, and `operator delete[]`. [Note: The implicit declarations do not introduce the names `std`, `std::size_t`, `std::align_val_t`, or any other names that the library uses to declare these names. Thus, a *new-expression*, *delete-expression* or function call that refers to one of these functions without including the header `<new>` is well-formed. However, referring to `std` or `std::size_t` or `std::align_val_t` is ill-formed unless the name has been declared by including the appropriate header. — end note] Allocation and/or deallocation functions may also be declared and defined for any class (15.5).

- ³ If the behavior of an allocation or deallocation function does not satisfy the semantic constraints specified in 6.6.4.4.1 and 6.6.4.4.2, the behavior is undefined.

6.6.4.4.1 Allocation functions

[basic.stc.dynamic.allocation]

- ¹ An allocation function shall be a class member function or a global function; a program is ill-formed if an allocation function is declared in a namespace scope other than global scope or declared static in global scope. The return type shall be `void*`. The first parameter shall have type `std::size_t` (21.2). The first parameter shall not have an associated default argument (11.3.6). The value of the first parameter is interpreted as the requested size of the allocation. An allocation function can be a function template. Such a template shall declare its return type and first parameter as specified above (that is, template parameter types shall not be used in the return type and first parameter type). Template allocation functions shall have two or more parameters.
- ² An allocation function attempts to allocate the requested amount of storage. If it is successful, it returns the address of the start of a block of storage whose length in bytes is at least as large as the requested size. The order, contiguity, and initial value of storage allocated by successive calls to an allocation function are unspecified. For an allocation function other than a reserved placement allocation function (21.6.2.3), the pointer returned is suitably aligned so that it can be converted to a pointer to any suitable complete object type (21.6.2.1) and then used to access the object or array in the storage allocated (until the storage is explicitly deallocated by a call to a corresponding deallocation function). Even if the size of the space requested is zero, the request can fail. If the request succeeds, the value returned by a replaceable allocation function is a non-null pointer value (7.11) `p0` different from any previously returned value `p1`, unless that value `p1` was subsequently passed to a replaceable deallocation function. Furthermore, for the library allocation functions in 21.6.2.1 and 21.6.2.2, `p0` represents the address of a block of storage disjoint from the storage for any other object accessible to the caller. The effect of indirecting through a pointer returned from a request for zero size is undefined.³⁶
- ³ An allocation function that fails to allocate storage can invoke the currently installed new-handler function (21.6.3.3), if any. [Note: A program-supplied allocation function can obtain the address of the currently installed `new_handler` using the `std::get_new_handler` function (21.6.3.4). — end note] An allocation function that has a non-throwing exception specification (18.4) indicates failure by returning a null pointer value. Any other allocation function never returns a null pointer value and indicates failure only by throwing an exception (18.1) of a type that would match a handler (18.3) of type `std::bad_alloc` (21.6.3.1).
- ⁴ A global allocation function is only called as the result of a new expression (8.5.2.4), or called directly using the function call syntax (8.5.1.2), or called indirectly through calls to the functions in the C++ standard library. [Note: In particular, a global allocation function is not called to allocate storage for objects with static storage duration (6.6.4.1), for objects or references with thread storage duration (6.6.4.2), for objects of type `std::type_info` (8.5.1.8), or for an exception object (18.1). — end note]

³⁶ The intent is to have `operator new()` implementable by calling `std::malloc()` or `std::calloc()`, so the rules are substantially the same. C++ differs from C in requiring a zero request to return a non-null pointer.

6.6.4.4.2 Deallocation functions [basic.stc.dynamic.deallocation]

- 1 Deallocation functions shall be class member functions or global functions; a program is ill-formed if deallocation functions are declared in a namespace scope other than global scope or declared static in global scope.
- 2 A deallocation function is a *destroying operator delete* if it has at least two parameters and its second parameter is of type `std::destroying_delete_t`. A destroying operator delete shall be a class member function named `operator delete`. [Note: Array deletion cannot use a destroying operator delete. — *end note*]
- 3 Each deallocation function shall return `void`. If the function is a destroying operator delete declared in class type `C`, the type of its first parameter shall be `C*`; otherwise, the type of its first parameter shall be `void*`. A deallocation function may have more than one parameter. A *usual deallocation function* is a deallocation function whose parameters after the first are
 - (3.1) — optionally, a parameter of type `std::destroying_delete_t`, then
 - (3.2) — optionally, a parameter of type `std::size_t`³⁷, then
 - (3.3) — optionally, a parameter of type `std::align_val_t`.

A destroying operator delete shall be a usual deallocation function. A deallocation function may be an instance of a function template. Neither the first parameter nor the return type shall depend on a template parameter. A deallocation function template shall have two or more function parameters. A template instance is never a usual deallocation function, regardless of its signature.
- 4 If a deallocation function terminates by throwing an exception, the behavior is undefined. The value of the first argument supplied to a deallocation function may be a null pointer value; if so, and if the deallocation function is one supplied in the standard library, the call has no effect.
- 5 If the argument given to a deallocation function in the standard library is a pointer that is not the null pointer value (7.11), the deallocation function shall deallocate the storage referenced by the pointer, ending the duration of the region of storage.

6.6.4.4.3 Safely-derived pointers [basic.stc.dynamic.safety]

- 1 A *traceable pointer object* is
 - (1.1) — an object of an object pointer type (6.7.2), or
 - (1.2) — an object of an integral type that is at least as large as `std::intptr_t`, or
 - (1.3) — a sequence of elements in an array of narrow character type (6.7.1), where the size and alignment of the sequence match those of some object pointer type.
- 2 A pointer value is a *safely-derived pointer* to a dynamic object only if it has an object pointer type and it is one of the following:
 - (2.1) — the value returned by a call to the C++ standard library implementation of `::operator new(std::size_t)` or `::operator new(std::size_t, std::align_val_t)`³⁸
 - (2.2) — the result of taking the address of an object (or one of its subobjects) designated by an lvalue resulting from indirection through a safely-derived pointer value;
 - (2.3) — the result of well-defined pointer arithmetic (8.5.6) using a safely-derived pointer value;
 - (2.4) — the result of a well-defined pointer conversion (7.11, 8.5.3) of a safely-derived pointer value;
 - (2.5) — the result of a `reinterpret_cast` of a safely-derived pointer value;
 - (2.6) — the result of a `reinterpret_cast` of an integer representation of a safely-derived pointer value;
 - (2.7) — the value of an object whose value was copied from a traceable pointer object, where at the time of the copy the source object contained a copy of a safely-derived pointer value.
- 3 An integer value is an *integer representation of a safely-derived pointer* only if its type is at least as large as `std::intptr_t` and it is one of the following:

³⁷ The global `operator delete(void*, std::size_t)` precludes use of an allocation function `void operator new(std::size_t, std::size_t)` as a placement allocation function (C.3.2).

³⁸ This subclause does not impose restrictions on indirection through pointers to memory not allocated by `::operator new`. This maintains the ability of many C++ implementations to use binary libraries and components written in other languages. In particular, this applies to C binaries, because indirection through pointers to memory allocated by `std::malloc` is not restricted.

- (3.1) — the result of a `reinterpret_cast` of a safely-derived pointer value;
 - (3.2) — the result of a valid conversion of an integer representation of a safely-derived pointer value;
 - (3.3) — the value of an object whose value was copied from a traceable pointer object, where at the time of the copy the source object contained an integer representation of a safely-derived pointer value;
 - (3.4) — the result of an additive or bitwise operation, one of whose operands is an integer representation of a safely-derived pointer value P, if that result converted by `reinterpret_cast<void*>` would compare equal to a safely-derived pointer computable from `reinterpret_cast<void*>(P)`.
- 4 An implementation may have *relaxed pointer safety*, in which case the validity of a pointer value does not depend on whether it is a safely-derived pointer value. Alternatively, an implementation may have *strict pointer safety*, in which case a pointer value referring to an object with dynamic storage duration that is not a safely-derived pointer value is an invalid pointer value unless the referenced complete object has previously been declared reachable (24.10.5). [Note: The effect of using an invalid pointer value (including passing it to a deallocation function) is undefined, see 6.6.4. This is true even if the unsafely-derived pointer value might compare equal to some safely-derived pointer value. — end note] It is implementation-defined whether an implementation has relaxed or strict pointer safety.

6.6.4.5 Duration of subobjects

[basic.stc.inherit]

- 1 The storage duration of subobjects and reference members is that of their complete object (6.6.2).

6.6.5 Alignment

[basic.align]

- 1 Object types have *alignment requirements* (6.7.1, 6.7.2) which place restrictions on the addresses at which an object of that type may be allocated. An *alignment* is an implementation-defined integer value representing the number of bytes between successive addresses at which a given object can be allocated. An object type imposes an alignment requirement on every object of that type; stricter alignment can be requested using the alignment specifier (10.6.2).
- 2 A *fundamental alignment* is represented by an alignment less than or equal to the greatest alignment supported by the implementation in all contexts, which is equal to `alignof(std::max_align_t)` (21.2). The alignment required for a type might be different when it is used as the type of a complete object and when it is used as the type of a subobject. [Example:
- ```
struct B { long double d; };
struct D : virtual B { char c; };
```
- When D is the type of a complete object, it will have a subobject of type B, so it must be aligned appropriately for a `long double`. If D appears as a subobject of another object that also has B as a virtual base class, the B subobject might be part of a different subobject, reducing the alignment requirements on the D subobject. — end example] The result of the `alignof` operator reflects the alignment requirement of the type in the complete-object case.
- 3 An *extended alignment* is represented by an alignment greater than `alignof(std::max_align_t)`. It is implementation-defined whether any extended alignments are supported and the contexts in which they are supported (10.6.2). A type having an extended alignment requirement is an *over-aligned type*. [Note: Every over-aligned type is or contains a class type to which extended alignment applies (possibly through a non-static data member). — end note] A *new-extended alignment* is represented by an alignment greater than `__STDCPP_DEFAULT_NEW_ALIGNMENT__` (19.8).
- 4 Alignments are represented as values of the type `std::size_t`. Valid alignments include only those values returned by an `alignof` expression for the fundamental types plus an additional implementation-defined set of values, which may be empty. Every alignment value shall be a non-negative integral power of two.
- 5 Alignments have an order from *weaker* to *stronger* or *stricter* alignments. Stricter alignments have larger alignment values. An address that satisfies an alignment requirement also satisfies any weaker valid alignment requirement.
- 6 The alignment requirement of a complete type can be queried using an `alignof` expression (8.5.2.6). Furthermore, the narrow character types (6.7.1) shall have the weakest alignment requirement. [Note: This enables the narrow character types to be used as the underlying type for an aligned memory area (10.6.2). — end note]
- 7 Comparing alignments is meaningful and provides the obvious results:
- (7.1) — Two alignments are equal when their numeric values are equal.

- (7.2) — Two alignments are different when their numeric values are not equal.
- (7.3) — When an alignment is larger than another it represents a stricter alignment.
- 8 [Note: The runtime pointer alignment function (24.10.6) can be used to obtain an aligned pointer within a buffer; the aligned-storage templates in the library (24.15.7.6) can be used to obtain aligned storage. — *end note*]
- 9 If a request for a specific extended alignment in a specific context is not supported by an implementation, the program is ill-formed.

## 6.7 Types

[basic.types]

- 1 [Note: 6.7 and the subclauses thereof impose requirements on implementations regarding the representation of types. There are two kinds of types: fundamental types and compound types. Types describe objects (6.6.2), references (11.3.2), or functions (11.3.5). — *end note*]
- 2 For any object (other than a potentially-overlapping subobject) of trivially copyable type T, whether or not the object holds a valid value of type T, the underlying bytes (6.6.1) making up the object can be copied into an array of `char`, `unsigned char`, or `std::byte` (21.2.1).<sup>39</sup> If the content of that array is copied back into the object, the object shall subsequently hold its original value. [Example:

```
#define N sizeof(T)
char buf[N];
T obj; // obj initialized to its original value
std::memcpy(buf, &obj, N); // between these two calls to std::memcpy, obj might be modified
std::memcpy(&obj, buf, N); // at this point, each subobject of obj of scalar type holds its original value
```

— *end example*]

- 3 For any trivially copyable type T, if two pointers to T point to distinct T objects `obj1` and `obj2`, where neither `obj1` nor `obj2` is a potentially-overlapping subobject, if the underlying bytes (6.6.1) making up `obj1` are copied into `obj2`,<sup>40</sup> `obj2` shall subsequently hold the same value as `obj1`. [Example:

```
T* t1p;
T* t2p; // provided that t2p points to an initialized object ...
std::memcpy(t1p, t2p, sizeof(T)); // at this point, every subobject of trivially copyable type in *t1p contains // the same value as the corresponding subobject in *t2p
```

— *end example*]

- 4 The *object representation* of an object of type T is the sequence of *N* `unsigned char` objects taken up by the object of type T, where *N* equals `sizeof(T)`. The *value representation* of an object is the set of bits that hold the value of type T. Bits in the object representation that are not part of the value representation are *padding bits*. For trivially copyable types, the value representation is a set of bits in the object representation that determines a *value*, which is one discrete element of an implementation-defined set of values.<sup>41</sup>
- 5 A class that has been declared but not defined, an enumeration type in certain contexts (10.2), or an array of unknown bound or of incomplete element type, is an *incompletely-defined object type*.<sup>42</sup> Incompletely-defined object types and *cv void* are *incomplete types* (6.7.1). Objects shall not be defined to have an incomplete type.
- 6 A class type (such as “`class X`”) might be incomplete at one point in a translation unit and complete later on; the type “`class X`” is the same type at both points. The declared type of an array object might be an array of incomplete class type and therefore incomplete; if the class type is completed later on in the translation unit, the array type becomes complete; the array type at those two points is the same type. The declared type of an array object might be an array of unknown bound and therefore be incomplete at one point in a translation unit and complete later on; the array types at those two points (“array of unknown bound of T” and “array of N T”) are different types. The type of a pointer to array of unknown bound, or of a type defined by a `typedef` declaration to be an array of unknown bound, cannot be completed. [Example:

```
class X; // X is an incomplete type
extern X* xp; // xp is a pointer to an incomplete type
```

39) By using, for example, the library functions (20.5.1.2) `std::memcpy` or `std::memmove`.

40) By using, for example, the library functions (20.5.1.2) `std::memcpy` or `std::memmove`.

41) The intent is that the memory model of C++ is compatible with that of ISO/IEC 9899 Programming Language C.

42) The size and layout of an instance of an incompletely-defined object type is unknown.

```

extern int arr[]; // the type of arr is incomplete
typedef int UNKA[]; // UNKA is an incomplete type
UNKA* arrp; // arrp is a pointer to an incomplete type
UNKA** arrpp;

void foo() {
 xp++; // ill-formed: X is incomplete
 arrp++; // ill-formed: incomplete type
 arrpp++; // OK: sizeof UNKA* is known
}

struct X { int i; }; // now X is a complete type
int arr[10]; // now the type of arr is complete

X x;
void bar() {
 xp = &x; // OK; type is "pointer to X"
 arrp = &arr; // ill-formed: different types
 xp++; // OK: X is complete
 arrpp++; // ill-formed: UNKA can't be completed
}

```

— end example]

7 [Note: The rules for declarations and expressions describe in which contexts incomplete types are prohibited. — end note]

8 An *object type* is a (possibly cv-qualified) type that is not a function type, not a reference type, and not cv void.

9 Arithmetic types (6.7.1), enumeration types, pointer types, pointer-to-member types (6.7.2), `std::nullptr_t`, and cv-qualified (6.7.3) versions of these types are collectively called *scalar types*. Cv-unqualified scalar types, trivially copyable class types (Clause 12), arrays of such types, and cv-qualified versions of these types are collectively called *trivially copyable types*. Scalar types, trivial class types (Clause 12), arrays of such types and cv-qualified versions of these types are collectively called *trivial types*. Scalar types, standard-layout class types (Clause 12), arrays of such types and cv-qualified versions of these types are collectively called *standard-layout types*.

10 A type is a *literal type* if it is:

- (10.1) — possibly cv-qualified void; or
- (10.2) — a scalar type; or
- (10.3) — a reference type; or
- (10.4) — an array of literal type; or
- (10.5) — a possibly cv-qualified class type (Clause 12) that has all of the following properties:
  - (10.5.1) — it has a trivial destructor,
  - (10.5.2) — it is either a closure type (8.4.5.1), an aggregate type (11.6.1), or has at least one constexpr constructor or constructor template (possibly inherited (10.3.3) from a base class) that is not a copy or move constructor,
  - (10.5.3) — if it is a union, at least one of its non-static data members is of non-volatile literal type, and
  - (10.5.4) — if it is not a union, all of its non-static data members and base classes are of non-volatile literal types.

[Note: A literal type is one for which it might be possible to create an object within a constant expression. It is not a guarantee that it is possible to create such an object, nor is it a guarantee that any object of that type will be usable in a constant expression. — end note]

11 Two types *cv1* T1 and *cv2* T2 are *layout-compatible* types if T1 and T2 are the same type, layout-compatible enumerations (10.2), or layout-compatible standard-layout class types (12.2).

## 6.7.1 Fundamental types

[basic.fundamental]

- 1 Objects declared as characters (`char`) shall be large enough to store any member of the implementation's basic character set. If a character from this set is stored in a character object, the integral value of that character object is equal to the value of the single character literal form of that character. It is implementation-defined whether a `char` object can hold negative values. Characters can be explicitly declared `unsigned` or `signed`. Plain `char`, `signed char`, and `unsigned char` are three distinct types, collectively called *narrow character types*. A `char`, a `signed char`, and an `unsigned char` occupy the same amount of storage and have the same alignment requirements (6.6.5); that is, they have the same object representation. For narrow character types, all bits of the object representation participate in the value representation. [Note: A bit-field of narrow character type whose length is larger than the number of bits in the object representation of that type has padding bits; see 6.7. — end note] For unsigned narrow character types, each possible bit pattern of the value representation represents a distinct number. These requirements do not hold for other types. In any particular implementation, a plain `char` object can take on either the same values as a `signed char` or an `unsigned char`; which one is implementation-defined. For each value  $i$  of type `unsigned char` in the range 0 to 255 inclusive, there exists a value  $j$  of type `char` such that the result of an integral conversion (7.8) from  $i$  to `char` is  $j$ , and the result of an integral conversion from  $j$  to `unsigned char` is  $i$ .
- 2 There are five *standard signed integer types*: “`signed char`”, “`short int`”, “`int`”, “`long int`”, and “`long long int`”. In this list, each type provides at least as much storage as those preceding it in the list. There may also be implementation-defined *extended signed integer types*. The standard and extended signed integer types are collectively called *signed integer types*. Plain `ints` have the natural size suggested by the architecture of the execution environment<sup>43</sup>; the other signed integer types are provided to meet special needs.
- 3 For each of the standard signed integer types, there exists a corresponding (but different) *standard unsigned integer type*: “`unsigned char`”, “`unsigned short int`”, “`unsigned int`”, “`unsigned long int`”, and “`unsigned long long int`”, each of which occupies the same amount of storage and has the same alignment requirements (6.6.5) as the corresponding signed integer type<sup>44</sup>; that is, each signed integer type has the same object representation as its corresponding unsigned integer type. Likewise, for each of the extended signed integer types there exists a corresponding *extended unsigned integer type* with the same amount of storage and alignment requirements. The standard and extended unsigned integer types are collectively called *unsigned integer types*. The range of non-negative values of a signed integer type is a subrange of the corresponding unsigned integer type, the representation of the same value in each of the two types is the same, and the value representation of each corresponding signed/unsigned type shall be the same. The standard signed integer types and standard unsigned integer types are collectively called the *standard integer types*, and the extended signed integer types and extended unsigned integer types are collectively called the *extended integer types*. The signed and unsigned integer types shall satisfy the constraints given in the C standard, subclause 5.2.4.2.1.
- 4 Unsigned integers shall obey the laws of arithmetic modulo  $2^n$  where  $n$  is the number of bits in the value representation of that particular size of integer.<sup>45</sup>
- 5 Type `wchar_t` is a distinct type whose values can represent distinct codes for all members of the largest extended character set specified among the supported locales (26.3.1). Type `wchar_t` shall have the same size, signedness, and alignment requirements (6.6.5) as one of the other integral types, called its *underlying type*. Types `char16_t` and `char32_t` denote distinct types with the same size, signedness, and alignment as `uint_least16_t` and `uint_least32_t`, respectively, in `<stdint>`, called the underlying types.
- 6 Values of type `bool` are either `true` or `false`.<sup>46</sup> [Note: There are no `signed`, `unsigned`, `short`, or `long bool` types or values. — end note] Values of type `bool` participate in integral promotions (7.6).
- 7 Types `bool`, `char`, `char16_t`, `char32_t`, `wchar_t`, and the signed and unsigned integer types are collectively called *integral types*.<sup>47</sup> A synonym for integral type is *integer type*. The representations of integral types

---

43) `int` must also be large enough to contain any value in the range `[INT_MIN, INT_MAX]`, as defined in the header `<climits>`.

44) See 10.1.7.2 regarding the correspondence between types and the sequences of *type-specifiers* that designate them.

45) This implies that unsigned arithmetic does not overflow because a result that cannot be represented by the resulting unsigned integer type is reduced modulo the number that is one greater than the largest value that can be represented by the resulting unsigned integer type.

46) Using a `bool` value in ways described by this document as “undefined”, such as by examining the value of an uninitialized automatic object, might cause it to behave as if it is neither `true` nor `false`.

47) Therefore, enumerations (10.2) are not integral; however, enumerations can be promoted to integral types as specified in 7.6.

shall define values by use of a pure binary numeration system.<sup>48</sup> [*Example*: This document permits two’s complement, ones’ complement and signed magnitude representations for integral types. — *end example*]

- 8 There are three *floating-point types*: `float`, `double`, and `long double`. The type `double` provides at least as much precision as `float`, and the type `long double` provides at least as much precision as `double`. The set of values of the type `float` is a subset of the set of values of the type `double`; the set of values of the type `double` is a subset of the set of values of the type `long double`. The value representation of floating-point types is implementation-defined. [*Note*: This document imposes no requirements on the accuracy of floating-point operations; see also 21.3. — *end note*] Integral and floating-point types are collectively called *arithmetic* types. Specializations of the standard library template `std::numeric_limits` (21.3) shall specify the maximum and minimum values of each arithmetic type for an implementation.
- 9 A type `cv void` is an incomplete type that cannot be completed; such a type has an empty set of values. It is used as the return type for functions that do not return a value. Any expression can be explicitly converted to type `cv void` (8.5.3). An expression of type `cv void` shall be used only as an expression statement (9.2), as an operand of a comma expression (8.5.19), as a second or third operand of `?:` (8.5.16), as the operand of `typeid`, `noexcept`, or `decltype`, as the expression in a `return` statement (9.6.3) for a function with the return type `cv void`, or as the operand of an explicit conversion to type `cv void`.
- 10 A value of type `std::nullptr_t` is a null pointer constant (7.11). Such values participate in the pointer and the pointer-to-member conversions (7.11, 7.12). `sizeof(std::nullptr_t)` shall be equal to `sizeof(void*)`.
- 11 The types described in this subclause are called *fundamental types*. [*Note*: Even if the implementation defines two or more fundamental types to have the same value representation, they are nevertheless different types. — *end note*]

## 6.7.2 Compound types

[**basic.compound**]

- 1 Compound types can be constructed in the following ways:
- (1.1) — *arrays* of objects of a given type, 11.3.4;
  - (1.2) — *functions*, which have parameters of given types and return `void` or references or objects of a given type, 11.3.5;
  - (1.3) — *pointers* to `cv void` or objects or functions (including static members of classes) of a given type, 11.3.1;
  - (1.4) — *references* to objects or functions of a given type, 11.3.2. There are two types of references:
    - (1.4.1) — *lvalue reference*
    - (1.4.2) — *rvalue reference*
  - (1.5) — *classes* containing a sequence of objects of various types (Clause 12), a set of types, enumerations and functions for manipulating these objects (12.2.1), and a set of restrictions on the access to these entities (Clause 14);
  - (1.6) — *unions*, which are classes capable of containing objects of different types at different times, 12.3;
  - (1.7) — *enumerations*, which comprise a set of named constant values. Each distinct enumeration constitutes a different *enumerated type*, 10.2;
  - (1.8) — *pointers to non-static class members*,<sup>49</sup> which identify members of a given type within objects of a given class, 11.3.3. Pointers to data members and pointers to member functions are collectively called *pointer-to-member* types.
- 2 These methods of constructing types can be applied recursively; restrictions are mentioned in 11.3.1, 11.3.4, 11.3.5, and 11.3.2. Constructing a type such that the number of bytes in its object representation exceeds the maximum value representable in the type `std::size_t` (21.2) is ill-formed.
- 3 The type of a pointer to `cv void` or a pointer to an object type is called an *object pointer type*. [*Note*: A pointer to `void` does not have a pointer-to-object type, however, because `void` is not an object type. — *end note*] The type of a pointer that can designate a function is called a *function pointer type*. A pointer to objects of type `T` is referred to as a “pointer to `T`”. [*Example*: A pointer to an object of type `int` is referred to as “pointer to `int`” and a pointer to an object of class `X` is called a “pointer to `X`”. — *end example*] Except for pointers to static members, text referring to “pointers” does not apply to pointers to members. Pointers

48) A positional representation for integers that uses the binary digits 0 and 1, in which the values represented by successive bits are additive, begin with 1, and are multiplied by successive integral power of 2, except perhaps for the bit with the highest position. (Adapted from the *American National Dictionary for Information Processing Systems*.)

49) Static class members are objects or functions, and pointers to them are ordinary pointers to objects or functions.

to incomplete types are allowed although there are restrictions on what can be done with them (6.6.5). Every value of pointer type is one of the following:

- (3.1) — a *pointer to* an object or function (the pointer is said to *point* to the object or function), or
- (3.2) — a *pointer past the end of* an object (8.5.6), or
- (3.3) — the *null pointer value* (7.11) for that type, or
- (3.4) — an *invalid pointer value*.

A value of a pointer type that is a pointer to or past the end of an object *represents the address* of the first byte in memory (6.6.1) occupied by the object<sup>50</sup> or the first byte in memory after the end of the storage occupied by the object, respectively. [Note: A pointer past the end of an object (8.5.6) is not considered to point to an unrelated object of the object's type that might be located at that address. A pointer value becomes invalid when the storage it denotes reaches the end of its storage duration; see 6.6.4. — *end note*] For purposes of pointer arithmetic (8.5.6) and comparison (8.5.9, 8.5.10), a pointer past the end of the last element of an array *x* of *n* elements is considered to be equivalent to a pointer to a hypothetical element *x*[*n*]. The value representation of pointer types is implementation-defined. Pointers to layout-compatible types shall have the same value representation and alignment requirements (6.6.5). [Note: Pointers to over-aligned types (6.6.5) have no special representation, but their range of valid values is restricted by the extended alignment requirement. — *end note*]

<sup>4</sup> Two objects *a* and *b* are *pointer-interconvertible* if:

- (4.1) — they are the same object, or
- (4.2) — one is a union object and the other is a non-static data member of that object (12.3), or
- (4.3) — one is a standard-layout class object and the other is the first non-static data member of that object, or, if the object has no non-static data members, any base class subobject of that object (12.2), or
- (4.4) — there exists an object *c* such that *a* and *c* are pointer-interconvertible, and *c* and *b* are pointer-interconvertible.

If two objects are pointer-interconvertible, then they have the same address, and it is possible to obtain a pointer to one from a pointer to the other via a `reinterpret_cast` (8.5.1.10). [Note: An array object and its first element are not pointer-interconvertible, even though they have the same address. — *end note*]

<sup>5</sup> A pointer to *cv*-qualified (6.7.3) or *cv*-unqualified `void` can be used to point to objects of unknown type. Such a pointer shall be able to hold any object pointer. An object of type *cv* `void*` shall have the same representation and alignment requirements as *cv* `char*`.

### 6.7.3 CV-qualifiers

[basic.type.qualifier]

<sup>1</sup> A type mentioned in 6.7.1 and 6.7.2 is a *cv-unqualified type*. Each type which is a *cv*-unqualified complete or incomplete object type or is `void` (6.7) has three corresponding *cv*-qualified versions of its type: a *const-qualified* version, a *volatile-qualified* version, and a *const-volatile-qualified* version. The type of an object (6.6.2) includes the *cv-qualifiers* specified in the *decl-specifier-seq* (10.1), *declarator* (Clause 11), *type-id* (11.1), or *new-type-id* (8.5.2.4) when the object is created.

- (1.1) — A *const object* is an object of type `const T` or a non-mutable subobject of such an object.
- (1.2) — A *volatile object* is an object of type `volatile T`, a subobject of such an object, or a mutable subobject of a `const volatile` object.
- (1.3) — A *const volatile object* is an object of type `const volatile T`, a non-mutable subobject of such an object, a `const` subobject of a `volatile` object, or a non-mutable `volatile` subobject of a `const` object.

The *cv*-qualified or *cv*-unqualified versions of a type are distinct types; however, they shall have the same representation and alignment requirements (6.6.5).<sup>51</sup>

<sup>2</sup> A compound type (6.7.2) is not *cv*-qualified by the *cv*-qualifiers (if any) of the types from which it is compounded. Any *cv*-qualifiers applied to an array type affect the array element type (11.3.4).

<sup>3</sup> See 11.3.5 and 12.2.2.1 regarding function types that have *cv-qualifiers*.

<sup>4</sup> There is a partial ordering on *cv*-qualifiers, so that a type can be said to be *more cv-qualified* than another. Table 10 shows the relations that constitute this ordering.

<sup>50</sup> For an object that is not within its lifetime, this is the first byte in memory that it will occupy or used to occupy.

<sup>51</sup> The same representation and alignment requirements are meant to imply interchangeability as arguments to functions, return values from functions, and non-static data members of unions.

Table 10 — Relations on `const` and `volatile`

|                        |   |                             |
|------------------------|---|-----------------------------|
| <i>no cv-qualifier</i> | < | <code>const</code>          |
| <i>no cv-qualifier</i> | < | <code>volatile</code>       |
| <i>no cv-qualifier</i> | < | <code>const volatile</code> |
| <code>const</code>     | < | <code>const volatile</code> |
| <code>volatile</code>  | < | <code>const volatile</code> |

- <sup>5</sup> In this document, the notation *cv* (or *cv1*, *cv2*, etc.), used in the description of types, represents an arbitrary set of cv-qualifiers, i.e., one of {`const`}, {`volatile`}, {`const`, `volatile`}, or the empty set. For a type *cv T*, the *top-level cv-qualifiers* of that type are those denoted by *cv*. [Example: The type corresponding to the *type-id* `const int&` has no top-level cv-qualifiers. The type corresponding to the *type-id* `volatile int *` `const` has the top-level cv-qualifier `const`. For a class type *C*, the type corresponding to the *type-id* `void (C::* volatile)(int) const` has the top-level cv-qualifier `volatile`. — end example]
- <sup>6</sup> Cv-qualifiers applied to an array type attach to the underlying element type, so the notation “*cv T*”, where *T* is an array type, refers to an array whose elements are so-qualified. An array type whose elements are cv-qualified is also considered to have the same cv-qualifications as its elements. [Example:

```
typedef char CA[5];
typedef const char CC;
CC arr1[5] = { 0 };
const CA arr2 = { 0 };
```

The type of both `arr1` and `arr2` is “array of 5 `const char`”, and the array type is considered to be `const`-qualified. — end example]

#### 6.7.4 Integer conversion rank

[conv.rank]

- <sup>1</sup> Every integer type has an *integer conversion rank* defined as follows:

- (1.1) — No two signed integer types other than `char` and `signed char` (if `char` is signed) shall have the same rank, even if they have the same representation.
- (1.2) — The rank of a signed integer type shall be greater than the rank of any signed integer type with a smaller size.
- (1.3) — The rank of `long long int` shall be greater than the rank of `long int`, which shall be greater than the rank of `int`, which shall be greater than the rank of `short int`, which shall be greater than the rank of `signed char`.
- (1.4) — The rank of any unsigned integer type shall equal the rank of the corresponding signed integer type.
- (1.5) — The rank of any standard integer type shall be greater than the rank of any extended integer type with the same size.
- (1.6) — The rank of `char` shall equal the rank of `signed char` and `unsigned char`.
- (1.7) — The rank of `bool` shall be less than the rank of all other standard integer types.
- (1.8) — The ranks of `char16_t`, `char32_t`, and `wchar_t` shall equal the ranks of their underlying types (6.7.1).
- (1.9) — The rank of any extended signed integer type relative to another extended signed integer type with the same size is implementation-defined, but still subject to the other rules for determining the integer conversion rank.
- (1.10) — For all integer types *T1*, *T2*, and *T3*, if *T1* has greater rank than *T2* and *T2* has greater rank than *T3*, then *T1* shall have greater rank than *T3*.

[Note: The integer conversion rank is used in the definition of the integral promotions (7.6) and the usual arithmetic conversions (8.2). — end note]

### 6.8 Program execution

[basic.exec]

#### 6.8.1 Sequential execution

[intro.execution]

- <sup>1</sup> An instance of each object with automatic storage duration (6.6.4.3) is associated with each entry into its block. Such an object exists and retains its last-stored value during the execution of the block and while the block is suspended (by a call of a function or receipt of a signal).

<sup>2</sup> A *constituent expression* is defined as follows:

- (2.1) — The constituent expression of an expression is that expression.
- (2.2) — The constituent expressions of a *braced-init-list* or of a (possibly parenthesized) *expression-list* are the constituent expressions of the elements of the respective list.
- (2.3) — The constituent expressions of a *brace-or-equal-initializer* of the form = *initializer-clause* are the constituent expressions of the *initializer-clause*.

[*Example:*

```
struct A { int x; };
struct B { int y; struct A a; };
B b = { 5, { 1+1 } };
```

The constituent expressions of the *initializer* used for the initialization of `b` are 5 and 1+1. — *end example*]

<sup>3</sup> The *immediate subexpressions* of an expression `e` are

- (3.1) — the constituent expressions of `e`'s operands (8.2),
- (3.2) — any function call that `e` implicitly invokes,
- (3.3) — if `e` is a *lambda-expression* (8.4.5), the initialization of the entities captured by copy and the constituent expressions of the *initializer* of the *init-captures*,
- (3.4) — if `e` is a function call (8.5.1.2) or implicitly invokes a function, the constituent expressions of each default argument (11.3.6) used in the call, or
- (3.5) — if `e` creates an aggregate object (11.6.1), the constituent expressions of each default member initializer (12.2) used in the initialization.

<sup>4</sup> A *subexpression* of an expression `e` is an immediate subexpression of `e` or a subexpression of an immediate subexpression of `e`. [Note: Expressions appearing in the *compound-statement* of a *lambda-expression* are not subexpressions of the *lambda-expression*. — *end note*]

<sup>5</sup> A *full-expression* is

- (5.1) — an unevaluated operand (8.2),
- (5.2) — a *constant-expression* (8.6),
- (5.3) — an *init-declarator* (Clause 11) or a *mem-initializer* (15.6.2), including the constituent expressions of the initializer,
- (5.4) — an invocation of a destructor generated at the end of the lifetime of an object other than a temporary object (15.2), or
- (5.5) — an expression that is not a subexpression of another expression and that is not otherwise part of a full-expression.

If a language construct is defined to produce an implicit call of a function, a use of the language construct is considered to be an expression for the purposes of this definition. Conversions applied to the result of an expression in order to satisfy the requirements of the language construct in which the expression appears are also considered to be part of the full-expression. For an initializer, performing the initialization of the entity (including evaluating default member initializers of an aggregate) is also considered part of the full-expression.

[*Example:*

```
struct S {
 S(int i): I(i) { } // full-expression is initialization of I
 int& v() { return I; }
 ~S() noexcept(false) { }
private:
 int I;
};

S s1(1); // full-expression comprises call of S::S(int)
void f() {
 S s2 = 2; // full-expression comprises call of S::S(int)
 if (S(3).v()) // full-expression includes lvalue-to-rvalue and int to bool conversions,
 // performed before temporary is deleted at end of full-expression
 { }
```



```

 bool b = noexcept(S()); // exception specification of destructor of S considered for noexcept

 // full-expression is destruction of s2 at end of block
}
struct B {
 B(S = S());
};
B b[2] = { B(), B() }; // full-expression is the entire initialization
 // including the destruction of temporaries

```

— end example]

- 6 [Note: The evaluation of a full-expression can include the evaluation of subexpressions that are not lexically part of the full-expression. For example, subexpressions involved in evaluating default arguments (11.3.6) are considered to be created in the expression that calls the function, not the expression that defines the default argument. — end note]
- 7 Reading an object designated by a `volatile` glvalue (8.2.1), modifying an object, calling a library I/O function, or calling a function that does any of those operations are all *side effects*, which are changes in the state of the execution environment. *Evaluation* of an expression (or a subexpression) in general includes both value computations (including determining the identity of an object for glvalue evaluation and fetching a value previously assigned to an object for prvalue evaluation) and initiation of side effects. When a call to a library I/O function returns or an access through a volatile glvalue is evaluated the side effect is considered complete, even though some external actions implied by the call (such as the I/O itself) or by the `volatile` access may not have completed yet.
- 8 *Sequenced before* is an asymmetric, transitive, pair-wise relation between evaluations executed by a single thread (6.8.2), which induces a partial order among those evaluations. Given any two evaluations *A* and *B*, if *A* is sequenced before *B* (or, equivalently, *B* is *sequenced after A*), then the execution of *A* shall precede the execution of *B*. If *A* is not sequenced before *B* and *B* is not sequenced before *A*, then *A* and *B* are *unsequenced*. [Note: The execution of unsequenced evaluations can overlap. — end note] Evaluations *A* and *B* are *indeterminately sequenced* when either *A* is sequenced before *B* or *B* is sequenced before *A*, but it is unspecified which. [Note: Indeterminately sequenced evaluations cannot overlap, but either could be executed first. — end note] An expression *X* is said to be sequenced before an expression *Y* if every value computation and every side effect associated with the expression *X* is sequenced before every value computation and every side effect associated with the expression *Y*.
- 9 Every value computation and side effect associated with a full-expression is sequenced before every value computation and side effect associated with the next full-expression to be evaluated.<sup>52</sup>
- 10 Except where noted, evaluations of operands of individual operators and of subexpressions of individual expressions are unsequenced. [Note: In an expression that is evaluated more than once during the execution of a program, unsequenced and indeterminately sequenced evaluations of its subexpressions need not be performed consistently in different evaluations. — end note] The value computations of the operands of an operator are sequenced before the value computation of the result of the operator. If a side effect on a memory location (6.6.1) is unsequenced relative to either another side effect on the same memory location or a value computation using the value of any object in the same memory location, and they are not potentially concurrent (6.8.2), the behavior is undefined. [Note: The next subclause imposes similar, but more complex restrictions on potentially concurrent computations. — end note]

[Example:

```

void g(int i) {
 i = 7, i++, i++; // i becomes 9

 i = i++ + 1; // the value of i is incremented
 i = i++ + i; // the behavior is undefined
 i = i + 1; // the value of i is incremented
}

```

— end example]

- 11 When calling a function (whether or not the function is inline), every value computation and side effect associated with any argument expression, or with the postfix expression designating the called function, is

---

<sup>52</sup> As specified in 15.2, after a full-expression is evaluated, a sequence of zero or more invocations of destructor functions for temporary objects takes place, usually in reverse order of the construction of each temporary object.

sequenced before execution of every expression or statement in the body of the called function. For each function invocation  $F$ , for every evaluation  $A$  that occurs within  $F$  and every evaluation  $B$  that does not occur within  $F$  but is evaluated on the same thread and as part of the same signal handler (if any), either  $A$  is sequenced before  $B$  or  $B$  is sequenced before  $A$ .<sup>53</sup> [Note: If  $A$  and  $B$  would not otherwise be sequenced then they are indeterminately sequenced. — end note] Several contexts in C++ cause evaluation of a function call, even though no corresponding function call syntax appears in the translation unit. [Example: Evaluation of a *new-expression* invokes one or more allocation and constructor functions; see 8.5.2.4. For another example, invocation of a conversion function (15.3.2) can arise in contexts in which no function call syntax appears. — end example] The sequencing constraints on the execution of the called function (as described above) are features of the function calls as evaluated, whatever the syntax of the expression that calls the function might be.

- <sup>12</sup> If a signal handler is executed as a result of a call to the `std::raise` function, then the execution of the handler is sequenced after the invocation of the `std::raise` function and before its return. [Note: When a signal is received for another reason, the execution of the signal handler is usually unsequenced with respect to the rest of the program. — end note]

## 6.8.2 Multi-threaded executions and data races [intro.multithread]

- <sup>1</sup> A *thread of execution* (also known as a *thread*) is a single flow of control within a program, including the initial invocation of a specific top-level function, and recursively including every function invocation subsequently executed by the thread. [Note: When one thread creates another, the initial call to the top-level function of the new thread is executed by the new thread, not by the creating thread. — end note] Every thread in a program can potentially access every object and function in a program.<sup>54</sup> Under a hosted implementation, a C++ program can have more than one thread running concurrently. The execution of each thread proceeds as defined by the remainder of this document. The execution of the entire program consists of an execution of all of its threads. [Note: Usually the execution can be viewed as an interleaving of all its threads. However, some kinds of atomic operations, for example, allow executions inconsistent with a simple interleaving, as described below. — end note] Under a freestanding implementation, it is implementation-defined whether a program can have more than one thread of execution.
- <sup>2</sup> For a signal handler that is not executed as a result of a call to the `std::raise` function, it is unspecified which thread of execution contains the signal handler invocation.

### 6.8.2.1 Data races [intro.races]

- <sup>1</sup> The value of an object visible to a thread  $T$  at a particular point is the initial value of the object, a value assigned to the object by  $T$ , or a value assigned to the object by another thread, according to the rules below. [Note: In some cases, there may instead be undefined behavior. Much of this subclass is motivated by the desire to support atomic operations with explicit and detailed visibility constraints. However, it also implicitly supports a simpler view for more restricted programs. — end note]
- <sup>2</sup> Two expression evaluations *conflict* if one of them modifies a memory location (6.6.1) and the other one reads or modifies the same memory location.
- <sup>3</sup> The library defines a number of atomic operations (Clause 33) and operations on mutexes (Clause 34) that are specially identified as synchronization operations. These operations play a special role in making assignments in one thread visible to another. A synchronization operation on one or more memory locations is either a consume operation, an acquire operation, a release operation, or both an acquire and release operation. A synchronization operation without an associated memory location is a fence and can be either an acquire fence, a release fence, or both an acquire and release fence. In addition, there are relaxed atomic operations, which are not synchronization operations, and atomic read-modify-write operations, which have special characteristics. [Note: For example, a call that acquires a mutex will perform an acquire operation on the locations comprising the mutex. Correspondingly, a call that releases the same mutex will perform a release operation on those same locations. Informally, performing a release operation on  $A$  forces prior side effects on other memory locations to become visible to other threads that later perform a consume or an acquire operation on  $A$ . “Relaxed” atomic operations are not synchronization operations even though, like synchronization operations, they cannot contribute to data races. — end note]
- <sup>4</sup> All modifications to a particular atomic object  $M$  occur in some particular total order, called the *modification order* of  $M$ . [Note: There is a separate order for each atomic object. There is no requirement that these can

<sup>53</sup>) In other words, function executions do not interleave with each other.

<sup>54</sup>) An object with automatic or thread storage duration (6.6.4) is associated with one specific thread, and can be accessed by a different thread only indirectly through a pointer or reference (6.7.2).

be combined into a single total order for all objects. In general this will be impossible since different threads may observe modifications to different objects in inconsistent orders. — *end note*]

5 A *release sequence* headed by a release operation  $A$  on an atomic object  $M$  is a maximal contiguous sub-sequence of side effects in the modification order of  $M$ , where the first operation is  $A$ , and every subsequent operation

(5.1) — is performed by the same thread that performed  $A$ , or

(5.2) — is an atomic read-modify-write operation.

6 Certain library calls *synchronize with* other library calls performed by another thread. For example, an atomic store-release synchronizes with a load-acquire that takes its value from the store (33.4). [*Note*: Except in the specified cases, reading a later value does not necessarily ensure visibility as described below. Such a requirement would sometimes interfere with efficient implementation. — *end note*] [*Note*: The specifications of the synchronization operations define when one reads the value written by another. For atomic objects, the definition is clear. All operations on a given mutex occur in a single total order. Each mutex acquisition “reads the value written” by the last mutex release. — *end note*]

7 An evaluation  $A$  *carries a dependency* to an evaluation  $B$  if

(7.1) — the value of  $A$  is used as an operand of  $B$ , unless:

(7.1.1) —  $B$  is an invocation of any specialization of `std::kill_dependency` (33.4), or

(7.1.2) —  $A$  is the left operand of a built-in logical AND (&&, see 8.5.14) or logical OR (||, see 8.5.15) operator, or

(7.1.3) —  $A$  is the left operand of a conditional (?:, see 8.5.16) operator, or

(7.1.4) —  $A$  is the left operand of the built-in comma (,) operator (8.5.19);

or

(7.2) —  $A$  writes a scalar object or bit-field  $M$ ,  $B$  reads the value written by  $A$  from  $M$ , and  $A$  is sequenced before  $B$ , or

(7.3) — for some evaluation  $X$ ,  $A$  carries a dependency to  $X$ , and  $X$  carries a dependency to  $B$ .

[*Note*: “Carries a dependency to” is a subset of “is sequenced before”, and is similarly strictly intra-thread. — *end note*]

8 An evaluation  $A$  is *dependency-ordered before* an evaluation  $B$  if

(8.1) —  $A$  performs a release operation on an atomic object  $M$ , and, in another thread,  $B$  performs a consume operation on  $M$  and reads a value written by any side effect in the release sequence headed by  $A$ , or

(8.2) — for some evaluation  $X$ ,  $A$  is dependency-ordered before  $X$  and  $X$  carries a dependency to  $B$ .

[*Note*: The relation “is dependency-ordered before” is analogous to “synchronizes with”, but uses release/consume in place of release/acquire. — *end note*]

9 An evaluation  $A$  *inter-thread happens before* an evaluation  $B$  if

(9.1) —  $A$  synchronizes with  $B$ , or

(9.2) —  $A$  is dependency-ordered before  $B$ , or

(9.3) — for some evaluation  $X$

(9.3.1) —  $A$  synchronizes with  $X$  and  $X$  is sequenced before  $B$ , or

(9.3.2) —  $A$  is sequenced before  $X$  and  $X$  inter-thread happens before  $B$ , or

(9.3.3) —  $A$  inter-thread happens before  $X$  and  $X$  inter-thread happens before  $B$ .

[*Note*: The “inter-thread happens before” relation describes arbitrary concatenations of “sequenced before”, “synchronizes with” and “dependency-ordered before” relationships, with two exceptions. The first exception is that a concatenation is not permitted to end with “dependency-ordered before” followed by “sequenced before”. The reason for this limitation is that a consume operation participating in a “dependency-ordered before” relationship provides ordering only with respect to operations to which this consume operation actually carries a dependency. The reason that this limitation applies only to the end of such a concatenation is that any subsequent release operation will provide the required ordering for a prior consume operation. The second exception is that a concatenation is not permitted to consist entirely of “sequenced before”. The reasons for this limitation are (1) to permit “inter-thread happens before” to be transitively closed and (2)

the “happens before” relation, defined below, provides for relationships consisting entirely of “sequenced before”. — *end note*]

10 An evaluation *A* happens before an evaluation *B* (or, equivalently, *B* happens after *A*) if:

(10.1) — *A* is sequenced before *B*, or

(10.2) — *A* inter-thread happens before *B*.

The implementation shall ensure that no program execution demonstrates a cycle in the “happens before” relation. [*Note*: This cycle would otherwise be possible only through the use of consume operations. — *end note*]

11 An evaluation *A* strongly happens before an evaluation *B* if either

(11.1) — *A* is sequenced before *B*, or

(11.2) — *A* synchronizes with *B*, or

(11.3) — *A* strongly happens before *X* and *X* strongly happens before *B*.

[*Note*: In the absence of consume operations, the happens before and strongly happens before relations are identical. Strongly happens before essentially excludes consume operations. — *end note*]

12 A visible side effect *A* on a scalar object or bit-field *M* with respect to a value computation *B* of *M* satisfies the conditions:

(12.1) — *A* happens before *B* and

(12.2) — there is no other side effect *X* to *M* such that *A* happens before *X* and *X* happens before *B*.

The value of a non-atomic scalar object or bit-field *M*, as determined by evaluation *B*, shall be the value stored by the visible side effect *A*. [*Note*: If there is ambiguity about which side effect to a non-atomic object or bit-field is visible, then the behavior is either unspecified or undefined. — *end note*] [*Note*: This states that operations on ordinary objects are not visibly reordered. This is not actually detectable without data races, but it is necessary to ensure that data races, as defined below, and with suitable restrictions on the use of atomics, correspond to data races in a simple interleaved (sequentially consistent) execution. — *end note*]

13 The value of an atomic object *M*, as determined by evaluation *B*, shall be the value stored by some side effect *A* that modifies *M*, where *B* does not happen before *A*. [*Note*: The set of such side effects is also restricted by the rest of the rules described here, and in particular, by the coherence requirements below. — *end note*]

14 If an operation *A* that modifies an atomic object *M* happens before an operation *B* that modifies *M*, then *A* shall be earlier than *B* in the modification order of *M*. [*Note*: This requirement is known as write-write coherence. — *end note*]

15 If a value computation *A* of an atomic object *M* happens before a value computation *B* of *M*, and *A* takes its value from a side effect *X* on *M*, then the value computed by *B* shall either be the value stored by *X* or the value stored by a side effect *Y* on *M*, where *Y* follows *X* in the modification order of *M*. [*Note*: This requirement is known as read-read coherence. — *end note*]

16 If a value computation *A* of an atomic object *M* happens before an operation *B* that modifies *M*, then *A* shall take its value from a side effect *X* on *M*, where *X* precedes *B* in the modification order of *M*. [*Note*: This requirement is known as read-write coherence. — *end note*]

17 If a side effect *X* on an atomic object *M* happens before a value computation *B* of *M*, then the evaluation *B* shall take its value from *X* or from a side effect *Y* that follows *X* in the modification order of *M*. [*Note*: This requirement is known as write-read coherence. — *end note*]

18 [*Note*: The four preceding coherence requirements effectively disallow compiler reordering of atomic operations to a single object, even if both operations are relaxed loads. This effectively makes the cache coherence guarantee provided by most hardware available to C++ atomic operations. — *end note*]

19 [*Note*: The value observed by a load of an atomic depends on the “happens before” relation, which depends on the values observed by loads of atomics. The intended reading is that there must exist an association of atomic loads with modifications they observe that, together with suitably chosen modification orders and the “happens before” relation derived as described above, satisfy the resulting constraints as imposed here. — *end note*]

20 Two actions are *potentially concurrent* if

(20.1) — they are performed by different threads, or

- (20.2) — they are unsequenced, at least one is performed by a signal handler, and they are not both performed by the same signal handler invocation.

The execution of a program contains a *data race* if it contains two potentially concurrent conflicting actions, at least one of which is not atomic, and neither happens before the other, except for the special case for signal handlers described below. Any such data race results in undefined behavior. [*Note*: It can be shown that programs that correctly use mutexes and `memory_order::seq_cst` operations to prevent all data races and use no other synchronization operations behave as if the operations executed by their constituent threads were simply interleaved, with each value computation of an object being taken from the last side effect on that object in that interleaving. This is normally referred to as “sequential consistency”. However, this applies only to data-race-free programs, and data-race-free programs cannot observe most program transformations that do not change single-threaded program semantics. In fact, most single-threaded program transformations continue to be allowed, since any program that behaves differently as a result must perform an undefined operation. — *end note*]

- 21 Two accesses to the same object of type `volatile std::sig_atomic_t` do not result in a data race if both occur in the same thread, even if one or more occurs in a signal handler. For each signal handler invocation, evaluations performed by the thread invoking a signal handler can be divided into two groups *A* and *B*, such that no evaluations in *B* happen before evaluations in *A*, and the evaluations of such `volatile std::sig_atomic_t` objects take values as though all evaluations in *A* happened before the execution of the signal handler and the execution of the signal handler happened before all evaluations in *B*.
- 22 [*Note*: Compiler transformations that introduce assignments to a potentially shared memory location that would not be modified by the abstract machine are generally precluded by this document, since such an assignment might overwrite another assignment by a different thread in cases in which an abstract machine execution would not have encountered a data race. This includes implementations of data member assignment that overwrite adjacent members in separate memory locations. Reordering of atomic loads in cases in which the atomics in question may alias is also generally precluded, since this may violate the coherence rules. — *end note*]
- 23 [*Note*: Transformations that introduce a speculative read of a potentially shared memory location may not preserve the semantics of the C++ program as defined in this document, since they potentially introduce a data race. However, they are typically valid in the context of an optimizing compiler that targets a specific machine with well-defined semantics for data races. They would be invalid for a hypothetical machine that is not tolerant of races or provides hardware race detection. — *end note*]

### 6.8.2.2 Forward progress

[intro.progress]

- <sup>1</sup> The implementation may assume that any thread will eventually do one of the following:

- (1.1) — terminate,  
 (1.2) — make a call to a library I/O function,  
 (1.3) — perform an access through a volatile glvalue, or  
 (1.4) — perform a synchronization operation or an atomic operation.

[*Note*: This is intended to allow compiler transformations such as removal of empty loops, even when termination cannot be proven. — *end note*]

- <sup>2</sup> Executions of atomic functions that are either defined to be lock-free (33.9) or indicated as lock-free (33.5) are *lock-free executions*.
- (2.1) — If there is only one thread that is not blocked (3.6) in a standard library function, a lock-free execution in that thread shall complete. [*Note*: Concurrently executing threads may prevent progress of a lock-free execution. For example, this situation can occur with load-locked store-conditional implementations. This property is sometimes termed obstruction-free. — *end note*]
- (2.2) — When one or more lock-free executions run concurrently, at least one should complete. [*Note*: It is difficult for some implementations to provide absolute guarantees to this effect, since repeated and particularly inopportune interference from other threads may prevent forward progress, e.g., by repeatedly stealing a cache line for unrelated purposes between load-locked and store-conditional instructions. Implementations should ensure that such effects cannot indefinitely delay progress under expected operating conditions, and that such anomalies can therefore safely be ignored by programmers. Outside this document, this property is sometimes termed lock-free. — *end note*]

- 3 During the execution of a thread of execution, each of the following is termed an *execution step*:
- (3.1) — termination of the thread of execution,
  - (3.2) — performing an access through a volatile glvalue, or
  - (3.3) — completion of a call to a library I/O function, a synchronization operation, or an atomic operation.
- 4 An invocation of a standard library function that blocks (3.6) is considered to continuously execute execution steps while waiting for the condition that it blocks on to be satisfied. [*Example*: A library I/O function that blocks until the I/O operation is complete can be considered to continuously check whether the operation is complete. Each such check might consist of one or more execution steps, for example using observable behavior of the abstract machine. — *end example*]
- 5 [*Note*: Because of this and the preceding requirement regarding what threads of execution have to perform eventually, it follows that no thread of execution can execute forever without an execution step occurring. — *end note*]
- 6 A thread of execution *makes progress* when an execution step occurs or a lock-free execution does not complete because there are other concurrent threads that are not blocked in a standard library function (see above).
- 7 For a thread of execution providing *concurrent forward progress guarantees*, the implementation ensures that the thread will eventually make progress for as long as it has not terminated. [*Note*: This is required regardless of whether or not other threads of executions (if any) have been or are making progress. To eventually fulfill this requirement means that this will happen in an unspecified but finite amount of time. — *end note*]
- 8 It is implementation-defined whether the implementation-created thread of execution that executes `main` (6.8.3.1) and the threads of execution created by `std::thread` (34.3.2) provide concurrent forward progress guarantees. [*Note*: General-purpose implementations should provide these guarantees. — *end note*]
- 9 For a thread of execution providing *parallel forward progress guarantees*, the implementation is not required to ensure that the thread will eventually make progress if it has not yet executed any execution step; once this thread has executed a step, it provides concurrent forward progress guarantees.
- 10 [*Note*: This does not specify a requirement for when to start this thread of execution, which will typically be specified by the entity that creates this thread of execution. For example, a thread of execution that provides concurrent forward progress guarantees and executes tasks from a set of tasks in an arbitrary order, one after the other, satisfies the requirements of parallel forward progress for these tasks. — *end note*]
- 11 For a thread of execution providing *weakly parallel forward progress guarantees*, the implementation does not ensure that the thread will eventually make progress.
- 12 [*Note*: Threads of execution providing weakly parallel forward progress guarantees cannot be expected to make progress regardless of whether other threads make progress or not; however, blocking with forward progress guarantee delegation, as defined below, can be used to ensure that such threads of execution make progress eventually. — *end note*]
- 13 Concurrent forward progress guarantees are stronger than parallel forward progress guarantees, which in turn are stronger than weakly parallel forward progress guarantees. [*Note*: For example, some kinds of synchronization between threads of execution may only make progress if the respective threads of execution provide parallel forward progress guarantees, but will fail to make progress under weakly parallel guarantees. — *end note*]
- 14 When a thread of execution *P* is specified to *block with forward progress guarantee delegation* on the completion of a set *S* of threads of execution, then throughout the whole time of *P* being blocked on *S*, the implementation shall ensure that the forward progress guarantees provided by at least one thread of execution in *S* is at least as strong as *P*'s forward progress guarantees. [*Note*: It is unspecified which thread or threads of execution in *S* are chosen and for which number of execution steps. The strengthening is not permanent and not necessarily in place for the rest of the lifetime of the affected thread of execution. As long as *P* is blocked, the implementation has to eventually select and potentially strengthen a thread of execution in *S*. — *end note*] Once a thread of execution in *S* terminates, it is removed from *S*. Once *S* is empty, *P* is unblocked.
- 15 [*Note*: A thread of execution *B* thus can temporarily provide an effectively stronger forward progress guarantee for a certain amount of time, due to a second thread of execution *A* being blocked on it with forward progress guarantee delegation. In turn, if *B* then blocks with forward progress guarantee delegation on *C*, this may also temporarily provide a stronger forward progress guarantee to *C*. — *end note*]

- 16 [Note: If all threads of execution in *S* finish executing (e.g., they terminate and do not use blocking synchronization incorrectly), then *P*'s execution of the operation that blocks with forward progress guarantee delegation will not result in *P*'s progress guarantee being effectively weakened. — end note]
- 17 [Note: This does not remove any constraints regarding blocking synchronization for threads of execution providing parallel or weakly parallel forward progress guarantees because the implementation is not required to strengthen a particular thread of execution whose too-weak progress guarantee is preventing overall progress. — end note]
- 18 An implementation should ensure that the last value (in modification order) assigned by an atomic or synchronization operation will become visible to all other threads in a finite period of time.

### 6.8.3 Start and termination

[basic.start]

#### 6.8.3.1 main function

[basic.start.main]

- 1 A program shall contain a global function called `main`. Executing a program starts a main thread of execution (6.8.2, 34.3) in which the `main` function is invoked, and in which variables of static storage duration might be initialized (6.8.3.2) and destroyed (6.8.3.4). It is implementation-defined whether a program in a freestanding environment is required to define a `main` function. [Note: In a freestanding environment, start-up and termination is implementation-defined; start-up contains the execution of constructors for objects of namespace scope with static storage duration; termination contains the execution of destructors for objects with static storage duration. — end note]
- 2 An implementation shall not predefine the `main` function. This function shall not be overloaded. Its type shall have C++ language linkage and it shall have a declared return type of type `int`, but otherwise its type is implementation-defined. An implementation shall allow both
- (2.1) — a function of () returning `int` and
- (2.2) — a function of (`int`, pointer to pointer to `char`) returning `int`

as the type of `main` (11.3.5). In the latter form, for purposes of exposition, the first function parameter is called `argc` and the second function parameter is called `argv`, where `argc` shall be the number of arguments passed to the program from the environment in which the program is run. If `argc` is nonzero these arguments shall be supplied in `argv[0]` through `argv[argc-1]` as pointers to the initial characters of null-terminated multibyte strings (NTMBSS) (20.4.2.1.5.2) and `argv[0]` shall be the pointer to the initial character of a NTMBSS that represents the name used to invoke the program or "". The value of `argc` shall be non-negative. The value of `argv[argc]` shall be 0. [Note: It is recommended that any further (optional) parameters be added after `argv`. — end note]

- 3 The function `main` shall not be used within a program. The linkage (6.5) of `main` is implementation-defined. A program that defines `main` as deleted or that declares `main` to be `inline`, `static`, or `constexpr` is ill-formed. The `main` function shall not be declared with a *linkage-specification* (10.5). A program that declares a variable `main` at global scope or that declares the name `main` with C language linkage (in any namespace) is ill-formed. The name `main` is not otherwise reserved. [Example: Member functions, classes, and enumerations can be called `main`, as can entities in other namespaces. — end example]
- 4 Terminating the program without leaving the current block (e.g., by calling the function `std::exit(int)` (21.5)) does not destroy any objects with automatic storage duration (15.4). If `std::exit` is called to end a program during the destruction of an object with static or thread storage duration, the program has undefined behavior.
- 5 A `return` statement (9.6.3) in `main` has the effect of leaving the main function (destroying any objects with automatic storage duration) and calling `std::exit` with the return value as the argument. If control flows off the end of the *compound-statement* of `main`, the effect is equivalent to a `return` with operand 0 (see also 18.3).

#### 6.8.3.2 Static initialization

[basic.start.static]

- 1 Variables with static storage duration are initialized as a consequence of program initiation. Variables with thread storage duration are initialized as a consequence of thread execution. Within each of these phases of initiation, initialization occurs as follows.
- 2 A *constant initializer* for a variable or temporary object `o` is an initializer whose full-expression is a constant expression, except that if `o` is an object, such an initializer may also invoke `constexpr` constructors for `o` and its subobjects even if those objects are of non-literal class types. [Note: Such a class may have a non-trivial destructor. — end note] *Constant initialization* is performed if a variable or temporary object with static

or thread storage duration is initialized by a constant initializer for the entity. If constant initialization is not performed, a variable with static storage duration (6.6.4.1) or thread storage duration (6.6.4.2) is zero-initialized (11.6). Together, zero-initialization and constant initialization are called *static initialization*; all other initialization is *dynamic initialization*. All static initialization strongly happens before (6.8.2.1) any dynamic initialization. [Note: The dynamic initialization of non-local variables is described in 6.8.3.3; that of local static variables is described in 9.7. — end note]

- 3 An implementation is permitted to perform the initialization of a variable with static or thread storage duration as a static initialization even if such initialization is not required to be done statically, provided that
- (3.1) — the dynamic version of the initialization does not change the value of any other object of static or thread storage duration prior to its initialization, and
  - (3.2) — the static version of the initialization produces the same value in the initialized variable as would be produced by the dynamic initialization if all variables not required to be initialized statically were initialized dynamically.

[Note: As a consequence, if the initialization of an object obj1 refers to an object obj2 of namespace scope potentially requiring dynamic initialization and defined later in the same translation unit, it is unspecified whether the value of obj2 used will be the value of the fully initialized obj2 (because obj2 was statically initialized) or will be the value of obj2 merely zero-initialized. For example,

```
inline double fd() { return 1.0; }
extern double d1;
double d2 = d1; // unspecified:
 // may be statically initialized to 0.0 or
 // dynamically initialized to 0.0 if d1 is
 // dynamically initialized, or 1.0 otherwise
double d1 = fd(); // may be initialized statically or dynamically to 1.0
```

— end note]

### 6.8.3.3 Dynamic initialization of non-local variables

[basic.start.dynamic]

- 1 Dynamic initialization of a non-local variable with static storage duration is unordered if the variable is an implicitly or explicitly instantiated specialization, is partially-ordered if the variable is an inline variable that is not an implicitly or explicitly instantiated specialization, and otherwise is ordered. [Note: An explicitly specialized non-inline static data member or variable template specialization has ordered initialization. — end note]
- 2 Dynamic initialization of non-local variables V and W with static storage duration are ordered as follows:
- (2.1) — If V and W have ordered initialization and V is defined before W within a single translation unit, the initialization of V is sequenced before the initialization of W.
  - (2.2) — If V has partially-ordered initialization, W does not have unordered initialization, and V is defined before W in every translation unit in which W is defined, then
    - (2.2.1) — if the program starts a thread (6.8.2) other than the main thread (6.8.3.1), the initialization of V strongly happens before the initialization of W;
    - (2.2.2) — otherwise, the initialization of V is sequenced before the initialization of W.
  - (2.3) — Otherwise, if the program starts a thread other than the main thread before either V or W is initialized, it is unspecified in which threads the initializations of V and W occur; the initializations are unsequenced if they occur in the same thread.
  - (2.4) — Otherwise, the initializations of V and W are indeterminately sequenced.

[Note: This definition permits initialization of a sequence of ordered variables concurrently with another sequence. — end note]

- 3 A *non-initialization odr-use* is an odr-use (6.2) not caused directly or indirectly by the initialization of a non-local static or thread storage duration variable.
- 4 It is implementation-defined whether the dynamic initialization of a non-local non-inline variable with static storage duration is sequenced before the first statement of `main` or is deferred. If it is deferred, it strongly happens before any non-initialization odr-use of any non-inline function or non-inline variable defined in the



same translation unit as the variable to be initialized.<sup>55</sup> It is implementation-defined in which threads and at which points in the program such deferred dynamic initialization occurs. [*Note*: Such points should be chosen in a way that allows the programmer to avoid deadlocks. — *end note*] [*Example*:

```
// - File 1 -
#include "a.h"
#include "b.h"
B b;
A::A(){
 b.Use();
}

// - File 2 -
#include "a.h"
A a;

// - File 3 -
#include "a.h"
#include "b.h"
extern A a;
extern B b;

int main() {
 a.Use();
 b.Use();
}
```

It is implementation-defined whether either `a` or `b` is initialized before `main` is entered or whether the initializations are delayed until `a` is first odr-used in `main`. In particular, if `a` is initialized before `main` is entered, it is not guaranteed that `b` will be initialized before it is odr-used by the initialization of `a`, that is, before `A::A` is called. If, however, `a` is initialized at some point after the first statement of `main`, `b` will be initialized prior to its use in `A::A`. — *end example*]

- 5 It is implementation-defined whether the dynamic initialization of a non-local inline variable with static storage duration is sequenced before the first statement of `main` or is deferred. If it is deferred, it strongly happens before any non-initialization odr-use of that variable. It is implementation-defined in which threads and at which points in the program such deferred dynamic initialization occurs.
- 6 It is implementation-defined whether the dynamic initialization of a non-local non-inline variable with thread storage duration is sequenced before the first statement of the initial function of a thread or is deferred. If it is deferred, the initialization associated with the entity for thread *t* is sequenced before the first non-initialization odr-use by *t* of any non-inline variable with thread storage duration defined in the same translation unit as the variable to be initialized. It is implementation-defined in which threads and at which points in the program such deferred dynamic initialization occurs.
- 7 If the initialization of a non-local variable with static or thread storage duration exits via an exception, the function `std::terminate` is called (18.5.1).

#### 6.8.3.4 Termination

[**basic.start.term**]

- 1 Destructors (15.4) for initialized objects (that is, objects whose lifetime (6.6.3) has begun) with static storage duration, and functions registered with `std::atexit`, are called as part of a call to `std::exit` (21.5). The call to `std::exit` is sequenced before the invocations of the destructors and the registered functions. [*Note*: Returning from `main` invokes `std::exit` (6.8.3.1). — *end note*]
- 2 Destructors for initialized objects with thread storage duration within a given thread are called as a result of returning from the initial function of that thread and as a result of that thread calling `std::exit`. The completions of the destructors for all initialized objects with thread storage duration within that thread strongly happen before the initiation of the destructors of any object with static storage duration.
- 3 If the completion of the constructor or dynamic initialization of an object with static storage duration strongly happens before that of another, the completion of the destructor of the second is sequenced before the initiation of the destructor of the first. If the completion of the constructor or dynamic initialization of an

---

<sup>55</sup>) A non-local variable with static storage duration having initialization with side effects is initialized in this case, even if it is not itself odr-used (6.2, 6.6.4.1).

object with thread storage duration is sequenced before that of another, the completion of the destructor of the second is sequenced before the initiation of the destructor of the first. If an object is initialized statically, the object is destroyed in the same order as if the object was dynamically initialized. For an object of array or class type, all subobjects of that object are destroyed before any block-scope object with static storage duration initialized during the construction of the subobjects is destroyed. If the destruction of an object with static or thread storage duration exits via an exception, the function `std::terminate` is called (18.5.1).

- 4 If a function contains a block-scope object of static or thread storage duration that has been destroyed and the function is called during the destruction of an object with static or thread storage duration, the program has undefined behavior if the flow of control passes through the definition of the previously destroyed block-scope object. Likewise, the behavior is undefined if the block-scope object is used indirectly (i.e., through a pointer) after its destruction.
- 5 If the completion of the initialization of an object with static storage duration strongly happens before a call to `std::atexit` (see `<cstdlib>`, 21.5), the call to the function passed to `std::atexit` is sequenced before the call to the destructor for the object. If a call to `std::atexit` strongly happens before the completion of the initialization of an object with static storage duration, the call to the destructor for the object is sequenced before the call to the function passed to `std::atexit`. If a call to `std::atexit` strongly happens before another call to `std::atexit`, the call to the function passed to the second `std::atexit` call is sequenced before the call to the function passed to the first `std::atexit` call.
- 6 If there is a use of a standard library object or function not permitted within signal handlers (21.12) that does not happen before (6.8.2) completion of destruction of objects with static storage duration and execution of `std::atexit` registered functions (21.5), the program has undefined behavior. [*Note:* If there is a use of an object with static storage duration that does not happen before the object's destruction, the program has undefined behavior. Terminating every thread before a call to `std::exit` or the exit from `main` is sufficient, but not necessary, to satisfy these requirements. These requirements permit thread managers as static-storage-duration objects. — *end note*]
- 7 Calling the function `std::abort()` declared in `<cstdlib>` terminates the program without executing any destructors and without calling the functions passed to `std::atexit()` or `std::at_quick_exit()`.

## 7 Standard conversions

[conv]

<sup>1</sup> Standard conversions are implicit conversions with built-in meaning. [Clause 7](#) enumerates the full set of such conversions. A *standard conversion sequence* is a sequence of standard conversions in the following order:

- (1.1) — Zero or one conversion from the following set: lvalue-to-rvalue conversion, array-to-pointer conversion, and function-to-pointer conversion.
- (1.2) — Zero or one conversion from the following set: integral promotions, floating-point promotion, integral conversions, floating-point conversions, floating-integral conversions, pointer conversions, pointer-to-member conversions, and boolean conversions.
- (1.3) — Zero or one function pointer conversion.
- (1.4) — Zero or one qualification conversion.

[*Note*: A standard conversion sequence can be empty, i.e., it can consist of no conversions. — *end note*] A standard conversion sequence will be applied to an expression if necessary to convert it to a required destination type.

<sup>2</sup> [*Note*: Expressions with a given type will be implicitly converted to other types in several contexts:

- (2.1) — When used as operands of operators. The operator's requirements for its operands dictate the destination type ([8.5](#)).
- (2.2) — When used in the condition of an `if` statement ([9.4.1](#)) or iteration statement ([9.5](#)). The destination type is `bool`.
- (2.3) — When used in the expression of a `switch` statement ([9.4.2](#)). The destination type is integral.
- (2.4) — When used as the source expression for an initialization (which includes use as an argument in a function call and use as the expression in a `return` statement). The type of the entity being initialized is (generally) the destination type. See [11.6](#), [11.6.3](#).

— *end note*]

<sup>3</sup> An expression `e` can be *implicitly converted* to a type `T` if and only if the declaration `T t=e;` is well-formed, for some invented temporary variable `t` ([11.6](#)).

<sup>4</sup> Certain language constructs require that an expression be converted to a Boolean value. An expression `e` appearing in such a context is said to be *contextually converted to `bool`* and is well-formed if and only if the declaration `bool t(e);` is well-formed, for some invented temporary variable `t` ([11.6](#)).

<sup>5</sup> Certain language constructs require conversion to a value having one of a specified set of types appropriate to the construct. An expression `e` of class type `E` appearing in such a context is said to be *contextually implicitly converted* to a specified type `T` and is well-formed if and only if `e` can be implicitly converted to a type `T` that is determined as follows: `E` is searched for non-explicit conversion functions whose return type is *cv* `T` such that `T` is allowed by the context. There shall be exactly one such `T`.

<sup>6</sup> The effect of any implicit conversion is the same as performing the corresponding declaration and initialization and then using the temporary variable as the result of the conversion. The result is an lvalue if `T` is an lvalue reference type or an rvalue reference to function type ([11.3.2](#)), an xvalue if `T` is an rvalue reference to object type, and a prvalue otherwise. The expression `e` is used as a glvalue if and only if the initialization uses it as a glvalue.

<sup>7</sup> [*Note*: For class types, user-defined conversions are considered as well; see [15.3](#). In general, an implicit conversion sequence ([16.3.3.1](#)) consists of a standard conversion sequence followed by a user-defined conversion followed by another standard conversion sequence. — *end note*]

<sup>8</sup> [*Note*: There are some contexts where certain conversions are suppressed. For example, the lvalue-to-rvalue conversion is not done on the operand of the unary `&` operator. Specific exceptions are given in the descriptions of those operators and contexts. — *end note*]

## 7.1 Lvalue-to-rvalue conversion [conv.lval]

- 1 A glvalue (8.2.1) of a non-function, non-array type T can be converted to a prvalue.<sup>56</sup> If T is an incomplete type, a program that necessitates this conversion is ill-formed. If T is a non-class type, the type of the prvalue is the cv-unqualified version of T. Otherwise, the type of the prvalue is T.<sup>57</sup>
- 2 When an lvalue-to-rvalue conversion is applied to an expression e, and either
  - (2.1) — e is not potentially evaluated, or
  - (2.2) — the evaluation of e results in the evaluation of a member ex of the set of potential results of e, and ex names a variable x that is not odr-used by ex (6.2),

the value contained in the referenced object is not accessed. [Example:

```
struct S { int n; };
auto f() {
 S x { 1 };
 constexpr S y { 2 };
 return [&](bool b) { return (b ? y : x).n; };
}
auto g = f();
int m = g(false); // undefined behavior due to access of x.n outside its lifetime
int n = g(true); // OK, does not access y.n
```

— end example]

- 3 The result of the conversion is determined according to the following rules:
  - (3.1) — If T is cv std::nullptr\_t, the result is a null pointer constant (7.11). [Note: Since no value is fetched from memory, there is no side effect for a volatile access (6.8.1), and an inactive member of a union (12.3) may be accessed. — end note]
  - (3.2) — Otherwise, if T has a class type, the conversion copy-initializes the result object from the glvalue.
  - (3.3) — Otherwise, if the object to which the glvalue refers contains an invalid pointer value (6.6.4.4.2, 6.6.4.4.3), the behavior is implementation-defined.
  - (3.4) — Otherwise, the value contained in the object indicated by the glvalue is the prvalue result.
- 4 [Note: See also 8.2.1. — end note]

## 7.2 Array-to-pointer conversion [conv.array]

- 1 An lvalue or rvalue of type “array of N T” or “array of unknown bound of T” can be converted to a prvalue of type “pointer to T”. The temporary materialization conversion (7.4) is applied. The result is a pointer to the first element of the array.

## 7.3 Function-to-pointer conversion [conv.func]

- 1 An lvalue of function type T can be converted to a prvalue of type “pointer to T”. The result is a pointer to the function.<sup>58</sup>
- 2 [Note: See 16.4 for additional rules for the case where the function is overloaded. — end note]

## 7.4 Temporary materialization conversion [conv.rval]

- 1 A prvalue of type T can be converted to an xvalue of type T. This conversion initializes a temporary object (15.2) of type T from the prvalue by evaluating the prvalue with the temporary object as its result object, and produces an xvalue denoting the temporary object. T shall be a complete type. [Note: If T is a class type (or array thereof), it must have an accessible and non-deleted destructor; see 15.4. — end note]
- [Example:

```
struct X { int n; };
int k = X().n; // OK, X() prvalue is converted to xvalue
```

— end example]

<sup>56</sup>) For historical reasons, this conversion is called the “lvalue-to-rvalue” conversion, even though that name does not accurately reflect the taxonomy of expressions described in 8.2.1.

<sup>57</sup>) In C++ class and array prvalues can have cv-qualified types. This differs from ISO C, in which non-lvalues never have cv-qualified types.

<sup>58</sup>) This conversion never applies to non-static member functions because an lvalue that refers to a non-static member function cannot be obtained.

## 7.5 Qualification conversions

[conv.qual]

- 1 A *cv-decomposition* of a type  $T$  is a sequence of  $cv_i$  and  $P_i$  such that  $T$  is

“ $cv_0 P_0 cv_1 P_1 \cdots cv_{n-1} P_{n-1} cv_n U$ ” for  $n > 0$ ,

where each  $cv_i$  is a set of cv-qualifiers (6.7.3), and each  $P_i$  is “pointer to” (11.3.1), “pointer to member of class  $C_i$  of type” (11.3.3), “array of  $N_i$ ”, or “array of unknown bound of” (11.3.4). If  $P_i$  designates an array, the cv-qualifiers  $cv_{i+1}$  on the element type are also taken as the cv-qualifiers  $cv_i$  of the array. [*Example*: The type denoted by the *type-id* `const int **` has two cv-decompositions, taking  $U$  as “`int`” and as “pointer to `const int`”. — *end example*] The  $n$ -tuple of cv-qualifiers after the first one in the longest cv-decomposition of  $T$ , that is,  $cv_1, cv_2, \dots, cv_n$ , is called the *cv-qualification signature* of  $T$ .

- 2 Two types  $T_1$  and  $T_2$  are *similar* if they have cv-decompositions with the same  $n$  such that corresponding  $P_i$  components are the same and the types denoted by  $U$  are the same.
- 3 A prvalue of type  $T_1$  can be converted to type  $T_2$  if the following conditions are satisfied, where  $cv_i^j$  denotes the cv-qualifiers in the cv-qualification signature of  $T_j$ :<sup>59</sup>

(3.1) —  $T_1$  and  $T_2$  are similar.

(3.2) — For every  $i > 0$ , if `const` is in  $cv_i^1$  then `const` is in  $cv_i^2$ , and similarly for `volatile`.

(3.3) — If the  $cv_i^1$  and  $cv_i^2$  are different, then `const` is in every  $cv_k^2$  for  $0 < k < i$ .

[*Note*: If a program could assign a pointer of type `T**` to a pointer of type `const T**` (that is, if line #1 below were allowed), a program could inadvertently modify a `const` object (as it is done on line #2). For example,

```
int main() {
 const char c = 'c';
 char* pc;
 const char** pcc = &pc; // #1: not allowed
 *pcc = &c;
 *pc = 'C'; // #2: modifies a const object
}
```

— *end note*]

- 4 [*Note*: A prvalue of type “pointer to  $cv1 T$ ” can be converted to a prvalue of type “pointer to  $cv2 T$ ” if “ $cv2 T$ ” is more cv-qualified than “ $cv1 T$ ”. A prvalue of type “pointer to member of  $X$  of type  $cv1 T$ ” can be converted to a prvalue of type “pointer to member of  $X$  of type  $cv2 T$ ” if “ $cv2 T$ ” is more cv-qualified than “ $cv1 T$ ”. — *end note*]
- 5 [*Note*: Function types (including those used in pointer to member function types) are never cv-qualified (11.3.5). — *end note*]

## 7.6 Integral promotions

[conv.prom]

- 1 A prvalue of an integer type other than `bool`, `char16_t`, `char32_t`, or `wchar_t` whose integer conversion rank (6.7.4) is less than the rank of `int` can be converted to a prvalue of type `int` if `int` can represent all the values of the source type; otherwise, the source prvalue can be converted to a prvalue of type `unsigned int`.
- 2 A prvalue of type `char16_t`, `char32_t`, or `wchar_t` (6.7.1) can be converted to a prvalue of the first of the following types that can represent all the values of its underlying type: `int`, `unsigned int`, `long int`, `unsigned long int`, `long long int`, or `unsigned long long int`. If none of the types in that list can represent all the values of its underlying type, a prvalue of type `char16_t`, `char32_t`, or `wchar_t` can be converted to a prvalue of its underlying type.
- 3 A prvalue of an unscoped enumeration type whose underlying type is not fixed (10.2) can be converted to a prvalue of the first of the following types that can represent all the values of the enumeration (i.e., the values in the range  $b_{\min}$  to  $b_{\max}$  as described in 10.2): `int`, `unsigned int`, `long int`, `unsigned long int`, `long long int`, or `unsigned long long int`. If none of the types in that list can represent all the values of the enumeration, a prvalue of an unscoped enumeration type can be converted to a prvalue of the extended integer type with lowest integer conversion rank (6.7.4) greater than the rank of `long long` in which all the values of the enumeration can be represented. If there are two such extended types, the signed one is chosen.
- 4 A prvalue of an unscoped enumeration type whose underlying type is fixed (10.2) can be converted to a prvalue of its underlying type. Moreover, if integral promotion can be applied to its underlying type, a

<sup>59)</sup> These rules ensure that `const`-safety is preserved by the conversion.

prvalue of an unscoped enumeration type whose underlying type is fixed can also be converted to a prvalue of the promoted underlying type.

- 5 A prvalue for an integral bit-field (12.2.4) can be converted to a prvalue of type `int` if `int` can represent all the values of the bit-field; otherwise, it can be converted to `unsigned int` if `unsigned int` can represent all the values of the bit-field. If the bit-field is larger yet, no integral promotion applies to it. If the bit-field has an enumerated type, it is treated as any other value of that type for promotion purposes.
- 6 A prvalue of type `bool` can be converted to a prvalue of type `int`, with `false` becoming zero and `true` becoming one.
- 7 These conversions are called *integral promotions*.

### 7.7 Floating-point promotion [conv.fpprom]

- 1 A prvalue of type `float` can be converted to a prvalue of type `double`. The value is unchanged.
- 2 This conversion is called *floating-point promotion*.

### 7.8 Integral conversions [conv.integral]

- 1 A prvalue of an integer type can be converted to a prvalue of another integer type. A prvalue of an unscoped enumeration type can be converted to a prvalue of an integer type.
- 2 If the destination type is unsigned, the resulting value is the least unsigned integer congruent to the source integer (modulo  $2^n$  where  $n$  is the number of bits used to represent the unsigned type). [*Note*: In a two's complement representation, this conversion is conceptual and there is no change in the bit pattern (if there is no truncation). — *end note*]
- 3 If the destination type is signed, the value is unchanged if it can be represented in the destination type; otherwise, the value is implementation-defined.
- 4 If the destination type is `bool`, see 7.14. If the source type is `bool`, the value `false` is converted to zero and the value `true` is converted to one.
- 5 The conversions allowed as integral promotions are excluded from the set of integral conversions.

### 7.9 Floating-point conversions [conv.double]

- 1 A prvalue of floating-point type can be converted to a prvalue of another floating-point type. If the source value can be exactly represented in the destination type, the result of the conversion is that exact representation. If the source value is between two adjacent destination values, the result of the conversion is an implementation-defined choice of either of those values. Otherwise, the behavior is undefined.
- 2 The conversions allowed as floating-point promotions are excluded from the set of floating-point conversions.

### 7.10 Floating-integral conversions [conv.fpint]

- 1 A prvalue of a floating-point type can be converted to a prvalue of an integer type. The conversion truncates; that is, the fractional part is discarded. The behavior is undefined if the truncated value cannot be represented in the destination type. [*Note*: If the destination type is `bool`, see 7.14. — *end note*]
- 2 A prvalue of an integer type or of an unscoped enumeration type can be converted to a prvalue of a floating-point type. The result is exact if possible. If the value being converted is in the range of values that can be represented but the value cannot be represented exactly, it is an implementation-defined choice of either the next lower or higher representable value. [*Note*: Loss of precision occurs if the integral value cannot be represented exactly as a value of the floating-point type. — *end note*] If the value being converted is outside the range of values that can be represented, the behavior is undefined. If the source type is `bool`, the value `false` is converted to zero and the value `true` is converted to one.

### 7.11 Pointer conversions [conv.ptr]

- 1 A *null pointer constant* is an integer literal (5.13.2) with value zero or a prvalue of type `std::nullptr_t`. A null pointer constant can be converted to a pointer type; the result is the null pointer value of that type (6.7.2) and is distinguishable from every other value of object pointer or function pointer type. Such a conversion is called a *null pointer conversion*. Two null pointer values of the same type shall compare equal. The conversion of a null pointer constant to a pointer to cv-qualified type is a single conversion, and not the sequence of a pointer conversion followed by a qualification conversion (7.5). A null pointer constant of

integral type can be converted to a prvalue of type `std::nullptr_t`. [*Note: The resulting prvalue is not a null pointer value. — end note*]

- <sup>2</sup> A prvalue of type “pointer to *cv* T”, where T is an object type, can be converted to a prvalue of type “pointer to *cv* void”. The pointer value (6.7.2) is unchanged by this conversion.
- <sup>3</sup> A prvalue of type “pointer to *cv* D”, where D is a class type, can be converted to a prvalue of type “pointer to *cv* B”, where B is a base class (Clause 13) of D. If B is an inaccessible (Clause 14) or ambiguous (13.2) base class of D, a program that necessitates this conversion is ill-formed. The result of the conversion is a pointer to the base class subobject of the derived class object. The null pointer value is converted to the null pointer value of the destination type.

## 7.12 Pointer-to-member conversions [conv.mem]

- <sup>1</sup> A null pointer constant (7.11) can be converted to a pointer-to-member type; the result is the *null member pointer value* of that type and is distinguishable from any pointer to member not created from a null pointer constant. Such a conversion is called a *null member pointer conversion*. Two null member pointer values of the same type shall compare equal. The conversion of a null pointer constant to a pointer to member of *cv*-qualified type is a single conversion, and not the sequence of a pointer-to-member conversion followed by a qualification conversion (7.5).
- <sup>2</sup> A prvalue of type “pointer to member of B of type *cv* T”, where B is a class type, can be converted to a prvalue of type “pointer to member of D of type *cv* T”, where D is a derived class (Clause 13) of B. If B is an inaccessible (Clause 14), ambiguous (13.2), or virtual (13.1) base class of D, or a base class of a virtual base class of D, a program that necessitates this conversion is ill-formed. The result of the conversion refers to the same member as the pointer to member before the conversion took place, but it refers to the base class member as if it were a member of the derived class. The result refers to the member in D’s instance of B. Since the result has type “pointer to member of D of type *cv* T”, indirection through it with a D object is valid. The result is the same as if indirecting through the pointer to member of B with the B subobject of D. The null member pointer value is converted to the null member pointer value of the destination type.<sup>60</sup>

## 7.13 Function pointer conversions [conv.fctptr]

- <sup>1</sup> A prvalue of type “pointer to **noexcept** function” can be converted to a prvalue of type “pointer to function”. The result is a pointer to the function. A prvalue of type “pointer to member of type **noexcept** function” can be converted to a prvalue of type “pointer to member of type function”. The result designates the member function.

[*Example:*

```
void (*p)();
void (**pp)() noexcept = &p; // error: cannot convert to pointer to noexcept function

struct S { typedef void (*p)(); operator p(); };
void (*q)() noexcept = S(); // error: cannot convert to pointer to noexcept function
```

— end example]

## 7.14 Boolean conversions [conv.bool]

- <sup>1</sup> A prvalue of arithmetic, unscoped enumeration, pointer, or pointer-to-member type can be converted to a prvalue of type `bool`. A zero value, null pointer value, or null member pointer value is converted to `false`; any other value is converted to `true`. For direct-initialization (11.6), a prvalue of type `std::nullptr_t` can be converted to a prvalue of type `bool`; the resulting value is `false`.

---

<sup>60</sup> The rule for conversion of pointers to members (from pointer to member of base to pointer to member of derived) appears inverted compared to the rule for pointers to objects (from pointer to derived to pointer to base) (7.11, Clause 13). This inversion is necessary to ensure type safety. Note that a pointer to member is not an object pointer or a function pointer and the rules for conversions of such pointers do not apply to pointers to members. In particular, a pointer to member cannot be converted to a `void*`.

## 8 Expressions

[expr]

### 8.1 Preamble

[expr.pre]

- 1 [Note: [Clause 8](#) defines the syntax, order of evaluation, and meaning of expressions.<sup>61</sup> An expression is a sequence of operators and operands that specifies a computation. An expression can result in a value and can cause side effects. — end note]
- 2 [Note: Operators can be overloaded, that is, given meaning when applied to expressions of class type ([Clause 12](#)) or enumeration type ([10.2](#)). Uses of overloaded operators are transformed into function calls as described in [16.5](#). Overloaded operators obey the rules for syntax and evaluation order specified in [8.5](#), but the requirements of operand type and value category are replaced by the rules for function call. Relations between operators, such as `++a` meaning `a+=1`, are not guaranteed for overloaded operators ([16.5](#)). — end note]
- 3 Subclause [8.5](#) defines the effects of operators when applied to types for which they have not been overloaded. Operator overloading shall not modify the rules for the *built-in operators*, that is, for operators applied to types for which they are defined by this Standard. However, these built-in operators participate in overload resolution, and as part of that process user-defined conversions will be considered where necessary to convert the operands to types appropriate for the built-in operator. If a built-in operator is selected, such conversions will be applied to the operands before the operation is considered further according to the rules in subclause [8.5](#); see [16.3.1.2](#), [16.6](#).
- 4 If during the evaluation of an expression, the result is not mathematically defined or not in the range of representable values for its type, the behavior is undefined. [Note: Treatment of division by zero, forming a remainder using a zero divisor, and all floating-point exceptions vary among machines, and is sometimes adjustable by a library function. — end note]
- 5 The values of the floating operands and the results of floating expressions may be represented in greater precision and range than that required by the type; the types are not changed thereby.<sup>62</sup>

### 8.2 Properties of expressions

[expr.prop]

#### 8.2.1 Value category

[basic.lval]

- 1 Expressions are categorized according to the taxonomy in [Figure 1](#).

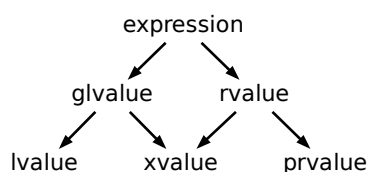


Figure 1 — Expression category taxonomy

- (1.1) — A *glvalue* is an expression whose evaluation determines the identity of an object, bit-field, or function.
- (1.2) — A *prvalue* is an expression whose evaluation initializes an object or a bit-field, or computes the value of the operand of an operator, as specified by the context in which it appears.
- (1.3) — An *xvalue* is a *glvalue* that denotes an object or bit-field whose resources can be reused (usually because it is near the end of its lifetime).
- (1.4) — An *lvalue* is a *glvalue* that is not an *xvalue*.
- (1.5) — An *rvalue* is a *prvalue* or an *xvalue*.

61) The precedence of operators is not directly specified, but it can be derived from the syntax.

62) The cast and assignment operators must still perform their specific conversions as described in [8.5.3](#), [8.5.1.9](#) and [8.5.18](#).



- 2 Every expression belongs to exactly one of the fundamental classifications in this taxonomy: lvalue, xvalue, or prvalue. This property of an expression is called its *value category*. [Note: The discussion of each built-in operator in 8.5 indicates the category of the value it yields and the value categories of the operands it expects. For example, the built-in assignment operators expect that the left operand is an lvalue and that the right operand is a prvalue and yield an lvalue as the result. User-defined operators are functions, and the categories of values they expect and yield are determined by their parameter and return types. — end note]
- 3 [Note: Historically, lvalues and rvalues were so-called because they could appear on the left- and right-hand side of an assignment (although this is no longer generally true); glvalues are “generalized” lvalues, prvalues are “pure” rvalues, and xvalues are “eXpiring” lvalues. Despite their names, these terms classify expressions, not values. — end note]
- 4 [Note: An expression is an xvalue if it is:
- (4.1) — the result of calling a function, whether implicitly or explicitly, whose return type is an rvalue reference to object type (8.5.1.2),
  - (4.2) — a cast to an rvalue reference to object type (8.5.1.7, 8.5.1.9, 8.5.1.10, 8.5.1.11, 8.5.3),
  - (4.3) — a subscripting operation with an xvalue array operand (8.5.1.1),
  - (4.4) — a class member access expression designating a non-static data member of non-reference type in which the object expression is an xvalue (8.5.1.5), or
  - (4.5) — a .\* pointer-to-member expression in which the first operand is an xvalue and the second operand is a pointer to data member (8.5.4).

In general, the effect of this rule is that named rvalue references are treated as lvalues and unnamed rvalue references to objects are treated as xvalues; rvalue references to functions are treated as lvalues whether named or not. — end note]

[Example:

```
struct A {
 int m;
};
A&& operator+(A, A);
A&& f();

A a;
A&& ar = static_cast<A&&>(a);
```

The expressions `f()`, `f().m`, `static_cast<A&&>(a)`, and `a + a` are xvalues. The expression `ar` is an lvalue. — end example]

- 5 The *result* of a prvalue is the value that the expression stores into its context. A prvalue whose result is the value *V* is sometimes said to have or name the value *V*. The *result object* of a prvalue is the object initialized by the prvalue; a prvalue that is used to compute the value of an operand of an operator or that has type *cv void* has no result object. [Note: Except when the prvalue is the operand of a *decltype-specifier*, a prvalue of class or array type always has a result object. For a discarded prvalue, a temporary object is materialized; see 8.2. — end note] The *result* of a glvalue is the entity denoted by the expression.
- 6 Whenever a glvalue appears as an operand of an operator that expects a prvalue for that operand, the lvalue-to-rvalue (7.1), array-to-pointer (7.2), or function-to-pointer (7.3) standard conversions are applied to convert the expression to a prvalue. [Note: An attempt to bind an rvalue reference to an lvalue is not such a context; see 11.6.3. — end note] [Note: Because cv-qualifiers are removed from the type of an expression of non-class type when the expression is converted to a prvalue, an lvalue of type `const int` can, for example, be used where a prvalue of type `int` is required. — end note] [Note: There are no prvalue bit-fields; if a bit-field is converted to a prvalue (7.1), a prvalue of the type of the bit-field is created, which might then be promoted (7.6). — end note]
- 7 Whenever a prvalue appears as an operand of an operator that expects a glvalue for that operand, the temporary materialization conversion (7.4) is applied to convert the expression to an xvalue.
- 8 The discussion of reference initialization in 11.6.3 and of temporaries in 15.2 indicates the behavior of lvalues and rvalues in other significant contexts.
- 9 Unless otherwise indicated (10.1.7.2), a prvalue shall always have complete type or the void type; if it has a class type or (possibly multi-dimensional) array of class type, that class shall not be an abstract class (13.4).

A glvalue shall not have type *cv void*. [Note: A glvalue may have complete or incomplete non-void type. Class and array prvalues can have cv-qualified types; other prvalues always have cv-unqualified types. See 8.2. — end note]

- 10 An lvalue is *modifiable* unless its type is const-qualified or is a function type. [Note: A program that attempts to modify an object through a nonmodifiable lvalue or through an rvalue is ill-formed (8.5.18, 8.5.1.6, 8.5.2.2). — end note]
- 11 If a program attempts to access the stored value of an object through a glvalue of other than one of the following types the behavior is undefined:<sup>63</sup>
- (11.1) — the dynamic type of the object,
  - (11.2) — a cv-qualified version of the dynamic type of the object,
  - (11.3) — a type similar (as defined in 7.5) to the dynamic type of the object,
  - (11.4) — a type that is the signed or unsigned type corresponding to the dynamic type of the object,
  - (11.5) — a type that is the signed or unsigned type corresponding to a cv-qualified version of the dynamic type of the object,
  - (11.6) — an aggregate or union type that includes one of the aforementioned types among its elements or non-static data members (including, recursively, an element or non-static data member of a subaggregate or contained union),
  - (11.7) — a type that is a (possibly cv-qualified) base class type of the dynamic type of the object,
  - (11.8) — a `char`, `unsigned char`, or `std::byte` type.

## 8.2.2 Type

[**expr.type**]

- 1 If an expression initially has the type “reference to T” (11.3.2, 11.6.3), the type is adjusted to T prior to any further analysis. The expression designates the object or function denoted by the reference, and the expression is an lvalue or an xvalue, depending on the expression. [Note: Before the lifetime of the reference has started or after it has ended, the behavior is undefined (see 6.6.3). — end note]
- 2 If a prvalue initially has the type “*cv T*”, where T is a cv-unqualified non-class, non-array type, the type of the expression is adjusted to T prior to any further analysis.
- 3 The *cv-combined type* of two types T1 and T2 is a type T3 similar to T1 whose cv-qualification signature (7.5) is:
- (3.1) — for every  $i > 0$ ,  $cv_i^3$  is the union of  $cv_i^1$  and  $cv_i^2$ ;
  - (3.2) — if the resulting  $cv_i^3$  is different from  $cv_i^1$  or  $cv_i^2$ , then `const` is added to every  $cv_k^3$  for  $0 < k < i$ .
- [Note: Given similar types T1 and T2, this construction ensures that both can be converted to T3. — end note]
- 4 The *composite pointer type* of two operands p1 and p2 having types T1 and T2, respectively, where at least one is a pointer or pointer-to-member type or `std::nullptr_t`, is:
- (4.1) — if both p1 and p2 are null pointer constants, `std::nullptr_t`;
  - (4.2) — if either p1 or p2 is a null pointer constant, T2 or T1, respectively;
  - (4.3) — if T1 or T2 is “pointer to *cv1 void*” and the other type is “pointer to *cv2 T*”, where T is an object type or `void`, “pointer to *cv12 void*”, where *cv12* is the union of *cv1* and *cv2*;
  - (4.4) — if T1 or T2 is “pointer to `noexcept` function” and the other type is “pointer to function”, where the function types are otherwise the same, “pointer to function”;
  - (4.5) — if T1 is “pointer to *cv1 C1*” and T2 is “pointer to *cv2 C2*”, where C1 is reference-related to C2 or C2 is reference-related to C1 (11.6.3), the cv-combined type of T1 and T2 or the cv-combined type of T2 and T1, respectively;
  - (4.6) — if T1 is “pointer to member of C1 of type *cv1 U1*” and T2 is “pointer to member of C2 of type *cv2 U2*” where C1 is reference-related to C2 or C2 is reference-related to C1 (11.6.3), the cv-combined type of T2 and T1 or the cv-combined type of T1 and T2, respectively;
  - (4.7) — if T1 and T2 are similar types (7.5), the cv-combined type of T1 and T2;

<sup>63</sup>) The intent of this list is to specify those circumstances in which an object may or may not be aliased.

- (4.8) — otherwise, a program that necessitates the determination of a composite pointer type is ill-formed.

[*Example:*

```
typedef void *p;
typedef const int *q;
typedef int **pi;
typedef const int **pci;
```

The composite pointer type of `p` and `q` is “pointer to `const void`”; the composite pointer type of `pi` and `pci` is “pointer to `const pointer to const int`”. — *end example*]

### 8.2.3 Context dependence

[**expr.context**]

- <sup>1</sup> In some contexts, *unevaluated operands* appear (8.4.7, 8.5.1.8, 8.5.2.3, 8.5.2.7, 10.1.7.2, Clause 17). An unevaluated operand is not evaluated. [*Note:* In an unevaluated operand, a non-static class member may be named (8.4.4) and naming of objects or functions does not, by itself, require that a definition be provided (6.2). An unevaluated operand is considered a full-expression (6.8.1). — *end note*]
- <sup>2</sup> In some contexts, an expression only appears for its side effects. Such an expression is called a *discarded-value expression*. The array-to-pointer (7.2) and function-to-pointer (7.3) standard conversions are not applied. The lvalue-to-rvalue conversion (7.1) is applied if and only if the expression is a glvalue of volatile-qualified type and it is one of the following:
  - (2.1) — ( *expression* ), where *expression* is one of these expressions,
  - (2.2) — *id-expression* (8.4.4),
  - (2.3) — subscripting (8.5.1.1),
  - (2.4) — class member access (8.5.1.5),
  - (2.5) — indirection (8.5.2.1),
  - (2.6) — pointer-to-member operation (8.5.4),
  - (2.7) — conditional expression (8.5.16) where both the second and the third operands are one of these expressions, or
  - (2.8) — comma expression (8.5.19) where the right operand is one of these expressions.

[*Note:* Using an overloaded operator causes a function call; the above covers only operators with built-in meaning. — *end note*] If the (possibly converted) expression is a prvalue, the temporary materialization conversion (7.4) is applied. [*Note:* If the expression is an lvalue of class type, it must have a volatile copy constructor to initialize the temporary object that is the result object of the lvalue-to-rvalue conversion. — *end note*] The glvalue expression is evaluated and its value is discarded.

### 8.3 Usual arithmetic conversions

[**expr.arith.conv**]

- <sup>1</sup> Many binary operators that expect operands of arithmetic or enumeration type cause conversions and yield result types in a similar way. The purpose is to yield a common type, which is also the type of the result. This pattern is called the *usual arithmetic conversions*, which are defined as follows:
  - (1.1) — If either operand is of scoped enumeration type (10.2), no conversions are performed; if the other operand does not have the same type, the expression is ill-formed.
  - (1.2) — If either operand is of type `long double`, the other shall be converted to `long double`.
  - (1.3) — Otherwise, if either operand is `double`, the other shall be converted to `double`.
  - (1.4) — Otherwise, if either operand is `float`, the other shall be converted to `float`.
  - (1.5) — Otherwise, the integral promotions (7.6) shall be performed on both operands.<sup>64</sup> Then the following rules shall be applied to the promoted operands:
    - (1.5.1) — If both operands have the same type, no further conversion is needed.
    - (1.5.2) — Otherwise, if both operands have signed integer types or both have unsigned integer types, the operand with the type of lesser integer conversion rank shall be converted to the type of the operand with greater rank.

<sup>64</sup> As a consequence, operands of type `bool`, `char16_t`, `char32_t`, `wchar_t`, or an enumerated type are converted to some integral type.

- (1.5.3) — Otherwise, if the operand that has unsigned integer type has rank greater than or equal to the rank of the type of the other operand, the operand with signed integer type shall be converted to the type of the operand with unsigned integer type.
- (1.5.4) — Otherwise, if the type of the operand with signed integer type can represent all of the values of the type of the operand with unsigned integer type, the operand with unsigned integer type shall be converted to the type of the operand with signed integer type.
- (1.5.5) — Otherwise, both operands shall be converted to the unsigned integer type corresponding to the type of the operand with signed integer type.
- 2 If one operand is of enumeration type and the other operand is of a different enumeration type or a floating-point type, this behavior is deprecated (D.1).

## 8.4 Primary expressions

[expr.prim]

*primary-expression:*

*literal*  
**this**  
 ( *expression* )  
*id-expression*  
*lambda-expression*  
*fold-expression*  
*requires-expression*

### 8.4.1 Literals

[expr.prim.literal]

- 1 A *literal* is a primary expression. Its type depends on its form (5.13). A string literal is an lvalue; all other literals are prvalues.

### 8.4.2 This

[expr.prim.this]

- 1 The keyword **this** names a pointer to the object for which a non-static member function (12.2.2.1) is invoked or a non-static data member's initializer (12.2) is evaluated.
- 2 If a declaration declares a member function or member function template of a class X, the expression **this** is a prvalue of type “pointer to *cv-qualifier-seq* X” between the optional *cv-qualifier-seq* and the end of the *function-definition*, *member-declarator*, or *declarator*. It shall not appear before the optional *cv-qualifier-seq* and it shall not appear within the declaration of a static member function (although its type and value category are defined within a static member function as they are within a non-static member function). [Note: This is because declaration matching does not occur until the complete declarator is known. — end note] [Note: In a *trailing-return-type*, the class being defined is not required to be complete for purposes of class member access (8.5.1.5). Class members declared later are not visible. [Example:

```
struct A {
 char g();
 template<class T> auto f(T t) -> decltype(t + g())
 { return t + g(); }
};
template auto A::f(int t) -> decltype(t + g());
```

— end example] — end note]

- 3 Otherwise, if a *member-declarator* declares a non-static data member (12.2) of a class X, the expression **this** is a prvalue of type “pointer to X” within the optional default member initializer (12.2). It shall not appear elsewhere in the *member-declarator*.
- 4 The expression **this** shall not appear in any other context. [Example:

```
class Outer {
 int a[sizeof(*this)]; // error: not inside a member function
 unsigned int sz = sizeof(*this); // OK: in default member initializer

 void f() {
 int b[sizeof(*this)]; // OK

 struct Inner {
 int c[sizeof(*this)]; // error: not inside a member function of Inner
 };
 };
};
```

```

 }
};
— end example]

```

### 8.4.3 Parentheses [expr.prim.paren]

- <sup>1</sup> A parenthesized expression (**E**) is a primary expression whose type, value, and value category are identical to those of **E**. The parenthesized expression can be used in exactly the same contexts as those where **E** can be used, and with the same meaning, except as otherwise indicated.

### 8.4.4 Names [expr.prim.id]

*id-expression:*  
*unqualified-id*  
*qualified-id*

- <sup>1</sup> An *id-expression* is a restricted form of a *primary-expression*. [Note: An *id-expression* can appear after `.` and `->` operators (8.5.1.5). — end note]
- <sup>2</sup> An *id-expression* that denotes a non-static data member or non-static member function of a class can only be used:
- (2.1) — as part of a class member access (8.5.1.5) in which the object expression refers to the member’s class<sup>65</sup> or a class derived from that class, or
- (2.2) — to form a pointer to member (8.5.2.1), or
- (2.3) — if that *id-expression* denotes a non-static data member and it appears in an unevaluated operand.

[Example:

```

struct S {
 int m;
};
int i = sizeof(S::m); // OK
int j = sizeof(S::m + 42); // OK

```

— end example]

- <sup>3</sup> An *id-expression* that denotes the specialization of a concept (17.6.8) results in a prvalue of type `bool`. The expression is `true` if the concept’s normalized *constraint-expression* (17.4.2) is satisfied (17.4.1) by the specified template arguments and `false` otherwise. [Example:

```

template<typename T> concept C = true;
static_assert(C<int>); // OK

```

— end example] [Note: A concept’s constraints are also considered when using a template name (17.2) and during overload resolution (Clause 16), and they are compared during the the partial ordering of constraints (17.4.4). — end note]

- <sup>4</sup> A program that refers explicitly or implicitly to a function with a trailing *requires-clause* whose *constraint-expression* is not satisfied, other than to declare it, is ill-formed. [Example:

```

void f(int) requires false;

void g() {
 f(0); // error: cannot call f
 void (*p1)(int) = f; // error: cannot take the address of f
 decltype(f)* p2 = nullptr; // error: the type decltype(f) is invalid
}

```

In each case, the constraints of `f` are not satisfied. In the declaration of `p2`, those constraints are required to be satisfied even though `f` is an unevaluated operand (8.2). — end example]

---

<sup>65</sup>) This also applies when the object expression is an implicit `(*this)` (12.2.2).

## 8.4.4.1 Unqualified names

[expr.prim.id.unqual]

*unqualified-id*:  
*identifier*  
*operator-function-id*  
*conversion-function-id*  
*literal-operator-id*  
~ *class-name*  
~ *decltype-specifier*  
*template-id*

- <sup>1</sup> An *identifier* is only an *id-expression* if it has been suitably declared (Clause 10) or if it appears as part of a *declarator-id* (Clause 11). [Note: For *operator-function-ids*, see 16.5; for *conversion-function-ids*, see 15.3.2; for *literal-operator-ids*, see 16.5.8; for *template-ids*, see 17.2. A *class-name* or *decltype-specifier* prefixed by ~ denotes a destructor; see 15.4. Within the definition of a non-static member function, an *identifier* that names a non-static member is transformed to a class member access expression (12.2.2). — end note]
- <sup>2</sup> The result is the entity denoted by the identifier. If the entity is a local entity and naming it from outside of an unevaluated operand within the declarative region where the *unqualified-id* appears would result in some intervening *lambda-expression* capturing it by copy (8.4.5.2), the type of the expression is the type of a class member access expression (8.5.1.5) naming the non-static data member that would be declared for such a capture in the closure object of the innermost such intervening *lambda-expression*. [Note: If that *lambda-expression* is not declared *mutable*, the type of such an identifier will typically be *const* qualified. — end note] If the entity is a template parameter object for a template parameter of type T (17.1), the type of the expression is *const* T. Otherwise, the type of the expression is the type of the result. [Note: The type will be adjusted as described in 8.2.2 if it is cv-qualified or is a reference type. — end note] The expression is an lvalue if the entity is a function, variable, structured binding (11.5), data member, or template parameter object and a prvalue otherwise (8.2.1); it is a bit-field if the identifier designates a bit-field. [Example:

```
void f() {
 float x, &r = x;
 [=] {
 decltype(x) y1; // y1 has type float
 decltype((x)) y2 = y1; // y2 has type float const& because this lambda
 // is not mutable and x is an lvalue
 decltype(r) r1 = y1; // r1 has type float&
 decltype((r)) r2 = y2; // r2 has type float const&
 };
}
```

— end example]

## 8.4.4.2 Qualified names

[expr.prim.id.qual]

*qualified-id*:  
*nested-name-specifier* **template**<sub>opt</sub> *unqualified-id*  
*nested-name-specifier*:  
::  
*type-name* ::  
*namespace-name* ::  
*decltype-specifier* ::  
*nested-name-specifier* *identifier* ::  
*nested-name-specifier* **template**<sub>opt</sub> *simple-template-id* ::

- <sup>1</sup> The type denoted by a *decltype-specifier* in a *nested-name-specifier* shall be a class or enumeration type.
- <sup>2</sup> A *nested-name-specifier* that denotes a class, optionally followed by the keyword **template** (17.2), and then followed by the name of a member of either that class (12.2) or one of its base classes (Clause 13), is a *qualified-id*; 6.4.3.1 describes name lookup for class members that appear in *qualified-ids*. The result is the member. The type of the result is the type of the member. The result is an lvalue if the member is a static member function or a data member and a prvalue otherwise. [Note: A class member can be referred to using a *qualified-id* at any point in its potential scope (6.3.7). — end note] Where *class-name* :: ~ *class-name* is used, the two *class-names* shall refer to the same class; this notation names the destructor (15.4). The form ~ *decltype-specifier* also denotes the destructor, but it shall not be used as the *unqualified-id* in a *qualified-id*. [Note: A *typedef-name* that names a class is a *class-name* (12.1). — end note]

- <sup>3</sup> The *nested-name-specifier* `::` names the global namespace. A *nested-name-specifier* that names a namespace (10.3), optionally followed by the keyword `template` (17.2), and then followed by the name of a member of that namespace (or the name of a member of a namespace made visible by a *using-directive*), is a *qualified-id*; 6.4.3.2 describes name lookup for namespace members that appear in *qualified-ids*. The result is the member. The type of the result is the type of the member. The result is an lvalue if the member is a function, a variable, or a structured binding (11.5) and a prvalue otherwise.
- <sup>4</sup> A *nested-name-specifier* that denotes an enumeration (10.2), followed by the name of an enumerator of that enumeration, is a *qualified-id* that refers to the enumerator. The result is the enumerator. The type of the result is the type of the enumeration. The result is a prvalue.
- <sup>5</sup> In a *qualified-id*, if the *unqualified-id* is a *conversion-function-id*, its *conversion-type-id* shall denote the same type in both the context in which the entire *qualified-id* occurs and in the context of the class denoted by the *nested-name-specifier*.

### 8.4.5 Lambda expressions

[`expr.prim.lambda`]

*lambda-expression*:

*lambda-introducer* *compound-statement*

*lambda-introducer* *lambda-declarator* *requires-clause*<sub>opt</sub> *compound-statement*

*lambda-introducer* < *template-parameter-list* > *requires-clause*<sub>opt</sub> *compound-statement*

*lambda-introducer* < *template-parameter-list* > *requires-clause*<sub>opt</sub>

*lambda-declarator* *requires-clause*<sub>opt</sub> *compound-statement*

*lambda-introducer*:

[ *lambda-capture*<sub>opt</sub> ]

*lambda-declarator*:

( *parameter-declaration-clause* ) *decl-specifier-seq*<sub>opt</sub>

*noexcept-specifier*<sub>opt</sub> *attribute-specifier-seq*<sub>opt</sub> *trailing-return-type*<sub>opt</sub>

- <sup>1</sup> A *lambda-expression* provides a concise way to create a simple function object. [Example:

```
#include <algorithm>
#include <cmath>
void absort(float* x, unsigned N) {
 std::sort(x, x + N, [](float a, float b) { return std::abs(a) < std::abs(b); });
}
```

— end example]

- <sup>2</sup> A *lambda-expression* is a prvalue whose result object is called the *closure object*. [Note: A closure object behaves like a function object (24.14). — end note]
- <sup>3</sup> In the *decl-specifier-seq* of the *lambda-declarator*, each *decl-specifier* shall either be `mutable` or `constexpr`. [Note: The trailing *requires-clause* is described in Clause 11. — end note]
- <sup>4</sup> If a *lambda-expression* does not include a *lambda-declarator*, it is as if the *lambda-declarator* were `()`. The lambda return type is `auto`, which is replaced by the type specified by the *trailing-return-type* if provided and/or deduced from `return` statements as described in 10.1.7.4. [Example:

```
auto x1 = [](int i){ return i; }; // OK: return type is int
auto x2 = []{ return { 1, 2 }; }; // error: deducing return type from braced-init-list
int j;
auto x3 = []()->auto&& { return j; }; // OK: return type is int&
```

— end example]

- <sup>5</sup> A lambda is a *generic lambda* if the `auto` *type-specifier* appears as one of the *decl-specifiers* in the *decl-specifier-seq* of a *parameter-declaration* of the *lambda-expression*, or if the lambda has a *template-parameter-list*. [Example:

```
int i = [](int i, auto a) { return i; }(3, 4); // OK: a generic lambda
int j = []<class T>(T t, int i) { return i; }(3, 4); // OK: a generic lambda
```

— end example]

#### 8.4.5.1 Closure types

[`expr.prim.lambda.closure`]

- <sup>1</sup> The type of a *lambda-expression* (which is also the type of the closure object) is a unique, unnamed non-union class type, called the *closure type*, whose properties are described below.

- <sup>2</sup> The closure type is declared in the smallest block scope, class scope, or namespace scope that contains the corresponding *lambda-expression*. [Note: This determines the set of namespaces and classes associated with the closure type (6.4.2). The parameter types of a *lambda-declarator* do not affect these associated namespaces and classes. — end note] The closure type is not an aggregate type (11.6.1). An implementation may define the closure type differently from what is described below provided this does not alter the observable behavior of the program other than by changing:

- (2.1) — the size and/or alignment of the closure type,
- (2.2) — whether the closure type is trivially copyable (Clause 12), or
- (2.3) — whether the closure type is a standard-layout class (Clause 12).

An implementation shall not add members of rvalue reference type to the closure type.

- <sup>3</sup> The closure type for a non-generic *lambda-expression* has a public inline function call operator (16.5.4) whose parameters and return type are described by the *lambda-expression's parameter-declaration-clause* and *trailing-return-type* respectively. For a generic lambda, the closure type has a public inline function call operator member template (17.6.2) whose *template-parameter-list* consists of the specified *template-parameter-list*, if any, to which is appended one invented type *template-parameter* for each occurrence of `auto` in the lambda's *parameter-declaration-clause*, in order of appearance. The invented type *template-parameter* is a template parameter pack if the corresponding *parameter-declaration* declares a function parameter pack (11.3.5). The return type and function parameters of the function call operator template are derived from the *lambda-expression's trailing-return-type* and *parameter-declaration-clause* by replacing each occurrence of `auto` in the *decl-specifiers* of the *parameter-declaration-clause* with the name of the corresponding invented *template-parameter*. The *requires-clause* of the function call operator template is the *requires-clause* immediately following `< template-parameter-list >`, if any. The trailing *requires-clause* of the function call operator or operator template is the *requires-clause* following the *lambda-declarator*, if any. [Example:

```

auto glambda = [](auto a, auto&& b) { return a < b; };
bool b = glambda(3, 3.14); // OK

auto vglambda = [](auto printer) {
 return [=](auto&& ... ts) { // OK: ts is a function parameter pack
 printer(std::forward<decltype(ts)>(ts)...);

 return [=]() {
 printer(ts ...);
 };
 };
};
auto p = vglambda([](auto v1, auto v2, auto v3)
 { std::cout << v1 << v2 << v3; });
auto q = p(1, 'a', 3.14); // OK: outputs 1a3.14
q(); // OK: outputs 1a3.14

```

— end example]

- <sup>4</sup> The function call operator or operator template is declared `const` (12.2.2) if and only if the *lambda-expression's parameter-declaration-clause* is not followed by `mutable`. It is neither virtual nor declared `volatile`. Any *noexcept-specifier* specified on a *lambda-expression* applies to the corresponding function call operator or operator template. An *attribute-specifier-seq* in a *lambda-declarator* appertains to the type of the corresponding function call operator or operator template. The function call operator or any given operator template specialization is a `constexpr` function if either the corresponding *lambda-expression's parameter-declaration-clause* is followed by `constexpr`, or it satisfies the requirements for a `constexpr` function (10.1.5). [Note: Names referenced in the *lambda-declarator* are looked up in the context in which the *lambda-expression* appears. — end note] [Example:

```

auto ID = [](auto a) { return a; };
static_assert(ID(3) == 3); // OK

struct NonLiteral {
 NonLiteral(int n) : n(n) { }
 int n;
};

```



```
static_assert(ID(NonLiteral{3}).n == 3); // ill-formed
```

— end example]

5 [Example:

```
auto monoid = [](auto v) { return [=] { return v; }; };
auto add = [](auto m1) constexpr {
 auto ret = m1();
 return [=](auto m2) mutable {
 auto m1val = m1();
 auto plus = [=](auto m2val) mutable constexpr
 { return m1val += m2val; };
 ret = plus(m2());
 return monoid(ret);
 };
};
constexpr auto zero = monoid(0);
constexpr auto one = monoid(1);
static_assert(add(one)(zero)() == one()); // OK
```

// Since two below is not declared constexpr, an evaluation of its constexpr member function call operator cannot perform an lvalue-to-rvalue conversion on one of its subobjects (that represents its capture) in a constant expression.

```
auto two = monoid(2);
assert(two() == 2); // OK, not a constant expression.
static_assert(add(one)(one)() == two()); // ill-formed: two() is not a constant expression
static_assert(add(one)(one)() == monoid(2)()); // OK
```

— end example]

6 The function call operator or operator template may be constrained (17.4.2) by a *constrained-parameter* (17.1), a *requires-clause* (Clause 17), or a trailing *requires-clause* (Clause 11). [Example:

```
template <typename T> concept C1 = /* ... */;
template <std::size_t N> concept C2 = /* ... */;
template <typename A, typename B> concept C3 = /* ... */;

auto f = [<typename T1, C1 T2> requires C2<sizeof(T1) + sizeof(T2)>
 (T1 a1, T1 b1, T2 a2, auto a3, auto a4) requires C3<decltype(a4), T2> {
 // T2 is a constrained parameter,
 // T1 and T2 are constrained by a requires-clause, and
 // T2 and the type of a4 are constrained by a trailing requires-clause.
};
```

— end example]

7 The closure type for a non-generic *lambda-expression* with no *lambda-capture* whose constraints (if any) are satisfied has a conversion function to pointer to function with C++ language linkage (10.5) having the same parameter and return types as the closure type’s function call operator. The conversion is to “pointer to *noexcept* function” if the function call operator has a non-throwing exception specification. The value returned by this conversion function is the address of a function F that, when invoked, has the same effect as invoking the closure type’s function call operator. F is a *constexpr* function if the function call operator is a *constexpr* function. For a generic lambda with no *lambda-capture*, the closure type has a conversion function template to pointer to function. The conversion function template has the same invented template parameter list, and the pointer to function has the same parameter types, as the function call operator template. The return type of the pointer to function shall behave as if it were a *decltype-specifier* denoting the return type of the corresponding function call operator template specialization.

8 [Note: If the generic lambda has no *trailing-return-type* or the *trailing-return-type* contains a placeholder type, return type deduction of the corresponding function call operator template specialization has to be done. The corresponding specialization is that instantiation of the function call operator template with the same template arguments as those deduced for the conversion function template. Consider the following:

```
auto glambda = [](auto a) { return a; };
int (*fp)(int) = glambda;
```

The behavior of the conversion function of `glambda` above is like that of the following conversion function:

```

struct Closure {
 template<class T> auto operator()(T t) const { /* ... */ }
 template<class T> static auto lambda_call_operator_invoker(T a) {
 // forwards execution to operator()(a) and therefore has
 // the same return type deduced
 /* ... */
 }
 template<class T> using fp_ptr_t =
 decltype(lambda_call_operator_invoker(declval<T>())) (*)(T);

 template<class T> operator fp_ptr_t<T>() const
 { return &lambda_call_operator_invoker; }
};

```

— end note]

[Example:

```

void f1(int (*)(int)) { }
void f2(char (*)(int)) { }

void g(int (*)(int)) { } // #1
void g(char (*)(char)) { } // #2

void h(int (*)(int)) { } // #3
void h(char (*)(int)) { } // #4

auto glambda = [] (auto a) { return a; };
f1(glambda); // OK
f2(glambda); // error: ID is not convertible
g(glambda); // error: ambiguous
h(glambda); // OK: calls #3 since it is convertible from ID
int& (*fpi)(int*) = [] (auto* a) -> auto& { return *a; }; // OK

```

— end example]

- <sup>9</sup> The value returned by any given specialization of this conversion function template is the address of a function *F* that, when invoked, has the same effect as invoking the generic lambda's corresponding function call operator template specialization. *F* is a constexpr function if the corresponding specialization is a constexpr function. [Note: This will result in the implicit instantiation of the generic lambda's body. The instantiated generic lambda's return type and parameter types shall match the return type and parameter types of the pointer to function. — end note] [Example:

```

auto GL = [] (auto a) { std::cout << a; return a; };
int (*GL_int)(int) = GL; // OK: through conversion function template
GL_int(3); // OK: same as GL(3)

```

— end example]

- <sup>10</sup> The conversion function or conversion function template is public, constexpr, non-virtual, non-explicit, const, and has a non-throwing exception specification (18.4). [Example:

```

auto Fwd = [] (int (*fp)(int), auto a) { return fp(a); };
auto C = [] (auto a) { return a; };

static_assert(Fwd(C,3) == 3); // OK

// No specialization of the function call operator template can be constexpr (due to the local static).
auto NC = [] (auto a) { static int s; return a; };
static_assert(Fwd(NC,3) == 3); // ill-formed

```

— end example]

- <sup>11</sup> The *lambda-expression's compound-statement* yields the *function-body* (11.4) of the function call operator, but for purposes of name lookup (6.4), determining the type and value of **this** (12.2.2.1) and transforming *id-expressions* referring to non-static class members into class member access expressions using (**\*this**) (12.2.2), the *compound-statement* is considered in the context of the *lambda-expression*. [Example:

```

struct S1 {
 int x, y;
};

```

```

int operator()(int);
void f() {
 [=]()->int {
 return operator()(this->x + y); // equivalent to S1::operator()(this->x + (*this).y)
 // this has type S1*
 };
}
};

```

— *end example*] Further, a variable `__func__` is implicitly defined at the beginning of the *compound-statement* of the *lambda-expression*, with semantics as described in 11.4.1.

- 12 The closure type associated with a *lambda-expression* has no default constructor if the *lambda-expression* has a *lambda-capture* and a defaulted default constructor otherwise. It has a defaulted copy constructor and a defaulted move constructor (15.8). It has a deleted copy assignment operator if the *lambda-expression* has a *lambda-capture* and defaulted copy and move assignment operators otherwise. [*Note*: These special member functions are implicitly defined as usual, and might therefore be defined as deleted. — *end note*]
- 13 The closure type associated with a *lambda-expression* has an implicitly-declared destructor (15.4).
- 14 A member of a closure type shall not be explicitly instantiated (17.8.2), explicitly specialized (17.8.3), or named in a friend declaration (14.3).

#### 8.4.5.2 Captures

[`expr.prim.lambda.capture`]

```

lambda-capture:
 capture-default
 capture-list
 capture-default , capture-list

capture-default:
 &
 =

capture-list:
 capture
 capture-list , capture

capture:
 simple-capture ...opt
 ...opt init-capture

simple-capture:
 identifier
 & identifier
 this
 * this

init-capture:
 identifier initializer
 & identifier initializer

```

- 1 The body of a *lambda-expression* may refer to variables with automatic storage duration and the `*this` object (if any) of enclosing block scopes by capturing those entities, as described below.
- 2 If a *lambda-capture* includes a *capture-default* that is `&`, no identifier in a *simple-capture* of that *lambda-capture* shall be preceded by `&`. If a *lambda-capture* includes a *capture-default* that is `=`, each *simple-capture* of that *lambda-capture* shall be of the form “`& identifier`”, “`this`”, or “`* this`”. [*Note*: The form [`&,this`] is redundant but accepted for compatibility with ISO C++ 2014. — *end note*] Ignoring appearances in *initializers* of *init-captures*, an identifier or `this` shall not appear more than once in a *lambda-capture*. [*Example*:

```

struct S2 { void f(int i); };
void S2::f(int i) {
 [&, i]{ }; // OK
 [&, this, i]{ }; // OK, equivalent to [&, i]
 [&, &i]{ }; // error: i preceded by & when & is the default
 [=, *this]{ }; // OK
 [=, this]{ }; // OK, equivalent to [=]
 [i, i]{ }; // error: i repeated
}

```

```
[this, *this]{ }; // error: this appears twice
}
```

— end example]

3 A *lambda-expression* shall not have a *capture-default* or *simple-capture* in its *lambda-introducer* unless its innermost enclosing scope is a block scope (6.3.3) or it appears within a default member initializer and its innermost enclosing scope is the corresponding class scope (6.3.7).

4 The *identifier* in a *simple-capture* is looked up using the usual rules for unqualified name lookup (6.4.1); each such lookup shall find a local entity. The *simple-captures* `this` and `* this` denote the local entity `*this`. An entity that is designated by a *simple-capture* is said to be *explicitly captured*.

5 If an *identifier* in a *simple-capture* appears as the *declarator-id* of a parameter of the *lambda-declarator's* *parameter-declaration-clause*, the program is ill-formed. [Example:

```
void f() {
 int x = 0;
 auto g = [x](int x) { return 0; } // error: parameter and simple-capture have the same name
}
```

— end example]

6 An *init-capture* behaves as if it declares and explicitly captures a variable of the form “`auto init-capture ;`” whose declarative region is the *lambda-expression's* *compound-statement*, except that:

- (6.1) — if the capture is by copy (see below), the non-static data member declared for the capture and the variable are treated as two different ways of referring to the same object, which has the lifetime of the non-static data member, and no additional copy and destruction is performed, and
- (6.2) — if the capture is by reference, the variable's lifetime ends when the closure object's lifetime ends.

[Note: This enables an *init-capture* like “`x = std::move(x)`”; the second “`x`” must bind to a declaration in the surrounding context. — end note] [Example:

```
int x = 4;
auto y = [&r = x, x = x+1]()->int {
 r += 2;
 return x+2;
}(); // Updates ::x to 6, and initializes y to 7.
```

```
auto z = [a = 42](int a) { return 1; } // error: parameter and local variable have the same name
```

— end example]

7 For the purposes of lambda capture, an expression potentially references local entities as follows:

- (7.1) — An *id-expression* that names a local entity potentially references that entity; an *id-expression* that names one or more non-static class members and does not form a pointer to member (8.5.2.1) potentially references `*this`. [Note: This occurs even if overload resolution selects a static member function for the *id-expression*. — end note]
- (7.2) — A `this` expression potentially references `*this`.
- (7.3) — A *lambda-expression* potentially references the local entities named by its *simple-captures*.

If an expression potentially references a local entity within a declarative region in which it is odr-usable, and the expression would be potentially evaluated if the effect of any enclosing `typeid` expressions (8.5.1.8) were ignored, the entity is said to be *implicitly captured* by each intervening *lambda-expression* with an associated *capture-default* that does not explicitly capture it. The implicit capture of `*this` is deprecated when the *capture-default* is `=`; see D.2. [Example:

```
void f(int, const int (&)[2] = {}); // #1
void f(const int&, const int (&)[1]); // #2
void test() {
 const int x = 17;
 auto g = [](auto a) {
 f(x); // OK: calls #1, does not capture x
 };

 auto g1 = [=](auto a) {
 f(x); // OK: calls #1, captures x
 };
}
```

```

};

auto g2 = [=](auto a) {
 int selector[sizeof(a) == 1 ? 1 : 2]{};
 f(x, selector); // OK: captures x, might call #1 or #2
};

auto g3 = [=](auto a) {
 typeid(a + x); // captures x regardless of whether a + x is an unevaluated operand
};
}

```

Within `g1`, an implementation might optimize away the capture of `x` as it is not odr-used. — *end example*  
 [Note: The set of captured entities is determined syntactically, and entities might be implicitly captured even if the expression denoting a local entity is within a discarded statement (9.4.1). *Example:*

```

template<bool B>
void f(int n) {
 [=](auto a) {
 if constexpr (B && sizeof(a) > 4) {
 (void)n; // captures n regardless of the value of B and sizeof(int)
 }
 } (0);
}
}

```

— *end example*] — *end note*]

- 8 An entity is *captured* if it is captured explicitly or implicitly. An entity captured by a *lambda-expression* is odr-used (6.2) in the scope containing the *lambda-expression*. If a *lambda-expression* explicitly captures an entity that is not odr-usable or captures a structured binding (explicitly or implicitly), the program is ill-formed. *Example:*

```

void f1(int i) {
 int const N = 20;
 auto m1 = [=]{
 int const M = 30;
 auto m2 = [i]{
 int x[N][M]; // OK: N and M are not odr-used
 x[0][0] = i; // OK: i is explicitly captured by m2 and implicitly captured by m1
 };
 };
}

struct s1 {
 int f;
 void work(int n) {
 int m = n*n;
 int j = 40;
 auto m3 = [this,m] {
 auto m4 = [&,j] {
 int x = n; // error: j not odr-usable due to intervening lambda m3
 x += m; // error: n is odr-used but not odr-usable due to intervening lambda m3
 x += i; // OK: m implicitly captured by m4 and explicitly captured by m3
 // error: i is odr-used but not odr-usable
 // due to intervening function and class scopes
 x += f; // OK: this captured implicitly by m4 and explicitly by m3
 };
 };
 }
};

struct s2 {
 double ohseven = .007;
 auto f() {
 return [this] {
 return [*this] {
 return ohseven; // OK
 }
 }
 }
}

```

```

 }();
 }
 auto g() {
 return [] {
 return [*this] { }; // error: *this not captured by outer lambda-expression
 }();
 }
};

```

— end example]

- <sup>9</sup> A *lambda-expression* appearing in a default argument shall not implicitly or explicitly capture any entity. [Example:

```

void f2() {
 int i = 1;
 void g1(int = ([i]{ return i; })()); // ill-formed
 void g2(int = ([i]{ return 0; })()); // ill-formed
 void g3(int = ([=]{ return i; })()); // ill-formed
 void g4(int = ([=]{ return 0; })()); // OK
 void g5(int = ([]{ return sizeof i; })()); // OK
}

```

— end example]

- <sup>10</sup> An entity is *captured by copy* if

- (10.1) — it is implicitly captured, the *capture-default* is =, and the captured entity is not *\*this*, or
- (10.2) — it is explicitly captured with a capture that is not of the form *this*, *& identifier*, or *& identifier initializer*.

For each entity captured by copy, an unnamed non-static data member is declared in the closure type. The declaration order of these members is unspecified. The type of such a data member is the referenced type if the entity is a reference to an object, an lvalue reference to the referenced function type if the entity is a reference to a function, or the type of the corresponding captured entity otherwise. A member of an anonymous union shall not be captured by copy.

- <sup>11</sup> Every *id-expression* within the *compound-statement* of a *lambda-expression* that is an odr-use (6.2) of an entity captured by copy is transformed into an access to the corresponding unnamed data member of the closure type. [Note: An *id-expression* that is not an odr-use refers to the original entity, never to a member of the closure type. However, such an *id-expression* can still cause the implicit capture of the entity. — end note] If *\*this* is captured by copy, each expression that odr-uses *\*this* is transformed to instead refer to the corresponding unnamed data member of the closure type. [Example:

```

void f(const int*);
void g() {
 const int N = 10;
 [=] {
 int arr[N]; // OK: not an odr-use, refers to automatic variable
 f(&N); // OK: causes N to be captured; &N points to
 // the corresponding member of the closure type
 };
}

```

— end example]

- <sup>12</sup> An entity is *captured by reference* if it is implicitly or explicitly captured but not captured by copy. It is unspecified whether additional unnamed non-static data members are declared in the closure type for entities captured by reference. If declared, such non-static data members shall be of literal type. [Example:

```

// The inner closure type must be a literal type regardless of how reference captures are represented.
static_assert([](int n) { return [&n] { return ++n; }(); } (3) == 4);

```

— end example] A bit-field or a member of an anonymous union shall not be captured by reference.

- <sup>13</sup> An *id-expression* within the *compound-statement* of a *lambda-expression* that is an odr-use of a reference captured by reference refers to the entity to which the captured reference is bound and not to the captured reference. [Note: The validity of such captures is determined by the lifetime of the object to which the reference refers, not by the lifetime of the reference itself. — end note] [Example:

```

auto h(int &r) {
 return [&] {
 ++r; // Valid after h returns if the lifetime of the
 // object to which r is bound has not ended
 };
}

```

— end example]

- 14 If a *lambda-expression* *m2* captures an entity and that entity is captured by an immediately enclosing *lambda-expression* *m1*, then *m2*'s capture is transformed as follows:

- (14.1) — if *m1* captures the entity by copy, *m2* captures the corresponding non-static data member of *m1*'s closure type;
- (14.2) — if *m1* captures the entity by reference, *m2* captures the same entity captured by *m1*.

[Example: The nested *lambda-expressions* and invocations below will output 123234.

```

int a = 1, b = 1, c = 1;
auto m1 = [a, &b, &c]() mutable {
 auto m2 = [a, b, &c]() mutable {
 std::cout << a << b << c;
 a = 4; b = 4; c = 4;
 };
 a = 3; b = 3; c = 3;
 m2();
};
a = 2; b = 2; c = 2;
m1();
std::cout << a << b << c;

```

— end example]

- 15 When the *lambda-expression* is evaluated, the entities that are captured by copy are used to direct-initialize each corresponding non-static data member of the resulting closure object, and the non-static data members corresponding to the *init-captures* are initialized as indicated by the corresponding *initializer* (which may be copy- or direct-initialization). (For array members, the array elements are direct-initialized in increasing subscript order.) These initializations are performed in the (unspecified) order in which the non-static data members are declared. [Note: This ensures that the destructions will occur in the reverse order of the constructions. — end note]
- 16 [Note: If a non-reference entity is implicitly or explicitly captured by reference, invoking the function call operator of the corresponding *lambda-expression* after the lifetime of the entity has ended is likely to result in undefined behavior. — end note]
- 17 A *simple-capture* followed by an ellipsis is a pack expansion (17.6.3). An *init-capture* preceded by an ellipsis is a pack expansion that introduces an *init-capture* pack (17.6.3) whose declarative region is the *lambda-expression*'s *compound-statement*. [Example:

```

template<class... Args>
void f(Args... args) {
 auto lm = [&, args...] { return g(args...); };
 lm();

 auto lm2 = [...xs=std::move(args)] { return g(xs...); };
 lm2();
}

```

— end example]

#### 8.4.6 Fold expressions

[**expr.prim.fold**]

- 1 A fold expression performs a fold of a pack (17.6.3) over a binary operator.

*fold-expression*:

```

(cast-expression fold-operator ...)
(... fold-operator cast-expression)
(cast-expression fold-operator ... fold-operator cast-expression)

```

*fold-operator*: one of

```
+ - * / % ^ & | << >>
+= -= *= /= %= ^= &= |= <<= >>= =
== != < > <= >= && || , .* ->*
```

- <sup>2</sup> An expression of the form  $(\dots op e)$  where  $op$  is a *fold-operator* is called a *unary left fold*. An expression of the form  $(e op \dots)$  where  $op$  is a *fold-operator* is called a *unary right fold*. Unary left folds and unary right folds are collectively called *unary folds*. In a unary fold, the *cast-expression* shall contain an unexpanded pack (17.6.3).
- <sup>3</sup> An expression of the form  $(e1 op1 \dots op2 e2)$  where  $op1$  and  $op2$  are *fold-operators* is called a *binary fold*. In a binary fold,  $op1$  and  $op2$  shall be the same *fold-operator*, and either  $e1$  shall contain an unexpanded pack or  $e2$  shall contain an unexpanded pack, but not both. If  $e2$  contains an unexpanded pack, the expression is called a *binary left fold*. If  $e1$  contains an unexpanded pack, the expression is called a *binary right fold*. [Example:

```
template<typename ...Args>
bool f(Args ...args) {
 return (true && ... && args); // OK
}

template<typename ...Args>
bool f(Args ...args) {
 return (args + ... + args); // error: both operands contain unexpanded packs
}

```

— end example]

### 8.4.7 Requires expressions

[expr.prim.req]

- <sup>1</sup> A *requires-expression* provides a concise way to express requirements on template arguments that can be checked by name lookup (6.4) or by checking properties of types and expressions.

*requires-expression*:

```
requires requirement-parameter-listopt requirement-body
```

*requirement-parameter-list*:

```
(parameter-declaration-clauseopt)
```

*requirement-body*:

```
{ requirement-seq }
```

*requirement-seq*:

```
requirement
requirement-seq requirement
```

*requirement*:

```
simple-requirement
type-requirement
compound-requirement
nested-requirement
```

- <sup>2</sup> A *requires-expression* is a prvalue of type `bool` whose value is described below. Expressions appearing within a *requirement-body* are unevaluated operands (8.2).
- <sup>3</sup> [Example: A common use of *requires-expressions* is to define requirements in concepts such as the one below:

```
template<typename T>
concept R = requires (T i) {
 typename T::type;
 {*i} -> const typename T::type&;
};

```

A *requires-expression* can also be used in a *requires-clause* (Clause 17) as a way of writing ad hoc constraints on template arguments such as the one below:

```
template<typename T>
requires requires (T x) { x + x; }
T add(T a, T b) { return a + b; }

```

The first `requires` introduces the *requires-clause*, and the second introduces the *requires-expression*. — end example]



- <sup>4</sup> A *requires-expression* may introduce local parameters using a *parameter-declaration-clause* (11.3.5). A local parameter of a *requires-expression* shall not have a default argument. Each name introduced by a local parameter is in scope from the point of its declaration until the closing brace of the *requirement-body*. These parameters have no linkage, storage, or lifetime; they are only used as notation for the purpose of defining *requirements*. The *parameter-declaration-clause* of a *requirement-parameter-list* shall not terminate with an ellipsis. [Example:

```
template<typename T>
concept C = requires(T t, ...) { // error: terminates with an ellipsis
 t;
};
```

— end example]

- <sup>5</sup> The *requirement-body* contains a sequence of *requirements*. These *requirements* may refer to local parameters, template parameters, and any other declarations visible from the enclosing context.
- <sup>6</sup> The substitution of template arguments into a *requires-expression* may result in the formation of invalid types or expressions in its requirements or the violation of the semantic constraints of those requirements. In such cases, the *requires-expression* evaluates to **false**; it does not cause the program to be ill-formed. The substitution and semantic constraint checking proceeds in lexical order and stops when a condition that determines the result of the *requires-expression* is encountered. If substitution (if any) and semantic constraint checking succeed, the *requires-expression* evaluates to **true**. [Note: If a *requires-expression* contains invalid types or expressions in its requirements, and it does not appear within the declaration of a templated entity, then the program is ill-formed. — end note] If the substitution of template arguments into a *requirement* would always result in a substitution failure, the program is ill-formed; no diagnostic required. [Example:

```
template<typename T> concept C =
requires {
 new int[-(int)sizeof(T)]; // ill-formed, no diagnostic required
};
```

— end example]

#### 8.4.7.1 Simple requirements

[expr.prim.req.simple]

*simple-requirement*:  
*expression* ;

- <sup>1</sup> A *simple-requirement* asserts the validity of an *expression*. [Note: The enclosing *requires-expression* will evaluate to **false** if substitution of template arguments into the *expression* fails. The *expression* is an unevaluated operand (8.2). — end note] [Example:

```
template<typename T> concept C =
requires (T a, T b) {
 a + b; // C<T> is true if a + b is a valid expression
};
```

— end example]

#### 8.4.7.2 Type requirements

[expr.prim.req.type]

*type-requirement*:  
typename *nested-name-specifier*<sub>opt</sub> *type-name* ;

- <sup>1</sup> A *type-requirement* asserts the validity of a type. [Note: The enclosing *requires-expression* will evaluate to **false** if substitution of template arguments fails. — end note] [Example:

```
template<typename T, typename T::type = 0> struct S;
template<typename T> using Ref = T&;

template<typename T> concept C = requires {
 typename T::inner; // required nested member name
 typename S<T>; // required class template specialization
 typename Ref<T>; // required alias template substitution, fails if T is void
};
```

— end example]

- <sup>2</sup> A *type-requirement* that names a class template specialization does not require that type to be complete (6.7).

## 8.4.7.3 Compound requirements

[expr.prim.req.compound]

*compound-requirement:*`{ expression } noexceptopt return-type-requirementopt ;`*return-type-requirement:**trailing-return-type*`-> cv-qualifier-seqopt constrained-parameter cv-qualifier-seqopt abstract-declaratoropt`

<sup>1</sup> A *compound-requirement* asserts properties of the *expression* E. Substitution of template arguments (if any) and verification of semantic properties proceed in the following order:

- (1.1) — Substitution of template arguments (if any) into the *expression* is performed.
- (1.2) — If the `noexcept` specifier is present, E shall not be a potentially-throwing expression (18.4).
- (1.3) — If the *return-type-requirement* is present, then:
  - (1.3.1) — Substitution of template arguments (if any) into the *return-type-requirement* is performed.
  - (1.3.2) — If the *return-type-requirement* is a *trailing-return-type*, E is implicitly convertible to the type named by the *trailing-return-type*. If conversion fails, the enclosing *requires-expression* is `false`.
  - (1.3.3) — If the *return-type-requirement* starts with a *constrained-parameter* (17.1), the *expression* is deduced against an invented function template F using the rules in 17.9.2.1. F is a `void` function template with a single type template parameter T declared with the *constrained-parameter*. A *cv-qualifier-seq* cv is formed as the union of `const` and `volatile` specifiers around the *constrained-parameter*. F has a single parameter whose *type-specifier* is cv T followed by the *abstract-declarator*. If deduction fails, the enclosing *requires-expression* is `false`.

[Example:

```
template<typename T> concept C1 = requires(T x) {
 {x++};
};
```

The *compound-requirement* in C1 requires that `x++` is a valid expression. It is equivalent to the *simple-requirement* `x++`;

```
template<typename T> concept C2 = requires(T x) {
 {*x} -> typename T::inner;
};
```

The *compound-requirement* in C2 requires that `*x` is a valid expression, that `typename T::inner` is a valid type, and that `*x` is implicitly convertible to `typename T::inner`.

```
template<typename T, typename U> concept C3 = requires (T t, U u) {
 t == u;
};
template<typename T> concept C4 = requires(T x) {
 {*x} -> C3<int> const&;
};
```

The *compound-requirement* requires that `*x` be deduced as an argument for the invented function:

```
template<C3<int> X> void f(X const&);
```

In this case, deduction only succeeds if an expression of the type deduced for X can be compared to an `int` with the `==` operator.

```
template<typename T> concept C5 =
 requires(T x) {
 {g(x)} noexcept;
 };
```

The *compound-requirement* in C5 requires that `g(x)` is a valid expression and that `g(x)` is non-throwing. — end example]

## 8.4.7.4 Nested requirements

[expr.prim.req.nested]

*nested-requirement:*`requires constraint-expression ;`

<sup>1</sup> A *nested-requirement* can be used to specify additional constraints in terms of local parameters. The *constraint-expression* shall be satisfied (17.4.2) by the substituted template arguments, if any. Substitution of

template arguments into a *nested-requirement* does not result in substitution into the *constraint-expression* other than as specified in 17.4.2. [Example:

```
template<typename U> concept C = sizeof(U) == 1;

template<typename T> concept D = requires (T t) {
 requires C<decltype (+t)>;
};
```

D<T> is satisfied if `sizeof(decltype (+t)) == 1` (17.4.1.2). — end example]

- <sup>2</sup> A local parameter shall only appear as an unevaluated operand (8.2) within the *constraint-expression*. [Example:

```
template<typename T> concept C = requires (T a) {
 requires sizeof(a) == 4; // OK
 requires a == 0; // error: evaluation of a constraint variable
}
```

— end example]

## 8.5 Compound expressions

[expr.compound]

### 8.5.1 Postfix expressions

[expr.post]

- <sup>1</sup> Postfix expressions group left-to-right.

*postfix-expression*:

```
primary-expression
postfix-expression [expr-or-braced-init-list]
postfix-expression (expression-listopt)
simple-type-specifier (expression-listopt)
typename-specifier (expression-listopt)
simple-type-specifier braced-init-list
typename-specifier braced-init-list
postfix-expression . templateopt id-expression
postfix-expression -> templateopt id-expression
postfix-expression . pseudo-destructor-name
postfix-expression -> pseudo-destructor-name
postfix-expression ++
postfix-expression --
dynamic_cast < type-id > (expression)
static_cast < type-id > (expression)
reinterpret_cast < type-id > (expression)
const_cast < type-id > (expression)
typeid (expression)
typeid (type-id)
```

*expression-list*:

*initializer-list*

*pseudo-destructor-name*:

```
nested-name-specifieropt type-name :: ~ type-name
nested-name-specifier template simple-template-id :: ~ type-name
~ type-name
~ decltype-specifier
```

- <sup>2</sup> [Note: The > token following the *type-id* in a `dynamic_cast`, `static_cast`, `reinterpret_cast`, or `const_cast` may be the product of replacing a >> token by two consecutive > tokens (17.2). — end note]

#### 8.5.1.1 Subscripting

[expr.sub]

- <sup>1</sup> A postfix expression followed by an expression in square brackets is a postfix expression. One of the expressions shall be a glvalue of type “array of T” or a prvalue of type “pointer to T” and the other shall be a prvalue of unscoped enumeration or integral type. The result is of type “T”. The type “T” shall be a completely-defined object type.<sup>66</sup> The expression `E1[E2]` is identical (by definition) to `*((E1)+(E2))`, except that in the case of an array operand, the result is an lvalue if that operand is an lvalue and an xvalue otherwise. The expression E1 is sequenced before the expression E2.

<sup>66</sup>) This is true even if the subscript operator is used in the following common idiom: `&x[0]`.

- <sup>2</sup> [Note: Despite its asymmetric appearance, subscripting is a commutative operation except for sequencing. See 8.5.2 and 8.5.6 for details of \* and + and 11.3.4 for details of array types. — end note]
- <sup>3</sup> A *braced-init-list* shall not be used with the built-in subscript operator.

### 8.5.1.2 Function call

[**expr.call**]

- <sup>1</sup> A function call is a postfix expression followed by parentheses containing a possibly empty, comma-separated list of *initializer-clauses* which constitute the arguments to the function. The postfix expression shall have function type or function pointer type. For a call to a non-member function or to a static member function, the postfix expression shall be either an lvalue that refers to a function (in which case the function-to-pointer standard conversion (7.3) is suppressed on the postfix expression), or it shall have function pointer type.
- <sup>2</sup> For a call to a non-static member function, the postfix expression shall be an implicit (12.2.2, 12.2.3) or explicit class member access (8.5.1.5) whose *id-expression* is a function member name, or a pointer-to-member expression (8.5.4) selecting a function member; the call is as a member of the class object referred to by the object expression. In the case of an implicit class member access, the implied object is the one pointed to by **this**. [Note: A member function call of the form `f()` is interpreted as `(*this).f()` (see 12.2.2). — end note]
- <sup>3</sup> If a function or member function name is used, the appropriate function and the validity of the call are determined according to the rules in 16.3. If the selected function is non-virtual, or if the *id-expression* in the class member access expression is a *qualified-id*, that function is called. Otherwise, its final overrider (13.3) in the dynamic type of the object expression is called; such a call is referred to as a *virtual function call*. [Note: The dynamic type is the type of the object referred to by the current value of the object expression. 15.7 describes the behavior of virtual function calls when the object expression refers to an object under construction or destruction. — end note]
- <sup>4</sup> [Note: If a function or member function name is used, and name lookup (6.4) does not find a declaration of that name, the program is ill-formed. No function is implicitly declared by such a call. — end note]
- <sup>5</sup> If the *postfix-expression* designates a destructor (15.4), the type of the function call expression is **void**; otherwise, the type of the function call expression is the return type of the statically chosen function (i.e., ignoring the **virtual** keyword), even if the type of the function actually called is different. This return type shall be an object type, a reference type or *cv void*.
- <sup>6</sup> Calling a function through an expression whose function type is different from the function type of the called function's definition results in undefined behavior (10.5).
- <sup>7</sup> When a function is called, each parameter (11.3.5) is initialized (11.6, 15.8, 15.1) with its corresponding argument. If there is no corresponding argument, the default argument for the parameter is used; the program is ill-formed if one is not present. [Example:

```
template<typename ...T> int f(int n = 0, T ...t);
int x = f<int>(); // error: no argument for second function parameter
```

— end example] If the function is a non-static member function, the **this** parameter of the function (12.2.2.1) is initialized with a pointer to the object of the call, converted as if by an explicit type conversion (8.5.3). [Note: There is no access or ambiguity checking on this conversion; the access checking and disambiguation are done as part of the (possibly implicit) class member access operator. See 13.2, 14.2, and 8.5.1.5. — end note] When a function is called, the type of any parameter shall not be a class type that is either incomplete or abstract. [Note: This still allows a parameter to be a pointer or reference to such a type. However, it prevents a passed-by-value parameter to have an incomplete or abstract class type. — end note] It is implementation-defined whether the lifetime of a parameter ends when the function in which it is defined returns or at the end of the enclosing full-expression. The initialization and destruction of each parameter occurs within the context of the calling function. [Example: The access of the constructor, conversion functions or destructor is checked at the point of call in the calling function. If a constructor or destructor for a function parameter throws an exception, the search for a handler starts in the scope of the calling function; in particular, if the function called has a *function-try-block* (Clause 18) with a handler that could handle the exception, this handler is not considered. — end example]

- <sup>8</sup> The *postfix-expression* is sequenced before each *expression* in the *expression-list* and any default argument. The initialization of a parameter, including every associated value computation and side effect, is indeterminately sequenced with respect to that of any other parameter. [Note: All side effects of argument evaluations are sequenced before the function is entered (see 6.8.1). — end note] [Example:

```

void f() {
 std::string s = "but I have heard it works even if you don't believe in it";
 s.replace(0, 4, "").replace(s.find("even"), 4, "only").replace(s.find(" don't"), 6, "");
 assert(s == "I have heard it works only if you believe in it"); // OK
}

```

— *end example*] [Note: If an operator function is invoked using operator notation, argument evaluation is sequenced as specified for the built-in operator; see 16.3.1.2. — *end note*] [Example:

```

struct S {
 S(int);
};
int operator<<(S, int);
int i, j;
int x = S(i=1) << (i=2);
int y = operator<<(S(j=1), j=2);

```

After performing the initializations, the value of `i` is 2 (see 8.5.7), but it is unspecified whether the value of `j` is 1 or 2. — *end example*]

- 9 The result of a function call is the result of the operand of the evaluated `return` statement (9.6.3) in the called function (if any), except in a virtual function call if the return type of the final overrider is different from the return type of the statically chosen function, the value returned from the final overrider is converted to the return type of the statically chosen function.
- 10 [Note: A function can change the values of its non-const parameters, but these changes cannot affect the values of the arguments except where a parameter is of a reference type (11.3.2); if the reference is to a const-qualified type, `const_cast` is required to be used to cast away the constness in order to modify the argument's value. Where a parameter is of `const` reference type a temporary object is introduced if needed (10.1.7, 5.13, 5.13.5, 11.3.4, 15.2). In addition, it is possible to modify the values of non-constant objects through pointer parameters. — *end note*]
- 11 A function can be declared to accept fewer arguments (by declaring default arguments (11.3.6)) or more arguments (by using the ellipsis, `...`, or a function parameter pack (11.3.5)) than the number of parameters in the function definition (11.4). [Note: This implies that, except where the ellipsis (`...`) or a function parameter pack is used, a parameter is available for each argument. — *end note*]
- 12 When there is no parameter for a given argument, the argument is passed in such a way that the receiving function can obtain the value of the argument by invoking `va_arg` (21.12). [Note: This paragraph does not apply to arguments passed to a function parameter pack. Function parameter packs are expanded during template instantiation (17.6.3), thus each such argument has a corresponding parameter when a function template specialization is actually called. — *end note*] The lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the argument expression. An argument that has type `cv std::nullptr_t` is converted to type `void*` (7.11). After these conversions, if the argument does not have arithmetic, enumeration, pointer, pointer-to-member, or class type, the program is ill-formed. Passing a potentially-evaluated argument of class type (Clause 12) having a non-trivial copy constructor, a non-trivial move constructor, or a non-trivial destructor, with no corresponding parameter, is conditionally-supported with implementation-defined semantics. If the argument has integral or enumeration type that is subject to the integral promotions (7.6), or a floating-point type that is subject to the floating-point promotion (7.7), the value of the argument is converted to the promoted type before the call. These promotions are referred to as the *default argument promotions*.
- 13 Recursive calls are permitted, except to the `main` function (6.8.3.1).
- 14 A function call is an lvalue if the result type is an lvalue reference type or an rvalue reference to function type, an xvalue if the result type is an rvalue reference to object type, and a prvalue otherwise.

### 8.5.1.3 Explicit type conversion (functional notation) [expr.type.conv]

- 1 A *simple-type-specifier* (10.1.7.2) or *typename-specifier* (17.7) followed by a parenthesized optional *expression-list* or by a *braced-init-list* (the initializer) constructs a value of the specified type given the initializer. If the type is a placeholder for a deduced class type, it is replaced by the return type of the function selected by overload resolution for class template deduction (16.3.1.8) for the remainder of this subclause.
- 2 If the initializer is a parenthesized single expression, the type conversion expression is equivalent to the corresponding cast expression (8.5.3). Otherwise, if the type is `cv void` and the initializer is `()` or `{}` (after pack expansion, if any), the expression is a prvalue of the specified type that performs no initialization.

Otherwise, the expression is a prvalue of the specified type whose result object is direct-initialized (11.6) with the initializer. If the initializer is a parenthesized optional *expression-list*, the specified type shall not be an array type.

#### 8.5.1.4 Pseudo destructor call [expr.pseudo]

- <sup>1</sup> The use of a *pseudo-destructor-name* after a dot `.` or arrow `->` operator represents the destructor for the non-class type denoted by *type-name* or *decltype-specifier*. The result shall only be used as the operand for the function call operator `()`, and the result of such a call has type `void`. The only effect is the evaluation of the *postfix-expression* before the dot or arrow.
- <sup>2</sup> The left-hand side of the dot operator shall be of scalar type. The left-hand side of the arrow operator shall be of pointer to scalar type. This scalar type is the object type. The cv-unqualified versions of the object type and of the type designated by the *pseudo-destructor-name* shall be the same type. Furthermore, the two *type-names* in a *pseudo-destructor-name* of the form

$$\textit{nested-name-specifier}_{opt} \textit{type-name} :: \sim \textit{type-name}$$

shall designate the same scalar type (ignoring cv-qualification).

#### 8.5.1.5 Class member access [expr.ref]

- <sup>1</sup> A postfix expression followed by a dot `.` or an arrow `->`, optionally followed by the keyword `template` (17.2), and then followed by an *id-expression*, is a postfix expression. The postfix expression before the dot or arrow is evaluated;<sup>67</sup> the result of that evaluation, together with the *id-expression*, determines the result of the entire postfix expression.
- <sup>2</sup> For the first option (dot) the first expression shall be a glvalue having class type. For the second option (arrow) the first expression shall be a prvalue having pointer to class type. In both cases, the class type shall be complete unless the class member access appears in the definition of that class. [Note: If the class is incomplete, lookup in the complete class type is required to refer to the same declaration (6.3.7). — *end note*] The expression `E1->E2` is converted to the equivalent form `*(E1).E2`; the remainder of 8.5.1.5 will address only the first option (dot).<sup>68</sup> In either case, the *id-expression* shall name a member of the class or of one of its base classes. [Note: Because the name of a class is inserted in its class scope (Clause 12), the name of a class is also considered a nested member of that class. — *end note*] [Note: 6.4.5 describes how names are looked up after the `.` and `->` operators. — *end note*]
- <sup>3</sup> Abbreviating *postfix-expression.id-expression* as `E1.E2`, `E1` is called the *object expression*. If `E2` is a bit-field, `E1.E2` is a bit-field. The type and value category of `E1.E2` are determined as follows. In the remainder of 8.5.1.5, *cq* represents either `const` or the absence of `const` and *vq* represents either `volatile` or the absence of `volatile`. *cv* represents an arbitrary set of cv-qualifiers, as defined in 6.7.3.
- <sup>4</sup> If `E2` is declared to have type “reference to T”, then `E1.E2` is an lvalue; the type of `E1.E2` is T. Otherwise, one of the following rules applies.
  - (4.1) — If `E2` is a static data member and the type of `E2` is T, then `E1.E2` is an lvalue; the expression designates the named member of the class. The type of `E1.E2` is T.
  - (4.2) — If `E2` is a non-static data member and the type of `E1` is “*cq1 vq1 X*”, and the type of `E2` is “*cq2 vq2 T*”, the expression designates the named member of the object designated by the first expression. If `E1` is an lvalue, then `E1.E2` is an lvalue; otherwise `E1.E2` is an xvalue. Let the notation *vq12* stand for the “union” of *vq1* and *vq2*; that is, if *vq1* or *vq2* is `volatile`, then *vq12* is `volatile`. Similarly, let the notation *cq12* stand for the “union” of *cq1* and *cq2*; that is, if *cq1* or *cq2* is `const`, then *cq12* is `const`. If `E2` is declared to be a `mutable` member, then the type of `E1.E2` is “*vq12 T*”. If `E2` is not declared to be a `mutable` member, then the type of `E1.E2` is “*cq12 vq12 T*”.
  - (4.3) — If `E2` is a (possibly overloaded) member function, function overload resolution (16.3) is used to determine whether `E1.E2` refers to a static or a non-static member function.
    - (4.3.1) — If it refers to a static member function and the type of `E2` is “function of parameter-type-list returning T”, then `E1.E2` is an lvalue; the expression designates the static member function. The type of `E1.E2` is the same type as that of `E2`, namely “function of parameter-type-list returning T”.

<sup>67</sup>) If the class member access expression is evaluated, the subexpression evaluation happens even if the result is unnecessary to determine the value of the entire postfix expression, for example if the *id-expression* denotes a static member.

<sup>68</sup>) Note that `*(E1)` is an lvalue.

- (4.3.2) — Otherwise, if `E1.E2` refers to a non-static member function and the type of `E2` is “function of parameter-type-list *cv ref-qualifier<sub>opt</sub>* returning `T`”, then `E1.E2` is a prvalue. The expression designates a non-static member function. The expression can be used only as the left-hand operand of a member function call (12.2.1). [Note: Any redundant set of parentheses surrounding the expression is ignored (8.4.3). — end note] The type of `E1.E2` is “function of parameter-type-list *cv* returning `T`”.
- (4.4) — If `E2` is a nested type, the expression `E1.E2` is ill-formed.
- (4.5) — If `E2` is a member enumerator and the type of `E2` is `T`, the expression `E1.E2` is a prvalue. The type of `E1.E2` is `T`.
- 5 If `E2` is a non-static data member or a non-static member function, the program is ill-formed if the class of which `E2` is directly a member is an ambiguous base (13.2) of the naming class (14.2) of `E2`. [Note: The program is also ill-formed if the naming class is an ambiguous base of the class type of the object expression; see 14.2. — end note]

### 8.5.1.6 Increment and decrement

[`expr.post.incr`]

- 1 The value of a postfix `++` expression is the value of its operand. [Note: The value obtained is a copy of the original value — end note] The operand shall be a modifiable lvalue. The type of the operand shall be an arithmetic type other than *cv bool*, or a pointer to a complete object type. The value of the operand object is modified by adding 1 to it. The value computation of the `++` expression is sequenced before the modification of the operand object. With respect to an indeterminately-sequenced function call, the operation of postfix `++` is a single evaluation. [Note: Therefore, a function call shall not intervene between the lvalue-to-rvalue conversion and the side effect associated with any single postfix `++` operator. — end note] The result is a prvalue. The type of the result is the *cv*-unqualified version of the type of the operand. If the operand is a bit-field that cannot represent the incremented value, the resulting value of the bit-field is implementation-defined. See also 8.5.6 and 8.5.18.
- 2 The operand of postfix `--` is decremented analogously to the postfix `++` operator. [Note: For prefix increment and decrement, see 8.5.2.2. — end note]

### 8.5.1.7 Dynamic cast

[`expr.dynamic.cast`]

- 1 The result of the expression `dynamic_cast<T>(v)` is the result of converting the expression `v` to type `T`. `T` shall be a pointer or reference to a complete class type, or “pointer to *cv void*”. The `dynamic_cast` operator shall not cast away constness (8.5.1.11).
- 2 If `T` is a pointer type, `v` shall be a prvalue of a pointer to complete class type, and the result is a prvalue of type `T`. If `T` is an lvalue reference type, `v` shall be an lvalue of a complete class type, and the result is an lvalue of the type referred to by `T`. If `T` is an rvalue reference type, `v` shall be a glvalue having a complete class type, and the result is an xvalue of the type referred to by `T`.
- 3 If the type of `v` is the same as `T` (ignoring *cv*-qualifications), the result is `v` (converted if necessary).
- 4 If the value of `v` is a null pointer value in the pointer case, the result is the null pointer value of type `T`.
- 5 If `T` is “pointer to *cv1 B*” and `v` has type “pointer to *cv2 D*” such that `B` is a base class of `D`, the result is a pointer to the unique `B` subobject of the `D` object pointed to by `v`. Similarly, if `T` is “reference to *cv1 B*” and `v` has type *cv2 D* such that `B` is a base class of `D`, the result is the unique `B` subobject of the `D` object referred to by `v`.<sup>69</sup> In both the pointer and reference cases, the program is ill-formed if `B` is an inaccessible or ambiguous base class of `D`. [Example:

```
struct B { };
struct D : B { };
void foo(D* dp) {
 B* bp = dynamic_cast<B*>(dp); // equivalent to B* bp = dp;
}
```

— end example]

- 6 Otherwise, `v` shall be a pointer to or a glvalue of a polymorphic type (13.3).
- 7 If `T` is “pointer to *cv void*”, then the result is a pointer to the most derived object pointed to by `v`. Otherwise, a runtime check is applied to see if the object pointed or referred to by `v` can be converted to the type pointed or referred to by `T`.

<sup>69</sup> The most derived object (6.6.2) pointed or referred to by `v` can contain other `B` objects as base classes, but these are ignored.

- 8 If *C* is the class type to which *T* points or refers, the runtime check logically executes as follows:
- (8.1) — If, in the most derived object pointed (referred) to by *v*, *v* points (refers) to a public base class subobject of a *C* object, and if only one object of type *C* is derived from the subobject pointed (referred) to by *v* the result points (refers) to that *C* object.
  - (8.2) — Otherwise, if *v* points (refers) to a public base class subobject of the most derived object, and the type of the most derived object has a base class, of type *C*, that is unambiguous and public, the result points (refers) to the *C* subobject of the most derived object.
  - (8.3) — Otherwise, the runtime check *fails*.
- 9 The value of a failed cast to pointer type is the null pointer value of the required result type. A failed cast to reference type throws an exception (18.1) of a type that would match a handler (18.3) of type `std::bad_cast` (21.7.3).

[Example:

```
class A { virtual void f(); };
class B { virtual void g(); };
class D : public virtual A, private B { };
void g() {
 D d;
 B* bp = (B*)&d; // cast needed to break protection
 A* ap = &d; // public derivation, no cast needed
 D& dr = dynamic_cast<D&>(*bp); // fails
 ap = dynamic_cast<A*>(bp); // fails
 bp = dynamic_cast<B*>(ap); // fails
 ap = dynamic_cast<A*>(&d); // succeeds
 bp = dynamic_cast<B*>(&d); // ill-formed (not a runtime check)
}

class E : public D, public B { };
class F : public E, public D { };
void h() {
 F f;
 A* ap = &f; // succeeds: finds unique A
 D* dp = dynamic_cast<D*>(ap); // fails: yields null; f has two D subobjects
 E* ep = (E*)ap; // ill-formed: cast from virtual base
 E* ep1 = dynamic_cast<E*>(ap); // succeeds
}

```

— end example] [Note: 15.7 describes the behavior of a `dynamic_cast` applied to an object under construction or destruction. — end note]

### 8.5.1.8 Type identification

[`expr.typeid`]

- 1 The result of a `typeid` expression is an lvalue of static type `const std::type_info` (21.7.2) and dynamic type `const std::type_info` or `const name` where *name* is an implementation-defined class publicly derived from `std::type_info` which preserves the behavior described in 21.7.2.<sup>70</sup> The lifetime of the object referred to by the lvalue extends to the end of the program. Whether or not the destructor is called for the `std::type_info` object at the end of the program is unspecified.
- 2 When `typeid` is applied to a glvalue whose type is a polymorphic class type (13.3), the result refers to a `std::type_info` object representing the type of the most derived object (6.6.2) (that is, the dynamic type) to which the glvalue refers. If the glvalue is obtained by applying the unary `*` operator to a pointer<sup>71</sup> and the pointer is a null pointer value (7.11), the `typeid` expression throws an exception (18.1) of a type that would match a handler of type `std::bad_typeid` exception (21.7.4).
- 3 When `typeid` is applied to an expression other than a glvalue of a polymorphic class type, the result refers to a `std::type_info` object representing the static type of the expression. Lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) conversions are not applied to the expression. If the expression is a prvalue, the temporary materialization conversion (7.4) is applied. The expression is an unevaluated operand (8.2).

<sup>70</sup>) The recommended name for such a class is `extended_type_info`.

<sup>71</sup>) If *p* is an expression of pointer type, then `*p`, `(*p)`, `*(p)`, `((*p))`, `*((p))`, and so on all meet this requirement.



- 4 When `typeid` is applied to a *type-id*, the result refers to a `std::type_info` object representing the type of the *type-id*. If the type of the *type-id* is a reference to a possibly cv-qualified type, the result of the `typeid` expression refers to a `std::type_info` object representing the cv-unqualified referenced type. If the type of the *type-id* is a class type or a reference to a class type, the class shall be completely-defined.
- 5 If the type of the expression or *type-id* is a cv-qualified type, the result of the `typeid` expression refers to a `std::type_info` object representing the cv-unqualified type. [Example:

```
class D { /* ... */ };
D d1;
const D d2;

typeid(d1) == typeid(d2); // yields true
typeid(D) == typeid(const D); // yields true
typeid(D) == typeid(d2); // yields true
typeid(D) == typeid(const D&); // yields true
```

— end example]

- 6 If the header `<typeinfo>` (21.7.2) is not included prior to a use of `typeid`, the program is ill-formed.
- 7 [Note: 15.7 describes the behavior of `typeid` applied to an object under construction or destruction. — end note]

### 8.5.1.9 Static cast

[`expr.static.cast`]

- 1 The result of the expression `static_cast<T>(v)` is the result of converting the expression `v` to type `T`. If `T` is an lvalue reference type or an rvalue reference to function type, the result is an lvalue; if `T` is an rvalue reference to object type, the result is an xvalue; otherwise, the result is a prvalue. The `static_cast` operator shall not cast away constness (8.5.1.11).
- 2 An lvalue of type “*cv1* B”, where B is a class type, can be cast to type “reference to *cv2* D”, where D is a class derived (Clause 13) from B, if *cv2* is the same cv-qualification as, or greater cv-qualification than, *cv1*. If B is a virtual base class of D or a base class of a virtual base class of D, or if no valid standard conversion from “pointer to D” to “pointer to B” exists (7.11), the program is ill-formed. An xvalue of type “*cv1* B” can be cast to type “rvalue reference to *cv2* D” with the same constraints as for an lvalue of type “*cv1* B”. If the object of type “*cv1* B” is actually a base class subobject of an object of type D, the result refers to the enclosing object of type D. Otherwise, the behavior is undefined. [Example:

```
struct B { };
struct D : public B { };
D d;
B &br = d;

static_cast<D&>(br); // produces lvalue to the original d object
```

— end example]

- 3 An lvalue of type “*cv1* T1” can be cast to type “rvalue reference to *cv2* T2” if “*cv2* T2” is reference-compatible with “*cv1* T1” (11.6.3). If the value is not a bit-field, the result refers to the object or the specified base class subobject thereof; otherwise, the lvalue-to-rvalue conversion (7.1) is applied to the bit-field and the resulting prvalue is used as the *expression* of the `static_cast` for the remainder of this subclause. If T2 is an inaccessible (Clause 14) or ambiguous (13.2) base class of T1, a program that necessitates such a cast is ill-formed.
- 4 An expression `e` can be explicitly converted to a type `T` if there is an implicit conversion sequence (16.3.3.1) from `e` to `T`, or if overload resolution for a direct-initialization (11.6) of an object or reference of type `T` from `e` would find at least one viable function (16.3.2). If `T` is a reference type, the effect is the same as performing the declaration and initialization

```
T t(e);
```

for some invented temporary variable `t` (11.6) and then using the temporary variable as the result of the conversion. Otherwise, the result object is direct-initialized from `e`. [Note: The conversion is ill-formed when attempting to convert an expression of class type to an inaccessible or ambiguous base class. — end note]

- 5 Otherwise, the `static_cast` shall perform one of the conversions listed below. No other conversion shall be performed explicitly using a `static_cast`.

<sup>6</sup> Any expression can be explicitly converted to type *cv void*, in which case it becomes a discarded-value expression (8.2). [Note: However, if the value is in a temporary object (15.2), the destructor for that object is not executed until the usual time, and the value of the object is preserved for the purpose of executing the destructor. — end note]

<sup>7</sup> The inverse of any standard conversion sequence (Clause 7) not containing an lvalue-to-rvalue (7.1), array-to-pointer (7.2), function-to-pointer (7.3), null pointer (7.11), null member pointer (7.12), boolean (7.14), or function pointer (7.13) conversion, can be performed explicitly using `static_cast`. A program is ill-formed if it uses `static_cast` to perform the inverse of an ill-formed standard conversion sequence. [Example:

```
struct B { };
struct D : private B { };
void f() {
 static_cast<D*>((B*)0); // error: B is a private base of D
 static_cast<int B::*>((int D::*)0); // error: B is a private base of D
}
```

— end example]

<sup>8</sup> The lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) conversions are applied to the operand. Such a `static_cast` is subject to the restriction that the explicit conversion does not cast away constness (8.5.1.11), and the following additional rules for specific cases:

<sup>9</sup> A value of a scoped enumeration type (10.2) can be explicitly converted to an integral type. When that type is *cv bool*, the resulting value is `false` if the original value is zero and `true` for all other values. For the remaining integral types, the value is unchanged if the original value can be represented by the specified type. Otherwise, the resulting value is unspecified. A value of a scoped enumeration type can also be explicitly converted to a floating-point type; the result is the same as that of converting from the original value to the floating-point type.

<sup>10</sup> A value of integral or enumeration type can be explicitly converted to a complete enumeration type. If the enumeration type has a fixed underlying type, the value is first converted to that type by integral conversion, if necessary, and then to the enumeration type. If the enumeration type does not have a fixed underlying type, the value is unchanged if the original value is within the range of the enumeration values (10.2), and otherwise, the behavior is undefined. A value of floating-point type can also be explicitly converted to an enumeration type. The resulting value is the same as converting the original value to the underlying type of the enumeration (7.10), and subsequently to the enumeration type.

<sup>11</sup> A prvalue of type “pointer to *cv1 B*”, where B is a class type, can be converted to a prvalue of type “pointer to *cv2 D*”, where D is a class derived (Clause 13) from B, if *cv2* is the same cv-qualification as, or greater cv-qualification than, *cv1*. If B is a virtual base class of D or a base class of a virtual base class of D, or if no valid standard conversion from “pointer to D” to “pointer to B” exists (7.11), the program is ill-formed. The null pointer value (7.11) is converted to the null pointer value of the destination type. If the prvalue of type “pointer to *cv1 B*” points to a B that is actually a subobject of an object of type D, the resulting pointer points to the enclosing object of type D. Otherwise, the behavior is undefined.

<sup>12</sup> A prvalue of type “pointer to member of D of type *cv1 T*” can be converted to a prvalue of type “pointer to member of B of type *cv2 T*”, where B is a base class (Clause 13) of D, if *cv2* is the same cv-qualification as, or greater cv-qualification than, *cv1*.<sup>72</sup> If no valid standard conversion from “pointer to member of B of type T” to “pointer to member of D of type T” exists (7.12), the program is ill-formed. The null member pointer value (7.12) is converted to the null member pointer value of the destination type. If class B contains the original member, or is a base or derived class of the class containing the original member, the resulting pointer to member points to the original member. Otherwise, the behavior is undefined. [Note: Although class B need not contain the original member, the dynamic type of the object with which indirection through the pointer to member is performed must contain the original member; see 8.5.4. — end note]

<sup>13</sup> A prvalue of type “pointer to *cv1 void*” can be converted to a prvalue of type “pointer to *cv2 T*”, where T is an object type and *cv2* is the same cv-qualification as, or greater cv-qualification than, *cv1*. If the original pointer value represents the address A of a byte in memory and A does not satisfy the alignment requirement of T, then the resulting pointer value is unspecified. Otherwise, if the original pointer value points to an object a, and there is an object b of type T (ignoring cv-qualification) that is pointer-interconvertible (6.7.2) with a, the result is a pointer to b. Otherwise, the pointer value is unchanged by the conversion. [Example:

```
T* p1 = new T;
```

<sup>72</sup> Function types (including those used in pointer-to-member-function types) are never cv-qualified; see 11.3.5.

```
const T* p2 = static_cast<const T*>(static_cast<void*>(p1));
bool b = p1 == p2; // b will have the value true.
```

— end example]

### 8.5.1.10 Reinterpret cast

[`expr.reinterpret.cast`]

- 1 The result of the expression `reinterpret_cast<T>(v)` is the result of converting the expression `v` to type `T`. If `T` is an lvalue reference type or an rvalue reference to function type, the result is an lvalue; if `T` is an rvalue reference to object type, the result is an xvalue; otherwise, the result is a prvalue and the lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the expression `v`. Conversions that can be performed explicitly using `reinterpret_cast` are listed below. No other conversion can be performed explicitly using `reinterpret_cast`.
- 2 The `reinterpret_cast` operator shall not cast away constness (8.5.1.11). An expression of integral, enumeration, pointer, or pointer-to-member type can be explicitly converted to its own type; such a cast yields the value of its operand.
- 3 [Note: The mapping performed by `reinterpret_cast` might, or might not, produce a representation different from the original value. — end note]
- 4 A pointer can be explicitly converted to any integral type large enough to hold all values of its type. The mapping function is implementation-defined. [Note: It is intended to be unsurprising to those who know the addressing structure of the underlying machine. — end note] A value of type `std::nullptr_t` can be converted to an integral type; the conversion has the same meaning and validity as a conversion of `(void*)0` to the integral type. [Note: A `reinterpret_cast` cannot be used to convert a value of any type to the type `std::nullptr_t`. — end note]
- 5 A value of integral type or enumeration type can be explicitly converted to a pointer. A pointer converted to an integer of sufficient size (if any such exists on the implementation) and back to the same pointer type will have its original value; mappings between pointers and integers are otherwise implementation-defined. [Note: Except as described in 6.6.4.4.3, the result of such a conversion will not be a safely-derived pointer value. — end note]
- 6 A function pointer can be explicitly converted to a function pointer of a different type. [Note: The effect of calling a function through a pointer to a function type (11.3.5) that is not the same as the type used in the definition of the function is undefined. — end note] Except that converting a prvalue of type “pointer to `T1`” to the type “pointer to `T2`” (where `T1` and `T2` are function types) and back to its original type yields the original pointer value, the result of such a pointer conversion is unspecified. [Note: See also 7.11 for more details of pointer conversions. — end note]
- 7 An object pointer can be explicitly converted to an object pointer of a different type.<sup>73</sup> When a prvalue `v` of object pointer type is converted to the object pointer type “pointer to `cv T`”, the result is `static_cast<cv T*>(static_cast<cv void*>(v))`. [Note: Converting a prvalue of type “pointer to `T1`” to the type “pointer to `T2`” (where `T1` and `T2` are object types and where the alignment requirements of `T2` are no stricter than those of `T1`) and back to its original type yields the original pointer value. — end note]
- 8 Converting a function pointer to an object pointer type or vice versa is conditionally-supported. The meaning of such a conversion is implementation-defined, except that if an implementation supports conversions in both directions, converting a prvalue of one type to the other type and back, possibly with different `cv`-qualification, shall yield the original pointer value.
- 9 The null pointer value (7.11) is converted to the null pointer value of the destination type. [Note: A null pointer constant of type `std::nullptr_t` cannot be converted to a pointer type, and a null pointer constant of integral type is not necessarily converted to a null pointer value. — end note]
- 10 A prvalue of type “pointer to member of `X` of type `T1`” can be explicitly converted to a prvalue of a different type “pointer to member of `Y` of type `T2`” if `T1` and `T2` are both function types or both object types.<sup>74</sup> The null member pointer value (7.12) is converted to the null member pointer value of the destination type. The result of this conversion is unspecified, except in the following cases:
  - (10.1) — converting a prvalue of type “pointer to member function” to a different pointer-to-member-function type and back to its original type yields the original pointer-to-member value.

<sup>73</sup>) The types may have different `cv`-qualifiers, subject to the overall restriction that a `reinterpret_cast` cannot cast away constness.

<sup>74</sup>) `T1` and `T2` may have different `cv`-qualifiers, subject to the overall restriction that a `reinterpret_cast` cannot cast away constness.

(10.2) — converting a prvalue of type “pointer to data member of X of type T1” to the type “pointer to data member of Y of type T2” (where the alignment requirements of T2 are no stricter than those of T1) and back to its original type yields the original pointer-to-member value.

<sup>11</sup> A glvalue of type T1, designating an object *x*, can be cast to the type “reference to T2” if an expression of type “pointer to T1” can be explicitly converted to the type “pointer to T2” using a `reinterpret_cast`. The result is that of `*reinterpret_cast<T2 *>(p)` where *p* is a pointer to *x* of type “pointer to T1”. No temporary is created, no copy is made, and no constructors (15.1) or conversion functions (15.3) are called.<sup>75</sup>

### 8.5.1.11 Const cast

[**expr.const.cast**]

<sup>1</sup> The result of the expression `const_cast<T>(v)` is of type T. If T is an lvalue reference to object type, the result is an lvalue; if T is an rvalue reference to object type, the result is an xvalue; otherwise, the result is a prvalue and the lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the expression *v*. Conversions that can be performed explicitly using `const_cast` are listed below. No other conversion shall be performed explicitly using `const_cast`.

<sup>2</sup> [Note: Subject to the restrictions in this subclause, an expression may be cast to its own type using a `const_cast` operator. — end note]

<sup>3</sup> For two similar types T1 and T2 (7.5), a prvalue of type T1 may be explicitly converted to the type T2 using a `const_cast`. The result of a `const_cast` refers to the original entity. [Example:

```
typedef int *A[3]; // array of 3 pointer to int
typedef const int *const CA[3]; // array of 3 const pointer to const int

CA &&r = A{}; // OK, reference binds to temporary array object after qualification conversion to type CA
A &&r1 = const_cast<A>(CA{}); // error: temporary array decayed to pointer
A &&r2 = const_cast<A&&>(CA{}); // OK
```

— end example]

<sup>4</sup> For two object types T1 and T2, if a pointer to T1 can be explicitly converted to the type “pointer to T2” using a `const_cast`, then the following conversions can also be made:

- (4.1) — an lvalue of type T1 can be explicitly converted to an lvalue of type T2 using the cast `const_cast<T2&&>`;
- (4.2) — a glvalue of type T1 can be explicitly converted to an xvalue of type T2 using the cast `const_cast<T2&&>`; and
- (4.3) — if T1 is a class type, a prvalue of type T1 can be explicitly converted to an xvalue of type T2 using the cast `const_cast<T2&&>`.

The result of a reference `const_cast` refers to the original object if the operand is a glvalue and to the result of applying the temporary materialization conversion (7.4) otherwise.

<sup>5</sup> A null pointer value (7.11) is converted to the null pointer value of the destination type. The null member pointer value (7.12) is converted to the null member pointer value of the destination type.

<sup>6</sup> [Note: Depending on the type of the object, a write operation through the pointer, lvalue or pointer to data member resulting from a `const_cast` that casts away a const-qualifier<sup>76</sup> may produce undefined behavior (10.1.7.1). — end note]

<sup>7</sup> A conversion from a type T1 to a type T2 *casts away constness* if T1 and T2 are different, there is a cv-decomposition (7.5) of T1 yielding *n* such that T2 has a cv-decomposition of the form

$$cv_0^2 P_0^2 cv_1^2 P_1^2 \cdots cv_{n-1}^2 P_{n-1}^2 cv_n^2 U_2,$$

and there is no qualification conversion that converts T1 to

$$cv_0^2 P_0^1 cv_1^2 P_1^1 \cdots cv_{n-1}^2 P_{n-1}^1 cv_n^2 U_1.$$

<sup>8</sup> Casting from an lvalue of type T1 to an lvalue of type T2 using an lvalue reference cast or casting from an expression of type T1 to an xvalue of type T2 using an rvalue reference cast casts away constness if a cast from a prvalue of type “pointer to T1” to the type “pointer to T2” casts away constness.

<sup>9</sup> [Note: Some conversions which involve only changes in cv-qualification cannot be done using `const_cast`. For instance, conversions between pointers to functions are not covered because such conversions lead to values whose use causes undefined behavior. For the same reasons, conversions between pointers to member

<sup>75</sup>) This is sometimes referred to as a *type pun* when the result refers to the same object as the source glvalue.

<sup>76</sup>) `const_cast` is not limited to conversions that cast away a const-qualifier.

functions, and in particular, the conversion from a pointer to a const member function to a pointer to a non-const member function, are not covered. — *end note*]

## 8.5.2 Unary expressions

[expr.unary]

- <sup>1</sup> Expressions with unary operators group right-to-left.

*unary-expression*:  
*postfix-expression*  
 ++ *cast-expression*  
 -- *cast-expression*  
*unary-operator* *cast-expression*  
 sizeof *unary-expression*  
 sizeof ( *type-id* )  
 sizeof ... ( *identifier* )  
 alignof ( *type-id* )  
*noexcept-expression*  
*new-expression*  
*delete-expression*

*unary-operator*: one of  
 \* & + - ! ~

### 8.5.2.1 Unary operators

[expr.unary.op]

- <sup>1</sup> The unary \* operator performs *indirection*: the expression to which it is applied shall be a pointer to an object type, or a pointer to a function type and the result is an lvalue referring to the object or function to which the expression points. If the type of the expression is “pointer to T”, the type of the result is “T”. [Note: Indirection through a pointer to an incomplete type (other than *cv void*) is valid. The lvalue thus obtained can be used in limited ways (to initialize a reference, for example); this lvalue must not be converted to a prvalue, see 7.1. — *end note*]
- <sup>2</sup> The result of each of the following unary operators is a prvalue.
- <sup>3</sup> The result of the unary & operator is a pointer to its operand. The operand shall be an lvalue or a *qualified-id*. If the operand is a *qualified-id* naming a non-static or variant member *m* of some class *C* with type *T*, the result has type “pointer to member of class *C* of type *T*” and is a prvalue designating *C::m*. Otherwise, if the type of the expression is *T*, the result has type “pointer to *T*” and is a prvalue that is the address of the designated object (6.6.1) or a pointer to the designated function. [Note: In particular, the address of an object of type “*cv T*” is “pointer to *cv T*”, with the same *cv*-qualification. — *end note*] For purposes of pointer arithmetic (8.5.6) and comparison (8.5.9, 8.5.10), an object that is not an array element whose address is taken in this way is considered to belong to an array with one element of type *T*. [Example:

```
struct A { int i; };
struct B : A { };
... &B::i ... // has type int A::*
int a;
int* p1 = &a;
int* p2 = p1 + 1; // defined behavior
bool b = p2 > p1; // defined behavior, with value true
```

— *end example*] [Note: A pointer to member formed from a *mutable* non-static data member (10.1.1) does not reflect the *mutable* specifier associated with the non-static data member. — *end note*]

- <sup>4</sup> A pointer to member is only formed when an explicit & is used and its operand is a *qualified-id* not enclosed in parentheses. [Note: That is, the expression &(qualified-id), where the *qualified-id* is enclosed in parentheses, does not form an expression of type “pointer to member”. Neither does *qualified-id*, because there is no implicit conversion from a *qualified-id* for a non-static member function to the type “pointer to member function” as there is from an lvalue of function type to the type “pointer to function” (7.3). Nor is *&unqualified-id* a pointer to member, even within the scope of the *unqualified-id*’s class. — *end note*]
- <sup>5</sup> If & is applied to an lvalue of incomplete class type and the complete type declares *operator&()*, it is unspecified whether the operator has the built-in meaning or the operator function is called. The operand of & shall not be a bit-field.
- <sup>6</sup> The address of an overloaded function (Clause 16) can be taken only in a context that uniquely determines which version of the overloaded function is referred to (see 16.4). [Note: Since the context might determine

whether the operand is a static or non-static member function, the context can also affect whether the expression has type “pointer to function” or “pointer to member function”. — *end note*]

- 7 The operand of the unary + operator shall have arithmetic, unscoped enumeration, or pointer type and the result is the value of the argument. Integral promotion is performed on integral or enumeration operands. The type of the result is the type of the promoted operand.
- 8 The operand of the unary - operator shall have arithmetic or unscoped enumeration type and the result is the negation of its operand. Integral promotion is performed on integral or enumeration operands. The negative of an unsigned quantity is computed by subtracting its value from  $2^n$ , where  $n$  is the number of bits in the promoted operand. The type of the result is the type of the promoted operand.
- 9 The operand of the logical negation operator ! is contextually converted to `bool` (Clause 7); its value is `true` if the converted operand is `false` and `false` otherwise. The type of the result is `bool`.
- 10 The operand of ~ shall have integral or unscoped enumeration type; the result is the ones’ complement of its operand. Integral promotions are performed. The type of the result is the type of the promoted operand. There is an ambiguity in the grammar when ~ is followed by a *class-name* or *decltype-specifier*. The ambiguity is resolved by treating ~ as the unary complement operator rather than as the start of an *unqualified-id* naming a destructor. [Note: Because the grammar does not permit an operator to follow the ., ->, or :: tokens, a ~ followed by a *class-name* or *decltype-specifier* in a member access expression or *qualified-id* is unambiguously parsed as a destructor name. — *end note*]

### 8.5.2.2 Increment and decrement

[**expr.pre.incr**]

- 1 The operand of prefix ++ is modified by adding 1. The operand shall be a modifiable lvalue. The type of the operand shall be an arithmetic type other than *cv bool*, or a pointer to a completely-defined object type. The result is the updated operand; it is an lvalue, and it is a bit-field if the operand is a bit-field. The expression ++x is equivalent to x+=1. [Note: See the discussions of addition (8.5.6) and assignment operators (8.5.18) for information on conversions. — *end note*]
- 2 The operand of prefix -- is modified by subtracting 1. The requirements on the operand of prefix -- and the properties of its result are otherwise the same as those of prefix ++. [Note: For postfix increment and decrement, see 8.5.1.6. — *end note*]

### 8.5.2.3 Sizeof

[**expr.sizeof**]

- 1 The `sizeof` operator yields the number of bytes occupied by a non-potentially-overlapping object of the type of its operand. The operand is either an expression, which is an unevaluated operand (8.2), or a parenthesized *type-id*. The `sizeof` operator shall not be applied to an expression that has function or incomplete type, to the parenthesized name of such types, or to a glvalue that designates a bit-field. `sizeof(char)`, `sizeof(signed char)` and `sizeof(unsigned char)` are 1. The result of `sizeof` applied to any other fundamental type (6.7.1) is implementation-defined. [Note: In particular, `sizeof(bool)`, `sizeof(char16_t)`, `sizeof(char32_t)`, and `sizeof(wchar_t)` are implementation-defined.<sup>77</sup> — *end note*] [Note: See 6.6.1 for the definition of *byte* and 6.7 for the definition of *object representation*. — *end note*]
- 2 When applied to a reference or a reference type, the result is the size of the referenced type. When applied to a class, the result is the number of bytes in an object of that class including any padding required for placing objects of that type in an array. The result of applying `sizeof` to a potentially-overlapping subobject is the size of the type, not the size of the subobject.<sup>78</sup> When applied to an array, the result is the total number of bytes in the array. This implies that the size of an array of  $n$  elements is  $n$  times the size of an element.
- 3 The `sizeof` operator can be applied to a pointer to a function, but shall not be applied directly to a function.
- 4 The lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are not applied to the operand of `sizeof`. If the operand is a prvalue, the temporary materialization conversion (7.4) is applied.
- 5 The identifier in a `sizeof...` expression shall name a pack. The `sizeof...` operator yields the number of elements in the pack (17.6.3). A `sizeof...` expression is a pack expansion (17.6.3). [Example:

<sup>77</sup>) `sizeof(bool)` is not required to be 1.

<sup>78</sup>) The actual size of a potentially-overlapping subobject may be less than the result of applying `sizeof` to the subobject, due to virtual base classes and less strict padding requirements on potentially-overlapping subobjects.

```
template<class... Types>
struct count {
 static const std::size_t value = sizeof...(Types);
};
```

— end example]

- <sup>6</sup> The result of `sizeof` and `sizeof...` is a constant of type `std::size_t`. [Note: `std::size_t` is defined in the standard header `<cstdint>` (21.2.1, 21.2.4). — end note]

#### 8.5.2.4 New

[expr.new]

- <sup>1</sup> The *new-expression* attempts to create an object of the *type-id* (11.1) or *new-type-id* to which it is applied. The type of that object is the *allocated type*. This type shall be a complete object type, but not an abstract class type or array thereof (6.6.2, 6.7, 13.4). [Note: Because references are not objects, references cannot be created by *new-expressions*. — end note] [Note: The *type-id* may be a cv-qualified type, in which case the object created by the *new-expression* has a cv-qualified type. — end note]

*new-expression*:

```
::_opt new new-placementopt new-type-id new-initializeropt
::_opt new new-placementopt (type-id) new-initializeropt
```

*new-placement*:

```
(expression-list)
```

*new-type-id*:

```
type-specifier-seq new-declaratoropt
```

*new-declarator*:

```
ptr-operator new-declaratoropt
nptr-new-declarator
```

*nptr-new-declarator*:

```
[expression] attribute-specifier-seqopt
nptr-new-declarator [constant-expression] attribute-specifier-seqopt
```

*new-initializer*:

```
(expression-listopt)
braced-init-list
```

Entities created by a *new-expression* have dynamic storage duration (6.6.4.4). [Note: The lifetime of such an entity is not necessarily restricted to the scope in which it is created. — end note] If the entity is a non-array object, the result of the *new-expression* is a pointer to the object created. If it is an array, the result of the *new-expression* is a pointer to the initial element of the array.

- <sup>2</sup> If a placeholder type (10.1.7.4) appears in the *type-specifier-seq* of a *new-type-id* or *type-id* of a *new-expression*, the allocated type is deduced as follows: Let *init* be the *new-initializer*, if any, and T be the *new-type-id* or *type-id* of the *new-expression*, then the allocated type is the type deduced for the variable x in the invented declaration (10.1.7.4):

```
T x init ;
```

[Example:

```
new auto(1); // allocated type is int
auto x = new auto('a'); // allocated type is char, x is of type char*
```

```
template<class T> struct A { A(T, T); };
auto y = new A{1, 2}; // allocated type is A<int>
```

— end example]

- <sup>3</sup> The *new-type-id* in a *new-expression* is the longest possible sequence of *new-declarators*. [Note: This prevents ambiguities between the declarator operators `&`, `&&`, `*`, and `[]` and their expression counterparts. — end note] [Example:

```
new int * i; // syntax error: parsed as (new int*) i, not as (new int)*i
```

The `*` is the pointer declarator and not the multiplication operator. — end example]

- <sup>4</sup> [Note: Parentheses in a *new-type-id* of a *new-expression* can have surprising effects. [Example:

```
new int>(*[10])(); // error
```

is ill-formed because the binding is

```
(new int) (*[10])(); // error
```

Instead, the explicitly parenthesized version of the `new` operator can be used to create objects of compound types (6.7.2):

```
new (int (*[10]))();
```

allocates an array of 10 pointers to functions (taking no argument and returning `int`). — *end example*  
— *end note*

5 When the allocated object is an array (that is, the *noptr-new-declarator* syntax is used or the *new-type-id* or *type-id* denotes an array type), the *new-expression* yields a pointer to the initial element (if any) of the array. [Note: Both `new int` and `new int[10]` have type `int*` and the type of `new int[i][10]` is `int (*)[10]` — *end note*] The *attribute-specifier-seq* in a *noptr-new-declarator* appertains to the associated array type.

6 Every *constant-expression* in a *noptr-new-declarator* shall be a converted constant expression (8.6) of type `std::size_t` and shall evaluate to a strictly positive value. The *expression* in a *noptr-new-declarator* is implicitly converted to `std::size_t`. [Example: Given the definition `int n = 42`, `new float[n][5]` is well-formed (because `n` is the *expression* of a *noptr-new-declarator*), but `new float[5][n]` is ill-formed (because `n` is not a constant expression). — *end example*]

7 The *expression* in a *noptr-new-declarator* is erroneous if:

- (7.1) — the expression is of non-class type and its value before converting to `std::size_t` is less than zero;
- (7.2) — the expression is of class type and its value before application of the second standard conversion (16.3.3.1.2)<sup>79</sup> is less than zero;
- (7.3) — its value is such that the size of the allocated object would exceed the implementation-defined limit (Annex B); or
- (7.4) — the *new-initializer* is a *braced-init-list* and the number of array elements for which initializers are provided (including the terminating `'\0'` in a string literal (5.13.5)) exceeds the number of elements to initialize.

If the *expression* is erroneous after converting to `std::size_t`:

- (7.5) — if the *expression* is a core constant expression, the program is ill-formed;
- (7.6) — otherwise, an allocation function is not called; instead
  - (7.6.1) — if the allocation function that would have been called has a non-throwing exception specification (18.4), the value of the *new-expression* is the null pointer value of the required result type;
  - (7.6.2) — otherwise, the *new-expression* terminates by throwing an exception of a type that would match a handler (18.3) of type `std::bad_array_new_length` (21.6.3.2).

When the value of the *expression* is zero, the allocation function is called to allocate an array with no elements.

8 A *new-expression* may obtain storage for the object by calling an allocation function (6.6.4.4.1). If the *new-expression* terminates by throwing an exception, it may release storage by calling a deallocation function (6.6.4.4.2). If the allocated type is a non-array type, the allocation function's name is `operator new` and the deallocation function's name is `operator delete`. If the allocated type is an array type, the allocation function's name is `operator new[]` and the deallocation function's name is `operator delete[]`. [Note: An implementation shall provide default definitions for the global allocation functions (6.6.4.4, 21.6.2.1, 21.6.2.2). A C++ program can provide alternative definitions of these functions (20.5.4.6) and/or class-specific versions (15.5). The set of allocation and deallocation functions that may be called by a *new-expression* may include functions that do not perform allocation or deallocation; for example, see 21.6.2.3. — *end note*]

9 If the *new-expression* begins with a unary `::` operator, the allocation function's name is looked up in the global scope. Otherwise, if the allocated type is a class type `T` or array thereof, the allocation function's name is looked up in the scope of `T`. If this lookup fails to find the name, or if the allocated type is not a class type, the allocation function's name is looked up in the global scope.

10 An implementation is allowed to omit a call to a replaceable global allocation function (21.6.2.1, 21.6.2.2). When it does so, the storage is instead provided by the implementation or provided by extending the allocation

---

<sup>79</sup> If the conversion function returns a signed integer type, the second standard conversion converts to the unsigned type `std::size_t` and thus thwarts any attempt to detect a negative value afterwards.



of another *new-expression*. The implementation may extend the allocation of a *new-expression* *e1* to provide storage for a *new-expression* *e2* if the following would be true were the allocation not extended:

- (10.1) — the evaluation of *e1* is sequenced before the evaluation of *e2*, and
- (10.2) — *e2* is evaluated whenever *e1* obtains storage, and
- (10.3) — both *e1* and *e2* invoke the same replaceable global allocation function, and
- (10.4) — if the allocation function invoked by *e1* and *e2* is throwing, any exceptions thrown in the evaluation of either *e1* or *e2* would be first caught in the same handler, and
- (10.5) — the pointer values produced by *e1* and *e2* are operands to evaluated *delete-expressions*, and
- (10.6) — the evaluation of *e2* is sequenced before the evaluation of the *delete-expression* whose operand is the pointer value produced by *e1*.

[*Example:*

```
void mergeable(int x) {
 // These allocations are safe for merging:
 std::unique_ptr<char[]> a{new (std::nothrow) char[8]};
 std::unique_ptr<char[]> b{new (std::nothrow) char[8]};
 std::unique_ptr<char[]> c{new (std::nothrow) char[x]};

 g(a.get(), b.get(), c.get());
}

void unmergeable(int x) {
 std::unique_ptr<char[]> a{new char[8]};
 try {
 // Merging this allocation would change its catch handler.
 std::unique_ptr<char[]> b{new char[x]};
 } catch (const std::bad_alloc& e) {
 std::cerr << "Allocation failed: " << e.what() << std::endl;
 throw;
 }
}
```

— *end example*]

- 11 When a *new-expression* calls an allocation function and that allocation has not been extended, the *new-expression* passes the amount of space requested to the allocation function as the first argument of type `std::size_t`. That argument shall be no less than the size of the object being created; it may be greater than the size of the object being created only if the object is an array. For arrays of `char`, `unsigned char`, and `std::byte`, the difference between the result of the *new-expression* and the address returned by the allocation function shall be an integral multiple of the strictest fundamental alignment requirement (6.6.5) of any object type whose size is no greater than the size of the array being created. [*Note:* Because allocation functions are assumed to return pointers to storage that is appropriately aligned for objects of any type with fundamental alignment, this constraint on array allocation overhead permits the common idiom of allocating character arrays into which objects of other types will later be placed. — *end note*]
- 12 When a *new-expression* calls an allocation function and that allocation has been extended, the size argument to the allocation call shall be no greater than the sum of the sizes for the omitted calls as specified above, plus the size for the extended call had it not been extended, plus any padding necessary to align the allocated objects within the allocated memory.
- 13 The *new-placement* syntax is used to supply additional arguments to an allocation function; such an expression is called a *placement new-expression*.
- 14 Overload resolution is performed on a function call created by assembling an argument list. The first argument is the amount of space requested, and has type `std::size_t`. If the type of the allocated object has new-extended alignment, the next argument is the type's alignment, and has type `std::align_val_t`. If the *new-placement* syntax is used, the *initializer-clauses* in its *expression-list* are the succeeding arguments. If no matching function is found and the allocated object type has new-extended alignment, the alignment argument is removed from the argument list, and overload resolution is performed again.
- 15 [*Example:*
- (15.1) — `new T` results in one of the following calls:

- ```

operator new(sizeof(T))
operator new(sizeof(T), std::align_val_t(alignof(T)))

```
- (15.2) — `new(2,f) T` results in one of the following calls:
- ```

operator new(sizeof(T), 2, f)
operator new(sizeof(T), std::align_val_t(alignof(T)), 2, f)

```
- (15.3) — `new T[5]` results in one of the following calls:
- ```

operator new[](sizeof(T) * 5 + x)
operator new[](sizeof(T) * 5 + x, std::align_val_t(alignof(T)))

```
- (15.4) — `new(2,f) T[5]` results in one of the following calls:
- ```

operator new[](sizeof(T) * 5 + x, 2, f)
operator new[](sizeof(T) * 5 + x, std::align_val_t(alignof(T)), 2, f)

```

Here, each instance of `x` is a non-negative unspecified value representing array allocation overhead; the result of the *new-expression* will be offset by this amount from the value returned by `operator new[]`. This overhead may be applied in all array *new-expressions*, including those referencing the library function `operator new[](std::size_t, void*)` and other placement allocation functions. The amount of overhead may vary from one invocation of `new` to another. — *end example*

- 16 [Note: Unless an allocation function has a non-throwing exception specification (18.4), it indicates failure to allocate storage by throwing a `std::bad_alloc` exception (6.6.4.4.1, Clause 18, 21.6.3.1); it returns a non-null pointer otherwise. If the allocation function has a non-throwing exception specification, it returns null to indicate failure to allocate storage and a non-null pointer otherwise. — *end note*] If the allocation function is a non-allocating form (21.6.2.3) that returns null, the behavior is undefined. Otherwise, if the allocation function returns null, initialization shall not be done, the deallocation function shall not be called, and the value of the *new-expression* shall be null.
- 17 [Note: When the allocation function returns a value other than null, it must be a pointer to a block of storage in which space for the object has been reserved. The block of storage is assumed to be appropriately aligned and of the requested size. The address of the created object will not necessarily be the same as that of the block if the object is an array. — *end note*]
- 18 A *new-expression* that creates an object of type `T` initializes that object as follows:
- (18.1) — If the *new-initializer* is omitted, the object is default-initialized (11.6). [Note: If no initialization is performed, the object has an indeterminate value. — *end note*]
- (18.2) — Otherwise, the *new-initializer* is interpreted according to the initialization rules of 11.6 for direct-initialization.
- 19 The invocation of the allocation function is sequenced before the evaluations of expressions in the *new-initializer*. Initialization of the allocated object is sequenced before the value computation of the *new-expression*.
- 20 If the *new-expression* creates an object or an array of objects of class type, access and ambiguity control are done for the allocation function, the deallocation function (15.5), and the constructor (15.1). If the *new-expression* creates an array of objects of class type, the destructor is potentially invoked (15.4).
- 21 If any part of the object initialization described above<sup>80</sup> terminates by throwing an exception and a suitable deallocation function can be found, the deallocation function is called to free the memory in which the object was being constructed, after which the exception continues to propagate in the context of the *new-expression*. If no unambiguous matching deallocation function can be found, propagating the exception does not cause the object's memory to be freed. [Note: This is appropriate when the called allocation function does not allocate memory; otherwise, it is likely to result in a memory leak. — *end note*]
- 22 If the *new-expression* begins with a unary `::` operator, the deallocation function's name is looked up in the global scope. Otherwise, if the allocated type is a class type `T` or an array thereof, the deallocation function's name is looked up in the scope of `T`. If this lookup fails to find the name, or if the allocated type is not a class type or array thereof, the deallocation function's name is looked up in the global scope.
- 23 A declaration of a placement deallocation function matches the declaration of a placement allocation function if it has the same number of parameters and, after parameter transformations (11.3.5), all parameter types except the first are identical. If the lookup finds a single matching deallocation function, that function will be called; otherwise, no deallocation function will be called. If the lookup finds a usual deallocation function

---

80) This may include evaluating a *new-initializer* and/or calling a constructor.

with a parameter of type `std::size_t` (6.6.4.4.2) and that function, considered as a placement deallocation function, would have been selected as a match for the allocation function, the program is ill-formed. For a non-placement allocation function, the normal deallocation function lookup is used to find the matching deallocation function (8.5.2.5) [*Example*:

```
struct S {
 // Placement allocation function:
 static void* operator new(std::size_t, std::size_t);

 // Usual (non-placement) deallocation function:
 static void operator delete(void*, std::size_t);
};

S* p = new (0) S; // ill-formed: non-placement deallocation function matches
 // placement allocation function
```

— end example]

- <sup>24</sup> If a *new-expression* calls a deallocation function, it passes the value returned from the allocation function call as the first argument of type `void*`. If a placement deallocation function is called, it is passed the same additional arguments as were passed to the placement allocation function, that is, the same arguments as those specified with the *new-placement* syntax. If the implementation is allowed to introduce a temporary object or make a copy of any argument as part of the call to the allocation function, it is unspecified whether the same object is used in the call to both the allocation and deallocation functions.

### 8.5.2.5 Delete

[`expr.delete`]

- <sup>1</sup> The *delete-expression* operator destroys a most derived object (6.6.2) or array created by a *new-expression*.

*delete-expression*:

```
::opt delete cast-expression
::opt delete [] cast-expression
```

The first alternative is a *single-object delete expression*, and the second is an *array delete expression*. Whenever the `delete` keyword is immediately followed by empty square brackets, it shall be interpreted as the second alternative.<sup>81</sup> The operand shall be of pointer to object type or of class type. If of class type, the operand is contextually implicitly converted (Clause 7) to a pointer to object type.<sup>82</sup> The *delete-expression*'s result has type `void`.

- <sup>2</sup> If the operand has a class type, the operand is converted to a pointer type by calling the above-mentioned conversion function, and the converted operand is used in place of the original operand for the remainder of this subclause. In a single-object delete expression, the value of the operand of `delete` may be a null pointer value, a pointer to a non-array object created by a previous *new-expression*, or a pointer to a subobject (6.6.2) representing a base class of such an object (Clause 13). If not, the behavior is undefined. In an array delete expression, the value of the operand of `delete` may be a null pointer value or a pointer value that resulted from a previous array *new-expression*.<sup>83</sup> If not, the behavior is undefined. [*Note*: This means that the syntax of the *delete-expression* must match the type of the object allocated by `new`, not the syntax of the *new-expression*. — end note] [*Note*: A pointer to a `const` type can be the operand of a *delete-expression*; it is not necessary to cast away the constness (8.5.1.11) of the pointer expression before it is used as the operand of the *delete-expression*. — end note]
- <sup>3</sup> In a single-object delete expression, if the static type of the object to be deleted is different from its dynamic type and the selected deallocation function (see below) is not a destroying operator `delete`, the static type shall be a base class of the dynamic type of the object to be deleted and the static type shall have a virtual destructor or the behavior is undefined. In an array delete expression, if the dynamic type of the object to be deleted differs from its static type, the behavior is undefined.
- <sup>4</sup> The *cast-expression* in a *delete-expression* shall be evaluated exactly once.
- <sup>5</sup> If the object being deleted has incomplete class type at the point of deletion and the complete class has a non-trivial destructor or a deallocation function, the behavior is undefined.

<sup>81</sup> A *lambda-expression* with a *lambda-introducer* that consists of empty square brackets can follow the `delete` keyword if the *lambda-expression* is enclosed in parentheses.

<sup>82</sup> This implies that an object cannot be deleted using a pointer of type `void*` because `void` is not an object type.

<sup>83</sup> For nonzero-length arrays, this is the same as a pointer to the first element of the array created by that *new-expression*. Zero-length arrays do not have a first element.

- 6 If the value of the operand of the *delete-expression* is not a null pointer value and the selected deallocation function (see below) is not a destroying operator delete, the *delete-expression* will invoke the destructor (if any) for the object or the elements of the array being deleted. In the case of an array, the elements will be destroyed in order of decreasing address (that is, in reverse order of the completion of their constructor; see 15.6.2).
- 7 If the value of the operand of the *delete-expression* is not a null pointer value, then:
- (7.1) — If the allocation call for the *new-expression* for the object to be deleted was not omitted and the allocation was not extended (8.5.2.4), the *delete-expression* shall call a deallocation function (6.6.4.4.2). The value returned from the allocation call of the *new-expression* shall be passed as the first argument to the deallocation function.
  - (7.2) — Otherwise, if the allocation was extended or was provided by extending the allocation of another *new-expression*, and the *delete-expression* for every other pointer value produced by a *new-expression* that had storage provided by the extended *new-expression* has been evaluated, the *delete-expression* shall call a deallocation function. The value returned from the allocation call of the extended *new-expression* shall be passed as the first argument to the deallocation function.
  - (7.3) — Otherwise, the *delete-expression* will not call a deallocation function.
- [*Note:* The deallocation function is called regardless of whether the destructor for the object or some element of the array throws an exception. — *end note*] If the value of the operand of the *delete-expression* is a null pointer value, it is unspecified whether a deallocation function will be called as described above.
- 8 [*Note:* An implementation provides default definitions of the global deallocation functions `operator delete` for non-arrays (21.6.2.1) and `operator delete[]` for arrays (21.6.2.2). A C++ program can provide alternative definitions of these functions (20.5.4.6), and/or class-specific versions (15.5). — *end note*]
- 9 When the keyword `delete` in a *delete-expression* is preceded by the unary `::` operator, the deallocation function's name is looked up in global scope. Otherwise, the lookup considers class-specific deallocation functions (15.5). If no class-specific deallocation function is found, the deallocation function's name is looked up in global scope.
- 10 If deallocation function lookup finds more than one usual deallocation function, the function to be called is selected as follows:
- (10.1) — If any of the deallocation functions is a destroying operator delete, all deallocation functions that are not destroying operator deletes are eliminated from further consideration.
  - (10.2) — If the type has new-extended alignment, a function with a parameter of type `std::align_val_t` is preferred; otherwise a function without such a parameter is preferred. If any preferred functions are found, all non-preferred functions are eliminated from further consideration.
  - (10.3) — If exactly one function remains, that function is selected and the selection process terminates.
  - (10.4) — If the deallocation functions have class scope, the one without a parameter of type `std::size_t` is selected.
  - (10.5) — If the type is complete and if, for an array delete expression only, the operand is a pointer to a class type with a non-trivial destructor or a (possibly multi-dimensional) array thereof, the function with a parameter of type `std::size_t` is selected.
  - (10.6) — Otherwise, it is unspecified whether a deallocation function with a parameter of type `std::size_t` is selected.
- 11 For a single-object delete expression, the deleted object is the object denoted by the operand if its static type does not have a virtual destructor, and its most-derived object otherwise. [*Note:* If the deallocation function is not a destroying operator delete and the deleted object is not the most derived object in the former case, the behavior is undefined, as stated above. — *end note*] For an array delete expression, the deleted object is the array object. When a *delete-expression* is executed, the selected deallocation function shall be called with the address of the deleted object in a single-object delete expression, or the address of the deleted object suitably adjusted for the array allocation overhead (8.5.2.4) in an array delete expression, as its first argument. [*Note:* Any cv-qualifiers in the type of the deleted object are ignored when forming this argument. — *end note*] If a destroying operator delete is used, an unspecified value is passed as the argument corresponding to the parameter of type `std::destroying_delete_t`. If a deallocation function with a parameter of type `std::align_val_t` is used, the alignment of the type of the deleted object is passed as the corresponding argument. If a deallocation function with a parameter of type `std::size_t` is used,

the size of the deleted object in a single-object delete expression, or of the array plus allocation overhead in an array delete expression, is passed as the corresponding argument. [*Note*: If this results in a call to a replaceable deallocation function, and either the first argument was not the result of a prior call to a replaceable allocation function or the second or third argument was not the corresponding argument in said call, the behavior is undefined (21.6.2.1, 21.6.2.2). — *end note*]

- <sup>12</sup> Access and ambiguity control are done for both the deallocation function and the destructor (15.4, 15.5).

### 8.5.2.6 **alignof** [expr.alignof]

- <sup>1</sup> An **alignof** expression yields the alignment requirement of its operand type. The operand shall be a *type-id* representing a complete object type, or an array thereof, or a reference to one of those types.
- <sup>2</sup> The result is an integral constant of type `std::size_t`.
- <sup>3</sup> When **alignof** is applied to a reference type, the result is the alignment of the referenced type. When **alignof** is applied to an array type, the result is the alignment of the element type.

### 8.5.2.7 **noexcept operator** [expr.unary.noexcept]

- <sup>1</sup> The **noexcept** operator determines whether the evaluation of its operand, which is an unevaluated operand (8.2), can throw an exception (18.1).

*noexcept-expression*:  
**noexcept** ( *expression* )

- <sup>2</sup> The result of the **noexcept** operator is a constant of type `bool` and is a prvalue.
- <sup>3</sup> The result of the **noexcept** operator is `true` unless the *expression* is potentially-throwing (18.4).

### 8.5.3 **Explicit type conversion (cast notation)** [expr.cast]

- <sup>1</sup> The result of the expression (T) *cast-expression* is of type T. The result is an lvalue if T is an lvalue reference type or an rvalue reference to function type and an xvalue if T is an rvalue reference to object type; otherwise the result is a prvalue. [*Note*: If T is a non-class type that is cv-qualified, the *cv-qualifiers* are discarded when determining the type of the resulting prvalue; see 8.2. — *end note*]
- <sup>2</sup> An explicit type conversion can be expressed using functional notation (8.5.1.3), a type conversion operator (`dynamic_cast`, `static_cast`, `reinterpret_cast`, `const_cast`), or the *cast* notation.

*cast-expression*:  
*unary-expression*  
 ( *type-id* ) *cast-expression*

- <sup>3</sup> Any type conversion not mentioned below and not explicitly defined by the user (15.3) is ill-formed.

<sup>4</sup> The conversions performed by

- (4.1) — a `const_cast` (8.5.1.11),
- (4.2) — a `static_cast` (8.5.1.9),
- (4.3) — a `static_cast` followed by a `const_cast`,
- (4.4) — a `reinterpret_cast` (8.5.1.10), or
- (4.5) — a `reinterpret_cast` followed by a `const_cast`,

can be performed using the cast notation of explicit type conversion. The same semantic restrictions and behaviors apply, with the exception that in performing a `static_cast` in the following situations the conversion is valid even if the base class is inaccessible:

- (4.6) — a pointer to an object of derived class type or an lvalue or rvalue of derived class type may be explicitly converted to a pointer or reference to an unambiguous base class type, respectively;
- (4.7) — a pointer to member of derived class type may be explicitly converted to a pointer to member of an unambiguous non-virtual base class type;
- (4.8) — a pointer to an object of an unambiguous non-virtual base class type, a glvalue of an unambiguous non-virtual base class type, or a pointer to member of an unambiguous non-virtual base class type may be explicitly converted to a pointer, a reference, or a pointer to member of a derived class type, respectively.

If a conversion can be interpreted in more than one of the ways listed above, the interpretation that appears first in the list is used, even if a cast resulting from that interpretation is ill-formed. If a conversion can be

interpreted in more than one way as a `static_cast` followed by a `const_cast`, the conversion is ill-formed. [Example:

```
struct A { };
struct I1 : A { };
struct I2 : A { };
struct D : I1, I2 { };
A* foo(D* p) {
 return (A*)(p); // ill-formed static_cast interpretation
}
```

— end example]

- 5 The operand of a cast using the cast notation can be a prvalue of type “pointer to incomplete class type”. The destination type of a cast using the cast notation can be “pointer to incomplete class type”. If both the operand and destination types are class types and one or both are incomplete, it is unspecified whether the `static_cast` or the `reinterpret_cast` interpretation is used, even if there is an inheritance relationship between the two classes. [Note: For example, if the classes were defined later in the translation unit, a multi-pass compiler would be permitted to interpret a cast between pointers to the classes as if the class types were complete at the point of the cast. — end note]

### 8.5.4 Pointer-to-member operators

[expr.mptr.oper]

- 1 The pointer-to-member operators `->*` and `.*` group left-to-right.

*pm-expression:*  
*cast-expression*  
*pm-expression* *.\** *cast-expression*  
*pm-expression* *->\** *cast-expression*

- 2 The binary operator `.*` binds its second operand, which shall be of type “pointer to member of T” to its first operand, which shall be a glvalue of class T or of a class of which T is an unambiguous and accessible base class. The result is an object or a function of the type specified by the second operand.
- 3 The binary operator `->*` binds its second operand, which shall be of type “pointer to member of T” to its first operand, which shall be of type “pointer to U” where U is either T or a class of which T is an unambiguous and accessible base class. The expression `E1->*E2` is converted into the equivalent form `*(E1)).*E2`.
- 4 Abbreviating *pm-expression* *.\** *cast-expression* as `E1.*E2`, `E1` is called the *object expression*. If the dynamic type of `E1` does not contain the member to which `E2` refers, the behavior is undefined. Otherwise, the expression `E1` is sequenced before the expression `E2`.
- 5 The restrictions on cv-qualification, and the manner in which the cv-qualifiers of the operands are combined to produce the cv-qualifiers of the result, are the same as the rules for `E1.E2` given in 8.5.1.5. [Note: It is not possible to use a pointer to member that refers to a mutable member to modify a const class object. For example,

```
struct S {
 S() : i(0) { }
 mutable int i;
};
void f()
{
 const S cs;
 int S::* pm = &S::i; // pm refers to mutable member S::i
 cs.*pm = 88; // ill-formed: cs is a const object
}
```

— end note]

- 6 If the result of `.*` or `->*` is a function, then that result can be used only as the operand for the function call operator `()`. [Example:

```
(ptr_to_obj->*ptr_to_mfct)(10);
```

calls the member function denoted by `ptr_to_mfct` for the object pointed to by `ptr_to_obj`. — end example]

In a `.*` expression whose object expression is an rvalue, the program is ill-formed if the second operand is a pointer to member function whose *ref-qualifier* is `&`, unless its *cv-qualifier-seq* is `const`. In a `.*` expression whose object expression is an lvalue, the program is ill-formed if the second operand is a pointer to member function whose *ref-qualifier* is `&&`. The result of a `.*` expression whose second operand is a pointer to a data

member is an lvalue if the first operand is an lvalue and an xvalue otherwise. The result of a `.*` expression whose second operand is a pointer to a member function is a prvalue. If the second operand is the null member pointer value (7.12), the behavior is undefined.

### 8.5.5 Multiplicative operators

[expr.mul]

- 1 The multiplicative operators `*`, `/`, and `%` group left-to-right.

*multiplicative-expression:*

*pm-expression*

*multiplicative-expression* `*` *pm-expression*

*multiplicative-expression* `/` *pm-expression*

*multiplicative-expression* `%` *pm-expression*

- 2 The operands of `*` and `/` shall have arithmetic or unscoped enumeration type; the operands of `%` shall have integral or unscoped enumeration type. The usual arithmetic conversions (8.3) are performed on the operands and determine the type of the result.
- 3 The binary `*` operator indicates multiplication.
- 4 The binary `/` operator yields the quotient, and the binary `%` operator yields the remainder from the division of the first expression by the second. If the second operand of `/` or `%` is zero the behavior is undefined. For integral operands the `/` operator yields the algebraic quotient with any fractional part discarded;<sup>84</sup> if the quotient `a/b` is representable in the type of the result, `(a/b)*b + a%b` is equal to `a`; otherwise, the behavior of both `a/b` and `a%b` is undefined.

### 8.5.6 Additive operators

[expr.add]

- 1 The additive operators `+` and `-` group left-to-right. The usual arithmetic conversions (8.3) are performed for operands of arithmetic or enumeration type.

*additive-expression:*

*multiplicative-expression*

*additive-expression* `+` *multiplicative-expression*

*additive-expression* `-` *multiplicative-expression*

For addition, either both operands shall have arithmetic or unscoped enumeration type, or one operand shall be a pointer to a completely-defined object type and the other shall have integral or unscoped enumeration type.

- 2 For subtraction, one of the following shall hold:

- (2.1) — both operands have arithmetic or unscoped enumeration type; or
- (2.2) — both operands are pointers to cv-qualified or cv-unqualified versions of the same completely-defined object type; or
- (2.3) — the left operand is a pointer to a completely-defined object type and the right operand has integral or unscoped enumeration type.

- 3 The result of the binary `+` operator is the sum of the operands. The result of the binary `-` operator is the difference resulting from the subtraction of the second operand from the first.
- 4 When an expression that has integral type is added to or subtracted from a pointer, the result has the type of the pointer operand. If the expression `P` points to element `x[i]` of an array object `x` with  $n$  elements,<sup>85</sup> the expressions `P + J` and `J + P` (where `J` has the value  $j$ ) point to the (possibly-hypothetical) element `x[i + j]` if  $0 \leq i + j \leq n$ ; otherwise, the behavior is undefined. Likewise, the expression `P - J` points to the (possibly-hypothetical) element `x[i - j]` if  $0 \leq i - j \leq n$ ; otherwise, the behavior is undefined.
- 5 When two pointers to elements of the same array object are subtracted, the type of the result is an implementation-defined signed integral type; this type shall be the same type that is defined as `std::ptrdiff_t` in the `<ptrdiff_t>` header (21.2). If the expressions `P` and `Q` point to, respectively, elements `x[i]` and `x[j]` of the same array object `x`, the expression `P - Q` has the value  $i - j$ ; otherwise, the behavior is undefined. [Note: If the value  $i - j$  is not in the range of representable values of type `std::ptrdiff_t`, the behavior is undefined. — end note]

<sup>84</sup>) This is often called truncation towards zero.

<sup>85</sup>) An object that is not an array element is considered to belong to a single-element array for this purpose; see 8.5.2.1. A pointer past the last element of an array `x` of  $n$  elements is considered to be equivalent to a pointer to a hypothetical element `x[n]` for this purpose; see 6.7.2.

- 6 For addition or subtraction, if the expressions P or Q have type “pointer to *cv* T”, where T and the array element type are not similar (7.5), the behavior is undefined. [Note: In particular, a pointer to a base class cannot be used for pointer arithmetic when the array contains objects of a derived class type. — *end note*]
- 7 If the value 0 is added to or subtracted from a null pointer value, the result is a null pointer value. If two null pointer values are subtracted, the result compares equal to the value 0 converted to the type `std::ptrdiff_t`.

### 8.5.7 Shift operators

[`expr.shift`]

- 1 The shift operators `<<` and `>>` group left-to-right.

*shift-expression:*

*additive-expression*

*shift-expression* `<<` *additive-expression*

*shift-expression* `>>` *additive-expression*

The operands shall be of integral or unscoped enumeration type and integral promotions are performed. The type of the result is that of the promoted left operand. The behavior is undefined if the right operand is negative, or greater than or equal to the length in bits of the promoted left operand.

- 2 The value of `E1 << E2` is E1 left-shifted E2 bit positions; vacated bits are zero-filled. If E1 has an unsigned type, the value of the result is  $E1 \times 2^{E2}$ , reduced modulo one more than the maximum value representable in the result type. Otherwise, if E1 has a signed type and non-negative value, and  $E1 \times 2^{E2}$  is representable in the corresponding unsigned type of the result type, then that value, converted to the result type, is the resulting value; otherwise, the behavior is undefined.
- 3 The value of `E1 >> E2` is E1 right-shifted E2 bit positions. If E1 has an unsigned type or if E1 has a signed type and a non-negative value, the value of the result is the integral part of the quotient of  $E1/2^{E2}$ . If E1 has a signed type and a negative value, the resulting value is implementation-defined.
- 4 The expression E1 is sequenced before the expression E2.

### 8.5.8 Three-way comparison operator

[`expr.spaceship`]

- 1 The three-way comparison operator groups left-to-right.

*compare-expression:*

*shift-expression*

*compare-expression* `<=>` *shift-expression*

- 2 The expression `p <=> q` is a prvalue indicating whether p is less than, equal to, greater than, or incomparable with q.
- 3 If one of the operands is of type `bool` and the other is not, the program is ill-formed.
- 4 If both operands have arithmetic types, or one operand has integral type and the other operand has unscoped enumeration type, the usual arithmetic conversions (8.3) are applied to the operands. Then:
- (4.1) — If a narrowing conversion (11.6.4) is required, other than from an integral type to a floating point type, the program is ill-formed.
- (4.2) — Otherwise, if the operands have integral type, the result is of type `std::strong_ordering`. The result is `std::strong_ordering::equal` if both operands are arithmetically equal, `std::strong_ordering::less` if the first operand is arithmetically less than the second operand, and `std::strong_ordering::greater` otherwise.
- (4.3) — Otherwise, the operands have floating-point type, and the result is of type `std::partial_ordering`. The expression `a <=> b` yields `std::partial_ordering::less` if a is less than b, `std::partial_ordering::greater` if a is greater than b, `std::partial_ordering::equivalent` if a is equivalent to b, and `std::partial_ordering::unordered` otherwise.
- 5 If both operands have the same enumeration type E, the operator yields the result of converting the operands to the underlying type of E and applying `<=>` to the converted operands.
- 6 If at least one of the operands is of pointer type, array-to-pointer conversions (7.2), pointer conversions (7.11), function pointer conversions (7.13), and qualification conversions (7.5) are performed on both operands to bring them to their composite pointer type (8.2.2). If at least one of the operands is of pointer-to-member type, pointer-to-member conversions (7.12) and qualification conversions (7.5) are performed on both operands to bring them to their composite pointer type (8.2.2). If both operands are null pointer constants, but not both of integer type, pointer conversions (7.11) are performed on both operands to bring them to their composite



pointer type (8.2.2). In all cases, after the conversions, the operands shall have the same type. [Note: If both of the operands are arrays, array-to-pointer conversions (7.2) are not applied. — end note]

- 7 If the composite pointer type is a function pointer type, a pointer-to-member type, or `std::nullptr_t`, the result is of type `std::strong_equality`; the result is `std::strong_equality::equal` if the (possibly converted) operands compare equal (8.5.10) and `std::strong_equality::nonequal` if they compare unequal, otherwise the result of the operator is unspecified.
- 8 If the composite pointer type is an object pointer type, `p <=> q` is of type `std::strong_ordering`. If two pointer operands `p` and `q` compare equal (8.5.10), `p <=> q` yields `std::strong_ordering::equal`; if `p` and `q` compare unequal, `p <=> q` yields `std::strong_ordering::less` if `q` compares greater than `p` and `std::strong_ordering::greater` if `p` compares greater than `q` (8.5.9). Otherwise, the result is unspecified.
- 9 Otherwise, the program is ill-formed.
- 10 The five comparison category types (21.11.2) (the types `std::strong_ordering`, `std::strong_equality`, `std::weak_ordering`, `std::weak_equality`, and `std::partial_ordering`) are not predefined; if the header `<compare>` is not included prior to a use of such a class type – even an implicit use in which the type is not named (e.g., via the auto specifier (10.1.7.4) in a defaulted three-way comparison (15.9.2) or use of the built-in operator) – the program is ill-formed.

### 8.5.9 Relational operators

[`expr.rel`]

- 1 The relational operators group left-to-right. [Example: `a<b<c` means `(a<b)<c` and *not* `(a<b)&&(b<c)`. — end example]

*relational-expression:*

*compare-expression*

*relational-expression* < *compare-expression*

*relational-expression* > *compare-expression*

*relational-expression* <= *compare-expression*

*relational-expression* >= *compare-expression*

The lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the operands. The comparison is deprecated if both operands were of array type prior to these conversions (D.3).

- 2 The converted operands shall have arithmetic, enumeration, or pointer type. The operators < (less than), > (greater than), <= (less than or equal to), and >= (greater than or equal to) all yield `false` or `true`. The type of the result is `bool`.
- 3 The usual arithmetic conversions (8.3) are performed on operands of arithmetic or enumeration type. If both operands are pointers, pointer conversions (7.11) and qualification conversions (7.5) are performed to bring them to their composite pointer type (8.2). After conversions, the operands shall have the same type.
- 4 The result of comparing unequal pointers to objects<sup>86</sup> is defined in terms of a partial order consistent with the following rules:
  - (4.1) — If two pointers point to different elements of the same array, or to subobjects thereof, the pointer to the element with the higher subscript is required to compare greater.
  - (4.2) — If two pointers point to different non-static data members of the same object, or to subobjects of such members, recursively, the pointer to the later declared member is required to compare greater provided the two members have the same access control (Clause 14), neither member is a subobject of zero size, and their class is not a union.
  - (4.3) — Otherwise, neither pointer is required to compare greater than the other.
- 5 If two operands `p` and `q` compare equal (8.5.10), `p<=q` and `p>=q` both yield `true` and `p<q` and `p>q` both yield `false`. Otherwise, if a pointer `p` compares greater than a pointer `q`, `p>=q`, `p>q`, `q<=p`, and `q<p` all yield `true` and `p<=q`, `p<q`, `q>=p`, and `q>p` all yield `false`. Otherwise, the result of each of the operators is unspecified.
- 6 If both operands (after conversions) are of arithmetic or enumeration type, each of the operators shall yield `true` if the specified relationship is true and `false` if it is false.

<sup>86</sup> An object that is not an array element is considered to belong to a single-element array for this purpose; see 8.5.2.1. A pointer past the last element of an array `x` of `n` elements is considered to be equivalent to a pointer to a hypothetical element `x[n]` for this purpose; see 6.7.2.

## 8.5.10 Equality operators

[expr.eq]

*equality-expression:**relational-expression**equality-expression* == *relational-expression**equality-expression* != *relational-expression*

- 1 The == (equal to) and the != (not equal to) operators group left-to-right. The lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the operands. The comparison is deprecated if both operands were of array type prior to these conversions (D.3).
- 2 The converted operands shall have arithmetic, enumeration, pointer, or pointer-to-member type, or type `std::nullptr_t`. The operators == and != both yield `true` or `false`, i.e., a result of type `bool`. In each case below, the operands shall have the same type after the specified conversions have been applied.
- 3 If at least one of the operands is a pointer, pointer conversions (7.11), function pointer conversions (7.13), and qualification conversions (7.5) are performed on both operands to bring them to their composite pointer type (8.2). Comparing pointers is defined as follows:
  - (3.1) — If one pointer represents the address of a complete object, and another pointer represents the address one past the last element of a different complete object,<sup>87</sup> the result of the comparison is unspecified.
  - (3.2) — Otherwise, if the pointers are both null, both point to the same function, or both represent the same address (6.7.2), they compare equal.
  - (3.3) — Otherwise, the pointers compare unequal.
- 4 If at least one of the operands is a pointer to member, pointer-to-member conversions (7.12) and qualification conversions (7.5) are performed on both operands to bring them to their composite pointer type (8.2). Comparing pointers to members is defined as follows:
  - (4.1) — If two pointers to members are both the null member pointer value, they compare equal.
  - (4.2) — If only one of two pointers to members is the null member pointer value, they compare unequal.
  - (4.3) — If either is a pointer to a virtual member function, the result is unspecified.
  - (4.4) — If one refers to a member of class C1 and the other refers to a member of a different class C2, where neither is a base class of the other, the result is unspecified. [*Example:*

```

struct A {};
struct B : A { int x; };
struct C : A { int x; };

int A::*bx = (int(A::*))&B::x;
int A::*cx = (int(A::*))&C::x;

bool b1 = (bx == cx); // unspecified

```

— *end example*]
  - (4.5) — If both refer to (possibly different) members of the same union (12.3), they compare equal.
  - (4.6) — Otherwise, two pointers to members compare equal if they would refer to the same member of the same most derived object (6.6.2) or the same subobject if indirection with a hypothetical object of the associated class type were performed, otherwise they compare unequal. [*Example:*

```

struct B {
 int f();
};
struct L : B { };
struct R : B { };
struct D : L, R { };

int (B::*pb)() = &B::f;
int (L::*pl)() = pb;
int (R::*pr)() = pb;
int (D::*pdl)() = pl;
int (D::*pdr)() = pr;
bool x = (pdl == pdr); // false

```

---

<sup>87</sup>) An object that is not an array element is considered to belong to a single-element array for this purpose; see 8.5.2.1.

```

 bool y = (pb == pl); // true
 — end example]

```

- 5 Two operands of type `std::nullptr_t` or one operand of type `std::nullptr_t` and the other a null pointer constant compare equal.
- 6 If two operands compare equal, the result is `true` for the `==` operator and `false` for the `!=` operator. If two operands compare unequal, the result is `false` for the `==` operator and `true` for the `!=` operator. Otherwise, the result of each of the operators is unspecified.
- 7 If both operands are of arithmetic or enumeration type, the usual arithmetic conversions (8.3) are performed on both operands; each of the operators shall yield `true` if the specified relationship is true and `false` if it is false.

### 8.5.11 Bitwise AND operator [expr.bit.and]

*and-expression:*  
*equality-expression*  
*and-expression & equality-expression*

- 1 The usual arithmetic conversions (8.3) are performed; the result is the bitwise AND function of the operands. The operator applies only to integral or unscoped enumeration operands.

### 8.5.12 Bitwise exclusive OR operator [expr.xor]

*exclusive-or-expression:*  
*and-expression*  
*exclusive-or-expression ^ and-expression*

- 1 The usual arithmetic conversions (8.3) are performed; the result is the bitwise exclusive OR function of the operands. The operator applies only to integral or unscoped enumeration operands.

### 8.5.13 Bitwise inclusive OR operator [expr.or]

*inclusive-or-expression:*  
*exclusive-or-expression*  
*inclusive-or-expression | exclusive-or-expression*

- 1 The usual arithmetic conversions (8.3) are performed; the result is the bitwise inclusive OR function of its operands. The operator applies only to integral or unscoped enumeration operands.

### 8.5.14 Logical AND operator [expr.log.and]

*logical-and-expression:*  
*inclusive-or-expression*  
*logical-and-expression && inclusive-or-expression*

- 1 The `&&` operator groups left-to-right. The operands are both contextually converted to `bool` (Clause 7). The result is `true` if both operands are `true` and `false` otherwise. Unlike `&`, `&&` guarantees left-to-right evaluation: the second operand is not evaluated if the first operand is `false`.
- 2 The result is a `bool`. If the second expression is evaluated, every value computation and side effect associated with the first expression is sequenced before every value computation and side effect associated with the second expression.

### 8.5.15 Logical OR operator [expr.log.or]

*logical-or-expression:*  
*logical-and-expression*  
*logical-or-expression || logical-and-expression*

- 1 The `||` operator groups left-to-right. The operands are both contextually converted to `bool` (Clause 7). The result is `true` if either of its operands is `true`, and `false` otherwise. Unlike `|`, `||` guarantees left-to-right evaluation; moreover, the second operand is not evaluated if the first operand evaluates to `true`.
- 2 The result is a `bool`. If the second expression is evaluated, every value computation and side effect associated with the first expression is sequenced before every value computation and side effect associated with the second expression.

## 8.5.16 Conditional operator

[expr.cond]

*conditional-expression:*

*logical-or-expression*

*logical-or-expression ? expression : assignment-expression*

- 1 Conditional expressions group right-to-left. The first expression is contextually converted to `bool` (Clause 7). It is evaluated and if it is `true`, the result of the conditional expression is the value of the second expression, otherwise that of the third expression. Only one of the second and third expressions is evaluated. Every value computation and side effect associated with the first expression is sequenced before every value computation and side effect associated with the second or third expression.
- 2 If either the second or the third operand has type `void`, one of the following shall hold:
  - (2.1) — The second or the third operand (but not both) is a (possibly parenthesized) *throw-expression* (8.5.17); the result is of the type and value category of the other. The *conditional-expression* is a bit-field if that operand is a bit-field.
  - (2.2) — Both the second and the third operands have type `void`; the result is of type `void` and is a prvalue. [Note: This includes the case where both operands are *throw-expressions*. — end note]
- 3 Otherwise, if the second and third operand are glvalue bit-fields of the same value category and of types *cv1* T and *cv2* T, respectively, the operands are considered to be of type *cv* T for the remainder of this subclass, where *cv* is the union of *cv1* and *cv2*.
- 4 Otherwise, if the second and third operand have different types and either has (possibly cv-qualified) class type, or if both are glvalues of the same value category and the same type except for cv-qualification, an attempt is made to form an implicit conversion sequence (16.3.3.1) from each of those operands to the type of the other. [Note: Properties such as access, whether an operand is a bit-field, or whether a conversion function is deleted are ignored for that determination. — end note] Attempts are made to form an implicit conversion sequence from an operand expression E1 of type T1 to a target type related to the type T2 of the operand expression E2 as follows:
  - (4.1) — If E2 is an lvalue, the target type is “lvalue reference to T2”, subject to the constraint that in the conversion the reference must bind directly (11.6.3) to a glvalue.
  - (4.2) — If E2 is an xvalue, the target type is “rvalue reference to T2”, subject to the constraint that the reference must bind directly.
  - (4.3) — If E2 is a prvalue or if neither of the conversion sequences above can be formed and at least one of the operands has (possibly cv-qualified) class type:
    - (4.3.1) — if T1 and T2 are the same class type (ignoring cv-qualification) and T2 is at least as cv-qualified as T1, the target type is T2,
    - (4.3.2) — otherwise, if T2 is a base class of T1, the target type is *cv1* T2, where *cv1* denotes the cv-qualifiers of T1,
    - (4.3.3) — otherwise, the target type is the type that E2 would have after applying the lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions.

Using this process, it is determined whether an implicit conversion sequence can be formed from the second operand to the target type determined for the third operand, and vice versa. If both sequences can be formed, or one can be formed but it is the ambiguous conversion sequence, the program is ill-formed. If no conversion sequence can be formed, the operands are left unchanged and further checking is performed as described below. Otherwise, if exactly one conversion sequence can be formed, that conversion is applied to the chosen operand and the converted operand is used in place of the original operand for the remainder of this subclass. [Note: The conversion might be ill-formed even if an implicit conversion sequence could be formed. — end note]
- 5 If the second and third operands are glvalues of the same value category and have the same type, the result is of that type and value category and it is a bit-field if the second or the third operand is a bit-field, or if both are bit-fields.
- 6 Otherwise, the result is a prvalue. If the second and third operands do not have the same type, and either has (possibly cv-qualified) class type, overload resolution is used to determine the conversions (if any) to be applied to the operands (16.3.1.2, 16.6). If the overload resolution fails, the program is ill-formed. Otherwise, the conversions thus determined are applied, and the converted operands are used in place of the original operands for the remainder of this subclass.

<sup>7</sup> Lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are performed on the second and third operands. After those conversions, one of the following shall hold:

- (7.1) — The second and third operands have the same type; the result is of that type and the result object is initialized using the selected operand.
- (7.2) — The second and third operands have arithmetic or enumeration type; the usual arithmetic conversions (8.3) are performed to bring them to a common type, and the result is of that type.
- (7.3) — One or both of the second and third operands have pointer type; pointer conversions (7.11), function pointer conversions (7.13), and qualification conversions (7.5) are performed to bring them to their composite pointer type (8.2). The result is of the composite pointer type.
- (7.4) — One or both of the second and third operands have pointer-to-member type; pointer to member conversions (7.12) and qualification conversions (7.5) are performed to bring them to their composite pointer type (8.2). The result is of the composite pointer type.
- (7.5) — Both the second and third operands have type `std::nullptr_t` or one has that type and the other is a null pointer constant. The result is of type `std::nullptr_t`.

### 8.5.17 Throwing an exception

[**expr.throw**]

*throw-expression:*

**throw** *assignment-expression*<sub>opt</sub>

- <sup>1</sup> A *throw-expression* is of type `void`.
- <sup>2</sup> Evaluating a *throw-expression* with an operand throws an exception (18.1); the type of the exception object is determined by removing any top-level *cv-qualifiers* from the static type of the operand and adjusting the type from “array of T” or function type T to “pointer to T”.
- <sup>3</sup> A *throw-expression* with no operand rethrows the currently handled exception (18.3). The exception is reactivated with the existing exception object; no new exception object is created. The exception is no longer considered to be caught. [*Example:* Code that must be executed because of an exception, but cannot completely handle the exception itself, can be written like this:

```
try {
 // ...
} catch (...) { // catch all exceptions
 // respond (partially) to exception
 throw; // pass the exception to some other handler
}
```

— *end example*]

- <sup>4</sup> If no exception is presently being handled, evaluating a *throw-expression* with no operand calls `std::terminate()` (18.5.1).

### 8.5.18 Assignment and compound assignment operators

[**expr.ass**]

- <sup>1</sup> The assignment operator (=) and the compound assignment operators all group right-to-left. All require a modifiable lvalue as their left operand; their result is an lvalue referring to the left operand. The result in all cases is a bit-field if the left operand is a bit-field. In all cases, the assignment is sequenced after the value computation of the right and left operands, and before the value computation of the assignment expression. The right operand is sequenced before the left operand. With respect to an indeterminately-sequenced function call, the operation of a compound assignment is a single evaluation. [*Note:* Therefore, a function call shall not intervene between the lvalue-to-rvalue conversion and the side effect associated with any single compound assignment operator. — *end note*]

*assignment-expression:*

*conditional-expression*

*logical-or-expression assignment-operator initializer-clause*

*throw-expression*

*assignment-operator:* one of

= \*= /= %= += -= >>= <<= &= ^= |=

- <sup>2</sup> In simple assignment (=), the object referred to by the left operand is modified by replacing its value with the result of the right operand.

- 3 If the left operand is not of class type, the expression is implicitly converted (Clause 7) to the cv-unqualified type of the left operand.
- 4 If the left operand is of class type, the class shall be complete. Assignment to objects of a class is defined by the copy/move assignment operator (15.8, 16.5.3).
- 5 [Note: For class objects, assignment is not in general the same as initialization (11.6, 15.1, 15.6, 15.8). — end note]
- 6 When the left operand of an assignment operator is a bit-field that cannot represent the value of the expression, the resulting value of the bit-field is implementation-defined.
- 7 The behavior of an expression of the form **E1 op= E2** is equivalent to **E1 = E1 op E2** except that **E1** is evaluated only once. In **+=** and **-=**, **E1** shall either have arithmetic type or be a pointer to a possibly cv-qualified completely-defined object type. In all other cases, **E1** shall have arithmetic type.
- 8 If the value being stored in an object is read via another object that overlaps in any way the storage of the first object, then the overlap shall be exact and the two objects shall have the same type, otherwise the behavior is undefined. [Note: This restriction applies to the relationship between the left and right sides of the assignment operation; it is not a statement about how the target of the assignment may be aliased in general. See 8.2.1. — end note]
- 9 A *braced-init-list* may appear on the right-hand side of
  - (9.1) — an assignment to a scalar, in which case the initializer list shall have at most a single element. The meaning of **x = {v}**, where **T** is the scalar type of the expression **x**, is that of **x = T{v}**. The meaning of **x = {}** is **x = T{}**.
  - (9.2) — an assignment to an object of class type, in which case the initializer list is passed as the argument to the assignment operator function selected by overload resolution (16.5.3, 16.3).

[Example:

```

complex<double> z;
z = { 1, 2 }; // meaning z.operator=({1,2})
z += { 1, 2 }; // meaning z.operator+=({1,2})
int a, b;
a = b = { 1 }; // meaning a=b=1;
a = { 1 } = b; // syntax error

```

— end example]

### 8.5.19 Comma operator

[expr.comma]

- 1 The comma operator groups left-to-right.

*expression:*

```

assignment-expression
expression , assignment-expression

```

A pair of expressions separated by a comma is evaluated left-to-right; the left expression is a discarded-value expression (8.2). Every value computation and side effect associated with the left expression is sequenced before every value computation and side effect associated with the right expression. The type and value of the result are the type and value of the right operand; the result is of the same value category as its right operand, and is a bit-field if its right operand is a bit-field. If the right operand is a temporary expression (15.2), the result is a temporary expression.

- 2 In contexts where comma is given a special meaning, [Example: in lists of arguments to functions (8.5.1.2) and lists of initializers (11.6) — end example] the comma operator as described in this subclause can appear only in parentheses. [Example:

```
f(a, (t=3, t+2), c);
```

has three arguments, the second of which has the value 5. — end example]

### 8.6 Constant expressions

[expr.const]

- 1 Certain contexts require expressions that satisfy additional requirements as detailed in this subclause; other contexts have different semantics depending on whether or not an expression satisfies these requirements. Expressions that satisfy these requirements, assuming that copy elision is performed, are called *constant expressions*. [Note: Constant expressions can be evaluated during translation. — end note]

*constant-expression:*  
*conditional-expression*

<sup>2</sup> An expression **e** is a *core constant expression* unless the evaluation of **e**, following the rules of the abstract machine (6.8.1), would evaluate one of the following expressions:

- (2.1) — **this** (8.4.2), except in a `constexpr` function or a `constexpr` constructor that is being evaluated as part of **e**;
- (2.2) — an invocation of a function other than a `constexpr` constructor for a literal class, a `constexpr` function, or an implicit invocation of a trivial destructor (15.4) [*Note*: Overload resolution (16.3) is applied as usual — *end note*];
- (2.3) — an invocation of an undefined `constexpr` function or an undefined `constexpr` constructor;
- (2.4) — an invocation of an instantiated `constexpr` function or `constexpr` constructor that fails to satisfy the requirements for a `constexpr` function or `constexpr` constructor (10.1.5);
- (2.5) — an expression that would exceed the implementation-defined limits (see Annex B);
- (2.6) — an operation that would have undefined behavior as specified in Clause 4 through Clause 19 of this document [*Note*: including, for example, signed integer overflow (8.2), certain pointer arithmetic (8.5.6), division by zero (8.5.5), or certain shift operations (8.5.7) — *end note*];
- (2.7) — an lvalue-to-rvalue conversion (7.1) unless it is applied to
  - (2.7.1) — a non-volatile glvalue of integral or enumeration type that refers to a complete non-volatile const object with a preceding initialization, initialized with a constant expression, or
  - (2.7.2) — a non-volatile glvalue that refers to a subobject of a string literal (5.13.5), or
  - (2.7.3) — a non-volatile glvalue that refers to a non-volatile object defined with `constexpr` or a template parameter object (17.1), or that refers to a non-mutable subobject of such an object, or
  - (2.7.4) — a non-volatile glvalue of literal type that refers to a non-volatile object whose lifetime began within the evaluation of **e**;
- (2.8) — an lvalue-to-rvalue conversion (7.1) that is applied to a glvalue that refers to a non-active member of a union or a subobject thereof;
- (2.9) — an invocation of an implicitly-defined copy/move constructor or copy/move assignment operator for a union whose active member (if any) is mutable, unless the lifetime of the union object began within the evaluation of **e**;
- (2.10) — an assignment expression (8.5.18) or invocation of an assignment operator (15.8) that would change the active member of a union;
- (2.11) — an *id-expression* that refers to a variable or data member of reference type unless the reference has a preceding initialization and either
  - (2.11.1) — it is initialized with a constant expression or
  - (2.11.2) — its lifetime began within the evaluation of **e**;
- (2.12) — a checked contract (10.6.4) whose predicate evaluates to **false**;
- (2.13) — in a *lambda-expression*, a reference to **this** or to a variable with automatic storage duration defined outside that *lambda-expression*, where the reference would be an odr-use (6.2, 8.4.5); [*Example*:

```
void g() {
 const int n = 0;
 [=] {
 constexpr int i = n; // OK, n is not odr-used here
 constexpr int j = *&n; // ill-formed, &n would be an odr-use of n
 };
}
```

— *end example*] [*Note*: If the odr-use occurs in an invocation of a function call operator of a closure type, it no longer refers to **this** or to an enclosing automatic variable due to the transformation (8.4.5.2) of the *id-expression* into an access of the corresponding data member. [*Example*:

```
auto monad = [] (auto v) { return [=] { return v; }; };
```

```

 auto bind = [](auto m) {
 return [=](auto fvm) { return fvm(m()); };
 };

 // OK to have captures to automatic objects created during constant expression evaluation.
 static_assert(bind(monad(2))(monad()) == monad(2)());
 — end example] — end note]

```

- (2.14) — a conversion from type *cv void\** to a pointer-to-object type;
- (2.15) — a dynamic cast (8.5.1.7);
- (2.16) — a `reinterpret_cast` (8.5.1.10);
- (2.17) — a pseudo-destructor call (8.5.1.4);
- (2.18) — modification of an object (8.5.18, 8.5.1.6, 8.5.2.2) unless it is applied to a non-volatile lvalue of literal type that refers to a non-volatile object whose lifetime began within the evaluation of *e*;
- (2.19) — a typeid expression (8.5.1.8) whose operand is a glvalue of a polymorphic class type;
- (2.20) — a *new-expression* (8.5.2.4);
- (2.21) — a *delete-expression* (8.5.2.5);
- (2.22) — a three-way comparison (8.5.8) comparing pointers that do not point to the same complete object or to any subobject thereof;
- (2.23) — a relational (8.5.9) or equality (8.5.10) operator where the result is unspecified;
- (2.24) — a *throw-expression* (8.5.17); or
- (2.25) — an invocation of the `va_arg` macro (21.12.1).

If *e* satisfies the constraints of a core constant expression, but evaluation of *e* would evaluate an operation that has undefined behavior as specified in Clause 20 through Clause 34 of this document, or an invocation of the `va_start` macro (21.12.1), it is unspecified whether *e* is a core constant expression.

[Example:

```

int x; // not constant
struct A {
 constexpr A(bool b) : m(b?42:x) { }
 int m;
};
constexpr int v = A(true).m; // OK: constructor call initializes m with the value 42

constexpr int w = A(false).m; // error: initializer for m is x, which is non-constant

constexpr int f1(int k) {
 constexpr int x = k; // error: x is not initialized by a constant expression
 // because lifetime of k began outside the initializer of x
 return x;
}
constexpr int f2(int k) {
 int x = k; // OK: not required to be a constant expression
 // because x is not constexpr
 return x;
}

constexpr int incr(int &n) {
 return ++n;
}
constexpr int g(int k) {
 constexpr int x = incr(k); // error: incr(k) is not a core constant expression
 // because lifetime of k began outside the expression incr(k)
 return x;
}
constexpr int h(int k) {
 int x = incr(k); // OK: incr(k) is not required to be a core constant expression
}

```



```

 return x;
}
constexpr int y = h(1); // OK: initializes y with the value 2
 // h(1) is a core constant expression because
 // the lifetime of k begins inside h(1)

```

— end example]

- 3 An *integral constant expression* is an expression of integral or unscoped enumeration type, implicitly converted to a prvalue, where the converted expression is a core constant expression. [Note: Such expressions may be used as bit-field lengths (12.2.4), as enumerator initializers if the underlying type is not fixed (10.2), and as alignments (10.6.2). — end note]
- 4 If an expression of literal class type is used in a context where an integral constant expression is required, then that expression is contextually implicitly converted (Clause 7) to an integral or unscoped enumeration type and the selected conversion function shall be `constexpr`. [Example:

```

struct A {
 constexpr A(int i) : val(i) { }
 constexpr operator int() const { return val; }
 constexpr operator long() const { return 42; }
private:
 int val;
};
template<int> struct X { };
constexpr A a = alignof(int);
alignas(a) int n; // error: ambiguous conversion
struct B { int n : a; }; // error: ambiguous conversion

```

— end example]

- 5 A *converted constant expression* of type T is an expression, implicitly converted to type T, where the converted expression is a constant expression and the implicit conversion sequence contains only
- (5.1) — user-defined conversions,
  - (5.2) — lvalue-to-rvalue conversions (7.1),
  - (5.3) — array-to-pointer conversions (7.2),
  - (5.4) — function-to-pointer conversions (7.3),
  - (5.5) — qualification conversions (7.5),
  - (5.6) — integral promotions (7.6),
  - (5.7) — integral conversions (7.8) other than narrowing conversions (11.6.4),
  - (5.8) — null pointer conversions (7.11) from `std::nullptr_t`,
  - (5.9) — null member pointer conversions (7.12) from `std::nullptr_t`, and
  - (5.10) — function pointer conversions (7.13),

and where the reference binding (if any) binds directly. [Note: Such expressions may be used in `new` expressions (8.5.2.4), as case expressions (9.4.2), as enumerator initializers if the underlying type is fixed (10.2), as array bounds (11.3.4), and as non-type template arguments (17.3). — end note] A *contextually converted constant expression of type bool* is an expression, contextually converted to `bool` (Clause 7), where the converted expression is a constant expression and the conversion sequence contains only the conversions above.

- 6 A *constant expression* is either a glvalue core constant expression that refers to an entity that is a permitted result of a constant expression (as defined below), or a prvalue core constant expression whose value satisfies the following constraints:
- (6.1) — if the value is an object of class type, each non-static data member of reference type refers to an entity that is a permitted result of a constant expression,
  - (6.2) — if the value is of pointer type, it contains the address of an object with static storage duration, the address past the end of such an object (8.5.6), the address of a function, or a null pointer value, and
  - (6.3) — if the value is an object of class or array type, each subobject satisfies these constraints for the value.

An entity is a *permitted result of a constant expression* if it is an object with static storage duration that is either not a temporary object or is a temporary object whose value satisfies the above constraints, or it is a function.

- <sup>7</sup> [Note: Since this document imposes no restrictions on the accuracy of floating-point operations, it is unspecified whether the evaluation of a floating-point expression during translation yields the same result as the evaluation of the same expression (or the same operations on the same values) during program execution.<sup>88</sup>

[Example:

```
bool f() {
 char array[1 + int(1 + 0.2 - 0.1 - 0.1)]; // Must be evaluated during translation
 int size = 1 + int(1 + 0.2 - 0.1 - 0.1); // May be evaluated at runtime
 return sizeof(array) == size;
}
```

It is unspecified whether the value of `f()` will be `true` or `false`. — end example] — end note]

- <sup>8</sup> An expression is *potentially constant evaluated* if it is:

- (8.1) — a potentially-evaluated expression (6.2),
- (8.2) — a *constraint-expression*, including one formed from the *constraint-logical-or-expression* of a *requires-clause*,
- (8.3) — an immediate subexpression of a *braced-init-list*,<sup>89</sup>
- (8.4) — an expression of the form *& cast-expression* that occurs within a templated entity,<sup>90</sup> or
- (8.5) — a subexpression of one of the above that is not a subexpression of a nested unevaluated operand.

A function or variable is *needed for constant evaluation* if it is:

- (8.6) — a *constexpr* function that is named by an expression (6.2) that is potentially constant evaluated, or
- (8.7) — a variable whose name appears as a potentially constant evaluated expression that is either a *constexpr* variable or is of non-volatile *const-qualified* integral type or of reference type.

---

<sup>88</sup>) Nonetheless, implementations should provide consistent results, irrespective of whether the evaluation was performed during translation and/or during program execution.

<sup>89</sup>) Constant evaluation may be necessary to determine whether a narrowing conversion is performed (11.6.4).

<sup>90</sup>) Constant evaluation may be necessary to determine whether such an expression is value-dependent (17.7.2.3).

## 9 Statements

[stmt.stmt]

- <sup>1</sup> Except as indicated, statements are executed in sequence.

*statement:*

*labeled-statement*  
*attribute-specifier-seq<sub>opt</sub> expression-statement*  
*attribute-specifier-seq<sub>opt</sub> compound-statement*  
*attribute-specifier-seq<sub>opt</sub> selection-statement*  
*attribute-specifier-seq<sub>opt</sub> iteration-statement*  
*attribute-specifier-seq<sub>opt</sub> jump-statement*  
*declaration-statement*  
*attribute-specifier-seq<sub>opt</sub> try-block*

*init-statement:*

*expression-statement*  
*simple-declaration*

*condition:*

*expression*  
*attribute-specifier-seq<sub>opt</sub> decl-specifier-seq declarator brace-or-equal-initializer*

The optional *attribute-specifier-seq* appertains to the respective statement.

- <sup>2</sup> The rules for *conditions* apply both to *selection-statements* and to the **for** and **while** statements (9.5). A *condition* that is not an *expression* is a declaration (Clause 10). The *declarator* shall not specify a function or an array. The *decl-specifier-seq* shall not define a class or enumeration. If the **auto** *type-specifier* appears in the *decl-specifier-seq*, the type of the identifier being declared is deduced from the initializer as described in 10.1.7.4.
- <sup>3</sup> A name introduced by a declaration in a *condition* (either introduced by the *decl-specifier-seq* or the *declarator* of the condition) is in scope from its point of declaration until the end of the substatements controlled by the condition. If the name is redeclared in the outermost block of a substatement controlled by the condition, the declaration that redeclares the name is ill-formed. [Example:

```
if (int x = f()) {
 int x; // ill-formed, redeclaration of x
}
else {
 int x; // ill-formed, redeclaration of x
}
```

— end example]

- <sup>4</sup> The value of a *condition* that is an initialized declaration in a statement other than a **switch** statement is the value of the declared variable contextually converted to **bool** (Clause 7). If that conversion is ill-formed, the program is ill-formed. The value of a *condition* that is an initialized declaration in a **switch** statement is the value of the declared variable if it has integral or enumeration type, or of that variable implicitly converted to integral or enumeration type otherwise. The value of a *condition* that is an expression is the value of the expression, contextually converted to **bool** for statements other than **switch**; if that conversion is ill-formed, the program is ill-formed. The value of the condition will be referred to as simply “the condition” where the usage is unambiguous.
- <sup>5</sup> If a *condition* can be syntactically resolved as either an expression or the declaration of a block-scope name, it is interpreted as a declaration.
- <sup>6</sup> In the *decl-specifier-seq* of a *condition*, each *decl-specifier* shall be either a *type-specifier* or **constexpr**.

### 9.1 Labeled statement

[stmt.label]

- <sup>1</sup> A statement can be labeled.

*labeled-statement:*

*attribute-specifier-seq<sub>opt</sub> identifier : statement*  
*attribute-specifier-seq<sub>opt</sub> case constant-expression : statement*  
*attribute-specifier-seq<sub>opt</sub> default : statement*

The optional *attribute-specifier-seq* appertains to the label. An *identifier label* declares the identifier. The only use of an identifier label is as the target of a `goto`. The scope of a label is the function in which it appears. Labels shall not be redeclared within a function. A label can be used in a `goto` statement before its declaration. Labels have their own name space and do not interfere with other identifiers. [*Note*: A label may have the same name as another declaration in the same scope or a *template-parameter* from an enclosing scope. Unqualified name lookup (6.4.1) ignores labels. — *end note*]

- <sup>2</sup> Case labels and default labels shall occur only in `switch` statements.

## 9.2 Expression statement [stmt.expr]

- <sup>1</sup> Expression statements have the form

```
expression-statement:
 expressionopt ;
```

The expression is a discarded-value expression (8.2). All side effects from an expression statement are completed before the next statement is executed. An expression statement with the expression missing is called a *null statement*. [*Note*: Most statements are expression statements — usually assignments or function calls. A null statement is useful to carry a label just before the `}` of a compound statement and to supply a null body to an iteration statement such as a `while` statement (9.5.1). — *end note*]

## 9.3 Compound statement or block [stmt.block]

- <sup>1</sup> So that several statements can be used where one is expected, the compound statement (also, and equivalently, called “block”) is provided.

```
compound-statement:
 { statement-seqopt }

statement-seq:
 statement
 statement-seq statement
```

A compound statement defines a block scope (6.3). [*Note*: A declaration is a *statement* (9.7). — *end note*]

## 9.4 Selection statements [stmt.select]

- <sup>1</sup> Selection statements choose one of several flows of control.

```
selection-statement:
 if constexpropt (init-statementopt condition) statement
 if constexpropt (init-statementopt condition) statement else statement
 switch (init-statementopt condition) statement
```

See 11.3 for the optional *attribute-specifier-seq* in a condition. [*Note*: An *init-statement* ends with a semicolon. — *end note*] In Clause 9, the term *substatement* refers to the contained *statement* or *statements* that appear in the syntax notation. The substatement in a *selection-statement* (each substatement, in the `else` form of the `if` statement) implicitly defines a block scope (6.3). If the substatement in a selection-statement is a single statement and not a *compound-statement*, it is as if it was rewritten to be a compound-statement containing the original substatement. [*Example*:

```
if (x)
 int i;
```

can be equivalently rewritten as

```
if (x) {
 int i;
}
```

Thus after the `if` statement, `i` is no longer in scope. — *end example*]

### 9.4.1 The `if` statement [stmt.if]

- <sup>1</sup> If the condition (9.4) yields `true` the first substatement is executed. If the `else` part of the selection statement is present and the condition yields `false`, the second substatement is executed. If the first substatement is reached via a label, the condition is not evaluated and the second substatement is not executed. In the second form of `if` statement (the one including `else`), if the first substatement is also an `if` statement then that inner `if` statement shall contain an `else` part.<sup>91</sup>

<sup>91</sup>) In other words, the `else` is associated with the nearest un-elsed `if`.

- <sup>2</sup> If the `if` statement is of the form `if constexpr`, the value of the condition shall be a contextually converted constant expression of type `bool` (8.6); this form is called a *constexpr if* statement. If the value of the converted condition is `false`, the first substatement is a *discarded statement*, otherwise the second substatement, if present, is a discarded statement. During the instantiation of an enclosing templated entity (Clause 17), if the condition is not value-dependent after its instantiation, the discarded substatement (if any) is not instantiated. [Note: Odr-uses (6.2) in a discarded statement do not require an entity to be defined. — end note] A `case` or `default` label appearing within such an `if` statement shall be associated with a `switch` statement (9.4.2) within the same `if` statement. A label (9.1) declared in a substatement of a `constexpr if` statement shall only be referred to by a statement (9.6.4) in the same substatement. [Example:

```
template<typename T, typename ... Rest> void g(T&& p, Rest&& ...rs) {
 // ... handle p

 if constexpr (sizeof...(rs) > 0)
 g(rs...); // never instantiated with an empty argument list
}

extern int x; // no definition of x required

int f() {
 if constexpr (true)
 return 0;
 else if (x)
 return x;
 else
 return -x;
}
```

— end example]

- <sup>3</sup> An `if` statement of the form

```
if constexpropt (init-statement condition) statement
```

is equivalent to

```
{
 init-statement
 if constexpropt (condition) statement
}
```

and an `if` statement of the form

```
if constexpropt (init-statement condition) statement else statement
```

is equivalent to

```
{
 init-statement
 if constexpropt (condition) statement else statement
}
```

except that names declared in the *init-statement* are in the same declarative region as those declared in the *condition*.

## 9.4.2 The `switch` statement

[stmt.switch]

- <sup>1</sup> The `switch` statement causes control to be transferred to one of several statements depending on the value of a condition.
- <sup>2</sup> The condition shall be of integral type, enumeration type, or class type. If of class type, the condition is contextually implicitly converted (Clause 7) to an integral or enumeration type. If the (possibly converted) type is subject to integral promotions (7.6), the condition is converted to the promoted type. Any statement within the `switch` statement can be labeled with one or more case labels as follows:

```
case constant-expression :
```

where the *constant-expression* shall be a converted constant expression (8.6) of the adjusted type of the switch condition. No two of the case constants in the same switch shall have the same value after conversion.

- <sup>3</sup> There shall be at most one label of the form

**default** :

within a **switch** statement.

- 4 Switch statements can be nested; a **case** or **default** label is associated with the smallest switch enclosing it.
- 5 When the **switch** statement is executed, its condition is evaluated and compared with each case constant. If one of the case constants is equal to the value of the condition, control is passed to the statement following the matched case label. If no case constant matches the condition, and if there is a **default** label, control passes to the statement labeled by the default label. If no case matches and if there is no **default** then none of the statements in the switch is executed.
- 6 **case** and **default** labels in themselves do not alter the flow of control, which continues unimpeded across such labels. To exit from a switch, see **break**, 9.6.1. [Note: Usually, the substatement that is the subject of a switch is compound and **case** and **default** labels appear on the top-level statements contained within the (compound) substatement, but this is not required. Declarations can appear in the substatement of a **switch** statement. — end note]
- 7 A **switch** statement of the form

```
switch (init-statement condition) statement
```

is equivalent to

```
{
 init-statement
 switch (condition) statement
}
```

except that names declared in the *init-statement* are in the same declarative region as those declared in the *condition*.

## 9.5 Iteration statements

[stmt.iter]

- 1 Iteration statements specify looping.

*iteration-statement*:

```
while (condition) statement
do statement while (expression) ;
for (init-statement conditionopt ; expressionopt) statement
for (init-statementopt for-range-declaration : for-range-initializer) statement
```

*for-range-declaration*:

```
attribute-specifier-seqopt decl-specifier-seq declarator
attribute-specifier-seqopt decl-specifier-seq ref-qualifieropt [identifier-list]
```

*for-range-initializer*:

```
expr-or-braced-init-list
```

See 11.3 for the optional *attribute-specifier-seq* in a *for-range-declaration*. [Note: An *init-statement* ends with a semicolon. — end note]

- 2 The substatement in an *iteration-statement* implicitly defines a block scope (6.3) which is entered and exited each time through the loop.

If the substatement in an iteration-statement is a single statement and not a *compound-statement*, it is as if it was rewritten to be a compound-statement containing the original statement. [Example:

```
while (--x >= 0)
 int i;
```

can be equivalently rewritten as

```
while (--x >= 0) {
 int i;
}
```

Thus after the **while** statement, *i* is no longer in scope. — end example]

- 3 If a name introduced in an *init-statement* or *for-range-declaration* is redeclared in the outermost block of the substatement, the program is ill-formed. [Example:

```
void f() {
 for (int i = 0; i < 10; ++i)
 int i = 0; // error: redeclaration
```

```

 for (int i : { 1, 2, 3 })
 int i = 1; // error: redeclaration
 }
— end example]

```

### 9.5.1 The while statement [stmt.while]

- 1 In the **while** statement the substatement is executed repeatedly until the value of the condition (9.4) becomes **false**. The test takes place before each execution of the substatement.
- 2 When the condition of a **while** statement is a declaration, the scope of the variable that is declared extends from its point of declaration (6.3.2) to the end of the **while** statement. A **while** statement whose *condition* is an initialized declaration of some variable **t** is equivalent to

```

label:
{
 condition ; // start of condition scope
 if (t) { // declares t
 statement
 goto label;
 }
}
// end of condition scope

```

[Note: The variable created in the condition is destroyed and created with each iteration of the loop. [Example:

```

struct A {
 int val;
 A(int i) : val(i) { }
 ~A() { }
 operator bool() { return val != 0; }
};
int i = 1;
while (A a = i) {
 // ...
 i = 0;
}

```

In the while-loop, the constructor and destructor are each called twice, once for the condition that succeeds and once for the condition that fails. — end example] — end note]

### 9.5.2 The do statement [stmt.do]

- 1 The expression is contextually converted to **bool** (Clause 7); if that conversion is ill-formed, the program is ill-formed.
- 2 In the **do** statement the substatement is executed repeatedly until the value of the expression becomes **false**. The test takes place after each execution of the statement.

### 9.5.3 The for statement [stmt.for]

- 1 The **for** statement

```

for (init-statement conditionopt ; expressionopt) statement

```

is equivalent to

```

{
 init-statement
 while (condition) {
 statement
 expression ;
 }
}

```

except that names declared in the *init-statement* are in the same declarative region as those declared in the *condition*, and except that a **continue** in *statement* (not enclosed in another iteration statement) will execute *expression* before re-evaluating *condition*. [Note: Thus the first statement specifies initialization for the loop; the condition (9.4) specifies a test, sequenced before each iteration, such that the loop is exited when the condition becomes **false**; the expression often specifies incrementing that is sequenced after each iteration. — end note]

- <sup>2</sup> Either or both of the *condition* and the *expression* can be omitted. A missing *condition* makes the implied **while** clause equivalent to **while(true)**.
- <sup>3</sup> If the *init-statement* is a declaration, the scope of the name(s) declared extends to the end of the **for** statement. [Example:

```
int i = 42;
int a[10];

for (int i = 0; i < 10; i++)
 a[i] = i;

int j = i; // j = 42
— end example]
```

#### 9.5.4 The range-based for statement

[stmt.ranged]

- <sup>1</sup> The range-based for statement

```
for (init-statementopt for-range-declaration : for-range-initializer) statement
```

is equivalent to

```
{
 init-statementopt
 auto &&__range = for-range-initializer ;
 auto __begin = begin-expr ;
 auto __end = end-expr ;
 for (; __begin != __end; ++__begin) {
 for-range-declaration = *__begin;
 statement
 }
}
```

where

- (1.1) — if the *for-range-initializer* is an *expression*, it is regarded as if it were surrounded by parentheses (so that a comma operator cannot be reinterpreted as delimiting two *init-declarators*);
- (1.2) — `__range`, `__begin`, and `__end` are variables defined for exposition only; and
- (1.3) — *begin-expr* and *end-expr* are determined as follows:
- (1.3.1) — if the *for-range-initializer* is an expression of array type **R**, *begin-expr* and *end-expr* are `__range` and `__range + __bound`, respectively, where `__bound` is the array bound. If **R** is an array of unknown bound or an array of incomplete type, the program is ill-formed;
- (1.3.2) — if the *for-range-initializer* is an expression of class type **C**, the *unqualified-ids* `begin` and `end` are looked up in the scope of **C** as if by class member access lookup (6.4.5), and if both find at least one declaration, *begin-expr* and *end-expr* are `__range.begin()` and `__range.end()`, respectively;
- (1.3.3) — otherwise, *begin-expr* and *end-expr* are `begin(__range)` and `end(__range)`, respectively, where `begin` and `end` are looked up in the associated namespaces (6.4.2). [Note: Ordinary unqualified lookup (6.4.1) is not performed. — end note]

[Example:

```
int array[5] = { 1, 2, 3, 4, 5 };
for (int& x : array)
 x *= 2;
```

— end example]

- <sup>2</sup> In the *decl-specifier-seq* of a *for-range-declaration*, each *decl-specifier* shall be either a *type-specifier* or *constexpr*. The *decl-specifier-seq* shall not define a class or enumeration.

## 9.6 Jump statements

[stmt.jump]

- <sup>1</sup> Jump statements unconditionally transfer control.



```

jump-statement:
 break ;
 continue ;
 return expr-or-braced-init-listopt ;
 goto identifier ;

```

- <sup>2</sup> On exit from a scope (however accomplished), objects with automatic storage duration (6.6.4.3) that have been constructed in that scope are destroyed in the reverse order of their construction. [Note: For temporaries, see 15.2. — *end note*] Transfer out of a loop, out of a block, or back past an initialized variable with automatic storage duration involves the destruction of objects with automatic storage duration that are in scope at the point transferred from but not at the point transferred to. (See 9.7 for transfers into blocks). [Note: However, the program can be terminated (by calling `std::exit()` or `std::abort()` (21.5), for example) without destroying class objects with automatic storage duration. — *end note*]

### 9.6.1 The break statement [stmt.break]

- <sup>1</sup> The **break** statement shall occur only in an *iteration-statement* or a **switch** statement and causes termination of the smallest enclosing *iteration-statement* or **switch** statement; control passes to the statement following the terminated statement, if any.

### 9.6.2 The continue statement [stmt.cont]

- <sup>1</sup> The **continue** statement shall occur only in an *iteration-statement* and causes control to pass to the loop-continuation portion of the smallest enclosing *iteration-statement*, that is, to the end of the loop. More precisely, in each of the statements

|                                                                       |                                                                           |                                                                    |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------|
| <pre> while (foo) {     {         // ...     }     contin: ; } </pre> | <pre> do {     {         // ...     }     contin: ; } while (foo); </pre> | <pre> for (;;) {     {         // ...     }     contin: ; } </pre> |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------|

a **continue** not contained in an enclosed iteration statement is equivalent to `goto contin`.

### 9.6.3 The return statement [stmt.return]

- <sup>1</sup> A function returns to its caller by the **return** statement.
- <sup>2</sup> The *expr-or-braced-init-list* of a **return** statement is called its operand. A **return** statement with no operand shall be used only in a function whose return type is *cv void*, a constructor (15.1), or a destructor (15.4). A **return** statement with an operand of type *void* shall be used only in a function whose return type is *cv void*. A **return** statement with any other operand shall be used only in a function whose return type is not *cv void*; the **return** statement initializes the glvalue result or prvalue result object of the (explicit or implicit) function call by copy-initialization (11.6) from the operand. [Note: A **return** statement can involve an invocation of a constructor to perform a copy or move of the operand if it is not a prvalue or if its type differs from the return type of the function. A copy operation associated with a **return** statement may be elided or converted to a move operation if an automatic storage duration variable is returned (15.8). — *end note*] [Example:

```

std::pair<std::string,int> f(const char* p, int x) {
 return {p,x};
}

```

— *end example*] Flowing off the end of a constructor, a destructor, or a function with a *cv void* return type is equivalent to a **return** with no operand. Otherwise, flowing off the end of a function other than **main** (6.8.3.1) results in undefined behavior.

- <sup>3</sup> The copy-initialization of the result of the call is sequenced before the destruction of temporaries at the end of the full-expression established by the operand of the **return** statement, which, in turn, is sequenced before the destruction of local variables (9.6) of the block enclosing the **return** statement.

### 9.6.4 The goto statement [stmt.goto]

- <sup>1</sup> The **goto** statement unconditionally transfers control to the statement labeled by the identifier. The identifier shall be a label (9.1) located in the current function.

## 9.7 Declaration statement

[stmt.dcl]

- <sup>1</sup> A declaration statement introduces one or more new identifiers into a block; it has the form

*declaration-statement*:  
*block-declaration*

If an identifier introduced by a declaration was previously declared in an outer block, the outer declaration is hidden for the remainder of the block, after which it resumes its force.

- <sup>2</sup> Variables with automatic storage duration (6.6.4.3) are initialized each time their *declaration-statement* is executed. Variables with automatic storage duration declared in the block are destroyed on exit from the block (9.6).
- <sup>3</sup> It is possible to transfer into a block, but not in a way that bypasses declarations with initialization (including ones in *conditions* and *init-statements*). A program that jumps<sup>92</sup> from a point where a variable with automatic storage duration is not in scope to a point where it is in scope is ill-formed unless the variable has scalar type, class type with a trivial default constructor and a trivial destructor, a cv-qualified version of one of these types, or an array of one of the preceding types and is declared without an *initializer* (11.6). [Example:

```
void f() {
 // ...
 goto lx; // ill-formed: jump into scope of a
 // ...
ly:
 X a = 1;
 // ...
lx:
 goto ly; // OK, jump implies destructor call for a followed by
 // construction again immediately following label ly
}
```

— end example]

- <sup>4</sup> Dynamic initialization of a block-scope variable with static storage duration (6.6.4.1) or thread storage duration (6.6.4.2) is performed the first time control passes through its declaration; such a variable is considered initialized upon the completion of its initialization. If the initialization exits by throwing an exception, the initialization is not complete, so it will be tried again the next time control enters the declaration. If control enters the declaration concurrently while the variable is being initialized, the concurrent execution shall wait for completion of the initialization.<sup>93</sup> If control re-enters the declaration recursively while the variable is being initialized, the behavior is undefined. [Example:

```
int foo(int i) {
 static int s = foo(2*i); // recursive call - undefined
 return i+1;
}
```

— end example]

- <sup>5</sup> The destructor for a block-scope object with static or thread storage duration will be executed if and only if it was constructed. [Note: 6.8.3.4 describes the order in which block-scope objects with static and thread storage duration are destroyed. — end note]

## 9.8 Ambiguity resolution

[stmt.ambig]

- <sup>1</sup> There is an ambiguity in the grammar involving *expression-statements* and *declarations*: An *expression-statement* with a function-style explicit type conversion (8.5.1.3) as its leftmost subexpression can be indistinguishable from a *declaration* where the first *declarator* starts with a (. In those cases the *statement* is a *declaration*.
- <sup>2</sup> [Note: If the *statement* cannot syntactically be a *declaration*, there is no ambiguity, so this rule does not apply. The whole *statement* might need to be examined to determine whether this is the case. This resolves the meaning of many examples. [Example: Assuming T is a *simple-type-specifier* (10.1.7),

```
T(a)->m = 7; // expression-statement
T(a)++; // expression-statement
T(a,5)<<c; // expression-statement
```

<sup>92</sup>) The transfer from the condition of a `switch` statement to a `case` label is considered a jump in this respect.

<sup>93</sup>) The implementation must not introduce any deadlock around execution of the initializer. Deadlocks might still be caused by the program logic; the implementation need only avoid deadlocks due to its own synchronization operations.

```
T(*d)(int); // declaration
T(e)[5]; // declaration
T(f) = { 1, 2 }; // declaration
T(*g)(double(3)); // declaration
```

In the last example above, `g`, which is a pointer to `T`, is initialized to `double(3)`. This is of course ill-formed for semantic reasons, but that does not affect the syntactic analysis. — *end example*]

The remaining cases are *declarations*. [*Example*:

```
class T {
 // ...
public:
 T();
 T(int);
 T(int, int);
};
T(a); // declaration
T(*b)(); // declaration
T(c)=7; // declaration
T(d),e,f=3; // declaration
extern int h;
T(g)(h,2); // declaration
```

— *end example*] — *end note*]

- <sup>3</sup> The disambiguation is purely syntactic; that is, the meaning of the names occurring in such a statement, beyond whether they are *type-names* or not, is not generally used in or changed by the disambiguation. Class templates are instantiated as necessary to determine if a qualified name is a *type-name*. Disambiguation precedes parsing, and a statement disambiguated as a declaration may be an ill-formed declaration. If, during parsing, a name in a template parameter is bound differently than it would be bound during a trial parse, the program is ill-formed. No diagnostic is required. [*Note*: This can occur only when the name is declared earlier in the declaration. — *end note*] [*Example*:

```
struct T1 {
 T1 operator()(int x) { return T1(x); }
 int operator=(int x) { return x; }
 T1(int) { }
};
struct T2 { T2(int){ } };
int a, (*(b)(T2))(int), c, d;

void f() {
 // disambiguation requires this to be parsed as a declaration:
 T1(a) = 3,
 T2(4),
 (*(b)(T2(c)))(int(d));
}
// T2 will be declared as a variable of type T1, but this will not
// allow the last part of the declaration to parse properly,
// since it depends on T2 being a type-name
```

— *end example*]

# 10 Declarations

[dcl.dcl]

<sup>1</sup> Declarations generally specify how names are to be interpreted. Declarations have the form

```

declaration-seq:
 declaration
 declaration-seq declaration

declaration:
 block-declaration
 nodeclspec-function-declaration
 function-definition
 template-declaration
 deduction-guide
 explicit-instantiation
 explicit-specialization
 linkage-specification
 namespace-definition
 empty-declaration
 attribute-declaration

block-declaration:
 simple-declaration
 asm-definition
 namespace-alias-definition
 using-declaration
 using-directive
 static_assert-declaration
 alias-declaration
 opaque-enum-declaration

nodeclspec-function-declaration:
 attribute-specifier-seqopt declarator ;

alias-declaration:
 using identifier attribute-specifier-seqopt = defining-type-id ;

simple-declaration:
 decl-specifier-seq init-declarator-listopt ;
 attribute-specifier-seq decl-specifier-seq init-declarator-list ;
 attribute-specifier-seqopt decl-specifier-seq ref-qualifieropt [identifier-list] initializer ;

static_assert-declaration:
 static_assert (constant-expression) ;
 static_assert (constant-expression , string-literal) ;

empty-declaration:
 ;

attribute-declaration:
 attribute-specifier-seq ;

```

[Note: *asm-definitions* are described in 10.4, and *linkage-specifications* are described in 10.5; *function-definitions* are described in 11.4 and *template-declarations* and *deduction-guides* are described in Clause 17; *namespace-definitions* are described in 10.3.1, *using-declarations* are described in 10.3.3 and *using-directives* are described in 10.3.4. — end note]

<sup>2</sup> A *simple-declaration* or *nodeclspec-function-declaration* of the form

```
attribute-specifier-seqopt decl-specifier-seqopt init-declarator-listopt ;
```

is divided into three parts. Attributes are described in 10.6. *decl-specifiers*, the principal components of a *decl-specifier-seq*, are described in 10.1. *declarators*, the components of an *init-declarator-list*, are described in Clause 11. The *attribute-specifier-seq* appertains to each of the entities declared by the *declarators* of the *init-declarator-list*. [Note: In the declaration for an entity, attributes appertaining to that entity may appear at the start of the declaration and after the *declarator-id* for that declaration. — end note] [Example:

```
[[noreturn]] void f [[noreturn]] (); // OK
```

— end example]

- <sup>3</sup> Except where otherwise specified, the meaning of an *attribute-declaration* is implementation-defined.
- <sup>4</sup> A declaration occurs in a scope (6.3); the scope rules are summarized in 6.4. A declaration that declares a function or defines a class, namespace, template, or function also has one or more scopes nested within it. These nested scopes, in turn, can have declarations nested within them. Unless otherwise stated, utterances in Clause 10 about components in, of, or contained by a declaration or subcomponent thereof refer only to those components of the declaration that are *not* nested within scopes nested within the declaration.
- <sup>5</sup> In a *simple-declaration*, the optional *init-declarator-list* can be omitted only when declaring a class (Clause 12) or enumeration (10.2), that is, when the *decl-specifier-seq* contains either a *class-specifier*, an *elaborated-type-specifier* with a *class-key* (12.1), or an *enum-specifier*. In these cases and whenever a *class-specifier* or *enum-specifier* is present in the *decl-specifier-seq*, the identifiers in these specifiers are among the names being declared by the declaration (as *class-names*, *enum-names*, or *enumerators*, depending on the syntax). In such cases, the *decl-specifier-seq* shall introduce one or more names into the program, or shall redeclare a name introduced by a previous declaration. [Example:

```
enum { }; // ill-formed
typedef class { }; // ill-formed
```

— end example]

- <sup>6</sup> In a *static\_assert-declaration*, the *constant-expression* shall be a contextually converted constant expression of type `bool` (8.6). If the value of the expression when so converted is `true`, the declaration has no effect. Otherwise, the program is ill-formed, and the resulting diagnostic message (4.1) shall include the text of the *string-literal*, if one is supplied, except that characters not in the basic source character set (5.3) are not required to appear in the diagnostic message. [Example:

```
static_assert(sizeof(int) == sizeof(void*), "wrong pointer size");
```

— end example]

- <sup>7</sup> An *empty-declaration* has no effect.
- <sup>8</sup> A *simple-declaration* with an *identifier-list* is called a *structured binding declaration* (11.5). The *decl-specifier-seq* shall contain only the *type-specifier* `auto` (10.1.7.4) and *cv-qualifiers*. The *initializer* shall be of the form “= *assignment-expression*”, of the form “{ *assignment-expression* }”, or of the form “( *assignment-expression* )”, where the *assignment-expression* is of array or non-union class type.
- <sup>9</sup> Each *init-declarator* in the *init-declarator-list* contains exactly one *declarator-id*, which is the name declared by that *init-declarator* and hence one of the names declared by the declaration. The *defining-type-specifiers* (10.1.7) in the *decl-specifier-seq* and the recursive *declarator* structure of the *init-declarator* describe a type (11.3), which is then associated with the name being declared by the *init-declarator*.
- <sup>10</sup> If the *decl-specifier-seq* contains the `typedef` specifier, the declaration is called a *typedef declaration* and the name of each *init-declarator* is declared to be a *typedef-name*, synonymous with its associated type (10.1.3). If the *decl-specifier-seq* contains no `typedef` specifier, the declaration is called a *function declaration* if the type associated with the name is a function type (11.3.5) and an *object declaration* otherwise.
- <sup>11</sup> Syntactic components beyond those found in the general form of declaration are added to a function declaration to make a *function-definition*. An object declaration, however, is also a definition unless it contains the `extern` specifier and has no initializer (6.1). A definition causes the appropriate amount of storage to be reserved and any appropriate initialization (11.6) to be done.
- <sup>12</sup> A *nodeclspec-function-declaration* shall declare a constructor, destructor, or conversion function.<sup>94</sup> [Note: A *nodeclspec-function-declaration* can only be used in a *template-declaration* (Clause 17), *explicit-instantiation* (17.8.2), or *explicit-specialization* (17.8.3). — end note]

## 10.1 Specifiers

[dcl.spec]

- <sup>1</sup> The specifiers that can be used in a declaration are

---

<sup>94</sup> The “implicit int” rule of C is no longer supported.

```

decl-specifier:
 storage-class-specifier
 defining-type-specifier
 function-specifier
 friend
 typedef
 constexpr
 inline

decl-specifier-seq:
 decl-specifier attribute-specifier-seqopt
 decl-specifier decl-specifier-seq

```

The optional *attribute-specifier-seq* in a *decl-specifier-seq* appertains to the type determined by the preceding *decl-specifiers* (11.3). The *attribute-specifier-seq* affects the type only for the declaration it appears in, not other declarations involving the same type.

- <sup>2</sup> Each *decl-specifier* shall appear at most once in a complete *decl-specifier-seq*, except that `long` may appear twice.
- <sup>3</sup> If a *type-name* is encountered while parsing a *decl-specifier-seq*, it is interpreted as part of the *decl-specifier-seq* if and only if there is no previous *defining-type-specifier* other than a *cv-qualifier* in the *decl-specifier-seq*. The sequence shall be self-consistent as described below. [Example:

```

typedef char* Pc;
static Pc; // error: name missing

```

Here, the declaration `static Pc` is ill-formed because no name was specified for the static variable of type `Pc`. To get a variable called `Pc`, a *type-specifier* (other than `const` or `volatile`) has to be present to indicate that the *typedef-name* `Pc` is the name being (re)declared, rather than being part of the *decl-specifier* sequence. For another example,

```

void f(const Pc); // void f(char* const) (not const char*)
void g(const int Pc); // void g(const int)

```

— end example]

- <sup>4</sup> [Note: Since `signed`, `unsigned`, `long`, and `short` by default imply `int`, a *type-name* appearing after one of those specifiers is treated as the name being (re)declared. [Example:

```

void h(unsigned Pc); // void h(unsigned int)
void k(unsigned int Pc); // void k(unsigned int)

```

— end example] — end note]

### 10.1.1 Storage class specifiers

[dcl.stc]

- <sup>1</sup> The storage class specifiers are

```

storage-class-specifier:
 static
 thread_local
 extern
 mutable

```

At most one *storage-class-specifier* shall appear in a given *decl-specifier-seq*, except that `thread_local` may appear with `static` or `extern`. If `thread_local` appears in any declaration of a variable it shall be present in all declarations of that entity. If a *storage-class-specifier* appears in a *decl-specifier-seq*, there can be no `typedef` specifier in the same *decl-specifier-seq* and the *init-declarator-list* or *member-declarator-list* of the declaration shall not be empty (except for an anonymous union declared in a named namespace or in the global namespace, which shall be declared `static` (12.3.1)). The *storage-class-specifier* applies to the name declared by each *init-declarator* in the list and not to any names declared by other specifiers. A *storage-class-specifier* other than `thread_local` shall not be specified in an explicit specialization (17.8.3) or an explicit instantiation (17.8.2) directive.

- <sup>2</sup> [Note: A variable declared without a *storage-class-specifier* at block scope or declared as a function parameter has automatic storage duration by default (6.6.4.3). — end note]
- <sup>3</sup> The `thread_local` specifier indicates that the named entity has thread storage duration (6.6.4.2). It shall be applied only to the names of variables of namespace or block scope and to the names of static data members.

When `thread_local` is applied to a variable of block scope the *storage-class-specifier* `static` is implied if no other *storage-class-specifier* appears in the *decl-specifier-seq*.

- 4 The `static` specifier can be applied only to names of variables and functions and to anonymous unions (12.3.1). There can be no `static` function declarations within a block, nor any `static` function parameters. A `static` specifier used in the declaration of a variable declares the variable to have static storage duration (6.6.4.1), unless accompanied by the `thread_local` specifier, which declares the variable to have thread storage duration (6.6.4.2). A `static` specifier can be used in declarations of class members; 12.2.3 describes its effect. For the linkage of a name declared with a `static` specifier, see 6.5.
- 5 The `extern` specifier can be applied only to the names of variables and functions. The `extern` specifier cannot be used in the declaration of class members or function parameters. For the linkage of a name declared with an `extern` specifier, see 6.5. [Note: The `extern` keyword can also be used in *explicit-instantiations* and *linkage-specifications*, but it is not a *storage-class-specifier* in such contexts. — end note]
- 6 The linkages implied by successive declarations for a given entity shall agree. That is, within a given scope, each declaration declaring the same variable name or the same overloading of a function name shall imply the same linkage. Each function in a given set of overloaded functions can have a different linkage, however.

[Example:

```

static char* f(); // f() has internal linkage
char* f() // f() still has internal linkage
{ /* ... */ }

char* g(); // g() has external linkage
static char* g() // error: inconsistent linkage
{ /* ... */ }

void h();
inline void h(); // external linkage

inline void l();
void l(); // external linkage

inline void m();
extern void m(); // external linkage

static void n();
inline void n(); // internal linkage

static int a;
int a; // error: two definitions

static int b;
extern int b; // b has internal linkage
 // b still has internal linkage

int c;
static int c; // c has external linkage
 // error: inconsistent linkage

extern int d;
static int d; // d has external linkage
 // error: inconsistent linkage

```

— end example]

- 7 The name of a declared but undefined class can be used in an `extern` declaration. Such a declaration can only be used in ways that do not require a complete class type. [Example:

```

struct S;
extern S a;
extern S f();
extern void g(S);

void h() {
 g(a); // error: S is incomplete
 f(); // error: S is incomplete
}

```

— *end example*]

- 8 The `mutable` specifier shall appear only in the declaration of a non-static data member (12.2) whose type is neither `const`-qualified nor a reference type. [*Example*:

```
class X {
 mutable const int* p; // OK
 mutable int* const q; // ill-formed
};
```

— *end example*]

- 9 The `mutable` specifier on a class data member nullifies a `const` specifier applied to the containing class object and permits modification of the mutable class member even though the rest of the object is `const` (10.1.7.1).

### 10.1.2 Function specifiers

[**dcl.fct.spec**]

- 1 A *function-specifier* can be used only in a function declaration.

```
function-specifier:
 virtual
 explicit-specifier

explicit-specifier:
 explicit (constant-expression)
 explicit
```

- 2 The `virtual` specifier shall be used only in the initial declaration of a non-static class member function; see 13.3.
- 3 An *explicit-specifier* shall be used only in the declaration of a constructor or conversion function within its class definition; see 15.3.1 and 15.3.2.
- 4 In an *explicit-specifier*, the *constant-expression*, if supplied, shall be a contextually converted constant expression of type `bool` (8.6). The *explicit-specifier* `explicit` without a *constant-expression* is equivalent to the *explicit-specifier* `explicit(true)`. If the constant expression evaluates to `true`, the function is explicit. Otherwise, the function is not explicit. A `(` token that follows `explicit` is parsed as part of the *explicit-specifier*.

### 10.1.3 The typedef specifier

[**dcl.typedef**]

- 1 Declarations containing the *decl-specifier* `typedef` declare identifiers that can be used later for naming fundamental (6.7.1) or compound (6.7.2) types. The `typedef` specifier shall not be combined in a *decl-specifier-seq* with any other kind of specifier except a *defining-type-specifier*, and it shall not be used in the *decl-specifier-seq* of a *parameter-declaration* (11.3.5) nor in the *decl-specifier-seq* of a *function-definition* (11.4). If a `typedef` specifier appears in a declaration without a *declarator*, the program is ill-formed.

```
typedef-name:
 identifier
```

A name declared with the `typedef` specifier becomes a *typedef-name*. Within the scope of its declaration, a *typedef-name* is syntactically equivalent to a keyword and names the type associated with the identifier in the way described in Clause 11. A *typedef-name* is thus a synonym for another type. A *typedef-name* does not introduce a new type the way a class declaration (12.1) or enum declaration does. [*Example*: After

```
typedef int MILES, *KCLICKSP;
```

the constructions

```
MILES distance;
extern KCLICKSP metricp;
```

are all correct declarations; the type of `distance` is `int` and that of `metricp` is “pointer to `int`”. — *end example*]

- 2 A *typedef-name* can also be introduced by an *alias-declaration*. The *identifier* following the `using` keyword becomes a *typedef-name* and the optional *attribute-specifier-seq* following the *identifier* appertains to that *typedef-name*. Such a *typedef-name* has the same semantics as if it were introduced by the `typedef` specifier. In particular, it does not define a new type. [*Example*:

```
using handler_t = void (*)(int);
extern handler_t ignore;
extern void (*ignore)(int); // redeclare ignore
```



```
using cell = pair<void*, cell*>; // ill-formed
```

— end example] The *defining-type-specifier-seq* of the *defining-type-id* shall not define a class or enumeration if the *alias-declaration* is the *declaration* of a *template-declaration*.

- 3 In a given non-class scope, a **typedef** specifier can be used to redefine the name of any type declared in that scope to refer to the type to which it already refers. [Example:

```
typedef struct s { /* ... */ } s;
typedef int I;
typedef int I;
typedef I I;
```

— end example]

- 4 In a given class scope, a **typedef** specifier can be used to redefine any *class-name* declared in that scope that is not also a *typedef-name* to refer to the type to which it already refers. [Example:

```
struct S {
 typedef struct A { } A; // OK
 typedef struct B B; // OK
 typedef A A; // error
};
```

— end example]

- 5 If a **typedef** specifier is used to redefine in a given scope an entity that can be referenced using an *elaborated-type-specifier*, the entity can continue to be referenced by an *elaborated-type-specifier* or as an enumeration or class name in an enumeration or class definition respectively. [Example:

```
struct S;
typedef struct S S;
int main() {
 struct S* p; // OK
}
struct S { }; // OK
```

— end example]

- 6 In a given scope, a **typedef** specifier shall not be used to redefine the name of any type declared in that scope to refer to a different type. [Example:

```
class complex { /* ... */ };
typedef int complex; // error: redefinition
```

— end example]

- 7 Similarly, in a given scope, a class or enumeration shall not be declared with the same name as a *typedef-name* that is declared in that scope and refers to a type other than the class or enumeration itself. [Example:

```
typedef int complex;
class complex { /* ... */ }; // error: redefinition
```

— end example]

- 8 [Note: A *typedef-name* that names a class type, or a cv-qualified version thereof, is also a *class-name* (12.1). If a *typedef-name* is used to identify the subject of an *elaborated-type-specifier* (10.1.7.3), a class definition (Clause 12), a constructor declaration (15.1), or a destructor declaration (15.4), the program is ill-formed. — end note] [Example:

```
struct S {
 S();
 ~S();
};

typedef struct S T;

S a = T(); // OK
struct T * p; // error
```

— end example]

- 9 If the **typedef** declaration defines an unnamed class (or enum), the first *typedef-name* declared by the declaration to be that class type (or enum type) is used to denote the class type (or enum type) for linkage

purposes only (6.5). [Note: A typedef declaration involving a *lambda-expression* does not itself define the associated closure type, and so the closure type is not given a name for linkage purposes. — end note]  
 [Example:

```
typedef struct { } *ps, S; // S is the class name for linkage purposes
typedef decltype([]{}) C; // the closure type has no name for linkage purposes
```

— end example]

#### 10.1.4 The friend specifier

[dcl.friend]

- <sup>1</sup> The **friend** specifier is used to specify access to class members; see 14.3.

#### 10.1.5 The constexpr specifier

[dcl.constexpr]

- <sup>1</sup> The **constexpr** specifier shall be applied only to the definition of a variable or variable template or the declaration of a function or function template. A function or static data member declared with the **constexpr** specifier is implicitly an inline function or variable (10.1.6). If any declaration of a function or function template has a **constexpr** specifier, then all its declarations shall contain the **constexpr** specifier. [Note: An explicit specialization can differ from the template declaration with respect to the **constexpr** specifier. — end note] [Note: Function parameters cannot be declared **constexpr**. — end note] [Example:

```
constexpr void square(int &x); // OK: declaration
constexpr int bufsz = 1024; // OK: definition
constexpr struct pixel { // error: pixel is a type
 int x;
 int y;
 constexpr pixel(int); // OK: declaration
};
constexpr pixel::pixel(int a)
: x(a), y(x) // OK: definition
{ square(x); }
constexpr pixel small(2); // error: square not defined, so small(2)
 // not constant (8.6) so constexpr not satisfied

constexpr void square(int &x) { // OK: definition
 x *= x;
}
constexpr pixel large(4); // OK: square defined
int next(constexpr int x) { // error: not for parameters
 return x + 1;
}
extern constexpr int memsz; // error: not a definition
```

— end example]

- <sup>2</sup> A **constexpr** specifier used in the declaration of a function that is not a constructor declares that function to be a *constexpr function*. Similarly, a **constexpr** specifier used in a constructor declaration declares that constructor to be a *constexpr constructor*.

- <sup>3</sup> The definition of a **constexpr** function shall satisfy the following requirements:

- (3.1) — its return type shall be a literal type;
- (3.2) — each of its parameter types shall be a literal type;
- (3.3) — its *function-body* shall be = **delete**, = **default**, or a *compound-statement* that does not contain
  - (3.3.1) — an *asm-definition*,
  - (3.3.2) — a **goto** statement,
  - (3.3.3) — an identifier label (9.1),
  - (3.3.4) — a *try-block*, or
  - (3.3.5) — a definition of a variable of non-literal type or of static or thread storage duration or for which no initialization is performed.

[Example:

```
constexpr int square(int x)
{ return x * x; } // OK
```

```

constexpr long long_max()
 { return 2147483647; } // OK
constexpr int abs(int x) {
 if (x < 0)
 x = -x;
 return x; // OK
}
constexpr int first(int n) {
 static int value = n; // error: variable has static storage duration
 return value;
}
constexpr int uninit() {
 int a; // error: variable is uninitialized
 return a;
}
constexpr int prev(int x)
 { return --x; } // OK
constexpr int g(int x, int n) { // OK
 int r = 1;
 while (--n > 0) r *= x;
 return r;
}

```

— end example]

4 The definition of a constexpr constructor shall satisfy the following requirements:

- (4.1) — the class shall not have any virtual base classes;
- (4.2) — each of the parameter types shall be a literal type;
- (4.3) — its *function-body* shall not be a *function-try-block*.

In addition, either its *function-body* shall be = `delete`, or it shall satisfy the following requirements:

- (4.4) — either its *function-body* shall be = `default`, or the *compound-statement* of its *function-body* shall satisfy the requirements for a *function-body* of a constexpr function;
- (4.5) — every non-variant non-static data member and base class subobject shall be initialized (15.6.2);
- (4.6) — if the class is a union having variant members (12.3), exactly one of them shall be initialized;
- (4.7) — if the class is a union-like class, but is not a union, for each of its anonymous union members having variant members, exactly one of them shall be initialized;
- (4.8) — for a non-delegating constructor, every constructor selected to initialize non-static data members and base class subobjects shall be a constexpr constructor;
- (4.9) — for a delegating constructor, the target constructor shall be a constexpr constructor.

[Example:

```

struct Length {
 constexpr explicit Length(int i = 0) : val(i) { }
private:
 int val;
};

```

— end example]

5 For a constexpr function or constexpr constructor that is neither defaulted nor a template, if no argument values exist such that an invocation of the function or constructor could be an evaluated subexpression of a core constant expression (8.6), or, for a constructor, a constant initializer for some object (6.8.3.2), the program is ill-formed, no diagnostic required. [Example:

```

constexpr int f(bool b)
 { return b ? throw 0 : 0; } // OK
constexpr int f() { return f(true); } // ill-formed, no diagnostic required

struct B {
 constexpr B(int x) : i(0) { } // x is unused

```

```

 int i;
};

int global;

struct D : B {
 constexpr D() : B(global) { } // ill-formed, no diagnostic required
 // lvalue-to-rvalue conversion on non-constant global
};

```

— end example]

- 6 If the instantiated template specialization of a constexpr function template or member function of a class template would fail to satisfy the requirements for a constexpr function or constexpr constructor, that specialization is still a constexpr function or constexpr constructor, even though a call to such a function cannot appear in a constant expression. If no specialization of the template would satisfy the requirements for a constexpr function or constexpr constructor when considered as a non-template function or constructor, the template is ill-formed, no diagnostic required.
- 7 A call to a constexpr function produces the same result as a call to an equivalent non-constexpr function in all respects except that
- (7.1) — a call to a constexpr function can appear in a constant expression (8.6) and
- (7.2) — copy elision is mandatory in a constant expression (15.8).
- 8 The `constexpr` specifier has no effect on the type of a constexpr function or a constexpr constructor. [Example:

```

constexpr int bar(int x, int y) // OK
{ return x + y + x*y; }
// ...
int bar(int x, int y) // error: redefinition of bar
{ return x * 2 + 3 * y; }

```

— end example]

- 9 A `constexpr` specifier used in an object declaration declares the object as `const`. Such an object shall have literal type and shall be initialized. In any `constexpr` variable declaration, the full-expression of the initialization shall be a constant expression (8.6). [Example:

```

struct pixel {
 int x, y;
};
constexpr pixel ur = { 1294, 1024 }; // OK
constexpr pixel origin; // error: initializer missing

```

— end example]

### 10.1.6 The `inline` specifier

[**decl.inline**]

- 1 The `inline` specifier can be applied only to the declaration or definition of a variable or function.
- 2 A function declaration (11.3.5, 12.2.1, 14.3) with an `inline` specifier declares an *inline function*. The `inline` specifier indicates to the implementation that inline substitution of the function body at the point of call is to be preferred to the usual function call mechanism. An implementation is not required to perform this inline substitution at the point of call; however, even if this inline substitution is omitted, the other rules for inline functions specified in this subclause shall still be respected.
- 3 A variable declaration with an `inline` specifier declares an *inline variable*.
- 4 A function defined within a class definition is an inline function.
- 5 The `inline` specifier shall not appear on a block scope declaration.<sup>95</sup> If the `inline` specifier is used in a friend function declaration, that declaration shall be a definition or the function shall have previously been declared inline.
- 6 An inline function or variable shall be defined in every translation unit in which it is odr-used and shall have exactly the same definition in every case (6.2). [Note: A call to the inline function or a use of the

<sup>95</sup>) The `inline` keyword has no effect on the linkage of a function.

inline variable may be encountered before its definition appears in the translation unit. — *end note*] If the definition of a function or variable appears in a translation unit before its first declaration as inline, the program is ill-formed. If a function or variable with external linkage is declared inline in one translation unit, it shall be declared inline in all translation units in which it appears; no diagnostic is required. An inline function or variable with external linkage shall have the same address in all translation units. [Note: A **static** local variable in an inline function with external linkage always refers to the same object. A type defined within the body of an inline function with external linkage is the same type in every translation unit. — *end note*]

### 10.1.7 Type specifiers

[dcl.type]

<sup>1</sup> The type-specifiers are

*type-specifier*:

*simple-type-specifier*  
*elaborated-type-specifier*  
*typename-specifier*  
*cv-qualifier*

*type-specifier-seq*:

*type-specifier attribute-specifier-seq<sub>opt</sub>*  
*type-specifier type-specifier-seq*

*defining-type-specifier*:

*type-specifier*  
*class-specifier*  
*enum-specifier*

*defining-type-specifier-seq*:

*defining-type-specifier attribute-specifier-seq<sub>opt</sub>*  
*defining-type-specifier defining-type-specifier-seq*

The optional *attribute-specifier-seq* in a *type-specifier-seq* or a *defining-type-specifier-seq* appertains to the type denoted by the preceding *type-specifiers* or *defining-type-specifiers* (11.3). The *attribute-specifier-seq* affects the type only for the declaration it appears in, not other declarations involving the same type.

<sup>2</sup> As a general rule, at most one *defining-type-specifier* is allowed in the complete *decl-specifier-seq* of a *declaration* or in a *defining-type-specifier-seq*, and at most one *type-specifier* is allowed in a *type-specifier-seq*. The only exceptions to this rule are the following:

- (2.1) — **const** can be combined with any type specifier except itself.
- (2.2) — **volatile** can be combined with any type specifier except itself.
- (2.3) — **signed** or **unsigned** can be combined with **char**, **long**, **short**, or **int**.
- (2.4) — **short** or **long** can be combined with **int**.
- (2.5) — **long** can be combined with **double**.
- (2.6) — **long** can be combined with **long**.

<sup>3</sup> Except in a declaration of a constructor, destructor, or conversion function, at least one *defining-type-specifier* that is not a *cv-qualifier* shall appear in a complete *type-specifier-seq* or a complete *decl-specifier-seq*.<sup>96</sup>

<sup>4</sup> [Note: *enum-specifiers*, *class-specifiers*, and *typename-specifiers* are discussed in 10.2, Clause 12, and 17.7, respectively. The remaining *type-specifiers* are discussed in the rest of this subclause. — *end note*]

#### 10.1.7.1 The *cv-qualifiers*

[dcl.type.cv]

<sup>1</sup> There are two *cv-qualifiers*, **const** and **volatile**. Each *cv-qualifier* shall appear at most once in a *cv-qualifier-seq*. If a *cv-qualifier* appears in a *decl-specifier-seq*, the *init-declarator-list* or *member-declarator-list* of the declaration shall not be empty. [Note: 6.7.3 and 11.3.5 describe how *cv-qualifiers* affect object and function types. — *end note*] Redundant *cv-qualifications* are ignored. [Note: For example, these could be introduced by typedefs. — *end note*]

<sup>2</sup> [Note: Declaring a variable **const** can affect its linkage (10.1.1) and its usability in constant expressions (8.6). As described in 11.6, the definition of an object or subobject of *const-qualified* type must specify an initializer or be subject to default-initialization. — *end note*]

<sup>96</sup> There is no special provision for a *decl-specifier-seq* that lacks a *type-specifier* or that has a *type-specifier* that only specifies *cv-qualifiers*. The “implicit int” rule of C is no longer supported.

- <sup>3</sup> A pointer or reference to a cv-qualified type need not actually point or refer to a cv-qualified object, but it is treated as if it does; a const-qualified access path cannot be used to modify an object even if the object referenced is a non-const object and can be modified through some other access path. [Note: Cv-qualifiers are supported by the type system so that they cannot be subverted without casting (8.5.1.11). — end note]
- <sup>4</sup> Except that any class member declared `mutable` (10.1.1) can be modified, any attempt to modify (8.5.18, 8.5.1.6, 8.5.2.2) a const object (6.7.3) during its lifetime (6.6.3) results in undefined behavior. [Example:

```

const int ci = 3; // cv-qualified (initialized as required)
ci = 4; // ill-formed: attempt to modify const

int i = 2; // not cv-qualified
const int* cip; // pointer to const int
cip = &i; // OK: cv-qualified access path to unqualified
*cip = 4; // ill-formed: attempt to modify through ptr to const

int* ip;
ip = const_cast<int*>(cip); // cast needed to convert const int* to int*
*ip = 4; // defined: *ip points to i, a non-const object

const int* ciq = new const int (3); // initialized as required
int* iq = const_cast<int*>(ciq); // cast required
*iq = 4; // undefined: modifies a const object

```

For another example,

```

struct X {
 mutable int i;
 int j;
};
struct Y {
 X x;
 Y();
};

const Y y;
y.x.i++; // well-formed: mutable member can be modified
y.x.j++; // ill-formed: const-qualified member modified
Y* p = const_cast<Y*>(&y); // cast away const-ness of y
p->x.i = 99; // well-formed: mutable member can be modified
p->x.j = 99; // undefined: modifies a const subobject

```

— end example]

- <sup>5</sup> The semantics of an access through a volatile glvalue are implementation-defined. If an attempt is made to access an object defined with a volatile-qualified type through the use of a non-volatile glvalue, the behavior is undefined.
- <sup>6</sup> [Note: `volatile` is a hint to the implementation to avoid aggressive optimization involving the object because the value of the object might be changed by means undetectable by an implementation. Furthermore, for some implementations, `volatile` might indicate that special hardware instructions are required to access the object. See 6.8.1 for detailed semantics. In general, the semantics of `volatile` are intended to be the same in C++ as they are in C. — end note]

### 10.1.7.2 Simple type specifiers

[dcl.type.simple]

- <sup>1</sup> The simple type specifiers are

```

simple-type-specifier:
 nested-name-specifieropt type-name
 nested-name-specifier template simple-template-id
 nested-name-specifieropt template-name
 char
 char16_t
 char32_t
 wchar_t
 bool
 short
 int
 long
 signed
 unsigned
 float
 double
 void
 auto
 decltype-specifier

type-name:
 class-name
 enum-name
 typedef-name
 simple-template-id

decltype-specifier:
 decltype (expression)
 decltype (auto)

```

- <sup>2</sup> The *simple-type-specifier* **auto** is a placeholder for a type to be deduced (10.1.7.4). A *type-specifier* of the form **typename**<sub>opt</sub> *nested-name-specifier*<sub>opt</sub> *template-name* is a placeholder for a deduced class type (10.1.7.5). The *template-name* shall name a class template that is not an injected-class-name. The other *simple-type-specifiers* specify either a previously-declared type, a type determined from an expression, or one of the fundamental types (6.7.1). Table 11 summarizes the valid combinations of *simple-type-specifiers* and the types they specify.
- <sup>3</sup> When multiple *simple-type-specifiers* are allowed, they can be freely intermixed with other *decl-specifiers* in any order. [Note: It is implementation-defined whether objects of **char** type are represented as signed or unsigned quantities. The **signed** specifier forces **char** objects to be signed; it is redundant in other contexts. — end note]
- <sup>4</sup> For an expression **e**, the type denoted by **decltype(e)** is defined as follows:
- (4.1) — if **e** is an unparenthesized *id-expression* naming a structured binding (11.5), **decltype(e)** is the referenced type as given in the specification of the structured binding declaration;
  - (4.2) — otherwise, if **e** is an unparenthesized *id-expression* naming a non-type *template-parameter* (17.1), **decltype(e)** is the type of the *template-parameter* after performing any necessary type deduction (10.1.7.4, 10.1.7.5);
  - (4.3) — otherwise, if **e** is an unparenthesized *id-expression* or an unparenthesized class member access (8.5.1.5), **decltype(e)** is the type of the entity named by **e**. If there is no such entity, or if **e** names a set of overloaded functions, the program is ill-formed;
  - (4.4) — otherwise, if **e** is an xvalue, **decltype(e)** is T&&, where T is the type of **e**;
  - (4.5) — otherwise, if **e** is an lvalue, **decltype(e)** is T&, where T is the type of **e**;
  - (4.6) — otherwise, **decltype(e)** is the type of **e**.

The operand of the **decltype** specifier is an unevaluated operand (8.2).

[Example:

```

const int&& foo();
int i;
struct A { double x; };
const A* a = new A();
decltype(foo()) x1 = 17; // type is const int&&
decltype(i) x2; // type is int

```

Table 11 — *simple-type-specifiers* and the types they specify

| Specifier(s)                  | Type                                 |
|-------------------------------|--------------------------------------|
| <i>type-name</i>              | the type named                       |
| <i>simple-template-id</i>     | the type as defined in 17.2          |
| <i>template-name</i>          | placeholder for a type to be deduced |
| char                          | “char”                               |
| unsigned char                 | “unsigned char”                      |
| signed char                   | “signed char”                        |
| char16_t                      | “char16_t”                           |
| char32_t                      | “char32_t”                           |
| bool                          | “bool”                               |
| unsigned                      | “unsigned int”                       |
| unsigned int                  | “unsigned int”                       |
| signed                        | “int”                                |
| signed int                    | “int”                                |
| int                           | “int”                                |
| unsigned short int            | “unsigned short int”                 |
| unsigned short                | “unsigned short int”                 |
| unsigned long int             | “unsigned long int”                  |
| unsigned long                 | “unsigned long int”                  |
| unsigned long long int        | “unsigned long long int”             |
| unsigned long long            | “unsigned long long int”             |
| signed long int               | “long int”                           |
| signed long                   | “long int”                           |
| signed long long int          | “long long int”                      |
| signed long long              | “long long int”                      |
| long long int                 | “long long int”                      |
| long long                     | “long long int”                      |
| long int                      | “long int”                           |
| long                          | “long int”                           |
| signed short int              | “short int”                          |
| signed short                  | “short int”                          |
| short int                     | “short int”                          |
| short                         | “short int”                          |
| wchar_t                       | “wchar_t”                            |
| float                         | “float”                              |
| double                        | “double”                             |
| long double                   | “long double”                        |
| void                          | “void”                               |
| auto                          | placeholder for a type to be deduced |
| decltype(auto)                | placeholder for a type to be deduced |
| decltype( <i>expression</i> ) | the type as defined below            |

```
decltype(a->x) x3; // type is double
decltype((a->x)) x4 = x3; // type is const double&
```

— end example] [Note: The rules for determining types involving `decltype(auto)` are specified in 10.1.7.4.  
— end note]

- <sup>5</sup> If the operand of a *decltype-specifier* is a prvalue, the temporary materialization conversion is not applied (7.4) and no result object is provided for the prvalue. The type of the prvalue may be incomplete or an abstract class type. [Note: As a result, storage is not allocated for the prvalue and it is not destroyed. Thus, a class type is not instantiated as a result of being the type of a function call in this context. In this context, the common purpose of writing the expression is merely to refer to its type. In that sense, a *decltype-specifier* is analogous to a use of a *typedef-name*, so the usual reasons for requiring a complete type do not apply. In particular, it is not necessary to allocate storage for a temporary object or to enforce the semantic constraints



associated with invoking the type's destructor. — *end note*] [Note: Unlike the preceding rule, parentheses have no special meaning in this context. — *end note*] [Example:

```

template<class T> struct A { ~A() = delete; };
template<class T> auto h()
 -> A<T>;
template<class T> auto i(T) // identity
 -> T;
template<class T> auto f(T) // #1
 -> decltype(i(h<T>())); // forces completion of A<T> and implicitly uses A<T>::~~A()
 // for the temporary introduced by the use of h().
 // (A temporary is not introduced as a result of the use of i().)
template<class T> auto f(T) // #2
 -> void;
auto g() -> void {
 f(42); // OK: calls #2. (#1 is not a viable candidate: type deduction
 // fails (17.9.2) because A<int>::~~A() is implicitly used in its
 // decltype-specifier)
}
template<class T> auto q(T)
 -> decltype((h<T>())); // does not force completion of A<T>; A<T>::~~A() is not implicitly
 // used within the context of this decltype-specifier

void r() {
 q(42); // error: deduction against q succeeds, so overload resolution selects
 // the specialization "q(T) -> decltype((h<T>()))" with T=int;
 // the return type is A<int>, so a temporary is introduced and its
 // destructor is used, so the program is ill-formed
}

```

— *end example*]

### 10.1.7.3 Elaborated type specifiers

[**dcl.type.elab**]

*elaborated-type-specifier*:

```

class-key attribute-specifier-seqopt nested-name-specifieropt identifier
class-key simple-template-id
class-key nested-name-specifier templateopt simple-template-id
enum nested-name-specifieropt identifier

```

- <sup>1</sup> An *attribute-specifier-seq* shall not appear in an *elaborated-type-specifier* unless the latter is the sole constituent of a declaration. If an *elaborated-type-specifier* is the sole constituent of a declaration, the declaration is ill-formed unless it is an explicit specialization (17.8.3), an explicit instantiation (17.8.2) or it has one of the following forms:

```

class-key attribute-specifier-seqopt identifier ;
friend class-key ::opt identifier ;
friend class-key ::opt simple-template-id ;
friend class-key nested-name-specifier identifier ;
friend class-key nested-name-specifier templateopt simple-template-id ;

```

In the first case, the *attribute-specifier-seq*, if any, appertains to the class being declared; the attributes in the *attribute-specifier-seq* are thereafter considered attributes of the class whenever it is named.

- <sup>2</sup> 6.4.4 describes how name lookup proceeds for the *identifier* in an *elaborated-type-specifier*. If the *identifier* resolves to a *class-name* or *enum-name*, the *elaborated-type-specifier* introduces it into the declaration the same way a *simple-type-specifier* introduces its *type-name*. If the *identifier* resolves to a *typedef-name* or the *simple-template-id* resolves to an alias template specialization, the *elaborated-type-specifier* is ill-formed. [Note: This implies that, within a class template with a template *type-parameter* T, the declaration

```
friend class T;
```

is ill-formed. However, the similar declaration **friend** T; is allowed (14.3). — *end note*]

- <sup>3</sup> The *class-key* or *enum* keyword present in the *elaborated-type-specifier* shall agree in kind with the declaration to which the name in the *elaborated-type-specifier* refers. This rule also applies to the form of *elaborated-type-specifier* that declares a *class-name* or friend class since it can be construed as referring to the definition of the class. Thus, in any *elaborated-type-specifier*, the **enum** keyword shall be used to refer to an enumeration (10.2),

the `union class-key` shall be used to refer to a union (Clause 12), and either the `class` or `struct class-key` shall be used to refer to a class (Clause 12) declared using the `class` or `struct class-key`. [Example:

```
enum class E { a, b };
enum E x = E::a; // OK
```

— end example]

#### 10.1.7.4 The `auto` specifier

[**dcl.spec.auto**]

- 1 The `auto` and `decltype(auto)` *type-specifiers* are used to designate a placeholder type that will be replaced later by deduction from an initializer. The `auto` *type-specifier* is also used to introduce a function type having a *trailing-return-type* or to signify that a lambda is a generic lambda (8.4.5). The `auto` *type-specifier* is also used to introduce a structured binding declaration (11.5).
- 2 The placeholder type can appear with a function declarator in the *decl-specifier-seq*, *type-specifier-seq*, *conversion-function-id*, or *trailing-return-type*, in any context where such a declarator is valid. If the function declarator includes a *trailing-return-type* (11.3.5), that *trailing-return-type* specifies the declared return type of the function. Otherwise, the function declarator shall declare a function. If the declared return type of the function contains a placeholder type, the return type of the function is deduced from non-discarded `return` statements, if any, in the body of the function (9.4.1).
- 3 The type of a variable declared using `auto` or `decltype(auto)` is deduced from its initializer. This use is allowed in an initializing declaration (11.6) of a variable. `auto` or `decltype(auto)` shall appear as one of the *decl-specifiers* in the *decl-specifier-seq* and the *decl-specifier-seq* shall be followed by one or more *declarators*, each of which shall be followed by a non-empty *initializer*. In an *initializer* of the form

( *expression-list* )

the *expression-list* shall be a single *assignment-expression*. [Example:

```
auto x = 5; // OK: x has type int
const auto *v = &x, u = 6; // OK: v has type const int*, u has type const int
static auto y = 0.0; // OK: y has type double
auto int r; // error: auto is not a storage-class-specifier
auto f() -> int; // OK: f returns int
auto g() { return 0.0; } // OK: g returns double
auto h(); // OK: h's return type will be deduced when it is defined
```

— end example]

- 4 A placeholder type can also be used in the *type-specifier-seq* in the *new-type-id* or *type-id* of a *new-expression* (8.5.2.4) and as a *decl-specifier* of the *parameter-declaration's decl-specifier-seq* in a *template-parameter* (17.1).
- 5 A program that uses `auto` or `decltype(auto)` in a context not explicitly allowed in this subclause is ill-formed.
- 6 If the *init-declarator-list* contains more than one *init-declarator*, they shall all form declarations of variables. The type of each declared variable is determined by placeholder type deduction (10.1.7.4.1), and if the type that replaces the placeholder type is not the same in each deduction, the program is ill-formed.

[Example:

```
auto x = 5, *y = &x; // OK: auto is int
auto a = 5, b = { 1, 2 }; // error: different types for auto
```

— end example]

- 7 If a function with a declared return type that contains a placeholder type has multiple non-discarded `return` statements, the return type is deduced for each such `return` statement. If the type deduced is not the same in each deduction, the program is ill-formed.
- 8 If a function with a declared return type that uses a placeholder type has no non-discarded `return` statements, the return type is deduced as though from a `return` statement with no operand at the closing brace of the function body. [Example:

```
auto f() { } // OK, return type is void
auto* g() { } // error, cannot deduce auto* from void()
```

— end example]

- 9 If the name of an entity with an undeduced placeholder type appears in an expression, the program is ill-formed. Once a non-discarded `return` statement has been seen in a function, however, the return type

deduced from that statement can be used in the rest of the function, including in other `return` statements. [Example:

```

auto n = n; // error, n's initializer refers to n
auto f();
void g() { &f; } // error, f's return type is unknown
auto sum(int i) {
 if (i == 1)
 return i; // sum's return type is int
 else
 return sum(i-1)+i; // OK, sum's return type has been deduced
}

```

— end example]

- <sup>10</sup> Return type deduction for a function template with a placeholder in its declared type occurs when the definition is instantiated even if the function body contains a `return` statement with a non-type-dependent operand. [Note: Therefore, any use of a specialization of the function template will cause an implicit instantiation. Any errors that arise from this instantiation are not in the immediate context of the function type and can result in the program being ill-formed (17.9.2). — end note] [Example:

```

template <class T> auto f(T t) { return t; } // return type deduced at instantiation time
typedef decltype(f(1)) fint_t; // instantiates f<int> to deduce return type
template<class T> auto f(T* t) { return *t; }
void g() { int (*p)(int*) = &f; } // instantiates both fs to determine return types,
// chooses second

```

— end example]

- <sup>11</sup> Redclarations or specializations of a function or function template with a declared return type that uses a placeholder type shall also use that placeholder, not a deduced type. Similarly, redeclarations or specializations of a function or function template with a declared return type that does not use a placeholder type shall not use a placeholder. [Example:

```

auto f();
auto f() { return 42; } // return type is int
auto f(); // OK
int f(); // error, cannot be overloaded with auto f()
decltype(auto) f(); // error, auto and decltype(auto) don't match

template <typename T> auto g(T t) { return t; } // #1
template auto g(int); // OK, return type is int
template char g(char); // error, no matching template
template<> auto g(double); // OK, forward declaration with unknown return type

template <class T> T g(T t) { return t; } // OK, not functionally equivalent to #1
template char g(char); // OK, now there is a matching template
template auto g(float); // still matches #1

void h() { return g(42); } // error, ambiguous

template <typename T> struct A {
 friend T frf(T);
};
auto frf(int i) { return i; } // not a friend of A<int>

```

— end example]

- <sup>12</sup> A function declared with a return type that uses a placeholder type shall not be `virtual` (13.3).
- <sup>13</sup> An explicit instantiation declaration (17.8.2) does not cause the instantiation of an entity declared using a placeholder type, but it also does not prevent that entity from being instantiated as needed to determine its type. [Example:

```

template <typename T> auto f(T t) { return t; }
extern template auto f(int); // does not instantiate f<int>
int (*p)(int) = f; // instantiates f<int> to determine its return type, but an explicit
// instantiation definition is still required somewhere in the program

```

— *end example*]

#### 10.1.7.4.1 Placeholder type deduction [`decl.type.auto.deduct`]

- 1 Placeholder type deduction is the process by which a type containing a placeholder type is replaced by a deduced type.
- 2 A type `T` containing a placeholder type, and a corresponding initializer `e`, are determined as follows:
  - (2.1) — for a non-discarded `return` statement that occurs in a function declared with a return type that contains a placeholder type, `T` is the declared return type and `e` is the operand of the `return` statement. If the `return` statement has no operand, then `e` is `void()`;
  - (2.2) — for a variable declared with a type that contains a placeholder type, `T` is the declared type of the variable and `e` is the initializer. If the initialization is direct-list-initialization, the initializer shall be a *braced-init-list* containing only a single *assignment-expression* and `e` is the *assignment-expression*;
  - (2.3) — for a non-type template parameter declared with a type that contains a placeholder type, `T` is the declared type of the non-type template parameter and `e` is the corresponding template argument.

In the case of a `return` statement with no operand or with an operand of type `void`, `T` shall be either `decltype(auto)` or *cv auto*.

- 3 If the deduction is for a `return` statement and `e` is a *braced-init-list* (11.6.4), the program is ill-formed.
- 4 If the placeholder is the `auto` *type-specifier*, the deduced type `T'` replacing `T` is determined using the rules for template argument deduction. Obtain `P` from `T` by replacing the occurrences of `auto` with either a new invented type template parameter `U` or, if the initialization is copy-list-initialization, with `std::initializer_list<U>`. Deduce a value for `U` using the rules of template argument deduction from a function call (17.9.2.1), where `P` is a function template parameter type and the corresponding argument is `e`. If the deduction fails, the declaration is ill-formed. Otherwise, `T'` is obtained by substituting the deduced `U` into `P`. [*Example*:

```

auto x1 = { 1, 2 }; // decltype(x1) is std::initializer_list<int>
auto x2 = { 1, 2.0 }; // error: cannot deduce element type
auto x3{ 1, 2 }; // error: not a single element
auto x4 = { 3 }; // decltype(x4) is std::initializer_list<int>
auto x5{ 3 }; // decltype(x5) is int

```

— *end example*]

[*Example*:

```
const auto &i = expr;
```

The type of `i` is the deduced type of the parameter `u` in the call `f(expr)` of the following invented function template:

```
template <class U> void f(const U& u);
```

— *end example*]

- 5 If the placeholder is the `decltype(auto)` *type-specifier*, `T` shall be the placeholder alone. The type deduced for `T` is determined as described in 10.1.7.2, as though `e` had been the operand of the `decltype`. [*Example*:

```

int i;
int&& f();
auto x2a(i); // decltype(x2a) is int
decltype(auto) x2d(i); // decltype(x2d) is int
auto x3a = i; // decltype(x3a) is int
decltype(auto) x3d = i; // decltype(x3d) is int
auto x4a = (i); // decltype(x4a) is int
decltype(auto) x4d = (i); // decltype(x4d) is int&
auto x5a = f(); // decltype(x5a) is int
decltype(auto) x5d = f(); // decltype(x5d) is int&&
auto x6a = { 1, 2 }; // decltype(x6a) is std::initializer_list<int>
decltype(auto) x6d = { 1, 2 }; // error, { 1, 2 } is not an expression
auto *x7a = &i; // decltype(x7a) is int*
decltype(auto)*x7d = &i; // error, declared type is not plain decltype(auto)

```

— *end example*]

### 10.1.7.5 Deduced class template specialization types [dcl.type.class.deduct]

- <sup>1</sup> If a placeholder for a deduced class type appears as a *decl-specifier* in the *decl-specifier-seq* of an initializing declaration (11.6) of a variable, the placeholder is replaced by the return type of the function selected by overload resolution for class template deduction (16.3.1.8). If the *decl-specifier-seq* is followed by an *init-declarator-list* or *member-declarator-list* containing more than one *declarator*, the type that replaces the placeholder shall be the same in each deduction.
- <sup>2</sup> A placeholder for a deduced class type can also be used in the *type-specifier-seq* in the *new-type-id* or *type-id* of a *new-expression* (8.5.2.4), as the *simple-type-specifier* in an explicit type conversion (functional notation) (8.5.1.3), or as the *type-specifier* in the *parameter-declaration* of a *template-parameter* (17.1). A placeholder for a deduced class type shall not appear in any other context.

<sup>3</sup> [Example:

```
template<class T> struct container {
 container(T t) {}
 template<class Iter> container(Iter beg, Iter end);
};
template<class Iter>
container(Iter b, Iter e) -> container<typename std::iterator_traits<Iter>::value_type>;
std::vector<double> v = { /* ... */ };

container c(7); // OK, deduces int for T
auto d = container(v.begin(), v.end()); // OK, deduces double for T
container e{5, 6}; // error, int is not an iterator
```

— end example]

## 10.2 Enumeration declarations [dcl.enum]

- <sup>1</sup> An enumeration is a distinct type (6.7.2) with named constants. Its name becomes an *enum-name* within its scope.

*enum-name*:

*identifier*

*enum-specifier*:

*enum-head* { *enumerator-list*<sub>opt</sub> }

*enum-head* { *enumerator-list* , }

*enum-head*:

*enum-key* *attribute-specifier-seq*<sub>opt</sub> *enum-head-name*<sub>opt</sub> *enum-base*<sub>opt</sub>

*enum-head-name*:

*nested-name-specifier*<sub>opt</sub> *identifier*

*opaque-enum-declaration*:

*enum-key* *attribute-specifier-seq*<sub>opt</sub> *nested-name-specifier*<sub>opt</sub> *identifier* *enum-base*<sub>opt</sub> ;

*enum-key*:

**enum**

**enum class**

**enum struct**

*enum-base*:

: *type-specifier-seq*

*enumerator-list*:

*enumerator-definition*

*enumerator-list* , *enumerator-definition*

*enumerator-definition*:

*enumerator*

*enumerator* = *constant-expression*

*enumerator*:

*identifier* *attribute-specifier-seq*<sub>opt</sub>

The optional *attribute-specifier-seq* in the *enum-head* and the *opaque-enum-declaration* appertains to the enumeration; the attributes in that *attribute-specifier-seq* are thereafter considered attributes of the enumeration whenever it is named. A : following “**enum** *nested-name-specifier*<sub>opt</sub> *identifier*” within the *decl-specifier-seq* of a *member-declaration* is parsed as part of an *enum-base*. [Note: This resolves a potential ambiguity

between the declaration of an enumeration with an *enum-base* and the declaration of an unnamed bit-field of enumeration type. [Example:

```
struct S {
 enum E : int {};
 enum E : int {}; // error: redeclaration of enumeration
};
```

— end example] — end note] If an *opaque-enum-declaration* contains a *nested-name-specifier*, the declaration shall be an explicit specialization (17.8.3).

- <sup>2</sup> The enumeration type declared with an *enum-key* of only **enum** is an *unscoped enumeration*, and its *enumerators* are *unscoped enumerators*. The *enum-keys* **enum class** and **enum struct** are semantically equivalent; an enumeration type declared with one of these is a *scoped enumeration*, and its *enumerators* are *scoped enumerators*. The optional *identifier* shall not be omitted in the declaration of a scoped enumeration. The *type-specifier-seq* of an *enum-base* shall name an integral type; any cv-qualification is ignored. An *opaque-enum-declaration* declaring an unscoped enumeration shall not omit the *enum-base*. The identifiers in an *enumerator-list* are declared as constants, and can appear wherever constants are required. An *enumerator-definition* with = gives the associated *enumerator* the value indicated by the *constant-expression*. If the first *enumerator* has no *initializer*, the value of the corresponding constant is zero. An *enumerator-definition* without an *initializer* gives the *enumerator* the value obtained by increasing the value of the previous *enumerator* by one. [Example:

```
enum { a, b, c=0 };
enum { d, e, f=e+2 };
```

defines **a**, **c**, and **d** to be zero, **b** and **e** to be 1, and **f** to be 3. — end example] The optional *attribute-specifier-seq* in an *enumerator* appertains to that enumerator.

- <sup>3</sup> An *opaque-enum-declaration* is either a redeclaration of an enumeration in the current scope or a declaration of a new enumeration. [Note: An enumeration declared by an *opaque-enum-declaration* has a fixed underlying type and is a complete type. The list of enumerators can be provided in a later redeclaration with an *enum-specifier*. — end note] A scoped enumeration shall not be later redeclared as unscoped or with a different underlying type. An unscoped enumeration shall not be later redeclared as scoped and each redeclaration shall include an *enum-base* specifying the same underlying type as in the original declaration.
- <sup>4</sup> If the *enum-key* is followed by a *nested-name-specifier*, the *enum-specifier* shall refer to an enumeration that was previously declared directly in the class or namespace to which the *nested-name-specifier* refers (i.e., neither inherited nor introduced by a *using-declaration*), and the *enum-specifier* shall appear in a namespace enclosing the previous declaration.
- <sup>5</sup> Each enumeration defines a type that is different from all other types. Each enumeration also has an *underlying type*. The underlying type can be explicitly specified using an *enum-base*. For a scoped enumeration type, the underlying type is **int** if it is not explicitly specified. In both of these cases, the underlying type is said to be *fixed*. Following the closing brace of an *enum-specifier*, each enumerator has the type of its enumeration. If the underlying type is fixed, the type of each enumerator prior to the closing brace is the underlying type and the *constant-expression* in the *enumerator-definition* shall be a converted constant expression of the underlying type (8.6). If the underlying type is not fixed, the type of each enumerator prior to the closing brace is determined as follows:
- (5.1) — If an initializer is specified for an enumerator, the *constant-expression* shall be an integral constant expression (8.6). If the expression has unscoped enumeration type, the enumerator has the underlying type of that enumeration type, otherwise it has the same type as the expression.
- (5.2) — If no initializer is specified for the first enumerator, its type is an unspecified signed integral type.
- (5.3) — Otherwise the type of the enumerator is the same as that of the preceding enumerator unless the incremented value is not representable in that type, in which case the type is an unspecified integral type sufficient to contain the incremented value. If no such type exists, the program is ill-formed.
- <sup>6</sup> An enumeration whose underlying type is fixed is an incomplete type from its point of declaration (6.3.2) to immediately after its *enum-base* (if any), at which point it becomes a complete type. An enumeration whose underlying type is not fixed is an incomplete type from its point of declaration to immediately after the closing } of its *enum-specifier*, at which point it becomes a complete type.
- <sup>7</sup> For an enumeration whose underlying type is not fixed, the underlying type is an integral type that can represent all the enumerator values defined in the enumeration. If no integral type can represent all the

enumerator values, the enumeration is ill-formed. It is implementation-defined which integral type is used as the underlying type except that the underlying type shall not be larger than `int` unless the value of an enumerator cannot fit in an `int` or `unsigned int`. If the *enumerator-list* is empty, the underlying type is as if the enumeration had a single enumerator with value 0.

- 8 For an enumeration whose underlying type is fixed, the values of the enumeration are the values of the underlying type. Otherwise, for an enumeration where  $e_{\min}$  is the smallest enumerator and  $e_{\max}$  is the largest, the values of the enumeration are the values in the range  $b_{\min}$  to  $b_{\max}$ , defined as follows: Let  $K$  be 1 for a two's complement representation and 0 for a ones' complement or sign-magnitude representation.  $b_{\max}$  is the smallest value greater than or equal to  $\max(|e_{\min}| - K, |e_{\max}|)$  and equal to  $2^M - 1$ , where  $M$  is a non-negative integer.  $b_{\min}$  is zero if  $e_{\min}$  is non-negative and  $-(b_{\max} + K)$  otherwise. The size of the smallest bit-field large enough to hold all the values of the enumeration type is  $\max(M, 1)$  if  $b_{\min}$  is zero and  $M + 1$  otherwise. It is possible to define an enumeration that has values not defined by any of its enumerators. If the *enumerator-list* is empty, the values of the enumeration are as if the enumeration had a single enumerator with value 0.<sup>97</sup>
- 9 Two enumeration types are *layout-compatible enumerations* if they have the same underlying type.
- 10 The value of an enumerator or an object of an unscoped enumeration type is converted to an integer by integral promotion (7.6). [Example:

```
enum color { red, yellow, green=20, blue };
color col = red;
color* cp = &col;
if (*cp == blue) // ...
```

makes `color` a type describing various colors, and then declares `col` as an object of that type, and `cp` as a pointer to an object of that type. The possible values of an object of type `color` are `red`, `yellow`, `green`, `blue`; these values can be converted to the integral values 0, 1, 20, and 21. Since enumerations are distinct types, objects of type `color` can be assigned only values of type `color`.

```
color c = 1; // error: type mismatch, no conversion from int to color
int i = yellow; // OK: yellow converted to integral value 1, integral promotion
```

Note that this implicit `enum` to `int` conversion is not provided for a scoped enumeration:

```
enum class Col { red, yellow, green };
int x = Col::red; // error: no Col to int conversion
Col y = Col::red;
if (y) { } // error: no Col to bool conversion
```

— end example]

- 11 Each *enum-name* and each unscoped *enumerator* is declared in the scope that immediately contains the *enum-specifier*. Each scoped *enumerator* is declared in the scope of the enumeration. These names obey the scope rules defined for all names in 6.3 and 6.4. [Example:

```
enum direction { left='l', right='r' };

void g() {
 direction d; // OK
 d = left; // OK
 d = direction::right; // OK
}

enum class altitude { high='h', low='l' };

void h() {
 altitude a; // OK
 a = high; // error: high not in scope
 a = altitude::low; // OK
}
```

— end example] An enumerator declared in class scope can be referred to using the class member access operators (`::`, `.` (dot) and `->` (arrow)), see 8.5.1.5. [Example:

---

<sup>97</sup>) This set of values is used to define promotion and conversion semantics for the enumeration type. It does not preclude an expression of enumeration type from having a value that falls outside this range.

```

struct X {
 enum direction { left='l', right='r' };
 int f(int i) { return i==left ? 0 : i==right ? 1 : 2; }
};

void g(X* p) {
 direction d; // error: direction not in scope
 int i;
 i = p->f(left); // error: left not in scope
 i = p->f(X::right); // OK
 i = p->f(p->left); // OK
 // ...
}

```

— end example]

- <sup>12</sup> If an *enum-head* contains a *nested-name-specifier*, the *enum-specifier* shall refer to an enumeration that was previously declared directly in the class or namespace to which the *nested-name-specifier* refers, or in an element of the inline namespace set (10.3.1) of that namespace (i.e., not merely inherited or introduced by a *using-declaration*), and the *enum-specifier* shall appear in a namespace enclosing the previous declaration. In such cases, the *nested-name-specifier* of the *enum-head* of the definition shall not begin with a *decltype-specifier*.

### 10.3 Namespaces

[basic.namespace]

- <sup>1</sup> A namespace is an optionally-named declarative region. The name of a namespace can be used to access entities declared in that namespace; that is, the members of the namespace. Unlike other declarative regions, the definition of a namespace can be split over several parts of one or more translation units.
- <sup>2</sup> The outermost declarative region of a translation unit is a namespace; see 6.3.6.

#### 10.3.1 Namespace definition

[namespace.def]

*namespace-name*:

*identifier*

*namespace-alias*

*namespace-definition*:

*named-namespace-definition*

*unnamed-namespace-definition*

*nested-namespace-definition*

*named-namespace-definition*:

`inlineopt namespace attribute-specifier-seqopt identifier { namespace-body }`

*unnamed-namespace-definition*:

`inlineopt namespace attribute-specifier-seqopt { namespace-body }`

*nested-namespace-definition*:

`namespace enclosing-namespace-specifier :: identifier { namespace-body }`

*enclosing-namespace-specifier*:

*identifier*

`enclosing-namespace-specifier :: identifier`

*namespace-body*:

*declaration-seq<sub>opt</sub>*

- <sup>1</sup> Every *namespace-definition* shall appear in the global scope or in a namespace scope (6.3.6).
- <sup>2</sup> In a *named-namespace-definition*, the *identifier* is the name of the namespace. If the *identifier*, when looked up (6.4.1), refers to a *namespace-name* (but not a *namespace-alias*) that was introduced in the namespace in which the *named-namespace-definition* appears or that was introduced in a member of the inline namespace set of that namespace, the *namespace-definition* extends the previously-declared namespace. Otherwise, the *identifier* is introduced as a *namespace-name* into the declarative region in which the *named-namespace-definition* appears.
- <sup>3</sup> Because a *namespace-definition* contains *declarations* in its *namespace-body* and a *namespace-definition* is itself a *declaration*, it follows that *namespace-definitions* can be nested. [Example:

```

namespace Outer {
 int i;
}

```



```

namespace Inner {
 void f() { i++; } // Outer::i
 int i;
 void g() { i++; } // Inner::i
}

```

— end example]

- <sup>4</sup> The *enclosing namespaces* of a declaration are those namespaces in which the declaration lexically appears, except for a redeclaration of a namespace member outside its original namespace (e.g., a definition as specified in 10.3.1.2). Such a redeclaration has the same enclosing namespaces as the original declaration. [Example:

```

namespace Q {
 namespace V {
 void f(); // enclosing namespaces are the global namespace, Q, and Q::V
 class C { void m(); };
 }
 void V::f() { // enclosing namespaces are the global namespace, Q, and Q::V
 extern void h(); // ... so this declares Q::V::h
 }
 void V::C::m() { // enclosing namespaces are the global namespace, Q, and Q::V
 }
}

```

— end example]

- <sup>5</sup> If the optional initial `inline` keyword appears in a *namespace-definition* for a particular namespace, that namespace is declared to be an *inline namespace*. The `inline` keyword may be used on a *namespace-definition* that extends a namespace only if it was previously used on the *namespace-definition* that initially declared the *namespace-name* for that namespace.
- <sup>6</sup> The optional *attribute-specifier-seq* in a *named-namespace-definition* appertains to the namespace being defined or extended.
- <sup>7</sup> Members of an inline namespace can be used in most respects as though they were members of the enclosing namespace. Specifically, the inline namespace and its enclosing namespace are both added to the set of associated namespaces used in argument-dependent lookup (6.4.2) whenever one of them is, and a *using-directive* (10.3.4) that names the inline namespace is implicitly inserted into the enclosing namespace as for an unnamed namespace (10.3.1.1). Furthermore, each member of the inline namespace can subsequently be partially specialized (17.6.5), explicitly instantiated (17.8.2), or explicitly specialized (17.8.3) as though it were a member of the enclosing namespace. Finally, looking up a name in the enclosing namespace via explicit qualification (6.4.3.2) will include members of the inline namespace brought in by the *using-directive* even if there are declarations of that name in the enclosing namespace.
- <sup>8</sup> These properties are transitive: if a namespace N contains an inline namespace M, which in turn contains an inline namespace O, then the members of O can be used as though they were members of M or N. The *inline namespace set* of N is the transitive closure of all inline namespaces in N. The *enclosing namespace set* of O is the set of namespaces consisting of the innermost non-inline namespace enclosing an inline namespace O, together with any intervening inline namespaces.
- <sup>9</sup> A *nested-namespace-definition* with an *enclosing-namespace-specifier* E, *identifier* I and *namespace-body* B is equivalent to

```
namespace E { namespace I { B } }
```

[Example:

```

namespace A::B::C {
 int i;
}

```

The above has the same effect as:

```

namespace A {
 namespace B {
 namespace C {
 int i;
 }
 }
}

```

```

 }
 }
— end example]

```

### 10.3.1.1 Unnamed namespaces

[namespace.unnamed]

- <sup>1</sup> An *unnamed-namespace-definition* behaves as if it were replaced by

```

inlineopt namespace unique { /* empty body */ }
using namespace unique ;
namespace unique { namespace-body }

```

where `inline` appears if and only if it appears in the *unnamed-namespace-definition* and all occurrences of *unique* in a translation unit are replaced by the same identifier, and this identifier differs from all other identifiers in the translation unit. The optional *attribute-specifier-seq* in the *unnamed-namespace-definition* appertains to *unique*. [Example:

```

namespace { int i; } // unique::i
void f() { i++; } // unique::i++

namespace A {
 namespace {
 int i; // A::unique::i
 int j; // A::unique::j
 }
 void g() { i++; } // A::unique::i++
}

using namespace A;
void h() {
 i++; // error: unique::i or A::unique::i
 A::i++; // A::unique::i
 j++; // A::unique::j
}

```

— end example]

### 10.3.1.2 Namespace member definitions

[namespace.memdef]

- <sup>1</sup> A declaration in a namespace N (excluding declarations in nested scopes) whose *declarator-id* is an *unqualified-id* (11.3), whose *class-head-name* (Clause 12) or *enum-head-name* (10.2) is an *identifier*, or whose *elaborated-type-specifier* is of the form *class-key attribute-specifier-seq<sub>opt</sub> identifier* (10.1.7.3), or that is an *opaque-enum-declaration*, declares (or redeclares) its *unqualified-id* or *identifier* as a member of N. [Note: An explicit instantiation (17.8.2) or explicit specialization (17.8.3) of a template does not introduce a name and thus may be declared using an *unqualified-id* in a member of the enclosing namespace set, if the primary template is declared in an inline namespace. — end note] [Example:

```

namespace X {
 void f() { /* ... */ } // OK: introduces X::f()

 namespace M {
 void g(); // OK: introduces X::M::g()
 }
 using M::g;
 void g(); // error: conflicts with X::M::g()
}

```

— end example]

- <sup>2</sup> Members of a named namespace can also be defined outside that namespace by explicit qualification (6.4.3.2) of the name being defined, provided that the entity being defined was already declared in the namespace and the definition appears after the point of declaration in a namespace that encloses the declaration's namespace. [Example:

```

namespace Q {
 namespace V {
 void f();
 }
}

```

```

void V::f() { /* ... */ } // OK
void V::g() { /* ... */ } // error: g() is not yet a member of V
namespace V {
 void g();
}
}

namespace R {
 void Q::V::g() { /* ... */ } // error: R doesn't enclose Q
}

```

— end example]

- <sup>3</sup> If a friend declaration in a non-local class first declares a class, function, class template or function template<sup>98</sup> the friend is a member of the innermost enclosing namespace. The friend declaration does not by itself make the name visible to unqualified lookup (6.4.1) or qualified lookup (6.4.3). [Note: The name of the friend will be visible in its namespace if a matching declaration is provided at namespace scope (either before or after the class definition granting friendship). — end note] If a friend function or function template is called, its name may be found by the name lookup that considers functions from namespaces and classes associated with the types of the function arguments (6.4.2). If the name in a friend declaration is neither qualified nor a *template-id* and the declaration is a function or an *elaborated-type-specifier*, the lookup to determine whether the entity has been previously declared shall not consider any scopes outside the innermost enclosing namespace. [Note: The other forms of friend declarations cannot declare a new member of the innermost enclosing namespace and thus follow the usual lookup rules. — end note] [Example:

```

// Assume f and g have not yet been declared.
void h(int);
template <class T> void f2(T);
namespace A {
 class X {
 friend void f(X); // A::f(X) is a friend
 class Y {
 friend void g(); // A::g is a friend
 friend void h(int); // A::h is a friend
 // ::h not considered
 friend void f2<>(int); // ::f2<>(int) is a friend
 };
 };
}

// A::f, A::g and A::h are not visible here
X x;
void g() { f(x); } // definition of A::g
void f(X) { /* ... */ } // definition of A::f
void h(int) { /* ... */ } // definition of A::h
// A::f, A::g and A::h are visible here and known to be friends
}

using A::x;

void h() {
 A::f(x);
 A::X::f(x); // error: f is not a member of A::X
 A::X::Y::g(); // error: g is not a member of A::X::Y
}

```

— end example]

### 10.3.2 Namespace alias

[namespace.alias]

- <sup>1</sup> A *namespace-alias-definition* declares an alternate name for a namespace according to the following grammar:

```

namespace-alias:
 identifier

```

<sup>98</sup>) this implies that the name of the class or function is unqualified.

```

namespace-alias-definition:
 namespace identifier = qualified-namespace-specifier ;

qualified-namespace-specifier:
 nested-name-specifieropt namespace-name

```

- <sup>2</sup> The *identifier* in a *namespace-alias-definition* is a synonym for the name of the namespace denoted by the *qualified-namespace-specifier* and becomes a *namespace-alias*. [Note: When looking up a *namespace-name* in a *namespace-alias-definition*, only namespace names are considered, see 6.4.6. — end note]
- <sup>3</sup> In a declarative region, a *namespace-alias-definition* can be used to redefine a *namespace-alias* declared in that declarative region to refer only to the namespace to which it already refers. [Example: The following declarations are well-formed:

```

namespace Company_with_very_long_name { /* ... */ }
namespace CWVLN = Company_with_very_long_name;
namespace CWVLN = Company_with_very_long_name; // OK: duplicate
namespace CWVLN = CWVLN;

```

— end example]

### 10.3.3 The using declaration

[namespace.udecl]

```

using-declaration:
 using using-declarator-list ;

using-declarator-list:
 using-declarator ...opt
 using-declarator-list , using-declarator ...opt

using-declarator:
 typenameopt nested-name-specifier unqualified-id

```

- <sup>1</sup> Each *using-declarator* in a *using-declaration*<sup>99</sup> introduces a set of declarations into the declarative region in which the *using-declaration* appears. The set of declarations introduced by the *using-declarator* is found by performing qualified name lookup (6.4.3, 13.2) for the name in the *using-declarator*, excluding functions that are hidden as described below. If the *using-declarator* does not name a constructor, the *unqualified-id* is declared in the declarative region in which the *using-declaration* appears as a synonym for each declaration introduced by the *using-declarator*. [Note: Only the specified name is so declared; specifying an enumeration name in a *using-declaration* does not declare its enumerators in the *using-declaration*'s declarative region. — end note] If the *using-declarator* names a constructor, it declares that the class *inherits* the set of constructor declarations introduced by the *using-declarator* from the nominated base class.
- <sup>2</sup> Every *using-declaration* is a *declaration* and a *member-declaration* and can therefore be used in a class definition. [Example:

```

struct B {
 void f(char);
 void g(char);
 enum E { e };
 union { int x; };
};

struct D : B {
 using B::f;
 void f(int) { f('c'); } // calls B::f(char)
 void g(int) { g('c'); } // recursively calls D::g(int)
};

```

— end example]

- <sup>3</sup> In a *using-declaration* used as a *member-declaration*, each *using-declarator*'s *nested-name-specifier* shall name a base class of the class being defined. If a *using-declarator* names a constructor, its *nested-name-specifier* shall name a direct base class of the class being defined. [Example:

<sup>99</sup>) A *using-declaration* with more than one *using-declarator* is equivalent to a corresponding sequence of *using-declarations* with one *using-declarator* each.

```

template <typename... bases>
struct X : bases... {
 using bases::g...;
};

X<B, D> x; // OK: B::g and D::g introduced
— end example] [Example:
class C {
 int g();
};

class D2 : public B {
 using B::f; // OK: B is a base of D2
 using B::e; // OK: e is an enumerator of base B
 using B::x; // OK: x is a union member of base B
 using C::g; // error: C isn't a base of D2
};

```

— end example]

- <sup>4</sup> [Note: Since destructors do not have names, a *using-declaration* cannot refer to a destructor for a base class. Since specializations of member templates for conversion functions are not found by name lookup, they are not considered when a *using-declaration* specifies a conversion function (17.6.2). — end note] If a constructor or assignment operator brought from a base class into a derived class has the signature of a copy/move constructor or assignment operator for the derived class (15.8), the *using-declaration* does not by itself suppress the implicit declaration of the derived class member; the member from the base class is hidden or overridden by the implicitly-declared copy/move constructor or assignment operator of the derived class, as described below.

- <sup>5</sup> A *using-declaration* shall not name a *template-id*. [Example:

```

struct A {
 template <class T> void f(T);
 template <class T> struct X { };
};
struct B : A {
 using A::f<double>; // ill-formed
 using A::X<int>; // ill-formed
};

```

— end example]

- <sup>6</sup> A *using-declaration* shall not name a namespace.

- <sup>7</sup> A *using-declaration* shall not name a scoped enumerator.

- <sup>8</sup> A *using-declaration* that names a class member shall be a *member-declaration*. [Example:

```

struct X {
 int i;
 static int s;
};

void f() {
 using X::i; // error: X::i is a class member and this is not a member declaration.
 using X::s; // error: X::s is a class member and this is not a member declaration.
}

```

— end example]

- <sup>9</sup> Members declared by a *using-declaration* can be referred to by explicit qualification just like other member names (6.4.3.2). [Example:

```

void f();

namespace A {
 void g();
}

```

```

namespace X {
 using ::f; // global f
 using A::g; // A's g
}

void h()
{
 X::f(); // calls ::f
 X::g(); // calls A::g
}

```

— end example]

- 10 A *using-declaration* is a *declaration* and can therefore be used repeatedly where (and only where) multiple declarations are allowed. [Example:

```

namespace A {
 int i;
}

namespace A1 {
 using A::i, A::i; // OK: double declaration
}

struct B {
 int i;
};

struct X : B {
 using B::i, B::i; // error: double member declaration
};

```

— end example]

- 11 [Note: For a *using-declaration* whose *nested-name-specifier* names a namespace, members added to the namespace after the *using-declaration* are not in the set of introduced declarations, so they are not considered when a use of the name is made. Thus, additional overloads added after the *using-declaration* are ignored, but default function arguments (11.3.6), default template arguments (17.1), and template specializations (17.6.5, 17.8.3) are considered. — end note] [Example:

```

namespace A {
 void f(int);
}

using A::f; // f is a synonym for A::f; that is, for A::f(int).
namespace A {
 void f(char);
}

void foo() {
 f('a'); // calls f(int), even though f(char) exists.
}

void bar() {
 using A::f; // f is a synonym for A::f; that is, for A::f(int) and A::f(char).
 f('a'); // calls f(char)
}

```

— end example]

- 12 [Note: Partial specializations of class templates are found by looking up the primary class template and then considering all partial specializations of that template. If a *using-declaration* names a class template, partial specializations introduced after the *using-declaration* are effectively visible because the primary template is visible (17.6.5). — end note]

- 13 Since a *using-declaration* is a *declaration*, the restrictions on declarations of the same name in the same declarative region (6.3) also apply to *using-declarations*. [Example:

```

namespace A {
 int x;
}

namespace B {
 int i;
 struct g { };
 struct x { };
 void f(int);
 void f(double);
 void g(char); // OK: hides struct g
}

void func() {
 int i;
 using B::i; // error: i declared twice
 void f(char);
 using B::f; // OK: each f is a function
 f(3.5); // calls B::f(double)
 using B::g;
 g('a'); // calls B::g(char)
 struct g g1; // g1 has class type B::g
 using B::x;
 using A::x; // OK: hides struct B::x
 x = 99; // assigns to A::x
 struct x x1; // x1 has class type B::x
}

```

— end example]

- 14 If a function declaration in namespace scope or block scope has the same name and the same parameter-type-list (11.3.5) as a function introduced by a *using-declaration*, and the declarations do not declare the same function, the program is ill-formed. If a function template declaration in namespace scope has the same name, parameter-type-list, return type, and template parameter list as a function template introduced by a *using-declaration*, the program is ill-formed. [Note: Two *using-declarations* may introduce functions with the same name and the same parameter-type-list. If, for a call to an unqualified function name, function overload resolution selects the functions introduced by such *using-declarations*, the function call is ill-formed. [Example:

```

namespace B {
 void f(int);
 void f(double);
}

namespace C {
 void f(int);
 void f(double);
 void f(char);
}

void h() {
 using B::f; // B::f(int) and B::f(double)
 using C::f; // C::f(int), C::f(double), and C::f(char)
 f('h'); // calls C::f(char)
 f(1); // error: ambiguous: B::f(int) or C::f(int)?
 void f(int); // error: f(int) conflicts with C::f(int) and B::f(int)
}

```

— end example] — end note]

- 15 When a *using-declarator* brings declarations from a base class into a derived class, member functions and member function templates in the derived class override and/or hide member functions and member function templates with the same name, parameter-type-list (11.3.5), cv-qualification, and *ref-qualifier* (if any) in a base class (rather than conflicting). Such hidden or overridden declarations are excluded from the set of declarations introduced by the *using-declarator*. [Example:

```

struct B {
 virtual void f(int);
 virtual void f(char);
 void g(int);
 void h(int);
};

struct D : B {
 using B::f; // OK: D::f(int) overrides B::f(int);

 using B::g; // OK
 void g(char);

 using B::h; // OK: D::h(int) hides B::h(int)
};

void k(D* p)
{
 p->f(1); // calls D::f(int)
 p->f('a'); // calls B::f(char)
 p->g(1); // calls B::g(int)
 p->g('a'); // calls D::g(char)
}

struct B1 {
 B1(int);
};

struct B2 {
 B2(int);
};

struct D1 : B1, B2 {
 using B1::B1;
 using B2::B2;
};
D1 d1(0); // ill-formed: ambiguous

struct D2 : B1, B2 {
 using B1::B1;
 using B2::B2;
 D2(int); // OK: D2::D2(int) hides B1::B1(int) and B2::B2(int)
};
D2 d2(0); // calls D2::D2(int)

```

— end example]

- <sup>16</sup> For the purpose of forming a set of candidates during overload resolution, the functions that are introduced by a *using-declaration* into a derived class are treated as though they were members of the derived class. In particular, the implicit `this` parameter shall be treated as if it were a pointer to the derived class rather than to the base class. This has no effect on the type of the function, and in all other respects the function remains a member of the base class. Likewise, constructors that are introduced by a *using-declaration* are treated as though they were constructors of the derived class when looking up the constructors of the derived class (6.4.3.1) or forming a set of overload candidates (16.3.1.3, 16.3.1.4, 16.3.1.7). If such a constructor is selected to perform the initialization of an object of class type, all subobjects other than the base class from which the constructor originated are implicitly initialized (15.6.3). [Note: A member of a derived class is sometimes preferred to a member of a base class if they would otherwise be ambiguous (16.3.3). — end note]
- <sup>17</sup> In a *using-declarator* that does not name a constructor, all members of the set of introduced declarations shall be accessible. In a *using-declarator* that names a constructor, no access check is performed. In particular, if a derived class uses a *using-declarator* to access a member of a base class, the member name shall be accessible. If the name is that of an overloaded member function, then all functions named shall be accessible. The base



class members mentioned by a *using-declarator* shall be visible in the scope of at least one of the direct base classes of the class where the *using-declarator* is specified.

- <sup>18</sup> [Note: Because a *using-declarator* designates a base class member (and not a member subobject or a member function of a base class subobject), a *using-declarator* cannot be used to resolve inherited member ambiguities.

[Example:

```
struct A { int x(); };
struct B : A { };
struct C : A {
 using A::x;
 int x(int);
};

struct D : B, C {
 using C::x;
 int x(double);
};
int f(D* d) {
 return d->x(); // error: overload resolution selects A::x, but A is an ambiguous base class
}
```

— end example] — end note]

- <sup>19</sup> A synonym created by a *using-declaration* has the usual accessibility for a *member-declaration*. A *using-declarator* that names a constructor does not create a synonym; instead, the additional constructors are accessible if they would be accessible when used to construct an object of the corresponding base class, and the accessibility of the *using-declaration* is ignored. [Example:

```
class A {
private:
 void f(char);
public:
 void f(int);
protected:
 void g();
};

class B : public A {
 using A::f; // error: A::f(char) is inaccessible
public:
 using A::g; // B::g is a public synonym for A::g
};
```

— end example]

- <sup>20</sup> If a *using-declarator* uses the keyword `typename` and specifies a dependent name (17.7.2), the name introduced by the *using-declaration* is treated as a *typedef-name* (10.1.3).

### 10.3.4 Using directive

[namespace.udir]

*using-directive*:

*attribute-specifier-seq<sub>opt</sub>* **using namespace** *nested-name-specifier<sub>opt</sub>* *namespace-name* ;

- <sup>1</sup> A *using-directive* shall not appear in class scope, but may appear in namespace scope or in block scope. [Note: When looking up a *namespace-name* in a *using-directive*, only namespace names are considered, see 6.4.6. — end note] The optional *attribute-specifier-seq* appertains to the *using-directive*.
- <sup>2</sup> A *using-directive* specifies that the names in the nominated namespace can be used in the scope in which the *using-directive* appears after the *using-directive*. During unqualified name lookup (6.4.1), the names appear as if they were declared in the nearest enclosing namespace which contains both the *using-directive* and the nominated namespace. [Note: In this context, “contains” means “contains directly or indirectly”. — end note]
- <sup>3</sup> A *using-directive* does not add any members to the declarative region in which it appears. [Example:

```
namespace A {
 int i;
```

```

namespace B {
 namespace C {
 int i;
 }
 using namespace A::B::C;
 void f1() {
 i = 5; // OK, C::i visible in B and hides A::i
 }
}
namespace D {
 using namespace B;
 using namespace C;
 void f2() {
 i = 5; // ambiguous, B::C::i or A::i?
 }
}
void f3() {
 i = 5; // uses A::i
}
}
void f4() {
 i = 5; // ill-formed; neither i is visible
}

```

— end example]

- <sup>4</sup> For unqualified lookup (6.4.1), the *using-directive* is transitive: if a scope contains a *using-directive* that nominates a second namespace that itself contains *using-directives*, the effect is as if the *using-directives* from the second namespace also appeared in the first. [Note: For qualified lookup, see 6.4.3.2. — end note] [Example:

```

namespace M {
 int i;
}

namespace N {
 int i;
 using namespace M;
}

void f() {
 using namespace N;
 i = 7; // error: both M::i and N::i are visible
}

```

For another example,

```

namespace A {
 int i;
}
namespace B {
 int i;
 int j;
 namespace C {
 namespace D {
 using namespace A;
 int j;
 int k;
 int a = i; // B::i hides A::i
 }
 }
 using namespace D;
 int k = 89; // no problem yet
 int l = k; // ambiguous: C::k or D::k
 int m = i; // B::i hides A::i
 int n = j; // D::j hides B::j
}

```

```
 }
 }
```

— end example]

- <sup>5</sup> If a namespace is extended (10.3.1) after a *using-directive* for that namespace is given, the additional members of the extended namespace and the members of namespaces nominated by *using-directives* in the extending *namespace-definition* can be used after the extending *namespace-definition*.
- <sup>6</sup> [Note: If name lookup finds a declaration for a name in two different namespaces, and the declarations do not declare the same entity and do not declare functions or function templates, the use of the name is ill-formed (6.4). In particular, the name of a variable, function or enumerator does not hide the name of a class or enumeration declared in a different namespace. For example,

```
namespace A {
 class X { };
 extern "C" int g();
 extern "C++" int h();
}
namespace B {
 void X(int);
 extern "C" int g();
 extern "C++" int h(int);
}
using namespace A;
using namespace B;

void f() {
 X(1); // error: name X found in two namespaces
 g(); // OK: name g refers to the same entity
 h(); // OK: overload resolution selects A::h
}

```

— end note]

- <sup>7</sup> During overload resolution, all functions from the transitive search are considered for argument matching. The set of declarations found by the transitive search is unordered. [Note: In particular, the order in which namespaces were considered and the relationships among the namespaces implied by the *using-directives* do not cause preference to be given to any of the declarations found by the search. — end note] An ambiguity exists if the best match finds two functions with the same signature, even if one is in a namespace reachable through *using-directives* in the namespace of the other.<sup>100</sup> [Example:

```
namespace D {
 int d1;
 void f(char);
}
using namespace D;

int d1; // OK: no conflict with D::d1

namespace E {
 int e;
 void f(int);
}

namespace D { // namespace extension
 int d2;
 using namespace E;
 void f(int);
}

void f() {
 d1++; // error: ambiguous ::d1 or D::d1?
}

```

---

<sup>100</sup>) During name lookup in a class hierarchy, some ambiguities may be resolved by considering whether one member hides the other along some paths (13.2). There is no such disambiguation when considering the set of names found as a result of following *using-directives*.

```

::d1++; // OK
D::d1++; // OK
d2++; // OK: D::d2
e++; // OK: E::e
f(1); // error: ambiguous: D::f(int) or E::f(int)?
f('a'); // OK: D::f(char)
}

```

— end example]

## 10.4 The asm declaration

[dcl.asm]

- <sup>1</sup> An `asm` declaration has the form

```

asm-definition:
 attribute-specifier-seqopt asm (string-literal) ;

```

The `asm` declaration is conditionally-supported; its meaning is implementation-defined. The optional *attribute-specifier-seq* in an *asm-definition* appertains to the `asm` declaration. [Note: Typically it is used to pass information through the implementation to an assembler. — end note]

## 10.5 Linkage specifications

[dcl.link]

- <sup>1</sup> All function types, function names with external linkage, and variable names with external linkage have a *language linkage*. [Note: Some of the properties associated with an entity with language linkage are specific to each implementation and are not described here. For example, a particular language linkage may be associated with a particular form of representing names of objects and functions with external linkage, or with a particular calling convention, etc. — end note] The default language linkage of all function types, function names, and variable names is C++ language linkage. Two function types with different language linkages are distinct types even if they are otherwise identical.
- <sup>2</sup> Linkage (6.5) between C++ and non-C++ code fragments can be achieved using a *linkage-specification*:

```

linkage-specification:
 extern string-literal { declaration-seqopt }
 extern string-literal declaration

```

The *string-literal* indicates the required language linkage. This document specifies the semantics for the *string-literals* "C" and "C++". Use of a *string-literal* other than "C" or "C++" is conditionally-supported, with implementation-defined semantics. [Note: Therefore, a linkage-specification with a *string-literal* that is unknown to the implementation requires a diagnostic. — end note] [Note: It is recommended that the spelling of the *string-literal* be taken from the document defining that language. For example, Ada (not ADA) and Fortran or FORTRAN, depending on the vintage. — end note]

- <sup>3</sup> Every implementation shall provide for linkage to functions written in the C programming language, "C", and linkage to C++ functions, "C++". [Example:

```

complex sqrt(complex); // C++ linkage by default
extern "C" {
 double sqrt(double); // C linkage
}

```

— end example]

- <sup>4</sup> Linkage specifications nest. When linkage specifications nest, the innermost one determines the language linkage. A linkage specification does not establish a scope. A *linkage-specification* shall occur only in namespace scope (6.3). In a *linkage-specification*, the specified language linkage applies to the function types of all function declarators, function names with external linkage, and variable names with external linkage declared within the *linkage-specification*. [Example:

```

extern "C"
 void f1(void(*pf)(int)); // the name f1 and its function type have C language linkage;
 // pf is a pointer to a C function

extern "C" typedef void FUNC();
FUNC f2; // the name f2 has C++ language linkage and the
 // function's type has C language linkage

extern "C" FUNC f3; // the name of function f3 and the function's type have C language linkage

```

```

void (*pf2)(FUNC*); // the name of the variable pf2 has C++ linkage and the type
 // of pf2 is "pointer to C++ function that takes one parameter of type
 // pointer to C function"

extern "C" {
 static void f4(); // the name of the function f4 has internal linkage (not C language linkage)
 // and the function's type has C language linkage.
}

extern "C" void f5() {
 extern void f4(); // OK: Name linkage (internal) and function type linkage (C language linkage)
 // obtained from previous declaration.
}

extern void f4(); // OK: Name linkage (internal) and function type linkage (C language linkage)
 // obtained from previous declaration.

void f6() {
 extern void f4(); // OK: Name linkage (internal) and function type linkage (C language linkage)
 // obtained from previous declaration.
}

```

— *end example*] A C language linkage is ignored in determining the language linkage of the names of class members and the function type of class member functions. [Example:

```

extern "C" typedef void FUNC_c();

class C {
 void mf1(FUNC_c*); // the name of the function mf1 and the member function's type have
 // C++ language linkage; the parameter has type "pointer to C function"

 FUNC_c mf2; // the name of the function mf2 and the member function's type have
 // C++ language linkage

 static FUNC_c* q; // the name of the data member q has C++ language linkage and
 // the data member's type is "pointer to C function"
};

extern "C" {
 class X {
 void mf(); // the name of the function mf and the member function's type have
 // C++ language linkage

 void mf2(void(*)()); // the name of the function mf2 has C++ language linkage;
 // the parameter has type "pointer to C function"
 };
}

```

— *end example*]

- 5 If two declarations declare functions with the same name and parameter-type-list (11.3.5) to be members of the same namespace or declare objects with the same name to be members of the same namespace and the declarations give the names different language linkages, the program is ill-formed; no diagnostic is required if the declarations appear in different translation units. Except for functions with C++ linkage, a function declaration without a linkage specification shall not precede the first linkage specification for that function. A function can be declared without a linkage specification after an explicit linkage specification has been seen; the linkage explicitly specified in the earlier declaration is not affected by such a function declaration.
- 6 At most one function with a particular name can have C language linkage. Two declarations for a function with C language linkage with the same function name (ignoring the namespace names that qualify it) that appear in different namespace scopes refer to the same function. Two declarations for a variable with C language linkage with the same name (ignoring the namespace names that qualify it) that appear in different namespace scopes refer to the same variable. An entity with C language linkage shall not be declared with the same name as a variable in global scope, unless both declarations denote the same entity; no diagnostic is required if the declarations appear in different translation units. A variable with C language linkage shall not be declared with the same name as a function with C language linkage (ignoring the namespace names that qualify the respective names); no diagnostic is required if the declarations appear in different translation

units. [Note: Only one definition for an entity with a given name with C language linkage may appear in the program (see 6.2); this implies that such an entity must not be defined in more than one namespace scope. — end note] [Example:

```
int x;
namespace A {
 extern "C" int f();
 extern "C" int g() { return 1; }
 extern "C" int h();
 extern "C" int x(); // ill-formed: same name as global-space object x
}

namespace B {
 extern "C" int f(); // A::f and B::f refer to the same function
 extern "C" int g() { return 1; } // ill-formed, the function g with C language linkage has two definitions
}

int A::f() { return 98; } // definition for the function f with C language linkage
extern "C" int h() { return 97; } // definition for the function h with C language linkage
// A::h and ::h refer to the same function
```

— end example]

- 7 A declaration directly contained in a *linkage-specification* is treated as if it contains the **extern** specifier (10.1.1) for the purpose of determining the linkage of the declared name and whether it is a definition. Such a declaration shall not specify a storage class. [Example:

```
extern "C" double f();
static double f(); // error
extern "C" int i; // declaration
extern "C" {
 int i; // definition
}
extern "C" static void g(); // error
```

— end example]

- 8 [Note: Because the language linkage is part of a function type, when indirecting through a pointer to C function, the function to which the resulting lvalue refers is considered a C function. — end note]
- 9 Linkage from C++ to objects defined in other languages and to objects defined in C++ from other languages is implementation-defined and language-dependent. Only where the object layout strategies of two language implementations are similar enough can such linkage be achieved.

## 10.6 Attributes

[dcl.attr]

### 10.6.1 Attribute syntax and semantics

[dcl.attr.grammar]

- 1 Attributes specify additional information for various source constructs such as types, variables, names, blocks, or translation units.

```
attribute-specifier-seq:
 attribute-specifier-seqopt attribute-specifier

attribute-specifier:
 [[attribute-using-prefixopt attribute-list]]
 contract-attribute-specifier
 alignment-specifier

alignment-specifier:
 alignas (type-id ...opt)
 alignas (constant-expression ...opt)

attribute-using-prefix:
 using attribute-namespace :

attribute-list:
 attributeopt
 attribute-list , attributeopt
 attribute ...
 attribute-list , attribute ...
```

*attribute*:  
*attribute-token attribute-argument-clause<sub>opt</sub>*

*attribute-token*:  
*identifier*  
*attribute-scoped-token*

*attribute-scoped-token*:  
*attribute-namespace* :: *identifier*

*attribute-namespace*:  
*identifier*

*attribute-argument-clause*:  
 ( *balanced-token-seq<sub>opt</sub>* )

*balanced-token-seq*:  
*balanced-token*  
*balanced-token-seq balanced-token*

*balanced-token*:  
 ( *balanced-token-seq<sub>opt</sub>* )  
 [ *balanced-token-seq<sub>opt</sub>* ]  
 { *balanced-token-seq<sub>opt</sub>* }  
 any *token* other than a parenthesis, a bracket, or a brace

- <sup>2</sup> If an *attribute-specifier* contains an *attribute-using-prefix*, the *attribute-list* following that *attribute-using-prefix* shall not contain an *attribute-scoped-token* and every *attribute-token* in that *attribute-list* is treated as if its *identifier* were prefixed with N::, where N is the *attribute-namespace* specified in the *attribute-using-prefix*. [Note: This rule imposes no constraints on how an *attribute-using-prefix* affects the tokens in an *attribute-argument-clause*. — end note] [Example:

```
[using CC: opt(1), debug] // same as [[CC::opt(1), CC::debug]]
void f() {}
[using CC: opt(1)] [[CC::debug]] // same as [[CC::opt(1)] [[CC::debug]]
void g() {}
[using CC: CC::opt(1)] // error: cannot combine using and scoped attribute token
void h() {}
```

— end example]

- <sup>3</sup> [Note: For each individual attribute, the form of the *balanced-token-seq* will be specified. — end note]
- <sup>4</sup> In an *attribute-list*, an ellipsis may appear only if that *attribute*'s specification permits it. An *attribute* followed by an ellipsis is a pack expansion (17.6.3). An *attribute-specifier* that contains no *attributes* has no effect. The order in which the *attribute-tokens* appear in an *attribute-list* is not significant. If a keyword (5.11) or an alternative token (5.5) that satisfies the syntactic requirements of an *identifier* (5.10) is contained in an *attribute-token*, it is considered an identifier. No name lookup (6.4) is performed on any of the identifiers contained in an *attribute-token*. The *attribute-token* determines additional requirements on the *attribute-argument-clause* (if any).
- <sup>5</sup> Each *attribute-specifier-seq* is said to *appertain* to some entity or statement, identified by the syntactic context where it appears (Clause 9, Clause 10, Clause 11). If an *attribute-specifier-seq* that appertains to some entity or statement contains an *attribute* or *alignment-specifier* that is not allowed to apply to that entity or statement, the program is ill-formed. If an *attribute-specifier-seq* appertains to a friend declaration (14.3), that declaration shall be a definition. No *attribute-specifier-seq* shall appertain to an explicit instantiation (17.8.2).
- <sup>6</sup> For an *attribute-token* (including an *attribute-scoped-token*) not specified in this document, the behavior is implementation-defined. Any *attribute-token* that is not recognized by the implementation is ignored. [Note: Each implementation should choose a distinctive name for the *attribute-namespace* in an *attribute-scoped-token*. — end note]
- <sup>7</sup> Two consecutive left square bracket tokens shall appear only when introducing an *attribute-specifier* or within the *balanced-token-seq* of an *attribute-argument-clause*. [Note: If two consecutive left square brackets appear where an *attribute-specifier* is not allowed, the program is ill-formed even if the brackets match an alternative grammar production. — end note] [Example:

```
int p[10];
void f() {
 int x = 42, y[5];
```

```

int(p[[x] { return x; }()]); // error: invalid attribute on a nested declarator-id and
 // not a function-style cast of an element of p.
y[[] { return 2; }()] = 2; // error even though attributes are not allowed in this context.
int i [[vendor::attr([[]])]]; // well-formed implementation-defined attribute.
}

```

— end example]

## 10.6.2 Alignment specifier

[dcl.align]

<sup>1</sup> An *alignment-specifier* may be applied to a variable or to a class data member, but it shall not be applied to a bit-field, a function parameter, or an *exception-declaration* (18.3). An *alignment-specifier* may also be applied to the declaration or definition of a class (in an *elaborated-type-specifier* (10.1.7.3) or *class-head* (Clause 12), respectively) and to the declaration or definition of an enumeration (in an *opaque-enum-declaration* or *enum-head*, respectively (10.2)). An *alignment-specifier* with an ellipsis is a pack expansion (17.6.3).

<sup>2</sup> When the *alignment-specifier* is of the form `alignas( constant-expression )`:

(2.1) — the *constant-expression* shall be an integral constant expression

(2.2) — if the constant expression does not evaluate to an alignment value (6.6.5), or evaluates to an extended alignment and the implementation does not support that alignment in the context of the declaration, the program is ill-formed.

<sup>3</sup> An *alignment-specifier* of the form `alignas( type-id )` has the same effect as `alignas(alignof( type-id ))` (8.5.2.6).

<sup>4</sup> The alignment requirement of an entity is the strictest nonzero alignment specified by its *alignment-specifiers*, if any; otherwise, the *alignment-specifiers* have no effect.

<sup>5</sup> The combined effect of all *alignment-specifiers* in a declaration shall not specify an alignment that is less strict than the alignment that would be required for the entity being declared if all *alignment-specifiers* appertaining to that entity were omitted. [Example:

```

struct alignas(8) S {};
struct alignas(1) U {
 S s;
}; // error: U specifies an alignment that is less strict than if the alignas(1) were omitted.

```

— end example]

<sup>6</sup> If the defining declaration of an entity has an *alignment-specifier*, any non-defining declaration of that entity shall either specify equivalent alignment or have no *alignment-specifier*. Conversely, if any declaration of an entity has an *alignment-specifier*, every defining declaration of that entity shall specify an equivalent alignment. No diagnostic is required if declarations of an entity have different *alignment-specifiers* in different translation units. [Example:

```

// Translation unit #1:
struct S { int x; } s, *p = &s;

// Translation unit #2:
struct alignas(16) S; // error: definition of S lacks alignment, no diagnostic required
extern S* p;

```

— end example]

<sup>7</sup> [Example: An aligned buffer with an alignment requirement of *A* and holding *N* elements of type *T* can be declared as:

```
alignas(T) alignas(A) T buffer[N];
```

Specifying `alignas(T)` ensures that the final requested alignment will not be weaker than `alignof(T)`, and therefore the program will not be ill-formed. — end example]

<sup>8</sup> [Example:

```

alignas(double) void f(); // error: alignment applied to function
alignas(double) unsigned char c[sizeof(double)]; // array of characters, suitably aligned for a double
extern unsigned char c[sizeof(double)]; // no alignas necessary
alignas(float)
extern unsigned char c[sizeof(double)]; // error: different alignment in declaration

```

— end example]



### 10.6.3 Carries dependency attribute

[dcl.attr.depend]

- 1 The *attribute-token* `carries_dependency` specifies dependency propagation into and out of functions. It shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present. The attribute may be applied to the *declarator-id* of a *parameter-declaration* in a function declaration or lambda, in which case it specifies that the initialization of the parameter carries a dependency to (6.8.2) each lvalue-to-rvalue conversion (7.1) of that object. The attribute may also be applied to the *declarator-id* of a function declaration, in which case it specifies that the return value, if any, carries a dependency to the evaluation of the function call expression.
- 2 The first declaration of a function shall specify the `carries_dependency` attribute for its *declarator-id* if any declaration of the function specifies the `carries_dependency` attribute. Furthermore, the first declaration of a function shall specify the `carries_dependency` attribute for a parameter if any declaration of that function specifies the `carries_dependency` attribute for that parameter. If a function or one of its parameters is declared with the `carries_dependency` attribute in its first declaration in one translation unit and the same function or one of its parameters is declared without the `carries_dependency` attribute in its first declaration in another translation unit, the program is ill-formed, no diagnostic required.
- 3 [Note: The `carries_dependency` attribute does not change the meaning of the program, but may result in generation of more efficient code. — end note]
- 4 [Example:

```

/* Translation unit A. */

struct foo { int* a; int* b; };
std::atomic<struct foo *> foo_head[10];
int foo_array[10][10];

[[carries_dependency]] struct foo* f(int i) {
 return foo_head[i].load(memory_order::consume);
}

int g(int* x, int* y [[carries_dependency]]) {
 return kill_dependency(foo_array[*x][*y]);
}

/* Translation unit B. */

[[carries_dependency]] struct foo* f(int i);
int g(int* x, int* y [[carries_dependency]]);

int c = 3;

void h(int i) {
 struct foo* p;

 p = f(i);
 do_something_with(g(&c, p->a));
 do_something_with(g(p->a, &c));
}

```

The `carries_dependency` attribute on function `f` means that the return value carries a dependency out of `f`, so that the implementation need not constrain ordering upon return from `f`. Implementations of `f` and its caller may choose to preserve dependencies instead of emitting hardware memory ordering instructions (a.k.a. fences). Function `g`'s second parameter has a `carries_dependency` attribute, but its first parameter does not. Therefore, function `h`'s first call to `g` carries a dependency into `g`, but its second call does not. The implementation might need to insert a fence prior to the second call to `g`. — end example]

### 10.6.4 Contract attributes

[dcl.attr.contract]

#### 10.6.4.1 Syntax

[dcl.attr.contract.syn]

- 1 Contract attributes are used to specify preconditions, postconditions, and assertions for functions.

```

contract-attribute-specifier:
 [[expects contract-levelopt : conditional-expression]]
 [[ensures contract-levelopt identifieropt : conditional-expression]]
 [[assert contract-levelopt : conditional-expression]]

contract-level:
 default
 audit
 axiom

```

An ambiguity between a *contract-level* and an *identifier* is resolved in favor of *contract-level*.

- 2 A *contract-attribute-specifier* using **expects** is a *precondition*. It expresses a function's expectation on its arguments and/or the state of other objects using a predicate that is intended to hold upon entry into the function. The attribute may be applied to the function type of a function declaration.
- 3 A *contract-attribute-specifier* using **ensures** is a *postcondition*. It expresses a condition that a function should ensure for the return value and/or the state of objects using a predicate that is intended to hold upon exit from the function. The attribute may be applied to the function type of a function declaration. A postcondition may introduce an identifier to represent the glvalue result or the prvalue result object of the function. [Example:

```

int f(char * c)
 [[ensures res: res > 0 && c != nullptr]];

int g(double * p)
 [[ensures audit res: res != 0 && p != nullptr && *p <= 0.0]];

```

— end example]

- 4 A *contract-attribute-specifier* using **assert** is an *assertion*. It expresses a condition that is intended to be satisfied where it appears in a function body. The attribute may be applied to a null statement (9.2). An assertion is checked by evaluating its predicate as part of the evaluation of the null statement it applies to.
- 5 Preconditions, postconditions, and assertions are collectively called *contracts*. The *conditional-expression* in a contract is contextually converted to **bool** (Clause 7); the converted expression is called the *predicate* of the contract. [Note: The predicate of a contract is potentially evaluated (6.2). — end note]
- 6 The only side effects of a predicate that are allowed in a *contract-attribute-specifier* are modifications of non-volatile objects whose lifetime began and ended within the evaluation of the predicate. An evaluation of a predicate that exits via an exception invokes the function **std::terminate** (18.5.1). The behavior of any other side effect is undefined. [Example:

```

void push(int x, queue & q)
 [[expects: !q.full()]]
 [[ensures: !q.empty()]]
{
 /* ... */
 [[assert: q.is_valid()]];
 /* ... */
}

int min = -42;
constexpr int max = 42;

constexpr int g(int x)
 [[expects: min <= x]] // error
 [[expects: x < max]] // OK
{
 /* ... */
 [[assert: 2*x < max]];
 [[assert: ++min > 0]]; // undefined behavior
 /* ... */
}

```

— end example]

## 10.6.4.2 Contract conditions

[`dcl.attr.contract.cond`]

- <sup>1</sup> A *contract condition* is a precondition or a postcondition. The first declaration of a function shall specify all contract conditions (if any) of the function. Subsequent declarations shall either specify no contract conditions or the same list of contract conditions; no diagnostic is required if corresponding conditions will always evaluate to the same value. The list of contract conditions of a function shall be the same if the declarations of that function appear in different translation units; no diagnostic required. If a friend declaration is the first declaration of the function in a translation unit and has a contract condition, the declaration shall be a definition and shall be the only declaration of the function in the translation unit.
- <sup>2</sup> Two lists of contract conditions are the same if they consist of the same contract conditions in the same order. Two contract conditions are the same if their contract levels are the same and their predicates are the same. Two predicates contained in *contract-attribute-specifiers* are the same if they would satisfy the one-definition rule (6.2) were they to appear in function definitions, except for renaming of parameters, return value identifiers (if any), and template parameters.

- <sup>3</sup> [Note: A function pointer cannot include contract conditions. [Example:

```
typedef int (*fpt)() [[ensures r: r != 0]]; // error: contract condition not on a function declaration

int g(int x)
 [[expects: x >= 0]]
 [[ensures r: r > x]]
{
 return x+1;
}

int (*pf)(int) = g; // OK
int x = pf(5); // contract conditions of g are checked

— end example] — end note]
```

- <sup>4</sup> The predicate of a contract condition has the same semantic restrictions as if it appeared as the first *expression-statement* in the body of the function it applies to. Additional access restrictions apply to names appearing in a contract condition of a member function of class *C*:

- (4.1) — Friendship is not considered (14.3).
- (4.2) — For a contract condition of a public member function, no member of *C* or of an enclosing class of *C* is accessible unless it is a public member of *C*, or a member of a base class accessible as a public member of *C* (14.2).
- (4.3) — For a contract condition of a protected member function, no member of *C* or of an enclosing class of *C* is accessible unless it is a public or protected member of *C*, or a member of a base class accessible as a public or protected member of *C*.

For names appearing in a contract condition of a non-member function, friendship is not considered. [Example:

```
class X {
public:
 int v() const;
 void f() [[expects: x > 0]]; // error: x is private
 void g() [[expects: v() > 0]]; // OK
 friend void r(int z) [[expects: z > 0]]; // OK
 friend void s(int z) [[expects: z > x]]; // error: x is private
protected:
 int w();
 void h() [[expects: x > 0]]; // error: x is private
 void i() [[ensures: y > 0]]; // OK
 void j() [[ensures: w() > 0]]; // OK
 int y;
private:
 void k() [[expects: x > 0]]; // OK
 int x;
};
```

```

class Y : public X {
public:
 void a() [[expects: v() > 0]]; // OK
 void b() [[ensures: w() > 0]]; // error: w is protected
protected:
 void c() [[expects: w() > 0]]; // OK
};

```

— end example]

- <sup>5</sup> A precondition is checked by evaluating its predicate immediately before starting evaluation of the function body. [Note: The function body includes the *function-try-block* (Clause 18) and the *ctor-initializer* (15.6.2). — end note] A postcondition is checked by evaluating its predicate immediately before returning control to the caller of the function. [Note: The lifetime of local variables and temporaries has ended. Exiting via an exception or via `longjmp` (21.12.2) is not considered returning control to the caller of the function. — end note]

- <sup>6</sup> If a function has multiple preconditions, their evaluation (if any) will be performed in the order they appear lexically. If a function has multiple postconditions, their evaluation (if any) will be performed in the order they appear lexically. [Example:

```

void f(int * p)
 [[expects: p != nullptr]] // #1
 [[ensures: *p == 1]] // #3
 [[expects: *p == 0]] // #2
{
 *p = 1;
}

```

— end example]

- <sup>7</sup> If a postcondition odr-uses (6.2) a parameter in its predicate and the function body makes direct or indirect modifications of the value of that parameter, the behavior is undefined. [Example:

```

int f(int x)
 [[ensures r: r == x]]
{
 return ++x; // undefined behavior
}

int g(int * p)
 [[ensures r: p != nullptr]]
{
 *p = 42; // OK, p is not modified
}

int h(int x)
 [[ensures r: r == x]]
{
 potentially_modify(x); // undefined behavior if x is modified
 return x;
}

```

— end example]

### 10.6.4.3 Checking contracts

[`dcl.attr.contract.check`]

- <sup>1</sup> If the *contract-level* of a *contract-attribute-specifier* is absent, it is assumed to be `default`. [Note: A `default contract-level` is expected to be used for those contracts where the cost of run-time checking is assumed to be small (or at least not expensive) compared to the cost of executing the function. An `audit contract-level` is expected to be used for those contracts where the cost of run-time checking is assumed to be large (or at least significant) compared to the cost of executing the function. An `axiom contract-level` is expected to be used for those contracts that are formal comments and are not evaluated at run-time. — end note]

- <sup>2</sup> [Note: Multiple contract conditions may be applied to a function type with the same or different *contract-levels*. [Example:

```
int z;
```

```

bool is_prime(int k);

void f(int x)
 [[expects: x > 0]]
 [[expects audit: is_prime(x)]]
 [[ensures: z > 10]]
{
 /* ... */
}

```

— end example] — end note]

- 3 A translation may be performed with one of the following *build levels*: *off*, *default*, or *audit*. A translation with build level set to *off* performs no checking for any contract. A translation with build level set to *default* performs checking for **default** contracts. A translation with build level set to *audit* performs checking for **default** and **audit** contracts. If no build level is explicitly selected, the build level is *default*. The mechanism for selecting the build level is implementation-defined. The translation of a program consisting of translation units where the build level is not the same in all translation units is conditionally-supported. There should be no programmatic way of setting, modifying, or querying the build level of a translation unit.
- 4 During constant expression evaluation (8.6), only predicates of checked contracts are evaluated. In other contexts, it is unspecified whether the predicate for a contract that is not checked under the current build level is evaluated; if the predicate of such a contract would evaluate to **false**, the behavior is undefined.
- 5 The *violation handler* of a program is a function of type “**noexcept**<sub>opt</sub> function of (lvalue reference to **const std::contract\_violation**) returning **void**”, and is specified in an implementation-defined manner. The violation handler is invoked when the predicate of a checked contract evaluates to **false** (called a *contract violation*). There should be no programmatic way of setting or modifying the violation handler. It is implementation-defined how the violation handler is established for a program and how the **std::contract\_violation** (21.8.2) argument value is set, except as specified below. If a precondition is violated, the source location of the violation is implementation-defined. [Note: Implementations are encouraged but not required to report the caller site. — end note] If a postcondition is violated, the source location of the violation is the source location of the function definition. If an assertion is violated, the source location of the violation is the source location of the statement to which the assertion is applied.
- 6 If a user-provided violation handler exits by throwing an exception and a contract is violated on a call to a function with a non-throwing exception specification, then the behavior is as if the exception escaped the function body. [Note: The function **std::terminate** is invoked (18.5.1). — end note] [Example:

```

void f(int x) noexcept [[expects: x > 0]];

void g() {
 f(0); // std::terminate() if violation handler throws
 /* ... */
}

```

— end example]

- 7 A translation may be performed with one of the following *violation continuation modes*: *off* or *on*. A translation with violation continuation mode set to *off* terminates execution by invoking the function **std::terminate** (18.5.1) after completing the execution of the violation handler. A translation with a violation continuation mode set to *on* continues execution after completing the execution of the violation handler. If no continuation mode is explicitly selected, the default continuation mode is *off*. [Note: A continuation mode set to *on* provides the opportunity to install a logging handler to instrument a pre-existing code base and fix errors before enforcing checks. — end note] [Example:

```

void f(int x) [[expects: x > 0]];

void g() {
 f(0); // std::terminate() after handler if continuation mode is off;
 // proceeds after handler if continuation mode is on
 /* ... */
}

```

— end example]

### 10.6.5 Deprecated attribute [dcl.attr.deprecated]

- <sup>1</sup> The *attribute-token* **deprecated** can be used to mark names and entities whose use is still allowed, but is discouraged for some reason. [Note: In particular, **deprecated** is appropriate for names and entities that are deemed obsolescent or unsafe. — *end note*] It shall appear at most once in each *attribute-list*. An *attribute-argument-clause* may be present and, if present, it shall have the form:

( *string-literal* )

[Note: The *string-literal* in the *attribute-argument-clause* could be used to explain the rationale for deprecation and/or to suggest a replacing entity. — *end note*]

- <sup>2</sup> The attribute may be applied to the declaration of a class, a *typedef-name*, a variable, a non-static data member, a function, a namespace, an enumeration, an enumerator, or a template specialization.
- <sup>3</sup> A name or entity declared without the **deprecated** attribute can later be redeclared with the attribute and vice-versa. [Note: Thus, an entity initially declared without the attribute can be marked as deprecated by a subsequent redeclaration. However, after an entity is marked as deprecated, later redeclarations do not un-deprecate the entity. — *end note*] Redclarations using different forms of the attribute (with or without the *attribute-argument-clause* or with different *attribute-argument-clauses*) are allowed.
- <sup>4</sup> [Note: Implementations may use the **deprecated** attribute to produce a diagnostic message in case the program refers to a name or entity other than to declare it, after a declaration that specifies the attribute. The diagnostic message may include the text provided within the *attribute-argument-clause* of any **deprecated** attribute applied to the name or entity. — *end note*]

### 10.6.6 Fallthrough attribute [dcl.attr.fallthrough]

- <sup>1</sup> The *attribute-token* **fallthrough** may be applied to a null statement (9.2); such a statement is a fallthrough statement. The *attribute-token* **fallthrough** shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present. A fallthrough statement may only appear within an enclosing **switch** statement (9.4.2). The next statement that would be executed after a fallthrough statement shall be a labeled statement whose label is a case label or default label for the same **switch** statement. The program is ill-formed if there is no such statement.
- <sup>2</sup> [Note: The use of a fallthrough statement is intended to suppress a warning that an implementation might otherwise issue for a case or default label that is reachable from another case or default label along some path of execution. Implementations should issue a warning if a fallthrough statement is not dynamically reachable. — *end note*]
- <sup>3</sup> [Example:

```
void f(int n) {
 void g(), h(), i();
 switch (n) {
 case 1:
 case 2:
 g();
 [[fallthrough]];
 case 3:
 h();
 // warning on fallthrough discouraged
 case 4:
 i();
 // implementation may warn on fallthrough
 [[fallthrough]];
 // ill-formed
 }
}
```

— *end example*]

### 10.6.7 Likelihood attributes [dcl.attr.likelihood]

- <sup>1</sup> The *attribute-tokens* **likely** and **unlikely** may be applied to labels or statements. The *attribute-tokens* **likely** and **unlikely** shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present. The *attribute-token* **likely** shall not appear in an *attribute-specifier-seq* that contains the *attribute-token* **unlikely**.
- <sup>2</sup> [Note: The use of the **likely** attribute is intended to allow implementations to optimize for the case where paths of execution including it are arbitrarily more likely than any alternative path of execution that does not include such an attribute on a statement or label. The use of the **unlikely** attribute is intended to allow

implementations to optimize for the case where paths of execution including it are arbitrarily more unlikely than any alternative path of execution that does not include such an attribute on a statement or label. A path of execution includes a label if and only if it contains a jump to that label. Excessive usage of either of these attributes is liable to result in performance degradation. — *end note*]

3 [Example:

```
void g(int);
int f(int n) {
 if (n > 5) [[unlikely]] { // n > 5 is considered to be arbitrarily unlikely
 g(0);
 return n * 2 + 1;
 }

 switch (n) {
 case 1:
 g(1);
 [[fallthrough]];

 [[likely]] case 2: // n == 2 is considered to be arbitrarily more
 g(2); // likely than any other value of n
 break;
 }
 return 3;
}
```

— *end example*]

### 10.6.8 Maybe unused attribute [dcl.attr.unused]

- 1 The *attribute-token* `maybe_unused` indicates that a name or entity is possibly intentionally unused. It shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present.
- 2 The attribute may be applied to the declaration of a class, a *typedef-name*, a variable, a non-static data member, a function, an enumeration, or an enumerator.
- 3 [Note: For an entity marked `maybe_unused`, implementations should not emit a warning that the entity is unused, or that the entity is used despite the presence of the attribute. — *end note*]
- 4 A name or entity declared without the `maybe_unused` attribute can later be redeclared with the attribute and vice versa. An entity is considered marked after the first declaration that marks it.

5 [Example:

```
[[maybe_unused]] void f([[maybe_unused]] bool thing1,
 [[maybe_unused]] bool thing2) {
 [[maybe_unused]] bool b = thing1 && thing2;
 assert(b);
}
```

Implementations should not warn that `b` is unused, whether or not `NDEBUG` is defined. — *end example*]

### 10.6.9 Nodiscard attribute [dcl.attr.nodiscard]

- 1 The *attribute-token* `nodiscard` may be applied to the *declarator-id* in a function declaration or to the declaration of a class or enumeration. It shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present.
- 2 [Note: A nodiscard call is a function call expression that calls a function previously declared `nodiscard`, or whose return type is a possibly cv-qualified class or enumeration type marked `nodiscard`. Appearance of a nodiscard call as a potentially-evaluated discarded-value expression (8.2) is discouraged unless explicitly cast to `void`. Implementations should issue a warning in such cases. This is typically because discarding the return value of a nodiscard call has surprising consequences. — *end note*]

3 [Example:

```
struct [[nodiscard]] error_info { /* ... */ };
error_info enable_missile_safety_mode();
void launch_missiles();
```

```

void test_missiles() {
 enable_missile_safety_mode(); // warning encouraged
 launch_missiles();
}
error_info &foo();
void f() { foo(); } // warning not encouraged: not a nodiscard call, because neither
 // the (reference) return type nor the function is declared nodiscard

```

— end example]

### 10.6.10 Noreturn attribute [dcl.attr.noreturn]

- 1 The *attribute-token* `noreturn` specifies that a function does not return. It shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present. The attribute may be applied to the *declarator-id* in a function declaration. The first declaration of a function shall specify the `noreturn` attribute if any declaration of that function specifies the `noreturn` attribute. If a function is declared with the `noreturn` attribute in one translation unit and the same function is declared without the `noreturn` attribute in another translation unit, the program is ill-formed, no diagnostic required.
- 2 If a function `f` is called where `f` was previously declared with the `noreturn` attribute and `f` eventually returns, the behavior is undefined. [Note: The function may terminate by throwing an exception. — end note] [Note: Implementations should issue a warning if a function marked [[`noreturn`]] might return. — end note]
- 3 [Example:

```

[[noreturn]] void f() {
 throw "error"; // OK
}

[[noreturn]] void q(int i) { // behavior is undefined if called with an argument <= 0
 if (i > 0)
 throw "positive";
}

```

— end example]

### 10.6.11 No unique address attribute [dcl.attr.nouniqueaddr]

- 1 The *attribute-token* `no_unique_address` specifies that a non-static data member is a potentially-overlapping subobject (6.6.2). It shall appear at most once in each *attribute-list* and no *attribute-argument-clause* shall be present. The attribute may pertain to a non-static data member other than a bit-field.
- 2 [Note: The non-static data member can share the address of another non-static data member or that of a base class, and any padding that would normally be inserted at the end of the object can be reused as storage for other members. — end note] [Example:

```

template<typename Key, typename Value,
 typename Hash, typename Pred, typename Allocator>
class hash_map {
 [[no_unique_address]] Hash hasher;
 [[no_unique_address]] Pred pred;
 [[no_unique_address]] Allocator alloc;
 Bucket *buckets;
 // ...
public:
 // ...
};

```

Here, `hasher`, `pred`, and `alloc` could have the same address as `buckets` if their respective types are all empty. — end example]



# 11 Declarators

[dcl.decl]

- <sup>1</sup> A declarator declares a single variable, function, or type, within a declaration. The *init-declarator-list* appearing in a declaration is a comma-separated sequence of declarators, each of which can have an initializer.

```

init-declarator-list:
 init-declarator
 init-declarator-list , init-declarator

init-declarator:
 declarator initializeropt
 declarator requires-clause

```

- <sup>2</sup> The three components of a *simple-declaration* are the attributes (10.6), the specifiers (*decl-specifier-seq*; 10.1) and the declarators (*init-declarator-list*). The specifiers indicate the type, storage class or other properties of the entities being declared. The declarators specify the names of these entities and (optionally) modify the type of the specifiers with operators such as \* (pointer to) and () (function returning). Initial values can also be specified in a declarator; initializers are discussed in 11.6 and 15.6.
- <sup>3</sup> Each *init-declarator* in a declaration is analyzed separately as if it was in a declaration by itself. [Note: A declaration with several declarators is usually equivalent to the corresponding sequence of declarations each with a single declarator. That is

```
T D1, D2, ... Dn;
```

is usually equivalent to

```
T D1; T D2; ... T Dn;
```

where T is a *decl-specifier-seq* and each Di is an *init-declarator*. One exception is when a name introduced by one of the *declarators* hides a type name used by the *decl-specifiers*, so that when the same *decl-specifiers* are used in a subsequent declaration, they do not have the same meaning, as in

```

struct S { /* ... */ };
S S, T; // declare two instances of struct S

```

which is not equivalent to

```

struct S { /* ... */ };
S S;
S T; // error

```

Another exception is when T is *auto* (10.1.7.4), for example:

```
auto i = 1, j = 2.0; // error: deduced types for i and j do not match
```

as opposed to

```

auto i = 1; // OK: i deduced to have type int
auto j = 2.0; // OK: j deduced to have type double

```

— end note]

- <sup>4</sup> The optional *requires-clause* (Clause 17) in an *init-declarator* or *member-declarator* shall not be present when the declarator does not declare a function (11.3.5). When present after a declarator, the *requires-clause* is called the *trailing requires-clause*. The trailing *requires-clause* introduces the *constraint-expression* that results from interpreting its *constraint-logical-or-expression* as a *constraint-expression*. [Example:

```

void f1(int a) requires true; // OK
auto f2(int a) -> bool requires true; // OK
auto f3(int a) requires true -> bool; // error: requires-clause precedes trailing-return-type
void (*pf)() requires true; // error: constraint on a variable
void g(int (*)() requires true); // error: constraint on a parameter-declaration

```

```
auto* p = new void(*) (char) requires true; // error: not a function declaration
```

— end example]

- <sup>5</sup> Declarators have the syntax

*declarator*:

*ptr-declarator*  
*noptr-declarator parameters-and-qualifiers trailing-return-type*

*ptr-declarator*:

*noptr-declarator*  
*ptr-operator ptr-declarator*

*noptr-declarator*:

*declarator-id attribute-specifier-seq<sub>opt</sub>*  
*noptr-declarator parameters-and-qualifiers*  
*noptr-declarator [ constant-expression<sub>opt</sub> ] attribute-specifier-seq<sub>opt</sub>*  
*( ptr-declarator )*

*parameters-and-qualifiers*:

*( parameter-declaration-clause ) cv-qualifier-seq<sub>opt</sub>*  
*ref-qualifier<sub>opt</sub> noexcept-specifier<sub>opt</sub> attribute-specifier-seq<sub>opt</sub>*

*trailing-return-type*:

*-> type-id*

*ptr-operator*:

*\* attribute-specifier-seq<sub>opt</sub> cv-qualifier-seq<sub>opt</sub>*  
*& attribute-specifier-seq<sub>opt</sub>*  
*&& attribute-specifier-seq<sub>opt</sub>*  
*nested-name-specifier \* attribute-specifier-seq<sub>opt</sub> cv-qualifier-seq<sub>opt</sub>*

*cv-qualifier-seq*:

*cv-qualifier cv-qualifier-seq<sub>opt</sub>*

*cv-qualifier*:

**const**  
**volatile**

*ref-qualifier*:

**&**  
**&&**

*declarator-id*:

*...<sub>opt</sub> id-expression*

## 11.1 Type names

[**dcl.name**]

- <sup>1</sup> To specify type conversions explicitly, and as an argument of **sizeof**, **alignof**, **new**, or **typeid**, the name of a type shall be specified. This can be done with a *type-id*, which is syntactically a declaration for a variable or function of that type that omits the name of the entity.

*type-id*:

*type-specifier-seq abstract-declarator<sub>opt</sub>*

*defining-type-id*:

*defining-type-specifier-seq abstract-declarator<sub>opt</sub>*

*abstract-declarator*:

*ptr-abstract-declarator*  
*noptr-abstract-declarator<sub>opt</sub> parameters-and-qualifiers trailing-return-type*  
*abstract-pack-declarator*

*ptr-abstract-declarator*:

*noptr-abstract-declarator*  
*ptr-operator ptr-abstract-declarator<sub>opt</sub>*

*noptr-abstract-declarator*:

*noptr-abstract-declarator<sub>opt</sub> parameters-and-qualifiers*  
*noptr-abstract-declarator<sub>opt</sub> [ constant-expression<sub>opt</sub> ] attribute-specifier-seq<sub>opt</sub>*  
*( ptr-abstract-declarator )*

*abstract-pack-declarator*:

*noptr-abstract-pack-declarator*  
*ptr-operator abstract-pack-declarator*

```

nopr-abstract-pack-declarator:
 nopr-abstract-pack-declarator parameters-and-qualifiers
 nopr-abstract-pack-declarator [constant-expressionopt] attribute-specifier-seqopt
 ...

```

It is possible to identify uniquely the location in the *abstract-declarator* where the identifier would appear if the construction were a declarator in a declaration. The named type is then the same as the type of the hypothetical identifier. [Example:

```

int // int i
int * // int *pi
int *[3] // int *p[3]
int (*)[3] // int (*pi)[3]
int *() // int *f()
int *(double) // int (*pf)(double)

```

name respectively the types “int”, “pointer to int”, “array of 3 pointers to int”, “pointer to array of 3 int”, “function of (no parameters) returning pointer to int”, and “pointer to a function of (double) returning int”. — end example]

- <sup>2</sup> A type can also be named (often more easily) by using a `typedef` (10.1.3).

## 11.2 Ambiguity resolution

[dcl.ambig.res]

- <sup>1</sup> The ambiguity arising from the similarity between a function-style cast and a declaration mentioned in 9.8 can also occur in the context of a declaration. In that context, the choice is between a function declaration with a redundant set of parentheses around a parameter name and an object declaration with a function-style cast as the initializer. Just as for the ambiguities mentioned in 9.8, the resolution is to consider any construct that could possibly be a declaration a declaration. [Note: A declaration can be explicitly disambiguated by adding parentheses around the argument. The ambiguity can be avoided by use of copy-initialization or list-initialization syntax, or by use of a non-function-style cast. — end note] [Example:

```

struct S {
 S(int);
};

void foo(double a) {
 S w(int(a)); // function declaration
 S x(int()); // function declaration
 S y((int(a))); // object declaration
 S y((int)a); // object declaration
 S z = int(a); // object declaration
}

```

— end example]

- <sup>2</sup> An ambiguity can arise from the similarity between a function-style cast and a *type-id*. The resolution is that any construct that could possibly be a *type-id* in its syntactic context shall be considered a *type-id*. [Example:

```

template <class T> struct X {};
template <int N> struct Y {};
X<int()> a; // type-id
X<int(1)> b; // expression (ill-formed)
Y<int()> c; // type-id (ill-formed)
Y<int(1)> d; // expression

void foo(signed char a) {
 sizeof(int()); // type-id (ill-formed)
 sizeof(int(a)); // expression
 sizeof(int(unsigned(a))); // type-id (ill-formed)

 (int())+1; // type-id (ill-formed)
 (int(a))+1; // expression
 (int(unsigned(a)))+1; // type-id (ill-formed)
}

```

— end example]

- 3 Another ambiguity arises in a *parameter-declaration-clause* when a *type-name* is nested in parentheses. In this case, the choice is between the declaration of a parameter of type pointer to function and the declaration of a parameter with redundant parentheses around the *declarator-id*. The resolution is to consider the *type-name* as a *simple-type-specifier* rather than a *declarator-id*. [Example:

```
class C { };
void f(int(C)) { } // void f(int(*fp)(C c)) { }
 // not: void f(int C) { }

int g(C);

void foo() {
 f(1); // error: cannot convert 1 to function pointer
 f(g); // OK
}
```

For another example,

```
class C { };
void h(int *(C[10])); // void h(int *(*_fp)(C _parm[10]));
 // not: void h(int *C[10]);
```

— end example]

### 11.3 Meaning of declarators

[dcl.meaning]

- 1 A declarator contains exactly one *declarator-id*; it names the identifier that is declared. An *unqualified-id* occurring in a *declarator-id* shall be a simple *identifier* except for the declaration of some special functions (15.1, 15.3, 15.4, 16.5) and for the declaration of template specializations or partial specializations (17.8). When the *declarator-id* is qualified, the declaration shall refer to a previously declared member of the class or namespace to which the qualifier refers (or, in the case of a namespace, of an element of the inline namespace set of that namespace (10.3.1)) or to a specialization thereof; the member shall not merely have been introduced by a *using-declaration* in the scope of the class or namespace nominated by the *nested-name-specifier* of the *declarator-id*. The *nested-name-specifier* of a qualified *declarator-id* shall not begin with a *decltype-specifier*. [Note: If the qualifier is the global `::` scope resolution operator, the *declarator-id* refers to a name declared in the global namespace scope. — end note] The optional *attribute-specifier-seq* following a *declarator-id* appertains to the entity that is declared.
- 2 A `static`, `thread_local`, `extern`, `mutable`, `friend`, `inline`, `virtual`, `constexpr`, or `typedef` specifier or an *explicit-specifier* applies directly to each *declarator-id* in an *init-declarator-list* or *member-declarator-list*; the type specified for each *declarator-id* depends on both the *decl-specifier-seq* and its *declarator*.
- 3 Thus, a declaration of a particular identifier has the form

T D

where T is of the form *attribute-specifier-seq<sub>opt</sub> decl-specifier-seq* and D is a declarator. Following is a recursive procedure for determining the type specified for the contained *declarator-id* by such a declaration.

- 4 First, the *decl-specifier-seq* determines a type. In a declaration

T D

the *decl-specifier-seq* T determines the type T. [Example: In the declaration

```
int unsigned i;
```

the type specifiers `int unsigned` determine the type “unsigned int” (10.1.7.2). — end example]

- 5 In a declaration *attribute-specifier-seq<sub>opt</sub> T D* where D is an unadorned identifier the type of this identifier is “T”.
- 6 In a declaration T D where D has the form

( D1 )

the type of the contained *declarator-id* is the same as that of the contained *declarator-id* in the declaration

T D1

Parentheses do not alter the type of the embedded *declarator-id*, but they can alter the binding of complex declarators.

### 11.3.1 Pointers

[dcl.ptr]

- <sup>1</sup> In a declaration T D where D has the form

```
* attribute-specifier-seqopt cv-qualifier-seqopt D1
```

and the type of the identifier in the declaration T D1 is “*derived-declarator-type-list* T”, then the type of the identifier of D is “*derived-declarator-type-list cv-qualifier-seq* pointer to T”. The *cv-qualifiers* apply to the pointer and not to the object pointed to. Similarly, the optional *attribute-specifier-seq* (10.6.1) appertains to the pointer and not to the object pointed to.

- <sup>2</sup> [Example: The declarations

```
const int ci = 10, *pc = &ci, *const cpc = pc, **ppc;
int i, *p, *const cp = &i;
```

declare *ci*, a constant integer; *pc*, a pointer to a constant integer; *cpc*, a constant pointer to a constant integer; *ppc*, a pointer to a pointer to a constant integer; *i*, an integer; *p*, a pointer to integer; and *cp*, a constant pointer to integer. The value of *ci*, *cpc*, and *cp* cannot be changed after initialization. The value of *pc* can be changed, and so can the object pointed to by *cp*. Examples of some correct operations are

```
i = ci;
*cp = ci;
pc++;
pc = cpc;
pc = p;
ppc = &pc;
```

Examples of ill-formed operations are

```
ci = 1; // error
ci++; // error
*pc = 2; // error
cp = &ci; // error
cpc++; // error
p = pc; // error
ppc = &p; // error
```

Each is unacceptable because it would either change the value of an object declared *const* or allow it to be changed through a *cv-unqualified* pointer later, for example:

```
*ppc = &ci; // OK, but would make p point to ci because of previous error
*p = 5; // clobber ci
```

— end example]

- <sup>3</sup> See also 8.5.18 and 11.6.

- <sup>4</sup> [Note: Forming a pointer to reference type is ill-formed; see 11.3.2. Forming a function pointer type is ill-formed if the function type has *cv-qualifiers* or a *ref-qualifier*; see 11.3.5. Since the address of a bit-field (12.2.4) cannot be taken, a pointer can never point to a bit-field. — end note]

### 11.3.2 References

[dcl.ref]

- <sup>1</sup> In a declaration T D where D has either of the forms

```
& attribute-specifier-seqopt D1
&& attribute-specifier-seqopt D1
```

and the type of the identifier in the declaration T D1 is “*derived-declarator-type-list* T”, then the type of the identifier of D is “*derived-declarator-type-list* reference to T”. The optional *attribute-specifier-seq* appertains to the reference type. *Cv-qualified* references are ill-formed except when the *cv-qualifiers* are introduced through the use of a *typedef-name* (10.1.3, 17.1) or *decltype-specifier* (10.1.7.2), in which case the *cv-qualifiers* are ignored. [Example:

```
typedef int& A;
const A aref = 3; // ill-formed; lvalue reference to non-const initialized with rvalue
```

The type of *aref* is “lvalue reference to *int*”, not “lvalue reference to *const int*”. — end example] [Note: A reference can be thought of as a name of an object. — end note] A declarator that specifies the type “reference to *cv void*” is ill-formed.

- <sup>2</sup> A reference type that is declared using `&` is called an *lvalue reference*, and a reference type that is declared using `&&` is called an *rvalue reference*. Lvalue references and rvalue references are distinct types. Except where explicitly noted, they are semantically equivalent and commonly referred to as references.

- <sup>3</sup> [Example:

```
void f(double& a) { a += 3.14; }
// ...
double d = 0;
f(d);
```

declares `a` to be a reference parameter of `f` so the call `f(d)` will add 3.14 to `d`.

```
int v[20];
// ...
int& g(int i) { return v[i]; }
// ...
g(3) = 7;
```

declares the function `g()` to return a reference to an integer so `g(3)=7` will assign 7 to the fourth element of the array `v`. For another example,

```
struct link {
 link* next;
};

link* first;

void h(link*& p) { // p is a reference to pointer
 p->next = first;
 first = p;
 p = 0;
}

void k() {
 link* q = new link;
 h(q);
}
```

declares `p` to be a reference to a pointer to `link` so `h(q)` will leave `q` with the value zero. See also 11.6.3. — end example]

- <sup>4</sup> It is unspecified whether or not a reference requires storage (6.6.4).
- <sup>5</sup> There shall be no references to references, no arrays of references, and no pointers to references. The declaration of a reference shall contain an *initializer* (11.6.3) except when the declaration contains an explicit **extern** specifier (10.1.1), is a class member (12.2) declaration within a class definition, or is the declaration of a parameter or a return type (11.3.5); see 6.1. A reference shall be initialized to refer to a valid object or function. [Note: In particular, a null reference cannot exist in a well-defined program, because the only way to create such a reference would be to bind it to the “object” obtained by indirection through a null pointer, which causes undefined behavior. As described in 12.2.4, a reference cannot be bound directly to a bit-field. — end note]
- <sup>6</sup> If a *typedef-name* (10.1.3, 17.1) or a *decltype-specifier* (10.1.7.2) denotes a type TR that is a reference to a type T, an attempt to create the type “lvalue reference to cv TR” creates the type “lvalue reference to T”, while an attempt to create the type “rvalue reference to cv TR” creates the type TR. [Note: This rule is known as reference collapsing. — end note] [Example:

```
int i;
typedef int& LRI;
typedef int&& RRI;

LRI& r1 = i; // r1 has the type int&
const LRI& r2 = i; // r2 has the type int&
const LRI&& r3 = i; // r3 has the type int&

RRI& r4 = i; // r4 has the type int&
RRI&& r5 = 5; // r5 has the type int&&
```

```

 decltype(r2)& r6 = i; // r6 has the type int&
 decltype(r2)&& r7 = i; // r7 has the type int&&

```

— end example]

- <sup>7</sup> [Note: Forming a reference to function type is ill-formed if the function type has *cv-qualifiers* or a *ref-qualifier*; see 11.3.5. — end note]

### 11.3.3 Pointers to members

[dcl.mptr]

- <sup>1</sup> In a declaration T D where D has the form

```

 nested-name-specifier * attribute-specifier-seqopt cv-qualifier-seqopt D1

```

and the *nested-name-specifier* denotes a class, and the type of the identifier in the declaration T D1 is “*derived-declarator-type-list* T”, then the type of the identifier of D is “*derived-declarator-type-list cv-qualifier-seq* pointer to member of class *nested-name-specifier* of type T”. The optional *attribute-specifier-seq* (10.6.1) appertains to the pointer-to-member.

- <sup>2</sup> [Example:

```

 struct X {
 void f(int);
 int a;
 };
 struct Y;

 int X::* pmi = &X::a;
 void (X::* pmf)(int) = &X::f;
 double X::* pmd;
 char Y::* pmc;

```

declares `pmi`, `pmf`, `pmd` and `pmc` to be a pointer to a member of X of type `int`, a pointer to a member of X of type `void(int)`, a pointer to a member of X of type `double` and a pointer to a member of Y of type `char` respectively. The declaration of `pmd` is well-formed even though X has no members of type `double`. Similarly, the declaration of `pmc` is well-formed even though Y is an incomplete type. `pmi` and `pmf` can be used like this:

```

 X obj;
 // ...
 obj.*pmi = 7; // assign 7 to an integer member of obj
 (obj.*pmf)(7); // call a function member of obj with the argument 7

```

— end example]

- <sup>3</sup> A pointer to member shall not point to a static member of a class (12.2.3), a member with reference type, or “*cv void*”.

[Note: See also 8.5.2 and 8.5.4. The type “pointer to member” is distinct from the type “pointer”, that is, a pointer to member is declared only by the pointer-to-member declarator syntax, and never by the pointer declarator syntax. There is no “reference-to-member” type in C++. — end note]

### 11.3.4 Arrays

[dcl.array]

- <sup>1</sup> In a declaration T D where D has the form

```

 D1 [constant-expressionopt] attribute-specifier-seqopt

```

and the type of the identifier in the declaration T D1 is “*derived-declarator-type-list* T”, then the type of the identifier of D is an array type; if the type of the identifier of D contains the *auto type-specifier*, the program is ill-formed. T is called the array *element type*; this type shall not be a reference type, *cv void*, or a function type. If the *constant-expression* (8.6) is present, it shall be a converted constant expression of type `std::size_t` and its value shall be greater than zero. The constant expression specifies the *bound* of (number of elements in) the array. If the value of the constant expression is N, the array has N elements numbered 0 to N-1, and the type of the identifier of D is “*derived-declarator-type-list* array of N T”. An object of array type contains a contiguously allocated non-empty set of N subobjects of type T. Except as noted below, if the constant expression is omitted, the type of the identifier of D is “*derived-declarator-type-list* array of unknown bound of T”, an incomplete object type. The type “*derived-declarator-type-list* array of N T” is a different type from the type “*derived-declarator-type-list* array of unknown bound of T”, see 6.7. Any type of the form “*cv-qualifier-seq* array of N T” is adjusted to “array of N *cv-qualifier-seq* T”, and similarly for “array of unknown bound of T”. The optional *attribute-specifier-seq* appertains to the array. [Example:

```
typedef int A[5], AA[2][3];
typedef const A CA; // type is "array of 5 const int"
typedef const AA CAA; // type is "array of 2 array of 3 const int"
```

— end example] [Note: An “array of N cv-qualifier-seq T” has cv-qualified type; see 6.7.3. — end note]

<sup>2</sup> An array can be constructed from one of the fundamental types (except `void`), from a pointer, from a pointer to member, from a class, from an enumeration type, or from another array.

<sup>3</sup> When several “array of” specifications are adjacent, a multidimensional array type is created; only the first of the constant expressions that specify the bounds of the arrays may be omitted. In addition to declarations in which an incomplete object type is allowed, an array bound may be omitted in some cases in the declaration of a function parameter (11.3.5). An array bound may also be omitted when the declarator is followed by an *initializer* (11.6), when a declarator for a static data member is followed by a *brace-or-equal-initializer* (12.2), or in an explicit type conversion (8.5.1.3). In these cases, the bound is calculated from the number of initial elements (say, N) supplied (11.6.1), and the type of the identifier of D is “array of N T”. Furthermore, if there is a preceding declaration of the entity in the same scope in which the bound was specified, an omitted array bound is taken to be the same as in that earlier declaration, and similarly for the definition of a static data member of a class.

<sup>4</sup> [Example:

```
float fa[17], *afp[17];
```

declares an array of `float` numbers and an array of pointers to `float` numbers. — end example]

<sup>5</sup> [Example:

```
int x3d[3][5][7];
```

declares an array of three elements, each of which is an array of five elements, each of which is an array of seven integers. The overall array can be viewed as a three-dimensional array of integers, with rank  $3 \times 5 \times 7$ . Any of the expressions `x3d`, `x3d[i]`, `x3d[i][j]`, `x3d[i][j][k]` can reasonably appear in an expression. The expression `x3d[i]` is equivalent to `*(x3d + i)`; in that expression, `x3d` is subject to the array-to-pointer conversion (7.2) and is first converted to a pointer to a 2-dimensional array with rank  $5 \times 7$  that points to the first element of `x3d`. Then `i` is added, which on typical implementations involves multiplying `i` by the length of the object to which the pointer points, which is `sizeof(int) × 5 × 7`. The result of the addition and indirection is an lvalue denoting the  $i^{\text{th}}$  array element of `x3d` (an array of five arrays of seven integers). If there is another subscript, the same argument applies again, so `x3d[i][j]` is an lvalue denoting the  $j^{\text{th}}$  array element of the  $i^{\text{th}}$  array element of `x3d` (an array of seven integers), and `x3d[i][j][k]` is an lvalue denoting the  $k^{\text{th}}$  array element of the  $j^{\text{th}}$  array element of the  $i^{\text{th}}$  array element of `x3d` (an integer). — end example] [Note: The first subscript in the declaration helps determine the amount of storage consumed by an array but plays no other part in subscript calculations. — end note]

<sup>6</sup> [Example:

```
extern int x[10];
struct S {
 static int y[10];
};

int x[]; // OK: bound is 10
int S::y[]; // OK: bound is 10

void f() {
 extern int x[];
 int i = sizeof(x); // error: incomplete object type
}
```

— end example]

<sup>7</sup> [Note: Conversions affecting expressions of array type are described in 7.2. — end note]

<sup>8</sup> [Note: The subscript operator can be overloaded for a class (16.5.5). For the operator’s built-in meaning, see 8.5.1.1. — end note]

### 11.3.5 Functions

[dcl.fct]

<sup>1</sup> In a declaration `T D` where `D` has the form



D1 ( *parameter-declaration-clause* ) *cv-qualifier-seq<sub>opt</sub>*  
*ref-qualifier<sub>opt</sub>* *noexcept-specifier<sub>opt</sub>* *attribute-specifier-seq<sub>opt</sub>*

and the type of the contained *declarator-id* in the declaration T D1 is “*derived-declarator-type-list* T”, the type of the *declarator-id* in D is “*derived-declarator-type-list* **noexcept<sub>opt</sub>** function of (*parameter-declaration-clause*) *cv-qualifier-seq<sub>opt</sub>* *ref-qualifier<sub>opt</sub>* returning T”, where the optional **noexcept** is present if and only if the exception specification (18.4) is non-throwing. The optional *attribute-specifier-seq* appertains to the function type.

- 2 In a declaration T D where D has the form

D1 ( *parameter-declaration-clause* ) *cv-qualifier-seq<sub>opt</sub>*  
*ref-qualifier<sub>opt</sub>* *noexcept-specifier<sub>opt</sub>* *attribute-specifier-seq<sub>opt</sub>* *trailing-return-type*

and the type of the contained *declarator-id* in the declaration T D1 is “*derived-declarator-type-list* T”, T shall be the single *type-specifier* **auto**. The type of the *declarator-id* in D is “*derived-declarator-type-list* **noexcept<sub>opt</sub>** function of (*parameter-declaration-clause*) *cv-qualifier-seq<sub>opt</sub>* *ref-qualifier<sub>opt</sub>* returning U”, where U is the type specified by the *trailing-return-type*, and where the optional **noexcept** is present if and only if the exception specification is non-throwing. The optional *attribute-specifier-seq* appertains to the function type.

- 3 A type of either form is a *function type*.<sup>101</sup>

*parameter-declaration-clause*:

*parameter-declaration-list<sub>opt</sub>* *...<sub>opt</sub>*  
*parameter-declaration-list* , ...

*parameter-declaration-list*:

*parameter-declaration*  
*parameter-declaration-list* , *parameter-declaration*

*parameter-declaration*:

*attribute-specifier-seq<sub>opt</sub>* *decl-specifier-seq* *declarator*  
*attribute-specifier-seq<sub>opt</sub>* *decl-specifier-seq* *declarator* = *initializer-clause*  
*attribute-specifier-seq<sub>opt</sub>* *decl-specifier-seq* *abstract-declarator<sub>opt</sub>*  
*attribute-specifier-seq<sub>opt</sub>* *decl-specifier-seq* *abstract-declarator<sub>opt</sub>* = *initializer-clause*

The optional *attribute-specifier-seq* in a *parameter-declaration* appertains to the parameter.

- 4 The *parameter-declaration-clause* determines the arguments that can be specified, and their processing, when the function is called. [Note: The *parameter-declaration-clause* is used to convert the arguments specified on the function call; see 8.5.1.2. — end note] If the *parameter-declaration-clause* is empty, the function takes no arguments. A parameter list consisting of a single unnamed parameter of non-dependent type **void** is equivalent to an empty parameter list. Except for this special case, a parameter shall not have type *cv void*. If the *parameter-declaration-clause* terminates with an ellipsis or a function parameter pack (17.6.3), the number of arguments shall be equal to or greater than the number of parameters that do not have a default argument and are not function parameter packs. Where syntactically correct and where “...” is not part of an *abstract-declarator*, “, ...” is synonymous with “...”. [Example: The declaration

```
int printf(const char*, ...);
```

declares a function that can be called with varying numbers and types of arguments.

```
printf("hello world");
printf("a=%d b=%d", a, b);
```

However, the first argument must be of a type that can be converted to a **const char\*** — end example] [Note: The standard header <stdarg.h> contains a mechanism for accessing arguments passed using the ellipsis (see 8.5.1.2 and 21.12). — end note]

- 5 The type of a function is determined using the following rules. The type of each parameter (including function parameter packs) is determined from its own *decl-specifier-seq* and *declarator*. After determining the type of each parameter, any parameter of type “array of T” or of function type T is adjusted to be “pointer to T”. After producing the list of parameter types, any top-level *cv-qualifiers* modifying a parameter type are deleted when forming the function type. The resulting list of transformed parameter types and the presence or absence of the ellipsis or a function parameter pack is the function’s *parameter-type-list*. [Note: This transformation does not affect the types of the parameters. For example, **int(\*) (const int p, decltype(p)\*)** and **int(\*) (int, const int\*)** are identical types. — end note]

<sup>101</sup>) As indicated by syntax, *cv-qualifiers* are a significant component in function return types.

<sup>6</sup> A function type with a *cv-qualifier-seq* or a *ref-qualifier* (including a type named by *typedef-name* (10.1.3, 17.1)) shall appear only as:

- (6.1) — the function type for a non-static member function,
- (6.2) — the function type to which a pointer to member refers,
- (6.3) — the top-level function type of a function typedef declaration or *alias-declaration*,
- (6.4) — the *type-id* in the default argument of a *type-parameter* (17.1), or
- (6.5) — the *type-id* of a *template-argument* for a *type-parameter* (17.3.1).

[*Example:*

```
typedef int FIC(int) const;
FIC f; // ill-formed: does not declare a member function
struct S {
 FIC f; // OK
};
FIC S::*pm = &S::f; // OK
```

— *end example*]

<sup>7</sup> The effect of a *cv-qualifier-seq* in a function declarator is not the same as adding cv-qualification on top of the function type. In the latter case, the cv-qualifiers are ignored. [*Note:* A function type that has a *cv-qualifier-seq* is not a cv-qualified type; there are no cv-qualified function types. — *end note*] [*Example:*

```
typedef void F();
struct S {
 const F f; // OK: equivalent to: void f();
};
```

— *end example*]

<sup>8</sup> The return type, the parameter-type-list, the *ref-qualifier*, the *cv-qualifier-seq*, and the exception specification, but not the default arguments (11.3.6) or the trailing *requires-clause* (Clause 11), are part of the function type. [*Note:* Function types are checked during the assignments and initializations of pointers to functions, references to functions, and pointers to member functions. — *end note*]

<sup>9</sup> [*Example:* The declaration

```
int fseek(FILE*, long, int);
```

declares a function taking three arguments of the specified types, and returning `int` (10.1.7). — *end example*]

<sup>10</sup> A single name can be used for several different functions in a single scope; this is function overloading (Clause 16). All declarations for a function shall have equivalent return types, parameter-type-lists, and *requires-clauses* (17.6.6.1).

<sup>11</sup> Functions shall not have a return type of type array or function, although they may have a return type of type pointer or reference to such things. There shall be no arrays of functions, although there can be arrays of pointers to functions.

<sup>12</sup> Types shall not be defined in return or parameter types.

<sup>13</sup> A typedef of function type may be used to declare a function but shall not be used to define a function (11.4).

[*Example:*

```
typedef void F();
F fv; // OK: equivalent to void fv();
F fv { } // ill-formed
void fv() { } // OK: definition of fv
```

— *end example*]

<sup>14</sup> An identifier can optionally be provided as a parameter name; if present in a function definition (11.4), it names a parameter. [*Note:* In particular, parameter names are also optional in function definitions and names used for a parameter in different declarations and the definition of a function need not be the same. If a parameter name is present in a function declaration that is not a definition, it cannot be used outside of its function declarator because that is the extent of its potential scope (6.3.4). — *end note*]

<sup>15</sup> [*Example:* The declaration

```
int i,
 *pi,
 f(),
 *fpi(int),
 (*pif)(const char*, const char*),
 (*fpif(int))(int);
```

declares an integer `i`, a pointer `pi` to an integer, a function `f` taking no arguments and returning an integer, a function `fpi` taking an integer argument and returning a pointer to an integer, a pointer `pif` to a function which takes two pointers to constant characters and returns an integer, a function `fpif` taking an integer argument and returning a pointer to a function that takes an integer argument and returns an integer. It is especially useful to compare `fpi` and `pif`. The binding of `*fpi(int)` is `*(fpi(int))`, so the declaration suggests, and the same construction in an expression requires, the calling of a function `fpi`, and then using indirection through the (pointer) result to yield an integer. In the declarator `(*pif)(const char*, const char*)`, the extra parentheses are necessary to indicate that indirection through a pointer to a function yields a function, which is then called. — *end example*] [*Note*: Typedefs and *trailing-return-types* are sometimes convenient when the return type of a function is complex. For example, the function `fpif` above could have been declared

```
typedef int IFUNC(int);
IFUNC* fpif(int);
```

or

```
auto fpif(int)->int(*) (int);
```

A *trailing-return-type* is most useful for a type that would be more complicated to specify before the *declarator-id*:

```
template <class T, class U> auto add(T t, U u) -> decltype(t + u);
```

rather than

```
template <class T, class U> decltype((*T*)0 + *(U*)0) add(T t, U u);
```

— *end note*]

<sup>16</sup> A *non-template function* is a function that is not a function template specialization. [*Note*: A function template is not a function. — *end note*]

<sup>17</sup> A *declarator-id* or *abstract-declarator* containing an ellipsis shall only be used in a *parameter-declaration*. When it is part of a *parameter-declaration-clause*, the *parameter-declaration* declares a function parameter pack (17.6.3). Otherwise, the *parameter-declaration* is part of a *template-parameter-list* and declares a template parameter pack; see 17.1. A function parameter pack is a pack expansion (17.6.3). [*Example*:

```
template<typename... T> void f(T (* ...t)(int, int));
```

```
int add(int, int);
float subtract(int, int);
```

```
void g() {
 f(add, subtract);
}
```

— *end example*]

<sup>18</sup> There is a syntactic ambiguity when an ellipsis occurs at the end of a *parameter-declaration-clause* without a preceding comma. In this case, the ellipsis is parsed as part of the *abstract-declarator* if the type of the parameter either names a template parameter pack that has not been expanded or contains `auto`; otherwise, it is parsed as part of the *parameter-declaration-clause*.<sup>102</sup>

### 11.3.6 Default arguments

[**dcl.fct.default**]

<sup>1</sup> If an *initializer-clause* is specified in a *parameter-declaration* this *initializer-clause* is used as a default argument. [*Note*: Default arguments will be used in calls where trailing arguments are missing (8.5.1.2). — *end note*]

---

<sup>102</sup> One can explicitly disambiguate the parse either by introducing a comma (so the ellipsis will be parsed as part of the *parameter-declaration-clause*) or by introducing a name for the parameter (so the ellipsis will be parsed as part of the *declarator-id*).

- 2 [Example: The declaration

```
void point(int = 3, int = 4);
```

declares a function that can be called with zero, one, or two arguments of type `int`. It can be called in any of these ways:

```
point(1,2); point(1); point();
```

The last two calls are equivalent to `point(1,4)` and `point(3,4)`, respectively. — end example]

- 3 A default argument shall be specified only in the *parameter-declaration-clause* of a function declaration or *lambda-declarator* or in a *template-parameter* (17.1); in the latter case, the *initializer-clause* shall be an *assignment-expression*. A default argument shall not be specified for a template parameter pack or a function parameter pack. If it is specified in a *parameter-declaration-clause*, it shall not occur within a *declarator* or *abstract-declarator* of a *parameter-declaration*.<sup>103</sup>
- 4 For non-template functions, default arguments can be added in later declarations of a function in the same scope. Declarations in different scopes have completely distinct sets of default arguments. That is, declarations in inner scopes do not acquire default arguments from declarations in outer scopes, and vice versa. In a given function declaration, each parameter subsequent to a parameter with a default argument shall have a default argument supplied in this or a previous declaration, unless the parameter was expanded from a parameter pack, or shall be a function parameter pack. A default argument shall not be redefined by a later declaration (not even to the same value). [Example:

```
void g(int = 0, ...); // OK, ellipsis is not a parameter so it can follow
 // a parameter with a default argument

void f(int, int);
void f(int, int = 7);
void h() {
 f(3); // OK, calls f(3, 7)
 void f(int = 1, int); // error: does not use default from surrounding scope
}
void m() {
 void f(int, int); // has no defaults
 f(4); // error: wrong number of arguments
 void f(int, int = 5); // OK
 f(4); // OK, calls f(4, 5);
 void f(int, int = 5); // error: cannot redefine, even to same value
}
void n() {
 f(6); // OK, calls f(6, 7)
}
template<class ... T> struct C {
 void f(int n = 0, T...);
};
C<int> c; // OK, instantiates declaration void C::f(int n = 0, int)
```

— end example] For a given inline function defined in different translation units, the accumulated sets of default arguments at the end of the translation units shall be the same; see 6.2. If a friend declaration specifies a default argument expression, that declaration shall be a definition and shall be the only declaration of the function or function template in the translation unit.

- 5 The default argument has the same semantic constraints as the initializer in a declaration of a variable of the parameter type, using the copy-initialization semantics (11.6). The names in the default argument are bound, and the semantic constraints are checked, at the point where the default argument appears. Name lookup and checking of semantic constraints for default arguments in function templates and in member functions of class templates are performed as described in 17.8.1. [Example: In the following code, `g` will be called with the value `f(2)`:

```
int a = 1;
int f(int);
int g(int x = f(a)); // default argument: f(2)
```

<sup>103</sup>) This means that default arguments cannot appear, for example, in declarations of pointers to functions, references to functions, or `typedef` declarations.

```

void h() {
 a = 2;
 {
 int a = 3;
 g(); // g(f(:,a))
 }
}

```

— *end example*] [Note: In member function declarations, names in default arguments are looked up as described in 6.4.1. Access checking applies to names in default arguments as described in Clause 14. — *end note*]

- 6 Except for member functions of class templates, the default arguments in a member function definition that appears outside of the class definition are added to the set of default arguments provided by the member function declaration in the class definition; the program is ill-formed if a default constructor (15.1), copy or move constructor, or copy or move assignment operator (15.8) is so declared. Default arguments for a member function of a class template shall be specified on the initial declaration of the member function within the class template. [*Example*:

```

class C {
 void f(int i = 3);
 void g(int i, int j = 99);
};

void C::f(int i = 3) {} // error: default argument already specified in class scope
void C::g(int i = 88, int j) {} // in this translation unit, C::g can be called with no argument

```

— *end example*]

- 7 [Note: A local variable cannot be odr-used (6.2) in a default argument. — *end note*] [*Example*:

```

void f() {
 int i;
 extern void g(int x = i); // error
 extern void h(int x = sizeof(i)); // OK
 // ...
}

```

— *end example*]

- 8 [Note: The keyword `this` may not appear in a default argument of a member function; see 8.4.2. [*Example*:

```

class A {
 void f(A* p = this) {} // error
};

```

— *end example*] — *end note*]

- 9 A default argument is evaluated each time the function is called with no argument for the corresponding parameter. A parameter shall not appear as a potentially-evaluated expression in a default argument. Parameters of a function declared before a default argument are in scope and can hide namespace and class member names. [*Example*:

```

int a;
int f(int a, int b = a); // error: parameter a used as default argument
typedef int I;
int g(float I, int b = I(2)); // error: parameter I found
int h(int a, int b = sizeof(a)); // OK, unevaluated operand

```

— *end example*] A non-static member shall not appear in a default argument unless it appears as the *id-expression* of a class member access expression (8.5.1.5) or unless it is used to form a pointer to member (8.5.2.1). [*Example*: The declaration of `X::mem1()` in the following example is ill-formed because no object is supplied for the non-static member `X::a` used as an initializer.

```

int b;
class X {
 int a;
 int mem1(int i = a); // error: non-static member a used as default argument
 int mem2(int i = b); // OK; use X::b
};

```

```
 static int b;
};
```

The declaration of `X::mem2()` is meaningful, however, since no object is needed to access the static member `X::b`. Classes, objects, and members are described in [Clause 12](#). — *end example*] A default argument is not part of the type of a function. [*Example*:

```
int f(int = 0);

void h() {
 int j = f(1);
 int k = f(); // OK, means f(0)
}

int (*p1)(int) = &f;
int (*p2)() = &f; // error: type mismatch
```

— *end example*] When a declaration of a function is introduced by way of a *using-declaration* ([10.3.3](#)), any default argument information associated with the declaration is made known as well. If the function is redeclared thereafter in the namespace with additional default arguments, the additional arguments are also known at any point following the redeclaration where the *using-declaration* is in scope.

- <sup>10</sup> A virtual function call ([13.3](#)) uses the default arguments in the declaration of the virtual function determined by the static type of the pointer or reference denoting the object. An overriding function in a derived class does not acquire default arguments from the function it overrides. [*Example*:

```
struct A {
 virtual void f(int a = 7);
};
struct B : public A {
 void f(int a);
};
void m() {
 B* pb = new B;
 A* pa = pb;
 pa->f(); // OK, calls pa->B::f(7)
 pb->f(); // error: wrong number of arguments for B::f()
}
```

— *end example*]

## 11.4 Function definitions

[[dcl.fct.def](#)]

### 11.4.1 In general

[[dcl.fct.def.general](#)]

- <sup>1</sup> Function definitions have the form

```
function-definition:
 attribute-specifier-seqopt decl-specifier-seqopt declarator virt-specifier-seqopt function-body
 attribute-specifier-seqopt decl-specifier-seqopt declarator requires-clause function-body

function-body:
 ctor-initializeropt compound-statement
 function-try-block
 = default ;
 = delete ;
```

Any informal reference to the body of a function should be interpreted as a reference to the non-terminal *function-body*. The optional *attribute-specifier-seq* in a *function-definition* appertains to the function. A *virt-specifier-seq* can be part of a *function-definition* only if it is a *member-declaration* ([12.2](#)).

- <sup>2</sup> In a *function-definition*, either `void declarator ;` or `declarator ;` shall be a well-formed function declaration as described in [11.3.5](#). A function shall be defined only in namespace or class scope. The type of a parameter or the return type for a function definition shall not be an incomplete or abstract (possibly cv-qualified) class type in the context of the function definition unless the function is deleted ([11.4.3](#)).
- <sup>3</sup> [*Example*: A simple example of a complete function definition is

```
int max(int a, int b, int c) {
 int m = (a > b) ? a : b;
```

```

 return (m > c) ? m : c;
}

```

Here `int` is the *decl-specifier-seq*; `max(int a, int b, int c)` is the *declarator*; `{ /* ... */ }` is the *function-body*. — *end example*]

4 A *ctor-initializer* is used only in a constructor; see 15.1 and 15.6.

5 [Note: A *cv-qualifier-seq* affects the type of `this` in the body of a member function; see 11.3.2. — *end note*]

6 [Note: Unused parameters need not be named. For example,

```

void print(int a, int) {
 std::printf("a = %d\n",a);
}

```

— *end note*]

7 In the *function-body*, a *function-local predefined variable* denotes a block-scope object of static storage duration that is implicitly defined (see 6.3.3).

8 The function-local predefined variable `__func__` is defined as if a definition of the form

```

static const char __func__[] = "function-name";

```

had been provided, where *function-name* is an implementation-defined string. It is unspecified whether such a variable has an address distinct from that of any other object in the program.<sup>104</sup> [Example:

```

struct S {
 S() : s(__func__) { } // OK
 const char* s;
};
void f(const char* s = __func__); // error: __func__ is undeclared

```

— *end example*]

### 11.4.2 Explicitly-defaulted functions

[**dcl.fct.def.default**]

1 A function definition whose *function-body* is of the form `= default` ; is called an *explicitly-defaulted* definition. A function that is explicitly defaulted shall

(1.1) — be a special member function or a comparison operator (8.5.8, 8.5.9, 8.5.10), and

(1.2) — not have default arguments.

2 The type  $T_1$  of an explicitly defaulted function  $F$  is allowed to differ from the type  $T_2$  it would have had if it were implicitly declared, as follows:

(2.1) —  $T_1$  and  $T_2$  may have differing *ref-qualifiers*; and

(2.2) — if  $T_2$  has a parameter of type `const C&`, the corresponding parameter of  $T_1$  may be of type `C&`.

If  $T_1$  differs from  $T_2$  in any other way, then:

(2.3) — if  $F$  is an assignment operator, and the return type of  $T_1$  differs from the return type of  $T_2$  or  $T_1$ 's parameter type is not a reference, the program is ill-formed;

(2.4) — otherwise, if  $F$  is explicitly defaulted on its first declaration, it is defined as deleted;

(2.5) — otherwise, the program is ill-formed.

3 An explicitly-defaulted function that is not defined as deleted may be declared `constexpr` only if it would have been implicitly declared as `constexpr`. If a function is explicitly defaulted on its first declaration, it is implicitly considered to be `constexpr` if the implicit declaration would be.

4 [Example:

```

struct S {
 constexpr S() = default; // ill-formed: implicit S() is not constexpr
 S(int a = 0) = default; // ill-formed: default argument
 void operator=(const S&) = default; // ill-formed: non-matching return type
 ~S() noexcept(false) = default; // deleted: exception specification does not match
private:
 int i;

```

<sup>104</sup> Implementations are permitted to provide additional predefined variables with names that are reserved to the implementation (5.10). If a predefined variable is not odr-used (6.2), its string value need not be present in the program image.

```

 S(S&); // OK: private copy constructor
};
S::S(S&) = default; // OK: defines copy constructor
— end example]

```

- 5 Explicitly-defaulted functions and implicitly-declared functions are collectively called *defaulted* functions, and the implementation shall provide implicit definitions for them (15.1 15.4, 15.8), which might mean defining them as deleted. A function is *user-provided* if it is user-declared and not explicitly defaulted or deleted on its first declaration. A user-provided explicitly-defaulted function (i.e., explicitly defaulted after its first declaration) is defined at the point where it is explicitly defaulted; if such a function is implicitly defined as deleted, the program is ill-formed. [Note: Declaring a function as defaulted after its first declaration can provide efficient execution and concise definition while enabling a stable binary interface to an evolving code base. — end note]

- 6 [Example:

```

struct trivial {
 trivial() = default;
 trivial(const trivial&) = default;
 trivial(trivial&&) = default;
 trivial& operator=(const trivial&) = default;
 trivial& operator=(trivial&&) = default;
 ~trivial() = default;
};

struct nontrivial1 {
 nontrivial1();
};
nontrivial1::nontrivial1() = default; // not first declaration
— end example]

```

### 11.4.3 Deleted definitions

[**dcl.fct.def.delete**]

- 1 A function definition whose *function-body* is of the form `= delete` ; is called a *deleted definition*. A function with a deleted definition is also called a *deleted function*.
- 2 A program that refers to a deleted function implicitly or explicitly, other than to declare it, is ill-formed. [Note: This includes calling the function implicitly or explicitly and forming a pointer or pointer-to-member to the function. It applies even for references in expressions that are not potentially-evaluated. If a function is overloaded, it is referenced only if the function is selected by overload resolution. The implicit odr-use (6.2) of a virtual function does not, by itself, constitute a reference. — end note]
- 3 [Example: One can prevent default initialization and initialization by non-doubles with

```

struct onlydouble {
 onlydouble() = delete; // OK, but redundant
 template<class T>
 onlydouble(T) = delete;
 onlydouble(double);
};
— end example]

```

[Example: One can prevent use of a class in certain *new-expressions* by using deleted definitions of a user-declared operator `new` for that class.

```

struct sometype {
 void* operator new(std::size_t) = delete;
 void* operator new[] (std::size_t) = delete;
};
sometype* p = new sometype; // error, deleted class operator new
sometype* q = new sometype[3]; // error, deleted class operator new[]
— end example]

```

[Example: One can make a class uncopyable, i.e., move-only, by using deleted definitions of the copy constructor and copy assignment operator, and then providing defaulted definitions of the move constructor and move assignment operator.



```

struct moveonly {
 moveonly() = default;
 moveonly(const moveonly&) = delete;
 moveonly(moveonly&&) = default;
 moveonly& operator=(const moveonly&) = delete;
 moveonly& operator=(moveonly&&) = default;
 ~moveonly() = default;
};
moveonly* p;
moveonly q(*p); // error, deleted copy constructor

```

— end example]

- 4 A deleted function is implicitly an inline function (10.1.6). [Note: The one-definition rule (6.2) applies to deleted definitions. — end note] A deleted definition of a function shall be the first declaration of the function or, for an explicit specialization of a function template, the first declaration of that specialization. An implicitly declared allocation or deallocation function (6.6.4.4) shall not be defined as deleted. [Example:

```

struct sometype {
 sometype();
};
sometype::sometype() = delete; // ill-formed; not first declaration

```

— end example]

## 11.5 Structured binding declarations

[**decl.struct.bind**]

- 1 A structured binding declaration introduces the *identifiers*  $v_0, v_1, v_2, \dots$  of the *identifier-list* as names (6.3.1) of *structured bindings*. Let *cv* denote the *cv-qualifiers* in the *decl-specifier-seq*. First, a variable with a unique name *e* is introduced. If the *assignment-expression* in the *initializer* has array type *A* and no *ref-qualifier* is present, *e* has type *cv A* and each element is copy-initialized or direct-initialized from the corresponding element of the *assignment-expression* as specified by the form of the *initializer*. Otherwise, *e* is defined as-if by

```

attribute-specifier-seqopt decl-specifier-seq ref-qualifieropt e initializer ;

```

where the declaration is never interpreted as a function declaration and the parts of the declaration other than the *declarator-id* are taken from the corresponding structured binding declaration. The type of the *id-expression* *e* is called *E*. [Note: *E* is never a reference type (8.2). — end note]

- 2 If the *initializer* refers to one of the names introduced by the structured binding declaration, the program is ill-formed.
- 3 If *E* is an array type with element type *T*, the number of elements in the *identifier-list* shall be equal to the number of elements of *E*. Each  $v_i$  is the name of an lvalue that refers to the element *i* of the array and whose type is *T*; the referenced type is *T*. [Note: The top-level *cv-qualifiers* of *T* are *cv*. — end note] [Example:

```

auto f() -> int(&)[2];
auto [x, y] = f(); // x and y refer to elements in a copy of the array return value
auto& [xr, yr] = f(); // xr and yr refer to elements in the array referred to by f's return value

```

— end example]

- 4 Otherwise, if the *qualified-id* `std::tuple_size<E>` names a complete type, the expression `std::tuple_size<E>::value` shall be a well-formed integral constant expression and the number of elements in the *identifier-list* shall be equal to the value of that expression. Let *i* be an index prvalue of type `std::size_t` corresponding to  $v_i$ . The *unqualified-id* `get` is looked up in the scope of *E* by class member access lookup (6.4.5), and if that finds at least one declaration that is a function template whose first template parameter is a non-type parameter, the initializer is `e.get<i>()`. Otherwise, the initializer is `get<i>(e)`, where `get` is looked up in the associated namespaces (6.4.2). In either case, `get<i>` is interpreted as a *template-id*. [Note: Ordinary unqualified lookup (6.4.1) is not performed. — end note] In either case, *e* is an lvalue if the type of the entity *e* is an lvalue reference and an xvalue otherwise. Given the type  $T_i$  designated by `std::tuple_element<i, E>::type`, variables are introduced with unique names  $r_i$  of type “reference to  $T_i$ ” initialized with the initializer (11.6.3), where the reference is an lvalue reference if the initializer is an lvalue and an rvalue reference otherwise. Each  $v_i$  is the name of an lvalue of type  $T_i$  that refers to the object bound to  $r_i$ ; the referenced type is  $T_i$ .
- 5 Otherwise, all of *E*’s non-static data members shall be direct members of *E* or of the same base class of *E*, well-formed when named as *e.name* in the context of the structured binding, *E* shall not have an anonymous

union member, and the number of elements in the *identifier-list* shall be equal to the number of non-static data members of E. Designating the non-static data members of E as  $m_0, m_1, m_2, \dots$  (in declaration order), each  $v_i$  is the name of an lvalue that refers to the member  $m_i$  of  $e$  and whose type is *cv*  $T_i$ , where  $T_i$  is the declared type of that member; the referenced type is *cv*  $T_i$ . The lvalue is a bit-field if that member is a bit-field. [*Example*:

```
struct S { int x1 : 2; volatile double y1; };
S f();
const auto [x, y] = f();
```

The type of the *id-expression*  $x$  is “`const int`”, the type of the *id-expression*  $y$  is “`const volatile double`”. — *end example*]

## 11.6 Initializers

[**dcl.init**]

- <sup>1</sup> The process of initialization described in this subclause applies to all initializations regardless of syntactic context, including the initialization of a function parameter (8.5.1.2), the initialization of a return value (9.6.3), or when an initializer follows a declarator.

*initializer*:

*brace-or-equal-initializer*  
( *expression-list* )

*brace-or-equal-initializer*:

= *initializer-clause*  
*braced-init-list*

*initializer-clause*:

*assignment-expression*  
*braced-init-list*

*braced-init-list*:

{ *initializer-list* , *opt* }  
{ *designated-initializer-list* , *opt* }  
{ }

*initializer-list*:

*initializer-clause* ... *opt*  
*initializer-list* , *initializer-clause* ... *opt*

*designated-initializer-list*:

*designated-initializer-clause*  
*designated-initializer-list* , *designated-initializer-clause*

*designated-initializer-clause*:

*designator* *brace-or-equal-initializer*

*designator*:

. *identifier*

*expr-or-braced-init-list*:

*expression*  
*braced-init-list*

[*Note*: The rules in this subclause apply even if the grammar permits only the *brace-or-equal-initializer* form of *initializer* in a given context. — *end note*]

- <sup>2</sup> Except for objects declared with the `constexpr` specifier, for which see 10.1.5, an *initializer* in the definition of a variable can consist of arbitrary expressions involving literals and previously declared variables and functions, regardless of the variable’s storage duration. [*Example*:

```
int f(int);
int a = 2;
int b = f(a);
int c(b);
```

— *end example*]

- <sup>3</sup> [*Note*: Default arguments are more restricted; see 11.3.6. — *end note*]

- <sup>4</sup> [*Note*: The order of initialization of variables with static storage duration is described in 6.8.3 and 9.7. — *end note*]

- <sup>5</sup> A declaration of a block-scope variable with external or internal linkage that has an *initializer* is ill-formed.

<sup>6</sup> To *zero-initialize* an object or reference of type T means:

- (6.1) — if T is a scalar type (6.7), the object is initialized to the value obtained by converting the integer literal 0 (zero) to T;<sup>105</sup>
- (6.2) — if T is a (possibly cv-qualified) non-union class type, its padding bits (6.7) are initialized to zero bits and each non-static data member, each non-virtual base class subobject, and, if the object is not a base class subobject, each virtual base class subobject is zero-initialized;
- (6.3) — if T is a (possibly cv-qualified) union type, its padding bits (6.7) are initialized to zero bits and the object's first non-static named data member is zero-initialized;
- (6.4) — if T is an array type, each element is zero-initialized;
- (6.5) — if T is a reference type, no initialization is performed.

<sup>7</sup> To *default-initialize* an object of type T means:

- (7.1) — If T is a (possibly cv-qualified) class type (Clause 12), constructors are considered. The applicable constructors are enumerated (16.3.1.3), and the best one for the *initializer* () is chosen through overload resolution (16.3). The constructor thus selected is called, with an empty argument list, to initialize the object.
- (7.2) — If T is an array type, each element is default-initialized.
- (7.3) — Otherwise, no initialization is performed.

A class type T is *const-default-constructible* if default-initialization of T would invoke a user-provided constructor of T (not inherited from a base class) or if

- (7.4) — each direct non-variant non-static data member M of T has a default member initializer or, if M is of class type X (or array thereof), X is const-default-constructible,
- (7.5) — if T is a union with at least one non-static data member, exactly one variant member has a default member initializer,
- (7.6) — if T is not a union, for each anonymous union member with at least one non-static data member (if any), exactly one non-static data member has a default member initializer, and
- (7.7) — each potentially constructed base class of T is const-default-constructible.

If a program calls for the default-initialization of an object of a const-qualified type T, T shall be a const-default-constructible class type or array thereof.

<sup>8</sup> To *value-initialize* an object of type T means:

- (8.1) — if T is a (possibly cv-qualified) class type (Clause 12) with either no default constructor (15.1) or a default constructor that is user-provided or deleted, then the object is default-initialized;
- (8.2) — if T is a (possibly cv-qualified) class type without a user-provided or deleted default constructor, then the object is zero-initialized and the semantic constraints for default-initialization are checked, and if T has a non-trivial default constructor, the object is default-initialized;
- (8.3) — if T is an array type, then each element is value-initialized;
- (8.4) — otherwise, the object is zero-initialized.

<sup>9</sup> A program that calls for default-initialization or value-initialization of an entity of reference type is ill-formed.

<sup>10</sup> [Note: Every object of static storage duration is zero-initialized at program startup before any other initialization takes place. In some cases, additional initialization is done later. — end note]

<sup>11</sup> An object whose initializer is an empty set of parentheses, i.e., (), shall be value-initialized.

[Note: Since () is not permitted by the syntax for *initializer*,

```
X a();
```

is not the declaration of an object of class X, but the declaration of a function taking no argument and returning an X. The form () is permitted in certain other initialization contexts (8.5.2.4, 8.5.1.3, 15.6.2). — end note]

<sup>12</sup> If no initializer is specified for an object, the object is default-initialized. When storage for an object with automatic or dynamic storage duration is obtained, the object has an *indeterminate value*, and if

---

<sup>105</sup>) As specified in 7.11, converting an integer literal whose value is 0 to a pointer type results in a null pointer value.

no initialization is performed for the object, that object retains an indeterminate value until that value is replaced (8.5.18). [Note: Objects with static or thread storage duration are zero-initialized, see 6.8.3.2. — end note] If an indeterminate value is produced by an evaluation, the behavior is undefined except in the following cases:

- (12.1) — If an indeterminate value of unsigned narrow character type (6.7.1) or `std::byte` type (21.2.1) is produced by the evaluation of:
  - (12.1.1) — the second or third operand of a conditional expression (8.5.16),
  - (12.1.2) — the right operand of a comma expression (8.5.19),
  - (12.1.3) — the operand of a cast or conversion (7.8, 8.5.1.3, 8.5.1.9, 8.5.3) to an unsigned narrow character type or `std::byte` type (21.2.1), or
  - (12.1.4) — a discarded-value expression (8.2),
 then the result of the operation is an indeterminate value.
- (12.2) — If an indeterminate value of unsigned narrow character type or `std::byte` type is produced by the evaluation of the right operand of a simple assignment operator (8.5.18) whose first operand is an lvalue of unsigned narrow character type or `std::byte` type, an indeterminate value replaces the value of the object referred to by the left operand.
- (12.3) — If an indeterminate value of unsigned narrow character type is produced by the evaluation of the initialization expression when initializing an object of unsigned narrow character type, that object is initialized to an indeterminate value.
- (12.4) — If an indeterminate value of unsigned narrow character type or `std::byte` type is produced by the evaluation of the initialization expression when initializing an object of `std::byte` type, that object is initialized to an indeterminate value.

[Example:

```
int f(bool b) {
 unsigned char c;
 unsigned char d = c; // OK, d has an indeterminate value
 int e = d; // undefined behavior
 return b ? d : 0; // undefined behavior if b is true
}
```

— end example]

- 13 An initializer for a static member is in the scope of the member's class. [Example:

```
int a;

struct X {
 static int a;
 static int b;
};

int X::a = 1;
int X::b = a; // X::b = X::a
```

— end example]

- 14 If the entity being initialized does not have class type, the *expression-list* in a parenthesized initializer shall be a single expression.
- 15 The initialization that occurs in the = form of a *brace-or-equal-initializer* or *condition* (9.4), as well as in argument passing, function return, throwing an exception (18.1), handling an exception (18.3), and aggregate member initialization (11.6.1), is called *copy-initialization*. [Note: Copy-initialization may invoke a move (15.8). — end note]
- 16 The initialization that occurs
  - (16.1) — for an *initializer* that is a parenthesized *expression-list* or a *braced-init-list*,
  - (16.2) — for a *new-initializer* (8.5.2.4),
  - (16.3) — in a `static_cast` expression (8.5.1.9),
  - (16.4) — in a functional notation type conversion (8.5.1.3), and

- (16.5) — in the *braced-init-list* form of a *condition* is called *direct-initialization*.
- 17 The semantics of initializers are as follows. The *destination type* is the type of the object or reference being initialized and the *source type* is the type of the initializer expression. If the initializer is not a single (possibly parenthesized) expression, the source type is not defined.
- (17.1) — If the initializer is a (non-parenthesized) *braced-init-list* or is = *braced-init-list*, the object or reference is list-initialized (11.6.4).
- (17.2) — If the destination type is a reference type, see 11.6.3.
- (17.3) — If the destination type is an array of characters, an array of `char16_t`, an array of `char32_t`, or an array of `wchar_t`, and the initializer is a string literal, see 11.6.2.
- (17.4) — If the initializer is `()`, the object is value-initialized.
- (17.5) — Otherwise, if the destination type is an array, the program is ill-formed.
- (17.6) — If the destination type is a (possibly cv-qualified) class type:
- (17.6.1) — If the initializer expression is a prvalue and the cv-unqualified version of the source type is the same class as the class of the destination, the initializer expression is used to initialize the destination object. [*Example*: `T x = T(T(T()))`; calls the T default constructor to initialize x. — *end example*]
- (17.6.2) — Otherwise, if the initialization is direct-initialization, or if it is copy-initialization where the cv-unqualified version of the source type is the same class as, or a derived class of, the class of the destination, constructors are considered. The applicable constructors are enumerated (16.3.1.3), and the best one is chosen through overload resolution (16.3). The constructor so selected is called to initialize the object, with the initializer expression or *expression-list* as its argument(s). If no constructor applies, or the overload resolution is ambiguous, the initialization is ill-formed.
- (17.6.3) — Otherwise (i.e., for the remaining copy-initialization cases), user-defined conversion sequences that can convert from the source type to the destination type or (when a conversion function is used) to a derived class thereof are enumerated as described in 16.3.1.4, and the best one is chosen through overload resolution (16.3). If the conversion cannot be done or is ambiguous, the initialization is ill-formed. The function selected is called with the initializer expression as its argument; if the function is a constructor, the call is a prvalue of the cv-unqualified version of the destination type whose result object is initialized by the constructor. The call is used to direct-initialize, according to the rules above, the object that is the destination of the copy-initialization.
- (17.7) — Otherwise, if the source type is a (possibly cv-qualified) class type, conversion functions are considered. The applicable conversion functions are enumerated (16.3.1.5), and the best one is chosen through overload resolution (16.3). The user-defined conversion so selected is called to convert the initializer expression into the object being initialized. If the conversion cannot be done or is ambiguous, the initialization is ill-formed.
- (17.8) — Otherwise, the initial value of the object being initialized is the (possibly converted) value of the initializer expression. Standard conversions (Clause 7) will be used, if necessary, to convert the initializer expression to the cv-unqualified version of the destination type; no user-defined conversions are considered. If the conversion cannot be done, the initialization is ill-formed. When initializing a bit-field with a value that it cannot represent, the resulting value of the bit-field is implementation-defined. [*Note*: An expression of type “*cv1* T” can initialize an object of type “*cv2* T” independently of the cv-qualifiers *cv1* and *cv2*.
- ```

    int a;
    const int b = a;
    int c = b;
  
```
- *end note*]
- 18 An *initializer-clause* followed by an ellipsis is a pack expansion (17.6.3).
- 19 If the initializer is a parenthesized *expression-list*, the expressions are evaluated in the order specified for function calls (8.5.1.2).
- 20 The same *identifier* shall not appear in multiple *designators* of a *designated-initializer-list*.

- ²¹ An object whose initialization has completed is deemed to be constructed, even if no constructor of the object's class is invoked for the initialization. [*Note*: Such an object might have been value-initialized or initialized by aggregate initialization (11.6.1) or by an inherited constructor (15.6.3). — *end note*]
- ²² A declaration that specifies the initialization of a variable, whether from an explicit initializer or by default-initialization, is called the *initializing declaration* of that variable. [*Note*: In most cases this is the defining declaration (6.1) of the variable, but the initializing declaration of a non-inline static data member (12.2.3.2) might be the declaration within the class definition and not the definition at namespace scope. — *end note*]

11.6.1 Aggregates

[**dcl.init.aggr**]

- ¹ An *aggregate* is an array or a class (Clause 12) with
- (1.1) — no user-declared or inherited constructors (15.1),
 - (1.2) — no private or protected non-static data members (Clause 14),
 - (1.3) — no virtual functions (13.3), and
 - (1.4) — no virtual, private, or protected base classes (13.1).
- [*Note*: Aggregate initialization does not allow accessing protected and private base class' members or constructors. — *end note*]
- ² The *elements* of an aggregate are:
- (2.1) — for an array, the array elements in increasing subscript order, or
 - (2.2) — for a class, the direct base classes in declaration order, followed by the direct non-static data members (12.2) that are not members of an anonymous union, in declaration order.
- ³ When an aggregate is initialized by an initializer list as specified in 11.6.4, the elements of the initializer list are taken as initializers for the elements of the aggregate. The *explicitly initialized elements* of the aggregate are determined as follows:
- (3.1) — If the initializer list is a *designated-initializer-list*, the aggregate shall be of class type, the *identifier* in each *designator* shall name a direct non-static data member of the class, and the explicitly initialized elements of the aggregate are the elements that are, or contain, those members.
 - (3.2) — If the initializer list is an *initializer-list*, the explicitly initialized elements of the aggregate are the first *n* elements of the aggregate, where *n* is the number of elements in the initializer list.
 - (3.3) — Otherwise, the initializer list must be {}, and there are no explicitly initialized elements.
- ⁴ For each explicitly initialized element:
- (4.1) — If the element is an anonymous union object and the initializer list is a *designated-initializer-list*, the anonymous union object is initialized by the *designated-initializer-list* { *D* }, where *D* is the *designated-initializer-clause* naming a member of the anonymous union object. There shall be only one such *designated-initializer-clause*.
 - (4.2) — Otherwise, the element is copy-initialized from the corresponding *initializer-clause* or is initialized with the *brace-or-equal-initializer* of the corresponding *designated-initializer-clause*. If that initializer is of the form *assignment-expression* or = *assignment-expression* and a narrowing conversion (11.6.4) is required to convert the expression, the program is ill-formed. [*Note*: If an initializer is itself an initializer list, the element is list-initialized, which will result in a recursive application of the rules in this subclause if the element is an aggregate. — *end note*]

[*Example*:

```
struct A {
    int x;
    struct B {
        int i;
        int j;
    } b;
} a = { 1, { 2, 3 } };
```

initializes a.x with 1, a.b.i with 2, a.b.j with 3.

```
struct base1 { int b1, b2 = 42; };
```

```

struct base2 {
    base2() {
        b3 = 42;
    }
    int b3;
};
struct derived : base1, base2 {
    int d;
};

derived d1{{1, 2}, {}, 4};
derived d2{{}, {}, 4};

```

initializes `d1.b1` with 1, `d1.b2` with 2, `d1.b3` with 42, `d1.d` with 4, and `d2.b1` with 0, `d2.b2` with 42, `d2.b3` with 42, `d2.d` with 4. — *end example*]

⁵ For a non-union aggregate, each element that is not an explicitly initialized element is initialized as follows:

- (5.1) — If the element has a default member initializer (12.2), the element is initialized from that initializer.
- (5.2) — Otherwise, if the element is not a reference, the element is copy-initialized from an empty initializer list (11.6.4).
- (5.3) — Otherwise, the program is ill-formed.

If the aggregate is a union and the initializer list is empty, then

- (5.4) — if any variant member has a default member initializer, that member is initialized from its default member initializer;
- (5.5) — otherwise, the first member of the union (if any) is copy-initialized from an empty initializer list.

[*Example:*

```

struct S { int a; const char* b; int c; int d = b[a]; };
S ss = { 1, "asdf" };

```

initializes `ss.a` with 1, `ss.b` with "asdf", `ss.c` with the value of an expression of the form `int{}` (that is, 0), and `ss.d` with the value of `ss.b[ss.a]` (that is, 's'), and in

```

struct X { int i, j, k = 42; };
X a[] = { 1, 2, 3, 4, 5, 6 };
X b[2] = { { 1, 2, 3 }, { 4, 5, 6 } };

```

`a` and `b` have the same value

```

struct A {
    string a;
    int b = 42;
    int c = -1;
};

```

`A{.c=21}` has the following steps:

- (5.6) — Initialize `a` with `{}`
- (5.7) — Initialize `b` with `= 42`
- (5.8) — Initialize `c` with `= 21`

— *end example*]

⁶ The initializations of the elements of the aggregate are evaluated in the element order. That is, all value computations and side effects associated with a given element are sequenced before those of any element that follows it in order.

⁷ An aggregate that is a class can also be initialized with a single expression not enclosed in braces, as described in 11.6.

⁸ The destructor for each element of class type is potentially invoked (15.4) from the context where the aggregate initialization occurs. [*Note:* This provision ensures that destructors can be called for fully-constructed subobjects in case an exception is thrown (18.2). — *end note*]

⁹ An array of unknown bound initialized with a brace-enclosed *initializer-list* containing `n` *initializer-clauses*, where `n` shall be greater than zero, is defined as having `n` elements (11.3.4). [*Example:*

```
int x[] = { 1, 3, 5 };
```

declares and initializes `x` as a one-dimensional array that has three elements since no size was specified and there are three initializers. — *end example*] An empty initializer list `{}` shall not be used as the *initializer-clause* for an array of unknown bound.¹⁰⁶ [Note: A default member initializer does not determine the bound for a member array of unknown bound. Since the default member initializer is ignored if a suitable *mem-initializer* is present (15.6.2), the default member initializer is not considered to initialize the array of unknown bound. [Example:

```
struct S {
    int y[] = { 0 };           // error: non-static data member of incomplete type
};
```

— *end example*] — *end note*]

- ¹⁰ [Note: Static data members, non-static data members of anonymous union members, and unnamed bit-fields are not considered elements of the aggregate. [Example:

```
struct A {
    int i;
    static int s;
    int j;
    int :17;
    int k;
} a = { 1, 2, 3 };
```

Here, the second initializer 2 initializes `a.j` and not the static data member `A::s`, and the third initializer 3 initializes `a.k` and not the unnamed bit-field before it. — *end example*] — *end note*]

- ¹¹ An *initializer-list* is ill-formed if the number of *initializer-clauses* exceeds the number of elements of the aggregate. [Example:

```
char cv[4] = { 'a', 's', 'd', 'f', 0 };    // error
```

is ill-formed. — *end example*]

- ¹² If a reference member is initialized from its default member initializer and a potentially-evaluated subexpression thereof is an aggregate initialization that would use that default member initializer, the program is ill-formed. [Example:

```
struct A;
extern A a;
struct A {
    const A& a1 { A{a,a} };    // OK
    const A& a2 { A{} };      // error
};
A a{a,a};                     // OK
```

— *end example*]

- ¹³ If an aggregate class `C` contains a subaggregate element `e` with no elements, the *initializer-clause* for `e` shall not be omitted from an *initializer-list* for an object of type `C` unless the *initializer-clauses* for all elements of `C` following `e` are also omitted. [Example:

```
struct S { } s;
struct A {
    S s1;
    int i1;
    S s2;
    int i2;
    S s3;
    int i3;
} a = {
    { },                // Required initialization
    0,
    s,                  // Required initialization
    0
};                      // Initialization not required for A::s3 because A::i3 is also not initialized
```

¹⁰⁶) The syntax provides for empty *initializer-lists*, but nonetheless C++ does not have zero length arrays.

— *end example*]

- 14 When initializing a multi-dimensional array, the *initializer-clauses* initialize the elements with the last (rightmost) index of the array varying the fastest (11.3.4). [*Example*:

```
int x[2][2] = { 3, 1, 4, 2 };
```

initializes `x[0][0]` to 3, `x[0][1]` to 1, `x[1][0]` to 4, and `x[1][1]` to 2. On the other hand,

```
float y[4][3] = {
    { 1 }, { 2 }, { 3 }, { 4 }
};
```

initializes the first column of `y` (regarded as a two-dimensional array) and leaves the rest zero. — *end example*]

- 15 Braces can be elided in an *initializer-list* as follows. If the *initializer-list* begins with a left brace, then the succeeding comma-separated list of *initializer-clauses* initializes the elements of a subaggregate; it is erroneous for there to be more *initializer-clauses* than elements. If, however, the *initializer-list* for a subaggregate does not begin with a left brace, then only enough *initializer-clauses* from the list are taken to initialize the elements of the subaggregate; any remaining *initializer-clauses* are left to initialize the next element of the aggregate of which the current subaggregate is an element. [*Example*:

```
float y[4][3] = {
    { 1, 3, 5 },
    { 2, 4, 6 },
    { 3, 5, 7 },
};
```

is a completely-braced initialization: 1, 3, and 5 initialize the first row of the array `y[0]`, namely `y[0][0]`, `y[0][1]`, and `y[0][2]`. Likewise the next two lines initialize `y[1]` and `y[2]`. The initializer ends early and therefore `y[3]`'s elements are initialized as if explicitly initialized with an expression of the form `float()`, that is, are initialized with 0.0. In the following example, braces in the *initializer-list* are elided; however the *initializer-list* has the same effect as the completely-braced *initializer-list* of the above example,

```
float y[4][3] = {
    1, 3, 5, 2, 4, 6, 3, 5, 7
};
```

The initializer for `y` begins with a left brace, but the one for `y[0]` does not, therefore three elements from the list are used. Likewise the next three are taken successively for `y[1]` and `y[2]`. — *end example*]

- 16 All implicit type conversions (Clause 7) are considered when initializing the element with an *assignment-expression*. If the *assignment-expression* can initialize an element, the element is initialized. Otherwise, if the element is itself a subaggregate, brace elision is assumed and the *assignment-expression* is considered for the initialization of the first element of the subaggregate. [*Note*: As specified above, brace elision cannot apply to subaggregates with no elements; an *initializer-clause* for the entire subobject is required. — *end note*]

[*Example*:

```
struct A {
    int i;
    operator int();
};
struct B {
    A a1, a2;
    int z;
};
A a;
B b = { 4, a, a };
```

Braces are elided around the *initializer-clause* for `b.a1.i`. `b.a1.i` is initialized with 4, `b.a2` is initialized with `a`, `b.z` is initialized with whatever `a.operator int()` returns. — *end example*]

- 17 [*Note*: An aggregate array or an aggregate class may contain elements of a class type with a user-declared constructor (15.1). Initialization of these aggregate objects is described in 15.6.1. — *end note*]
- 18 [*Note*: Whether the initialization of aggregates with static storage duration is static or dynamic is specified in 6.8.3.2, 6.8.3.3, and 9.7. — *end note*]

- 19 When a union is initialized with an initializer list, there shall not be more than one explicitly initialized element. [*Example:*

```
union u { int a; const char* b; };
u a = { 1 };
u b = a;
u c = 1;                               // error
u d = { 0, "asdf" };                   // error
u e = { "asdf" };                       // error
u f = { .b = "asdf" };
u g = { .a = 1, .b = "asdf" };         // error
```

— end example]

- 20 [Note: As described above, the braces around the *initializer-clause* for a union member can be omitted if the union is a member of another aggregate. — end note]

11.6.2 Character arrays

[dcl.init.string]

- 1 An array of narrow character type (6.7.1), `char16_t` array, `char32_t` array, or `wchar_t` array can be initialized by a narrow string literal, `char16_t` string literal, `char32_t` string literal, or wide string literal, respectively, or by an appropriately-typed string literal enclosed in braces (5.13.5). Successive characters of the value of the string literal initialize the elements of the array. [*Example:*

```
char msg[] = "Syntax error on line %s\n";
```

shows a character array whose members are initialized with a *string-literal*. Note that because `'\n'` is a single character and because a trailing `'\0'` is appended, `sizeof(msg)` is 25. — end example]

- 2 There shall not be more initializers than there are array elements. [*Example:*

```
char cv[4] = "asdf";                    // error
```

is ill-formed since there is no space for the implied trailing `'\0'`. — end example]

- 3 If there are fewer initializers than there are array elements, each element not explicitly initialized shall be zero-initialized (11.6).

11.6.3 References

[dcl.init.ref]

- 1 A variable whose declared type is “reference to type T” (11.3.2) shall be initialized. [*Example:*

```
int g(int) noexcept;
void f() {
    int i;
    int& r = i;                          // r refers to i
    r = 1;                                // the value of i becomes 1
    int* p = &r;                          // p points to i
    int& rr = r;                           // rr refers to what r refers to, that is, to i
    int (&rg)(int) = g;                   // rg refers to the function g
    rg(i);                                 // calls function g
    int a[3];
    int (&ra)[3] = a;                      // ra refers to the array a
    ra[1] = i;                             // modifies a[1]
}
```

— end example]

- 2 A reference cannot be changed to refer to another object after initialization. [Note: Assignment to a reference assigns to the object referred to by the reference (8.5.18). — end note] Argument passing (8.5.1.2) and function value return (9.6.3) are initializations.
- 3 The initializer can be omitted for a reference only in a parameter declaration (11.3.5), in the declaration of a function return type, in the declaration of a class member within its class definition (12.2), and where the `extern` specifier is explicitly used. [*Example:*

```
int& r1;                                  // error: initializer missing
extern int& r2;                            // OK
```

— end example]

- 4 Given types “*cv1* T1” and “*cv2* T2”, “*cv1* T1” is *reference-related* to “*cv2* T2” if T1 is the same type as T2, or T1 is a base class of T2. “*cv1* T1” is *reference-compatible* with “*cv2* T2” if

- (4.1) — T1 is reference-related to T2, or
- (4.2) — T2 is “noexcept function” and T1 is “function”, where the function types are otherwise the same, and *cv1* is the same cv-qualification as, or greater cv-qualification than, *cv2*. In all cases where the reference-related or reference-compatible relationship of two types is used to establish the validity of a reference binding, and T1 is a base class of T2, a program that necessitates such a binding is ill-formed if T1 is an inaccessible (Clause 14) or ambiguous (13.2) base class of T2.

5 A reference to type “*cv1* T1” is initialized by an expression of type “*cv2* T2” as follows:

- (5.1) — If the reference is an lvalue reference and the initializer expression
- (5.1.1) — is an lvalue (but is not a bit-field), and “*cv1* T1” is reference-compatible with “*cv2* T2”, or
- (5.1.2) — has a class type (i.e., T2 is a class type), where T1 is not reference-related to T2, and can be converted to an lvalue of type “*cv3* T3”, where “*cv1* T1” is reference-compatible with “*cv3* T3”¹⁰⁷ (this conversion is selected by enumerating the applicable conversion functions (16.3.1.6) and choosing the best one through overload resolution (16.3)),

then the reference is bound to the initializer expression lvalue in the first case and to the lvalue result of the conversion in the second case (or, in either case, to the appropriate base class subobject of the object). [Note: The usual lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions are not needed, and therefore are suppressed, when such direct bindings to lvalues are done. — end note]

[Example:

```
double d = 2.0;
double& rd = d;           // rd refers to d
const double& rcd = d;   // rcd refers to d

struct A { };
struct B : A { operator int&(); } b;
A& ra = b;               // ra refers to A subobject in b
const A& rca = b;        // rca refers to A subobject in b
int& ir = B();           // ir refers to the result of B::operator int&
```

— end example]

- (5.2) — Otherwise, if the reference is an lvalue reference to a type that is not const-qualified or is volatile-qualified, the program is ill-formed. [Example:

```
double& rd2 = 2.0;       // error: not an lvalue and reference not const
int i = 2;
double& rd3 = i;        // error: type mismatch and reference not const
```

— end example]

- (5.3) — Otherwise, if the initializer expression
- (5.3.1) — is an rvalue (but not a bit-field) or function lvalue and “*cv1* T1” is reference-compatible with “*cv2* T2”, or
- (5.3.2) — has a class type (i.e., T2 is a class type), where T1 is not reference-related to T2, and can be converted to an rvalue or function lvalue of type “*cv3* T3”, where “*cv1* T1” is reference-compatible with “*cv3* T3” (see 16.3.1.6),

then the value of the initializer expression in the first case and the result of the conversion in the second case is called the converted initializer. If the converted initializer is a prvalue, its type T4 is adjusted to type “*cv1* T4” (7.5) and the temporary materialization conversion (7.4) is applied. In any case, the reference is bound to the resulting glvalue (or to an appropriate base class subobject).

[Example:

```
struct A { };
struct B : A { } b;
extern B f();
const A& rca2 = f();     // bound to the A subobject of the B rvalue.
A&& rra = f();           // same as above
```

¹⁰⁷) This requires a conversion function (15.3.2) returning a reference type.

```

struct X {
    operator B();
    operator int&();
} x;
const A& r = x;           // bound to the A subobject of the result of the conversion
int i2 = 42;
int&& rri = static_cast<int&&>(i2); // bound directly to i2
B&& rrb = x;             // bound directly to the result of operator B
— end example]

```

(5.4) — Otherwise:

(5.4.1) — If T1 or T2 is a class type and T1 is not reference-related to T2, user-defined conversions are considered using the rules for copy-initialization of an object of type “*cv1* T1” by user-defined conversion (11.6, 16.3.1.4, 16.3.1.5); the program is ill-formed if the corresponding non-reference copy-initialization would be ill-formed. The result of the call to the conversion function, as described for the non-reference copy-initialization, is then used to direct-initialize the reference. For this direct-initialization, user-defined conversions are not considered.

(5.4.2) — Otherwise, the initializer expression is implicitly converted to a prvalue of type “*cv1* T1”. The temporary materialization conversion is applied and the reference is bound to the result.

If T1 is reference-related to T2:

(5.4.3) — *cv1* shall be the same cv-qualification as, or greater cv-qualification than, *cv2*; and

(5.4.4) — if the reference is an rvalue reference, the initializer expression shall not be an lvalue.

[Example:

```

struct Banana { };
struct Enigma { operator const Banana(); };
struct Alaska { operator Banana&(); };
void enigmatic() {
    typedef const Banana ConstBanana;
    Banana &&banana1 = ConstBanana(); // ill-formed
    Banana &&banana2 = Enigma();     // ill-formed
    Banana &&banana3 = Alaska();     // ill-formed
}

const double& rcd2 = 2;           // rcd2 refers to temporary with value 2.0
double&& rrd = 2;                 // rrd refers to temporary with value 2.0
const volatile int cvi = 1;
const int& r2 = cvi;             // error: cv-qualifier dropped
struct A { operator volatile int&(); } a;
const int& r3 = a;               // error: cv-qualifier dropped
                                // from result of conversion function

double d2 = 1.0;
double&& rrd2 = d2;              // error: initializer is lvalue of related type
struct X { operator int&(); };
int&& rri2 = X();                // error: result of conversion function is lvalue of related type
int i3 = 2;
double&& rrd3 = i3;             // rrd3 refers to temporary with value 2.0
— end example]

```

In all cases except the last (i.e., implicitly converting the initializer expression to the referenced type), the reference is said to *bind directly* to the initializer expression.

⁶ [Note: 15.2 describes the lifetime of temporaries bound to references. — end note]

11.6.4 List-initialization

[dcl.init.list]

¹ *List-initialization* is initialization of an object or reference from a *braced-init-list*. Such an initializer is called an *initializer list*, and the comma-separated *initializer-clauses* of the *initializer-list* or *designated-initializer-clauses* of the *designated-initializer-list* are called the *elements* of the initializer list. An initializer list may be empty. List-initialization can occur in direct-initialization or copy-initialization contexts; list-initialization in a direct-initialization context is called *direct-list-initialization* and list-initialization in a copy-initialization context is called *copy-list-initialization*. [Note: List-initialization can be used

- (1.1) — as the initializer in a variable definition (11.6)
- (1.2) — as the initializer in a *new-expression* (8.5.2.4)
- (1.3) — in a **return** statement (9.6.3)
- (1.4) — as a *for-range-initializer* (9.5)
- (1.5) — as a function argument (8.5.1.2)
- (1.6) — as a subscript (8.5.1.1)
- (1.7) — as an argument to a constructor invocation (11.6, 8.5.1.3)
- (1.8) — as an initializer for a non-static data member (12.2)
- (1.9) — in a *mem-initializer* (15.6.2)
- (1.10) — on the right-hand side of an assignment (8.5.18)

[*Example:*

```
int a = {1};
std::complex<double> z{1,2};
new std::vector<std::string>{"once", "upon", "a", "time"}; // 4 string elements
f( {"Nicholas","Annemarie"} ); // pass list of two elements
return { "Norah" }; // return list of one element
int* e {}; // initialization to zero / null pointer
x = double{1}; // explicitly construct a double
std::map<std::string,int> anim = { {"bear",4}, {"cassowary",2}, {"tiger",7} };
```

— end example] — end note]

- ² A constructor is an *initializer-list constructor* if its first parameter is of type `std::initializer_list<E>` or reference to possibly cv-qualified `std::initializer_list<E>` for some type `E`, and either there are no other parameters or else all other parameters have default arguments (11.3.6). [*Note:* Initializer-list constructors are favored over other constructors in list-initialization (16.3.1.7). Passing an initializer list as the argument to the constructor template `template<class T> C(T)` of a class `C` does not create an initializer-list constructor, because an initializer list argument causes the corresponding parameter to be a non-deduced context (17.9.2.1). — end note] The template `std::initializer_list` is not predefined; if the header `<initializer_list>` is not included prior to a use of `std::initializer_list` — even an implicit use in which the type is not named (10.1.7.4) — the program is ill-formed.

- ³ List-initialization of an object or reference of type `T` is defined as follows:

- (3.1) — If the *braced-init-list* contains a *designated-initializer-list*, `T` shall be an aggregate class. The ordered *identifiers* in the *designators* of the *designated-initializer-list* shall form a subsequence of the ordered *identifiers* in the direct non-static data members of `T`. Aggregate initialization is performed (11.6.1). [*Example:*

```
struct A { int x; int y; int z; };
A a{.y = 2, .x = 1}; // error: designator order does not match declaration order
A b{.x = 1, .z = 2}; // OK, b.y initialized to 0
```

— end example]

- (3.2) — If `T` is an aggregate class and the initializer list has a single element of type *cv* `U`, where `U` is `T` or a class derived from `T`, the object is initialized from that element (by copy-initialization for copy-list-initialization, or by direct-initialization for direct-list-initialization).
- (3.3) — Otherwise, if `T` is a character array and the initializer list has a single element that is an appropriately-typed string literal (11.6.2), initialization is performed as described in that subclause.
- (3.4) — Otherwise, if `T` is an aggregate, aggregate initialization is performed (11.6.1).

[*Example:*

```
double ad[] = { 1, 2.0 }; // OK
int ai[] = { 1, 2.0 }; // error: narrowing

struct S2 {
    int m1;
    double m2, m3;
};
```

```

S2 s21 = { 1, 2, 3.0 };           // OK
S2 s22 { 1.0, 2, 3 };           // error: narrowing
S2 s23 { };                       // OK: default to 0,0,0

```

— end example]

- (3.5) — Otherwise, if the initializer list has no elements and T is a class type with a default constructor, the object is value-initialized.
- (3.6) — Otherwise, if T is a specialization of `std::initializer_list<E>`, the object is constructed as described below.
- (3.7) — Otherwise, if T is a class type, constructors are considered. The applicable constructors are enumerated and the best one is chosen through overload resolution (16.3, 16.3.1.7). If a narrowing conversion (see below) is required to convert any of the arguments, the program is ill-formed.

[Example:

```

struct S {
    S(std::initializer_list<double>); // #1
    S(std::initializer_list<int>);   // #2
    S();                             // #3
    // ...
};
S s1 = { 1.0, 2.0, 3.0 };           // invoke #1
S s2 = { 1, 2, 3 };                 // invoke #2
S s3 = { };                         // invoke #3

```

— end example]

[Example:

```

struct Map {
    Map(std::initializer_list<std::pair<std::string,int>>);
};
Map ship = {"Sophie",14}, {"Surprise",28};

```

— end example]

[Example:

```

struct S {
    // no initializer-list constructors
    S(int, double, double); // #1
    S();                     // #2
    // ...
};
S s1 = { 1, 2, 3.0 };       // OK: invoke #1
S s2 { 1.0, 2, 3 };         // error: narrowing
S s3 { };                   // OK: invoke #2

```

— end example]

- (3.8) — Otherwise, if T is an enumeration with a fixed underlying type (10.2), the *initializer-list* has a single element v, and the initialization is direct-list-initialization, the object is initialized with the value T(v) (8.5.1.3); if a narrowing conversion is required to convert v to the underlying type of T, the program is ill-formed. [Example:

```

enum byte : unsigned char { };
byte b { 42 };                // OK
byte c = { 42 };             // error
byte d = byte{ 42 };         // OK; same value as b
byte e { -1 };               // error

struct A { byte b; };
A a1 = { { 42 } };           // error
A a2 = { byte{ 42 } };       // OK

void f(byte);
f({ 42 });                   // error

```

```
enum class Handle : uint32_t { Invalid = 0 };
Handle h { 42 }; // OK
— end example]
```

- (3.9) — Otherwise, if the initializer list has a single element of type E and either T is not a reference type or its referenced type is reference-related to E, the object or reference is initialized from that element (by copy-initialization for copy-list-initialization, or by direct-initialization for direct-list-initialization); if a narrowing conversion (see below) is required to convert the element to T, the program is ill-formed.

[Example:

```
int x1 {2}; // OK
int x2 {2.0}; // error: narrowing
```

— end example]

- (3.10) — Otherwise, if T is a reference type, a prvalue of the type referenced by T is generated. The prvalue initializes its result object by copy-list-initialization or direct-list-initialization, depending on the kind of initialization for the reference. The prvalue is then used to direct-initialize the reference. [Note: As usual, the binding will fail and the program is ill-formed if the reference type is an lvalue reference to a non-const type. — end note]

[Example:

```
struct S {
    S(std::initializer_list<double>); // #1
    S(const std::string&); // #2
    // ...
};
const S& r1 = { 1, 2, 3.0 }; // OK: invoke #1
const S& r2 { "Spinach" }; // OK: invoke #2
S& r3 = { 1, 2, 3 }; // error: initializer is not an lvalue
const int& i1 = { 1 }; // OK
const int& i2 = { 1.1 }; // error: narrowing
const int (&iar)[2] = { 1, 2 }; // OK: iar is bound to temporary array
```

— end example]

- (3.11) — Otherwise, if the initializer list has no elements, the object is value-initialized.

[Example:

```
int** pp {}; // initialized to null pointer
```

— end example]

- (3.12) — Otherwise, the program is ill-formed.

[Example:

```
struct A { int i; int j; };
A a1 { 1, 2 }; // aggregate initialization
A a2 { 1.2 }; // error: narrowing
struct B {
    B(std::initializer_list<int>);
};
B b1 { 1, 2 }; // creates initializer_list<int> and calls constructor
B b2 { 1, 2.0 }; // error: narrowing
struct C {
    C(int i, double j);
};
C c1 = { 1, 2.2 }; // calls constructor with arguments (1, 2.2)
C c2 = { 1.1, 2 }; // error: narrowing

int j { 1 }; // initialize to 1
int k { }; // initialize to 0
```

— end example]

⁴ Within the *initializer-list* of a *braced-init-list*, the *initializer-clauses*, including any that result from pack expansions (17.6.3), are evaluated in the order in which they appear. That is, every value computation and side effect associated with a given *initializer-clause* is sequenced before every value computation and side

effect associated with any *initializer-clause* that follows it in the comma-separated list of the *initializer-list*. [Note: This evaluation ordering holds regardless of the semantics of the initialization; for example, it applies when the elements of the *initializer-list* are interpreted as arguments of a constructor call, even though ordinarily there are no sequencing constraints on the arguments of a call. — end note]

- 5 An object of type `std::initializer_list<E>` is constructed from an initializer list as if the implementation generated and materialized (7.4) a prvalue of type “array of N `const E`”, where N is the number of elements in the initializer list. Each element of that array is copy-initialized with the corresponding element of the initializer list, and the `std::initializer_list<E>` object is constructed to refer to that array. [Note: A constructor or conversion function selected for the copy shall be accessible (Clause 14) in the context of the initializer list. — end note] If a narrowing conversion is required to initialize any of the elements, the program is ill-formed. [Example:

```
struct X {
    X(std::initializer_list<double> v);
};
X x{ 1,2,3 };
```

The initialization will be implemented in a way roughly equivalent to this:

```
const double __a[3] = {double{1}, double{2}, double{3}};
X x(std::initializer_list<double>(__a, __a+3));
```

assuming that the implementation can construct an `initializer_list` object with a pair of pointers. — end example]

- 6 The array has the same lifetime as any other temporary object (15.2), except that initializing an `initializer_list` object from the array extends the lifetime of the array exactly like binding a reference to a temporary. [Example:

```
typedef std::complex<double> cmplx;
std::vector<cmplx> v1 = { 1, 2, 3 };

void f() {
    std::vector<cmplx> v2{ 1, 2, 3 };
    std::initializer_list<int> i3 = { 1, 2, 3 };
}

struct A {
    std::initializer_list<int> i4;
    A() : i4{ 1, 2, 3 } {}           // ill-formed, would create a dangling reference
};
```

For `v1` and `v2`, the `initializer_list` object is a parameter in a function call, so the array created for `{ 1, 2, 3 }` has full-expression lifetime. For `i3`, the `initializer_list` object is a variable, so the array persists for the lifetime of the variable. For `i4`, the `initializer_list` object is initialized in the constructor’s *ctor-initializer* as if by binding a temporary array to a reference member, so the program is ill-formed (15.6.2). — end example] [Note: The implementation is free to allocate the array in read-only memory if an explicit array with the same initializer could be so allocated. — end note]

- 7 A *narrowing conversion* is an implicit conversion

- (7.1) — from a floating-point type to an integer type, or
- (7.2) — from `long double` to `double` or `float`, or from `double` to `float`, except where the source is a constant expression and the actual value after conversion is within the range of values that can be represented (even if it cannot be represented exactly), or
- (7.3) — from an integer type or unscoped enumeration type to a floating-point type, except where the source is a constant expression and the actual value after conversion will fit into the target type and will produce the original value when converted back to the original type, or
- (7.4) — from an integer type or unscoped enumeration type to an integer type that cannot represent all the values of the original type, except where the source is a constant expression whose value after integral promotions will fit into the target type.

[Note: As indicated above, such conversions are not allowed at the top level in list-initializations. — end note]

[Example:

```
int x = 999;           // x is not a constant expression
```



```
const int y = 999;
const int z = 99;
char c1 = x;           // OK, though it might narrow (in this case, it does narrow)
char c2{x};           // error: might narrow
char c3{y};           // error: narrows (assuming char is 8 bits)
char c4{z};           // OK: no narrowing needed
unsigned char uc1 = {5}; // OK: no narrowing needed
unsigned char uc2 = {-1}; // error: narrows
unsigned int ui1 = {-1}; // error: narrows
signed int si1 =
    { (unsigned int)-1 }; // error: narrows
int ii = {2.0};         // error: narrows
float f1 { x };        // error: might narrow
float f2 { 7 };        // OK: 7 can be exactly represented as a float
int f(int);
int a[] = { 2, f(2), f(2.0) }; // OK: the double-to-int conversion is not at the top level
— end example]
```

12 Classes

[class]

- ¹ A class is a type. Its name becomes a *class-name* (12.1) within its scope.

class-name:
identifier
simple-template-id

A *class-specifier* or an *elaborated-type-specifier* (10.1.7.3) is used to make a *class-name*. An object of a class consists of a (possibly empty) sequence of members and base class objects.

class-specifier:
class-head { *member-specification*_{opt} }

class-head:
class-key *attribute-specifier-seq*_{opt} *class-head-name* *class-virt-specifier*_{opt} *base-clause*_{opt}
class-key *attribute-specifier-seq*_{opt} *base-clause*_{opt}

class-head-name:
*nested-name-specifier*_{opt} *class-name*

class-virt-specifier:
final

class-key:
class
struct
union

A class declaration where the *class-name* in the *class-head-name* is a *simple-template-id* shall be an explicit specialization (17.8.3) or a partial specialization (17.6.5). A *class-specifier* whose *class-head* omits the *class-head-name* defines an unnamed class. [Note: An unnamed class thus can't be **final**. — end note]

- ² A *class-name* is inserted into the scope in which it is declared immediately after the *class-name* is seen. The *class-name* is also inserted into the scope of the class itself; this is known as the *injected-class-name*. For purposes of access checking, the injected-class-name is treated as if it were a public member name. A *class-specifier* is commonly referred to as a *class definition*. A class is considered defined after the closing brace of its *class-specifier* has been seen even though its member functions are in general not yet defined. The optional *attribute-specifier-seq* appertains to the class; the attributes in the *attribute-specifier-seq* are thereafter considered attributes of the class whenever it is named.
- ³ If a class is marked with the *class-virt-specifier* **final** and it appears as a *class-or-decltype* in a *base-clause* (Clause 13), the program is ill-formed. Whenever a *class-key* is followed by a *class-head-name*, the *identifier* **final**, and a colon or left brace, **final** is interpreted as a *class-virt-specifier*. [Example:

```
struct A;
struct A final {};           // OK: definition of struct A,
                             // not value-initialization of variable final

struct X {
    struct C { constexpr operator int() { return 5; } };
    struct B final : C{};    // OK: definition of nested class B,
                             // not declaration of a bit-field member final
};
```

— end example]

- ⁴ [Note: Complete objects of class type have nonzero size. Base class subobjects and members declared with the `no_unique_address` attribute (10.6.11) are not so constrained. — end note]
- ⁵ [Note: Class objects can be assigned, passed as arguments to functions, and returned by functions (except objects of classes for which copying or moving has been restricted; see 15.8). Other plausible operators, such as equality comparison, can be defined by the user; see 16.5. — end note]
- ⁶ A *union* is a class defined with the *class-key* **union**; it holds at most one data member at a time (12.3). [Note: Aggregates of class type are described in 11.6.1. — end note]

⁷ A *trivially copyable class* is a class:

- (7.1) — where each copy constructor, move constructor, copy assignment operator, and move assignment operator (15.8, 16.5.3) is either deleted or trivial,
- (7.2) — that has at least one non-deleted copy constructor, move constructor, copy assignment operator, or move assignment operator, and
- (7.3) — that has a trivial, non-deleted destructor (15.4).

⁸ A *trivial class* is a class that is trivially copyable and has one or more default constructors (15.1), all of which are either trivial or deleted and at least one of which is not deleted. [Note: In particular, a trivially copyable or trivial class does not have virtual functions or virtual base classes. — end note]

⁹ A class **S** is a *standard-layout class* if it:

- (9.1) — has no non-static data members of type non-standard-layout class (or array of such types) or reference,
- (9.2) — has no virtual functions (13.3) and no virtual base classes (13.1),
- (9.3) — has the same access control (Clause 14) for all non-static data members,
- (9.4) — has no non-standard-layout base classes,
- (9.5) — has at most one base class subobject of any given type,
- (9.6) — has all non-static data members and bit-fields in the class and its base classes first declared in the same class, and
- (9.7) — has no element of the set $M(\mathbf{S})$ of types as a base class, where for any type **X**, $M(\mathbf{X})$ is defined as follows.¹⁰⁸ [Note: $M(\mathbf{X})$ is the set of the types of all non-base-class subobjects that may be at a zero offset in **X**. — end note]
 - (9.7.1) — If **X** is a non-union class type with no (possibly inherited (Clause 13)) non-static data members, the set $M(\mathbf{X})$ is empty.
 - (9.7.2) — If **X** is a non-union class type with a non-static data member of type \mathbf{X}_0 that is either of zero size or is the first non-static data member of **X** (where said member may be an anonymous union), the set $M(\mathbf{X})$ consists of \mathbf{X}_0 and the elements of $M(\mathbf{X}_0)$.
 - (9.7.3) — If **X** is a union type, the set $M(\mathbf{X})$ is the union of all $M(\mathbf{U}_i)$ and the set containing all \mathbf{U}_i , where each \mathbf{U}_i is the type of the i^{th} non-static data member of **X**.
 - (9.7.4) — If **X** is an array type with element type \mathbf{X}_e , the set $M(\mathbf{X})$ consists of \mathbf{X}_e and the elements of $M(\mathbf{X}_e)$.
 - (9.7.5) — If **X** is a non-class, non-array type, the set $M(\mathbf{X})$ is empty.

¹⁰ [Example:

```

struct B { int i; };           // standard-layout class
struct C : B { };            // standard-layout class
struct D : C { };           // standard-layout class
struct E : D { char : 4; };   // not a standard-layout class

struct Q {};
struct S : Q { };
struct T : Q { };
struct U : S, T { };         // not a standard-layout class

```

— end example]

¹¹ A *standard-layout struct* is a standard-layout class defined with the *class-key* **struct** or the *class-key* **class**. A *standard-layout union* is a standard-layout class defined with the *class-key* **union**.

¹² [Note: Standard-layout classes are useful for communicating with code written in other programming languages. Their layout is specified in 12.2. — end note]

¹³ [Example:

```

struct N {                    // neither trivial nor standard-layout
    int i;
    int j;

```

¹⁰⁸) This ensures that two subobjects that have the same class type and that belong to the same most derived object are not allocated at the same address (8.5.10).

```

    virtual ~N();
};

struct T {           // trivial but not standard-layout
    int i;
private:
    int j;
};

struct SL {         // standard-layout but not trivial
    int i;
    int j;
    ~SL();
};

struct POD {       // both trivial and standard-layout
    int i;
    int j;
};

```

— end example]

- ¹⁴ If a *class-head-name* contains a *nested-name-specifier*, the *class-specifier* shall refer to a class that was previously declared directly in the class or namespace to which the *nested-name-specifier* refers, or in an element of the inline namespace set (10.3.1) of that namespace (i.e., not merely inherited or introduced by a *using-declaration*), and the *class-specifier* shall appear in a namespace enclosing the previous declaration. In such cases, the *nested-name-specifier* of the *class-head-name* of the definition shall not begin with a *decltype-specifier*.

12.1 Class names

[class.name]

- ¹ A class definition introduces a new type. [Example:

```

struct X { int a; };
struct Y { int a; };
X a1;
Y a2;
int a3;

```

declares three variables of three different types. This implies that

```

a1 = a2;           // error: Y assigned to X
a1 = a3;           // error: int assigned to X

```

are type mismatches, and that

```

int f(X);
int f(Y);

```

declare an overloaded (Clause 16) function `f()` and not simply a single function `f()` twice. For the same reason,

```

struct S { int a; };
struct S { int a; };           // error, double definition

```

is ill-formed because it defines `S` twice. — end example]

- ² A class declaration introduces the class name into the scope where it is declared and hides any class, variable, function, or other declaration of that name in an enclosing scope (6.3). If a class name is declared in a scope where a variable, function, or enumerator of the same name is also declared, then when both declarations are in scope, the class can be referred to only using an *elaborated-type-specifier* (6.4.4). [Example:

```

struct stat {
    // ...
};

stat gstat;           // use plain stat to define variable

int stat(struct stat*); // redeclare stat as function

```

```

void f() {
    struct stat* ps;           // struct prefix needed to name struct stat
    stat(ps);                 // call stat()
}

```

— end example] A declaration consisting solely of *class-key identifier*; is either a redeclaration of the name in the current scope or a forward declaration of the identifier as a class name. It introduces the class name into the current scope. [Example:

```

struct s { int a; };

void g() {
    struct s;                 // hide global struct s with a block-scope declaration
    s* p;                     // refer to local struct s
    struct s { char* p; };    // define local struct s
    struct s;                 // redeclaration, has no effect
}

```

— end example] [Note: Such declarations allow definition of classes that refer to each other. [Example:

```

class Vector;

class Matrix {
    // ...
    friend Vector operator*(const Matrix&, const Vector&);
};

class Vector {
    // ...
    friend Vector operator*(const Matrix&, const Vector&);
};

```

Declaration of friends is described in 14.3, operator functions in 16.5. — end example] — end note]

- ³ [Note: An *elaborated-type-specifier* (10.1.7.3) can also be used as a *type-specifier* as part of a declaration. It differs from a class declaration in that if a class of the elaborated name is in scope the elaborated name will refer to it. — end note] [Example:

```

struct s { int a; };

void g(int s) {
    struct s* p = new struct s; // global s
    p->a = s;                   // parameter s
}

```

— end example]

- ⁴ [Note: The declaration of a class name takes effect immediately after the *identifier* is seen in the class definition or *elaborated-type-specifier*. For example,

```
class A * A;
```

first specifies **A** to be the name of a class and then redefines it as the name of a pointer to an object of that class. This means that the elaborated form `class A` must be used to refer to the class. Such artistry with names can be confusing and is best avoided. — end note]

- ⁵ A *typedef-name* (10.1.3) that names a class type, or a cv-qualified version thereof, is also a *class-name*. If a *typedef-name* that names a cv-qualified class type is used where a *class-name* is required, the cv-qualifiers are ignored. A *typedef-name* shall not be used as the *identifier* in a *class-head*.

12.2 Class members

[class.mem]

member-specification:

```

member-declaration member-specificationopt
access-specifier : member-specificationopt

```

member-declaration:
*attribute-specifier-seq*_{opt} *decl-specifier-seq*_{opt} *member-declarator-list*_{opt} ;
function-definition
using-declaration
static_assert-declaration
template-declaration
deduction-guide
alias-declaration
empty-declaration

member-declarator-list:
member-declarator
member-declarator-list , *member-declarator*

member-declarator:
*declarator virt-specifier-seq*_{opt} *pure-specifier*_{opt}
declarator requires-clause
*declarator brace-or-equal-initializer*_{opt}
*identifier*_{opt} *attribute-specifier-seq*_{opt} : *constant-expression brace-or-equal-initializer*_{opt}

virt-specifier-seq:
virt-specifier
virt-specifier-seq virt-specifier

virt-specifier:
override
final

pure-specifier:
= 0

¹ The *member-specification* in a class definition declares the full set of members of the class; no member can be added elsewhere. A *direct member* of a class X is a member of X that was first declared within the *member-specification* of X, including anonymous union objects (12.3.1) and direct members thereof. Members of a class are data members, member functions (12.2.1), nested types, enumerators, and member templates (17.6.2) and specializations thereof. [Note: A specialization of a static data member template is a static data member. A specialization of a member function template is a member function. A specialization of a member class template is a nested class. — end note]

² A *member-declaration* does not declare new members of the class if it is

- (2.1) — a friend declaration (14.3),
- (2.2) — a *static_assert-declaration*,
- (2.3) — a *using-declaration* (10.3.3), or
- (2.4) — an *empty-declaration*.

For any other *member-declaration*, each declared entity that is not an unnamed bit-field (12.2.4) is a member of the class, and each such *member-declaration* shall either declare at least one member name of the class or declare at least one unnamed bit-field.

³ A *data member* is a non-function member introduced by a *member-declarator*. A *member function* is a member that is a function. Nested types are classes (12.1, 12.2.5) and enumerations (10.2) declared in the class and arbitrary types declared as members by use of a typedef declaration (10.1.3) or *alias-declaration*. The enumerators of an unscoped enumeration (10.2) defined in the class are members of the class.

⁴ A data member or member function may be declared **static** in its *member-declaration*, in which case it is a *static member* (see 12.2.3) (a *static data member* (12.2.3.2) or *static member function* (12.2.3.1), respectively) of the class. Any other data member or member function is a *non-static member* (a *non-static data member* or *non-static member function* (12.2.2), respectively). [Note: A non-static data member of non-reference type is a member subobject of a class object (6.6.2). — end note]

⁵ A member shall not be declared twice in the *member-specification*, except that

- (5.1) — a nested class or member class template can be declared and then later defined, and
- (5.2) — an enumeration can be introduced with an *opaque-enum-declaration* and later redeclared with an *enum-specifier*.

[*Note*: A single name can denote several member functions provided their types are sufficiently different (Clause 16). — *end note*]

6 A *complete-class context* of a class is a

- (6.1) — function body (11.4.1),
- (6.2) — default argument (11.3.6),
- (6.3) — *noexcept-specifier* (18.4),
- (6.4) — contract condition (10.6.4), or
- (6.5) — default member initializer

within the *member-specification* of the class. [*Note*: A complete-class context of a nested class is also a complete-class context of any enclosing class, if the nested class is defined within the *member-specification* of the enclosing class. — *end note*]

7 A class is considered a completely-defined object type (6.7) (or complete type) at the closing } of the *class-specifier*. The class is regarded as complete within its complete-class contexts; otherwise it is regarded as incomplete within its own class *member-specification*.

8 In a *member-declarator*, an = immediately following the *declarator* is interpreted as introducing a *pure-specifier* if the *declarator-id* has function type, otherwise it is interpreted as introducing a *brace-or-equal-initializer*. [*Example*:

```
struct S {
    using T = void();
    T * p = 0;           // OK: brace-or-equal-initializer
    virtual T f = 0;    // OK: pure-specifier
};
```

— *end example*]

9 In a *member-declarator* for a bit-field, the *constant-expression* is parsed as the longest sequence of tokens that could syntactically form a *constant-expression*. [*Example*:

```
int a;
const int b = 0;
struct S {
    int x1 : 8 = 42;           // OK, "= 42" is brace-or-equal-initializer
    int x2 : 8 { 42 };        // OK, "{ 42 }" is brace-or-equal-initializer
    int y1 : true ? 8 : a = 42; // OK, brace-or-equal-initializer is absent
    int y2 : true ? 8 : b = 42; // error: cannot assign to const int
    int y3 : (true ? 8 : b) = 42; // OK, "= 42" is brace-or-equal-initializer
    int z : 1 || new int { 0 }; // OK, brace-or-equal-initializer is absent
};
```

— *end example*]

10 A *brace-or-equal-initializer* shall appear only in the declaration of a data member. (For static data members, see 12.2.3.2; for non-static data members, see 15.6.2 and 11.6.1). A *brace-or-equal-initializer* for a non-static data member specifies a *default member initializer* for the member, and shall not directly or indirectly cause the implicit definition of a defaulted default constructor for the enclosing class or the exception specification of that constructor.

11 A member shall not be declared with the *extern storage-class-specifier*. Within a class definition, a member shall not be declared with the *thread_local storage-class-specifier* unless also declared *static*.

12 The *decl-specifier-seq* may be omitted in constructor, destructor, and conversion function declarations only; when declaring another kind of member the *decl-specifier-seq* shall contain a *type-specifier* that is not a *cv-qualifier*. The *member-declarator-list* can be omitted only after a *class-specifier* or an *enum-specifier* or in a friend declaration (14.3). A *pure-specifier* shall be used only in the declaration of a virtual function (13.3) that is not a friend declaration.

13 The optional *attribute-specifier-seq* in a *member-declaration* appertains to each of the entities declared by the *member-declarators*; it shall not appear if the optional *member-declarator-list* is omitted.

14 A *virt-specifier-seq* shall contain at most one of each *virt-specifier*. A *virt-specifier-seq* shall appear only in the first declaration of a virtual member function (13.3).

- 15 The type of a non-static data member shall not be an incomplete type (6.7), an abstract class type (13.4), or a (possibly multi-dimensional) array thereof. [*Note*: In particular, a class C cannot contain a non-static member of class C, but it can contain a pointer or reference to an object of class C. — *end note*]
- 16 [*Note*: See 8.4.4 for restrictions on the use of non-static data members and non-static member functions. — *end note*]
- 17 [*Note*: The type of a non-static member function is an ordinary function type, and the type of a non-static data member is an ordinary object type. There are no special member function types or data member types. — *end note*]
- 18 [*Example*: A simple example of a class definition is

```
struct tnode {
    char tword[20];
    int count;
    tnode* left;
    tnode* right;
};
```

which contains an array of twenty characters, an integer, and two pointers to objects of the same type. Once this definition has been given, the declaration

```
tnode s, *sp;
```

declares `s` to be a `tnode` and `sp` to be a pointer to a `tnode`. With these declarations, `sp->count` refers to the `count` member of the object to which `sp` points; `s.left` refers to the `left` subtree pointer of the object `s`; and `s.right->tword[0]` refers to the initial character of the `tword` member of the `right` subtree of `s`. — *end example*]

- 19 Non-static data members of a (non-union) class with the same access control (Clause 14) are allocated so that later members have higher addresses within a class object. The order of allocation of non-static data members with different access control is unspecified (Clause 14). Implementation alignment requirements might cause two adjacent members not to be allocated immediately after each other; so might requirements for space for managing virtual functions (13.3) and virtual base classes (13.1).
- 20 If `T` is the name of a class, then each of the following shall have a name different from `T`:
- (20.1) — every static data member of class `T`;
 - (20.2) — every member function of class `T` [*Note*: This restriction does not apply to constructors, which do not have names (15.1) — *end note*];
 - (20.3) — every member of class `T` that is itself a type;
 - (20.4) — every member template of class `T`;
 - (20.5) — every enumerator of every member of class `T` that is an unscoped enumerated type; and
 - (20.6) — every member of every anonymous union that is a member of class `T`.

- 21 In addition, if class `T` has a user-declared constructor (15.1), every non-static data member of class `T` shall have a name different from `T`.

- 22 The *common initial sequence* of two standard-layout struct (Clause 12) types is the longest sequence of non-static data members and bit-fields in declaration order, starting with the first such entity in each of the structs, such that corresponding entities have layout-compatible types, either both entities are declared with the `no_unique_address` attribute (10.6.11) or neither is, and either both entities are bit-fields with the same width or neither is a bit-field. [*Example*:

```
struct A { int a; char b; };
struct B { const int b1; volatile char b2; };
struct C { int c; unsigned : 0; char b; };
struct D { int d; char b : 4; };
struct E { unsigned int e; char b; };
```

The common initial sequence of `A` and `B` comprises all members of either class. The common initial sequence of `A` and `C` and of `A` and `D` comprises the first member in each case. The common initial sequence of `A` and `E` is empty. — *end example*]

- 23 Two standard-layout struct (Clause 12) types are *layout-compatible classes* if their common initial sequence comprises all members and bit-fields of both classes (6.7).

24 Two standard-layout unions are layout-compatible if they have the same number of non-static data members and corresponding non-static data members (in any order) have layout-compatible types (6.7).

25 In a standard-layout union with an active member (12.3) of struct type T1, it is permitted to read a non-static data member *m* of another union member of struct type T2 provided *m* is part of the common initial sequence of T1 and T2; the behavior is as if the corresponding member of T1 were nominated. [Example:

```

struct T1 { int a, b; };
struct T2 { int c; double d; };
union U { T1 t1; T2 t2; };
int f() {
    U u = { { 1, 2 } }; // active member is t1
    return u.t2.c;     // OK, as if u.t1.a were nominated
}

```

— end example] [Note: Reading a volatile object through a non-volatile glvalue has undefined behavior (10.1.7.1). — end note]

26 If a standard-layout class object has any non-static data members, its address is the same as the address of its first non-static data member if that member is not a bit-field. Its address is also the same as the address of each of its base class subobjects. [Note: There might therefore be unnamed padding within a standard-layout struct object inserted by an implementation, but not at its beginning, as necessary to achieve appropriate alignment. — end note] [Note: The object and its first subobject are pointer-interconvertible (6.7.2, 8.5.1.9). — end note]

12.2.1 Member functions

[class.mfct]

1 A member function may be defined (11.4) in its class definition, in which case it is an inline member function (10.1.6), or it may be defined outside of its class definition if it has already been declared but not defined in its class definition. A member function definition that appears outside of the class definition shall appear in a namespace scope enclosing the class definition. Except for member function definitions that appear outside of a class definition, and except for explicit specializations of member functions of class templates and member function templates (17.8) appearing outside of the class definition, a member function shall not be redeclared.

2 An inline member function (whether static or non-static) may also be defined outside of its class definition provided either its declaration in the class definition or its definition outside of the class definition declares the function as `inline` or `constexpr`. [Note: Member functions of a class in namespace scope have the linkage of that class. Member functions of a local class (12.4) have no linkage. See 6.5. — end note]

3 [Note: There can be at most one definition of a non-inline member function in a program. There may be more than one inline member function definition in a program. See 6.2 and 10.1.6. — end note]

4 If the definition of a member function is lexically outside its class definition, the member function name shall be qualified by its class name using the `::` operator. [Note: A name used in a member function definition (that is, in the *parameter-declaration-clause* including the default arguments (11.3.6) or in the member function body) is looked up as described in 6.4. — end note] [Example:

```

struct X {
    typedef int T;
    static T count;
    void f(T);
};
void X::f(T t = count) { }

```

The member function `f` of class `X` is defined in global scope; the notation `X::f` specifies that the function `f` is a member of class `X` and in the scope of class `X`. In the function definition, the parameter type `T` refers to the typedef member `T` declared in class `X` and the default argument `count` refers to the static data member `count` declared in class `X`. — end example]

5 [Note: A `static` local variable or local type in a member function always refers to the same entity, whether or not the member function is inline. — end note]

6 Previously declared member functions may be mentioned in friend declarations.

7 Member functions of a local class shall be defined inline in their class definition, if they are defined at all.

- ⁸ [Note: A member function can be declared (but not defined) using a typedef for a function type. The resulting member function has exactly the same type as it would have if the function declarator were provided explicitly, see 11.3.5. For example,

```
typedef void fv();
typedef void fvc() const;
struct S {
    fv memfunc1;      // equivalent to: void memfunc1();
    void memfunc2();
    fvc memfunc3;    // equivalent to: void memfunc3() const;
};
fv S::* pmfv1 = &S::memfunc1;
fv S::* pmfv2 = &S::memfunc2;
fvc S::* pmfv3 = &S::memfunc3;
```

Also see 17.3. — end note]

12.2.2 Non-static member functions

[class.mfct.non-static]

- ¹ A non-static member function may be called for an object of its class type, or for an object of a class derived (Clause 13) from its class type, using the class member access syntax (8.5.1.5, 16.3.1.1). A non-static member function may also be called directly using the function call syntax (8.5.1.2, 16.3.1.1) from within the body of a member function of its class or of a class derived from its class.
- ² If a non-static member function of a class X is called for an object that is not of type X, or of a type derived from X, the behavior is undefined.
- ³ When an *id-expression* (8.4.4) that is not part of a class member access syntax (8.5.1.5) and not used to form a pointer to member (8.5.2.1) is used in a member of class X in a context where **this** can be used (8.4.2), if name lookup (6.4) resolves the name in the *id-expression* to a non-static non-type member of some class C, and if either the *id-expression* is potentially evaluated or C is X or a base class of X, the *id-expression* is transformed into a class member access expression (8.5.1.5) using (***this**) (12.2.2.1) as the *postfix-expression* to the left of the **.** operator. [Note: If C is not X or a base class of X, the class member access expression is ill-formed. — end note] Similarly during name lookup, when an *unqualified-id* (8.4.4.1) used in the definition of a member function for class X resolves to a static member, an enumerator or a nested type of class X or of a base class of X, the *unqualified-id* is transformed into a *qualified-id* (8.4.4.2) in which the *nested-name-specifier* names the class of the member function. These transformations do not apply in the template definition context (17.7.2.1). [Example:

```
struct tnode {
    char tword[20];
    int count;
    tnode* left;
    tnode* right;
    void set(const char*, tnode* l, tnode* r);
};

void tnode::set(const char* w, tnode* l, tnode* r) {
    count = strlen(w)+1;
    if (sizeof(tword)<=count)
        perror("tnode string too long");
    strcpy(tword,w);
    left = l;
    right = r;
}

void f(tnode n1, tnode n2) {
    n1.set("abc",&n2,0);
    n2.set("def",0,0);
}
```

In the body of the member function `tnode::set`, the member names `tword`, `count`, `left`, and `right` refer to members of the object for which the function is called. Thus, in the call `n1.set("abc",&n2,0)`, `tword` refers

to `n1.tword`, and in the call `n2.set("def",0,0)`, it refers to `n2.tword`. The functions `strlen`, `perror`, and `strcpy` are not members of the class `tnode` and should be declared elsewhere.¹⁰⁹ — *end example*]

- ⁴ A non-static member function may be declared `const`, `volatile`, or `const volatile`. These *cv-qualifiers* affect the type of the `this` pointer (12.2.2.1). They also affect the function type (11.3.5) of the member function; a member function declared `const` is a *const member function*, a member function declared `volatile` is a *volatile member function* and a member function declared `const volatile` is a *const volatile member function*. [*Example*:

```
struct X {
    void g() const;
    void h() const volatile;
};
```

`X::g` is a `const` member function and `X::h` is a `const volatile` member function. — *end example*]

- ⁵ A non-static member function may be declared with a *ref-qualifier* (11.3.5); see 16.3.1.
⁶ A non-static member function may be declared `virtual` (13.3) or `pure virtual` (13.4).

12.2.2.1 The `this` pointer

[`class.this`]

- ¹ In the body of a non-static (12.2.1) member function, the keyword `this` is a prvalue whose value is the address of the object for which the function is called. The type of `this` in a member function of a class `X` is `X*`. If the member function is declared `const`, the type of `this` is `const X*`, if the member function is declared `volatile`, the type of `this` is `volatile X*`, and if the member function is declared `const volatile`, the type of `this` is `const volatile X*`. [*Note*: Thus in a `const` member function, the object for which the function is called is accessed through a `const` access path. — *end note*] [*Example*:

```
struct s {
    int a;
    int f() const;
    int g() { return a++; }
    int h() const { return a++; } // error
};

int s::f() const { return a; }
```

The `a++` in the body of `s::h` is ill-formed because it tries to modify (a part of) the object for which `s::h()` is called. This is not allowed in a `const` member function because `this` is a pointer to `const`; that is, `*this` has `const` type. — *end example*]

- ² Similarly, `volatile` semantics (10.1.7.1) apply in `volatile` member functions when accessing the object and its non-static data members.
³ A `cv-qualified` member function can be called on an object-expression (8.5.1.5) only if the object-expression is as `cv-qualified` or less-`cv-qualified` than the member function. [*Example*:

```
void k(s& x, const s& y) {
    x.f();
    x.g();
    y.f();
    y.g(); // error
}
```

The call `y.g()` is ill-formed because `y` is `const` and `s::g()` is a non-`const` member function, that is, `s::g()` is less-qualified than the object-expression `y`. — *end example*]

- ⁴ Constructors (15.1) and destructors (15.4) shall not be declared `const`, `volatile` or `const volatile`. [*Note*: However, these functions can be invoked to create and destroy objects with `cv-qualified` types, see 15.1 and 15.4. — *end note*]

12.2.3 Static members

[`class.static`]

- ¹ A static member `s` of class `X` may be referred to using the *qualified-id* expression `X::s`; it is not necessary to use the class member access syntax (8.5.1.5) to refer to a static member. A static member may be referred to using the class member access syntax, in which case the object expression is evaluated. [*Example*:

¹⁰⁹ See, for example, `<cstring>` (25.5).

```

struct process {
    static void reschedule();
};
process& g();

void f() {
    process::reschedule();    // OK: no object necessary
    g().reschedule();        // g() is called
}

```

— end example]

- ² A static member may be referred to directly in the scope of its class or in the scope of a class derived (Clause 13) from its class; in this case, the static member is referred to as if a *qualified-id* expression was used, with the *nested-name-specifier* of the *qualified-id* naming the class scope from which the static member is referenced. [Example:

```

int g();
struct X {
    static int g();
};
struct Y : X {
    static int i;
};
int Y::i = g();    // equivalent to Y::g();

```

— end example]

- ³ If an *unqualified-id* (8.4.4.1) is used in the definition of a static member following the member's *declarator-id*, and name lookup (6.4.1) finds that the *unqualified-id* refers to a static member, enumerator, or nested type of the member's class (or of a base class of the member's class), the *unqualified-id* is transformed into a *qualified-id* expression in which the *nested-name-specifier* names the class scope from which the member is referenced. [Note: See 8.4.4 for restrictions on the use of non-static data members and non-static member functions. — end note]
- ⁴ Static members obey the usual class member access rules (Clause 14). When used in the declaration of a class member, the **static** specifier shall only be used in the member declarations that appear within the *member-specification* of the class definition. [Note: It cannot be specified in member declarations that appear in namespace scope. — end note]

12.2.3.1 Static member functions

[class.static.mfct]

- ¹ [Note: The rules described in 12.2.1 apply to static member functions. — end note]
- ² [Note: A static member function does not have a **this** pointer (12.2.2.1). — end note] A static member function shall not be **virtual**. There shall not be a static and a non-static member function with the same name and the same parameter types (16.1). A static member function shall not be declared **const**, **volatile**, or **const volatile**.

12.2.3.2 Static data members

[class.static.data]

- ¹ A static data member is not part of the subobjects of a class. If a static data member is declared **thread_local** there is one copy of the member per thread. If a static data member is not declared **thread_local** there is one copy of the data member that is shared by all the objects of the class.
- ² The declaration of a non-inline static data member in its class definition is not a definition and may be of an incomplete type other than *cv void*. The definition for a static data member that is not defined inline in the class definition shall appear in a namespace scope enclosing the member's class definition. In the definition at namespace scope, the name of the static data member shall be qualified by its class name using the **::** operator. The *initializer* expression in the definition of a static data member is in the scope of its class (6.3.7). [Example:

```

class process {
    static process* run_chain;
    static process* running;
};

```

```

process* process::running = get_main();
process* process::run_chain = running;

```

The static data member `run_chain` of class `process` is defined in global scope; the notation `process::run_chain` specifies that the member `run_chain` is a member of class `process` and in the scope of class `process`. In the static data member definition, the *initializer* expression refers to the static data member `running` of class `process`. — *end example*]

[*Note*: Once the static data member has been defined, it exists even if no objects of its class have been created. [*Example*: In the example above, `run_chain` and `running` exist even if no objects of class `process` are created by the program. — *end example*] — *end note*]

- 3 If a non-volatile non-inline `const` static data member is of integral or enumeration type, its declaration in the class definition can specify a *brace-or-equal-initializer* in which every *initializer-clause* that is an *assignment-expression* is a constant expression (8.6). The member shall still be defined in a namespace scope if it is odr-used (6.2) in the program and the namespace scope definition shall not contain an *initializer*. An inline static data member may be defined in the class definition and may specify a *brace-or-equal-initializer*. If the member is declared with the `constexpr` specifier, it may be redeclared in namespace scope with no initializer (this usage is deprecated; see D.4). Declarations of other static data members shall not specify a *brace-or-equal-initializer*.
- 4 [*Note*: There shall be exactly one definition of a static data member that is odr-used (6.2) in a program; no diagnostic is required. — *end note*] Unnamed classes and classes contained directly or indirectly within unnamed classes shall not contain static data members.
- 5 [*Note*: Static data members of a class in namespace scope have the linkage of that class (6.5). A local class cannot have static data members (12.4). — *end note*]
- 6 Static data members are initialized and destroyed exactly like non-local variables (6.8.3.2, 6.8.3.3, 6.8.3.4).
- 7 A static data member shall not be `mutable` (10.1.1).

12.2.4 Bit-fields

[**class.bit**]

- 1 A *member-declarator* of the form

identifier_{opt} attribute-specifier-seq_{opt} : constant-expression brace-or-equal-initializer_{opt}

specifies a bit-field; its length is set off from the bit-field name by a colon. The optional *attribute-specifier-seq* appertains to the entity being declared. The bit-field attribute is not part of the type of the class member. The *constant-expression* shall be an integral constant expression with a value greater than or equal to zero. The value of the integral constant expression may be larger than the number of bits in the object representation (6.7) of the bit-field's type; in such cases the extra bits are padding bits (6.7). Allocation of bit-fields within a class object is implementation-defined. Alignment of bit-fields is implementation-defined. Bit-fields are packed into some addressable allocation unit. [*Note*: Bit-fields straddle allocation units on some machines and not on others. Bit-fields are assigned right-to-left on some machines, left-to-right on others. — *end note*]

- 2 A declaration for a bit-field that omits the *identifier* declares an *unnamed bit-field*. Unnamed bit-fields are not members and cannot be initialized. An unnamed bit-field shall not be declared with a cv-qualified type. [*Note*: An unnamed bit-field is useful for padding to conform to externally-imposed layouts. — *end note*] As a special case, an unnamed bit-field with a width of zero specifies alignment of the next bit-field at an allocation unit boundary. Only when declaring an unnamed bit-field may the value of the *constant-expression* be equal to zero.
- 3 A bit-field shall not be a static member. A bit-field shall have integral or enumeration type (6.7.1). A `bool` value can successfully be stored in a bit-field of any nonzero size. The address-of operator `&` shall not be applied to a bit-field, so there are no pointers to bit-fields. A non-`const` reference shall not be bound to a bit-field (11.6.3). [*Note*: If the initializer for a reference of type `const T&` is an lvalue that refers to a bit-field, the reference is bound to a temporary initialized to hold the value of the bit-field; the reference is not bound to the bit-field directly. See 11.6.3. — *end note*]
- 4 If the value `true` or `false` is stored into a bit-field of type `bool` of any size (including a one bit bit-field), the original `bool` value and the value of the bit-field shall compare equal. If the value of an enumerator is stored into a bit-field of the same enumeration type and the number of bits in the bit-field is large enough to hold all the values of that enumeration type (10.2), the original enumerator value and the value of the bit-field shall compare equal. [*Example*:

```

enum BOOL { FALSE=0, TRUE=1 };
struct A {
    BOOL b:1;
};
A a;
void f() {
    a.b = TRUE;
    if (a.b == TRUE)           // yields true
        { /* ... */ }
}

```

— end example]

12.2.5 Nested class declarations

[class.nest]

- ¹ A class can be declared within another class. A class declared within another is called a *nested* class. The name of a nested class is local to its enclosing class. The nested class is in the scope of its enclosing class. [Note: See 8.4.4 for restrictions on the use of non-static data members and non-static member functions. — end note]

[Example:

```

int x;
int y;

struct enclose {
    int x;
    static int s;

    struct inner {
        void f(int i) {
            int a = sizeof(x);    // OK: operand of sizeof is an unevaluated operand
            x = i;                // error: assign to enclose::x
            s = i;                // OK: assign to enclose::s
            ::x = i;              // OK: assign to global x
            y = i;                // OK: assign to global y
        }
        void g(enclose* p, int i) {
            p->x = i;              // OK: assign to enclose::x
        }
    };
};

inner* p = 0;                    // error: inner not in scope

```

— end example]

- ² Member functions and static data members of a nested class can be defined in a namespace scope enclosing the definition of their class. [Example:

```

struct enclose {
    struct inner {
        static int x;
        void f(int i);
    };
};

int enclose::inner::x = 1;

void enclose::inner::f(int i) { /* ... */ }

```

— end example]

- ³ If class X is defined in a namespace scope, a nested class Y may be declared in class X and later defined in the definition of class X or be later defined in a namespace scope enclosing the definition of class X. [Example:

```

class E {
    class I1;                // forward declaration of nested class
    class I2;
}

```

```

    class I1 { };           // definition of nested class
};
    class E::I2 { };       // definition of nested class
— end example]

```

- ⁴ Like a member function, a friend function (14.3) defined within a nested class is in the lexical scope of that class; it obeys the same rules for name binding as a static member function of that class (12.2.3), but it has no special access rights to members of an enclosing class.

12.2.6 Nested type names [class.nested.type]

- ¹ Type names obey exactly the same scope rules as other names. In particular, type names defined within a class definition cannot be used outside their class without qualification. [Example:

```

    struct X {
        typedef int I;
        class Y { /* ... */ };
        I a;
    };

    I b;           // error
    Y c;           // error
    X::Y d;        // OK
    X::I e;        // OK
— end example]

```

12.3 Unions [class.union]

- ¹ In a union, a non-static data member is *active* if its name refers to an object whose lifetime has begun and has not ended (6.6.3). At most one of the non-static data members of an object of union type can be active at any time, that is, the value of at most one of the non-static data members can be stored in a union at any time. [Note: One special guarantee is made in order to simplify the use of unions: If a standard-layout union contains several standard-layout structs that share a common initial sequence (12.2), and if a non-static data member of an object of this standard-layout union type is active and is one of the standard-layout structs, it is permitted to inspect the common initial sequence of any of the standard-layout struct members; see 12.2.— end note]
- ² The size of a union is sufficient to contain the largest of its non-static data members. Each non-static data member is allocated as if it were the sole member of a struct. [Note: A union object and its non-static data members are pointer-interconvertible (6.7.2, 8.5.1.9). As a consequence, all non-static data members of a union object have the same address. — end note]
- ³ A union can have member functions (including constructors and destructors), but it shall not have virtual (13.3) functions. A union shall not have base classes. A union shall not be used as a base class. If a union contains a non-static data member of reference type the program is ill-formed. [Note: Absent default member initializers (12.2), if any non-static data member of a union has a non-trivial default constructor (15.1), copy constructor (15.8), move constructor (15.8), copy assignment operator (15.8), move assignment operator (15.8), or destructor (15.4), the corresponding member function of the union must be user-provided or it will be implicitly deleted (11.4.3) for the union. — end note]
- ⁴ [Example: Consider the following union:

```

    union U {
        int i;
        float f;
        std::string s;
    };

```

Since `std::string` (25.3) declares non-trivial versions of all of the special member functions, `U` will have an implicitly deleted default constructor, copy/move constructor, copy/move assignment operator, and destructor. To use `U`, some or all of these member functions must be user-provided. — end example]

- ⁵ When the left operand of an assignment operator involves a member access expression (8.5.1.5) that nominates a union member, it may begin the lifetime of that union member, as described below. For an expression `E`, define the set $S(E)$ of subexpressions of `E` as follows:

- (5.1) — If E is of the form $A.B$, $S(E)$ contains the elements of $S(A)$, and also contains $A.B$ if B names a union member of a non-class, non-array type, or of a class type with a trivial default constructor that is not deleted, or an array of such types.
- (5.2) — If E is of the form $A[B]$ and is interpreted as a built-in array subscripting operator, $S(E)$ is $S(A)$ if A is of array type, $S(B)$ if B is of array type, and empty otherwise.
- (5.3) — Otherwise, $S(E)$ is empty.

In an assignment expression of the form $E1 = E2$ that uses either the built-in assignment operator (8.5.18) or a trivial assignment operator (15.8), for each element X of $S(E1)$, if modification of X would have undefined behavior under 6.6.3, an object of the type of X is implicitly created in the nominated storage; no initialization is performed and the beginning of its lifetime is sequenced after the value computation of the left and right operands and before the assignment. [Note: This ends the lifetime of the previously-active member of the union, if any (6.6.3). — end note] [Example:

```
union A { int x; int y[4]; };
struct B { A a; };
union C { B b; int k; };
int f() {
    C c;                // does not start lifetime of any union member
    c.b.a.y[3] = 4;     // OK: S(c.b.a.y[3]) contains c.b and c.b.a.y;
                        // creates objects to hold union members c.b and c.b.a.y
    return c.b.a.y[3]; // OK: c.b.a.y refers to newly created object (see 6.6.3)
}

struct X { const int a; int b; };
union Y { X x; int k; };
void g() {
    Y y = { { 1, 2 } }; // OK, y.x is active union member (12.2)
    int n = y.x.a;
    y.k = 4;           // OK: ends lifetime of y.x, y.k is active member of union
    y.x.b = n;        // undefined behavior: y.x.b modified outside its lifetime,
                    // S(y.x.b) is empty because X's default constructor is deleted,
                    // so union member y.x's lifetime does not implicitly start
}

```

— end example]

- ⁶ [Note: In general, one must use explicit destructor calls and placement *new-expression* to change the active member of a union. — end note] [Example: Consider an object u of a union type U having non-static data members m of type M and n of type N . If M has a non-trivial destructor and N has a non-trivial constructor (for instance, if they declare or inherit virtual functions), the active member of u can be safely switched from m to n using the destructor and placement *new-expression* as follows:

```
u.m.~M();
new (&u.n) N;

```

— end example]

12.3.1 Anonymous unions

[class.union.anon]

- ¹ A union of the form

```
union { member-specification } ;

```

is called an *anonymous union*; it defines an unnamed type and an unnamed object of that type called an *anonymous union object*. Each *member-declaration* in the *member-specification* of an anonymous union shall either define a non-static data member or be a *static_assert-declaration*. [Note: Nested types, anonymous unions, and functions cannot be declared within an anonymous union. — end note] The names of the members of an anonymous union shall be distinct from the names of any other entity in the scope in which the anonymous union is declared. For the purpose of name lookup, after the anonymous union definition, the members of the anonymous union are considered to have been defined in the scope in which the anonymous union is declared. [Example:

```
void f() {
    union { int a; const char* p; };
    a = 1;
}

```



```

    p = "Jennifer";
}

```

Here `a` and `p` are used like ordinary (non-member) variables, but since they are union members they have the same address. — *end example*]

- ² Anonymous unions declared in a named namespace or in the global namespace shall be declared `static`. Anonymous unions declared at block scope shall be declared with any storage class allowed for a block-scope variable, or with no storage class. A storage class is not allowed in a declaration of an anonymous union in a class scope. An anonymous union shall not have private or protected members (Clause 14). An anonymous union shall not have member functions.

- ³ A union for which objects, pointers, or references are declared is not an anonymous union. [*Example:*

```

void f() {
    union { int aa; char* p; } obj, *ptr = &obj;
    aa = 1;           // error
    ptr->aa = 1;      // OK
}

```

The assignment to plain `aa` is ill-formed since the member name is not visible outside the union, and even if it were visible, it is not associated with any particular object. — *end example*] [*Note:* Initialization of unions with no user-declared constructors is described in 11.6.1. — *end note*]

- ⁴ A *union-like class* is a union or a class that has an anonymous union as a direct member. A union-like class `X` has a set of *variant members*. If `X` is a union, a non-static data member of `X` that is not an anonymous union is a variant member of `X`. In addition, a non-static data member of an anonymous union that is a member of `X` is also a variant member of `X`. At most one variant member of a union may have a default member initializer. [*Example:*

```

union U {
    int x = 0;
    union {
        int k;
    };
    union {
        int z;
        int y = 1;    // error: initialization for second variant member of U
    };
};

```

— *end example*]

12.4 Local class declarations

[**class.local**]

- ¹ A class can be declared within a function definition; such a class is called a *local class*. The name of a local class is local to its enclosing scope. The local class is in the scope of the enclosing scope, and has the same access to names outside the function as does the enclosing function. [*Note:* A declaration in a local class cannot odr-use (6.2) a local entity from an enclosing scope. — *end note*] [*Example:*

```

int x;
void f() {
    static int s;
    int x;
    const int N = 5;
    extern int q();
    int arr[2];
    auto [y, z] = arr;

    struct local {
        int g() { return x; }    // error: odr-use of non-odr-usable variable x
        int h() { return s; }    // OK
        int k() { return ::x; }  // OK
        int l() { return q(); }  // OK
        int m() { return N; }    // OK: not an odr-use
        int* n() { return &N; }  // error: odr-use of non-odr-usable variable N
        int p() { return y; }    // error: odr-use of non-odr-usable structured binding y
    };
}

```

```
    };  
  }  
  
  local* p = 0;           // error: local not in scope  
— end example]
```

- ² An enclosing function has no special access to members of the local class; it obeys the usual access rules ([Clause 14](#)). Member functions of a local class shall be defined within their class definition, if they are defined at all.
- ³ If class X is a local class a nested class Y may be declared in class X and later defined in the definition of class X or be later defined in the same scope as the definition of class X. A class nested within a local class is a local class.
- ⁴ A local class shall not have static data members.

13 Derived classes

[class.derived]

- ¹ A list of base classes can be specified in a class definition using the notation:

```

base-clause:
    : base-specifier-list

base-specifier-list:
    base-specifier ...opt
    base-specifier-list , base-specifier ...opt

base-specifier:
    attribute-specifier-seqopt class-or-decltype
    attribute-specifier-seqopt virtual access-specifieropt class-or-decltype
    attribute-specifier-seqopt access-specifier virtualopt class-or-decltype

class-or-decltype:
    nested-name-specifieropt class-name
    nested-name-specifier template simple-template-id
    decltype-specifier

access-specifier:
    private
    protected
    public

```

The optional *attribute-specifier-seq* appertains to the *base-specifier*.

- ² A *class-or-decltype* shall denote a class type that is not an incompletely defined class (Clause 12). The class denoted by the *class-or-decltype* of a *base-specifier* is called a *direct base class* for the class being defined. During the lookup for a base class name, non-type names are ignored (6.3.10). If the name found is not a *class-name*, the program is ill-formed. A class B is a base class of a class D if it is a direct base class of D or a direct base class of one of D's base classes. A class is an *indirect base class* of another if it is a base class but not a direct base class. A class is said to be (directly or indirectly) *derived* from its (direct or indirect) base classes. [Note: See Clause 14 for the meaning of *access-specifier*. — end note] Unless redeclared in the derived class, members of a base class are also considered to be members of the derived class. Members of a base class other than constructors are said to be *inherited* by the derived class. Constructors of a base class can also be inherited as described in 10.3.3. Inherited members can be referred to in expressions in the same manner as other members of the derived class, unless their names are hidden or ambiguous (13.2). [Note: The scope resolution operator `::` (8.4.4.2) can be used to refer to a direct or indirect base member explicitly. This allows access to a name that has been redeclared in the derived class. A derived class can itself serve as a base class subject to access control; see 14.2. A pointer to a derived class can be implicitly converted to a pointer to an accessible unambiguous base class (7.11). An lvalue of a derived class type can be bound to a reference to an accessible unambiguous base class (11.6.3). — end note]

- ³ The *base-specifier-list* specifies the type of the *base class subobjects* contained in an object of the derived class type. [Example:

```

struct Base {
    int a, b, c;
};

struct Derived : Base {
    int b;
};

struct Derived2 : Derived {
    int c;
};

```

Here, an object of class `Derived2` will have a subobject of class `Derived` which in turn will have a subobject of class `Base`. — end example]

- ⁴ A *base-specifier* followed by an ellipsis is a pack expansion (17.6.3).

- ⁵ The order in which the base class subobjects are allocated in the most derived object (6.6.2) is unspecified. [Note: A derived class and its base class subobjects can be represented by a directed acyclic graph (DAG) where an arrow means “directly derived from”. An arrow need not have a physical representation in memory. A DAG of subobjects is often referred to as a “subobject lattice”.




Figure 2 — Directed acyclic graph

— end note]

- ⁶ [Note: Initialization of objects representing base classes can be specified in constructors; see 15.6.2. — end note]
- ⁷ [Note: A base class subobject might have a layout (6.6.4) different from the layout of a most derived object of the same type. A base class subobject might have a polymorphic behavior (15.7) different from the polymorphic behavior of a most derived object of the same type. A base class subobject may be of zero size (Clause 12); however, two subobjects that have the same class type and that belong to the same most derived object must not be allocated at the same address (8.5.10). — end note]

13.1 Multiple base classes

[class.mi]

- ¹ A class can be derived from any number of base classes. [Note: The use of more than one direct base class is often called multiple inheritance. — end note] [Example:

```

class A { /* ... */ };
class B { /* ... */ };
class C { /* ... */ };
class D : public A, public B, public C { /* ... */ };
  
```

— end example]

- ² [Note: The order of derivation is not significant except as specified by the semantics of initialization by constructor (15.6.2), cleanup (15.4), and storage layout (12.2, 14.1). — end note]
- ³ A class shall not be specified as a direct base class of a derived class more than once. [Note: A class can be an indirect base class more than once and can be a direct and an indirect base class. There are limited things that can be done with such a class. The non-static data members and member functions of the direct base class cannot be referred to in the scope of the derived class. However, the static members, enumerations and types can be unambiguously referred to. — end note] [Example:

```

class X { /* ... */ };
class Y : public X, public X { /* ... */ }; // ill-formed

class L { public: int next; /* ... */ };
class A : public L { /* ... */ };
class B : public L { /* ... */ };
class C : public A, public B { void f(); /* ... */ }; // well-formed
class D : public A, public L { void f(); /* ... */ }; // well-formed
  
```

— end example]

- ⁴ A base class specifier that does not contain the keyword `virtual` specifies a *non-virtual base class*. A base class specifier that contains the keyword `virtual` specifies a *virtual base class*. For each distinct occurrence of a non-virtual base class in the class lattice of the most derived class, the most derived object (6.6.2) shall contain a corresponding distinct base class subobject of that type. For each distinct base class that is specified virtual, the most derived object shall contain a single base class subobject of that type.
- ⁵ [Note: For an object of class type `C`, each distinct occurrence of a (non-virtual) base class `L` in the class lattice of `C` corresponds one-to-one with a distinct `L` subobject within the object of type `C`. Given the class `C` defined above, an object of class `C` will have two subobjects of class `L` as shown in Figure 3.




Figure 3 — Non-virtual base

In such lattices, explicit qualification can be used to specify which subobject is meant. The body of function `C::f` could refer to the member `next` of each `L` subobject:

```
void C::f() { A::next = B::next; } // well-formed
```

Without the `A::` or `B::` qualifiers, the definition of `C::f` above would be ill-formed because of ambiguity (13.2). — *end note*

⁶ [Note: In contrast, consider the case with a virtual base class:

```
class V { /* ... */ };
class A : virtual public V { /* ... */ };
class B : virtual public V { /* ... */ };
class C : public A, public B { /* ... */ };
```




Figure 4 — Virtual base

For an object `c` of class type `C`, a single subobject of type `V` is shared by every base class subobject of `c` that has a virtual base class of type `V`. Given the class `C` defined above, an object of class `C` will have one subobject of class `V`, as shown in Figure 4. — *end note*

⁷ [Note: A class can have both virtual and non-virtual base classes of a given type.

```
class B { /* ... */ };
class X : virtual public B { /* ... */ };
class Y : virtual public B { /* ... */ };
class Z : public B { /* ... */ };
class AA : public X, public Y, public Z { /* ... */ };
```

For an object of class `AA`, all virtual occurrences of base class `B` in the class lattice of `AA` correspond to a single `B` subobject within the object of type `AA`, and every other occurrence of a (non-virtual) base class `B` in the class lattice of `AA` corresponds one-to-one with a distinct `B` subobject within the object of type `AA`. Given the class `AA` defined above, class `AA` has two subobjects of class `B`: `Z`'s `B` and the virtual `B` shared by `X` and `Y`, as shown in Figure 5.

— *end note*

13.2 Member name lookup

[class.member.lookup]

- ¹ Member name lookup determines the meaning of a name (*id-expression*) in a class scope (6.3.7). Name lookup can result in an *ambiguity*, in which case the program is ill-formed. For an *id-expression*, name lookup begins in the class scope of `this`; for a *qualified-id*, name lookup begins in the scope of the *nested-name-specifier*. Name lookup takes place before access control (6.4, Clause 14).
- ² The following steps define the result of name lookup for a member name `f` in a class scope `C`.




Figure 5 — Virtual and non-virtual base

- 3 The *lookup set* for **f** in **C**, called $S(f, C)$, consists of two component sets: the *declaration set*, a set of members named **f**; and the *subobject set*, a set of subobjects where declarations of these members (possibly including *using-declarations*) were found. In the declaration set, *using-declarations* are replaced by the set of designated members that are not hidden or overridden by members of the derived class (10.3.3), and type declarations (including injected-class-names) are replaced by the types they designate. $S(f, C)$ is calculated as follows:
- 4 If **C** contains a declaration of the name **f**, the declaration set contains every declaration of **f** declared in **C** that satisfies the requirements of the language construct in which the lookup occurs. [Note: Looking up a name in an *elaborated-type-specifier* (6.4.4) or *base-specifier* (Clause 13), for instance, ignores all non-type declarations, while looking up a name in a *nested-name-specifier* (6.4.3) ignores function, variable, and enumerator declarations. As another example, looking up a name in a *using-declaration* (10.3.3) includes the declaration of a class or enumeration that would ordinarily be hidden by another declaration of that name in the same scope. — end note] If the resulting declaration set is not empty, the subobject set contains **C** itself, and calculation is complete.
- 5 Otherwise (i.e., **C** does not contain a declaration of **f** or the resulting declaration set is empty), $S(f, C)$ is initially empty. If **C** has base classes, calculate the lookup set for **f** in each direct base class subobject B_i , and merge each such lookup set $S(f, B_i)$ in turn into $S(f, C)$.
- 6 The following steps define the result of merging lookup set $S(f, B_i)$ into the intermediate $S(f, C)$:
 - (6.1) — If each of the subobject members of $S(f, B_i)$ is a base class subobject of at least one of the subobject members of $S(f, C)$, or if $S(f, B_i)$ is empty, $S(f, C)$ is unchanged and the merge is complete. Conversely, if each of the subobject members of $S(f, C)$ is a base class subobject of at least one of the subobject members of $S(f, B_i)$, or if $S(f, C)$ is empty, the new $S(f, C)$ is a copy of $S(f, B_i)$.
 - (6.2) — Otherwise, if the declaration sets of $S(f, B_i)$ and $S(f, C)$ differ, the merge is ambiguous: the new $S(f, C)$ is a lookup set with an invalid declaration set and the union of the subobject sets. In subsequent merges, an invalid declaration set is considered different from any other.
 - (6.3) — Otherwise, the new $S(f, C)$ is a lookup set with the shared set of declarations and the union of the subobject sets.
- 7 The result of name lookup for **f** in **C** is the declaration set of $S(f, C)$. If it is an invalid set, the program is ill-formed. [Example:

```

struct A { int x; }; // S(x,A) = { { A::x }, { A } }
struct B { float x; }; // S(x,B) = { { B::x }, { B } }
struct C: public A, public B { }; // S(x,C) = { invalid, { A in C, B in C } }
struct D: public virtual C { }; // S(x,D) = S(x,C)
struct E: public virtual C { char x; }; // S(x,E) = { { E::x }, { E } }
struct F: public D, public E { }; // S(x,F) = S(x,E)
int main() {
    F f;
    f.x = 0; // OK, lookup finds E::x
}

```

$S(x, F)$ is unambiguous because the **A** and **B** base class subobjects of **D** are also base class subobjects of **E**, so $S(x, D)$ is discarded in the first merge step. — end example]

- 8 If the name of an overloaded function is unambiguously found, overload resolution (16.3) also takes place before access control. Ambiguities can often be resolved by qualifying a name with its class name. [Example:

```

struct A {
    int f();
};

struct B {
    int f();
};

struct C : A, B {
    int f() { return A::f() + B::f(); }
};

```

— *end example*]

- ⁹ [Note: A static member, a nested type or an enumerator defined in a base class T can unambiguously be found even if an object has more than one base class subobject of type T. Two base class subobjects share the non-static member subobjects of their common virtual base classes. — *end note*] [Example:

```

struct V {
    int v;
};

struct A {
    int a;
    static int s;
    enum { e };
};

struct B : A, virtual V { };
struct C : A, virtual V { };
struct D : B, C { };

void f(D* pd) {
    pd->v++;           // OK: only one v (virtual)
    pd->s++;           // OK: only one s (static)
    int i = pd->e;    // OK: only one e (enumerator)
    pd->a++;           // error, ambiguous: two as in D
}

```

— *end example*]

- ¹⁰ [Note: When virtual base classes are used, a hidden declaration can be reached along a path through the subobject lattice that does not pass through the hiding declaration. This is not an ambiguity. The identical use with non-virtual base classes is an ambiguity; in that case there is no unique instance of the name that hides all the others. — *end note*] [Example:

```

struct V { int f(); int x; };
struct W { int g(); int y; };
struct B : virtual V, W {
    int f(); int x;
    int g(); int y;
};
struct C : virtual V, W { };

struct D : B, C { void glorp(); };

```




Figure 6 — Name lookup

The names declared in V and the left-hand instance of W are hidden by those in B, but the names declared in the right-hand instance of W are not hidden at all.

```

void D::glorp() {
    x++;           // OK: B::x hides V::x
    f();           // OK: B::f() hides V::f()
    y++;           // error: B::y and C's W::y
    g();           // error: B::g() and C's W::g()
}

```

— end example]

- 11 An explicit or implicit conversion from a pointer to or an expression designating an object of a derived class to a pointer or reference to one of its base classes shall unambiguously refer to a unique object representing the base class. [Example:

```

struct V { };
struct A { };
struct B : A, virtual V { };
struct C : A, virtual V { };
struct D : B, C { };

void g() {
    D d;
    B* pb = &d;
    A* pa = &d;           // error, ambiguous: C's A or B's A?
    V* pv = &d;           // OK: only one V subobject
}

```

— end example]

- 12 [Note: Even if the result of name lookup is unambiguous, use of a name found in multiple subobjects might still be ambiguous (7.12, 8.5.1.5, 14.2). — end note] [Example:

```

struct B1 {
    void f();
    static void f(int);
    int i;
};
struct B2 {
    void f(double);
};
struct I1: B1 { };
struct I2: B1 { };

struct D: I1, I2, B2 {
    using B1::f;
    using B2::f;
    void g() {
        f();           // Ambiguous conversion of this
        f(0);           // Unambiguous (static)
        f(0.0);         // Unambiguous (only one B2)
        int B1::* mpB1 = &D::i; // Unambiguous
        int D::* mpD = &D::i; // Ambiguous conversion
    }
};

```

— end example]

13.3 Virtual functions

[class.virtual]

- 1 [Note: Virtual functions support dynamic binding and object-oriented programming. — end note] A class that declares or inherits a virtual function is called a *polymorphic class*.
- 2 If a virtual member function `vf` is declared in a class `Base` and in a class `Derived`, derived directly or indirectly from `Base`, a member function `vf` with the same name, parameter-type-list (11.3.5), cv-qualification, and ref-qualifier (or absence of same) as `Base::vf` is declared, then `Derived::vf` is also virtual (whether or not it is so declared) and it *overrides*¹¹⁰ `Base::vf`. For convenience we say that any virtual function overrides itself.

¹¹⁰ A function with the same name but a different parameter list (Clause 16) as a virtual function is not necessarily virtual and does not override. The use of the `virtual` specifier in the declaration of an overriding function is legal but redundant (has empty semantics). Access control (Clause 14) is not considered in determining overriding.

A virtual member function `C::vf` of a class object `S` is a *final overrider* unless the most derived class (6.6.2) of which `S` is a base class subobject (if any) declares or inherits another member function that overrides `vf`. In a derived class, if a virtual member function of a base class subobject has more than one final overrider the program is ill-formed. [Example:

```
struct A {
    virtual void f();
};
struct B : virtual A {
    virtual void f();
};
struct C : B , virtual A {
    using A::f;
};

void foo() {
    C c;
    c.f();           // calls B::f, the final overrider
    c.C::f();       // calls A::f because of the using-declaration
}
```

— end example]

[Example:

```
struct A { virtual void f(); };
struct B : A { };
struct C : A { void f(); };
struct D : B, C { }; // OK: A::f and C::f are the final overriders
                    // for the B and C subobjects, respectively
```

— end example]

- 3 [Note: A virtual member function does not have to be visible to be overridden, for example,

```
struct B {
    virtual void f();
};
struct D : B {
    void f(int);
};
struct D2 : D {
    void f();
};
```

the function `f(int)` in class `D` hides the virtual function `f()` in its base class `B`; `D::f(int)` is not a virtual function. However, `f()` declared in class `D2` has the same name and the same parameter list as `B::f()`, and therefore is a virtual function that overrides the function `B::f()` even though `B::f()` is not visible in class `D2`. — end note]

- 4 If a virtual function `f` in some class `B` is marked with the *virt-specifier* `final` and in a class `D` derived from `B` a function `D::f` overrides `B::f`, the program is ill-formed. [Example:

```
struct B {
    virtual void f() const final;
};

struct D : B {
    void f() const; // error: D::f attempts to override final B::f
};
```

— end example]

- 5 If a virtual function is marked with the *virt-specifier* `override` and does not override a member function of a base class, the program is ill-formed. [Example:

```
struct B {
    virtual void f(int);
};
```

```

struct D : B {
    virtual void f(long) override; // error: wrong signature overriding B::f
    virtual void f(int) override; // OK
};

```

— end example]

- 6 A virtual function shall not have a trailing *requires*-clause (Clause 11). [Example:

```

struct A {
    virtual void f() requires true; // error: virtual function cannot be constrained (17.4.2)
};

```

— end example]

- 7 Even though destructors are not inherited, a destructor in a derived class overrides a base class destructor declared virtual; see 15.4 and 15.5.

- 8 The return type of an overriding function shall be either identical to the return type of the overridden function or *covariant* with the classes of the functions. If a function `D::f` overrides a function `B::f`, the return types of the functions are covariant if they satisfy the following criteria:

- (8.1) — both are pointers to classes, both are lvalue references to classes, or both are rvalue references to classes¹¹¹
- (8.2) — the class in the return type of `B::f` is the same class as the class in the return type of `D::f`, or is an unambiguous and accessible direct or indirect base class of the class in the return type of `D::f`
- (8.3) — both pointers or references have the same cv-qualification and the class type in the return type of `D::f` has the same cv-qualification as or less cv-qualification than the class type in the return type of `B::f`.
- 9 If the class type in the covariant return type of `D::f` differs from that of `B::f`, the class type in the return type of `D::f` shall be complete at the point of declaration of `D::f` or shall be the class type `D`. When the overriding function is called as the final overrider of the overridden function, its result is converted to the type returned by the (statically chosen) overridden function (8.5.1.2). [Example:

```

class B { };
class D : private B { friend class Derived; };
struct Base {
    virtual void vf1();
    virtual void vf2();
    virtual void vf3();
    virtual B*   vf4();
    virtual B*   vf5();
    void f();
};

struct No_good : public Base {
    D* vf4(); // error: B (base class of D) inaccessible
};

class A;
struct Derived : public Base {
    void vf1(); // virtual and overrides Base::vf1()
    void vf2(int); // not virtual, hides Base::vf2()
    char vf3(); // error: invalid difference in return type only
    D* vf4(); // OK: returns pointer to derived class
    A* vf5(); // error: returns pointer to incomplete class
    void f();
};

void g() {
    Derived d;
    Base* bp = &d; // standard conversion:
                  // Derived* to Base*
    bp->vf1(); // calls Derived::vf1()
    bp->vf2(); // calls Base::vf2()
}

```

¹¹¹) Multi-level pointers to classes or references to multi-level pointers to classes are not allowed.

```

    bp->f();           // calls Base::f() (not virtual)
    B* p = bp->vf4(); // calls Derived::vf4() and converts the
                    // result to B*

    Derived* dp = &d;
    D* q = dp->vf4(); // calls Derived::vf4() and does not
                    // convert the result to B*

    dp->vf2();        // ill-formed: argument mismatch
}

```

— end example]

10 [Note: The interpretation of the call of a virtual function depends on the type of the object for which it is called (the dynamic type), whereas the interpretation of a call of a non-virtual member function depends only on the type of the pointer or reference denoting that object (the static type) (8.5.1.2). — end note]

11 [Note: The `virtual` specifier implies membership, so a virtual function cannot be a non-member (10.1.2) function. Nor can a virtual function be a static member, since a virtual function call relies on a specific object for determining which function to invoke. A virtual function declared in one class can be declared a friend (14.3) in another class. — end note]

12 A virtual function declared in a class shall be defined, or declared pure (13.4) in that class, or both; no diagnostic is required (6.2).

13 [Example: Here are some uses of virtual functions with multiple base classes:

```

struct A {
    virtual void f();
};

struct B1 : A {           // note non-virtual derivation
    void f();
};

struct B2 : A {
    void f();
};

struct D : B1, B2 {      // D has two separate A subobjects
};

void foo() {
    D d;
    // A* ap = &d; // would be ill-formed: ambiguous
    B1* b1p = &d;
    A* ap = b1p;
    D* dp = &d;
    ap->f();              // calls D::B1::f
    dp->f();              // ill-formed: ambiguous
}

```

In class D above there are two occurrences of class A and hence two occurrences of the virtual member function `A::f`. The final overrider of `B1::A::f` is `B1::f` and the final overrider of `B2::A::f` is `B2::f`. — end example]

14 [Example: The following example shows a function that does not have a unique final overrider:

```

struct A {
    virtual void f();
};

struct VB1 : virtual A { // note virtual derivation
    void f();
};

struct VB2 : virtual A {
    void f();
};

```

```

struct Error : VB1, VB2 {      // ill-formed
};

struct Okay : VB1, VB2 {
    void f();
};

```

Both `VB1::f` and `VB2::f` override `A::f` but there is no overrider of both of them in class `Error`. This example is therefore ill-formed. Class `Okay` is well-formed, however, because `Okay::f` is a final overrider. — *end example*]

- 15 [Example: The following example uses the well-formed classes from above.

```

struct VB1a : virtual A {      // does not declare f
};

struct Da : VB1a, VB2 {
};

void foe() {
    VB1a* vb1ap = new Da;
    vb1ap->f();                // calls VB2::f
}

```

— *end example*]

- 16 Explicit qualification with the scope operator (8.4.4.2) suppresses the virtual call mechanism. [Example:

```

class B { public: virtual void f(); };
class D : public B { public: void f(); };

void D::f() { /* ... */ B::f(); }

```

Here, the function call in `D::f` really does call `B::f` and not `D::f`. — *end example*]

- 17 A function with a deleted definition (11.4) shall not override a function that does not have a deleted definition. Likewise, a function that does not have a deleted definition shall not override a function with a deleted definition.

- 18 If an overriding function specifies contract conditions (10.6.4), it shall specify the same list of contract conditions as its overridden functions; no diagnostic is required if corresponding conditions will always evaluate to the same value. Otherwise, it is considered to have the list of contract conditions from one of its overridden functions; the names in the contract conditions are bound, and the semantic constraints are checked, at the point where the contract conditions appear. Given a virtual function `f` with a contract condition that odr-uses `*this` (6.2), the class of which `f` is a direct member shall be an unambiguous and accessible base class of any class in which `f` is overridden. If a function overrides more than one function, all of the overridden functions shall have the same list of contract conditions (10.6.4); no diagnostic is required if corresponding conditions will always evaluate to the same value. [Example:

```

struct A {
    virtual void g() [[expects: x == 0]];
    int x = 42;
};

int x = 42;
struct B {
    virtual void g() [[expects: x == 0]];
}

struct C : A, B {
    virtual void g();                // error: preconditions of overridden functions are not the same
};

```

— *end example*]

13.4 Abstract classes

[class.abstract]

- 1 [Note: The abstract class mechanism supports the notion of a general concept, such as a `shape`, of which only more concrete variants, such as `circle` and `square`, can actually be used. An abstract class can also be

used to define an interface for which derived classes provide a variety of implementations. — *end note*]

- ² A virtual function is specified as a *pure virtual function* by using a *pure-specifier* (12.2) in the function declaration in the class definition. [Note: Such a function might be inherited: see below. — *end note*] A class is an *abstract class* if it has at least one pure virtual function. [Note: An abstract class can be used only as a base class of some other class; no objects of an abstract class can be created except as subobjects of a class derived from it (6.1, 12.2). — *end note*] A pure virtual function need be defined only if called with, or as if with (15.4), the *qualified-id* syntax (8.4.4.2). [Example:

```
class point { /* ... */ };
class shape {                               // abstract class
    point center;
public:
    point where() { return center; }
    void move(point p) { center=p; draw(); }
    virtual void rotate(int) = 0; // pure virtual
    virtual void draw() = 0;      // pure virtual
};
```

— *end example*] [Note: A function declaration cannot provide both a *pure-specifier* and a definition — *end note*] [Example:

```
struct C {
    virtual void f() = 0 { }; // ill-formed
};
```

— *end example*]

- ³ [Note: An abstract class type cannot be used as a parameter or return type of a function being defined (11.3.5) or called (8.5.1.2), except as specified in 10.1.7.2. Further, an abstract class type cannot be used as the type of an explicit type conversion (8.5.1.9, 8.5.1.10, 8.5.1.11), because the resulting prvalue would be of abstract class type (8.2.1). However, pointers and references to abstract class types can appear in such contexts. — *end note*]

- ⁴ A class is abstract if it contains or inherits at least one pure virtual function for which the final overrider is pure virtual. [Example:

```
class ab_circle : public shape {
    int radius;
public:
    void rotate(int) { }
    // ab_circle::draw() is a pure virtual
};
```

Since `shape::draw()` is a pure virtual function `ab_circle::draw()` is a pure virtual by default. The alternative declaration,

```
class circle : public shape {
    int radius;
public:
    void rotate(int) { }
    void draw(); // a definition is required somewhere
};
```

would make class `circle` non-abstract and a definition of `circle::draw()` must be provided. — *end example*]

- ⁵ [Note: An abstract class can be derived from a class that is not abstract, and a pure virtual function may override a virtual function which is not pure. — *end note*]
- ⁶ Member functions can be called from a constructor (or destructor) of an abstract class; the effect of making a virtual call (13.3) to a pure virtual function directly or indirectly for the object being created (or destroyed) from such a constructor (or destructor) is undefined.

14 Member access control [class.access]

¹ A member of a class can be

- (1.1) — private; that is, its name can be used only by members and friends of the class in which it is declared.
- (1.2) — protected; that is, its name can be used only by members and friends of the class in which it is declared, by classes derived from that class, and by their friends (see 14.4).
- (1.3) — public; that is, its name can be used anywhere without access restriction.

² A member of a class can also access all the names to which the class has access. A local class of a member function may access the same names that the member function itself may access.¹¹²

³ Members of a class defined with the keyword `class` are `private` by default. Members of a class defined with the keywords `struct` or `union` are public by default. [*Example*:

```
class X {
    int a;           // X::a is private by default
};

struct S {
    int a;           // S::a is public by default
};
```

— *end example*]

⁴ Access control is applied uniformly to all names, whether the names are referred to from declarations or expressions. [*Note*: Access control applies to names nominated by friend declarations (14.3) and *using-declarations* (10.3.3). — *end note*] In the case of overloaded function names, access control is applied to the function selected by overload resolution. [*Note*: Because access control applies to names, if access control is applied to a typedef name, only the accessibility of the typedef name itself is considered. The accessibility of the entity referred to by the typedef is not considered. For example,

```
class A {
    class B { };
public:
    typedef B BB;
};

void f() {
    A::BB x;           // OK, typedef name A::BB is public
    A::B y;           // access error, A::B is private
}
```

— *end note*]

⁵ [*Note*: Access to members and base classes is controlled, not their visibility (6.3.10). Names of members are still visible, and implicit conversions to base classes are still considered, when those members and base classes are inaccessible. — *end note*] The interpretation of a given construct is established without regard to access control. If the interpretation established makes use of inaccessible member names or base classes, the construct is ill-formed.

⁶ All access controls in [Clause 14](#) affect the ability to access a class member name from the declaration of a particular entity, including parts of the declaration preceding the name of the entity being declared and, if the entity is a class, the definitions of members of the class appearing outside the class's *member-specification*. [*Note*: This access also applies to implicit references to constructors, conversion functions, and destructors. — *end note*]

⁷ [*Example*:

```
class A {
    typedef int I;    // private member
    I f();
```

¹¹²⁾ Access permissions are thus transitive and cumulative to nested and local classes.

```

    friend I g(I);
    static I x;
    template<int> struct Q;
    template<int> friend struct R;
protected:
    struct B { };
};

A::I A::f() { return 0; }
A::I g(A::I p = A::x);
A::I g(A::I p) { return 0; }
A::I A::x = 0;
template<A::I> struct A::Q { };
template<A::I> struct R { };

struct D: A::B, A { };

```

Here, all the uses of `A::I` are well-formed because `A::f`, `A::x`, and `A::Q` are members of class `A` and `g` and `R` are friends of class `A`. This implies, for example, that access checking on the first use of `A::I` must be deferred until it is determined that this use of `A::I` is as the return type of a member of class `A`. Similarly, the use of `A::B` as a *base-specifier* is well-formed because `D` is derived from `A`, so checking of *base-specifiers* must be deferred until the entire *base-specifier-list* has been seen. — *end example*]

- 8 The names in a default argument (11.3.6) are bound at the point of declaration, and access is checked at that point rather than at any points of use of the default argument. Access checking for default arguments in function templates and in member functions of class templates is performed as described in 17.8.1.
- 9 The names in a default *template-argument* (17.1) have their access checked in the context in which they appear rather than at any points of use of the default *template-argument*. [*Example*:

```

class B { };
template <class T> class C {
protected:
    typedef T TT;
};

template <class U, class V = typename U::TT>
class D : public U { };

D <C<B>> >* d;          // access error, C::TT is protected

```

— *end example*]

14.1 Access specifiers

[class.access.spec]

- 1 Member declarations can be labeled by an *access-specifier* (Clause 13):

access-specifier : *member-specification*_{opt}

An *access-specifier* specifies the access rules for members following it until the end of the class or until another *access-specifier* is encountered. [*Example*:

```

class X {
    int a;          // X::a is private by default: class used
public:
    int b;          // X::b is public
    int c;          // X::c is public
};

```

— *end example*]

- 2 Any number of access specifiers is allowed and no particular order is required. [*Example*:

```

struct S {
    int a;          // S::a is public by default: struct used
protected:
    int b;          // S::b is protected
private:
    int c;          // S::c is private
};

```

```
public:
  int d;           // S::d is public
};
```

— end example]

³ [Note: The effect of access control on the order of allocation of data members is described in 12.2. — end note]

⁴ When a member is redeclared within its class definition, the access specified at its redeclaration shall be the same as at its initial declaration. [Example:

```
struct S {
  class A;
  enum E : int;
private:
  class A { };           // error: cannot change access
  enum E: int { e0 };   // error: cannot change access
};
```

— end example]

⁵ [Note: In a derived class, the lookup of a base class name will find the injected-class-name instead of the name of the base class in the scope in which it was declared. The injected-class-name might be less accessible than the name of the base class in the scope in which it was declared. — end note]

[Example:

```
class A { };
class B : private A { };
class C : public B {
  A* p;           // error: injected-class-name A is inaccessible
  ::A* q;         // OK
};
```

— end example]

14.2 Accessibility of base classes and base class members [class.access.base]

¹ If a class is declared to be a base class (Clause 13) for another class using the **public** access specifier, the public members of the base class are accessible as public members of the derived class and protected members of the base class are accessible as protected members of the derived class. If a class is declared to be a base class for another class using the **protected** access specifier, the public and protected members of the base class are accessible as protected members of the derived class. If a class is declared to be a base class for another class using the **private** access specifier, the public and protected members of the base class are accessible as private members of the derived class.¹¹³

² In the absence of an *access-specifier* for a base class, **public** is assumed when the derived class is defined with the *class-key* **struct** and **private** is assumed when the class is defined with the *class-key* **class**. [Example:

```
class B { /* ... */ };
class D1 : private B { /* ... */ };
class D2 : public B { /* ... */ };
class D3 : B { /* ... */ };           // B private by default
struct D4 : public B { /* ... */ };
struct D5 : private B { /* ... */ };
struct D6 : B { /* ... */ };         // B public by default
class D7 : protected B { /* ... */ };
struct D8 : protected B { /* ... */ };
```

Here B is a public base of D2, D4, and D6, a private base of D1, D3, and D5, and a protected base of D7 and D8. — end example]

³ [Note: A member of a private base class might be inaccessible as an inherited member name, but accessible directly. Because of the rules on pointer conversions (7.11) and explicit casts (8.5.3), a conversion from a pointer to a derived class to a pointer to an inaccessible base class might be ill-formed if an implicit conversion is used, but well-formed if an explicit cast is used. For example,

¹¹³) As specified previously in Clause 14, private members of a base class remain inaccessible even to derived classes unless friend declarations within the base class definition are used to grant access explicitly.


```

class B {
public:
    int mi;                // non-static member
    static int si;        // static member
};
class D : private B {
};
class DD : public D {
    void f();
};

void DD::f() {
    mi = 3;                // error: mi is private in D
    si = 3;                // error: si is private in D
    ::B b;
    b.mi = 3;             // OK (b.mi is different from this->mi)
    b.si = 3;             // OK (b.si is different from this->si)
    ::B::si = 3;          // OK
    ::B* bp1 = this;      // error: B is a private base class
    ::B* bp2 = (::B*)this; // OK with cast
    bp2->mi = 3;          // OK: access through a pointer to B.
}

```

— end note]

⁴ A base class B of N is *accessible* at R, if

- (4.1) — an invented public member of B would be a public member of N, or
- (4.2) — R occurs in a member or friend of class N, and an invented public member of B would be a private or protected member of N, or
- (4.3) — R occurs in a member or friend of a class P derived from N, and an invented public member of B would be a private or protected member of P, or
- (4.4) — there exists a class S such that B is a base class of S accessible at R and S is a base class of N accessible at R.

[*Example:*

```

class B {
public:
    int m;
};

class S: private B {
    friend class N;
};

class N: private S {
    void f() {
        B* p = this;    // OK because class S satisfies the fourth condition above: B is a base class of N
                        // accessible in f() because B is an accessible base class of S and S is an accessible
                        // base class of N.
    }
};

```

— end example]

- ⁵ If a base class is accessible, one can implicitly convert a pointer to a derived class to a pointer to that base class (7.11, 7.12). [Note: It follows that members and friends of a class X can implicitly convert an X* to a pointer to a private or protected immediate base class of X. — end note] The access to a member is affected by the class in which the member is named. This naming class is the class in which the member name was looked up and found. [Note: This class can be explicit, e.g., when a *qualified-id* is used, or implicit, e.g., when a class member access operator (8.5.1.5) is used (including cases where an implicit “`this->`” is added). If both a class member access operator and a *qualified-id* are used to name the member (as in `p->T:m`), the class naming the member is the class denoted by the *nested-name-specifier* of the *qualified-id* (that is, T). — end note] A member m is accessible at the point R when named in class N if

- (5.1) — *m* as a member of *N* is public, or
- (5.2) — *m* as a member of *N* is private, and *R* occurs in a member or friend of class *N*, or
- (5.3) — *m* as a member of *N* is protected, and *R* occurs in a member or friend of class *N*, or in a member of a class *P* derived from *N*, where *m* as a member of *P* is public, private, or protected, or
- (5.4) — there exists a base class *B* of *N* that is accessible at *R*, and *m* is accessible at *R* when named in class *B*.

[*Example*:

```
class B;
class A {
private:
    int i;
    friend void f(B*);
};
class B : public A { };
void f(B* p) {
    p->i = 1;          // OK: B* can be implicitly converted to A*, and f has access to i in A
}
```

— *end example*]

- ⁶ If a class member access operator, including an implicit “**this->**”, is used to access a non-static data member or non-static member function, the reference is ill-formed if the left operand (considered as a pointer in the “.” operator case) cannot be implicitly converted to a pointer to the naming class of the right operand. [*Note*: This requirement is in addition to the requirement that the member be accessible as named. — *end note*]

14.3 Friends

[**class.friend**]

- ¹ A friend of a class is a function or class that is given permission to use the private and protected member names from the class. A class specifies its friends, if any, by way of friend declarations. Such declarations give special access rights to the friends, but they do not make the nominated friends members of the befriending class. [*Example*: The following example illustrates the differences between members and friends:

```
class X {
    int a;
    friend void friend_set(X*, int);
public:
    void member_set(int);
};

void friend_set(X* p, int i) { p->a = i; }
void X::member_set(int i) { a = i; }

void f() {
    X obj;
    friend_set(&obj, 10);
    obj.member_set(10);
}
```

— *end example*]

- ² Declaring a class to be a friend implies that the names of private and protected members from the class granting friendship can be accessed in the *base-specifiers* and member declarations of the befriended class. [*Example*:

```
class A {
    class B { };
    friend class X;
};

struct X : A::B {          // OK: A::B accessible to friend
    A::B mx;              // OK: A::B accessible to member of friend
    class Y {
        A::B my;         // OK: A::B accessible to nested member of friend
    };
};
```

— end example] [Example:

```
class X {
    enum { a=100 };
    friend class Y;
};

class Y {
    int v[X::a];           // OK, Y is a friend of X
};

class Z {
    int v[X::a];           // error: X::a is private
};
```

— end example]

A class shall not be defined in a friend declaration. [Example:

```
class A {
    friend class B { };     // error: cannot define class in friend declaration
};
```

— end example]

- ³ A friend declaration that does not declare a function shall have one of the following forms:

```
friend elaborated-type-specifier ;
friend simple-type-specifier ;
friend typename-specifier ;
```

[Note: A friend declaration may be the *declaration* in a *template-declaration* (Clause 17, 17.6.4). — end note]

If the type specifier in a friend declaration designates a (possibly cv-qualified) class type, that class is declared as a friend; otherwise, the friend declaration is ignored. [Example:

```
class C;
typedef C Ct;

class X1 {
    friend C;               // OK: class C is a friend
};

class X2 {
    friend Ct;              // OK: class C is a friend
    friend D;               // error: no type-name D in scope
    friend class D;         // OK: elaborated-type-specifier declares new class
};

template <typename T> class R {
    friend T;
};

R<C> rc;                    // class C is a friend of R<C>
R<int> Ri;                   // OK: "friend int;" is ignored
```

— end example]

- ⁴ A function first declared in a friend declaration has the linkage of the namespace of which it is a member (6.5). Otherwise, the function retains its previous linkage (10.1.1).

- ⁵ When a friend declaration refers to an overloaded name or operator, only the function specified by the parameter types becomes a friend. A member function of a class X can be a friend of a class Y. [Example:

```
class Y {
    friend char* X::foo(int);
    friend X::X(char);      // constructors can be friends
    friend X::~~X();        // destructors can be friends
};
```

— end example]

- 6 A function can be defined in a friend declaration of a class if and only if the class is a non-local class (12.4), the function name is unqualified, and the function has namespace scope. [Example:

```
class M {
    friend void f() { }           // definition of global f, a friend of M,
                                // not the definition of a member function
};
```

— end example]

- 7 Such a function is implicitly an inline function (10.1.6). A friend function defined in a class is in the (lexical) scope of the class in which it is defined. A friend function defined outside the class is not (6.4.1).

- 8 No *storage-class-specifier* shall appear in the *decl-specifier-seq* of a friend declaration.

- 9 A name nominated by a friend declaration shall be accessible in the scope of the class containing the friend declaration. The meaning of the friend declaration is the same whether the friend declaration appears in the private, protected, or public (12.2) portion of the class *member-specification*.

- 10 Friendship is neither inherited nor transitive. [Example:

```
class A {
    friend class B;
    int a;
};

class B {
    friend class C;
};

class C {
    void f(A* p) {
        p->a++;           // error: C is not a friend of A despite being a friend of a friend
    }
};

class D : public B {
    void f(A* p) {
        p->a++;           // error: D is not a friend of A despite being derived from a friend
    }
};
```

— end example]

- 11 If a friend declaration appears in a local class (12.4) and the name specified is an unqualified name, a prior declaration is looked up without considering scopes that are outside the innermost enclosing non-class scope. For a friend function declaration, if there is no prior declaration, the program is ill-formed. For a friend class declaration, if there is no prior declaration, the class that is specified belongs to the innermost enclosing non-class scope, but if it is subsequently referenced, its name is not found by name lookup until a matching declaration is provided in the innermost enclosing non-class scope. [Example:

```
class X;
void a();
void f() {
    class Y;
    extern void b();
    class A {
        friend class X;   // OK, but X is a local class, not ::X
        friend class Y;   // OK
        friend class Z;   // OK, introduces local class Z
        friend void a();  // error, ::a is not considered
        friend void b();  // OK
        friend void c();  // error
    };
    X* px;                // OK, but ::X is found
    Z* pz;                // error, no Z is found
};
```

— end example]

14.4 Protected member access [class.protected]

- ¹ An additional access check beyond those described earlier in [Clause 14](#) is applied when a non-static data member or non-static member function is a protected member of its naming class ([14.2](#)).¹¹⁴ As described earlier, access to a protected member is granted because the reference occurs in a friend or member of some class C. If the access is to form a pointer to member ([8.5.2.1](#)), the *nested-name-specifier* shall denote C or a class derived from C. All other accesses involve a (possibly implicit) object expression ([8.5.1.5](#)). In this case, the class of the object expression shall be C or a class derived from C. [*Example*:

```
class B {
protected:
    int i;
    static int j;
};

class D1 : public B {
};

class D2 : public B {
    friend void fr(B*,D1*,D2*);
    void mem(B*,D1*);
};

void fr(B* pb, D1* p1, D2* p2) {
    pb->i = 1;           // ill-formed
    p1->i = 2;           // ill-formed
    p2->i = 3;           // OK (access through a D2)
    p2->B::i = 4;        // OK (access through a D2, even though naming class is B)
    int B::* pmi_B = &B::i; // ill-formed
    int B::* pmi_B2 = &D2::i; // OK (type of &D2::i is int B::*)
    B::j = 5;           // ill-formed (not a friend of naming class B)
    D2::j = 6;          // OK (because refers to static member)
}

void D2::mem(B* pb, D1* p1) {
    pb->i = 1;           // ill-formed
    p1->i = 2;           // ill-formed
    i = 3;              // OK (access through this)
    B::i = 4;           // OK (access through this, qualification ignored)
    int B::* pmi_B = &B::i; // ill-formed
    int B::* pmi_B2 = &D2::i; // OK
    j = 5;              // OK (because j refers to static member)
    B::j = 6;           // OK (because B::j refers to static member)
}

void g(B* pb, D1* p1, D2* p2) {
    pb->i = 1;           // ill-formed
    p1->i = 2;           // ill-formed
    p2->i = 3;           // ill-formed
}

```

— *end example*]

14.5 Access to virtual functions [class.access.virt]

- ¹ The access rules ([Clause 14](#)) for a virtual function are determined by its declaration and are not affected by the rules for a function that later overrides it. [*Example*:

```
class B {
public:
    virtual int f();
};

```

¹¹⁴) This additional check does not apply to other members, e.g., static data members or enumerator member constants.

```

class D : public B {
private:
    int f();
};

void f() {
    D d;
    B* pb = &d;
    D* pd = &d;

    pb->f();           // OK: B::f() is public, D::f() is invoked
    pd->f();           // error: D::f() is private
}

```

— end example]

- ² Access is checked at the call point using the type of the expression used to denote the object for which the member function is called (B* in the example above). The access of the member function in the class in which it was defined (D in the example above) is in general not known.

14.6 Multiple access

[class.paths]

- ¹ If a name can be reached by several paths through a multiple inheritance graph, the access is that of the path that gives most access. [Example:

```

class W { public: void f(); };
class A : private virtual W { };
class B : public virtual W { };
class C : public A, public B {
    void f() { W::f(); } // OK
};

```

Since W::f() is available to C::f() along the public path through B, access is allowed. — end example]

14.7 Nested classes

[class.access.nest]

- ¹ A nested class is a member and as such has the same access rights as any other member. The members of an enclosing class have no special access to members of a nested class; the usual access rules (Clause 14) shall be obeyed. [Example:

```

class E {
    int x;
    class B { };

    class I {
        B b; // OK: E::I can access E::B
        int y;
        void f(E* p, int i) {
            p->x = i; // OK: E::I can access E::x
        }
    };

    int g(I* p) {
        return p->y; // error: I::y is private
    }
};

```

— end example]

15 Special member functions [special]

- 1 The default constructor (15.1), copy constructor and copy assignment operator (15.8), move constructor and move assignment operator (15.8), and destructor (15.4) are *special member functions*. [Note: The implementation will implicitly declare these member functions for some class types when the program does not explicitly declare them. The implementation will implicitly define them if they are odr-used (6.2) or needed for constant evaluation (8.6). See 15.1, 15.4 and 15.8. — end note] An implicitly-declared special member function is declared at the closing } of the *class-specifier*. Programs shall not define implicitly-declared special member functions.
- 2 Programs may explicitly refer to implicitly-declared special member functions. [Example: A program may explicitly call or form a pointer to member to an implicitly-declared special member function.

```

struct A { };                // implicitly declared A::operator=
struct B : A {
    B& operator=(const B &);
};
B& B::operator=(const B& s) {
    this->A::operator=(s);    // well-formed
    return *this;
}

```

— end example]

- 3 [Note: The special member functions affect the way objects of class type are created, copied, moved, and destroyed, and how values can be converted to values of other types. Often such special member functions are called implicitly. — end note]
- 4 Special member functions obey the usual access rules (Clause 14). [Example: Declaring a constructor protected ensures that only derived classes and friends can create objects using it. — end example]
- 5 For a class, its non-static data members, its non-virtual direct base classes, and, if the class is not abstract (13.4), its virtual base classes are called its *potentially constructed subobjects*.

15.1 Constructors [class.ctor]

- 1 Constructors do not have names. In a declaration of a constructor, the *declarator* is a function declarator (11.3.5) of the form

ptr-declarator (*parameter-declaration-clause*) *noexcept-specifier_{opt}* *attribute-specifier-seq_{opt}*

where the *ptr-declarator* consists solely of an *id-expression*, an optional *attribute-specifier-seq*, and optional surrounding parentheses, and the *id-expression* has one of the following forms:

- (1.1) — in a *member-declaration* that belongs to the *member-specification* of a class or class template but is not a friend declaration (14.3), the *id-expression* is the injected-class-name (Clause 12) of the immediately-enclosing entity or
- (1.2) — in a declaration at namespace scope or in a friend declaration, the *id-expression* is a *qualified-id* that names a constructor (6.4.3.1).

The *class-name* shall not be a *typedef-name*. In a constructor declaration, each *decl-specifier* in the optional *decl-specifier-seq* shall be **friend**, **inline**, **constexpr**, or an *explicit-specifier*. [Example:

```

struct S {
    S();                // declares the constructor
};

S::S() { }             // defines the constructor

```

— end example]

- 2 A constructor is used to initialize objects of its class type. Because constructors do not have names, they are never found during name lookup; however an explicit type conversion using the functional notation (8.5.1.3) will cause a constructor to be called to initialize an object. [Note: For initialization of objects of class type see 15.6. — end note]

- ³ A constructor can be invoked for a `const`, `volatile` or `const volatile` object. `const` and `volatile` semantics (10.1.7.1) are not applied on an object under construction. They come into effect when the constructor for the most derived object (6.6.2) ends.
- ⁴ A *default* constructor for a class `X` is a constructor of class `X` for which each parameter that is not a function parameter pack has a default argument (including the case of a constructor with no parameters). If there is no user-declared constructor for class `X`, a non-explicit constructor having no parameters is implicitly declared as defaulted (11.4). An implicitly-declared default constructor is an inline public member of its class.
- ⁵ A defaulted default constructor for class `X` is defined as deleted if:
- (5.1) — `X` is a union that has a variant member with a non-trivial default constructor and no variant member of `X` has a default member initializer,
 - (5.2) — `X` is a non-union class that has a variant member `M` with a non-trivial default constructor and no variant member of the anonymous union containing `M` has a default member initializer,
 - (5.3) — any non-static data member with no default member initializer (12.2) is of reference type,
 - (5.4) — any non-variant non-static data member of `const`-qualified type (or array thereof) with no *brace-or-equal-initializer* does not have a user-provided default constructor,
 - (5.5) — `X` is a union and all of its variant members are of `const`-qualified type (or array thereof),
 - (5.6) — `X` is a non-union class and all members of any anonymous union member are of `const`-qualified type (or array thereof),
 - (5.7) — any potentially constructed subobject, except for a non-static data member with a *brace-or-equal-initializer*, has class type `M` (or array thereof) and either `M` has no default constructor or overload resolution (16.3) as applied to find `M`'s corresponding constructor results in an ambiguity or in a function that is deleted or inaccessible from the defaulted default constructor, or
 - (5.8) — any potentially constructed subobject has a type with a destructor that is deleted or inaccessible from the defaulted default constructor.
- ⁶ A default constructor is *trivial* if it is not user-provided and if:
- (6.1) — its class has no virtual functions (13.3) and no virtual base classes (13.1), and
 - (6.2) — no non-static data member of its class has a default member initializer (12.2), and
 - (6.3) — all the direct base classes of its class have trivial default constructors, and
 - (6.4) — for all the non-static data members of its class that are of class type (or array thereof), each such class has a trivial default constructor.

Otherwise, the default constructor is *non-trivial*.

- ⁷ A default constructor that is defaulted and not defined as deleted is *implicitly defined* when it is odr-used (6.2) to create an object of its class type (6.6.2), when it is needed for constant evaluation (8.6), or when it is explicitly defaulted after its first declaration. The implicitly-defined default constructor performs the set of initializations of the class that would be performed by a user-written default constructor for that class with no *ctor-initializer* (15.6.2) and an empty *compound-statement*. If that user-written default constructor would be ill-formed, the program is ill-formed. If that user-written default constructor would satisfy the requirements of a `constexpr` constructor (10.1.5), the implicitly-defined default constructor is `constexpr`. Before the defaulted default constructor for a class is implicitly defined, all the non-user-provided default constructors for its base classes and its non-static data members shall have been implicitly defined. [*Note*: An implicitly-declared default constructor has an exception specification (18.4). An explicitly-defaulted definition might have an implicit exception specification, see 11.4. — *end note*]
- ⁸ Default constructors are called implicitly to create class objects of static, thread, or automatic storage duration (6.6.4.1, 6.6.4.2, 6.6.4.3) defined without an initializer (11.6), are called to create class objects of dynamic storage duration (6.6.4.4) created by a *new-expression* in which the *new-initializer* is omitted (8.5.2.4), or are called when the explicit type conversion syntax (8.5.1.3) is used. A program is ill-formed if the default constructor for an object is implicitly used and the constructor is not accessible (Clause 14).
- ⁹ [*Note*: 15.6.2 describes the order in which constructors for base classes and non-static data members are called and describes how arguments can be specified for the calls to these constructors. — *end note*]
- ¹⁰ A `return` statement in the body of a constructor shall not specify a return value. The address of a constructor shall not be taken.

- 11 A functional notation type conversion (8.5.1.3) can be used to create new objects of its type. [*Note*: The syntax looks like an explicit call of the constructor. — *end note*] [*Example*:

```
complex zz = complex(1,2.3);
cprint( complex(7.8,1.2) );
```

— *end example*]

- 12 An object created in this way is unnamed. [*Note*: 15.2 describes the lifetime of temporary objects. — *end note*] [*Note*: Explicit constructor calls do not yield lvalues, see 8.2.1. — *end note*]

- 13 [*Note*: Some language constructs have special semantics when used during construction; see 15.6.2 and 15.7. — *end note*]

- 14 During the construction of an object, if the value of the object or any of its subobjects is accessed through a glvalue that is not obtained, directly or indirectly, from the constructor's `this` pointer, the value of the object or subobject thus obtained is unspecified. [*Example*:

```
struct C;
void no_opt(C*);

struct C {
    int c;
    C() : c(0) { no_opt(this); }
};

const C cobj;

void no_opt(C* cptr) {
    int i = cobj.c * 100;           // value of cobj.c is unspecified
    cptr->c = 1;
    cout << cobj.c * 100          // value of cobj.c is unspecified
         << '\n';
}

extern struct D d;
struct D {
    D(int a) : a(a), b(d.a) {}
    int a, b;
};
D d = D(1);                       // value of d.b is unspecified
```

— *end example*]

15.2 Temporary objects

[**class.temporary**]

- ¹ Temporary objects are created

- (1.1) — when a prvalue is materialized so that it can be used as a glvalue (7.4),
- (1.2) — when needed by the implementation to pass or return an object of trivially-copyable type (see below), and
- (1.3) — when throwing an exception (18.1). [*Note*: The lifetime of exception objects is described in 18.1. — *end note*]

Even when the creation of the temporary object is unevaluated (8.2), all the semantic restrictions shall be respected as if the temporary object had been created and later destroyed. [*Note*: This includes accessibility (Clause 14) and whether it is deleted, for the constructor selected and for the destructor. However, in the special case of the operand of a *decltype-specifier* (8.5.1.2), no temporary is introduced, so the foreground does not apply to such a prvalue. — *end note*]

- ² The materialization of a temporary object is generally delayed as long as possible in order to avoid creating unnecessary temporary objects. [*Note*: Temporary objects are materialized:

- (2.1) — when binding a reference to a prvalue (11.6.3, 8.5.1.3, 8.5.1.7, 8.5.1.9, 8.5.1.11, 8.5.3),
- (2.2) — when performing member access on a class prvalue (8.5.1.5, 8.5.4),
- (2.3) — when performing an array-to-pointer conversion or subscripting on an array prvalue (7.2, 8.5.1.1),
- (2.4) — when initializing an object of type `std::initializer_list<T>` from a *braced-init-list* (11.6.4),

- (2.5) — for certain unevaluated operands (8.5.1.8, 8.5.2.3), and
- (2.6) — when a prvalue appears as a discarded-value expression (8.2).

— *end note*] [*Example*: Consider the following code:

```
class X {
public:
    X(int);
    X(const X&);
    X& operator=(const X&);
    ~X();
};

class Y {
public:
    Y(int);
    Y(Y&&);
    ~Y();
};

X f(X);
Y g(Y);

void h() {
    X a(1);
    X b = f(X(2));
    Y c = g(Y(3));
    a = f(a);
}
```

`X(2)` is constructed in the space used to hold `f()`'s argument and `Y(3)` is constructed in the space used to hold `g()`'s argument. Likewise, `f()`'s result is constructed directly in `b` and `g()`'s result is constructed directly in `c`. On the other hand, the expression `a = f(a)` requires a temporary for the result of `f(a)`, which is materialized so that the reference parameter of `A::operator=(const A&)` can bind to it. — *end example*]

- 3 When an object of class type `X` is passed to or returned from a function, if each copy constructor, move constructor, and destructor of `X` is either trivial or deleted, and `X` has at least one non-deleted copy or move constructor, implementations are permitted to create a temporary object to hold the function parameter or result object. The temporary object is constructed from the function argument or return value, respectively, and the function's parameter or return object is initialized as if by using the non-deleted trivial constructor to copy the temporary (even if that constructor is inaccessible or would not be selected by overload resolution to perform a copy or move of the object). [*Note*: This latitude is granted to allow objects of class type to be passed to or returned from functions in registers. — *end note*]
- 4 When an implementation introduces a temporary object of a class that has a non-trivial constructor (15.1, 15.8), it shall ensure that a constructor is called for the temporary object. Similarly, the destructor shall be called for a temporary with a non-trivial destructor (15.4). Temporary objects are destroyed as the last step in evaluating the full-expression (6.8.1) that (lexically) contains the point where they were created. This is true even if that evaluation ends in throwing an exception. The value computations and side effects of destroying a temporary object are associated only with the full-expression, not with any specific subexpression.
- 5 There are three contexts in which temporaries are destroyed at a different point than the end of the full-expression. The first context is when a default constructor is called to initialize an element of an array with no corresponding initializer (11.6). The second context is when a copy constructor is called to copy an element of an array while the entire array is copied (8.4.5.2, 15.8). In either case, if the constructor has one or more default arguments, the destruction of every temporary created in a default argument is sequenced before the construction of the next array element, if any.
- 6 The third context is when a reference is bound to a temporary object.¹¹⁵ The temporary object to which the reference is bound or the temporary object that is the complete object of a subobject to which the reference is bound persists for the lifetime of the reference if the glvalue to which the reference is bound was obtained through one of the following:
- (6.1) — a temporary materialization conversion (7.4),

¹¹⁵ The same rules apply to initialization of an `initializer_list` object (11.6.4) with its underlying temporary array.

- (6.2) — (*expression*), where *expression* is one of these expressions,
- (6.3) — subscripting (8.5.1.1) of an array operand, where that operand is one of these expressions,
- (6.4) — a class member access (8.5.1.5) using the . operator where the left operand is one of these expressions and the right operand designates a non-static data member of non-reference type,
- (6.5) — a pointer-to-member operation (8.5.4) using the .* operator where the left operand is one of these expressions and the right operand is a pointer to data member of non-reference type,
- (6.6) — a
 - (6.6.1) — `const_cast` (8.5.1.11),
 - (6.6.2) — `static_cast` (8.5.1.9),
 - (6.6.3) — `dynamic_cast` (8.5.1.7), or
 - (6.6.4) — `reinterpret_cast` (8.5.1.10)
 converting, without a user-defined conversion, a glvalue operand that is one of these expressions to a glvalue that refers to the object designated by the operand, or to its complete object or a subobject thereof,
- (6.7) — a conditional expression (8.5.16) that is a glvalue where the second or third operand is one of these expressions, or
- (6.8) — a comma expression (8.5.19) that is a glvalue where the right operand is one of these expressions.

[*Example:*

```
template<typename T> using id = T;

int i = 1;
int&& a = id<int[3]>{1, 2, 3}[i];           // temporary array has same lifetime as a
const int& b = static_cast<const int&>(0); // temporary int has same lifetime as b
int&& c = cond ? id<int[3]>{1, 2, 3}[i] : static_cast<int&&>(0);
                                           // exactly one of the two temporaries is lifetime-extended
```

— *end example*] [Note: An explicit type conversion (8.5.1.3, 8.5.3) is interpreted as a sequence of elementary casts, covered above. [*Example:*

```
const int& x = (const int&)1; // temporary for value 1 has same lifetime as x
```

— *end example*] — *end note*] [Note: If a temporary object has a reference member initialized by another temporary object, lifetime extension applies recursively to such a member's initializer. [*Example:*

```
struct S {
    const int& m;
};
const S& s = S{1};           // both S and int temporaries have lifetime of s
```

— *end example*] — *end note*]

The exceptions to this lifetime rule are:

- (6.9) — A temporary object bound to a reference parameter in a function call (8.5.1.2) persists until the completion of the full-expression containing the call.
- (6.10) — The lifetime of a temporary bound to the returned value in a function `return` statement (9.6.3) is not extended; the temporary is destroyed at the end of the full-expression in the `return` statement.
- (6.11) — A temporary bound to a reference in a *new-initializer* (8.5.2.4) persists until the completion of the full-expression containing the *new-initializer*. [Note: This may introduce a dangling reference. — *end note*] [*Example:*

```
struct S { int mi; const std::pair<int,int>& mp; };
S a { 1, {2,3} };
S* p = new S{ 1, {2,3} };           // creates dangling reference
— end example]
```

- ⁷ The destruction of a temporary whose lifetime is not extended by being bound to a reference is sequenced before the destruction of every temporary which is constructed earlier in the same full-expression. If the lifetime of two or more temporaries to which references are bound ends at the same point, these temporaries are destroyed at that point in the reverse order of the completion of their construction. In addition, the

destruction of temporaries bound to references shall take into account the ordering of destruction of objects with static, thread, or automatic storage duration (6.6.4.1, 6.6.4.2, 6.6.4.3); that is, if `obj1` is an object with the same storage duration as the temporary and created before the temporary is created the temporary shall be destroyed before `obj1` is destroyed; if `obj2` is an object with the same storage duration as the temporary and created after the temporary is created the temporary shall be destroyed after `obj2` is destroyed.

8 [Example:

```
struct S {
    S();
    S(int);
    friend S operator+(const S&, const S&);
    ~S();
};
S obj1;
const S& cr = S(16)+S(23);
S obj2;
```

The expression `S(16) + S(23)` creates three temporaries: a first temporary T1 to hold the result of the expression `S(16)`, a second temporary T2 to hold the result of the expression `S(23)`, and a third temporary T3 to hold the result of the addition of these two expressions. The temporary T3 is then bound to the reference `cr`. It is unspecified whether T1 or T2 is created first. On an implementation where T1 is created before T2, T2 shall be destroyed before T1. The temporaries T1 and T2 are bound to the reference parameters of `operator+`; these temporaries are destroyed at the end of the full-expression containing the call to `operator+`. The temporary T3 bound to the reference `cr` is destroyed at the end of `cr`'s lifetime, that is, at the end of the program. In addition, the order in which T3 is destroyed takes into account the destruction order of other objects with static storage duration. That is, because `obj1` is constructed before T3, and T3 is constructed before `obj2`, `obj2` shall be destroyed before T3, and T3 shall be destroyed before `obj1`. — end example]

15.3 Conversions

[class.conv]

- 1 Type conversions of class objects can be specified by constructors and by conversion functions. These conversions are called *user-defined conversions* and are used for implicit type conversions (Clause 7), for initialization (11.6), and for explicit type conversions (8.5.3, 8.5.1.9).
- 2 User-defined conversions are applied only where they are unambiguous (13.2, 15.3.2). Conversions obey the access control rules (Clause 14). Access control is applied after ambiguity resolution (6.4).
- 3 [Note: See 16.3 for a discussion of the use of conversions in function calls as well as examples below. — end note]
- 4 At most one user-defined conversion (constructor or conversion function) is implicitly applied to a single value. [Example:

```
struct X {
    operator int();
};

struct Y {
    operator X();
};

Y a;
int b = a;           // error, a.operator X().operator int() not tried
int c = X(a);       // OK: a.operator X().operator int()
```

— end example]

- 5 User-defined conversions are used implicitly only if they are unambiguous. A conversion function in a derived class does not hide a conversion function in a base class unless the two functions convert to the same type. Function overload resolution (16.3.3) selects the best conversion function to perform the conversion. [Example:

```
struct X {
    operator int();
};
```

```

struct Y : X {
    operator char();
};

void f(Y& a) {
    if (a) {          // ill-formed: X::operator int() or Y::operator char()
    }
}

```

— end example]

15.3.1 Conversion by constructor

[class.conv.ctor]

- ¹ A constructor that is not explicit (10.1.2) specifies a conversion from the types of its parameters (if any) to the type of its class. Such a constructor is called a *converting constructor*. [Example:

```

struct X {
    X(int);
    X(const char*, int =0);
    X(int, int);
};

void f(X arg) {
    X a = 1;          // a = X(1)
    X b = "Jessie";  // b = X("Jessie",0)
    a = 2;           // a = X(2)
    f(3);            // f(X(3))
    f({1, 2});       // f(X(1,2))
}

```

— end example]

- ² [Note: An explicit constructor constructs objects just like non-explicit constructors, but does so only where the direct-initialization syntax (11.6) or where casts (8.5.1.9, 8.5.3) are explicitly used; see also 16.3.1.4. A default constructor may be an explicit constructor; such a constructor will be used to perform default-initialization or value-initialization (11.6). [Example:

```

struct Z {
    explicit Z();
    explicit Z(int);
    explicit Z(int, int);
};

Z a;          // OK: default-initialization performed
Z b{};        // OK: direct initialization syntax used
Z c = {};     // error: copy-list-initialization
Z a1 = 1;     // error: no implicit conversion
Z a3 = Z(1);  // OK: direct initialization syntax used
Z a2(1);      // OK: direct initialization syntax used
Z* p = new Z(1); // OK: direct initialization syntax used
Z a4 = (Z)1;  // OK: explicit cast used
Z a5 = static_cast<Z>(1); // OK: explicit cast used
Z a6 = { 3, 4 }; // error: no implicit conversion

```

— end example] — end note]

- ³ A non-explicit copy/move constructor (15.8) is a converting constructor. [Note: An implicitly-declared copy/move constructor is not an explicit constructor; it may be called for implicit type conversions. — end note]

15.3.2 Conversion functions

[class.conv.fct]

- ¹ A member function of a class X having no parameters with a name of the form

```

conversion-function-id:
    operator conversion-type-id

conversion-type-id:
    type-specifier-seq conversion-declaratoropt

```

conversion-declarator:
ptr-operator conversion-declarator_{opt}

specifies a conversion from **X** to the type specified by the *conversion-type-id*. Such functions are called *conversion functions*. A *decl-specifier* in the *decl-specifier-seq* of a conversion function (if any) shall be neither a *defining-type-specifier* nor **static**. The type of the conversion function (11.3.5) is “function taking no parameter returning *conversion-type-id*”. A conversion function is never used to convert a (possibly cv-qualified) object to the (possibly cv-qualified) same object type (or a reference to it), to a (possibly cv-qualified) base class of that type (or a reference to it), or to (possibly cv-qualified) void.¹¹⁶ [Example:

```
struct X {
    operator int();
    operator auto() -> short;    // error: trailing return type
};

void f(X a) {
    int i = int(a);
    i = (int)a;
    i = a;
}
```

In all three cases the value assigned will be converted by **X::operator int()**. — end example]

- ² A conversion function may be explicit (10.1.2), in which case it is only considered as a user-defined conversion for direct-initialization (11.6). Otherwise, user-defined conversions are not restricted to use in assignments and initializations. [Example:

```
class Y { };
struct Z {
    explicit operator Y() const;
};

void h(Z z) {
    Y y1(z);           // OK: direct-initialization
    Y y2 = z;         // ill-formed: copy-initialization
    Y y3 = (Y)z;      // OK: cast notation
}

void g(X a, X b) {
    int i = (a) ? 1+a : 0;
    int j = (a&&b) ? a+b : i;
    if (a) {
    }
}
```

— end example]

- ³ The *conversion-type-id* shall not represent a function type nor an array type. The *conversion-type-id* in a *conversion-function-id* is the longest sequence of tokens that could possibly form a *conversion-type-id*. [Note: This prevents ambiguities between the declarator operator ***** and its expression counterparts. [Example:

```
&ac.operator int*i; // syntax error:
                   // parsed as: &(ac.operator int *)i
                   // not as: &(ac.operator int)*i
```

The ***** is the pointer declarator and not the multiplication operator. — end example] This rule also prevents ambiguities for attributes. [Example:

```
operator int [[noreturn]] (); // error: noreturn attribute applied to a type
```

— end example] — end note]

- ⁴ Conversion functions are inherited.
⁵ Conversion functions can be virtual.

¹¹⁶ These conversions are considered as standard conversions for the purposes of overload resolution (16.3.3.1, 16.3.3.1.4) and therefore initialization (11.6) and explicit casts (8.5.1.9). A conversion to **void** does not invoke any conversion function (8.5.1.9). Even though never directly called to perform a conversion, such conversion functions can be declared and can potentially be reached through a call to a virtual conversion function in a base class.

- ⁶ A conversion function template shall not have a deduced return type (10.1.7.4). [Example:

```
struct S {
    operator auto() const { return 10; }    // OK
    template<class T>
    operator auto() const { return 1.2; }    // error: conversion function template
};
```

— end example]

15.4 Destructors

[class.dtor]

- ¹ In a declaration of a destructor, the *declarator* is a function declarator (11.3.5) of the form

ptr-declarator (*parameter-declaration-clause*) *noexcept-specifier_{opt}* *attribute-specifier-seq_{opt}*

where the *ptr-declarator* consists solely of an *id-expression*, an optional *attribute-specifier-seq*, and optional surrounding parentheses, and the *id-expression* has one of the following forms:

- (1.1) — in a *member-declaration* that belongs to the *member-specification* of a class or class template but is not a friend declaration (14.3), the *id-expression* is *~class-name* and the *class-name* is the injected-class-name (Clause 12) of the immediately-enclosing entity or
- (1.2) — in a declaration at namespace scope or in a friend declaration, the *id-expression* is *nested-name-specifier ~class-name* and the *class-name* names the same class as the *nested-name-specifier*.

The *class-name* shall not be a *typedef-name*. A destructor shall take no arguments (11.3.5). Each *decl-specifier* of the *decl-specifier-seq* of a destructor declaration (if any) shall be **friend**, **inline**, or **virtual**.

- ² A destructor is used to destroy objects of its class type. The address of a destructor shall not be taken. A destructor can be invoked for a **const**, **volatile** or **const volatile** object. **const** and **volatile** semantics (10.1.7.1) are not applied on an object under destruction. They stop being in effect when the destructor for the most derived object (6.6.2) starts.

- ³ [Note: A declaration of a destructor that does not have a *noexcept-specifier* has the same exception specification as if it had been implicitly declared (18.4). — end note]

- ⁴ If a class has no user-declared destructor, a destructor is implicitly declared as defaulted (11.4). An implicitly-declared destructor is an inline public member of its class.

- ⁵ A defaulted destructor for a class **X** is defined as deleted if:

- (5.1) — **X** is a union-like class that has a variant member with a non-trivial destructor,
- (5.2) — any potentially constructed subobject has class type **M** (or array thereof) and **M** has a deleted destructor or a destructor that is inaccessible from the defaulted destructor,
- (5.3) — or, for a virtual destructor, lookup of the non-array deallocation function results in an ambiguity or in a function that is deleted or inaccessible from the defaulted destructor.

- ⁶ A destructor is trivial if it is not user-provided and if:

- (6.1) — the destructor is not **virtual**,
- (6.2) — all of the direct base classes of its class have trivial destructors, and
- (6.3) — for all of the non-static data members of its class that are of class type (or array thereof), each such class has a trivial destructor.

Otherwise, the destructor is *non-trivial*.

- ⁷ A destructor that is defaulted and not defined as deleted is *implicitly defined* when it is odr-used (6.2) or when it is explicitly defaulted after its first declaration.

- ⁸ Before the defaulted destructor for a class is implicitly defined, all the non-user-provided destructors for its base classes and its non-static data members shall have been implicitly defined.

- ⁹ After executing the body of the destructor and destroying any automatic objects allocated within the body, a destructor for class **X** calls the destructors for **X**'s direct non-variant non-static data members, the destructors for **X**'s non-virtual direct base classes and, if **X** is the type of the most derived class (15.6.2), its destructor calls the destructors for **X**'s virtual base classes. All destructors are called as if they were referenced with a qualified name, that is, ignoring any possible virtual overriding destructors in more derived classes. Bases and members are destroyed in the reverse order of the completion of their constructor (see 15.6.2). A **return** statement (9.6.3) in a destructor might not directly return to the caller; before transferring control to the

caller, the destructors for the members and bases are called. Destructors for elements of an array are called in reverse order of their construction (see 15.6).

- 10 A destructor can be declared *virtual* (13.3) or pure *virtual* (13.4); if any objects of that class or any derived class are created in the program, the destructor shall be defined. If a class has a base class with a virtual destructor, its destructor (whether user- or implicitly-declared) is virtual.
- 11 [Note: Some language constructs have special semantics when used during destruction; see 15.7. — *end note*]
- 12 A destructor is invoked implicitly
- (12.1) — for a constructed object with static storage duration (6.6.4.1) at program termination (6.8.3.4),
 - (12.2) — for a constructed object with thread storage duration (6.6.4.2) at thread exit,
 - (12.3) — for a constructed object with automatic storage duration (6.6.4.3) when the block in which an object is created exits (9.7),
 - (12.4) — for a constructed temporary object when its lifetime ends (7.4, 15.2).

In each case, the context of the invocation is the context of the construction of the object. A destructor may also be invoked implicitly through use of a *delete-expression* (8.5.2.5) for a constructed object allocated by a *new-expression* (8.5.2.4); the context of the invocation is the *delete-expression*. [Note: An array of class type contains several subobjects for each of which the destructor is invoked. — *end note*] A destructor can also be invoked explicitly. A destructor is *potentially invoked* if it is invoked or as specified in 8.5.2.4, 11.6.1, 15.6.2, and 18.1. A program is ill-formed if a destructor that is potentially invoked is deleted or not accessible from the context of the invocation.

- 13 At the point of definition of a virtual destructor (including an implicit definition (15.8)), the non-array deallocation function is determined as if for the expression `delete this` appearing in a non-virtual destructor of the destructor's class (see 8.5.2.5). If the lookup fails or if the deallocation function has a deleted definition (11.4), the program is ill-formed. [Note: This assures that a deallocation function corresponding to the dynamic type of an object is available for the *delete-expression* (15.5). — *end note*]
- 14 In an explicit destructor call, the destructor is specified by a `~` followed by a *type-name* or *decltype-specifier* that denotes the destructor's class type. The invocation of a destructor is subject to the usual rules for member functions (12.2.1); that is, if the object is not of the destructor's class type and not of a class derived from the destructor's class type (including when the destructor is invoked via a null pointer value), the program has undefined behavior. [Note: Invoking `delete` on a null pointer does not call the destructor; see 8.5.2.5. — *end note*] [Example:

```

struct B {
    virtual ~B() { }
};
struct D : B {
    ~D() { }
};

D D_object;
typedef B B_alias;
B* B_ptr = &D_object;

void f() {
    D_object.B::~~B();           // calls B's destructor
    B_ptr->~B();                 // calls D's destructor
    B_ptr->~B_alias();           // calls D's destructor
    B_ptr->B_alias::~~B();       // calls B's destructor
    B_ptr->B_alias::~~B_alias(); // calls B's destructor
}

```

— *end example*] [Note: An explicit destructor call must always be written using a member access operator (8.5.1.5) or a *qualified-id* (8.4.4.2); in particular, the *unary-expression* `~X()` in a member function is not an explicit destructor call (8.5.2.1). — *end note*]

- 15 [Note: Explicit calls of destructors are rarely needed. One use of such calls is for objects placed at specific addresses using a placement *new-expression*. Such use of explicit placement and destruction of objects can be

necessary to cope with dedicated hardware resources and for writing memory management facilities. For example,

```
void* operator new(std::size_t, void* p) { return p; }
struct X {
    X(int);
    ~X();
};
void f(X* p);

void g() {
    char* buf = new char[sizeof(X)]; // rare, specialized use:
    X* p = new(buf) X(222);         // use buf[] and initialize
    f(p);
    p->X::~~X();                     // cleanup
}
```

— end note]

- ¹⁶ Once a destructor is invoked for an object, the object no longer exists; the behavior is undefined if the destructor is invoked for an object whose lifetime has ended (6.6.3). [Example: If the destructor for an automatic object is explicitly invoked, and the block is subsequently left in a manner that would ordinarily invoke implicit destruction of the object, the behavior is undefined. — end example]

- ¹⁷ [Note: The notation for explicit call of a destructor can be used for any scalar type name (8.5.1.4). Allowing this makes it possible to write code without having to know if a destructor exists for a given type. For example:

```
typedef int I;
I* p;
p->I::~~I();
```

— end note]

15.5 Free store

[class.free]

- ¹ Any allocation function for a class T is a static member (even if not explicitly declared `static`).

- ² [Example:

```
class Arena;
struct B {
    void* operator new(std::size_t, Arena*);
};
struct D1 : B {
};

Arena* ap;
void foo(int i) {
    new (ap) D1; // calls B::operator new(std::size_t, Arena*)
    new D1[i]; // calls ::operator new[] (std::size_t)
    new D1; // ill-formed: ::operator new(std::size_t) hidden
}
```

— end example]

- ³ When an object is deleted with a *delete-expression* (8.5.2.5), a deallocation function (`operator delete()` for non-array objects or `operator delete[]()` for arrays) is (implicitly) called to reclaim the storage occupied by the object (6.6.4.4.2).
- ⁴ Class-specific deallocation function lookup is a part of general deallocation function lookup (8.5.2.5) and occurs as follows. If the *delete-expression* is used to deallocate a class object whose static type has a virtual destructor, the deallocation function is the one selected at the point of definition of the dynamic type's virtual destructor (15.4).¹¹⁷ Otherwise, if the *delete-expression* is used to deallocate an object of class T or array thereof, the deallocation function's name is looked up in the scope of T. If this lookup fails to find the name, general deallocation function lookup (8.5.2.5) continues. If the result of the lookup is ambiguous or inaccessible, or if the lookup selects a placement deallocation function, the program is ill-formed.

¹¹⁷ A similar provision is not needed for the array version of `operator delete` because 8.5.2.5 requires that in this situation, the static type of the object to be deleted be the same as its dynamic type.

- ⁵ Any deallocation function for a class *X* is a static member (even if not explicitly declared `static`). [*Example:*

```
class X {
    void operator delete(void*);
    void operator delete[](void*, std::size_t);
};

class Y {
    void operator delete(void*, std::size_t);
    void operator delete[](void*);
};
```

— *end example*]

- ⁶ Since member allocation and deallocation functions are `static` they cannot be virtual. [*Note:* However, when the *cast-expression* of a *delete-expression* refers to an object of class type, because the deallocation function actually called is looked up in the scope of the class that is the dynamic type of the object if the destructor is virtual, the effect is the same in that case. For example,

```
struct B {
    virtual ~B();
    void operator delete(void*, std::size_t);
};

struct D : B {
    void operator delete(void*);
};

struct E : B {
    void log_deletion();
    void operator delete(E *p, std::destroying_delete_t) {
        p->log_deletion();
        p->~E();
        ::operator delete(p);
    }
};

void f() {
    B* bp = new D;
    delete bp;           // 1: uses D::operator delete(void*)
    bp = new E;
    delete bp;           // 2: uses E::operator delete(E*, std::destroying_delete_t)
}
```

Here, storage for the object of class *D* is deallocated by `D::operator delete()`, and the object of class *E* is destroyed and its storage is deallocated by `E::operator delete()`, due to the virtual destructor. — *end note*] [*Note:* Virtual destructors have no effect on the deallocation function actually called when the *cast-expression* of a *delete-expression* refers to an array of objects of class type. For example,

```
struct B {
    virtual ~B();
    void operator delete[](void*, std::size_t);
};

struct D : B {
    void operator delete[](void*, std::size_t);
};

void f(int i) {
    D* dp = new D[i];
    delete [] dp;       // uses D::operator delete[](void*, std::size_t)
    B* bp = new D[i];
    delete[] bp;       // undefined behavior
}
```

— *end note*]

- ⁷ Access to the deallocation function is checked statically. Hence, even though a different one might actually be executed, the statically visible deallocation function is required to be accessible. [*Example*: For the call on line “// 1” above, if `B::operator delete()` had been private, the delete expression would have been ill-formed. — *end example*]
- ⁸ [*Note*: If a deallocation function has no explicit *noexcept-specifier*, it has a non-throwing exception specification (18.4). — *end note*]

15.6 Initialization

[**class.init**]

- ¹ When no initializer is specified for an object of (possibly cv-qualified) class type (or array thereof), or the initializer has the form `()`, the object is initialized as specified in 11.6.
- ² An object of class type (or array thereof) can be explicitly initialized; see 15.6.1 and 15.6.2.
- ³ When an array of class objects is initialized (either explicitly or implicitly) and the elements are initialized by constructor, the constructor shall be called for each element of the array, following the subscript order; see 11.3.4. [*Note*: Destructors for the array elements are called in reverse order of their construction. — *end note*]

15.6.1 Explicit initialization

[**class.expl.init**]

- ¹ An object of class type can be initialized with a parenthesized *expression-list*, where the *expression-list* is construed as an argument list for a constructor that is called to initialize the object. Alternatively, a single *assignment-expression* can be specified as an *initializer* using the = form of initialization. Either direct-initialization semantics or copy-initialization semantics apply; see 11.6. [*Example*:

```
struct complex {
    complex();
    complex(double);
    complex(double, double);
};

complex sqrt(complex, complex);

complex a(1);           // initialized by calling complex(double) with argument 1
complex b = a;         // initialized as a copy of a
complex c = complex(1,2); // initialized by calling complex(double, double) with arguments 1 and 2
complex d = sqrt(b,c); // initialized by calling sqrt(complex, complex) with d as its result object
complex e;             // initialized by calling complex()
complex f = 3;         // initialized by calling complex(double) with argument 3
complex g = { 1, 2 }; // initialized by calling complex(double, double) with arguments 1 and 2
```

— *end example*] [*Note*: Overloading of the assignment operator (16.5.3) has no effect on initialization. — *end note*]

- ² An object of class type can also be initialized by a *braced-init-list*. List-initialization semantics apply; see 11.6 and 11.6.4. [*Example*:

```
complex v[6] = { 1, complex(1,2), complex(), 2 };
```

Here, `complex::complex(double)` is called for the initialization of `v[0]` and `v[3]`, `complex::complex(double, double)` is called for the initialization of `v[1]`, `complex::complex()` is called for the initialization of `v[2]`, `v[4]`, and `v[5]`. For another example,

```
struct X {
    int i;
    float f;
    complex c;
} x = { 99, 88.8, 77.7 };
```

Here, `x.i` is initialized with 99, `x.f` is initialized with 88.8, and `complex::complex(double)` is called for the initialization of `x.c`. — *end example*] [*Note*: Braces can be elided in the *initializer-list* for any aggregate, even if the aggregate has members of a class type with user-defined type conversions; see 11.6.1. — *end note*]

- ³ [*Note*: If `T` is a class type with no default constructor, any declaration of an object of type `T` (or array thereof) is ill-formed if no *initializer* is explicitly specified (see 15.6 and 11.6). — *end note*]
- ⁴ [*Note*: The order in which objects with static or thread storage duration are initialized is described in 6.8.3.3 and 9.7. — *end note*]

15.6.2 Initializing bases and members

[class.base.init]

- ¹ In the definition of a constructor for a class, initializers for direct and virtual base class subobjects and non-static data members can be specified by a *ctor-initializer*, which has the form

```

ctor-initializer:
    : mem-initializer-list

mem-initializer-list:
    mem-initializer ...opt
    mem-initializer-list , mem-initializer ...opt

mem-initializer:
    mem-initializer-id ( expression-listopt )
    mem-initializer-id braced-init-list

mem-initializer-id:
    class-or-decltype
    identifier

```

- ² In a *mem-initializer-id* an initial unqualified *identifier* is looked up in the scope of the constructor's class and, if not found in that scope, it is looked up in the scope containing the constructor's definition. [Note: If the constructor's class contains a member with the same name as a direct or virtual base class of the class, a *mem-initializer-id* naming the member or base class and composed of a single identifier refers to the class member. A *mem-initializer-id* for the hidden base class may be specified using a qualified name. — end note] Unless the *mem-initializer-id* names the constructor's class, a non-static data member of the constructor's class, or a direct or virtual base of that class, the *mem-initializer* is ill-formed.
- ³ A *mem-initializer-list* can initialize a base class using any *class-or-decltype* that denotes that base class type. [Example:

```

struct A { A(); };
typedef A global_A;
struct B { };
struct C: public A, public B { C(); };
C::C(): global_A() { } // mem-initializer for base A
— end example]

```

- ⁴ If a *mem-initializer-id* is ambiguous because it designates both a direct non-virtual base class and an inherited virtual base class, the *mem-initializer* is ill-formed. [Example:

```

struct A { A(); };
struct B: public virtual A { };
struct C: public A, public B { C(); };
C::C(): A() { } // ill-formed: which A?
— end example]

```

- ⁵ A *ctor-initializer* may initialize a variant member of the constructor's class. If a *ctor-initializer* specifies more than one *mem-initializer* for the same member or for the same base class, the *ctor-initializer* is ill-formed.
- ⁶ A *mem-initializer-list* can delegate to another constructor of the constructor's class using any *class-or-decltype* that denotes the constructor's class itself. If a *mem-initializer-id* designates the constructor's class, it shall be the only *mem-initializer*; the constructor is a *delegating constructor*, and the constructor selected by the *mem-initializer* is the *target constructor*. The target constructor is selected by overload resolution. Once the target constructor returns, the body of the delegating constructor is executed. If a constructor delegates to itself directly or indirectly, the program is ill-formed, no diagnostic required. [Example:

```

struct C {
    C( int ) { } // #1: non-delegating constructor
    C(): C(42) { } // #2: delegates to #1
    C( char c ) : C(42.0) { } // #3: ill-formed due to recursion with #4
    C( double d ) : C('a') { } // #4: ill-formed due to recursion with #3
};
— end example]

```

- ⁷ The *expression-list* or *braced-init-list* in a *mem-initializer* is used to initialize the designated subobject (or, in the case of a delegating constructor, the complete class object) according to the initialization rules of 11.6 for direct-initialization. [Example:

```

struct B1 { B1(int); /* ... */ };
struct B2 { B2(int); /* ... */ };
struct D : B1, B2 {
    D(int);
    B1 b;
    const int c;
};

D::D(int a) : B2(a+1), B1(a+2), c(a+3), b(a+4) { /* ... */ }
D d(10);

```

— *end example*] [Note: The initialization performed by each *mem-initializer* constitutes a full-expression (6.8.1). Any expression in a *mem-initializer* is evaluated as part of the full-expression that performs the initialization. — *end note*] A *mem-initializer* where the *mem-initializer-id* denotes a virtual base class is ignored during execution of a constructor of a class that is not the most derived class.

- 8 A temporary expression bound to a reference member in a *mem-initializer* is ill-formed. [Example:

```

struct A {
    A() : v(42) { } // error
    const int& v;
};

```

— *end example*]

- 9 In a non-delegating constructor, if a given potentially constructed subobject is not designated by a *mem-initializer-id* (including the case where there is no *mem-initializer-list* because the constructor has no *ctor-initializer*), then

- (9.1) — if the entity is a non-static data member that has a default member initializer (12.2) and either
 - (9.1.1) — the constructor's class is a union (12.3), and no other variant member of that union is designated by a *mem-initializer-id* or
 - (9.1.2) — the constructor's class is not a union, and, if the entity is a member of an anonymous union, no other member of that union is designated by a *mem-initializer-id*,
 the entity is initialized from its default member initializer as specified in 11.6;
- (9.2) — otherwise, if the entity is an anonymous union or a variant member (12.3.1), no initialization is performed;
- (9.3) — otherwise, the entity is default-initialized (11.6).

[Note: An abstract class (13.4) is never a most derived class, thus its constructors never initialize virtual base classes, therefore the corresponding *mem-initializers* may be omitted. — *end note*] An attempt to initialize more than one non-static data member of a union renders the program ill-formed. [Note: After the call to a constructor for class X for an object with automatic or dynamic storage duration has completed, if the constructor was not invoked as part of value-initialization and a member of X is neither initialized nor given a value during execution of the *compound-statement* of the body of the constructor, the member has an indeterminate value. — *end note*] [Example:

```

struct A {
    A();
};

struct B {
    B(int);
};

struct C {
    C() { } // initializes members as follows:
    A a; // OK: calls A::A()
    const B b; // error: B has no default constructor
    int i; // OK: i has indeterminate value
    int j = 5; // OK: j has the value 5
};

```

— *end example*]

- 10 If a given non-static data member has both a default member initializer and a *mem-initializer*, the initialization specified by the *mem-initializer* is performed, and the non-static data member's default member initializer is ignored. [*Example*: Given

```
struct A {
    int i = /* some integer expression with side effects */ ;
    A(int arg) : i(arg) { }
    // ...
};
```

the `A(int)` constructor will simply initialize `i` to the value of `arg`, and the side effects in `i`'s default member initializer will not take place. — *end example*]

- 11 A temporary expression bound to a reference member from a default member initializer is ill-formed. [*Example*:

```
struct A {
    A() = default;           // OK
    A(int v) : v(v) { }     // OK
    const int& v = 42;      // OK
};
A a1;                       // error: ill-formed binding of temporary to reference
A a2(1);                    // OK, unfortunately
```

— *end example*]

- 12 In a non-delegating constructor, the destructor for each potentially constructed subobject of class type is potentially invoked (15.4). [*Note*: This provision ensures that destructors can be called for fully-constructed subobjects in case an exception is thrown (18.2). — *end note*]

- 13 In a non-delegating constructor, initialization proceeds in the following order:

- (13.1) — First, and only for the constructor of the most derived class (6.6.2), virtual base classes are initialized in the order they appear on a depth-first left-to-right traversal of the directed acyclic graph of base classes, where “left-to-right” is the order of appearance of the base classes in the derived class *base-specifier-list*.
- (13.2) — Then, direct base classes are initialized in declaration order as they appear in the *base-specifier-list* (regardless of the order of the *mem-initializers*).
- (13.3) — Then, non-static data members are initialized in the order they were declared in the class definition (again regardless of the order of the *mem-initializers*).
- (13.4) — Finally, the *compound-statement* of the constructor body is executed.

[*Note*: The declaration order is mandated to ensure that base and member subobjects are destroyed in the reverse order of initialization. — *end note*]

- 14 [*Example*:

```
struct V {
    V();
    V(int);
};

struct A : virtual V {
    A();
    A(int);
};

struct B : virtual V {
    B();
    B(int);
};

struct C : A, B, virtual V {
    C();
    C(int);
};

A::A(int i) : V(i) { /* ... */ }
B::B(int i) { /* ... */ }
```

```

C::C(int i) { /* ... */ }

V v(1);           // use V(int)
A a(2);           // use V(int)
B b(3);           // use V()
C c(4);           // use V()

```

— end example]

- 15 Names in the *expression-list* or *braced-init-list* of a *mem-initializer* are evaluated in the scope of the constructor for which the *mem-initializer* is specified. [Example:

```

class X {
    int a;
    int b;
    int i;
    int j;
public:
    const int& r;
    X(int i): r(a), b(i), i(i), j(this->i) { }
};

```

initializes `X::r` to refer to `X::a`, initializes `X::b` with the value of the constructor parameter `i`, initializes `X::i` with the value of the constructor parameter `i`, and initializes `X::j` with the value of `X::i`; this takes place each time an object of class `X` is created. — end example] [Note: Because the *mem-initializer* are evaluated in the scope of the constructor, the `this` pointer can be used in the *expression-list* of a *mem-initializer* to refer to the object being initialized. — end note]

- 16 Member functions (including virtual member functions, 13.3) can be called for an object under construction. Similarly, an object under construction can be the operand of the `typeid` operator (8.5.1.8) or of a `dynamic_cast` (8.5.1.7). However, if these operations are performed in a *ctor-initializer* (or in a function called directly or indirectly from a *ctor-initializer*) before all the *mem-initializers* for base classes have completed, the program has undefined behavior. [Example:

```

class A {
public:
    A(int);
};

class B : public A {
    int j;
public:
    int f();
    B() : A(f()),           // undefined: calls member function but base A not yet initialized
    j(f()) { }             // well-defined: bases are all initialized
};

class C {
public:
    C(int);
};

class D : public B, C {
    int i;
public:
    D() : C(f()),           // undefined: calls member function but base C not yet initialized
    i(f()) { }             // well-defined: bases are all initialized
};

```

— end example]

- 17 [Note: 15.7 describes the result of virtual function calls, `typeid` and `dynamic_casts` during construction for the well-defined cases; that is, describes the *polymorphic behavior* of an object under construction. — end note]
- 18 A *mem-initializer* followed by an ellipsis is a pack expansion (17.6.3) that initializes the base classes specified by a pack expansion in the *base-specifier-list* for the class. [Example:

```

template<class... Mixins>
class X : public Mixins... {
public:
    X(const Mixins&... mixins) : Mixins(mixins)... { }
};

```

— *end example*]

15.6.3 Initialization by inherited constructor

[`class.inhctor.init`]

- ¹ When a constructor for type B is invoked to initialize an object of a different type D (that is, when the constructor was inherited (10.3.3)), initialization proceeds as if a defaulted default constructor were used to initialize the D object and each base class subobject from which the constructor was inherited, except that the B subobject is initialized by the invocation of the inherited constructor. The complete initialization is considered to be a single function call; in particular, the initialization of the inherited constructor's parameters is sequenced before the initialization of any part of the D object. [*Example*:

```

struct B1 {
    B1(int, ...) { }
};

struct B2 {
    B2(double) { }
};

int get();

struct D1 : B1 {
    using B1::B1;    // inherits B1(int, ...)
    int x;
    int y = get();
};

void test() {
    D1 d(2, 3, 4);    // OK: B1 is initialized by calling B1(2, 3, 4),
                    // then d.x is default-initialized (no initialization is performed),
                    // then d.y is initialized by calling get()
    D1 e;            // error: D1 has a deleted default constructor
}

struct D2 : B2 {
    using B2::B2;
    B1 b;
};

D2 f(1.0);          // error: B1 has a deleted default constructor

struct W { W(int); };
struct X : virtual W { using W::W; X() = delete; };
struct Y : X { using X::X; };
struct Z : Y, virtual W { using Y::Y; };
Z z(0);            // OK: initialization of Y does not invoke default constructor of X

template<class T> struct Log : T {
    using T::T;    // inherits all constructors from class T
    ~Log() { std::clog << "Destroying wrapper" << std::endl; }
};

```

Class template Log wraps any class and forwards all of its constructors, while writing a message to the standard log whenever an object of class Log is destroyed. — *end example*]

- ² If the constructor was inherited from multiple base class subobjects of type B, the program is ill-formed. [*Example*:

```

struct A { A(int); };
struct B : A { using A::A; };

```



```

struct C1 : B { using B::B; };
struct C2 : B { using B::B; };

struct D1 : C1, C2 {
    using C1::C1;
    using C2::C2;
};

struct V1 : virtual B { using B::B; };
struct V2 : virtual B { using B::B; };

struct D2 : V1, V2 {
    using V1::V1;
    using V2::V2;
};

D1 d1(0);           // ill-formed: ambiguous
D2 d2(0);           // OK: initializes virtual B base class, which initializes the A base class
                   // then initializes the V1 and V2 base classes as if by a defaulted default constructor

struct M { M(); M(int); };
struct N : M { using M::M; };
struct O : M {};
struct P : N, O { using N::N; using O::O; };
P p(0);             // OK: use M(0) to initialize N's base class,
                   // use M() to initialize O's base class

```

— end example]

- ³ When an object is initialized by an inherited constructor, initialization of the object is complete when the initialization of all subobjects is complete.

15.7 Construction and destruction

[class.ctor]

- ¹ For an object with a non-trivial constructor, referring to any non-static member or base class of the object before the constructor begins execution results in undefined behavior. For an object with a non-trivial destructor, referring to any non-static member or base class of the object after the destructor finishes execution results in undefined behavior. [Example:

```

struct X { int i; };
struct Y : X { Y(); };           // non-trivial
struct A { int a; };
struct B : public A { int j; Y y; }; // non-trivial

extern B bobj;
B* pb = &bobj;                   // OK
int* p1 = &bobj.a;               // undefined, refers to base class member
int* p2 = &bobj.y.i;             // undefined, refers to member's member

A* pa = &bobj;                   // undefined, upcast to a base class type
B bobj;                           // definition of bobj

extern X xobj;
int* p3 = &xobj.i;               // OK, X is a trivial class
X xobj;

```

For another example,

```

struct W { int j; };
struct X : public virtual W { };
struct Y {
    int* p;
    X x;
    Y() : p(&x.j) { // undefined, x is not yet constructed
    }
};

```

— end example]

- ² To explicitly or implicitly convert a pointer (a glvalue) referring to an object of class **X** to a pointer (reference) to a direct or indirect base class **B** of **X**, the construction of **X** and the construction of all of its direct or indirect bases that directly or indirectly derive from **B** shall have started and the destruction of these classes shall not have completed, otherwise the conversion results in undefined behavior. To form a pointer to (or access the value of) a direct non-static member of an object **obj**, the construction of **obj** shall have started and its destruction shall not have completed, otherwise the computation of the pointer value (or accessing the member value) results in undefined behavior. [Example:

```

struct A { };
struct B : virtual A { };
struct C : B { };
struct D : virtual A { D(A*); };
struct X { X(A*); };

struct E : C, D, X {
    E() : D(this),      // undefined: upcast from E* to A* might use path E* → D* → A*
                       // but D is not constructed

                       // “D((C*)this)” would be defined: E* → C* is defined because E() has started,
                       // and C* → A* is defined because C is fully constructed

    X(this) {}        // defined: upon construction of X, C/B/D/A sublattice is fully constructed
};

```

— end example]

- ³ Member functions, including virtual functions (13.3), can be called during construction or destruction (15.6.2). When a virtual function is called directly or indirectly from a constructor or from a destructor, including during the construction or destruction of the class’s non-static data members, and the object to which the call applies is the object (call it **x**) under construction or destruction, the function called is the final overrider in the constructor’s or destructor’s class and not one overriding it in a more-derived class. If the virtual function call uses an explicit class member access (8.5.1.5) and the object expression refers to the complete object of **x** or one of that object’s base class subobjects but not **x** or one of its base class subobjects, the behavior is undefined. [Example:

```

struct V {
    virtual void f();
    virtual void g();
};

struct A : virtual V {
    virtual void f();
};

struct B : virtual V {
    virtual void g();
    B(V*, A*);
};

struct D : A, B {
    virtual void f();
    virtual void g();
    D() : B((A*)this, this) { }
};

B::B(V* v, A* a) {
    f();           // calls V::f, not A::f
    g();           // calls B::g, not D::g
    v->g();        // v is base of B, the call is well-defined, calls B::g
    a->f();        // undefined behavior, a’s type not a base of B
}

```

— end example]

- ⁴ The `typeid` operator (8.5.1.8) can be used during construction or destruction (15.6.2). When `typeid` is used in a constructor (including the *mem-initializer* or default member initializer (12.2) for a non-static data member) or in a destructor, or used in a function called (directly or indirectly) from a constructor or destructor, if the operand of `typeid` refers to the object under construction or destruction, `typeid` yields the `std::type_info` object representing the constructor or destructor's class. If the operand of `typeid` refers to the object under construction or destruction and the static type of the operand is neither the constructor or destructor's class nor one of its bases, the behavior is undefined.
- ⁵ `dynamic_casts` (8.5.1.7) can be used during construction or destruction (15.6.2). When a `dynamic_cast` is used in a constructor (including the *mem-initializer* or default member initializer for a non-static data member) or in a destructor, or used in a function called (directly or indirectly) from a constructor or destructor, if the operand of the `dynamic_cast` refers to the object under construction or destruction, this object is considered to be a most derived object that has the type of the constructor or destructor's class. If the operand of the `dynamic_cast` refers to the object under construction or destruction and the static type of the operand is not a pointer to or object of the constructor or destructor's own class or one of its bases, the `dynamic_cast` results in undefined behavior. [Example:

```

struct V {
    virtual void f();
};

struct A : virtual V { };

struct B : virtual V {
    B(V*, A*);
};

struct D : A, B {
    D() : B((A*)this, this) { }
};

B::B(V* v, A* a) {
    typeid(*this);           // type_info for B
    typeid(*v);             // well-defined: *v has type V, a base of B yields type_info for B
    typeid(*a);             // undefined behavior: type A not a base of B
    dynamic_cast<B*>(v);     // well-defined: v of type V*, V base of B results in B*
    dynamic_cast<B*>(a);     // undefined behavior, a has type A*, A not a base of B
}

```

— end example]

15.8 Copying and moving class objects

[class.copy]

- ¹ A class object can be copied or moved in two ways: by initialization (15.1, 11.6), including for function argument passing (8.5.1.2) and for function value return (9.6.3); and by assignment (8.5.18). Conceptually, these two operations are implemented by a copy/move constructor (15.1) and copy/move assignment operator (16.5.3).
- ² A program is ill-formed if the copy/move constructor or the copy/move assignment operator for an object is implicitly odr-used and the special member function is not accessible (Clause 14). [Note: Copying/moving one object into another using the copy/move constructor or the copy/move assignment operator does not change the layout or size of either object. — end note]

15.8.1 Copy/move constructors

[class.copy.ctor]

- ¹ A non-template constructor for class X is a copy constructor if its first parameter is of type `X&`, `const X&`, `volatile X&` or `const volatile X&`, and either there are no other parameters or else all other parameters have default arguments (11.3.6). [Example: `X::X(const X&)` and `X::X(X&, int=1)` are copy constructors.

```

struct X {
    X(int);
    X(const X&, int = 1);
};
X a(1);           // calls X(int);
X b(a, 0);       // calls X(const X&, int);
X c = b;         // calls X(const X&, int);

```

— end example]

- 2 A non-template constructor for class X is a move constructor if its first parameter is of type X&&, const X&&, volatile X&&, or const volatile X&&, and either there are no other parameters or else all other parameters have default arguments (11.3.6). [Example: Y::Y(Y&&) is a move constructor.

```
struct Y {
    Y(const Y&);
    Y(Y&&);
};
extern Y f(int);
Y d(f(1));           // calls Y(Y&&)
Y e = d;             // calls Y(const Y&)
```

— end example]

- 3 [Note: All forms of copy/move constructor may be declared for a class. [Example:

```
struct X {
    X(const X&);
    X(X&);           // OK
    X(X&&);
    X(const X&&);    // OK, but possibly not sensible
};
```

— end example] — end note]

- 4 [Note: If a class X only has a copy constructor with a parameter of type X&, an initializer of type const X or volatile X cannot initialize an object of type (possibly cv-qualified) X. [Example:

```
struct X {
    X();           // default constructor
    X(X&);        // copy constructor with a non-const parameter
};
const X cx;
X x = cx;        // error: X::X(X&) cannot copy cx into x
```

— end example] — end note]

- 5 A declaration of a constructor for a class X is ill-formed if its first parameter is of type (optionally cv-qualified) X and either there are no other parameters or else all other parameters have default arguments. A member function template is never instantiated to produce such a constructor signature. [Example:

```
struct S {
    template<typename T> S(T);
    S();
};

S g;

void h() {
    S a(g);           // does not instantiate the member template to produce S::S<S>(S);
                    // uses the implicitly declared copy constructor
}
```

— end example]

- 6 If the class definition does not explicitly declare a copy constructor, a non-explicit one is declared *implicitly*. If the class definition declares a move constructor or move assignment operator, the implicitly declared copy constructor is defined as deleted; otherwise, it is defined as defaulted (11.4). The latter case is deprecated if the class has a user-declared copy assignment operator or a user-declared destructor.
- 7 The implicitly-declared copy constructor for a class X will have the form

```
X::X(const X&)
```

if each potentially constructed subobject of a class type M (or array thereof) has a copy constructor whose first parameter is of type const M& or const volatile M&. ¹¹⁸ Otherwise, the implicitly-declared copy constructor will have the form

118) This implies that the reference parameter of the implicitly-declared copy constructor cannot bind to a volatile lvalue; see C.1.9.

X::X(X&)

- 8 If the definition of a class **X** does not explicitly declare a move constructor, a non-explicit one will be implicitly declared as defaulted if and only if

- (8.1) — **X** does not have a user-declared copy constructor,
- (8.2) — **X** does not have a user-declared copy assignment operator,
- (8.3) — **X** does not have a user-declared move assignment operator, and
- (8.4) — **X** does not have a user-declared destructor.

[*Note*: When the move constructor is not implicitly declared or explicitly supplied, expressions that otherwise would have invoked the move constructor may instead invoke a copy constructor. — *end note*]

- 9 The implicitly-declared move constructor for class **X** will have the form

X::X(X&&)

- 10 An implicitly-declared copy/move constructor is an inline public member of its class. A defaulted copy/move constructor for a class **X** is defined as deleted (11.4.3) if **X** has:

- (10.1) — a potentially constructed subobject type **M** (or array thereof) that cannot be copied/moved because overload resolution (16.3), as applied to find **M**'s corresponding constructor, results in an ambiguity or a function that is deleted or inaccessible from the defaulted constructor,
- (10.2) — a variant member whose corresponding constructor as selected by overload resolution is non-trivial,
- (10.3) — any potentially constructed subobject of a type with a destructor that is deleted or inaccessible from the defaulted constructor, or,
- (10.4) — for the copy constructor, a non-static data member of rvalue reference type.

A defaulted move constructor that is defined as deleted is ignored by overload resolution (16.3, 16.4). [*Note*: A deleted move constructor would otherwise interfere with initialization from an rvalue which can use the copy constructor instead. — *end note*]

- 11 A copy/move constructor for class **X** is trivial if it is not user-provided and if:

- (11.1) — class **X** has no virtual functions (13.3) and no virtual base classes (13.1), and
- (11.2) — the constructor selected to copy/move each direct base class subobject is trivial, and
- (11.3) — for each non-static data member of **X** that is of class type (or array thereof), the constructor selected to copy/move that member is trivial;

otherwise the copy/move constructor is *non-trivial*.

- 12 A copy/move constructor that is defaulted and not defined as deleted is *implicitly defined* when it is odr-used (6.2), when it is needed for constant evaluation (8.6), or when it is explicitly defaulted after its first declaration. [*Note*: The copy/move constructor is implicitly defined even if the implementation elided its odr-use (6.2, 15.2). — *end note*] If the implicitly-defined constructor would satisfy the requirements of a constexpr constructor (10.1.5), the implicitly-defined constructor is **constexpr**.

- 13 Before the defaulted copy/move constructor for a class is implicitly defined, all non-user-provided copy/move constructors for its potentially constructed subobjects shall have been implicitly defined. [*Note*: An implicitly-declared copy/move constructor has an implied exception specification (18.4). — *end note*]

- 14 The implicitly-defined copy/move constructor for a non-union class **X** performs a memberwise copy/move of its bases and members. [*Note*: Default member initializers of non-static data members are ignored. See also the example in 15.6.2. — *end note*] The order of initialization is the same as the order of initialization of bases and members in a user-defined constructor (see 15.6.2). Let **x** be either the parameter of the constructor or, for the move constructor, an xvalue referring to the parameter. Each base or non-static data member is copied/moved in the manner appropriate to its type:

- (14.1) — if the member is an array, each element is direct-initialized with the corresponding subobject of **x**;
- (14.2) — if a member **m** has rvalue reference type **T&&**, it is direct-initialized with `static_cast<T&&>(x.m)`;
- (14.3) — otherwise, the base or member is direct-initialized with the corresponding base or member of **x**.

Virtual base class subobjects shall be initialized only once by the implicitly-defined copy/move constructor (see 15.6.2).

- 15 The implicitly-defined copy/move constructor for a union **X** copies the object representation (6.7) of **X**.

15.8.2 Copy/move assignment operator

[class.copy.assign]

- ¹ A user-declared *copy* assignment operator `X::operator=` is a non-static non-template member function of class `X` with exactly one parameter of type `X`, `X&`, `const X&`, `volatile X&` or `const volatile X&`.¹¹⁹ [Note: An overloaded assignment operator must be declared to have only one parameter; see 16.5.3. — end note] [Note: More than one form of copy assignment operator may be declared for a class. — end note] [Note: If a class `X` only has a copy assignment operator with a parameter of type `X&`, an expression of type `const X` cannot be assigned to an object of type `X`. [Example:

```
struct X {
    X();
    X& operator=(X&);
};
const X cx;
X x;
void f() {
    x = cx;           // error: X::operator=(X&) cannot assign cx into x
}
```

— end example] — end note]

- ² If the class definition does not explicitly declare a copy assignment operator, one is declared *implicitly*. If the class definition declares a move constructor or move assignment operator, the implicitly declared copy assignment operator is defined as deleted; otherwise, it is defined as defaulted (11.4). The latter case is deprecated if the class has a user-declared copy constructor or a user-declared destructor. The implicitly-declared copy assignment operator for a class `X` will have the form

```
X& X::operator=(const X&)
```

if

- (2.1) — each direct base class `B` of `X` has a copy assignment operator whose parameter is of type `const B&`, `const volatile B&` or `B`, and
- (2.2) — for all the non-static data members of `X` that are of a class type `M` (or array thereof), each such class type has a copy assignment operator whose parameter is of type `const M&`, `const volatile M&` or `M`.¹²⁰

Otherwise, the implicitly-declared copy assignment operator will have the form

```
X& X::operator=(X&)
```

- ³ A user-declared move assignment operator `X::operator=` is a non-static non-template member function of class `X` with exactly one parameter of type `X&&`, `const X&&`, `volatile X&&`, or `const volatile X&&`. [Note: An overloaded assignment operator must be declared to have only one parameter; see 16.5.3. — end note] [Note: More than one form of move assignment operator may be declared for a class. — end note]
- ⁴ If the definition of a class `X` does not explicitly declare a move assignment operator, one will be implicitly declared as defaulted if and only if

- (4.1) — `X` does not have a user-declared copy constructor,
- (4.2) — `X` does not have a user-declared move constructor,
- (4.3) — `X` does not have a user-declared copy assignment operator, and
- (4.4) — `X` does not have a user-declared destructor.

[Example: The class definition

```
struct S {
    int a;
    S& operator=(const S&) = default;
};
```

will not have a default move assignment operator implicitly declared because the copy assignment operator has been user-declared. The move assignment operator may be explicitly defaulted.

119) Because a template assignment operator or an assignment operator taking an rvalue reference parameter is never a copy assignment operator, the presence of such an assignment operator does not suppress the implicit declaration of a copy assignment operator. Such assignment operators participate in overload resolution with other assignment operators, including copy assignment operators, and, if selected, will be used to assign an object.

120) This implies that the reference parameter of the implicitly-declared copy assignment operator cannot bind to a `volatile` lvalue; see C.1.9.

```

struct S {
    int a;
    S& operator=(const S&) = default;
    S& operator=(S&&) = default;
};

```

— *end example*]

5 The implicitly-declared move assignment operator for a class **X** will have the form

```
X& X::operator=(X&&);
```

6 The implicitly-declared copy/move assignment operator for class **X** has the return type **X&**; it returns the object for which the assignment operator is invoked, that is, the object assigned to. An implicitly-declared copy/move assignment operator is an inline public member of its class.

7 A defaulted copy/move assignment operator for class **X** is defined as deleted if **X** has:

- (7.1) — a variant member with a non-trivial corresponding assignment operator and **X** is a union-like class, or
- (7.2) — a non-static data member of **const** non-class type (or array thereof), or
- (7.3) — a non-static data member of reference type, or
- (7.4) — a direct non-static data member of class type **M** (or array thereof) or a direct base class **M** that cannot be copied/moved because overload resolution (16.3), as applied to find **M**'s corresponding assignment operator, results in an ambiguity or a function that is deleted or inaccessible from the defaulted assignment operator.

A defaulted move assignment operator that is defined as deleted is ignored by overload resolution (16.3, 16.4).

8 Because a copy/move assignment operator is implicitly declared for a class if not declared by the user, a base class copy/move assignment operator is always hidden by the corresponding assignment operator of a derived class (16.5.3). A *using-declaration* (10.3.3) that brings in from a base class an assignment operator with a parameter type that could be that of a copy/move assignment operator for the derived class is not considered an explicit declaration of such an operator and does not suppress the implicit declaration of the derived class operator; the operator introduced by the *using-declaration* is hidden by the implicitly-declared operator in the derived class.

9 A copy/move assignment operator for class **X** is trivial if it is not user-provided and if:

- (9.1) — class **X** has no virtual functions (13.3) and no virtual base classes (13.1), and
- (9.2) — the assignment operator selected to copy/move each direct base class subobject is trivial, and
- (9.3) — for each non-static data member of **X** that is of class type (or array thereof), the assignment operator selected to copy/move that member is trivial;

otherwise the copy/move assignment operator is *non-trivial*.

10 A copy/move assignment operator for a class **X** that is defaulted and not defined as deleted is *implicitly defined* when it is odr-used (6.2) (e.g., when it is selected by overload resolution to assign to an object of its class type), when it is needed for constant evaluation (8.6), or when it is explicitly defaulted after its first declaration. The implicitly-defined copy/move assignment operator is **constexpr** if

- (10.1) — **X** is a literal type, and
- (10.2) — the assignment operator selected to copy/move each direct base class subobject is a **constexpr** function, and
- (10.3) — for each non-static data member of **X** that is of class type (or array thereof), the assignment operator selected to copy/move that member is a **constexpr** function.

11 Before the defaulted copy/move assignment operator for a class is implicitly defined, all non-user-provided copy/move assignment operators for its direct base classes and its non-static data members shall have been implicitly defined. [*Note*: An implicitly-declared copy/move assignment operator has an implied exception specification (18.4). — *end note*]

12 The implicitly-defined copy/move assignment operator for a non-union class **X** performs memberwise copy/move assignment of its subobjects. The direct base classes of **X** are assigned first, in the order of their declaration in the *base-specifier-list*, and then the immediate non-static data members of **X** are assigned, in the order in which they were declared in the class definition. Let **x** be either the parameter of the function

or, for the move operator, an xvalue referring to the parameter. Each subobject is assigned in the manner appropriate to its type:

- (12.1) — if the subobject is of class type, as if by a call to `operator=` with the subobject as the object expression and the corresponding subobject of `x` as a single function argument (as if by explicit qualification; that is, ignoring any possible virtual overriding functions in more derived classes);
- (12.2) — if the subobject is an array, each element is assigned, in the manner appropriate to the element type;
- (12.3) — if the subobject is of scalar type, the built-in assignment operator is used.

It is unspecified whether subobjects representing virtual base classes are assigned more than once by the implicitly-defined copy/move assignment operator. [*Example:*

```
struct V { };
struct A : virtual V { };
struct B : virtual V { };
struct C : B, A { };
```

It is unspecified whether the virtual base class subobject `V` is assigned twice by the implicitly-defined copy/move assignment operator for `C`. — *end example*]

- ¹³ The implicitly-defined copy assignment operator for a union `X` copies the object representation (6.7) of `X`.

15.8.3 Copy/move elision

[**class.copy.elision**]

- ¹ When certain criteria are met, an implementation is allowed to omit the copy/move construction of a class object, even if the constructor selected for the copy/move operation and/or the destructor for the object have side effects. In such cases, the implementation treats the source and target of the omitted copy/move operation as simply two different ways of referring to the same object. If the first parameter of the selected constructor is an rvalue reference to the object's type, the destruction of that object occurs when the target would have been destroyed; otherwise, the destruction occurs at the later of the times when the two objects would have been destroyed without the optimization.¹²¹ This elision of copy/move operations, called *copy elision*, is permitted in the following circumstances (which may be combined to eliminate multiple copies):

- (1.1) — in a `return` statement in a function with a class return type, when the *expression* is the name of a non-volatile automatic object (other than a function parameter or a variable introduced by the *exception-declaration* of a *handler* (18.3)) with the same type (ignoring cv-qualification) as the function return type, the copy/move operation can be omitted by constructing the automatic object directly into the function call's return object
- (1.2) — in a *throw-expression* (8.5.17), when the operand is the name of a non-volatile automatic object (other than a function or catch-clause parameter) whose scope does not extend beyond the end of the innermost enclosing *try-block* (if there is one), the copy/move operation from the operand to the exception object (18.1) can be omitted by constructing the automatic object directly into the exception object
- (1.3) — when the *exception-declaration* of an exception handler (Clause 18) declares an object of the same type (except for cv-qualification) as the exception object (18.1), the copy operation can be omitted by treating the *exception-declaration* as an alias for the exception object if the meaning of the program will be unchanged except for the execution of constructors and destructors for the object declared by the *exception-declaration*. [*Note:* There cannot be a move from the exception object because it is always an lvalue. — *end note*]

Copy elision is required where an expression is evaluated in a context requiring a constant expression (8.6) and in constant initialization (6.8.3.2). [*Note:* Copy elision might not be performed if the same expression is evaluated in another context. — *end note*]

- ² [*Example:*

```
class Thing {
public:
    Thing();
    ~Thing();
    Thing(const Thing&);
};
```

¹²¹) Because only one object is destroyed instead of two, and one copy/move constructor is not executed, there is still one object destroyed for each one constructed.


```

Thing f() {
    Thing t;
    return t;
}

Thing t2 = f();

struct A {
    void *p;
    constexpr A(): p(this) {}
};

constexpr A g() {
    A a;
    return a;
}

constexpr A a;           // well-formed, a.p points to a
constexpr A b = g();     // well-formed, b.p points to b

void h() {
    A c = g();           // well-formed, c.p may point to c or to an ephemeral temporary
}

```

Here the criteria for elision can eliminate the copying of the local automatic object `t` into the result object for the function call `f()`, which is the global object `t2`. Effectively, the construction of the local object `t` can be viewed as directly initializing the global object `t2`, and that object's destruction will occur at program exit. Adding a move constructor to `Thing` has the same effect, but it is the move construction from the local automatic object to `t2` that is elided. — *end example*]

³ In the following copy-initialization contexts, a move operation might be used instead of a copy operation:

- (3.1) — If the *expression* in a `return` statement (9.6.3) is a (possibly parenthesized) *id-expression* that names an object with automatic storage duration declared in the body or *parameter-declaration-clause* of the innermost enclosing function or *lambda-expression*, or
- (3.2) — if the operand of a *throw-expression* (8.5.17) is the name of a non-volatile automatic object (other than a function or catch-clause parameter) whose scope does not extend beyond the end of the innermost enclosing *try-block* (if there is one),

overload resolution to select the constructor for the copy is first performed as if the object were designated by an rvalue. If the first overload resolution fails or was not performed, or if the type of the first parameter of the selected constructor is not an rvalue reference to the object's type (possibly cv-qualified), overload resolution is performed again, considering the object as an lvalue. [*Note*: This two-stage overload resolution must be performed regardless of whether copy elision will occur. It determines the constructor to be called if elision is not performed, and the selected constructor must be accessible even if the call is elided. — *end note*]

⁴ [*Example*:

```

class Thing {
public:
    Thing();
    ~Thing();
    Thing(Thing&&);
private:
    Thing(const Thing&);
};

Thing f(bool b) {
    Thing t;
    if (b)
        throw t;           // OK: Thing(Thing&&) used (or elided) to throw t
    return t;              // OK: Thing(Thing&&) used (or elided) to return t
}

```

```

Thing t2 = f(false);    // OK: no extra copy/move performed, t2 constructed by call to f

struct Weird {
    Weird();
    Weird(Weird&);
};

Weird g() {
    Weird w;
    return w;          // OK: first overload resolution fails, second overload resolution selects Weird(Weird&)
}
— end example]

```

15.9 Comparisons [class.compare]

15.9.1 Defaulted comparison operator functions [class.compare.default]

- ¹ A defaulted comparison operator function (8.5.8, 8.5.9, 8.5.10) for some class *C* shall be a non-template function declared in the *member-specification* of *C* that is
- (1.1) — a non-static member of *C* having one parameter of type `const C&`, or
 - (1.2) — a friend of *C* having two parameters of type `const C&`.
- ² A three-way comparison operator for a class type *C* is a *structural comparison operator* if it is defined as defaulted in the definition of *C*, and all three-way comparison operators it invokes are structural comparison operators. A type *T* has *strong structural equality* if, for a glvalue *x* of type `const T`, `x <=> x` is a valid expression of type `std::strong_ordering` or `std::strong_equality` and either does not invoke a three-way comparison operator or invokes a structural comparison operator.

15.9.2 Three-way comparison [class.spaceship]

- ¹ The direct base class subobjects of *C*, in the order of their declaration in the *base-specifier-list* of *C*, followed by the non-static data members of *C*, in the order of their declaration in the *member-specification* of *C*, form a list of subobjects. In that list, any subobject of array type is recursively expanded to the sequence of its elements, in the order of increasing subscript. Let x_i be an lvalue denoting the i^{th} element in the expanded list of subobjects for an object *x* (of length *n*), where x_i is formed by a sequence of derived-to-base conversions (16.3.3.1), class member access expressions (8.5.1.5), and array subscript expressions (8.5.1.1) applied to *x*. The type of the expression `xi <=> xi` is denoted by R_i . It is unspecified whether virtual base class subobjects are compared more than once.
- ² If the declared return type of a defaulted three-way comparison operator function is `auto`, then the return type is deduced as the common comparison type (see below) of R_0, R_1, \dots, R_{n-1} . [Note: Otherwise, the program will be ill-formed if the expression `xi <=> xi` is not implicitly convertible to the declared return type for any *i*. — end note] If the return type is deduced as `void`, the operator function is defined as deleted.
- ³ The return value *V* of type *R* of the defaulted three-way comparison operator function with parameters *x* and *y* of the same type is determined by comparing corresponding elements x_i and y_i in the expanded lists of subobjects for *x* and *y* until the first index *i* where `xi <=> yi` yields a result value v_i where $v_i \neq 0$, contextually converted to `bool`, yields `true`; *V* is v_i converted to *R*. If no such index exists, *V* is `std::strong_ordering::equal` converted to *R*.
- ⁴ The *common comparison type* *U* of a possibly-empty list of *n* types T_0, T_1, \dots, T_{n-1} is defined as follows:
- (4.1) — If any T_i is not a comparison category type (21.11.2), *U* is `void`.
 - (4.2) — Otherwise, if at least one T_i is `std::weak_equality`, or at least one T_i is `std::strong_equality` and at least one T_j is `std::partial_ordering` or `std::weak_ordering`, *U* is `std::weak_equality` (21.11.2.2).
 - (4.3) — Otherwise, if at least one T_i is `std::strong_equality`, *U* is `std::strong_equality` (21.11.2.3).
 - (4.4) — Otherwise, if at least one T_i is `std::partial_ordering`, *U* is `std::partial_ordering` (21.11.2.4).
 - (4.5) — Otherwise, if at least one T_i is `std::weak_ordering`, *U* is `std::weak_ordering` (21.11.2.5).
 - (4.6) — Otherwise, *U* is `std::strong_ordering` (21.11.2.6). [Note: In particular, this is the result when *n* is 0. — end note]

15.9.3 Other comparison operators**[class.rel.eq]**

- ¹ A defaulted relational (8.5.9) or equality (8.5.10) operator function for some operator @ shall have a declared return type `bool`.
- ² The operator function with parameters `x` and `y` is defined as deleted if
 - (2.1) — overload resolution (16.3), as applied to `x <=> y` (also considering synthesized candidates with reversed order of parameters (16.3.1.2)), results in an ambiguity or a function that is deleted or inaccessible from the operator function, or
 - (2.2) — the operator @ cannot be applied to the return type of `x <=> y` or `y <=> x`.

Otherwise, the operator function yields `x <=> y @ 0` if an `operator<=>` with the original order of parameters was selected, or `0 @ y <=> x` otherwise.

³ [Example:

```
struct C {
    friend std::strong_equality operator<=>(const C&, const C&);
    friend bool operator==(const C& x, const C& y) = default; // OK, returns x <=> y == 0
    bool operator<(const C&) = default;                       // OK, function is deleted
};
```

— end example]

16 Overloading

[over]

- ¹ When two or more different declarations are specified for a single name in the same scope, that name is said to be *overloaded*, and the declarations are called *overloaded declarations*. Only function and function template declarations can be overloaded; variable and type declarations cannot be overloaded.
- ² When a function name is used in a call, which function declaration is being referenced and the validity of the call are determined by comparing the types of the arguments at the point of use with the types of the parameters in the declarations that are visible at the point of use. This function selection process is called *overload resolution* and is defined in 16.3. [Example:

```
double abs(double);
int abs(int);

abs(1);           // calls abs(int);
abs(1.0);        // calls abs(double);
```

— end example]

16.1 Overloadable declarations

[over.load]

- ¹ Not all function declarations can be overloaded. Those that cannot be overloaded are specified here. A program is ill-formed if it contains two such non-overloadable declarations in the same scope. [Note: This restriction applies to explicit declarations in a scope, and between such declarations and declarations made through a *using-declaration* (10.3.3). It does not apply to sets of functions fabricated as a result of name lookup (e.g., because of *using-directives*) or overload resolution (e.g., for operator functions). — end note]
- ² Certain function declarations cannot be overloaded:
 - (2.1) — Function declarations that differ only in the return type, the exception specification (18.4), or both cannot be overloaded.
 - (2.2) — Member function declarations with the same name and the same parameter-type-list (11.3.5) cannot be overloaded if any of them is a **static** member function declaration (12.2.3). Likewise, member function template declarations with the same name, the same parameter-type-list, and the same template parameter lists cannot be overloaded if any of them is a **static** member function template declaration. The types of the implicit object parameters constructed for the member functions for the purpose of overload resolution (16.3.1) are not considered when comparing parameter-type-lists for enforcement of this rule. In contrast, if there is no **static** member function declaration among a set of member function declarations with the same name and the same parameter-type-list, then these member function declarations can be overloaded if they differ in the type of their implicit object parameter. [Example: The following illustrates this distinction:

```
class X {
    static void f();
    void f();           // ill-formed
    void f() const;    // ill-formed
    void f() const volatile; // ill-formed
    void g();
    void g() const;    // OK: no static g
    void g() const volatile; // OK: no static g
};
```

— end example]

- (2.3) — Member function declarations with the same name and the same parameter-type-list (11.3.5) as well as member function template declarations with the same name, the same parameter-type-list, and the same template parameter lists cannot be overloaded if any of them, but not all, have a *ref-qualifier* (11.3.5). [Example:

```
class Y {
    void h() &;
    void h() const &; // OK
    void h() &&;     // OK, all declarations have a ref-qualifier
```

```

    void i() &;
    void i() const;           // ill-formed, prior declaration of i
                              // has a ref-qualifier
};

```

— end example]

- ³ [Note: As specified in 11.3.5, function declarations that have equivalent parameter declarations and *requires-clauses*, if any (17.4.2), declare the same function and therefore cannot be overloaded:

- (3.1) — Parameter declarations that differ only in the use of equivalent typedef “types” are equivalent. A typedef is not a separate type, but only a synonym for another type (10.1.3). [Example:

```

typedef int Int;

void f(int i);
void f(Int i);           // OK: redeclaration of f(int)
void f(int i) { /* ... */ }
void f(Int i) { /* ... */ } // error: redefinition of f(int)

```

— end example]

Enumerations, on the other hand, are distinct types and can be used to distinguish overloaded function declarations. [Example:

```

enum E { a };

void f(int i) { /* ... */ }
void f(E i) { /* ... */ }

```

— end example]

- (3.2) — Parameter declarations that differ only in a pointer * versus an array [] are equivalent. That is, the array declaration is adjusted to become a pointer declaration (11.3.5). Only the second and subsequent array dimensions are significant in parameter types (11.3.4). [Example:

```

int f(char*);
int f(char[]);           // same as f(char*);
int f(char[7]);         // same as f(char*);
int f(char[9]);         // same as f(char*);

int g(char(*)[10]);
int g(char[5][10]);     // same as g(char(*)[10]);
int g(char[7][10]);     // same as g(char(*)[10]);
int g(char(*)[20]);     // different from g(char(*)[10]);

```

— end example]

- (3.3) — Parameter declarations that differ only in that one is a function type and the other is a pointer to the same function type are equivalent. That is, the function type is adjusted to become a pointer to function type (11.3.5). [Example:

```

void h(int());
void h(int (*)());      // redeclaration of h(int())
void h(int x()) { }     // definition of h(int())
void h(int (*x)()) { } // ill-formed: redefinition of h(int())

```

— end example]

- (3.4) — Parameter declarations that differ only in the presence or absence of `const` and/or `volatile` are equivalent. That is, the `const` and `volatile` type-specifiers for each parameter type are ignored when determining which function is being declared, defined, or called. [Example:

```

typedef const int cInt;

int f (int);
int f (const int);      // redeclaration of f(int)
int f (int) { /* ... */ } // definition of f(int)
int f (cInt) { /* ... */ } // error: redefinition of f(int)

```

— end example]

Only the `const` and `volatile` type-specifiers at the outermost level of the parameter type specification are ignored in this fashion; `const` and `volatile` type-specifiers buried within a parameter type specification are significant and can be used to distinguish overloaded function declarations.¹²² In particular, for any type `T`, “pointer to `T`”, “pointer to `const T`”, and “pointer to `volatile T`” are considered distinct parameter types, as are “reference to `T`”, “reference to `const T`”, and “reference to `volatile T`”.

- (3.5) — Two parameter declarations that differ only in their default arguments are equivalent. [*Example*: Consider the following:

```
void f (int i, int j);
void f (int i, int j = 99);      // OK: redeclaration of f(int, int)
void f (int i = 88, int j);    // OK: redeclaration of f(int, int)
void f ();                      // OK: overloaded declaration of f

void prog () {
    f (1, 2);                   // OK: call f(int, int)
    f (1);                      // OK: call f(int, int)
    f ();                       // error: f(int, int) or f()?
}
```

— *end example*]

— *end note*]

16.2 Declaration matching

[*over.dcl*]

- ¹ Two function declarations of the same name refer to the same function if they are in the same scope and have equivalent parameter declarations (16.1) and equivalent trailing *requires-clauses*, if any (Clause 11). A function member of a derived class is *not* in the same scope as a function member of the same name in a base class. [*Example*:

```
struct B {
    int f(int);
};

struct D : B {
    int f(const char*);
};
```

Here `D::f(const char*)` hides `B::f(int)` rather than overloading it.

```
void h(D* pd) {
    pd->f(1);                    // error:
                                // D::f(const char*) hides B::f(int)
    pd->B::f(1);                // OK
    pd->f("Ben");              // OK, calls D::f
}
```

— *end example*]

- ² A locally declared function is not in the same scope as a function in a containing scope. [*Example*:

```
void f(const char*);
void g() {
    extern void f(int);
    f("asdf");                 // error: f(int) hides f(const char*)
                                // so there is no f(const char*) in this scope
}

void caller () {
    extern void callee(int, int);
    {
        extern void callee(int); // hides callee(int, int)
        callee(88, 99);          // error: only callee(int) in scope
    }
}
```

122) When a parameter type includes a function type, such as in the case of a parameter type that is a pointer to function, the `const` and `volatile` type-specifiers at the outermost level of the parameter type specifications for the inner function type are also ignored.

```
    }
}
```

— *end example*]

- 3 Different versions of an overloaded member function can be given different access rules. [*Example:*

```
class buffer {
private:
    char* p;
    int size;
protected:
    buffer(int s, char* store) { size = s; p = store; }
public:
    buffer(int s) { p = new char[size = s]; }
};
```

— *end example*]

16.3 Overload resolution

[**over.match**]

- 1 Overload resolution is a mechanism for selecting the best function to call given a list of expressions that are to be the arguments of the call and a set of *candidate functions* that can be called based on the context of the call. The selection criteria for the best function are the number of arguments, how well the arguments match the parameter-type-list of the candidate function, how well (for non-static member functions) the object matches the implicit object parameter, and certain other properties of the candidate function. [*Note:* The function selected by overload resolution is not guaranteed to be appropriate for the context. Other restrictions, such as the accessibility of the function, can make its use in the calling context ill-formed. — *end note*]

- 2 Overload resolution selects the function to call in seven distinct contexts within the language:

- (2.1) — invocation of a function named in the function call syntax (16.3.1.1.1);
- (2.2) — invocation of a function call operator, a pointer-to-function conversion function, a reference-to-pointer-to-function conversion function, or a reference-to-function conversion function on a class object named in the function call syntax (16.3.1.1.2);
- (2.3) — invocation of the operator referenced in an expression (16.3.1.2);
- (2.4) — invocation of a constructor for default- or direct-initialization (11.6) of a class object (16.3.1.3);
- (2.5) — invocation of a user-defined conversion for copy-initialization (11.6) of a class object (16.3.1.4);
- (2.6) — invocation of a conversion function for initialization of an object of a non-class type from an expression of class type (16.3.1.5); and
- (2.7) — invocation of a conversion function for conversion in which a reference (11.6.3) will be directly bound (16.3.1.6).

Each of these contexts defines the set of candidate functions and the list of arguments in its own unique way. But, once the candidate functions and argument lists have been identified, the selection of the best function is the same in all cases:

- (2.8) — First, a subset of the candidate functions (those that have the proper number of arguments and meet certain other conditions) is selected to form a set of viable functions (16.3.2).
 - (2.9) — Then the best viable function is selected based on the implicit conversion sequences (16.3.3.1) needed to match each argument to the corresponding parameter of each viable function.
- 3 If a best viable function exists and is unique, overload resolution succeeds and produces it as the result. Otherwise overload resolution fails and the invocation is ill-formed. When overload resolution succeeds, and the best viable function is not accessible (Clause 14) in the context in which it is used, the program is ill-formed.

16.3.1 Candidate functions and argument lists

[**over.match.funcs**]

- 1 The subclauses of 16.3.1 describe the set of candidate functions and the argument list submitted to overload resolution in each context in which overload resolution is used. The source transformations and constructions defined in these subclauses are only for the purpose of describing the overload resolution process. An implementation is not required to use such transformations and constructions.

- 2 The set of candidate functions can contain both member and non-member functions to be resolved against the same argument list. So that argument and parameter lists are comparable within this heterogeneous set, a member function is considered to have an extra first parameter, called the *implicit object parameter*, which represents the object for which the member function has been called. For the purposes of overload resolution, both static and non-static member functions have an implicit object parameter, but constructors do not.
- 3 Similarly, when appropriate, the context can construct an argument list that contains an *implied object argument* as the first argument in the list to denote the object to be operated on.
- 4 For non-static member functions, the type of the implicit object parameter is
- (4.1) — “lvalue reference to *cv X*” for functions declared without a *ref-qualifier* or with the *& ref-qualifier*
- (4.2) — “rvalue reference to *cv X*” for functions declared with the *&& ref-qualifier*

where *X* is the class of which the function is a member and *cv* is the cv-qualification on the member function declaration. [*Example*: For a `const` member function of class *X*, the extra parameter is assumed to have type “reference to `const X`”. — *end example*] For conversion functions, the function is considered to be a member of the class of the implied object argument for the purpose of defining the type of the implicit object parameter. For non-conversion functions introduced by a *using-declaration* into a derived class, the function is considered to be a member of the derived class for the purpose of defining the type of the implicit object parameter. For static member functions, the implicit object parameter is considered to match any object (since if the function is selected, the object is discarded). [*Note*: No actual type is established for the implicit object parameter of a static member function, and no attempt will be made to determine a conversion sequence for that parameter (16.3.3). — *end note*]

- 5 During overload resolution, the implied object argument is indistinguishable from other arguments. The implicit object parameter, however, retains its identity since no user-defined conversions can be applied to achieve a type match with it. For non-static member functions declared without a *ref-qualifier*, an additional rule applies:
- (5.1) — even if the implicit object parameter is not `const`-qualified, an rvalue can be bound to the parameter as long as in all other respects the argument can be converted to the type of the implicit object parameter. [*Note*: The fact that such an argument is an rvalue does not affect the ranking of implicit conversion sequences (16.3.3.2). — *end note*]
- 6 Because other than in list-initialization only one user-defined conversion is allowed in an implicit conversion sequence, special rules apply when selecting the best user-defined conversion (16.3.3, 16.3.3.1). [*Example*:

```
class T {
public:
    T();
};

class C : T {
public:
    C(int);
};
T a = 1;           // ill-formed: T(C(1)) not tried
```

— *end example*]

- 7 In each case where a candidate is a function template, candidate function template specializations are generated using template argument deduction (17.9.3, 17.9.2). If a constructor template or conversion function template has an *explicit-specifier* whose *constant-expression* is value-dependent (17.7.2), template argument deduction is performed first and then, if the context requires a candidate that is not explicit and the generated specialization is explicit (10.1.2), it will be removed from the candidate set. Those candidates are then handled as candidate functions in the usual way.¹²³ A given name can refer to one or more function templates and also to a set of overloaded non-template functions. In such a case, the candidate functions generated from each function template are combined with the set of non-template candidate functions.
- 8 A defaulted move special function (15.8) that is defined as deleted is excluded from the set of candidate functions in all contexts. A constructor inherited from class type *C* (15.6.3) that has a first parameter of type

¹²³) The process of argument deduction fully determines the parameter types of the function template specializations, i.e., the parameters of function template specializations contain no template parameter types. Therefore, except where specified otherwise, function template specializations and non-template functions (11.3.5) are treated equivalently for the remainder of overload resolution.

“reference to *cv1 P*” (including such a constructor instantiated from a template) is excluded from the set of candidate functions when constructing an object of type *cv2 D* if the argument list has exactly one argument and *C* is reference-related to *P* and *P* is reference-related to *D*. [Example:

```

struct A {
    A();
    A(A &&); // #1
    template<typename T> A(T &&); // #2
};
struct B : A {
    using A::A;
    B(const B &); // #3
    B(B &&) = default; // #4, implicitly deleted

    struct X { X(X &&) = delete; } x;
};
extern B b1;
B b2 = static_cast<B&&>(b1); // calls #3: #1, #2, and #4 are not viable
struct C { operator B&&(); };
B b3 = C(); // calls #3
— end example]

```

16.3.1.1 Function call syntax

[over.match.call]

- ¹ In a function call (8.5.1.2)

postfix-expression (*expression-list*_{opt})

if the *postfix-expression* denotes a set of overloaded functions and/or function templates, overload resolution is applied as specified in 16.3.1.1.1. If the *postfix-expression* denotes an object of class type, overload resolution is applied as specified in 16.3.1.1.2.

- ² If the *postfix-expression* denotes the address of a set of overloaded functions and/or function templates, overload resolution is applied using that set as described above. If the function selected by overload resolution is a non-static member function, the program is ill-formed. [Note: The resolution of the address of an overload set in other contexts is described in 16.4. — end note]

16.3.1.1.1 Call to named function

[over.call.func]

- ¹ Of interest in 16.3.1.1.1 are only those function calls in which the *postfix-expression* ultimately contains a name that denotes one or more functions that might be called. Such a *postfix-expression*, perhaps nested arbitrarily deep in parentheses, has one of the following forms:

postfix-expression:
postfix-expression . *id-expression*
postfix-expression -> *id-expression*
primary-expression

These represent two syntactic subcategories of function calls: qualified function calls and unqualified function calls.

- ² In qualified function calls, the name to be resolved is an *id-expression* and is preceded by an -> or . operator. Since the construct *A->B* is generally equivalent to *(*A).B*, the rest of Clause 16 assumes, without loss of generality, that all member function calls have been normalized to the form that uses an object and the . operator. Furthermore, Clause 16 assumes that the *postfix-expression* that is the left operand of the . operator has type “*cv T*” where *T* denotes a class.¹²⁴ Under this assumption, the *id-expression* in the call is looked up as a member function of *T* following the rules for looking up names in classes (13.2). The function declarations found by that lookup constitute the set of candidate functions. The argument list is the *expression-list* in the call augmented by the addition of the left operand of the . operator in the normalized member function call as the implied object argument (16.3.1).
- ³ In unqualified function calls, the name is not qualified by an -> or . operator and has the more general form of a *primary-expression*. The name is looked up in the context of the function call following the normal rules for name lookup in function calls (6.4). The function declarations found by that lookup constitute the set of candidate functions. Because of the rules for name lookup, the set of candidate functions consists

¹²⁴) Note that *cv*-qualifiers on the type of objects are significant in overload resolution for both *glvalue* and *class prvalue* objects.

(1) entirely of non-member functions or (2) entirely of member functions of some class T. In case (1), the argument list is the same as the *expression-list* in the call. In case (2), the argument list is the *expression-list* in the call augmented by the addition of an implied object argument as in a qualified function call. If the keyword **this** (12.2.2.1) is in scope and refers to class T, or a derived class of T, then the implied object argument is (***this**). If the keyword **this** is not in scope or refers to another class, then a contrived object of type T becomes the implied object argument.¹²⁵ If the argument list is augmented by a contrived object and overload resolution selects one of the non-static member functions of T, the call is ill-formed.

16.3.1.1.2 Call to object of class type [over.call.object]

¹ If the *postfix-expression* E in the function call syntax evaluates to a class object of type “cv T”, then the set of candidate functions includes at least the function call operators of T. The function call operators of T are obtained by ordinary lookup of the name `operator()` in the context of `(E).operator()`.

² In addition, for each non-explicit conversion function declared in T of the form

```
operator conversion-type-id ( ) cv-qualifier ref-qualifieropt noexcept-specifieropt attribute-specifier-seqopt ;
```

where *cv-qualifier* is the same cv-qualification as, or a greater cv-qualification than, *cv*, and where *conversion-type-id* denotes the type “pointer to function of (P₁, ..., P_n) returning R”, or the type “reference to pointer to function of (P₁, ..., P_n) returning R”, or the type “reference to function of (P₁, ..., P_n) returning R”, a *surrogate call function* with the unique name *call-function* and having the form

```
R call-function ( conversion-type-id F, P1 a1, ..., Pn an) { return F ( a1, ..., an); }
```

is also considered as a candidate function. Similarly, surrogate call functions are added to the set of candidate functions for each non-explicit conversion function declared in a base class of T provided the function is not hidden within T by another intervening declaration.¹²⁶

³ If such a surrogate call function is selected by overload resolution, the corresponding conversion function will be called to convert E to the appropriate function pointer or reference, and the function will then be invoked with the arguments of the call. If the conversion function cannot be called (e.g., because of an ambiguity), the program is ill-formed.

⁴ The argument list submitted to overload resolution consists of the argument expressions present in the function call syntax preceded by the implied object argument (E). [Note: When comparing the call against the function call operators, the implied object argument is compared against the implicit object parameter of the function call operator. When comparing the call against a surrogate call function, the implied object argument is compared against the first parameter of the surrogate call function. The conversion function from which the surrogate call function was derived will be used in the conversion sequence for that parameter since it converts the implied object argument to the appropriate function pointer or reference required by that first parameter. — end note] [Example:

```
int f1(int);
int f2(float);
typedef int (*fp1)(int);
typedef int (*fp2)(float);
struct A {
    operator fp1() { return f1; }
    operator fp2() { return f2; }
} a;
int i = a(1); // calls f1 via pointer returned from conversion function
```

— end example]

16.3.1.2 Operators in expressions [over.match.oper]

¹ If no operand of an operator in an expression has a type that is a class or an enumeration, the operator is assumed to be a built-in operator and interpreted according to 8.5. [Note: Because `.`, `.*`, and `::` cannot be overloaded, these operators are always built-in operators interpreted according to 8.5. `?:` cannot be overloaded, but the rules in this subclause are used to determine the conversions to be applied to the second and third operands when they have class or enumeration type (8.5.16). — end note] [Example:

¹²⁵) An implied object argument must be contrived to correspond to the implicit object parameter attributed to member functions during overload resolution. It is not used in the call to the selected function. Since the member functions all have the same implicit object parameter, the contrived object will not be the cause to select or reject a function.

¹²⁶) Note that this construction can yield candidate call functions that cannot be differentiated one from the other by overload resolution because they have identical declarations or differ only in their return type. The call will be ambiguous if overload resolution cannot select a match to the call that is uniquely better than such undifferentiable functions.

```

struct String {
    String (const String&);
    String (const char*);
    operator const char* ();
};
String operator + (const String&, const String&);

void f() {
    const char* p= "one" + "two"; // ill-formed because neither operand has class or enumeration type
    int I = 1 + 1;                // always evaluates to 2 even if class or enumeration types exist
                                // that would perform the operation.
}
— end example]

```

- ² If either operand has a type that is a class or an enumeration, a user-defined operator function might be declared that implements this operator or a user-defined conversion can be necessary to convert the operand to a type that is appropriate for a built-in operator. In this case, overload resolution is used to determine which operator function or built-in operator is to be invoked to implement the operator. Therefore, the operator notation is first transformed to the equivalent function-call notation as summarized in Table 12 (where @ denotes one of the operators covered in the specified subclause). However, the operands are sequenced in the order prescribed for the built-in operator (8.5).

Table 12 — Relationship between operator and function call notation

Subclause	Expression	As member function	As non-member function
16.5.1	@a	(a).operator@ ()	operator@(a)
16.5.2	a@b	(a).operator@ (b)	operator@(a, b)
16.5.3	a=b	(a).operator= (b)	
16.5.5	a[b]	(a).operator[] (b)	
16.5.6	a->	(a).operator->()	
16.5.7	a@	(a).operator@ (0)	operator@(a, 0)

- ³ For a unary operator @ with an operand of a type whose cv-unqualified version is T1, and for a binary operator @ with a left operand of a type whose cv-unqualified version is T1 and a right operand of a type whose cv-unqualified version is T2, four sets of candidate functions, designated *member candidates*, *non-member candidates*, *built-in candidates*, and *rewritten candidates*, are constructed as follows:
- (3.1) — If T1 is a complete class type or a class currently being defined, the set of member candidates is the result of the qualified lookup of T1::operator@ (16.3.1.1.1); otherwise, the set of member candidates is empty.
- (3.2) — The set of non-member candidates is the result of the unqualified lookup of operator@ in the context of the expression according to the usual rules for name lookup in unqualified function calls (6.4.2) except that all member functions are ignored. However, if no operand has a class type, only those non-member functions in the lookup set that have a first parameter of type T1 or “reference to cv T1”, when T1 is an enumeration type, or (if there is a right operand) a second parameter of type T2 or “reference to cv T2”, when T2 is an enumeration type, are candidate functions.
- (3.3) — For the operator ,, the unary operator &, or the operator ->, the built-in candidates set is empty. For all other operators, the built-in candidates include all of the candidate operator functions defined in 16.6 that, compared to the given operator,
- (3.3.1) — have the same operator name, and
- (3.3.2) — accept the same number of operands, and
- (3.3.3) — accept operand types to which the given operand or operands can be converted according to 16.3.3.1, and
- (3.3.4) — do not have the same parameter-type-list as any non-member candidate that is not a function template specialization.
- (3.4) — For the relational (8.5.9) and equality (8.5.10) operators, the rewritten candidates include all member, non-member, and built-in candidates for the operator <=> for which the rewritten expression (x <=> y)

@ 0 is well-formed using that `operator<=>`. For the relational (8.5.9), equality (8.5.10), and three-way comparison (8.5.8) operators, the rewritten candidates also include a synthesized candidate, with the order of the two parameters reversed, for each member, non-member, and built-in candidate for the operator `<=>` for which the rewritten expression `0 @ (y <=> x)` is well-formed using that `operator<=>`. [Note: A candidate synthesized from a member candidate has its implicit object parameter as the second parameter, thus implicit conversions are considered for the first, but not for the second, parameter. — end note] In each case, rewritten candidates are not considered in the context of the rewritten expression. For all other operators, the rewritten candidate set is empty.

4 For the built-in assignment operators, conversions of the left operand are restricted as follows:

- (4.1) — no temporaries are introduced to hold the left operand, and
- (4.2) — no user-defined conversions are applied to the left operand to achieve a type match with the left-most parameter of a built-in candidate.

5 For all other operators, no such restrictions apply.

6 The set of candidate functions for overload resolution for some operator @ is the union of the member candidates, the non-member candidates, the built-in candidates, and the rewritten candidates for that operator @.

7 The argument list contains all of the operands of the operator. The best function from the set of candidate functions is selected according to 16.3.2 and 16.3.3.¹²⁷ [Example:

```
struct A {
    operator int();
};
A operator+(const A&, const A&);
void m() {
    A a, b;
    a + b;                // operator+(a, b) chosen over int(a) + int(b)
}
```

— end example]

8 If a rewritten candidate is selected by overload resolution for an operator @, `x @ y` is interpreted as the rewritten expression: `0 @ (y <=> x)` if the selected candidate is a synthesized candidate with reversed order of parameters, or `(x <=> y) @ 0` otherwise, using the selected rewritten `operator<=>` candidate.

9 If a built-in candidate is selected by overload resolution, the operands of class type are converted to the types of the corresponding parameters of the selected operation function, except that the second standard conversion sequence of a user-defined conversion sequence (16.3.3.1.2) is not applied. Then the operator is treated as the corresponding built-in operator and interpreted according to 8.5. [Example:

```
struct X {
    operator double();
};

struct Y {
    operator int*();
};

int *a = Y() + 100.0;    // error: pointer arithmetic requires integral operand
int *b = Y() + X();    // error: pointer arithmetic requires integral operand
```

— end example]

10 The second operand of operator `->` is ignored in selecting an `operator->` function, and is not an argument when the `operator->` function is called. When `operator->` returns, the operator `->` is applied to the value returned, with the original second operand.¹²⁸

11 If the operator is the operator `,`, the unary operator `&`, or the operator `->`, and there are no viable functions, then the operator is assumed to be the built-in operator and interpreted according to 8.5.

12 [Note: The lookup rules for operators in expressions are different than the lookup rules for operator function names in a function call, as shown in the following example:

¹²⁷) If the set of candidate functions is empty, overload resolution is unsuccessful.

¹²⁸) If the value returned by the `operator->` function has class type, this may result in selecting and calling another `operator->` function. The process repeats until an `operator->` function returns a value of non-class type.

```

struct A { };
void operator + (A, A);

struct B {
    void operator + (B);
    void f ();
};

A a;

void B::f() {
    operator+ (a,a);           // error: global operator hidden by member
    a + a;                    // OK: calls global operator+
}
— end note]

```

16.3.1.3 Initialization by constructor [over.match.ctor]

- ¹ When objects of class type are direct-initialized (11.6), copy-initialized from an expression of the same or a derived class type (11.6), or default-initialized (11.6), overload resolution selects the constructor. For direct-initialization or default-initialization that is not in the context of copy-initialization, the candidate functions are all the constructors of the class of the object being initialized. For copy-initialization (including default initialization in the context of copy-initialization), the candidate functions are all the converting constructors (15.3.1) of that class. The argument list is the *expression-list* or *assignment-expression* of the *initializer*.

16.3.1.4 Copy-initialization of class by user-defined conversion [over.match.copy]

- ¹ Under the conditions specified in 11.6, as part of a copy-initialization of an object of class type, a user-defined conversion can be invoked to convert an initializer expression to the type of the object being initialized. Overload resolution is used to select the user-defined conversion to be invoked. [Note: The conversion performed for indirect binding to a reference to a possibly cv-qualified class type is determined in terms of a corresponding non-reference copy-initialization. — end note] Assuming that “*cv1 T*” is the type of the object being initialized, with *T* a class type, the candidate functions are selected as follows:
- (1.1) — The converting constructors (15.3.1) of *T* are candidate functions.
 - (1.2) — When the type of the initializer expression is a class type “*cv S*”, the non-explicit conversion functions of *S* and its base classes are considered. When initializing a temporary object (12.2) to be bound to the first parameter of a constructor where the parameter is of type “reference to possibly *cv*-qualified *T*” and the constructor is called with a single argument in the context of direct-initialization of an object of type “*cv2 T*”, explicit conversion functions are also considered. Those that are not hidden within *S* and yield a type whose cv-unqualified version is the same type as *T* or is a derived class thereof are candidate functions. A call to a conversion function returning “reference to *X*” is a glvalue of type *X*, and such a conversion function is therefore considered to yield *X* for this process of selecting candidate functions.
- ² In both cases, the argument list has one argument, which is the initializer expression. [Note: This argument will be compared against the first parameter of the constructors and against the implicit object parameter of the conversion functions. — end note]

16.3.1.5 Initialization by conversion function [over.match.conv]

- ¹ Under the conditions specified in 11.6, as part of an initialization of an object of non-class type, a conversion function can be invoked to convert an initializer expression of class type to the type of the object being initialized. Overload resolution is used to select the conversion function to be invoked. Assuming that “*cv1 T*” is the type of the object being initialized, and “*cv S*” is the type of the initializer expression, with *S* a class type, the candidate functions are selected as follows:
- (1.1) — The conversion functions of *S* and its base classes are considered. Those non-explicit conversion functions that are not hidden within *S* and yield type *T* or a type that can be converted to type *T* via a standard conversion sequence (16.3.3.1.1) are candidate functions. For direct-initialization, those explicit conversion functions that are not hidden within *S* and yield type *T* or a type that can be converted to type *T* with a qualification conversion (7.5) are also candidate functions. Conversion functions that return a cv-qualified type are considered to yield the cv-unqualified version of that type

for this process of selecting candidate functions. A call to a conversion function returning “reference to X” is a glvalue of type X, and such a conversion function is therefore considered to yield X for this process of selecting candidate functions.

- ² The argument list has one argument, which is the initializer expression. [*Note*: This argument will be compared against the implicit object parameter of the conversion functions. — *end note*]

16.3.1.6 Initialization by conversion function for direct reference binding [over.match.ref]

- ¹ Under the conditions specified in 11.6.3, a reference can be bound directly to the result of applying a conversion function to an initializer expression. Overload resolution is used to select the conversion function to be invoked. Assuming that “reference to *cv1* T” is the type of the reference being initialized, and “*cv* S” is the type of the initializer expression, with S a class type, the candidate functions are selected as follows:

- (1.1) — The conversion functions of S and its base classes are considered. Those non-explicit conversion functions that are not hidden within S and yield type “lvalue reference to *cv2* T2” (when initializing an lvalue reference or an rvalue reference to function) or “*cv2* T2” or “rvalue reference to *cv2* T2” (when initializing an rvalue reference or an lvalue reference to function), where “*cv1* T” is reference-compatible (11.6.3) with “*cv2* T2”, are candidate functions. For direct-initialization, those explicit conversion functions that are not hidden within S and yield type “lvalue reference to *cv2* T2” or “*cv2* T2” or “rvalue reference to *cv2* T2”, respectively, where T2 is the same type as T or can be converted to type T with a qualification conversion (7.5), are also candidate functions.
- ² The argument list has one argument, which is the initializer expression. [*Note*: This argument will be compared against the implicit object parameter of the conversion functions. — *end note*]

16.3.1.7 Initialization by list-initialization [over.match.list]

- ¹ When objects of non-aggregate class type T are list-initialized such that 11.6.4 specifies that overload resolution is performed according to the rules in this subclause, overload resolution selects the constructor in two phases:

- (1.1) — Initially, the candidate functions are the initializer-list constructors (11.6.4) of the class T and the argument list consists of the initializer list as a single argument.
- (1.2) — If no viable initializer-list constructor is found, overload resolution is performed again, where the candidate functions are all the constructors of the class T and the argument list consists of the elements of the initializer list.

If the initializer list has no elements and T has a default constructor, the first phase is omitted. In copy-list-initialization, if an explicit constructor is chosen, the initialization is ill-formed. [*Note*: This differs from other situations (16.3.1.3, 16.3.1.4), where only converting constructors are considered for copy-initialization. This restriction only applies if this initialization is part of the final result of overload resolution. — *end note*]

16.3.1.8 Class template argument deduction [over.match.class.deduct]

- ¹ When resolving a placeholder for a deduced class type (10.1.7.5) where the *template-name* names a primary class template C, a set of functions and function templates is formed comprising:

- (1.1) — If C is defined, for each constructor of C, a function template with the following properties:
- (1.1.1) — The template parameters are the template parameters of C followed by the template parameters (including default template arguments) of the constructor, if any.
- (1.1.2) — The types of the function parameters are those of the constructor.
- (1.1.3) — The return type is the class template specialization designated by C and template arguments corresponding to the template parameters of C.
- (1.2) — If C is not defined or does not declare any constructors, an additional function template derived as above from a hypothetical constructor C().
- (1.3) — An additional function template derived as above from a hypothetical constructor C(C), called the *copy deduction candidate*.
- (1.4) — For each *deduction-guide*, a function or function template with the following properties:
- (1.4.1) — The template parameters, if any, and function parameters are those of the *deduction-guide*.
- (1.4.2) — The return type is the *simple-template-id* of the *deduction-guide*.

- ² Initialization and overload resolution are performed as described in 11.6 and 16.3.1.3, 16.3.1.4, or 16.3.1.7 (as appropriate for the type of initialization performed) for an object of a hypothetical class type, where the

selected functions and function templates are considered to be the constructors of that class type for the purpose of forming an overload set, and the initializer is provided by the context in which class template argument deduction was performed. As an exception, the first phase in 16.3.1.7 (considering initializer-list constructors) is omitted if the initializer list consists of a single expression of type *cv* U, where U is a specialization of C or a class derived from a specialization of C. If the function or function template was generated from a constructor or *deduction-guide* that had an *explicit-specifier*, each such notional constructor is considered to have that same *explicit-specifier*. All such notional constructors are considered to be public members of the hypothetical class type.

3 [Example:

```

template <class T> struct A {
    explicit A(const T&, ...) noexcept;           // #1
    A(T&&, ...);                                  // #2
};

int i;
A a1 = { i, i };    // error: explicit constructor #1 selected in copy-list-initialization during deduction,
                   // cannot deduce from non-forwarding rvalue reference in #2

A a2{i, i};        // OK, #1 deduces to A<int> and also initializes
A a3{0, i};        // OK, #2 deduces to A<int> and also initializes
A a4 = {0, i};     // OK, #2 deduces to A<int> and also initializes

template <class T> A(const T&, const T&) -> A<T&&>; // #3
template <class T> explicit A(T&&, T&&) -> A<T>;    // #4

A a5 = {0, 1};    // error: explicit deduction guide #4 selected in copy-list-initialization during deduction
A a6{0,1};        // OK, #4 deduces to A<int> and #2 initializes
A a7 = {0, i};    // error: #3 deduces to A<int&&>, #1 and #2 declare same constructor
A a8{0,i};        // error: #3 deduces to A<int&&>, #1 and #2 declare same constructor

template <class T> struct B {
    template <class U> using TA = T;
    template <class U> B(U, TA<U>);
};

B b{(int*)0, (char*)0};    // OK, deduces B<char*>

```

— end example]

16.3.2 Viable functions

[over.match.viable]

- 1 From the set of candidate functions constructed for a given context (16.3.1), a set of viable functions is chosen, from which the best function will be selected by comparing argument conversion sequences and associated constraints (17.4.2) for the best fit (16.3.3). The selection of viable functions considers associated constraints, if any, and relationships between arguments and function parameters other than the ranking of conversion sequences.
- 2 First, to be a viable function, a candidate function shall have enough parameters to agree in number with the arguments in the list.
 - (2.1) — If there are m arguments in the list, all candidate functions having exactly m parameters are viable.
 - (2.2) — A candidate function having fewer than m parameters is viable only if it has an ellipsis in its parameter list (11.3.5). For the purposes of overload resolution, any argument for which there is no corresponding parameter is considered to “match the ellipsis” (16.3.3.1.3).
 - (2.3) — A candidate function having more than m parameters is viable only if the $(m+1)^{\text{st}}$ parameter has a default argument (11.3.6).¹²⁹ For the purposes of overload resolution, the parameter list is truncated on the right, so that there are exactly m parameters.
- 3 Second, for a function to be viable, if it has associated constraints (17.4.2), those constraints shall be satisfied (17.4.1).

¹²⁹ According to 11.3.6, parameters following the $(m+1)^{\text{st}}$ parameter must also have default arguments.

- 4 Third, for **F** to be a viable function, there shall exist for each argument an implicit conversion sequence (16.3.3.1) that converts that argument to the corresponding parameter of **F**. If the parameter has reference type, the implicit conversion sequence includes the operation of binding the reference, and the fact that an lvalue reference to non-`const` cannot be bound to an rvalue and that an rvalue reference cannot be bound to an lvalue can affect the viability of the function (see 16.3.3.1.4).

16.3.3 Best viable function

[**over.match.best**]

1 Define $ICS_i(\mathbf{F})$ as follows:

- (1.1) — If **F** is a static member function, $ICS_1(\mathbf{F})$ is defined such that $ICS_1(\mathbf{F})$ is neither better nor worse than $ICS_1(\mathbf{G})$ for any function **G**, and, symmetrically, $ICS_1(\mathbf{G})$ is neither better nor worse than $ICS_1(\mathbf{F})$;¹³⁰ otherwise,
- (1.2) — let $ICS_i(\mathbf{F})$ denote the implicit conversion sequence that converts the i -th argument in the list to the type of the i -th parameter of viable function **F**. 16.3.3.1 defines the implicit conversion sequences and 16.3.3.2 defines what it means for one implicit conversion sequence to be a better conversion sequence or worse conversion sequence than another.

Given these definitions, a viable function **F1** is defined to be a *better* function than another viable function **F2** if for all arguments i , $ICS_i(\mathbf{F1})$ is not a worse conversion sequence than $ICS_i(\mathbf{F2})$, and then

- (1.3) — for some argument j , $ICS_j(\mathbf{F1})$ is a better conversion sequence than $ICS_j(\mathbf{F2})$, or, if not that,
- (1.4) — the context is an initialization by user-defined conversion (see 11.6, 16.3.1.5, and 16.3.1.6) and the standard conversion sequence from the return type of **F1** to the destination type (i.e., the type of the entity being initialized) is a better conversion sequence than the standard conversion sequence from the return type of **F2** to the destination type [*Example*:

```
struct A {
    A();
    operator int();
    operator double();
} a;
int i = a;           // a.operator int() followed by no conversion is better than
                    // a.operator double() followed by a conversion to int
float x = a;        // ambiguous: both possibilities require conversions,
                    // and neither is better than the other
```

— *end example*] or, if not that,

- (1.5) — the context is an initialization by conversion function for direct reference binding (16.3.1.6) of a reference to function type, the return type of **F1** is the same kind of reference (lvalue or rvalue) as the reference being initialized, and the return type of **F2** is not [*Example*:

```
template <class T> struct A {
    operator T&(); // #1
    operator T&&(); // #2
};
typedef int Fn();
A<Fn> a;
Fn& lf = a; // calls #1
Fn&& rf = a; // calls #2
```

— *end example*] or, if not that,

- (1.6) — **F1** is not a function template specialization and **F2** is a function template specialization, or, if not that,
- (1.7) — **F1** and **F2** are function template specializations, and the function template for **F1** is more specialized than the template for **F2** according to the partial ordering rules described in 17.6.6.2, or, if not that,
- (1.8) — **F1** and **F2** are non-template functions with the same parameter-type-lists, and **F1** is more constrained than **F2** according to the partial ordering of constraints described in 17.4.4, or if not that,
- (1.9) — **F1** is a constructor for a class **D**, **F2** is a constructor for a base class **B** of **D**, and for all arguments the corresponding parameters of **F1** and **F2** have the same type. [*Example*:

¹³⁰ If a function is a static member function, this definition means that the first argument, the implied object argument, has no effect in the determination of whether the function is better or worse than any other function.


```

struct A {
    A(int = 0);
};

struct B: A {
    using A::A;
    B();
};

int main() {
    B b;           // OK, B::B()
}

```

— *end example*] or, if not that,

- (1.10) — F2 is a rewritten candidate (16.3.1.2) and F1 is not [*Example*:

```

struct S {
    auto operator<=>(const S&, const S&) = default; // #1
    bool operator<(const S&, const S&);           // #2
};
bool b = S() < S();                               // calls #2

```

— *end example*] or, if not that,

- (1.11) — F1 and F2 are rewritten candidates, and F2 is a synthesized candidate with reversed order of parameters and F1 is not [*Example*:

```

struct S {
    std::weak_ordering operator<=>(const S&, int); // #1
    std::weak_ordering operator<=>(int, const S&); // #2
};
bool b = 1 < S();                               // calls #2

```

— *end example*] or, if not that

- (1.12) — F1 is generated from a *deduction-guide* (16.3.1.8) and F2 is not, or, if not that,

- (1.13) — F1 is the copy deduction candidate (16.3.1.8) and F2 is not, or, if not that,

- (1.14) — F1 is generated from a non-template constructor and F2 is generated from a constructor template. [*Example*:

```

template <class T> struct A {
    using value_type = T;
    A(value_type); // #1
    A(const A&); // #2
    A(T, T, int); // #3
    template<class U>
        A(int, T, U); // #4
    // #5 is the copy deduction candidate, A(A)
};

A x(1, 2, 3); // uses #3, generated from a non-template constructor

template <class T>
A(T) -> A<T>; // #6, less specialized than #5

A a(42); // uses #6 to deduce A<int> and #1 to initialize
A b = a; // uses #5 to deduce A<int> and #2 to initialize

template <class T>
A(A<T>) -> A<A<T>>; // #7, as specialized as #5

A b2 = a; // uses #7 to deduce A<A<int>> and #1 to initialize

```

— *end example*]

- 2 If there is exactly one viable function that is a better function than all other viable functions, then it is the one selected by overload resolution; otherwise the call is ill-formed.¹³¹ [Example:

```
void Fcn(const int*, short);
void Fcn(int*, int);

int i;
short s = 0;

void f() {
    Fcn(&i, s);           // is ambiguous because &i → int* is better than &i → const int*
                        // but s → short is also better than s → int

    Fcn(&i, 1L);         // calls Fcn(int*, int), because &i → int* is better than &i → const int*
                        // and 1L → short and 1L → int are indistinguishable

    Fcn(&i, 'c');        // calls Fcn(int*, int), because &i → int* is better than &i → const int*
                        // and c → int is better than c → short
}
```

— end example]

- 3 If the best viable function resolves to a function for which multiple declarations were found, and if at least two of these declarations — or the declarations they refer to in the case of *using-declarations* — specify a default argument that made the function viable, the program is ill-formed. [Example:

```
namespace A {
    extern "C" void f(int = 5);
}
namespace B {
    extern "C" void f(int = 5);
}

using A::f;
using B::f;

void use() {
    f(3);                // OK, default argument was not used for viability
    f();                 // error: found default argument twice
}
```

— end example]

16.3.3.1 Implicit conversion sequences

[over.best.ics]

- ¹ An *implicit conversion sequence* is a sequence of conversions used to convert an argument in a function call to the type of the corresponding parameter of the function being called. The sequence of conversions is an implicit conversion as defined in [Clause 7](#), which means it is governed by the rules for initialization of an object or reference by a single expression ([11.6](#), [11.6.3](#)).
- ² Implicit conversion sequences are concerned only with the type, cv-qualification, and value category of the argument and how these are converted to match the corresponding properties of the parameter. Other properties, such as the lifetime, storage class, alignment, accessibility of the argument, whether the argument is a bit-field, and whether a function is deleted ([11.4.3](#)), are ignored. So, although an implicit conversion sequence can be defined for a given argument-parameter pair, the conversion from the argument to the parameter might still be ill-formed in the final analysis.
- ³ A well-formed implicit conversion sequence is one of the following forms:
- (3.1) — a standard conversion sequence ([16.3.3.1.1](#)),
 - (3.2) — a user-defined conversion sequence ([16.3.3.1.2](#)), or
 - (3.3) — an ellipsis conversion sequence ([16.3.3.1.3](#)).

¹³¹ The algorithm for selecting the best viable function is linear in the number of viable functions. Run a simple tournament to find a function W that is not worse than any opponent it faced. Although another function F that W did not face might be at least as good as W, F cannot be the best function because at some point in the tournament F encountered another function G such that F was not better than G. Hence, W is either the best function or there is no best function. So, make a second pass over the viable functions to verify that W is better than all other functions.

4 However, if the target is

- (4.1) — the first parameter of a constructor or
 - (4.2) — the implicit object parameter of a user-defined conversion function
- and the constructor or user-defined conversion function is a candidate by
- (4.3) — 16.3.1.3, when the argument is the temporary in the second step of a class copy-initialization,
 - (4.4) — 16.3.1.4, 16.3.1.5, or 16.3.1.6 (in all cases), or
 - (4.5) — the second phase of 16.3.1.7 when the initializer list has exactly one element that is itself an initializer list, and the target is the first parameter of a constructor of class X, and the conversion is to X or reference to cv X,

user-defined conversion sequences are not considered. [Note: These rules prevent more than one user-defined conversion from being applied during overload resolution, thereby avoiding infinite recursion. — end note]

[Example:

```
struct Y { Y(int); };
struct A { operator int(); };
Y y1 = A();           // error: A::operator int() is not a candidate
```

```
struct X { X(); };
struct B { operator X(); };
B b;
X x{{b}};           // error: B::operator X() is not a candidate
```

— end example]

- 5 For the case where the parameter type is a reference, see 16.3.3.1.4.
- 6 When the parameter type is not a reference, the implicit conversion sequence models a copy-initialization of the parameter from the argument expression. The implicit conversion sequence is the one required to convert the argument expression to a prvalue of the type of the parameter. [Note: When the parameter has a class type, this is a conceptual conversion defined for the purposes of Clause 16; the actual initialization is defined in terms of constructors and is not a conversion. — end note] Any difference in top-level cv-qualification is subsumed by the initialization itself and does not constitute a conversion. [Example: A parameter of type A can be initialized from an argument of type const A. The implicit conversion sequence for that case is the identity sequence; it contains no “conversion” from const A to A. — end example] When the parameter has a class type and the argument expression has the same type, the implicit conversion sequence is an identity conversion. When the parameter has a class type and the argument expression has a derived class type, the implicit conversion sequence is a derived-to-base conversion from the derived class to the base class. [Note: There is no such standard conversion; this derived-to-base conversion exists only in the description of implicit conversion sequences. — end note] A derived-to-base conversion has Conversion rank (16.3.3.1.1).
- 7 In all contexts, when converting to the implicit object parameter or when converting to the left operand of an assignment operation only standard conversion sequences are allowed.
- 8 If no conversions are required to match an argument to a parameter type, the implicit conversion sequence is the standard conversion sequence consisting of the identity conversion (16.3.3.1.1).
- 9 If no sequence of conversions can be found to convert an argument to a parameter type, an implicit conversion sequence cannot be formed.
- 10 If several different sequences of conversions exist that each convert the argument to the parameter type, the implicit conversion sequence associated with the parameter is defined to be the unique conversion sequence designated the *ambiguous conversion sequence*. For the purpose of ranking implicit conversion sequences as described in 16.3.3.2, the ambiguous conversion sequence is treated as a user-defined conversion sequence that is indistinguishable from any other user-defined conversion sequence. [Note: This rule prevents a function from becoming non-viable because of an ambiguous conversion sequence for one of its parameters. [Example:

```
class B;
class A { A (B&);};
class B { operator A (); };
class C { C (B&); };
void f(A) { }
void f(C) { }
B b;
```

```

f(b);           // ill-formed: ambiguous because there is a conversion b → C (via constructor)
                // and an (ambiguous) conversion b → A (via constructor or conversion function)

void f(B) { }
f(b);           // OK, unambiguous

```

— end example] — end note] If a function that uses the ambiguous conversion sequence is selected as the best viable function, the call will be ill-formed because the conversion of one of the arguments in the call is ambiguous.

- ¹¹ The three forms of implicit conversion sequences mentioned above are defined in the following subclauses.

16.3.3.1.1 Standard conversion sequences [over.ics.scs]

- ¹ Table 13 summarizes the conversions defined in Clause 7 and partitions them into four disjoint categories: Lvalue Transformation, Qualification Adjustment, Promotion, and Conversion. [Note: These categories are orthogonal with respect to value category, cv-qualification, and data representation: the Lvalue Transformations do not change the cv-qualification or data representation of the type; the Qualification Adjustments do not change the value category or data representation of the type; and the Promotions and Conversions do not change the value category or cv-qualification of the type. — end note]
- ² [Note: As described in Clause 7, a standard conversion sequence is either the Identity conversion by itself (that is, no conversion) or consists of one to three conversions from the other four categories. If there are two or more conversions in the sequence, the conversions are applied in the canonical order: **Lvalue Transformation, Promotion or Conversion, Qualification Adjustment**. — end note]
- ³ Each conversion in Table 13 also has an associated rank (Exact Match, Promotion, or Conversion). These are used to rank standard conversion sequences (16.3.3.2). The rank of a conversion sequence is determined by considering the rank of each conversion in the sequence and the rank of any reference binding (16.3.3.1.4). If any of those has Conversion rank, the sequence has Conversion rank; otherwise, if any of those has Promotion rank, the sequence has Promotion rank; otherwise, the sequence has Exact Match rank.

Table 13 — Conversions

Conversion	Category	Rank	Subclause
No conversions required	Identity		
Lvalue-to-rvalue conversion	Lvalue Transformation	Exact Match	7.1
Array-to-pointer conversion			7.2
Function-to-pointer conversion			7.3
Qualification conversions	Qualification Adjustment		7.5
Function pointer conversion			7.13
Integral promotions	Promotion	Promotion	7.6
Floating-point promotion			7.7
Integral conversions	Conversion	Conversion	7.8
Floating-point conversions			7.9
Floating-integral conversions			7.10
Pointer conversions			7.11
Pointer-to-member conversions			7.12
Boolean conversions			7.14

16.3.3.1.2 User-defined conversion sequences [over.ics.user]

- ¹ A user-defined conversion sequence consists of an initial standard conversion sequence followed by a user-defined conversion (15.3) followed by a second standard conversion sequence. If the user-defined conversion is specified by a constructor (15.3.1), the initial standard conversion sequence converts the source type to the type required by the argument of the constructor. If the user-defined conversion is specified by a conversion function (15.3.2), the initial standard conversion sequence converts the source type to the implicit object parameter of the conversion function.
- ² The second standard conversion sequence converts the result of the user-defined conversion to the target type for the sequence. Since an implicit conversion sequence is an initialization, the special rules for initialization by user-defined conversion apply when selecting the best user-defined conversion for a user-defined conversion sequence (see 16.3.3 and 16.3.3.1).

- 3 If the user-defined conversion is specified by a specialization of a conversion function template, the second standard conversion sequence shall have exact match rank.
- 4 A conversion of an expression of class type to the same class type is given Exact Match rank, and a conversion of an expression of class type to a base class of that type is given Conversion rank, in spite of the fact that a constructor (i.e., a user-defined conversion function) is called for those cases.

16.3.3.1.3 Ellipsis conversion sequences [over.ics.ellipsis]

- 1 An ellipsis conversion sequence occurs when an argument in a function call is matched with the ellipsis parameter specification of the function called (see 8.5.1.2).

16.3.3.1.4 Reference binding [over.ics.ref]

- 1 When a parameter of reference type binds directly (11.6.3) to an argument expression, the implicit conversion sequence is the identity conversion, unless the argument expression has a type that is a derived class of the parameter type, in which case the implicit conversion sequence is a derived-to-base Conversion (16.3.3.1).

[Example:

```
struct A {};
struct B : public A {} b;
int f(A&);
int f(B&);
int i = f(b);           // calls f(B&), an exact match, rather than f(A&), a conversion
```

— end example] If the parameter binds directly to the result of applying a conversion function to the argument expression, the implicit conversion sequence is a user-defined conversion sequence (16.3.3.1.2), with the second standard conversion sequence either an identity conversion or, if the conversion function returns an entity of a type that is a derived class of the parameter type, a derived-to-base conversion.

- 2 When a parameter of reference type is not bound directly to an argument expression, the conversion sequence is the one required to convert the argument expression to the referenced type according to 16.3.3.1. Conceptually, this conversion sequence corresponds to copy-initializing a temporary of the referenced type with the argument expression. Any difference in top-level cv-qualification is subsumed by the initialization itself and does not constitute a conversion.
- 3 Except for an implicit object parameter, for which see 16.3.1, a standard conversion sequence cannot be formed if it requires binding an lvalue reference other than a reference to a non-volatile `const` type to an rvalue or binding an rvalue reference to an lvalue other than a function lvalue. [Note: This means, for example, that a candidate function cannot be a viable function if it has a non-`const` lvalue reference parameter (other than the implicit object parameter) and the corresponding argument would require a temporary to be created to initialize the lvalue reference (see 11.6.3). — end note]
- 4 Other restrictions on binding a reference to a particular argument that are not based on the types of the reference and the argument do not affect the formation of a standard conversion sequence, however. [Example: A function with an “lvalue reference to `int`” parameter can be a viable candidate even if the corresponding argument is an `int` bit-field. The formation of implicit conversion sequences treats the `int` bit-field as an `int` lvalue and finds an exact match with the parameter. If the function is selected by overload resolution, the call will nonetheless be ill-formed because of the prohibition on binding a non-`const` lvalue reference to a bit-field (11.6.3). — end example]

16.3.3.1.5 List-initialization sequence [over.ics.list]

- 1 When an argument is an initializer list (11.6.4), it is not an expression and special rules apply for converting it to a parameter type.
- 2 If the initializer list is a *designated-initializer-list*, a conversion is only possible if the parameter has an aggregate type that can be initialized from the initializer list according to the rules for aggregate initialization (11.6.1), in which case the implicit conversion sequence is a user-defined conversion sequence whose second standard conversion sequence is an identity conversion. [Note: Aggregate initialization does not require that the members are declared in designation order. If, after overload resolution, the order does not match for the selected overload, the initialization of the parameter will be ill-formed (11.6.4). [Example:

```
struct A { int x, y; };
struct B { int y, x; };
void f(A a, int);           // #1
void f(B b, ...);          // #2
void g(A a);               // #3
```

```

void g(B b);           // #4
void h() {
    f({.x = 1, .y = 2}, 0); // OK; calls #1
    f({.y = 2, .x = 1}, 0); // error: selects #1, initialization of a fails
                                // due to non-matching member order (11.6.4)
    g({.x = 1, .y = 2});   // error: ambiguous between #3 and #4
}

```

— end example] — end note]

- 3 Otherwise, if the parameter type is an aggregate class *X* and the initializer list has a single element of type *cv U*, where *U* is *X* or a class derived from *X*, the implicit conversion sequence is the one required to convert the element to the parameter type.
- 4 Otherwise, if the parameter type is a character array¹³² and the initializer list has a single element that is an appropriately-typed string literal (11.6.2), the implicit conversion sequence is the identity conversion.
- 5 Otherwise, if the parameter type is `std::initializer_list<X>` and all the elements of the initializer list can be implicitly converted to *X*, the implicit conversion sequence is the worst conversion necessary to convert an element of the list to *X*, or if the initializer list has no elements, the identity conversion. This conversion can be a user-defined conversion even in the context of a call to an initializer-list constructor. [Example:

```

void f(std::initializer_list<int>);
f( {} ); // OK: f(initializer_list<int>) identity conversion
f( {1,2,3} ); // OK: f(initializer_list<int>) identity conversion
f( {'a','b'} ); // OK: f(initializer_list<int>) integral promotion
f( {1.0} ); // error: narrowing

```

```

struct A {
    A(std::initializer_list<double>); // #1
    A(std::initializer_list<complex<double>>); // #2
    A(std::initializer_list<std::string>); // #3
};
A a{ 1.0,2.0 }; // OK, uses #1

```

```

void g(A);
g({ "foo", "bar" }); // OK, uses #3

```

```

typedef int IA[3];
void h(const IA&);
h({ 1, 2, 3 }); // OK: identity conversion

```

— end example]

- 6 Otherwise, if the parameter type is “array of *N X*”, if there exists an implicit conversion sequence for each element of the array from the corresponding element of the initializer list (or from `{}` if there is no such element), the implicit conversion sequence is the worst such implicit conversion sequence.
- 7 Otherwise, if the parameter is a non-aggregate class *X* and overload resolution per 16.3.1.7 chooses a single best constructor *C* of *X* to perform the initialization of an object of type *X* from the argument initializer list:
 - (7.1) — If *C* is not an initializer-list constructor and the initializer list has a single element of type *cv U*, where *U* is *X* or a class derived from *X*, the implicit conversion sequence has Exact Match rank if *U* is *X*, or Conversion rank if *U* is derived from *X*.
 - (7.2) — Otherwise, the implicit conversion sequence is a user-defined conversion sequence with the second standard conversion sequence an identity conversion.

If multiple constructors are viable but none is better than the others, the implicit conversion sequence is the ambiguous conversion sequence. User-defined conversions are allowed for conversion of the initializer list elements to the constructor parameter types except as noted in 16.3.3.1. [Example:

```

struct A {
    A(std::initializer_list<int>);
};
void f(A);
f( {'a', 'b'} ); // OK: f(A(std::initializer_list<int>)) user-defined conversion

```

¹³²⁾ Since there are no parameters of array type, this will only occur as the referenced type of a reference parameter.

```

struct B {
    B(int, double);
};
void g(B);
g( {'a', 'b'} );           // OK: g(B(int, double)) user-defined conversion
g( {1.0, 1.0} );          // error: narrowing

void f(B);
f( {'a', 'b'} );          // error: ambiguous f(A) or f(B)

struct C {
    C(std::string);
};
void h(C);
h( {"foo"} );             // OK: h(C(std::string("foo")))

struct D {
    D(A, C);
};
void i(D);
i( { {1,2}, {"bar"} } ); // OK: i(D(A(std::initializer_list<int>{1,2}), C(std::string("bar"))))

```

— end example]

- ⁸ Otherwise, if the parameter has an aggregate type which can be initialized from the initializer list according to the rules for aggregate initialization (11.6.1), the implicit conversion sequence is a user-defined conversion sequence with the second standard conversion sequence an identity conversion. [Example:

```

struct A {
    int m1;
    double m2;
};

void f(A);
f( {'a', 'b'} );           // OK: f(A(int,double)) user-defined conversion
f( {1.0} );                // error: narrowing

```

— end example]

- ⁹ Otherwise, if the parameter is a reference, see 16.3.3.1.4. [Note: The rules in this subclause will apply for initializing the underlying temporary for the reference. — end note] [Example:

```

struct A {
    int m1;
    double m2;
};

void f(const A&);
f( {'a', 'b'} );           // OK: f(A(int,double)) user-defined conversion
f( {1.0} );                // error: narrowing

void g(const double &);
g({1});                    // same conversion as int to double

```

— end example]

- ¹⁰ Otherwise, if the parameter type is not a class:

- (10.1) — if the initializer list has one element that is not itself an initializer list, the implicit conversion sequence is the one required to convert the element to the parameter type; [Example:

```

void f(int);
f( {'a'} );                // OK: same conversion as char to int
f( {1.0} );                // error: narrowing

```

— end example]

- (10.2) — if the initializer list has no elements, the implicit conversion sequence is the identity conversion. [Example:

```

    void f(int);
    f( { } );           // OK: identity conversion
— end example]

```

- 11 In all cases other than those enumerated above, no conversion is possible.

16.3.3.2 Ranking implicit conversion sequences [over.ics.rank]

- 1 This subclause defines a partial ordering of implicit conversion sequences based on the relationships *better conversion sequence* and *worse conversion sequence*. If an implicit conversion sequence S1 is defined by these rules to be a better conversion sequence than S2, then it is also the case that S2 is a *worse conversion sequence* than S1. If conversion sequence S1 is neither better than nor worse than conversion sequence S2, S1 and S2 are said to be *indistinguishable conversion sequences*.

- 2 When comparing the basic forms of implicit conversion sequences (as defined in 16.3.3.1)

- (2.1) — a standard conversion sequence (16.3.3.1.1) is a better conversion sequence than a user-defined conversion sequence or an ellipsis conversion sequence, and
- (2.2) — a user-defined conversion sequence (16.3.3.1.2) is a better conversion sequence than an ellipsis conversion sequence (16.3.3.1.3).

- 3 Two implicit conversion sequences of the same form are indistinguishable conversion sequences unless one of the following rules applies:

- (3.1) — List-initialization sequence L1 is a better conversion sequence than list-initialization sequence L2 if

- (3.1.1) — L1 converts to `std::initializer_list<X>` for some X and L2 does not, or, if not that,

- (3.1.2) — L1 converts to type “array of N1 T”, L2 converts to type “array of N2 T”, and N1 is smaller than N2, even if one of the other rules in this paragraph would otherwise apply. [Example:

```

    void f1(int);           // #1
    void f1(std::initializer_list<long>); // #2
    void g1() { f1({42}); } // chooses #2

```

```

    void f2(std::pair<const char*, const char*>); // #3
    void f2(std::initializer_list<std::string>); // #4
    void g2() { f2({"foo", "bar"}); } // chooses #4

```

— end example]

- (3.2) — Standard conversion sequence S1 is a better conversion sequence than standard conversion sequence S2 if

- (3.2.1) — S1 is a proper subsequence of S2 (comparing the conversion sequences in the canonical form defined by 16.3.3.1.1, excluding any Lvalue Transformation; the identity conversion sequence is considered to be a subsequence of any non-identity conversion sequence) or, if not that,

- (3.2.2) — the rank of S1 is better than the rank of S2, or S1 and S2 have the same rank and are distinguishable by the rules in the paragraph below, or, if not that,

- (3.2.3) — S1 and S2 are reference bindings (11.6.3) and neither refers to an implicit object parameter of a non-static member function declared without a *ref-qualifier*, and S1 binds an rvalue reference to an rvalue and S2 binds an lvalue reference [Example:

```

    int i;
    int f1();
    int&& f2();
    int g(const int&);
    int g(const int&&);
    int j = g(i);           // calls g(const int&)
    int k = g(f1());       // calls g(const int&&)
    int l = g(f2());       // calls g(const int&&)

```

```

    struct A {
        A& operator<<(int);
        void p() &;
        void p() &&;
    };

```



```

A& operator<<(A&&, char);
A() << 1; // calls A::operator<<(int)
A() << 'c'; // calls operator<<(A&&, char)
A a;
a << 1; // calls A::operator<<(int)
a << 'c'; // calls A::operator<<(int)
A().p(); // calls A::p()&&
a.p(); // calls A::p()&

```

— end example] or, if not that,

- (3.2.4) — S1 and S2 are reference bindings (11.6.3) and S1 binds an lvalue reference to a function lvalue and S2 binds an rvalue reference to a function lvalue [Example:

```

int f(void(&)()); // #1
int f(void(&&)()); // #2
void g();
int i1 = f(g); // calls #1

```

— end example] or, if not that,

- (3.2.5) — S1 and S2 differ only in their qualification conversion and yield similar types T1 and T2 (7.5), respectively, and the cv-qualification signature of type T1 is a proper subset of the cv-qualification signature of type T2 [Example:

```

int f(const volatile int *);
int f(const int *);
int i;
int j = f(&i); // calls f(const int*)

```

— end example] or, if not that,

- (3.2.6) — S1 and S2 are reference bindings (11.6.3), and the types to which the references refer are the same type except for top-level cv-qualifiers, and the type to which the reference initialized by S2 refers is more cv-qualified than the type to which the reference initialized by S1 refers. [Example:

```

int f(const int &);
int f(int &);
int g(const int &);
int g(int);

int i;
int j = f(i); // calls f(int &)
int k = g(i); // ambiguous

struct X {
    void f() const;
    void f();
};
void g(const X& a, X b) {
    a.f(); // calls X::f() const
    b.f(); // calls X::f()
}

```

— end example]

- (3.3) — User-defined conversion sequence U1 is a better conversion sequence than another user-defined conversion sequence U2 if they contain the same user-defined conversion function or constructor or they initialize the same class in an aggregate initialization and in either case the second standard conversion sequence of U1 is better than the second standard conversion sequence of U2. [Example:

```

struct A {
    operator short();
} a;
int f(int);
int f(float);
int i = f(a); // calls f(int), because short → int is
              // better than short → float.

```

— end example]

⁴ Standard conversion sequences are ordered by their ranks: an Exact Match is a better conversion than a Promotion, which is a better conversion than a Conversion. Two conversion sequences with the same rank are indistinguishable unless one of the following rules applies:

- (4.1) — A conversion that does not convert a pointer, a pointer to member, or `std::nullptr_t` to `bool` is better than one that does.
- (4.2) — A conversion that promotes an enumeration whose underlying type is fixed to its underlying type is better than one that promotes to the promoted underlying type, if the two are different.
- (4.3) — If class `B` is derived directly or indirectly from class `A`, conversion of `B*` to `A*` is better than conversion of `B*` to `void*`, and conversion of `A*` to `void*` is better than conversion of `B*` to `void*`.
- (4.4) — If class `B` is derived directly or indirectly from class `A` and class `C` is derived directly or indirectly from `B`,
- (4.4.1) — conversion of `C*` to `B*` is better than conversion of `C*` to `A*`, [*Example:*

```

struct A {};
struct B : public A {};
struct C : public B {};
C* pc;
int f(A*);
int f(B*);
int i = f(pc);           // calls f(B*)

```

— *end example*]
- (4.4.2) — binding of an expression of type `C` to a reference to type `B` is better than binding an expression of type `C` to a reference to type `A`,
- (4.4.3) — conversion of `A::*` to `B::*` is better than conversion of `A::*` to `C::*`,
- (4.4.4) — conversion of `C` to `B` is better than conversion of `C` to `A`,
- (4.4.5) — conversion of `B*` to `A*` is better than conversion of `C*` to `A*`,
- (4.4.6) — binding of an expression of type `B` to a reference to type `A` is better than binding an expression of type `C` to a reference to type `A`,
- (4.4.7) — conversion of `B::*` to `C::*` is better than conversion of `A::*` to `C::*`, and
- (4.4.8) — conversion of `B` to `A` is better than conversion of `C` to `A`.

[*Note:* Compared conversion sequences will have different source types only in the context of comparing the second standard conversion sequence of an initialization by user-defined conversion (see 16.3.3); in all other contexts, the source types will be the same and the target types will be different. — *end note*]

16.4 Address of overloaded function

[over.over]

¹ A use of an overloaded function name without arguments is resolved in certain contexts to a function, a pointer to function or a pointer to member function for a specific function from the overload set. A function template name is considered to name a set of overloaded functions in such contexts. A function with type `F` is selected for the function type `FT` of the target type required in the context if `F` (after possibly applying the function pointer conversion (7.13)) is identical to `FT`. [*Note:* That is, the class of which the function is a member is ignored when matching a pointer-to-member-function type. — *end note*] The target can be

- (1.1) — an object or reference being initialized (11.6, 11.6.3, 11.6.4),
- (1.2) — the left side of an assignment (8.5.18),
- (1.3) — a parameter of a function (8.5.1.2),
- (1.4) — a parameter of a user-defined operator (16.5),
- (1.5) — the return value of a function, operator function, or conversion (9.6.3),
- (1.6) — an explicit type conversion (8.5.1.3, 8.5.1.9, 8.5.3), or
- (1.7) — a non-type *template-parameter* (17.3.2).

The overloaded function name can be preceded by the `&` operator. An overloaded function name shall not be used without arguments in contexts other than those listed. [*Note:* Any redundant set of parentheses surrounding the overloaded function name is ignored (8.4.3). — *end note*]

- 2 If the name is a function template, template argument deduction is done (17.9.2.2), and if the argument deduction succeeds, the resulting template argument list is used to generate a single function template specialization, which is added to the set of overloaded functions considered. [Note: As described in 17.9.1, if deduction fails and the function template name is followed by an explicit template argument list, the *template-id* is then examined to see whether it identifies a single function template specialization. If it does, the *template-id* is considered to be an lvalue for that function template specialization. The target type is not used in that determination. — end note]
- 3 Non-member functions and static member functions match targets of function pointer type or reference to function type. Non-static member functions match targets of pointer-to-member-function type. If a non-static member function is selected, the reference to the overloaded function name is required to have the form of a pointer to member as described in 8.5.2.1.
- 4 All functions with associated constraints that are not satisfied (17.4.2) are eliminated from the set of selected functions. If more than one function in the set remains, all function template specializations in the set are eliminated if the set also contains a function that is not a function template specialization. Any given non-template function F0 is eliminated if the set contains a second non-template function that is more constrained than F0 according to the partial ordering rules of 17.4.4. Any given function template specialization F1 is eliminated if the set contains a second function template specialization whose function template is more specialized than the function template of F1 according to the partial ordering rules of 17.6.6.2. After such eliminations, if any, there shall remain exactly one selected function.

5 [Example:

```
int f(double);
int f(int);
int (*pfd)(double) = &f;           // selects f(double)
int (*pfi)(int) = &f;              // selects f(int)
int (*pfe)(...) = &f;             // error: type mismatch
int (&rfi)(int) = f;              // selects f(int)
int (&rfd)(double) = f;           // selects f(double)
void g() {
    (int (*)(int))&f;              // cast expression as selector
}
```

The initialization of `pfe` is ill-formed because no `f()` with type `int(...)` has been declared, and not because of any ambiguity. For another example,

```
struct X {
    int f(int);
    static int f(long);
};

int (X::*p1)(int) = &X::f;         // OK
int (*p2)(int) = &X::f;           // error: mismatch
int (*p3)(long) = &X::f;          // OK
int (X::*p4)(long) = &X::f;       // error: mismatch
int (X::*p5)(int) = &(X::f);       // error: wrong syntax for
// pointer to member
int (*p6)(long) = &(X::f);        // OK
```

— end example]

- 6 [Note: If `f()` and `g()` are both overloaded functions, the cross product of possibilities must be considered to resolve `f(&g)`, or the equivalent expression `f(g)`. — end note]
- 7 [Note: Even if B is a public base of D, we have

```
D* f();
B* (*p1)() = &f;                  // error

void g(D*);
void (*p2)(B*) = &g;              // error
```

— end note]

16.5 Overloaded operators

[over.oper]

- ¹ A function declaration having one of the following *operator-function-ids* as its name declares an *operator function*. A function template declaration having one of the following *operator-function-ids* as its name declares an *operator function template*. A specialization of an operator function template is also an operator function. An operator function is said to *implement* the operator named in its *operator-function-id*.

operator-function-id:

`operator operator`

operator: one of

<code>new</code>	<code>delete</code>	<code>new[]</code>	<code>delete[]</code>	<code>()</code>	<code>[]</code>	<code>-></code>	<code>->*</code>	<code>~</code>
<code>!</code>	<code>+</code>	<code>-</code>	<code>*</code>	<code>/</code>	<code>%</code>	<code>^</code>	<code>&</code>	<code> </code>
<code>=</code>	<code>+=</code>	<code>-=</code>	<code>*=</code>	<code>/=</code>	<code>%=</code>	<code>^=</code>	<code>&=</code>	<code> =</code>
<code>==</code>	<code>!=</code>	<code><</code>	<code>></code>	<code><=</code>	<code>>=</code>	<code><=></code>	<code>&&</code>	<code> </code>
<code><<</code>	<code>>></code>	<code><<=</code>	<code>>>=</code>	<code>++</code>	<code>--</code>	<code>,</code>		

[*Note*: The operators `new[]`, `delete[]`, `()`, and `[]` are formed from more than one token. The latter two operators are function call (8.5.1.2) and subscripting (8.5.1.1). — *end note*]

- ² Both the unary and binary forms of

`+` `-` `*` `&`

can be overloaded.

- ³ The following operators cannot be overloaded:

`.` `.*` `::` `?:`

nor can the preprocessing symbols `#` and `##` (Clause 19).

- ⁴ Operator functions are usually not called directly; instead they are invoked to evaluate the operators they implement (16.5.1 – 16.5.7). They can be explicitly called, however, using the *operator-function-id* as the name of the function in the function call syntax (8.5.1.2). [*Example*:

```
complex z = a.operator+(b);    // complex z = a+b;
void* p = operator new(sizeof(int)*n);
```

— *end example*]

- ⁵ The allocation and deallocation functions, `operator new`, `operator new[]`, `operator delete` and `operator delete[]`, are described completely in 6.6.4.4. The attributes and restrictions found in the rest of this subclause do not apply to them unless explicitly stated in 6.6.4.4.
- ⁶ An operator function shall either be a non-static member function or be a non-member function that has at least one parameter whose type is a class, a reference to a class, an enumeration, or a reference to an enumeration. It is not possible to change the precedence, grouping, or number of operands of operators. The meaning of the operators `=`, (unary) `&`, and `,` (comma), predefined for each type, can be changed for specific class and enumeration types by defining operator functions that implement these operators. Operator functions are inherited in the same manner as other base class functions.
- ⁷ The identities among certain predefined operators applied to basic types (for example, `++a` \equiv `a+=1`) need not hold for operator functions. Some predefined operators, such as `+=`, require an operand to be an lvalue when applied to basic types; this is not required by operator functions.
- ⁸ An operator function cannot have default arguments (11.3.6), except where explicitly stated below. Operator functions cannot have more or fewer parameters than the number required for the corresponding operator, as described in the rest of this subclause.
- ⁹ Operators not mentioned explicitly in subclauses 16.5.3 through 16.5.7 act as ordinary unary and binary operators obeying the rules of 16.5.1 or 16.5.2.

16.5.1 Unary operators

[over.unary]

- ¹ A prefix unary operator shall be implemented by a non-static member function (12.2.1) with no parameters or a non-member function with one parameter. Thus, for any prefix unary operator `@`, `@x` can be interpreted as either `x.operator@()` or `operator@(x)`. If both forms of the operator function have been declared, the rules in 16.3.1.2 determine which, if any, interpretation is used. See 16.5.7 for an explanation of the postfix unary operators `++` and `--`.

- ² The unary and binary forms of the same operator are considered to have the same name. [*Note*: Consequently, a unary operator can hide a binary operator from an enclosing scope, and vice versa. — *end note*]

16.5.2 Binary operators [over.binary]

- ¹ A binary operator shall be implemented either by a non-static member function (12.2.1) with one parameter or by a non-member function with two parameters. Thus, for any binary operator @, $x@y$ can be interpreted as either $x.operator@(y)$ or $operator@(x,y)$. If both forms of the operator function have been declared, the rules in 16.3.1.2 determine which, if any, interpretation is used.

16.5.3 Assignment [over.ass]

- ¹ An assignment operator shall be implemented by a non-static member function with exactly one parameter. Because a copy assignment operator `operator=` is implicitly declared for a class if not declared by the user (15.8), a base class assignment operator is always hidden by the copy assignment operator of the derived class.
- ² Any assignment operator, even the copy and move assignment operators, can be virtual. [*Note*: For a derived class D with a base class B for which a virtual copy/move assignment has been declared, the copy/move assignment operator in D does not override B's virtual copy/move assignment operator. [*Example*:

```
struct B {
    virtual int operator= (int);
    virtual B& operator= (const B&);
};
struct D : B {
    virtual int operator= (int);
    virtual D& operator= (const B&);
};

D dobj1;
D dobj2;
B* bptr = &dobj1;
void f() {
    bptr->operator=(99);           // calls D::operator=(int)
    *bptr = 99;                  // ditto
    bptr->operator=(dobj2);       // calls D::operator=(const B&)
    *bptr = dobj2;              // ditto
    dobj1 = dobj2;              // calls implicitly-declared D::operator=(const D&)
}
```

— *end example*] — *end note*]

16.5.4 Function call [over.call]

- ¹ `operator()` shall be a non-static member function with an arbitrary number of parameters. It can have default arguments. It implements the function call syntax

postfix-expression (*expression-list_{opt}*)

where the *postfix-expression* evaluates to a class object and the possibly empty *expression-list* matches the parameter list of an `operator()` member function of the class. Thus, a call $x(\text{arg1}, \dots)$ is interpreted as $x.operator()(\text{arg1}, \dots)$ for a class object x of type T if $T::operator()(T1, T2, T3)$ exists and if the operator is selected as the best match function by the overload resolution mechanism (16.3.3).

16.5.5 Subscripting [over.sub]

- ¹ `operator[]` shall be a non-static member function with exactly one parameter. It implements the subscripting syntax

postfix-expression [*expr-or-braced-init-list*]

Thus, a subscripting expression $x[y]$ is interpreted as $x.operator[](y)$ for a class object x of type T if $T::operator[](T1)$ exists and if the operator is selected as the best match function by the overload resolution mechanism (16.3.3). [*Example*:

```
struct X {
    Z operator[](std::initializer_list<int>);
};
```

```

X x;
x[{1,2,3}] = 7;           // OK: meaning x.operator[]({1,2,3})
int a[10];
a[{1,2,3}] = 7;         // error: built-in subscript operator
— end example]

```

16.5.6 Class member access

[over.ref]

- ¹ `operator->` shall be a non-static member function taking no parameters. It implements the class member access syntax that uses `->`.

```

postfix-expression -> templateopt id-expression
postfix-expression -> pseudo-destructor-name

```

An expression `x->m` is interpreted as `(x.operator->())->m` for a class object `x` of type `T` if `T::operator->()` exists and if the operator is selected as the best match function by the overload resolution mechanism (16.3).

16.5.7 Increment and decrement

[over.inc]

- ¹ The user-defined function called `operator++` implements the prefix and postfix `++` operator. If this function is a non-static member function with no parameters, or a non-member function with one parameter, it defines the prefix increment operator `++` for objects of that type. If the function is a non-static member function with one parameter (which shall be of type `int`) or a non-member function with two parameters (the second of which shall be of type `int`), it defines the postfix increment operator `++` for objects of that type. When the postfix increment is called as a result of using the `++` operator, the `int` argument will have value zero.¹³³

[Example:

```

struct X {
    X& operator++();           // prefix ++a
    X operator++(int);        // postfix a++
};

struct Y { };
Y& operator++(Y&);           // prefix ++b
Y operator++(Y&, int);       // postfix b++

void f(X a, Y b) {
    ++a;                       // a.operator++();
    a++;                       // a.operator++(0);
    ++b;                       // operator++(b);
    b++;                       // operator++(b, 0);

    a.operator++();           // explicit call: like ++a;
    a.operator++(0);          // explicit call: like a++;
    operator++(b);           // explicit call: like ++b;
    operator++(b, 0);         // explicit call: like b++;
}

```

— end example]

- ² The prefix and postfix decrement operators `--` are handled analogously.

16.5.8 User-defined literals

[over.literal]

```

literal-operator-id:
    operator string-literal identifier
    operator user-defined-string-literal

```

- ¹ The *string-literal* or *user-defined-string-literal* in a *literal-operator-id* shall have no *encoding-prefix* and shall contain no characters other than the implicit terminating `'\0'`. The *ud-suffix* of the *user-defined-string-literal* or the *identifier* in a *literal-operator-id* is called a *literal suffix identifier*. Some literal suffix identifiers are reserved for future standardization; see 20.5.4.3.5. A declaration whose *literal-operator-id* uses such a literal suffix identifier is ill-formed, no diagnostic required.

¹³³ Calling `operator++` explicitly, as in expressions like `a.operator++(2)`, has no special properties: The argument to `operator++` is 2.

- 2 A declaration whose *declarator-id* is a *literal-operator-id* shall be a declaration of a namespace-scope function or function template (it could be a friend function (14.3)), an explicit instantiation or specialization of a function template, or a *using-declaration* (10.3.3). A function declared with a *literal-operator-id* is a *literal operator*. A function template declared with a *literal-operator-id* is a *literal operator template*.
- 3 The declaration of a literal operator shall have a *parameter-declaration-clause* equivalent to one of the following:

```

const char*
unsigned long long int
long double
char
wchar_t
char16_t
char32_t
const char*, std::size_t
const wchar_t*, std::size_t
const char16_t*, std::size_t
const char32_t*, std::size_t

```

If a parameter has a default argument (11.3.6), the program is ill-formed.

- 4 A *raw literal operator* is a literal operator with a single parameter whose type is `const char*`.
- 5 A *numeric literal operator template* is a literal operator template whose *template-parameter-list* has a single *template-parameter* that is a non-type template parameter pack (17.6.3) with element type `char`. A *string literal operator template* is a literal operator template whose *template-parameter-list* comprises a single non-type *template-parameter* of class type. The declaration of a literal operator template shall have an empty *parameter-declaration-clause* and shall declare either a numeric literal operator template or a string literal operator template.
- 6 Literal operators and literal operator templates shall not have C language linkage.
- 7 [Note: Literal operators and literal operator templates are usually invoked implicitly through user-defined literals (5.13.8). However, except for the constraints described above, they are ordinary namespace-scope functions and function templates. In particular, they are looked up like ordinary functions and function templates and they follow the same overload resolution rules. Also, they can be declared `inline` or `constexpr`, they may have internal or external linkage, they can be called explicitly, their addresses can be taken, etc. — end note]
- 8 [Example:

```

void operator "" _km(long double); // OK
string operator "" _i18n(const char*, std::size_t); // OK
template <char...> double operator "" _\u03C0(); // OK: UCN for lowercase pi
float operator "" _e(const char*); // OK
float operator "" E(const char*); // error: reserved literal suffix (20.5.4.3.5, 5.13.8)
double operator "" _Bq(long double); // OK: does not use the reserved identifier _Bq (5.10)
double operator "" Bq(long double); // uses the reserved identifier _Bq (5.10)
float operator "" B(const char*); // error: non-empty string-literal
string operator "" 5X(const char*, std::size_t); // error: invalid literal suffix identifier
double operator "" _miles(double); // error: invalid parameter-declaration-clause
template <char...> int operator "" _j(const char*); // error: invalid parameter-declaration-clause
extern "C" void operator "" _m(long double); // error: C language linkage

```

— end example]

16.6 Built-in operators

[over.built]

- 1 The candidate operator functions that represent the built-in operators defined in 8.5 are specified in this subclause. These candidate functions participate in the operator overload resolution process as described in 16.3.1.2 and are used for no other purpose. [Note: Because built-in operators take only operands with non-class type, and operator overload resolution occurs only when an operand expression originally has class or enumeration type, operator overload resolution can resolve to a built-in operator only when an operand has a class type that has a user-defined conversion to a non-class type appropriate for the operator, or when an operand has an enumeration type that can be converted to a type appropriate for the operator. Also note that some of the candidate operator functions given in this subclause are more permissive than the built-in operators themselves. As described in 16.3.1.2, after a built-in operator is selected by overload resolution

the expression is subject to the requirements for the built-in operator given in 8.5, and therefore to any additional semantic constraints given there. If there is a user-written candidate with the same name and parameter types as a built-in candidate operator function, the built-in operator function is hidden and is not included in the set of candidate functions. — *end note*]

² In this subclause, the term *promoted integral type* is used to refer to those integral types which are preserved by integral promotion (7.6) (including e.g. `int` and `long` but excluding e.g. `char`). Similarly, the term *promoted arithmetic type* refers to floating-point types plus promoted integral types. [*Note*: In all cases where a promoted integral type or promoted arithmetic type is required, an operand of enumeration type will be acceptable by way of the integral promotions. — *end note*]

³ In the remainder of this subclause, *vq* represents either `volatile` or no cv-qualifier.

⁴ For every pair (*T*, *vq*), where *T* is an arithmetic type other than `bool`, there exist candidate operator functions of the form

```
vq T& operator++(vq T&);
T operator++(vq T&, int);
```

⁵ For every pair (*T*, *vq*), where *T* is an arithmetic type other than `bool`, there exist candidate operator functions of the form

```
vq T& operator--(vq T&);
T operator--(vq T&, int);
```

⁶ For every pair (*T*, *vq*), where *T* is a cv-qualified or cv-unqualified object type, there exist candidate operator functions of the form

```
T*vq& operator++(T*vq&);
T*vq& operator--(T*vq&);
T* operator++(T*vq&, int);
T* operator--(T*vq&, int);
```

⁷ For every cv-qualified or cv-unqualified object type *T*, there exist candidate operator functions of the form

```
T& operator*(T*);
```

⁸ For every function type *T* that does not have cv-qualifiers or a *ref-qualifier*, there exist candidate operator functions of the form

```
T& operator*(T*);
```

⁹ For every type *T* there exist candidate operator functions of the form

```
T* operator+(T*);
```

¹⁰ For every promoted arithmetic type *T*, there exist candidate operator functions of the form

```
T operator+(T);
T operator-(T);
```

¹¹ For every promoted integral type *T*, there exist candidate operator functions of the form

```
T operator~(T);
```

¹² For every quintuple (*C1*, *C2*, *T*, *cv1*, *cv2*), where *C2* is a class type, *C1* is the same type as *C2* or is a derived class of *C2*, and *T* is an object type or a function type, there exist candidate operator functions of the form

```
cv12 T& operator->*(cv1 C1*, cv2 T C2::*);
```

where *cv12* is the union of *cv1* and *cv2*. The return type is shown for exposition only; see 8.5.4 for the determination of the operator's result type.

¹³ For every pair of promoted arithmetic types *L* and *R*, there exist candidate operator functions of the form

```
LR operator*(L, R);
LR operator/(L, R);
LR operator+(L, R);
LR operator-(L, R);
bool operator==(L, R);
bool operator!=(L, R);
bool operator<(L, R);
bool operator>(L, R);
bool operator<=(L, R);
bool operator>=(L, R);
```


where LR is the result of the usual arithmetic conversions (8.3) between types L and R .

- 14 For every integral type T there exists a candidate operator function of the form
- ```
std::strong_ordering operator<=>(T, T);
```
- 15 For every pair of floating-point types  $L$  and  $R$ , there exists a candidate operator function of the form
- ```
std::partial_ordering operator<=>(L, R);
```
- 16 For every cv-qualified or cv-unqualified object type T there exist candidate operator functions of the form
- ```
T* operator+(T*, std::ptrdiff_t);
T& operator[] (T*, std::ptrdiff_t);
T* operator-(T*, std::ptrdiff_t);
T* operator+(std::ptrdiff_t, T*);
T& operator[] (std::ptrdiff_t, T*);
```
- 17 For every  $T$ , where  $T$  is a pointer to object type, there exist candidate operator functions of the form
- ```
std::ptrdiff_t operator-(T, T);
```
- 18 For every T , where T is an enumeration type or a pointer type, there exist candidate operator functions of the form
- ```
bool operator==(T, T);
bool operator!=(T, T);
bool operator<(T, T);
bool operator>(T, T);
bool operator<=(T, T);
bool operator>=(T, T);
R operator<=>(T, T);
```

where  $R$  is the result type specified in 8.5.8.

- 19 For every  $T$ , where  $T$  is a pointer-to-member type or `std::nullptr_t`, there exist candidate operator functions of the form
- ```
bool operator==(T, T);
bool operator!=(T, T);
std::strong_equality operator<=>(T, T);
```
- 20 For every pair of promoted integral types L and R , there exist candidate operator functions of the form
- ```
LR operator%(L, R);
LR operator&(L, R);
LR operator^(L, R);
LR operator|(L, R);
L operator<<(L, R);
L operator>>(L, R);
```

where  $LR$  is the result of the usual arithmetic conversions (8.3) between types  $L$  and  $R$ .

- 21 For every triple  $(L, vq, R)$ , where  $L$  is an arithmetic type, and  $R$  is a promoted arithmetic type, there exist candidate operator functions of the form
- ```
vq L& operator=(vq L&, R);
vq L& operator*=(vq L&, R);
vq L& operator/=(vq L&, R);
vq L& operator+=(vq L&, R);
vq L& operator-=(vq L&, R);
```
- 22 For every pair (T, vq) , where T is any type, there exist candidate operator functions of the form
- ```
T*vq& operator=(T*vq&, T*);
```
- 23 For every pair  $(T, vq)$ , where  $T$  is an enumeration or pointer-to-member type, there exist candidate operator functions of the form
- ```
vq T& operator=(vq T&, T);
```
- 24 For every pair (T, vq) , where T is a cv-qualified or cv-unqualified object type, there exist candidate operator functions of the form
- ```
T*vq& operator+=(T*vq&, std::ptrdiff_t);
T*vq& operator-=(T*vq&, std::ptrdiff_t);
```

- 25 For every triple  $(L, R, R)$ , where  $L$  is an integral type, and  $R$  is a promoted integral type, there exist candidate operator functions of the form

```

 vq L& operator%=(vq L&, R);
 vq L& operator<<=(vq L&, R);
 vq L& operator>>=(vq L&, R);
 vq L& operator&=(vq L&, R);
 vq L& operator^=(vq L&, R);
 vq L& operator|=(vq L&, R);

```

- 26 There also exist candidate operator functions of the form

```

 bool operator!(bool);
 bool operator&&(bool, bool);
 bool operator||(bool, bool);

```

- 27 For every pair of promoted arithmetic types  $L$  and  $R$ , there exist candidate operator functions of the form

```

 LR operator?:(bool, L, R);

```

where  $LR$  is the result of the usual arithmetic conversions (8.3) between types  $L$  and  $R$ . [*Note:* As with all these descriptions of candidate functions, this declaration serves only to describe the built-in operator for purposes of overload resolution. The operator “?” cannot be overloaded. — *end note*]

- 28 For every type  $T$ , where  $T$  is a pointer, pointer-to-member, or scoped enumeration type, there exist candidate operator functions of the form

```

 T operator?:(bool, T, T);

```

# 17 Templates

[temp]

- <sup>1</sup> A *template* defines a family of classes, functions, or variables, an alias for a family of types, or a concept.

*template-declaration*:

*template-head declaration*  
*template-head concept-definition*

*template-head*:

**template** < *template-parameter-list* > *requires-clause<sub>opt</sub>*

*template-parameter-list*:

*template-parameter*  
*template-parameter-list* , *template-parameter*

*requires-clause*:

**requires** *constraint-logical-or-expression*

*constraint-logical-or-expression*:

*constraint-logical-and-expression*  
*constraint-logical-or-expression* || *constraint-logical-and-expression*

*constraint-logical-and-expression*:

*primary-expression*  
*constraint-logical-and-expression* && *primary-expression*

*concept-definition*:

**concept** *concept-name* = *constraint-expression* ;

*concept-name*:

*identifier*

[Note: The > token following the *template-parameter-list* of a *template-declaration* may be the product of replacing a >> token by two consecutive > tokens (17.2). — end note]

- <sup>2</sup> The *declaration* in a *template-declaration* (if any) shall

- (2.1) — declare or define a function, a class, or a variable, or
- (2.2) — define a member function, a member class, a member enumeration, or a static data member of a class template or of a class nested within a class template, or
- (2.3) — define a member template of a class or class template, or
- (2.4) — be a *deduction-guide*, or
- (2.5) — be an *alias-declaration*.

- <sup>3</sup> A *template-declaration* is a *declaration*. A *template-declaration* is also a definition if its *template-head* is followed by either a *concept-definition* or a *declaration* that defines a function, a class, a variable, or a static data member. A declaration introduced by a template declaration of a variable is a *variable template*. A variable template at class scope is a *static data member template*.

[Example:

```
template<class T>
constexpr T pi = T(3.1415926535897932385L);
template<class T>
T circular_area(T r) {
 return pi<T> * r * r;
}
struct matrix_constants {
 template<class T>
 using pauli = hermitian_matrix<T, 2>;
 template<class T>
 constexpr pauli<T> sigma1 = { { 0, 1 }, { 1, 0 } };
 template<class T>
 constexpr pauli<T> sigma2 = { { 0, -1i }, { 1i, 0 } };
};
```

```
template<class T>
 constexpr pauli<T> sigma3 = { { 1, 0 }, { 0, -1 } };
};
```

— *end example*]

- <sup>4</sup> A *template-declaration* can appear only as a namespace scope or class scope declaration. In a function template declaration, the last component of the *declarator-id* shall not be a *template-id*. [Note: That last component may be an *identifier*, an *operator-function-id*, a *conversion-function-id*, or a *literal-operator-id*. In a class template declaration, if the class name is a *simple-template-id*, the declaration declares a class template partial specialization (17.6.5). — *end note*]
- <sup>5</sup> In a *template-declaration*, explicit specialization, or explicit instantiation the *init-declarator-list* in the declaration shall contain at most one declarator. When such a declaration is used to declare a class template, no declarator is permitted.
- <sup>6</sup> A template name has linkage (6.5). Specializations (explicit or implicit) of a template that has internal linkage are distinct from all specializations in other translation units. A template, a template explicit specialization (17.8.3), and a class template partial specialization shall not have C linkage. Use of a linkage specification other than "C" or "C++" with any of these constructs is conditionally-supported, with implementation-defined semantics. Template definitions shall obey the one-definition rule (6.2). [Note: Default arguments for function templates and for member functions of class templates are considered definitions for the purpose of template instantiation (17.6) and must also obey the one-definition rule. — *end note*]
- <sup>7</sup> A class template shall not have the same name as any other template, class, function, variable, enumeration, enumerator, namespace, or type in the same scope (6.3), except as specified in 17.6.5. Except that a function template can be overloaded either by non-template functions (11.3.5) with the same name or by other function templates with the same name (17.9.3), a template name declared in namespace scope or in class scope shall be unique in that scope.
- <sup>8</sup> A *templated entity* is
- (8.1) — a template,
  - (8.2) — an entity defined (6.1) or created (15.2) in a templated entity,
  - (8.3) — a member of a templated entity,
  - (8.4) — an enumerator for an enumeration that is a templated entity, or
  - (8.5) — the closure type of a *lambda-expression* (8.4.5.1) appearing in the declaration of a templated entity.

[Note: A local class, a local variable, or a friend function defined in a templated entity is a templated entity. — *end note*]

- <sup>9</sup> A *template-declaration* is written in terms of its template parameters. The optional *requires-clause* following a *template-parameter-list* allows the specification of constraints (17.4.2) on template arguments (17.3). The *requires-clause* introduces the *constraint-expression* that results from interpreting the *constraint-logical-or-expression* as a *constraint-expression*. The *constraint-logical-or-expression* of a *requires-clause* is an unevaluated operand (Clause 8). [Note: The expression in a *requires-clause* uses a restricted grammar to avoid ambiguities. Parentheses can be used to specify arbitrary expressions in a *requires-clause*. [Example:

```
template<int N> requires N == sizeof new unsigned short
int f(); // error: parentheses required around == expression
```

— *end example*] — *end note*]

- <sup>10</sup> A function template, member function of a class template, variable template, or static data member of a class template shall be defined in every translation unit in which it is implicitly instantiated (17.8.1) unless the corresponding specialization is explicitly instantiated (17.8.2) in some translation unit; no diagnostic is required.

## 17.1 Template parameters

[temp.param]

- <sup>1</sup> The syntax for *template-parameters* is:

```
template-parameter:
 type-parameter
 parameter-declaration
 constrained-parameter
```

*type-parameter*:

```

type-parameter-key ...opt identifieropt
type-parameter-key identifieropt = type-id
template-head type-parameter-key ...opt identifieropt
template-head type-parameter-key identifieropt = id-expression

```

*type-parameter-key*:

```

class
typename

```

*constrained-parameter*:

```

qualified-concept-name ... identifieropt
qualified-concept-name identifieropt default-template-argumentopt

```

*qualified-concept-name*:

```

nested-name-specifieropt concept-name
nested-name-specifieropt partial-concept-id

```

*partial-concept-id*:

```

concept-name < template-argument-listopt >

```

*default-template-argument*:

```

= type-id
= id-expression
= initializer-clause

```

[*Note*: The > token following the *template-parameter-list* of a *type-parameter* may be the product of replacing a >> token by two consecutive > tokens (17.2). — *end note*]

- 2 There is no semantic difference between `class` and `typename` in a *type-parameter-key*. `typename` followed by an *unqualified-id* names a template type parameter. `typename` followed by a *qualified-id* denotes the type in a non-type<sup>134</sup> *parameter-declaration*. A *template-parameter* of the form `class identifier` is a *type-parameter*. [*Example*:

```

class T { /* ... */ };
int i;

template<class T, T i> void f(T t) {
 T t1 = i; // template-parameters T and i
 ::T t2 = ::i; // global namespace members T and i
}

```

Here, the template `f` has a *type-parameter* called `T`, rather than an unnamed non-type *template-parameter* of class `T`. — *end example*] A storage class shall not be specified in a *template-parameter* declaration. Types shall not be defined in a *template-parameter* declaration.

- 3 A *type-parameter* whose identifier does not follow an ellipsis defines its *identifier* to be a *typedef-name* (if declared without `template`) or *template-name* (if declared with `template`) in the scope of the template declaration. [*Note*: A template argument may be a class template or alias template. For example,

```

template<class T> class myarray { /* ... */ };

template<class K, class V, template<class T> class C = myarray>
class Map {
 C<K> key;
 C<V> value;
};

```

— *end note*]

- 4 A non-type *template-parameter* shall have one of the following (optionally cv-qualified) types:
- (4.1) — a type that is literal, has strong structural equality (15.9.1), has no `mutable` or `volatile` subobjects, and in which if there is a defaulted member `operator<=>`, then it is declared public,
  - (4.2) — an lvalue reference type,
  - (4.3) — a type that contains a placeholder type (10.1.7.4), or
  - (4.4) — a placeholder for a deduced class type (10.1.7.5).

<sup>134</sup> Since template *template-parameters* and template *template-arguments* are treated as types for descriptive purposes, the terms *non-type parameter* and *non-type argument* are used to refer to non-type, non-template parameters and arguments.

5 [Note: Other types are disallowed either explicitly below or implicitly by the rules governing the form of *template-arguments* (17.3). — end note] The top-level *cv-qualifiers* on the *template-parameter* are ignored when determining its type.

6 When a non-type *template-parameter* of non-reference and non-class type is used as an initializer for a reference, a temporary is always used. An *id-expression* naming a non-type *template-parameter* of class type T denotes a static storage duration object of type `const T`, known as a *template parameter object*, whose value is that of the corresponding template argument after it has been converted to the type of the *template-parameter*. All such template parameters in the program of the same type with the same value denote the same template parameter object. [Note: If an *id-expression* names a non-type non-reference *template-parameter*, then it is a prvalue if it has non-class type. Otherwise, if it is of class type T, it is an lvalue and has type `const T` (8.4.4.1). — end note] [Example:

```
struct A { auto operator<=>(A, A) = default; };
template<const X& x, int i, A a> void f() {
 i++; // error: change of template-parameter value

 &x; // OK
 &i; // error: address of non-reference template-parameter
 &a; // OK
 int& ri = i; // error: non-const reference bound to temporary
 const int& cri = i; // OK: const reference bound to temporary
 const A& ra = a; // OK: const reference bound to a template parameter object
}
```

— end example]

7 A non-type *template-parameter* shall not be declared to have floating-point, class, or void type. [Example:

```
template<double d> class X; // error
template<double* pd> class Y; // OK
template<double& rd> class Z; // OK
```

— end example]

8 A non-type *template-parameter* of type “array of T” or of function type T is adjusted to be of type “pointer to T”. [Example:

```
template<int* a> struct R { /* ... */ };
template<int b[5]> struct S { /* ... */ };
int p;
R<&p> w; // OK
S<&p> x; // OK due to parameter adjustment
int v[5];
R<v> y; // OK due to implicit argument conversion
S<v> z; // OK due to both adjustment and conversion
```

— end example]

9 A *partial-concept-id* is a *concept-name* followed by a sequence of *template-arguments*. These template arguments are used to form a *constraint-expression* as described below.

10 A *constrained-parameter* declares a template parameter whose kind (type, non-type, template) and type match that of the prototype parameter (17.6.8) of the concept designated by the *qualified-concept-name* in the *constrained-parameter*. Let X be the prototype parameter of the designated concept. The declared template parameter is determined by the kind of X (type, non-type, template) and the optional ellipsis in the *constrained-parameter* as follows.

(10.1) — If X is a type *template-parameter*, the declared parameter is a type *template-parameter*.

(10.2) — If X is a non-type *template-parameter*, the declared parameter is a non-type *template-parameter* having the same type as X.

(10.3) — If X is a template *template-parameter*, the declared parameter is a template *template-parameter* having the same *template-parameter-list* as X, excluding default template arguments.

(10.4) — If the *qualified-concept-name* is followed by an ellipsis, then the declared parameter is a template parameter pack (17.6.3).

[Example:

```

template<typename T> concept C1 = true;
template<template<typename> class X> concept C2 = true;
template<int N> concept C3 = true;
template<typename... Ts> concept C4 = true;
template<char... Cs> concept C5 = true;

template<C1 T> void f1(); // OK, T is a type template-parameter
template<C2 X> void f2(); // OK, X is a template with one type-parameter
template<C3 N> void f3(); // OK, N has type int
template<C4... Ts> void f4(); // OK, Ts is a template parameter pack of types
template<C4 T> void f5(); // OK, T is a type template-parameter
template<C5... Cs> void f6(); // OK, Cs is a template parameter pack of chars

```

— end example]

- 11 A *constrained-parameter* introduces a *constraint-expression* (17.4.2). The expression is derived from the *qualified-concept-name* Q in the *constrained-parameter*, its designated concept C, and the declared template parameter P.
- (11.1) — First, a template argument A is formed from P. If P declares a template parameter pack (17.6.3) and C is a variadic concept (17.6.8), then A is the pack expansion P... Otherwise, A is the *id-expression* P.
- (11.2) — Then, an *id-expression* E is formed as follows. If Q is a *concept-name*, then E is C<A>. Otherwise, Q is a *partial-concept-id* of the form C<A<sub>1</sub>, A<sub>2</sub>, ..., A<sub>n</sub>>, and E is C<A, A<sub>1</sub>, A<sub>2</sub>, ..., A<sub>n</sub>>.
- (11.3) — Finally, if P declares a template parameter pack and C is not a variadic concept, E is adjusted to be the *fold-expression* (E && ...) (8.4.6).

E is the introduced *constraint-expression*. [Example:

```

template<typename T> concept C1 = true;
template<typename... Ts> concept C2 = true;
template<typename T, typename U> concept C3 = true;

template<C1 T> struct s1; // associates C1<T>
template<C1... T> struct s2; // associates (C1<T> && ...)
template<C2... T> struct s3; // associates C2<T...>
template<C3<int> T> struct s4; // associates C3<T, int>

```

— end example]

- 12 A *default template-argument* is a *template-argument* (17.3) specified after = in a *template-parameter*. A default *template-argument* may be specified for any kind of *template-parameter* (type, non-type, template) that is not a template parameter pack (17.6.3). A default *template-argument* may be specified in a template declaration. A default *template-argument* shall not be specified in the *template-parameter-lists* of the definition of a member of a class template that appears outside of the member's class. A default *template-argument* shall not be specified in a friend class template declaration. If a friend function template declaration specifies a default *template-argument*, that declaration shall be a definition and shall be the only declaration of the function template in the translation unit.
- 13 The default *template-argument* of a *constrained-parameter* shall match the kind (type, non-type, template) of the declared template parameter. [Example:

```

template<typename T> concept C1 = true;
template<int N> concept C2 = true;
template<template<typename> class X> concept C3 = true;

template<typename T> struct S0;

template<C1 T = int> struct S1; // OK
template<C2 N = 0> struct S2; // OK
template<C3 X = S0> struct S3; // OK
template<C1 T = 0> struct S4; // error: default argument is not a type

```

— end example]

- 14 The set of default *template-arguments* available for use is obtained by merging the default arguments from all prior declarations of the template in the same way default function arguments are (11.3.6). [Example:

```

template<class T1, class T2 = int> class A;

```

```
template<class T1 = int, class T2> class A;
```

is equivalent to

```
template<class T1 = int, class T2 = int> class A;
```

— end example]

- 15 If a *template-parameter* of a class template, variable template, or alias template has a default *template-argument*, each subsequent *template-parameter* shall either have a default *template-argument* supplied or be a template parameter pack. If a *template-parameter* of a primary class template, primary variable template, or alias template is a template parameter pack, it shall be the last *template-parameter*. A template parameter pack of a function template shall not be followed by another template parameter unless that template parameter can be deduced from the parameter-type-list (11.3.5) of the function template or has a default argument (17.9.2). A template parameter of a deduction guide template (17.10) that does not have a default argument shall be deducible from the parameter-type-list of the deduction guide template. [Example:

```
template<class T1 = int, class T2> class B; // error
```

```
// U can be neither deduced from the parameter-type-list nor specified
```

```
template<class... T, class... U> void f() { } // error
```

```
template<class... T, class U> void g() { } // error
```

— end example]

- 16 A *template-parameter* shall not be given default arguments by two different declarations in the same scope. [Example:

```
template<class T = int> class X;
```

```
template<class T = int> class X { /* ... */ }; // error
```

— end example]

- 17 When parsing a default *template-argument* for a non-type *template-parameter*, the first non-nested > is taken as the end of the *template-parameter-list* rather than a greater-than operator. [Example:

```
template<int i = 3 > 4 > // syntax error
class X { /* ... */};
```

```
template<int i = (3 > 4) > // OK
```

```
class Y { /* ... */};
```

— end example]

- 18 A *template-parameter* of a template *template-parameter* is permitted to have a default *template-argument*. When such default arguments are specified, they apply to the template *template-parameter* in the scope of the template *template-parameter*. [Example:

```
template <class T = float> struct B {};
```

```
template <template <class TT = float> class T> struct A {
```

```
 inline void f();
```

```
 inline void g();
```

```
};
```

```
template <template <class TT> class T> void A<T>::f() {
```

```
 T<> t; // error: TT has no default template argument
```

```
}
```

```
template <template <class TT = char> class T> void A<T>::g() {
```

```
 T<> t; // OK, T<char>
```

```
}
```

— end example]

- 19 If a *template-parameter* is a *type-parameter* with an ellipsis prior to its optional *identifier* or is a *parameter-declaration* that declares a pack (11.3.5), then the *template-parameter* is a template parameter pack (17.6.3). A template parameter pack that is a *parameter-declaration* whose type contains one or more unexpanded packs is a pack expansion. Similarly, a template parameter pack that is a *type-parameter* with a *template-parameter-list* containing one or more unexpanded packs is a pack expansion. A template parameter pack that is a pack expansion shall not expand a template parameter pack declared in the same *template-parameter-list*. [Example:

```
template <class... Types>
```

```
 class Tuple;
```

```
// Types is a template type parameter pack
```

```
// but not a pack expansion
```



```

template <class T, int... Dims> // Dims is a non-type template parameter pack
 struct multi_array; // but not a pack expansion

template <class... T>
 struct value_holder {
 template <T... Values> struct apply { }; // Values is a non-type template parameter pack
 }; // and a pack expansion

template <class... T, T... Values> // error: Values expands template type parameter
 struct static_array; // pack T within the same template parameter list
— end example]

```

## 17.2 Names of template specializations

[temp.names]

- <sup>1</sup> A template specialization (17.8) can be referred to by a *template-id*:

```

simple-template-id:
 template-name < template-argument-listopt >

template-id:
 simple-template-id
 operator-function-id < template-argument-listopt >
 literal-operator-id < template-argument-listopt >

template-name:
 identifier

template-argument-list:
 template-argument ...opt
 template-argument-list , template-argument ...opt

template-argument:
 constant-expression
 type-id
 id-expression

```

[*Note*: The name lookup rules (6.4) are used to associate the use of a name with a template declaration; that is, to identify a name as a *template-name*. — end note]

- <sup>2</sup> For a *template-name* to be explicitly qualified by the template arguments, the name must be considered to refer to a template. [*Note*: Whether a name actually refers to a template cannot be known in some cases until after argument dependent lookup is done (6.4.2). — end note] A name is considered to refer to a template if name lookup finds a *template-name* or an overload set that contains a function template. A name is also considered to refer to a template if it is an *unqualified-id* followed by a < and name lookup finds either one or more functions or finds nothing.
- <sup>3</sup> When a name is considered to be a *template-name*, and it is followed by a <, the < is always taken as the delimiter of a *template-argument-list* and never as the less-than operator. When parsing a *template-argument-list*, the first non-nested ><sup>135</sup> is taken as the ending delimiter rather than a greater-than operator. Similarly, the first non-nested >> is treated as two consecutive but distinct > tokens, the first of which is taken as the end of the *template-argument-list* and completes the *template-id*. [*Note*: The second > token produced by this replacement rule may terminate an enclosing *template-id* construct or it may be part of a different construct (e.g., a cast). — end note] [*Example*:

```

template<int i> class X { /* ... */ };

X< 1>2 > x1; // syntax error
X<(1>2)> x2; // OK

template<class T> class Y { /* ... */ };
Y<X<1>> x3; // OK, same as Y<X<1> > x3;
Y<X<6>>1>> x4; // syntax error
Y<X<(6>>1)>> x5; // OK
— end example]

```

<sup>135</sup> A > that encloses the *type-id* of a `dynamic_cast`, `static_cast`, `reinterpret_cast` or `const_cast`, or which encloses the *template-arguments* of a subsequent *template-id*, is considered nested for the purpose of this description.

- 4 The keyword `template` is said to appear at the top level in a *qualified-id* if it appears outside of a *template-argument-list* or *decltype-specifier*. In a *qualified-id* of a *declarator-id* or in a *qualified-id* formed by a *class-head-name* (Clause 12) or *enum-head-name* (10.2), the keyword `template` shall not appear at the top level. In a *qualified-id* used as the name in a *typename-specifier* (17.7), *elaborated-type-specifier* (10.1.7.3), *using-declaration* (10.3.3), or *class-or-decltype* (Clause 13), an optional keyword `template` appearing at the top level is ignored. In these contexts, a `<` token is always assumed to introduce a *template-argument-list*. In all other contexts, when naming a template specialization of a member of an unknown specialization (17.7.2.1), the member template name shall be prefixed by the keyword `template`. [Example:

```
struct X {
 template<std::size_t> X* alloc();
 template<std::size_t> static X* adjust();
};
template<class T> void f(T* p) {
 T* p1 = p->alloc<200>(); // ill-formed: < means less than
 T* p2 = p->template alloc<200>(); // OK: < starts template argument list
 T::adjust<100>(); // ill-formed: < means less than
 T::template adjust<100>(); // OK: < starts template argument list
}
```

— end example]

- 5 A name prefixed by the keyword `template` shall be a *template-id* or the name shall refer to a class template or an alias template. [Note: The keyword `template` may not be applied to non-template members of class templates. — end note] [Note: As is the case with the `typename` prefix, the `template` prefix is allowed in cases where it is not strictly necessary; i.e., when the *nested-name-specifier* or the expression on the left of the `->` or `.` is not dependent on a *template-parameter*, or the use does not appear in the scope of a template. — end note] [Example:

```
template <class T> struct A {
 void f(int);
 template <class U> void f(U);
};

template <class T> void f(T t) {
 A<T> a;
 a.template f<>(t); // OK: calls template
 a.template f(t); // error: not a template-id
}

template <class T> struct B {
 template <class T2> struct C { };
};

// OK: T::template C names a class template:
template <class T, template <class X> class TT = T::template C> struct D { };
D<B<int> > db;
```

— end example]

- 6 A *simple-template-id* that names a class template specialization is a *class-name* (Clause 12).
- 7 A *template-id* that names an alias template specialization is a *type-name*.
- 8 A *template-id* is valid if
- (8.1) — there are at most as many arguments as there are parameters or a parameter is a template parameter pack (17.6.3),
  - (8.2) — there is an argument for each non-deducible non-pack parameter that does not have a default *template-argument*,
  - (8.3) — each *template-argument* matches the corresponding *template-parameter* (17.3),
  - (8.4) — substitution of each template argument into the following template parameters (if any) succeeds, and
  - (8.5) — if the *template-id* is non-dependent, the associated constraints are satisfied as specified in the next paragraph.

A *simple-template-id* shall be valid unless it names a function template specialization (17.9.2). [Example:

```

template<class T, T::type n = 0> class X;
struct S {
 using type = int;
};
using T1 = X<S, int, int>; // error: too many arguments
using T2 = X<>; // error: no default argument for first template parameter
using T3 = X<1>; // error: value 1 does not match type-parameter
using T4 = X<int>; // error: substitution failure for second template parameter
using T5 = X<S>; // OK

```

— end example]

- <sup>9</sup> When the *template-name* of a *simple-template-id* names a constrained non-function template or a constrained template *template-parameter*, but not a member template that is a member of an unknown specialization (17.7), and all *template-arguments* in the *simple-template-id* are non-dependent (17.7.2.4), the associated constraints (17.4.2) of the constrained template shall be satisfied (17.4.1). [Example:

```

template<typename T> concept C1 = sizeof(T) != sizeof(int);

template<C1 T> struct S1 { };
template<C1 T> using Ptr = T*;

S1<int>* p; // error: constraints not satisfied
Ptr<int> p; // error: constraints not satisfied

template<typename T>
struct S2 { Ptr<int> x; }; // error, no diagnostic required

template<typename T>
struct S3 { Ptr<T> x; }; // OK, satisfaction is not required

S3<int> x; // error: constraints not satisfied

template<template<C1 T> class X>
struct S4 {
 X<int> x; // error, no diagnostic required
};

template<typename T> concept C2 = sizeof(T) == 1;

template<C2 T> struct S { };

template struct S<char[2]>; // error: constraints not satisfied
template<> struct S<char[2]> { }; // error: constraints not satisfied

```

— end example]

### 17.3 Template arguments

[temp.arg]

- <sup>1</sup> There are three forms of *template-argument*, corresponding to the three forms of *template-parameter*: type, non-type and template. The type and form of each *template-argument* specified in a *template-id* shall match the type and form specified for the corresponding parameter declared by the template in its *template-parameter-list*. When the parameter declared by the template is a template parameter pack (17.6.3), it will correspond to zero or more *template-arguments*. [Example:

```

template<class T> class Array {
 T* v;
 int sz;
public:
 explicit Array(int);
 T& operator[](int);
 T& elem(int i) { return v[i]; }
};

Array<int> v1(20);
typedef std::complex<double> dcomplex; // std::complex is a standard library template
Array<dcomplex> v2(30);

```

```

Array<dcomplex> v3(40);

void bar() {
 v1[3] = 7;
 v2[3] = v3.elem(4) = dcomplex(7,8);
}

```

— end example]

- <sup>2</sup> In a *template-argument*, an ambiguity between a *type-id* and an expression is resolved to a *type-id*, regardless of the form of the corresponding *template-parameter*.<sup>136</sup> [Example:

```

template<class T> void f();
template<int I> void f();

void g() {
 f<int>(); // int() is a type-id: call the first f()
}

```

— end example]

- <sup>3</sup> The name of a *template-argument* shall be accessible at the point where it is used as a *template-argument*. [Note: If the name of the *template-argument* is accessible at the point where it is used as a *template-argument*, there is no further access restriction in the resulting instantiation where the corresponding *template-parameter* name is used. — end note] [Example:

```

template<class T> class X {
 static T t;
};

class Y {
private:
 struct S { /* ... */ };
 X<S> x; // OK: S is accessible
 // X<Y::S> has a static member of type Y::S
 // OK: even though Y::S is private
};

X<Y::S> y; // error: S not accessible

```

— end example] For a *template-argument* that is a class type or a class template, the template definition has no special access rights to the members of the *template-argument*. [Example:

```

template <template <class TT> class T> class A {
 typename T<int>::S s;
};

template <class U> class B {
private:
 struct S { /* ... */ };
};

A b; // ill-formed: A has no access to B::S

```

— end example]

- <sup>4</sup> When template argument packs or default *template-arguments* are used, a *template-argument* list can be empty. In that case the empty <> brackets shall still be used as the *template-argument-list*. [Example:

```

template<class T = char> class String;
String<>* p; // OK: String<char>
String* q; // syntax error
template<class ... Elements> class Tuple;
Tuple<>* t; // OK: Elements is empty
Tuple* u; // syntax error

```

— end example]

<sup>136</sup>) There is no such ambiguity in a default *template-argument* because the form of the *template-parameter* determines the allowable forms of the *template-argument*.

- 5 An explicit destructor call (15.4) for an object that has a type that is a class template specialization may explicitly specify the *template-arguments*. [Example:

```
template<class T> struct A {
 ~A();
};
void f(A<int>* p, A<int>* q) {
 p->A<int>::~~A(); // OK: destructor call
 q->A<int>::~~A<int>(); // OK: destructor call
}
```

— end example]

- 6 If the use of a *template-argument* gives rise to an ill-formed construct in the instantiation of a template specialization, the program is ill-formed.
- 7 When name lookup for the name in a *template-id* finds an overload set, both non-template functions in the overload set and function templates in the overload set for which the *template-arguments* do not match the *template-parameters* are ignored. If none of the function templates have matching *template-parameters*, the program is ill-formed.
- 8 When a *simple-template-id* does not name a function, a default *template-argument* is implicitly instantiated (17.8.1) when the value of that default argument is needed. [Example:

```
template<typename T, typename U = int> struct S { };
S<bool>* p; // the type of p is S<bool, int>*
```

The default argument for U is instantiated to form the type S<bool, int>\*. — end example]

- 9 A *template-argument* followed by an ellipsis is a pack expansion (17.6.3).

### 17.3.1 Template type arguments

[temp.arg.type]

- 1 A *template-argument* for a *template-parameter* which is a type shall be a *type-id*.

2 [Example:

```
template <class T> class X { };
template <class T> void f(T t) { }
struct { } unnamed_obj;

void f() {
 struct A { };
 enum { e1 };
 typedef struct { } B;
 B b;
 X<A> x1; // OK
 X<A*> x2; // OK
 X x3; // OK
 f(e1); // OK
 f(unnamed_obj); // OK
 f(b); // OK
}
```

— end example] [Note: A template type argument may be an incomplete type (6.7). — end note]

### 17.3.2 Template non-type arguments

[temp.arg.nontype]

- 1 If the type T of a *template-parameter* (17.1) contains a placeholder type (10.1.7.4) or a placeholder for a deduced class type (10.1.7.5), the type of the parameter is the type deduced for the variable x in the invented declaration

```
T x = template-argument ;
```

If a deduced parameter type is not permitted for a *template-parameter* declaration (17.1), the program is ill-formed.

- 2 A *template-argument* for a non-type *template-parameter* shall be a converted constant expression (8.6) of the type of the *template-parameter*. For a non-type *template-parameter* of reference or pointer type, or for each non-static data member of reference or pointer type in a non-type *template-parameter* of class type or subobject thereof, the reference or pointer value shall not refer to or be the address of (respectively):

- (2.1) — a subobject (6.6.2),
- (2.2) — a temporary object (15.2),
- (2.3) — a string literal (5.13.5),
- (2.4) — the result of a `typeid` expression (8.5.1.8), or
- (2.5) — a predefined `__func__` variable (11.4.1).

[*Note*: If the *template-argument* represents a set of overloaded functions (or a pointer or member pointer to such), the matching function is selected from the set (16.4). — *end note*]

3 [Example:

```
template<const int* pci> struct X { /* ... */ };
int ai[10];
X<ai> xi; // array to pointer and qualification conversions

struct Y { /* ... */ };
template<const Y& b> struct Z { /* ... */ };
Y y;
Z<y> z; // no conversion, but note extra cv-qualification

template<int (&pa)[5]> struct W { /* ... */ };
int b[5];
W w; // no conversion

void f(char);
void f(int);

template<void (*pf)(int)> struct A { /* ... */ };

A<&f> a; // selects f(int)

template<auto n> struct B { /* ... */ };
B<5> b1; // OK: template parameter type is int
B<'a'> b2; // OK: template parameter type is char
B<2.5> b3; // error: template parameter type cannot be double
```

— *end example*]

4 [Note: A string literal (5.13.5) is not an acceptable *template-argument* for a *template-parameter* of non-class type. [Example:

```
template<class T, T p> class X {
 /* ... */
};

X<const char*, "Studebaker"> x; // error: string literal as template-argument

const char p[] = "Vivisectionist";
X<const char*, p> y; // OK

class A {
 constexpr A(const char*) {}
 auto operator<=>(A, A) = default;
};

X<A, "Pyrophoricity"> z; // OK, string literal is a constructor argument to A
```

— *end example*] — *end note*]

5 [Note: The address of an array element or non-static data member is not an acceptable *template-argument*. [Example:

```
template<int* p> class X { };

int a[10];
struct S { int m; static int s; } s;
```

```

X<&a[2]> x3; // error: address of array element
X<&s.m> x4; // error: address of non-static member
X<&s.s> x5; // OK: address of static member
X<&S::s> x6; // OK: address of static member

```

— end example] — end note]

- <sup>6</sup> [Note: A temporary object is not an acceptable *template-argument* when the corresponding *template-parameter* has reference type. [Example:

```

template<const int& CRI> struct B { /* ... */ };

B<1> b2; // error: temporary would be required for template argument

int c = 1;
B<c> b1; // OK

```

— end example] — end note]

### 17.3.3 Template template arguments

[temp.arg.template]

- <sup>1</sup> A *template-argument* for a template *template-parameter* shall be the name of a class template or an alias template, expressed as *id-expression*. When the *template-argument* names a class template, only primary class templates are considered when matching the template template argument with the corresponding parameter; partial specializations are not considered even if their parameter lists match that of the template template parameter.
- <sup>2</sup> Any partial specializations (17.6.5) associated with the primary class template or primary variable template are considered when a specialization based on the template *template-parameter* is instantiated. If a specialization is not visible at the point of instantiation, and it would have been selected had it been visible, the program is ill-formed, no diagnostic required. [Example:

```

template<class T> class A { // primary template
 int x;
};
template<class T> class A<T*> { // partial specialization
 long x;
};
template<template<class U> class V> class C {
 V<int> y;
 V<int*> z;
};
C<A> c; // V<int> within C<A> uses the primary template, so c.y.x has type int
 // V<int*> within C<A> uses the partial specialization, so c.z.x has type long

```

— end example]

- <sup>3</sup> A *template-argument* matches a template *template-parameter* P when P is at least as specialized as the *template-argument* A. If P contains a template parameter pack, then A also matches P if each of A's template parameters matches the corresponding template parameter in the *template-head* of P. Two template parameters match if they are of the same kind (type, non-type, template), for non-type *template-parameters*, their types are equivalent (17.6.6.1), and for template *template-parameters*, each of their corresponding *template-parameters* matches, recursively. When P's *template-head* contains a template parameter pack (17.6.3), the template parameter pack will match zero or more template parameters or template parameter packs in the *template-head* of A with the same type and form as the template parameter pack in P (ignoring whether those template parameters are template parameter packs).

[Example:

```

template<class T> class A { /* ... */ };
template<class T, class U = T> class B { /* ... */ };
template<class ... Types> class C { /* ... */ };
template<auto n> class D { /* ... */ };
template<template<class> class P> class X { /* ... */ };
template<template<class ...> class Q> class Y { /* ... */ };
template<template<int> class R> class Z { /* ... */ };

```

```
X<A> xa; // OK
X xb; // OK
X<C> xc; // OK
Y<A> ya; // OK
Y yb; // OK
Y<C> yc; // OK
Z<D> zd; // OK
```

— *end example*] [Example:

```
template <class T> struct eval;

template <template <class, class...> class TT, class T1, class... Rest>
struct eval<TT<T1, Rest...>> { };

template <class T1> struct A;
template <class T1, class T2> struct B;
template <int N> struct C;
template <class T1, int N> struct D;
template <class T1, class T2, int N = 17> struct E;

eval<A<int>> eA; // OK: matches partial specialization of eval
eval<B<int, float>> eB; // OK: matches partial specialization of eval
eval<C<17>> eC; // error: C does not match TT in partial specialization
eval<D<int, 17>> eD; // error: D does not match TT in partial specialization
eval<E<int, float>> eE; // error: E does not match TT in partial specialization
```

— *end example*] [Example:

```
template<typename T> concept C = requires (T t) { t.f(); };
template<typename T> concept D = C<T> && requires (T t) { t.g(); };

template<template<C> class P> struct S { };

template<C> struct X { };
template<D> struct Y { };
template<typename T> struct Z { };

S<X> s1; // OK, X and P have equivalent constraints
S<Y> s2; // error: P is not at least as specialized as Y
S<Z> s3; // OK, P is at least as specialized as Z
```

— *end example*]

- <sup>4</sup> A template *template-parameter* P is at least as specialized as a template *template-argument* A if, given the following rewrite to two function templates, the function template corresponding to P is at least as specialized as the function template corresponding to A according to the partial ordering rules for function templates (17.6.6.2). Given an invented class template X with the *template-head* of A (including default arguments and *requires-clause*, if any):

- (4.1) — Each of the two function templates has the same template parameters and *requires-clause* (if any), respectively, as P or A.
- (4.2) — Each function template has a single function parameter whose type is a specialization of X with template arguments corresponding to the template parameters from the respective function template where, for each template parameter PP in the *template-head* of the function template, a corresponding template argument AA is formed. If PP declares a template parameter pack, then AA is the pack expansion PP... (17.6.3); otherwise, AA is the *id-expression* PP.

If the rewrite produces an invalid type, then P is not at least as specialized as A.

## 17.4 Template constraints

[temp.constr]

- <sup>1</sup> [Note: This subclause defines the meaning of constraints on template arguments. The abstract syntax and satisfaction rules are defined in 17.4.1. Constraints are associated with declarations in 17.4.2. Declarations are partially ordered by their associated constraints (17.4.4). — *end note*]



**17.4.1 Constraints****[temp.constr.constr]**

- <sup>1</sup> A *constraint* is a sequence of logical operations and operands that specifies requirements on template arguments. The operands of a logical operation are constraints. There are three different kinds of constraints:
- (1.1) — conjunctions (17.4.1.1),
  - (1.2) — disjunctions (17.4.1.1), and
  - (1.3) — atomic constraints (17.4.1.2)
- <sup>2</sup> In order for a constrained template to be instantiated (17.8), its associated constraints (17.4.2) shall be satisfied as described in the following subclauses. [Note: Forming the name of a specialization of a class template, a variable template, or an alias template (17.2) requires the satisfaction of its constraints. Overload resolution (16.3.2) requires the satisfaction of constraints on functions and function templates. — end note]

**17.4.1.1 Logical operations****[temp.constr.op]**

- <sup>1</sup> There are two binary logical operations on constraints: conjunction and disjunction. [Note: These logical operations have no corresponding C++ syntax. For the purpose of exposition, conjunction is spelled using the symbol  $\wedge$  and disjunction is spelled using the symbol  $\vee$ . The operands of these operations are called the left and right operands. In the constraint  $A \wedge B$ ,  $A$  is the left operand, and  $B$  is the right operand. — end note]
- <sup>2</sup> A *conjunction* is a constraint taking two operands. To determine if a conjunction is *satisfied*, the satisfaction of the first operand is checked. If that is not satisfied, the conjunction is not satisfied. Otherwise, the conjunction is satisfied if and only if the second operand is satisfied.
- <sup>3</sup> A *disjunction* is a constraint taking two operands. To determine if a disjunction is *satisfied*, the satisfaction of the first operand is checked. If that is satisfied, the disjunction is satisfied. Otherwise, the disjunction is satisfied if and only if the second operand is satisfied.
- <sup>4</sup> [Example:

```
template<typename T>
constexpr bool get_value() { return T::value; }

template<typename T>
requires (sizeof(T) > 1) && get_value<T>()
void f(T); // has associated constraint sizeof(T) > 1 ^ get_value<T>()

void f(int);

f('a'); // OK: calls f(int)
```

In the satisfaction of the associated constraints (17.4.2) of `f`, the constraint `sizeof(char) > 1` is not satisfied; the second operand is not checked for satisfaction. — end example]

**17.4.1.2 Atomic constraints****[temp.constr.atomic]**

- <sup>1</sup> An *atomic constraint* is formed from an expression  $E$  and a mapping from the template parameters that appear within  $E$  to template arguments involving the template parameters of the constrained entity, called the *parameter mapping* (17.4.2). [Note: Atomic constraints are formed by constraint normalization (17.4.3).  $E$  is never a logical AND expression (8.5.14) nor a logical OR expression (8.5.15). — end note]
- <sup>2</sup> Two atomic constraints are *identical* if they are formed from the same *expression* and the targets of the parameter mappings are equivalent according to the rules for expressions described in 17.6.6.1.
- <sup>3</sup> To determine if an atomic constraint is *satisfied*, the parameter mapping and template arguments are first substituted into its expression. If substitution results in an invalid type or expression, the constraint is not satisfied. Otherwise, the lvalue-to-rvalue conversion (7.1) is performed if necessary, and  $E$  shall be a constant expression of type `bool`. The constraint is satisfied if and only if evaluation of  $E$  results in `true`. [Example:

```
template<typename T> concept C =
 sizeof(T) == 4 && !true; // requires atomic constraints sizeof(T) == 4 and !true

template<typename T> struct S {
 constexpr operator bool() const { return true; }
};
```

```

template<typename T> requires (S<T>{ })
void f(T); // #1
void f(int); // #2

void g() {
 f(0); // error: expression S<int>{ } does not have type bool
} // while checking satisfaction of deduced arguments of #1;
 // call is ill-formed even though #2 is a better match

```

— end example]

## 17.4.2 Constrained declarations [temp.constr.decl]

- <sup>1</sup> A template declaration (Clause 17) or function declaration (11.3.5) can be constrained by the use of a *requires-clause*. This allows the specification of constraints for that declaration as an expression:

*constraint-expression*:  
*logical-or-expression*

- <sup>2</sup> Constraints can also be associated with a declaration through the use of *constrained-parameters* in a *template-parameter-list*. Each of these forms introduces additional *constraint-expressions* that are used to constrain the declaration.

- <sup>3</sup> A template's *associated constraints* are defined as follows:

- (3.1) — If there are no introduced *constraint-expressions*, the declaration has no associated constraints.
- (3.2) — Otherwise, if there is a single introduced *constraint-expression*, the associated constraints are the normal form (17.4.3) of that expression.
- (3.3) — Otherwise, the associated constraints are the normal form of a logical AND expression (8.5.14) whose operands are in the following order:
  - (3.3.1) — the *constraint-expression* introduced by each *constrained-parameter* (17.1) in the declaration's *template-parameter-list*, in order of appearance, and
  - (3.3.2) — the *constraint-expression* introduced by a *requires-clause* following a *template-parameter-list* (Clause 17), and
  - (3.3.3) — the *constraint-expression* introduced by a trailing *requires-clause* (Clause 11) of a function declaration (11.3.5).

The formation of the associated constraints establishes the order in which constraints are instantiated when checking for satisfaction (17.4.1). [Example:

```

template<typename T> concept C = true;

template<C T> void f1(T);
template<typename T> requires C<T> void f2(T);
template<typename T> void f3(T) requires C<T>;

```

The functions f1, f2, and f3 have the associated constraint C<T>.

```

template<typename T> concept C1 = true;
template<typename T> concept C2 = sizeof(T) > 0;

template<C1 T> void f4(T) requires C2<T>;
template<typename T> requires C1<T> && C2<T> void f5(T);

```

The associated constraints of f4 and f5 are C1<T>  $\wedge$  C2<T>.

```

template<C1 T> requires C2<T> void f6();
template<C2 T> requires C1<T> void f7();

```

The associated constraints of f6 are C1<T>  $\wedge$  C2<T>, and those of f7 are C2<T>  $\wedge$  C1<T>. — end example]

## 17.4.3 Constraint normalization [temp.constr.normal]

- <sup>1</sup> The *normal form* of an *expression* E is a constraint (17.4.1) that is defined as follows:

- (1.1) — The normal form of an expression ( E ) is the normal form of E.
- (1.2) — The normal form of an expression E1 || E2 is the disjunction (17.4.1.1) of the normal forms of E1 and E2.

- (1.3) — The normal form of an expression  $E1 \ \&\& \ E2$  is the conjunction of the normal forms of  $E1$  and  $E2$ .
- (1.4) — The normal form of an *id-expression* of the form  $C\langle A_1, A_2, \dots, A_n \rangle$ , where  $C$  names a concept, is the normal form of the *constraint-expression* of  $C$ , after substituting  $A_1, A_2, \dots, A_n$  for  $C$ 's respective template parameters in the parameter mappings in each atomic constraint. If any such substitution results in an invalid type or expression, the program is ill-formed; no diagnostic is required. [*Example:*

```
template<typename T> concept A = T::value || true;
template<typename U> concept B = A<U*>;
template<typename V> concept C = B<V&&>;
```

Normalization of  $B$ 's *constraint-expression* is valid and results in  $T::value$  (with the mapping  $T \mapsto U^*$ )  $\vee$  `true` (with an empty mapping), despite the expression  $T::value$  being ill-formed for a pointer type  $T$ . Normalization of  $C$ 's *constraint-expression* results in the program being ill-formed, because it would form the invalid type  $T\&\&^*$  in the parameter mapping. — *end example*]

- (1.5) — The normal form of any other expression  $E$  is the atomic constraint whose expression is  $E$  and whose parameter mapping is the identity mapping.
- 2 The process of obtaining the normal form of a *constraint-expression* is called *normalization*. [*Note:* Normalization of *constraint-expressions* is performed when determining the associated constraints (17.4.1) of a declaration and when evaluating the value of an *id-expression* that names a concept specialization (8.4.4). — *end note*]

3 [*Example:*

```
template<typename T> concept C1 = sizeof(T) == 1;
template<typename T> concept C2 = C1<T>() && 1 == 2;
template<typename T> concept C3 = requires { typename T::type; };
template<typename T> concept C4 = requires (T x) { ++x; }
```

```
template<C2 U> void f1(U); // #1
template<C3 U> void f2(U); // #2
template<C4 U> void f3(U); // #3
```

The associated constraints of #1 are `sizeof(T) == 1` (with mapping  $T \mapsto U$ )  $\wedge$  `1 == 2`.

The associated constraints of #2 are `requires { typename T::type; }` (with mapping  $T \mapsto U$ ).

The associated constraints of #3 are `requires (T x) { ++x; }` (with mapping  $T \mapsto U$ ). — *end example*]

#### 17.4.4 Partial ordering by constraints

[temp.constr.order]

- 1 A constraint  $P$  *subsumes* a constraint  $Q$  if and only if, for every disjunctive clause  $P_i$  in the disjunctive normal form<sup>137</sup> of  $P$ ,  $P_i$  subsumes every conjunctive clause  $Q_j$  in the conjunctive normal form<sup>138</sup> of  $Q$ , where
- (1.1) — a disjunctive clause  $P_i$  subsumes a conjunctive clause  $Q_j$  if and only if there exists an atomic constraint  $P_{ia}$  in  $P_i$  for which there exists an atomic constraint  $Q_{jb}$  in  $Q_j$  such that  $P_{ia}$  subsumes  $Q_{jb}$ , and
- (1.2) — an atomic constraint  $A$  subsumes another atomic constraint  $B$  if and only if the  $A$  and  $B$  are identical using the rules described in 17.4.1.2.

[*Example:* Let  $A$  and  $B$  be atomic constraints (17.4.1.2). The constraint  $A \wedge B$  subsumes  $A$ , but  $A$  does not subsume  $A \wedge B$ . The constraint  $A$  subsumes  $A \vee B$ , but  $A \vee B$  does not subsume  $A$ . Also note that every constraint subsumes itself. — *end example*]

- 2 [*Note:* The subsumption relation defines a partial ordering on constraints. This partial ordering is used to determine
- (2.1) — the best viable candidate of non-template functions (16.3.3),
- (2.2) — the address of a non-template function (16.4),
- (2.3) — the matching of template arguments (17.3.3),
- (2.4) — the partial ordering of class template specializations (17.6.5.2), and
- (2.5) — the partial ordering of function templates (17.6.6.2).

137) A constraint is in disjunctive normal form when it is a disjunction of clauses where each clause is a conjunction of atomic constraints. [*Example:* For atomic constraints  $A$ ,  $B$ , and  $C$ , the disjunctive normal form of the constraint  $A \wedge (B \vee C)$  is  $(A \wedge B) \vee (A \wedge C)$ . Its disjunctive clauses are  $(A \wedge B)$  and  $(A \wedge C)$ . — *end example*]

138) A constraint is in conjunctive normal form when it is a conjunction of clauses where each clause is a disjunction of atomic constraints. [*Example:* For atomic constraints  $A$ ,  $B$ , and  $C$ , the constraint  $A \wedge (B \vee C)$  is in conjunctive normal form. Its conjunctive clauses are  $A$  and  $(B \vee C)$ . — *end example*]

— *end note*]

<sup>3</sup> A declaration D1 is *at least as constrained* as a declaration D2 if

- (3.1) — D1 and D2 are both constrained declarations and D1's associated constraints subsume those of D2; or
- (3.2) — D2 has no associated constraints.

<sup>4</sup> A declaration D1 is *more constrained* than another declaration D2 when D1 is at least as constrained as D2, and D2 is not at least as constrained as D1. [*Example*:

```
template<typename T> concept C1 = requires(T t) { --t; };
template<typename T> concept C2 = C1<T> && requires(T t) { *t; };

template<C1 T> void f(T); // #1
template<C2 T> void f(T); // #2
template<typename T> void g(T); // #3
template<C1 T> void g(T); // #4

f(0); // selects #1
f((int*)0); // selects #2
g(true); // selects #3 because C1<bool> is not satisfied
g(0); // selects #4
```

— *end example*]

## 17.5 Type equivalence

[temp.type]

<sup>1</sup> Two *template-ids* refer to the same class, function, or variable if

- (1.1) — their *template-names*, *operator-function-ids*, or *literal-operator-ids* refer to the same template and
- (1.2) — their corresponding type *template-arguments* are the same type and
- (1.3) — their corresponding non-type *template-arguments* of pointer-to-member type refer to the same class member or are both the null member pointer value and
- (1.4) — their corresponding non-type *template-arguments* of reference type refer to the same object or function and
- (1.5) — their remaining corresponding non-type *template-arguments* have the same type and value after conversion to the type of the *template-parameter*, where they are considered to have the same value if they compare equal with `operator<=>`, and
- (1.6) — their corresponding template *template-arguments* refer to the same template.

[*Example*:

```
template<class E, int size> class buffer { /* ... */ };
buffer<char,2*512> x;
buffer<char,1024> y;
```

declares x and y to be of the same type, and

```
template<class T, void(*err_fct)()> class list { /* ... */ };
list<int,&error_handler1> x1;
list<int,&error_handler2> x2;
list<int,&error_handler2> x3;
list<char,&error_handler2> x4;
```

declares x2 and x3 to be of the same type. Their type differs from the types of x1 and x4.

```
template<class T> struct X { };
template<class> struct Y { };
template<class T> using Z = Y<T>;
X<Y<int>> > y;
X<Z<int>> > z;
```

declares y and z to be of the same type. — *end example*]

<sup>2</sup> If an expression *e* is type-dependent (17.7.2.2), `decltype(e)` denotes a unique dependent type. Two such *decltype-specifiers* refer to the same type only if their *expressions* are equivalent (17.6.6.1). [*Note*: However, such a type may be aliased, e.g., by a *typedef-name*. — *end note*]

## 17.6 Template declarations

[temp.decls]

- <sup>1</sup> A *template-id*, that is, the *template-name* followed by a *template-argument-list* shall not be specified in the declaration of a primary template declaration. [Example:

```
template<class T1, class T2, int I> class A<T1, T2, I> { }; // error
template<class T1, int I> void sort<T1, I>(T1 data[I]); // error
```

— end example] [Note: However, this syntax is allowed in class template partial specializations (17.6.5). — end note]

- <sup>2</sup> For purposes of name lookup and instantiation, default arguments, *partial-concept-ids*, *requires-clauses* (Clause 17), and *noexcept-specifiers* of function templates and of member functions of class templates are considered definitions; each default argument, *partial-concept-ids*, *requires-clause*, or *noexcept-specifier* is a separate definition which is unrelated to the templated function definition or to any other default arguments *partial-concept-ids*, *requires-clauses*, or *noexcept-specifiers*. For the purpose of instantiation, the substatements of a `constexpr` if statement (9.4.1) are considered definitions.
- <sup>3</sup> Because an *alias-declaration* cannot declare a *template-id*, it is not possible to partially or explicitly specialize an alias template.

### 17.6.1 Class templates

[temp.class]

- <sup>1</sup> A *class template* defines the layout and operations for an unbounded set of related types.

<sup>2</sup> [Example: A single class template `List` might provide an unbounded set of class definitions: one class `List<T>` for every type `T`, each describing a linked list of elements of type `T`. Similarly, a class template `Array` describing a contiguous, dynamic array might be defined like this:

```
template<class T> class Array {
 T* v;
 int sz;
public:
 explicit Array(int);
 T& operator[](int);
 T& elem(int i) { return v[i]; }
};
```

The prefix `template<class T>` specifies that a template is being declared and that a *type-name* `T` may be used in the declaration. In other words, `Array` is a parameterized type with `T` as its parameter. — end example]

- <sup>3</sup> When a member function, a member class, a member enumeration, a static data member or a member template of a class template is defined outside of the class template definition, the member definition is defined as a template definition in which the *template-head* is equivalent to that of the class template (17.6.6.1). The names of the template parameters used in the definition of the member may be different from the template parameter names used in the class template definition. The template argument list following the class template name in the member definition shall name the parameters in the same order as the one used in the template parameter list of the member. Each template parameter pack shall be expanded with an ellipsis in the template argument list. [Example:

```
template<class T1, class T2> struct A {
 void f1();
 void f2();
};

template<class T2, class T1> void A<T2,T1>::f1() { } // OK
template<class T2, class T1> void A<T1,T2>::f2() { } // error

template<class ... Types> struct B {
 void f3();
 void f4();
};

template<class ... Types> void B<Types ...>::f3() { } // OK
template<class ... Types> void B<Types>::f4() { } // error

template<typename T> concept C = true;
template<typename T> concept D = true;
```

```

template<C T> struct S {
 void f();
 void g();
 void h();
 template<D U> struct Inner;
};

template<C A> void S<A>::f() { } // OK: template-heads match
template<typename T> void S<T>::g() { } // error: no matching declaration for S<T>

template<typename T> requires C<T> // error (no diagnostic required): template-heads are
void S<T>::h() { } // functionally equivalent but not equivalent

template<C X> template<D Y>
struct S<X>::Inner { }; // OK

```

— end example]

- <sup>4</sup> In a redeclaration, partial specialization, explicit specialization or explicit instantiation of a class template, the *class-key* shall agree in kind with the original class template declaration (10.1.7.3).

### 17.6.1.1 Member functions of class templates [temp.mem.func]

- <sup>1</sup> A member function of a class template may be defined outside of the class template definition in which it is declared. [Example:

```

template<class T> class Array {
 T* v;
 int sz;
public:
 explicit Array(int);
 T& operator[](int);
 T& elem(int i) { return v[i]; }
};

```

declares three function templates. The subscript function might be defined like this:

```

template<class T> T& Array<T>::operator[](int i) {
 if (i<0 || sz<=i) error("Array: range error");
 return v[i];
}

```

A constrained member function can be defined out of line:

```

template<typename T> concept C = requires {
 typename T::type;
};

template<typename T> struct S {
 void f() requires C<T>;
 void g() requires C<T>;
};

template<typename T>
void S<T>::f() requires C<T> { } // OK
template<typename T>
void S<T>::g() { } // error: no matching function in S<T>

```

— end example]

- <sup>2</sup> The *template-arguments* for a member function of a class template are determined by the *template-arguments* of the type of the object for which the member function is called. [Example: The *template-argument* for `Array<T>::operator[]()` will be determined by the `Array` to which the subscripting operation is applied.

```

Array<int> v1(20);
Array<dcomplex> v2(30);

v1[3] = 7; // Array<int>::operator[]()
v2[3] = dcomplex(7,8); // Array<dcomplex>::operator[]()

```

— end example]

### 17.6.1.2 Member classes of class templates [temp.mem.class]

- <sup>1</sup> A member class of a class template may be defined outside the class template definition in which it is declared. [Note: The member class must be defined before its first use that requires an instantiation (17.8.1). For example,

```
template<class T> struct A {
 class B;
};
A<int>::B* b1; // OK: requires A to be defined but not A::B
template<class T> class A<T>::B { };
A<int>::B b2; // OK: requires A::B to be defined
```

— end note]

### 17.6.1.3 Static data members of class templates [temp.static]

- <sup>1</sup> A definition for a static data member or static data member template may be provided in a namespace scope enclosing the definition of the static member's class template. [Example:

```
template<class T> class X {
 static T s;
};
template<class T> T X<T>::s = 0;

struct limits {
 template<class T>
 static const T min; // declaration
};

template<class T>
 const T limits::min = { }; // definition
```

— end example]

- <sup>2</sup> An explicit specialization of a static data member declared as an array of unknown bound can have a different bound from its definition, if any. [Example:

```
template <class T> struct A {
 static int i[];
};
template <class T> int A<T>::i[4]; // 4 elements
template <> int A<int>::i[] = { 1 }; // OK: 1 element
```

— end example]

### 17.6.1.4 Enumeration members of class templates [temp.mem.enum]

- <sup>1</sup> An enumeration member of a class template may be defined outside the class template definition. [Example:

```
template<class T> struct A {
 enum E : T;
};
A<int> a;
template<class T> enum A<T>::E : T { e1, e2 };
A<int>::E e = A<int>::e1;
```

— end example]

## 17.6.2 Member templates [temp.mem]

- <sup>1</sup> A template can be declared within a class or class template; such a template is called a member template. A member template can be defined within or outside its class definition or class template definition. A member template of a class template that is defined outside of its class template definition shall be specified with a *template-head* equivalent to that of the class template followed by a *template-head* equivalent to that of the member template (17.6.6.1). [Example:

```
template<class T> struct string {
 template<class T2> int compare(const T2&);
```

```

 template<class T2> string(const string<T2>& s) { /* ... */ }
};

template<class T> template<class T2> int string<T>::compare(const T2& s) {
}

```

— end example] [Example:

```

template<typename T> concept C1 = true;
template<typename T> concept C2 = sizeof(T) <= 4;

template<C1 T> struct S {
 template<C2 U> void f(U);
 template<C2 U> void g(U);
};

template<C1 T> template<C2 U>
void S<T>::f(U) { } // OK
template<C1 T> template<typename U>
void S<T>::g(U) { } // error: no matching function in S<T>

```

— end example]

- <sup>2</sup> A local class of non-closure type shall not have member templates. Access control rules (Clause 14) apply to member template names. A destructor shall not be a member template. A non-template member function (11.3.5) with a given name and type and a member function template of the same name, which could be used to generate a specialization of the same type, can both be declared in a class. When both exist, a use of that name and type refers to the non-template member unless an explicit template argument list is supplied. [Example:

```

template <class T> struct A {
 void f(int);
 template <class T2> void f(T2);
};

template <> void A<int>::f(int) { } // non-template member function
template <> template <> void A<int>::f<>(int) { } // member function template specialization

int main() {
 A<char> ac;
 ac.f(1); // non-template
 ac.f('c'); // template
 ac.f<>(1); // template
}

```

— end example]

- <sup>3</sup> A member function template shall not be virtual. [Example:

```

template <class T> struct AA {
 template <class C> virtual void g(C); // error
 virtual void f(); // OK
};

```

— end example]

- <sup>4</sup> A specialization of a member function template does not override a virtual function from a base class. [Example:

```

class B {
 virtual void f(int);
};

class D : public B {
 template <class T> void f(T); // does not override B::f(int)
 void f(int i) { f<>(i); } // overriding function that calls the template instantiation
};

```

— end example]



- 5 A specialization of a conversion function template is referenced in the same way as a non-template conversion function that converts to the same type. [Example:

```

struct A {
 template <class T> operator T*();
};
template <class T> A::operator T*(){ return 0; }
template <> A::operator char*(){ return 0; } // specialization
template A::operator void*(); // explicit instantiation

int main() {
 A a;
 int* ip;
 ip = a.operator int*(); // explicit call to template operator A::operator int*()
}

```

— end example] [Note: There is no syntax to form a *template-id* (17.2) by providing an explicit template argument list (17.9.1) for a conversion function template (15.3.2). — end note]

- 6 A specialization of a conversion function template is not found by name lookup. Instead, any conversion function templates visible in the context of the use are considered. For each such operator, if argument deduction succeeds (17.9.2.3), the resulting specialization is used as if found by name lookup.
- 7 A *using-declaration* in a derived class cannot refer to a specialization of a conversion function template in a base class.
- 8 Overload resolution (16.3.3.2) and partial ordering (17.6.6.2) are used to select the best conversion function among multiple specializations of conversion function templates and/or non-template conversion functions.

### 17.6.3 Variadic templates

[temp.variadic]

- 1 A *template parameter pack* is a template parameter that accepts zero or more template arguments. [Example:

```

template<class ... Types> struct Tuple { };

Tuple<> t0; // Types contains no arguments
Tuple<int> t1; // Types contains one argument: int
Tuple<int, float> t2; // Types contains two arguments: int and float
Tuple<0> error; // error: 0 is not a type

```

— end example]

- 2 A *function parameter pack* is a function parameter that accepts zero or more function arguments. [Example:

```

template<class ... Types> void f(Types ... args);

f(); // args contains no arguments
f(1); // args contains one argument: int
f(2, 1.0); // args contains two arguments: int and double

```

— end example]

- 3 An *init-capture pack* is a lambda capture that introduces an *init-capture* for each of the elements in the pack expansion of its *initializer*. [Example:

```

template <typename... Args>
void foo(Args... args) {
 [...xs=args]{
 bar(xs...); // xs is an init-capture pack
 };
}

foo(); // xs contains zero init-captures
foo(1); // xs contains one init-capture

```

— end example]

- 4 A *pack* is a template parameter pack, a function parameter pack, or an *init-capture* pack. The number of elements of a template parameter pack or a function parameter pack is the number of arguments provided for the parameter pack. The number of elements of an *init-capture* pack is the number of elements in the pack expansion of its *initializer*.

<sup>5</sup> A *pack expansion* consists of a *pattern* and an ellipsis, the instantiation of which produces zero or more instantiations of the pattern in a list (described below). The form of the pattern depends on the context in which the expansion occurs. Pack expansions can occur in the following contexts:

- (5.1) — In a function parameter pack (11.3.5); the pattern is the *parameter-declaration* without the ellipsis.
- (5.2) — In a *using-declaration* (10.3.3); the pattern is a *using-declarator*.
- (5.3) — In a template parameter pack that is a pack expansion (17.1):
  - (5.3.1) — if the template parameter pack is a *parameter-declaration*; the pattern is the *parameter-declaration* without the ellipsis;
  - (5.3.2) — if the template parameter pack is a *type-parameter* with a *template-parameter-list*; the pattern is the corresponding *type-parameter* without the ellipsis.
- (5.4) — In an *initializer-list* (11.6); the pattern is an *initializer-clause*.
- (5.5) — In a *base-specifier-list* (Clause 13); the pattern is a *base-specifier*.
- (5.6) — In a *mem-initializer-list* (15.6.2) for a *mem-initializer* whose *mem-initializer-id* denotes a base class; the pattern is the *mem-initializer*.
- (5.7) — In a *template-argument-list* (17.3); the pattern is a *template-argument*.
- (5.8) — In an *attribute-list* (10.6.1); the pattern is an *attribute*.
- (5.9) — In an *alignment-specifier* (10.6.2); the pattern is the *alignment-specifier* without the ellipsis.
- (5.10) — In a *capture-list* (8.4.5); the pattern is a *capture*.
- (5.11) — In a `sizeof...` expression (8.5.2.3); the pattern is an *identifier*.
- (5.12) — In a *fold-expression* (8.4.6); the pattern is the *cast-expression* that contains an unexpanded pack.

[*Example:*

```
template<class ... Types> void f(Types ... rest);
template<class ... Types> void g(Types ... rest) {
 f(&rest ...); // “&rest ...” is a pack expansion; “&rest” is its pattern
}
```

— *end example*]

- <sup>6</sup> For the purpose of determining whether a pack satisfies a rule regarding entities other than packs, the pack is considered to be the entity that would result from an instantiation of the pattern in which it appears.
- <sup>7</sup> A pack whose name appears within the pattern of a pack expansion is expanded by that pack expansion. An appearance of the name of a pack is only expanded by the innermost enclosing pack expansion. The pattern of a pack expansion shall name one or more packs that are not expanded by a nested pack expansion; such packs are called *unexpanded packs* in the pattern. All of the packs expanded by a pack expansion shall have the same number of arguments specified. An appearance of a name of a pack that is not expanded is ill-formed. [*Example:*

```
template<typename...> struct Tuple {};
template<typename T1, typename T2> struct Pair {};

template<class ... Args1> struct zip {
 template<class ... Args2> struct with {
 typedef Tuple<Pair<Args1, Args2> ... > type;
 };
};

typedef zip<short, int>::with<unsigned short, unsigned>::type T1;
// T1 is Tuple<Pair<short, unsigned short>, Pair<int, unsigned>>
typedef zip<short>::with<unsigned short, unsigned>::type T2;
// error: different number of arguments specified for Args1 and Args2

template<class ... Args>
void g(Args ... args) { // OK: Args is expanded by the function parameter pack args
 f(const_cast<const Args*>(&args)...); // OK: “Args” and “args” are expanded
 f(5 ...); // error: pattern does not contain any packs
 f(args); // error: pack “args” is not expanded
}
```

```

 f(h(args ...) + args ...); // OK: first "args" expanded within h,
 // second "args" expanded within f
}
— end example]

```

8 The instantiation of a pack expansion that is neither a `sizeof...` expression nor a *fold-expression* produces a list of elements  $E_1, E_2, \dots, E_N$ , where  $N$  is the number of elements in the pack expansion parameters. Each  $E_i$  is generated by instantiating the pattern and replacing each pack expansion parameter with its  $i^{\text{th}}$  element. Such an element, in the context of the instantiation, is interpreted as follows:

- (8.1) — if the pack is a template parameter pack, the element is a template parameter (17.1) of the corresponding kind (type or non-type) designating the  $i^{\text{th}}$  corresponding type or value template argument;
- (8.2) — if the pack is a function parameter pack, the element is an *id-expression* designating the  $i^{\text{th}}$  function parameter that resulted from instantiation of the function parameter pack declaration; otherwise
- (8.3) — if the pack is an *init-capture* pack, the element is an *id-expression* designating the variable introduced by the  $i^{\text{th}}$  *init-capture* that resulted from instantiation of the *init-capture* pack.

All of the  $E_i$  become items in the enclosing list. [Note: The variety of list varies with the context: *expression-list*, *base-specifier-list*, *template-argument-list*, etc. — end note] When  $N$  is zero, the instantiation of the expansion produces an empty list. Such an instantiation does not alter the syntactic interpretation of the enclosing construct, even in cases where omitting the list entirely would otherwise be ill-formed or would result in an ambiguity in the grammar. [Example:

```

template<class... T> struct X : T... { };
template<class... T> void f(T... values) {
 X<T...> x(values...);
}

template void f<>(); // OK: X<> has no base classes
 // x is a variable of type X<> that is value-initialized

```

— end example]

9 The instantiation of a `sizeof...` expression (8.5.2.3) produces an integral constant containing the number of elements in the pack it expands.

10 The instantiation of a *fold-expression* produces:

- (10.1) —  $((E_1 \text{ op } E_2) \text{ op } \dots) \text{ op } E_N$  for a unary left fold,
- (10.2) —  $E_1 \text{ op } (\dots \text{ op } (E_{N-1} \text{ op } E_N))$  for a unary right fold,
- (10.3) —  $((E \text{ op } E_1) \text{ op } E_2) \text{ op } \dots) \text{ op } E_N$  for a binary left fold, and
- (10.4) —  $E_1 \text{ op } (\dots \text{ op } (E_{N-1} \text{ op } (E_N \text{ op } E)))$  for a binary right fold.

In each case, *op* is the *fold-operator*,  $N$  is the number of elements in the pack expansion parameters, and each  $E_i$  is generated by instantiating the pattern and replacing each pack expansion parameter with its  $i^{\text{th}}$  element. For a binary fold-expression,  $E$  is generated by instantiating the *cast-expression* that did not contain an unexpanded pack. [Example:

```

template<typename ...Args>
bool all(Args ...args) { return (... && args); }

bool b = all(true, true, true, false);

```

Within the instantiation of `all`, the returned expression expands to  $((\text{true} \ \&\& \ \text{true}) \ \&\& \ \text{true}) \ \&\& \ \text{false}$ , which evaluates to `false`. — end example] If  $N$  is zero for a unary fold-expression, the value of the expression is shown in Table 14; if the operator is not listed in Table 14, the instantiation is ill-formed.

Table 14 — Value of folding empty sequences

| Operator                | Value when pack is empty |
|-------------------------|--------------------------|
| <code>&amp;&amp;</code> | <code>true</code>        |
| <code>  </code>         | <code>false</code>       |
| <code>,</code>          | <code>void()</code>      |

## 17.6.4 Friends

[temp.friend]

<sup>1</sup> A friend of a class or class template can be a function template or class template, a specialization of a function template or class template, or a non-template function or class. For a friend function declaration that is not a template declaration:

- (1.1) — if the name of the friend is a qualified or unqualified *template-id*, the friend declaration refers to a specialization of a function template, otherwise,
- (1.2) — if the name of the friend is a *qualified-id* and a matching non-template function is found in the specified class or namespace, the friend declaration refers to that function, otherwise,
- (1.3) — if the name of the friend is a *qualified-id* and a matching function template is found in the specified class or namespace, the friend declaration refers to the deduced specialization of that function template (17.9.2.6), otherwise,
- (1.4) — the name shall be an *unqualified-id* that declares (or redeclares) a non-template function.

[Example:

```
template<class T> class task;
template<class T> task<T>* preempt(task<T>*);

template<class T> class task {
 friend void next_time();
 friend void process(task<T>*);
 friend task<T>* preempt<T>(task<T>*);
 template<class C> friend int func(C);

 friend class task<int>;
 template<class P> friend class frd;
};
```

Here, each specialization of the `task` class template has the function `next_time` as a friend; because `process` does not have explicit *template-arguments*, each specialization of the `task` class template has an appropriately typed function `process` as a friend, and this friend is not a function template specialization; because the friend `preempt` has an explicit *template-argument* `T`, each specialization of the `task` class template has the appropriate specialization of the function template `preempt` as a friend; and each specialization of the `task` class template has all specializations of the function template `func` as friends. Similarly, each specialization of the `task` class template has the class template specialization `task<int>` as a friend, and has all specializations of the class template `frd` as friends. — end example]

<sup>2</sup> A friend template may be declared within a class or class template. A friend function template may be defined within a class or class template, but a friend class template may not be defined in a class or class template. In these cases, all specializations of the friend class or friend function template are friends of the class or class template granting friendship. [Example:

```
class A {
 template<class T> friend class B; // OK
 template<class T> friend void f(T){ /* ... */ } // OK
};
```

— end example]

<sup>3</sup> A template friend declaration specifies that all specializations of that template, whether they are implicitly instantiated (17.8.1), partially specialized (17.6.5) or explicitly specialized (17.8.3), are friends of the class containing the template friend declaration. [Example:

```
class X {
 template<class T> friend struct A;
 class Y { };
};

template<class T> struct A { X::Y ab; }; // OK
template<class T> struct A<T*> { X::Y ab; }; // OK
```

— end example]

<sup>4</sup> A template friend declaration may declare a member of a dependent type to be a friend. The friend declaration shall declare a function or specify a type with an *elaborated-type-specifier*, in either case with a

*nested-name-specifier* ending with a *simple-template-id*, *C*, whose *template-name* names a class template. The template parameters of the template friend declaration shall be deducible from *C* (17.9.2.5). In this case, a member of a specialization *S* of the class template is a friend of the class granting friendship if deduction of the template parameters of *C* from *S* succeeds, and substituting the deduced template arguments into the friend declaration produces a declaration that would be a valid redeclaration of the member of the specialization. [Example:

```

template<class T> struct A {
 struct B { };
 void f();
 struct D {
 void g();
 };
 T h();
 template<T U> T i();
};
template<> struct A<int> {
 struct B { };
 int f();
 struct D {
 void g();
 };
 template<int U> int i();
};
template<> struct A<float*> {
 int *h();
};

class C {
 template<class T> friend struct A<T>::B; // grants friendship to A<int>::B even though
 // it is not a specialization of A<T>::B
 template<class T> friend void A<T>::f(); // does not grant friendship to A<int>::f()
 // because its return type does not match
 template<class T> friend void A<T>::D::g(); // ill-formed: A<T>::D does not end with
 // a simple-template-id
 template<class T> friend int *A<T*>::h(); // grants friendship to A<int*>::h() and A<float*>::h()
 template<class T> template<T U>
 friend T A<T>::i(); // grants friendship to instantiations of A<T>::i() and
 // to A<int>::i(), and thereby to all specializations
 // of those function templates
};

```

— end example]

<sup>5</sup> [Note: A friend declaration may first declare a member of an enclosing namespace scope (17.7.5). — end note]

<sup>6</sup> A friend template shall not be declared in a local class.

<sup>7</sup> Friend declarations shall not declare partial specializations. [Example:

```

template<class T> class A { };
class X {
 template<class T> friend class A<T*>; // error
};

```

— end example]

<sup>8</sup> When a friend declaration refers to a specialization of a function template, the function parameter declarations shall not include default arguments, nor shall the inline specifier be used in such a declaration.

<sup>9</sup> A non-template friend declaration shall not have a *requires-clause*.

### 17.6.5 Class template partial specializations

[temp.class.spec]

<sup>1</sup> A *primary class template* declaration is one in which the class template name is an identifier. A template declaration in which the class template name is a *simple-template-id* is a *partial specialization* of the class template named in the *simple-template-id*. A partial specialization of a class template provides an alternative definition of the template that is used instead of the primary definition when the arguments in a specialization match those given in the partial specialization (17.6.5.1). The primary template shall be declared before

any specializations of that template. A partial specialization shall be declared before the first use of a class template specialization that would make use of the partial specialization as the result of an implicit or explicit instantiation in every translation unit in which such a use occurs; no diagnostic is required.

- 2 Each class template partial specialization is a distinct template and definitions shall be provided for the members of a template partial specialization (17.6.5.3).

3 [Example:

```
template<class T1, class T2, int I> class A { };
template<class T, int I> class A<T, T*, I> { };
template<class T1, class T2, int I> class A<T1*, T2, I> { };
template<class T> class A<int, T*, 5> { };
template<class T1, class T2, int I> class A<T1, T2*, I> { };
```

The first declaration declares the primary (unspecialized) class template. The second and subsequent declarations declare partial specializations of the primary template. — end example]

- 4 A class template partial specialization may be constrained (Clause 17). [Example:

```
template<typename T> concept C = true;

template<typename T> struct X { };
template<typename T> struct X<T*> { }; // #1
template<C T> struct X<T> { }; // #2
```

Both partial specializations are more specialized than the primary template. #1 is more specialized because the deduction of its template arguments from the template argument list of the class template specialization succeeds, while the reverse does not. #2 is more specialized because the template arguments are equivalent, but the partial specialization is more constrained (17.4.4). — end example]

- 5 The template parameters are specified in the angle bracket enclosed list that immediately follows the keyword `template`. For partial specializations, the template argument list is explicitly written immediately following the class template name. For primary templates, this list is implicitly described by the template parameter list. Specifically, the order of the template arguments is the sequence in which they appear in the template parameter list. [Example: The template argument list for the primary template in the example above is <T1, T2, I>. — end example] [Note: The template argument list shall not be specified in the primary template declaration. For example,

```
template<class T1, class T2, int I>
class A<T1, T2, I> { }; // error
```

— end note]

- 6 A class template partial specialization may be declared in any scope in which the corresponding primary template may be defined (10.3.1.2, 12.2, 17.6.2). [Example:

```
template<class T> struct A {
 struct C {
 template<class T2> struct B { };
 template<class T2> struct B<T2*> { }; // partial specialization #1
 };
};

// partial specialization of A<T>::C::B<T2>
template<class T> template<class T2>
struct A<T>::C::B<T2*> { }; // #2

A<short>::C::B<int*> absip; // uses partial specialization #2
```

— end example]

- 7 Partial specialization declarations themselves are not found by name lookup. Rather, when the primary template name is used, any previously-declared partial specializations of the primary template are also considered. One consequence is that a *using-declaration* which refers to a class template does not restrict the set of partial specializations which may be found through the *using-declaration*. [Example:

```
namespace N {
 template<class T1, class T2> class A { }; // primary template
}
```

```

using N::A; // refers to the primary template

namespace N {
 template<class T> class A<T, T*> { }; // partial specialization
}

A<int,int*> a; // uses the partial specialization, which is found through the using-declaration
 // which refers to the primary template

```

— end example]

<sup>8</sup> A non-type argument is non-specialized if it is the name of a non-type parameter. All other non-type arguments are specialized.

<sup>9</sup> Within the argument list of a class template partial specialization, the following restrictions apply:

- (9.1) — The type of a template parameter corresponding to a specialized non-type argument shall not be dependent on a parameter of the specialization. [Example:

```

template <class T, T t> struct C {};
template <class T> struct C<T, 1>; // error

template< int X, int (*array_ptr)[X] > class A {};
int array[5];
template< int X > class A<X,&array> { }; // error

```

— end example]

- (9.2) — The specialization shall be more specialized than the primary template (17.6.5.2).

- (9.3) — The template parameter list of a specialization shall not contain default template argument values.<sup>139</sup>

- (9.4) — An argument shall not contain an unexpanded pack. If an argument is a pack expansion (17.6.3), it shall be the last argument in the template argument list.

<sup>10</sup> The usual access checking rules do not apply to non-dependent names used to specify template arguments of the *simple-template-id* of the partial specialization. [Note: The template arguments may be private types or objects that would normally not be accessible. Dependent names cannot be checked when declaring the partial specialization, but will be checked when substituting into the partial specialization. — end note]

### 17.6.5.1 Matching of class template partial specializations [temp.class.spec.match]

<sup>1</sup> When a class template is used in a context that requires an instantiation of the class, it is necessary to determine whether the instantiation is to be generated using the primary template or one of the partial specializations. This is done by matching the template arguments of the class template specialization with the template argument lists of the partial specializations.

- (1.1) — If exactly one matching specialization is found, the instantiation is generated from that specialization.

- (1.2) — If more than one matching specialization is found, the partial order rules (17.6.5.2) are used to determine whether one of the specializations is more specialized than the others. If none of the specializations is more specialized than all of the other matching specializations, then the use of the class template is ambiguous and the program is ill-formed.

- (1.3) — If no matches are found, the instantiation is generated from the primary template.

<sup>2</sup> A partial specialization matches a given actual template argument list if the template arguments of the partial specialization can be deduced from the actual template argument list (17.9.2), and the deduced template arguments satisfy the associated constraints of the partial specialization, if any (17.4.2). [Example:

```

template<class T1, class T2, int I> class A { }; // #1
template<class T, int I> class A<T, T*, I> { }; // #2
template<class T1, class T2, int I> class A<T1*, T2, I> { }; // #3
template<class T> class A<int, T*, 5> { }; // #4
template<class T1, class T2, int I> class A<T1, T2*, I> { }; // #5

A<int, int, 1> a1; // uses #1
A<int, int*, 1> a2; // uses #2, T is int, I is 1
A<int, char*, 5> a3; // uses #4, T is char

```

<sup>139</sup>) There is no way in which they could be used.

```
A<int, char*, 1> a4; // uses #5, T1 is int, T2 is char, I is 1
A<int*, int*, 2> a5; // ambiguous: matches #3 and #5
```

— end example] [Example:

```
template<typename T> concept C = requires (T t) { t.f(); };

template<typename T> struct S { }; // #1
template<C T> struct S<T> { }; // #2

struct Arg { void f(); };

S<int> s1; // uses #1; the constraints of #2 are not satisfied
S<Arg> s2; // uses #2; both constraints are satisfied but #2 is more specialized
```

— end example]

- <sup>3</sup> If the template arguments of a partial specialization cannot be deduced because of the structure of its *template-parameter-list* and the *template-id*, the program is ill-formed. [Example:

```
template <int I, int J> struct A {};
template <int I> struct A<I+5, I*2> {}; // error

template <int I> struct A<I, I> {}; // OK

template <int I, int J, int K> struct B {};
template <int I> struct B<I, I*2, 2> {}; // OK
```

— end example]

- <sup>4</sup> In a type name that refers to a class template specialization, (e.g., `A<int, int, 1>`) the argument list shall match the template parameter list of the primary template. The template arguments of a specialization are deduced from the arguments of the primary template.

### 17.6.5.2 Partial ordering of class template specializations [temp.class.order]

- <sup>1</sup> For two class template partial specializations, the first is *more specialized* than the second if, given the following rewrite to two function templates, the first function template is more specialized than the second according to the ordering rules for function templates (17.6.6.2):

- (1.1) — Each of the two function templates has the same template parameters and associated constraints (17.4.2) as the corresponding partial specialization.
- (1.2) — Each function template has a single function parameter whose type is a class template specialization where the template arguments are the corresponding template parameters from the function template for each template argument in the *template-argument-list* of the *simple-template-id* of the partial specialization.

- <sup>2</sup> [Example:

```
template<int I, int J, class T> class X { };
template<int I, int J> class X<I, J, int> { }; // #1
template<int I> class X<I, I, int> { }; // #2

template<int I0, int J0> void f(X<I0, J0, int>); // A
template<int I0> void f(X<I0, I0, int>); // B

template <auto v> class Y { };
template <auto* p> class Y<p> { }; // #3
template <auto** pp> class Y<pp> { }; // #4

template <auto* p0> void g(Y<p0>); // C
template <auto** pp0> void g(Y<pp0>); // D
```

According to the ordering rules for function templates, the function template *B* is more specialized than the function template *A* and the function template *D* is more specialized than the function template *C*. Therefore, the partial specialization #2 is more specialized than the partial specialization #1 and the partial specialization #4 is more specialized than the partial specialization #3. — end example] [Example:

```
template<typename T> concept C = requires (T t) { t.f(); };
template<typename T> concept D = C<T> && requires (T t) { t.f(); };
```



```

template<typename T> class S { };
template<C T> class S<T> { }; // #1
template<D T> class S<T> { }; // #2

template<C T> void f(S<T>); // A
template<D T> void f(S<T>); // B

```

The partial specialization #2 is more specialized than #1 because B is more specialized than A. — *end example*]

### 17.6.5.3 Members of class template specializations [temp.class.spec.mfunc]

- <sup>1</sup> The template parameter list of a member of a class template partial specialization shall match the template parameter list of the class template partial specialization. The template argument list of a member of a class template partial specialization shall match the template argument list of the class template partial specialization. A class template specialization is a distinct template. The members of the class template partial specialization are unrelated to the members of the primary template. Class template partial specialization members that are used in a way that requires a definition shall be defined; the definitions of members of the primary template are never used as definitions for members of a class template partial specialization. An explicit specialization of a member of a class template partial specialization is declared in the same way as an explicit specialization of the primary template. [*Example*:

```

// primary class template
template<class T, int I> struct A {
 void f();
};

// member of primary class template
template<class T, int I> void A<T,I>::f() { }

// class template partial specialization
template<class T> struct A<T,2> {
 void f();
 void g();
 void h();
};

// member of class template partial specialization
template<class T> void A<T,2>::g() { }

// explicit specialization
template<> void A<char,2>::h() { }

int main() {
 A<char,0> a0;
 A<char,2> a2;
 a0.f(); // OK, uses definition of primary template's member
 a2.g(); // OK, uses definition of partial specialization's member
 a2.h(); // OK, uses definition of explicit specialization's member
 a2.f(); // ill-formed, no definition of f for A<T,2>; the primary template is not used here
}

```

— *end example*]

- <sup>2</sup> If a member template of a class template is partially specialized, the member template partial specializations are member templates of the enclosing class template; if the enclosing class template is instantiated (17.8.1, 17.8.2), a declaration for every member template partial specialization is also instantiated as part of creating the members of the class template specialization. If the primary member template is explicitly specialized for a given (implicit) specialization of the enclosing class template, the partial specializations of the member template are ignored for this specialization of the enclosing class template. If a partial specialization of the member template is explicitly specialized for a given (implicit) specialization of the enclosing class template, the primary member template and its other partial specializations are still considered for this specialization of the enclosing class template. [*Example*:

```

template<class T> struct A {
 template<class T2> struct B { }; // #1

```

```

 template<class T2> struct B<T2*> {}; // #2
};

template<> template<class T2> struct A<short>::B {}; // #3

A<char>::B<int*> abcip; // uses #2
A<short>::B<int*> absip; // uses #3
A<char>::B<int> abci; // uses #1
— end example]

```

## 17.6.6 Function templates [temp.fct]

- <sup>1</sup> A function template defines an unbounded set of related functions. [*Example*: A family of sort functions might be declared like this:

```

template<class T> class Array { };
template<class T> void sort(Array<T>&);
— end example]

```

- <sup>2</sup> A function template can be overloaded with other function templates and with non-template functions (11.3.5). A non-template function is not related to a function template (i.e., it is never considered to be a specialization), even if it has the same name and type as a potentially generated function template specialization.<sup>140</sup>

### 17.6.6.1 Function template overloading [temp.over.link]

- <sup>1</sup> It is possible to overload function templates so that two different function template specializations have the same type. [*Example*:

```

// translation unit 1: // translation unit 2:
template<class T> template<class T>
void f(T*); void f(T);
void g(int* p) { void h(int* p) {
 f(p); // calls f<int>(int*) f(p); // calls f<int*>(int*)
} }
— end example]

```

- <sup>2</sup> Such specializations are distinct functions and do not violate the one-definition rule (6.2).
- <sup>3</sup> The signature of a function template is defined in Clause 3. The names of the template parameters are significant only for establishing the relationship between the template parameters and the rest of the signature. [*Note*: Two distinct function templates may have identical function return types and function parameter lists, even if overload resolution alone cannot distinguish them.

```

template<class T> void f();
template<int I> void f(); // OK: overloads the first template
 // distinguishable with an explicit template argument list
— end note]

```

- <sup>4</sup> When an expression that references a template parameter is used in the function parameter list or the return type in the declaration of a function template, the expression that references the template parameter is part of the signature of the function template. This is necessary to permit a declaration of a function template in one translation unit to be linked with another declaration of the function template in another translation unit and, conversely, to ensure that function templates that are intended to be distinct are not linked with one another. [*Example*:

```

template <int I, int J> A<I+J> f(A<I>, A<J>); // #1
template <int K, int L> A<K+L> f(A<K>, A<L>); // same as #1
template <int I, int J> A<I-J> f(A<I>, A<J>); // different from #1
— end example] [Note: Most expressions that use template parameters use non-type template parameters, but it is possible for an expression to reference a type parameter. For example, a template type parameter can be used in the sizeof operator. — end note]

```

<sup>140</sup>) That is, declarations of non-template functions do not merely guide overload resolution of function template specializations with the same name. If such a non-template function is odr-used (6.2) in a program, it must be defined; it will not be implicitly instantiated using the function template definition.

- 5 Two expressions involving template parameters are considered *equivalent* if two function definitions containing the expressions would satisfy the one-definition rule (6.2), except that the tokens used to name the template parameters may differ as long as a token used to name a template parameter in one expression is replaced by another token that names the same template parameter in the other expression. Two *lambda-expressions* are never considered equivalent. [Note: The intent is to avoid *lambda-expressions* appearing in the signature of a function template with external linkage. — end note] For determining whether two dependent names (17.7.2) are equivalent, only the name itself is considered, not the result of name lookup in the context of the template. If multiple declarations of the same function template differ in the result of this name lookup, the result for the first declaration is used. [Example:

```

template <int I, int J> void f(A<I+J>); // #1
template <int K, int L> void f(A<K+L>); // same as #1

template <class T> decltype(g(T())) h();
int g(int);
template <class T> decltype(g(T())) h() // redeclaration of h() uses the earlier lookup...
 { return g(T()); } // ... although the lookup here does find g(int)
int i = h<int>(); // template argument substitution fails; g(int)
 // was not in scope at the first declaration of h()

// ill-formed, no diagnostic required: the two expressions are functionally equivalent but not equivalent
template <int N> void foo(const char (*s)[[{}], N]);
template <int N> void foo(const char (*s)[[{}], N]);

// two different declarations because the non-dependent portions are not considered equivalent
template <class T> void spam(decltype([{}]) (*s)[sizeof(T)]);
template <class T> void spam(decltype([{}]) (*s)[sizeof(T)]);

```

— end example] Two expressions involving template parameters that are not equivalent are *functionally equivalent* if, for any given set of template arguments, the evaluation of the expression results in the same value.

- 6 Two *template-heads* are *equivalent* if their *template-parameter-lists* have the same length, corresponding *template-parameters* are equivalent, and if either has a *requires-clause*, they both have *requires-clauses* and the corresponding *constraint-expressions* are equivalent. Two *template-parameters* are *equivalent* under the following conditions:
- (6.1) — they declare template parameters of the same kind,
  - (6.2) — if either declares a template parameter pack, they both do,
  - (6.3) — if they declare non-type template parameters, they have equivalent types,
  - (6.4) — if they declare template template parameters, their template parameters are equivalent, and
  - (6.5) — if either is declared with a *qualified-concept-name*, they both are, and the *qualified-concept-names* are equivalent.

When determining whether types or *qualified-concept-names* are equivalent, the rules above are used to compare expressions involving template parameters. Two *template-heads* are *functionally equivalent* if they accept and are satisfied by (17.4.1) the same set of template argument lists.

- 7 Two function templates are *equivalent* if they are declared in the same scope, have the same name, have equivalent *template-heads*, and have return types, parameter lists, and trailing *requires-clauses* (if any) that are equivalent using the rules described above to compare expressions involving template parameters. Two function templates are *functionally equivalent* if they are declared in the same scope, have the same name, accept and are satisfied by the same set of template argument lists, and have return types and parameter lists that are functionally equivalent using the rules described above to compare expressions involving template parameters. If the validity or meaning of the program depends on whether two constructs are equivalent, and they are functionally equivalent but not equivalent, the program is ill-formed, no diagnostic required.
- 8 [Note: This rule guarantees that equivalent declarations will be linked with one another, while not requiring implementations to use heroic efforts to guarantee that functionally equivalent declarations will be treated as distinct. For example, the last two declarations are functionally equivalent and would cause a program to be ill-formed:

```

// guaranteed to be the same
template <int I> void f(A<I>, A<I+10>);

```

```

template <int I> void f(A<I>, A<I+10>);

// guaranteed to be different
template <int I> void f(A<I>, A<I+10>);
template <int I> void f(A<I>, A<I+11>);

// ill-formed, no diagnostic required
template <int I> void f(A<I>, A<I+10>);
template <int I> void f(A<I>, A<I+1+2+3+4>);
— end note]

```

### 17.6.6.2 Partial ordering of function templates [temp.func.order]

- 1 If a function template is overloaded, the use of a function template specialization might be ambiguous because template argument deduction (17.9.2) may associate the function template specialization with more than one function template declaration. *Partial ordering* of overloaded function template declarations is used in the following contexts to select the function template to which a function template specialization refers:
  - (1.1) — during overload resolution for a call to a function template specialization (16.3.3);
  - (1.2) — when the address of a function template specialization is taken;
  - (1.3) — when a placement operator delete that is a function template specialization is selected to match a placement operator new (6.6.4.4.2, 8.5.2.4);
  - (1.4) — when a friend function declaration (17.6.4), an explicit instantiation (17.8.2) or an explicit specialization (17.8.3) refers to a function template specialization.
- 2 Partial ordering selects which of two function templates is more specialized than the other by transforming each template in turn (see next paragraph) and performing template argument deduction using the function type. The deduction process determines whether one of the templates is more specialized than the other. If so, the more specialized template is the one chosen by the partial ordering process. If both deductions succeed, the partial ordering selects the more constrained template as described by the rules in 17.4.4.
- 3 To produce the transformed template, for each type, non-type, or template template parameter (including template parameter packs (17.6.3) thereof) synthesize a unique type, value, or class template respectively and substitute it for each occurrence of that parameter in the function type of the template. [Note: The type replacing the placeholder in the type of the value synthesized for a non-type template parameter is also a unique synthesized type. — end note] If only one of the function templates  $M$  is a non-static member of some class  $A$ ,  $M$  is considered to have a new first parameter inserted in its function parameter list. Given  $cv$  as the cv-qualifiers of  $M$  (if any), the new parameter is of type “rvalue reference to  $cv A$ ” if the optional *ref-qualifier* of  $M$  is  $\&\&$  or if  $M$  has no *ref-qualifier* and the first parameter of the other template has rvalue reference type. Otherwise, the new parameter is of type “lvalue reference to  $cv A$ ”. [Note: This allows a non-static member to be ordered with respect to a non-member function and for the results to be equivalent to the ordering of two equivalent non-members. — end note] [Example:

```

struct A { };
template<class T> struct B {
 template<class R> int operator*(R&); // #1
};

template<class T, class R> int operator*(T&, R&); // #2

// The declaration of B::operator* is transformed into the equivalent of
// template<class R> int operator*(B<A>&, R&); // #1a

int main() {
 A a;
 B<A> b;
 b * a; // calls #1a
}

```

— end example]

- 4 Using the transformed function template’s function type, perform type deduction against the other template as described in 17.9.2.4.

[Example:

```

template<class T> struct A { A(); };

template<class T> void f(T);
template<class T> void f(T*);
template<class T> void f(const T*);

template<class T> void g(T);
template<class T> void g(T&);

template<class T> void h(const T&);
template<class T> void h(A<T>&);

void m() {
 const int* p;
 f(p); // f(const T*) is more specialized than f(T) or f(T*)
 float x;
 g(x); // ambiguous: g(T) or g(T&)
 A<int> z;
 h(z); // overload resolution selects h(A<T>&)
 const A<int> z2;
 h(z2); // h(const T&) is called because h(A<T>&) is not callable
}

```

— end example]

- 5 [Note: Since partial ordering in a call context considers only parameters for which there are explicit call arguments, some parameters are ignored (namely, function parameter packs, parameters with default arguments, and ellipsis parameters). [Example:

```

template<class T> void f(T); // #1
template<class T> void f(T*, int=1); // #2
template<class T> void g(T); // #3
template<class T> void g(T*, ...); // #4

int main() {
 int* ip;
 f(ip); // calls #2
 g(ip); // calls #4
}

```

— end example] [Example:

```

template<class T, class U> struct A { };

template<class T, class U> void f(U, A<U, T>* p = 0); // #1
template<class U> void f(U, A<U, U>* p = 0); // #2
template<class T > void g(T, T = T()); // #3
template<class T, class... U> void g(T, U ...); // #4

void h() {
 f<int>(42, (A<int, int>*)0); // calls #2
 f<int>(42); // error: ambiguous
 g(42); // error: ambiguous
}

```

— end example] [Example:

```

template<class T, class... U> void f(T, U...); // #1
template<class T > void f(T); // #2
template<class T, class... U> void g(T*, U...); // #3
template<class T > void g(T); // #4

void h(int i) {
 f(&i); // error: ambiguous
 g(&i); // OK: calls #3
}

```

— end example] — end note]

### 17.6.7 Alias templates

[temp.alias]

- <sup>1</sup> A *template-declaration* in which the *declaration* is an *alias-declaration* (Clause 10) declares the *identifier* to be an *alias template*. An alias template is a name for a family of types. The name of the alias template is a *template-name*.
- <sup>2</sup> When a *template-id* refers to the specialization of an alias template, it is equivalent to the associated type obtained by substitution of its *template-arguments* for the *template-parameters* in the *type-id* of the alias template. [Note: An alias template name is never deduced. — end note] [Example:

```
template<class T> struct Alloc { /* ... */ };
template<class T> using Vec = vector<T, Alloc<T>>;
Vec<int> v; // same as vector<int, Alloc<int>> v;
```

```
template<class T>
void process(Vec<T>& v)
{ /* ... */ }
```

```
template<class T>
void process(vector<T, Alloc<T>>& w)
{ /* ... */ } // error: redefinition
```

```
template<template<class> class TT>
void f(TT<int>);
```

```
f(v); // error: Vec not deduced
```

```
template<template<class,class> class TT>
void g(TT<int, Alloc<int>>);
g(v); // OK: TT = vector
```

— end example]

- <sup>3</sup> However, if the *template-id* is dependent, subsequent template argument substitution still applies to the *template-id*. [Example:

```
template<typename...> using void_t = void;
template<typename T> void_t<typename T::foo> f();
f<int>(); // error, int does not have a nested type foo
```

— end example]

- <sup>4</sup> The *type-id* in an alias template declaration shall not refer to the alias template being declared. The type produced by an alias template specialization shall not directly or indirectly make use of that specialization. [Example:

```
template <class T> struct A;
template <class T> using B = typename A<T>::U;
template <class T> struct A {
 typedef B<T> U;
};
B<short> b; // error: instantiation of B<short> uses own type via A<short>::U
```

— end example]

- <sup>5</sup> The type of a *lambda-expression* appearing in an alias template declaration is different between instantiations of that template, even when the *lambda-expression* is not dependent. [Example:

```
template <class T>
using A = decltype([] { }); // A<int> and A<char> refer to different closure types
```

— end example]

### 17.6.8 Concept definitions

[temp.concept]

- <sup>1</sup> A *concept* is a template that defines constraints on its template arguments.
- <sup>2</sup> A *concept-definition* declares a concept. Its *identifier* becomes a *concept-name* referring to that concept within its scope. [Example:

```

template<typename T>
concept C = requires(T x) {
 { x == x } -> bool;
};

template<typename T>
requires C<T> // C constrains f1(T) in constraint-expression
T f1(T x) { return x; }

template<C T> // C constrains f2(T) as a constrained-parameter
T f2(T x) { return x; }

```

— end example]

- 3 A *concept-definition* shall appear at namespace scope (6.3.6).
- 4 A concept shall not have associated constraints (17.4.2).
- 5 A concept is not instantiated (17.8). [Note: An *id-expression* that denotes a concept specialization is evaluated as an expression (8.4.4). A concept cannot be explicitly instantiated (17.8.2), explicitly specialized (17.8.3), or partially specialized. — end note]
- 6 The first declared template parameter of a concept definition is its *prototype parameter*. A *variadic concept* is a concept whose prototype parameter is a template parameter pack.

## 17.7 Name resolution

[temp.res]

- 1 Three kinds of names can be used within a template definition:

- (1.1) — The name of the template itself, and names declared within the template itself.
- (1.2) — Names dependent on a *template-parameter* (17.7.2).
- (1.3) — Names from scopes which are visible within the template definition.

- 2 A name used in a template declaration or definition and that is dependent on a *template-parameter* is assumed not to name a type unless the applicable name lookup finds a type name or the name is qualified by the keyword `typename`. [Example:

```
// no B declared here
```

```
class X;
```

```

template<class T> class Y {
 class Z; // forward declaration of member class

 void f() {
 X* a1; // declare pointer to X
 T* a2; // declare pointer to T
 Y* a3; // declare pointer to Y<T>
 Z* a4; // declare pointer to Z
 typedef typename T::A TA;
 TA* a5; // declare pointer to T's A
 typename T::A* a6; // declare pointer to T's A
 T::A* a7; // T::A is not a type name:
 // multiplication of T::A by a7; ill-formed, no visible declaration of a7
 B* a8; // B is not a type name:
 // multiplication of B by a8; ill-formed, no visible declarations of B and a8
 }
};

```

— end example]

*typename-specifier*:

`typename nested-name-specifier identifier`

`typename nested-name-specifier templateopt simple-template-id`

- 3 A *typename-specifier* denotes the type or class template denoted by the *simple-type-specifier* (10.1.7.2) formed by omitting the keyword `typename`. The usual qualified name lookup (6.4.3) is used to find the *qualified-id* even in the presence of `typename`. [Example:

```

struct A {
 struct X { };
 int X;
};
struct B {
 struct X { };
};
template<class T> void f(T t) {
 typename T::X x;
}
void foo() {
 A a;
 B b;
 f(b); // OK: T::X refers to B::X
 f(a); // error: T::X refers to the data member A::X not the struct A::X
}

```

— end example]

<sup>4</sup> A qualified name used as the name in a *class-or-decltype* (Clause 13) or an *elaborated-type-specifier* is implicitly assumed to name a type, without the use of the `typename` keyword. In a *nested-name-specifier* that immediately contains a *nested-name-specifier* that depends on a template parameter, the *identifier* or *simple-template-id* is implicitly assumed to name a type, without the use of the `typename` keyword. [Note: The `typename` keyword is not permitted by the syntax of these constructs. — end note]

<sup>5</sup> A *qualified-id* is assumed to name a type if

- (5.1) — it is a qualified name in a *type-id-only* context (see below), or
- (5.2) — it is a *decl-specifier* of the *decl-specifier-seq* of a
  - (5.2.1) — *simple-declaration* or a *function-definition* in namespace scope,
  - (5.2.2) — *member-declaration*,
  - (5.2.3) — *parameter-declaration* in a *member-declaration*<sup>141</sup>, unless that *parameter-declaration* appears in a default argument,
  - (5.2.4) — *parameter-declaration* in a *declarator* of a function or function template declaration whose *declarator-id* is qualified, unless that *parameter-declaration* appears in a default argument,
  - (5.2.5) — *parameter-declaration* in a *lambda-declarator*, unless that *parameter-declaration* appears in a default argument, or
  - (5.2.6) — *parameter-declaration* of a (non-type) *template-parameter*.

A qualified name is said to be in a *type-id-only* context if it appears in a *type-id*, *new-type-id*, or *defining-type-id* and the smallest enclosing *type-id*, *new-type-id*, or *defining-type-id* is a *new-type-id*, *defining-type-id*, *trailing-return-type*, default argument of a *type-parameter* of a template, or *type-id* of a `static_cast`, `const_cast`, `reinterpret_cast`, or `dynamic_cast`. [Example:

```

template<class T> T::R f(); // OK, return type of a function declaration at global scope
template<class T> void f(T::R); // ill-formed (no diagnostic required), attempt to declare
 // a void variable template

template<class T> struct S {
 using Ptr = PtrTraits<T>::Ptr; // OK, in a defining-type-id
 T::R f(T::P p) { // OK, class scope
 return static_cast<T::R>(p); // OK, type-id of a static_cast
 }
 auto g() -> S<T*>::Ptr; // OK, trailing-return-type
};
template<typename T> void f() {
 void (*pf)(T::X); // variable pf of type void* initialized with T::X
 void g(T::X); // error: T::X at block scope does not denote a type
 // (attempt to declare a void variable)
}

```

— end example]

---

<sup>141</sup>) This includes friend function declarations.



- 6 A *qualified-id* that refers to a member of an unknown specialization, that is not prefixed by `typename`, and that is not otherwise assumed to name a type (see above) denotes a non-type. [Example:

```
template <class T> void f(int i) {
 T::x * i; // expression, not the declaration of a variable i
}

struct Foo {
 typedef int x;
};

struct Bar {
 static int const x = 5;
};

int main() {
 f<Bar>(1); // OK
 f<Foo>(1); // error: Foo::x is a type
}
```

— end example]

- 7 Within the definition of a class template or within the definition of a member of a class template following the *declarator-id*, the keyword `typename` is not required when referring to a member of the current instantiation (17.7.2.1). [Example:

```
template<class T> struct A {
 typedef int B;
 B b; // OK, no typename required
};
```

— end example]

- 8 The validity of a template may be checked prior to any instantiation. [Note: Knowing which names are type names allows the syntax of every template to be checked in this way. — end note] The program is ill-formed, no diagnostic required, if:

- (8.1) — no valid specialization can be generated for a template or a substatement of a `constexpr` if statement (9.4.1) within a template and the template is not instantiated, or
- (8.2) — no substitution of template arguments into a *partial-concept-id* or *requires-clause* would result in a valid expression, or
- (8.3) — every valid specialization of a variadic template requires an empty template parameter pack, or
- (8.4) — a hypothetical instantiation of a template immediately following its definition would be ill-formed due to a construct that does not depend on a template parameter, or
- (8.5) — the interpretation of such a construct in the hypothetical instantiation is different from the interpretation of the corresponding construct in any actual instantiation of the template. [Note: This can happen in situations including the following:
  - (8.5.1) — a type used in a non-dependent name is incomplete at the point at which a template is defined but is complete at the point at which an instantiation is performed, or
  - (8.5.2) — lookup for a name in the template definition found a *using-declaration*, but the lookup in the corresponding scope in the instantiation does not find any declarations because the *using-declaration* was a pack expansion and the corresponding pack is empty, or
  - (8.5.3) — an instantiation uses a default argument or default template argument that had not been defined at the point at which the template was defined, or
  - (8.5.4) — constant expression evaluation (8.6) within the template instantiation uses
    - (8.5.4.1) — the value of a `const` object of integral or unscoped enumeration type or
    - (8.5.4.2) — the value of a `constexpr` object or
    - (8.5.4.3) — the value of a reference or
    - (8.5.4.4) — the definition of a `constexpr` function,
 and that entity was not defined when the template was defined, or

- (8.5.5) — a class template specialization or variable template specialization that is specified by a non-dependent *simple-template-id* is used by the template, and either it is instantiated from a partial specialization that was not defined when the template was defined or it names an explicit specialization that was not declared when the template was defined.

— *end note*]

Otherwise, no diagnostic shall be issued for a template for which a valid specialization can be generated. [Note: If a template is instantiated, errors will be diagnosed according to the other rules in this document. Exactly when these errors are diagnosed is a quality of implementation issue. — *end note*] [Example:

```
int j;
template<class T> class X {
 void f(T t, int i, char* p) {
 t = i; // diagnosed if X::f is instantiated, and the assignment to t is an error
 p = i; // may be diagnosed even if X::f is not instantiated
 p = j; // may be diagnosed even if X::f is not instantiated
 }
 void g(T t) {
 +; // may be diagnosed even if X::g is not instantiated
 }
};

template<class... T> struct A {
 void operator++(int, T... t); // error: too many parameters
};
template<class... T> union X : T... { }; // error: union with base class
template<class... T> struct A : T..., T... { }; // error: duplicate base class
```

— *end example*]

- <sup>9</sup> When looking for the declaration of a name used in a template definition, the usual lookup rules (6.4.1, 6.4.2) are used for non-dependent names. The lookup of names dependent on the template parameters is postponed until the actual template argument is known (17.7.2). [Example:

```
#include <iostream>
using namespace std;

template<class T> class Set {
 T* p;
 int cnt;
public:
 Set();
 Set<T>(const Set<T>&);
 void printall() {
 for (int i = 0; i<cnt; i++)
 cout << p[i] << '\n';
 }
};
```

In the example, *i* is the local variable *i* declared in `printall`, *cnt* is the member `cnt` declared in `Set`, and `cout` is the standard output stream declared in `iostream`. However, not every declaration can be found this way; the resolution of some names must be postponed until the actual *template-arguments* are known. For example, even though the name `operator<<` is known within the definition of `printall()` and a declaration of it can be found in `<iostream>`, the actual declaration of `operator<<` needed to print `p[i]` cannot be known until it is known what type *T* is (17.7.2). — *end example*]

- <sup>10</sup> If a name does not depend on a *template-parameter* (as defined in 17.7.2), a declaration (or set of declarations) for that name shall be in scope at the point where the name appears in the template definition; the name is bound to the declaration (or declarations) found at that point and this binding is not affected by declarations that are visible at the point of instantiation. [Example:

```
void f(char);

template<class T> void g(T t) {
 f(1); // f(char)
 f(T(1)); // dependent
```

```

 f(t); // dependent
 dd++; // not dependent; error: declaration for dd not found
}

enum E { e };
void f(E);

double dd;
void h() {
 g(e); // will cause one call of f(char) followed by two calls of f(E)
 g('a'); // will cause three calls of f(char)
}
— end example]

```

- <sup>11</sup> [Note: For purposes of name lookup, default arguments and *noexcept-specifiers* of function templates and default arguments and *noexcept-specifiers* of member functions of class templates are considered definitions (17.6). — end note]

### 17.7.1 Locally declared names

[temp.local]

- <sup>1</sup> Like normal (non-template) classes, class templates have an injected-class-name (Clause 12). The injected-class-name can be used as a *template-name* or a *type-name*. When it is used with a *template-argument-list*, as a *template-argument* for a template *template-parameter*, or as the final identifier in the *elaborated-type-specifier* of a friend class template declaration, it refers to the class template itself. Otherwise, it is equivalent to the *template-name* followed by the *template-parameters* of the class template enclosed in `<>`.
- <sup>2</sup> Within the scope of a class template specialization or partial specialization, when the injected-class-name is used as a *type-name*, it is equivalent to the *template-name* followed by the *template-arguments* of the class template specialization or partial specialization enclosed in `<>`. [Example:

```

template<template<class> class T> class A { };
template<class T> class Y;
template<> class Y<int> {
 Y* p; // meaning Y<int>
 Y<char>* q; // meaning Y<char>
 A<Y>* a; // meaning A<::Y>
 class B {
 template<class> friend class Y; // meaning ::Y
 };
};

```

— end example]

- <sup>3</sup> The injected-class-name of a class template or class template specialization can be used either as a *template-name* or a *type-name* wherever it is in scope. [Example:

```

template <class T> struct Base {
 Base* p;
};

template <class T> struct Derived: public Base<T> {
 typename Derived::Base* p; // meaning Derived::Base<T>
};

template<class T, template<class> class U = T::template Base> struct Third { };
Third<Derived<int> > t; // OK: default argument uses injected-class-name as a template

```

— end example]

- <sup>4</sup> A lookup that finds an injected-class-name (13.2) can result in an ambiguity in certain cases (for example, if it is found in more than one base class). If all of the injected-class-names that are found refer to specializations of the same class template, and if the name is used as a *template-name*, the reference refers to the class template itself and not a specialization thereof, and is not ambiguous. [Example:

```

template <class T> struct Base { };
template <class T> struct Derived: Base<int>, Base<char> {
 typename Derived::Base b; // error: ambiguous
}

```

```
 typename Derived::Base<double> d; // OK
};
```

— end example]

- 5 When the normal name of the template (i.e., the name from the enclosing scope, not the injected-class-name) is used, it always refers to the class template itself and not a specialization of the template. [Example:

```
template<class T> class X {
 X* p; // meaning X<T>
 X<T>* p2;
 X<int>* p3;
 ::X* p4; // error: missing template argument list
 // ::X does not refer to the injected-class-name
};
```

— end example]

- 6 A *template-parameter* shall not be redeclared within its scope (including nested scopes). A *template-parameter* shall not have the same name as the template name. [Example:

```
template<class T, int i> class Y {
 int T; // error: template-parameter redeclared
 void f() {
 char T; // error: template-parameter redeclared
 }
};
```

```
template<class X> class X; // error: template-parameter redeclared
```

— end example]

- 7 In the definition of a member of a class template that appears outside of the class template definition, the name of a member of the class template hides the name of a *template-parameter* of any enclosing class templates (but not a *template-parameter* of the member if the member is a class or function template). [Example:

```
template<class T> struct A {
 struct B { /* ... */ };
 typedef void C;
 void f();
 template<class U> void g(U);
};

template<class B> void A::f() {
 B b; // A's B, not the template parameter
}

template<class B> template<class C> void A::g(C) {
 B b; // A's B, not the template parameter
 C c; // the template parameter C, not A's C
}
}
```

— end example]

- 8 In the definition of a member of a class template that appears outside of the namespace containing the class template definition, the name of a *template-parameter* hides the name of a member of this namespace. [Example:

```
namespace N {
 class C { };
 template<class T> class B {
 void f(T);
 };
}

template<class C> void N::B<C>::f(C) {
 C b; // C is the template parameter, not N::C
}
}
```

— end example]

- <sup>9</sup> In the definition of a class template or in the definition of a member of such a template that appears outside of the template definition, for each non-dependent base class (17.7.2.1), if the name of the base class or the name of a member of the base class is the same as the name of a *template-parameter*, the base class name or member name hides the *template-parameter* name (6.3.10). [Example:

```
struct A {
 struct B { /* ... */ };
 int a;
 int Y;
};

template<class B, class a> struct X : A {
 B b; // A's B
 a b; // error: A's a isn't a type name
};
```

— end example]

## 17.7.2 Dependent names

[temp.dep]

- <sup>1</sup> Inside a template, some constructs have semantics which may differ from one instantiation to another. Such a construct *depends* on the template parameters. In particular, types and expressions may depend on the type and/or value of template parameters (as determined by the template arguments) and this determines the context for name lookup for certain names. An expression may be *type-dependent* (that is, its type may depend on a template parameter) or *value-dependent* (that is, its value when evaluated as a constant expression (8.6) may depend on a template parameter) as described in this subclause. In an expression of the form:

*postfix-expression* ( *expression-list<sub>opt</sub>* )

where the *postfix-expression* is an *unqualified-id*, the *unqualified-id* denotes a *dependent name* if

- (1.1) — any of the expressions in the *expression-list* is a pack expansion (17.6.3),
- (1.2) — any of the expressions or *braced-init-lists* in the *expression-list* is type-dependent (17.7.2.2), or
- (1.3) — the *unqualified-id* is a *template-id* in which any of the template arguments depends on a template parameter.

If an operand of an operator is a type-dependent expression, the operator also denotes a dependent name. Such names are unbound and are looked up at the point of the template instantiation (17.7.4.1) in both the context of the template definition and the context of the point of instantiation.

- <sup>2</sup> [Example:

```
template<class T> struct X : B<T> {
 typename T::A* pa;
 void f(B<T>* pb) {
 static int i = B<T>::i;
 pb->j++;
 }
};
```

The base class name B<T>, the type name T::A, the names B<T>::i and pb->j explicitly depend on the *template-parameter*. — end example]

- <sup>3</sup> In the definition of a class or class template, the scope of a dependent base class (17.7.2.1) is not examined during unqualified name lookup either at the point of definition of the class template or member or during an instantiation of the class template or member. [Example:

```
typedef double A;
template<class T> class B {
 typedef int A;
};
template<class T> struct X : B<T> {
 A a; // a has type double
};
```

The type name A in the definition of X<T> binds to the typedef name defined in the global namespace scope, not to the typedef name defined in the base class B<T>. — end example] [Example:

```

struct A {
 struct B { /* ... */ };
 int a;
 int Y;
};

int a;

template<class T> struct Y : T {
 struct B { /* ... */ };
 B b; // The B defined in Y
 void f(int i) { a = i; } // ::a
 Y* p; // Y<T>
};

Y<A> ya;

```

The members `A::B`, `A::a`, and `A::Y` of the template argument `A` do not affect the binding of names in `Y<A>`.  
— *end example*]

### 17.7.2.1 Dependent types

[temp.dep.type]

<sup>1</sup> A name refers to the *current instantiation* if it is

- (1.1) — in the definition of a class template, a nested class of a class template, a member of a class template, or a member of a nested class of a class template, the injected-class-name (Clause 12) of the class template or nested class,
  - (1.2) — in the definition of a primary class template or a member of a primary class template, the name of the class template followed by the template argument list of the primary template (as described below) enclosed in `<>` (or an equivalent template alias specialization),
  - (1.3) — in the definition of a nested class of a class template, the name of the nested class referenced as a member of the current instantiation, or
  - (1.4) — in the definition of a partial specialization or a member of a partial specialization, the name of the class template followed by the template argument list of the partial specialization enclosed in `<>` (or an equivalent template alias specialization). If the  $n^{\text{th}}$  template parameter is a template parameter pack, the  $n^{\text{th}}$  template argument is a pack expansion (17.6.3) whose pattern is the name of the template parameter pack.
- <sup>2</sup> The template argument list of a primary template is a template argument list in which the  $n^{\text{th}}$  template argument has the value of the  $n^{\text{th}}$  template parameter of the class template. If the  $n^{\text{th}}$  template parameter is a template parameter pack (17.6.3), the  $n^{\text{th}}$  template argument is a pack expansion (17.6.3) whose pattern is the name of the template parameter pack.
- <sup>3</sup> A template argument that is equivalent to a template parameter can be used in place of that template parameter in a reference to the current instantiation. For a template *type-parameter*, a template argument is equivalent to a template parameter if it denotes the same type. For a non-type template parameter, a template argument is equivalent to a template parameter if it is an *identifier* that names a variable that is equivalent to the template parameter. A variable is equivalent to a template parameter if
- (3.1) — it has the same type as the template parameter (ignoring cv-qualification) and
  - (3.2) — its initializer consists of a single *identifier* that names the template parameter or, recursively, such a variable.

[Note: Using a parenthesized variable name breaks the equivalence. — *end note*] [Example:

```

template <class T> class A {
 A* p1; // A is the current instantiation
 A<T>* p2; // A<T> is the current instantiation
 A<T*> p3; // A<T*> is not the current instantiation
 ::A<T>* p4; // ::A<T> is the current instantiation
 class B {
 B* p1; // B is the current instantiation
 A<T>::B* p2; // A<T>::B is the current instantiation
 typename A<T*>::B* p3; // A<T*>::B is not the current instantiation
 };
};

```

```

};
};

template <class T> class A<T*> {
 A<T*>* p1; // A<T*> is the current instantiation
 A<T*>* p2; // A<T> is not the current instantiation
};

template <class T1, class T2, int I> struct B {
 B<T1, T2, I>* b1; // refers to the current instantiation
 B<T2, T1, I>* b2; // not the current instantiation
 typedef T1 my_T1;
 static const int my_I = I;
 static const int my_I2 = I+0;
 static const int my_I3 = my_I;
 static const long my_I4 = I;
 static const int my_I5 = (I);
 B<my_T1, T2, my_I>* b3; // refers to the current instantiation
 B<my_T1, T2, my_I2>* b4; // not the current instantiation
 B<my_T1, T2, my_I3>* b5; // refers to the current instantiation
 B<my_T1, T2, my_I4>* b6; // not the current instantiation
 B<my_T1, T2, my_I5>* b7; // not the current instantiation
};

```

— end example]

- <sup>4</sup> A *dependent base class* is a base class that is a dependent type and is not the current instantiation. [Note: A base class can be the current instantiation in the case of a nested class naming an enclosing class as a base. [Example:

```

template<class T> struct A {
 typedef int M;
 struct B {
 typedef void M;
 struct C;
 };
};

template<class T> struct A<T>::B::C : A<T> {
 M m; // OK, A<T>::M
};

```

— end example] — end note]

- <sup>5</sup> A name is a *member of the current instantiation* if it is
- (5.1) — An unqualified name that, when looked up, refers to at least one member of a class that is the current instantiation or a non-dependent base class thereof. [Note: This can only occur when looking up a name in a scope enclosed by the definition of a class template. — end note]
  - (5.2) — A *qualified-id* in which the *nested-name-specifier* refers to the current instantiation and that, when looked up, refers to at least one member of a class that is the current instantiation or a non-dependent base class thereof. [Note: If no such member is found, and the current instantiation has any dependent base classes, then the *qualified-id* is a member of an unknown specialization; see below. — end note]
  - (5.3) — An *id-expression* denoting the member in a class member access expression (8.5.1.5) for which the type of the object expression is the current instantiation, and the *id-expression*, when looked up (6.4.5), refers to at least one member of a class that is the current instantiation or a non-dependent base class thereof. [Note: If no such member is found, and the current instantiation has any dependent base classes, then the *id-expression* is a member of an unknown specialization; see below. — end note]

[Example:

```

template <class T> class A {
 static const int i = 5;
 int n1[i]; // i refers to a member of the current instantiation
 int n2[A::i]; // A::i refers to a member of the current instantiation
 int n3[A<T>::i]; // A<T>::i refers to a member of the current instantiation
};

```

```

 int f();
};

template <class T> int A<T>::f() {
 return i; // i refers to a member of the current instantiation
}

```

— end example]

A name is a *dependent member of the current instantiation* if it is a member of the current instantiation that, when looked up, refers to at least one member of a class that is the current instantiation.

<sup>6</sup> A name is a *member of an unknown specialization* if it is

- (6.1) — A *qualified-id* in which the *nested-name-specifier* names a dependent type that is not the current instantiation.
- (6.2) — A *qualified-id* in which the *nested-name-specifier* refers to the current instantiation, the current instantiation has at least one dependent base class, and name lookup of the *qualified-id* does not find any member of a class that is the current instantiation or a non-dependent base class thereof.
- (6.3) — An *id-expression* denoting the member in a class member access expression (8.5.1.5) in which either
  - (6.3.1) — the type of the object expression is the current instantiation, the current instantiation has at least one dependent base class, and name lookup of the *id-expression* does not find a member of a class that is the current instantiation or a non-dependent base class thereof; or
  - (6.3.2) — the type of the object expression is dependent and is not the current instantiation.

<sup>7</sup> If a *qualified-id* in which the *nested-name-specifier* refers to the current instantiation is not a member of the current instantiation or a member of an unknown specialization, the program is ill-formed even if the template containing the *qualified-id* is not instantiated; no diagnostic required. Similarly, if the *id-expression* in a class member access expression for which the type of the object expression is the current instantiation does not refer to a member of the current instantiation or a member of an unknown specialization, the program is ill-formed even if the template containing the member access expression is not instantiated; no diagnostic required. [Example:

```

template<class T> class A {
 typedef int type;
 void f() {
 A<T>::type i; // OK: refers to a member of the current instantiation
 typename A<T>::other j; // error: neither a member of the current instantiation nor
 // a member of an unknown specialization
 }
};

```

— end example]

<sup>8</sup> If, for a given set of template arguments, a specialization of a template is instantiated that refers to a member of the current instantiation with a *qualified-id* or class member access expression, the name in the *qualified-id* or class member access expression is looked up in the template instantiation context. If the result of this lookup differs from the result of name lookup in the template definition context, name lookup is ambiguous. [Example:

```

struct A {
 int m;
};

struct B {
 int m;
};

template<typename T>
struct C : A, T {
 int f() { return this->m; } // finds A::m in the template definition context
 int g() { return m; } // finds A::m in the template definition context
};

template int C::f(); // error: finds both A::m and B::m

```



```
template int C::g(); // OK: transformation to class member access syntax
 // does not occur in the template definition context; see 12.2.2
```

— end example]

<sup>9</sup> A type is dependent if it is

- (9.1) — a template parameter,
- (9.2) — a member of an unknown specialization,
- (9.3) — a nested class or enumeration that is a dependent member of the current instantiation,
- (9.4) — a cv-qualified type where the cv-unqualified type is dependent,
- (9.5) — a compound type constructed from any dependent type,
- (9.6) — an array type whose element type is dependent or whose bound (if any) is value-dependent,
- (9.7) — a function type whose exception specification is value-dependent,
- (9.8) — denoted by a *simple-template-id* in which either the template name is a template parameter or any of the template arguments is a dependent type or an expression that is type-dependent or value-dependent or is a pack expansion [Note: This includes an injected-class-name (Clause 12) of a class template used without a *template-argument-list*. — end note] , or
- (9.9) — denoted by `decltype(expression)`, where *expression* is type-dependent (17.7.2.2).

<sup>10</sup> [Note: Because typedefs do not introduce new types, but instead simply refer to other types, a name that refers to a typedef that is a member of the current instantiation is dependent only if the type referred to is dependent. — end note]

### 17.7.2.2 Type-dependent expressions [temp.dep.expr]

<sup>1</sup> Except as described below, an expression is type-dependent if any subexpression is type-dependent.

<sup>2</sup> **this** is type-dependent if the class type of the enclosing member function is dependent (17.7.2.1).

<sup>3</sup> An *id-expression* is type-dependent if it contains

- (3.1) — an *identifier* associated by name lookup with one or more declarations declared with a dependent type,
- (3.2) — an *identifier* associated by name lookup with a non-type *template-parameter* declared with a type that contains a placeholder type (10.1.7.4),
- (3.3) — an *identifier* associated by name lookup with a variable declared with a type that contains a placeholder type (10.1.7.4) where the initializer is type-dependent,
- (3.4) — an *identifier* associated by name lookup with one or more declarations of member functions of the current instantiation declared with a return type that contains a placeholder type,
- (3.5) — an *identifier* associated by name lookup with a structured binding declaration (11.5) whose *brace-or-equal-initializer* is type-dependent,
- (3.6) — the *identifier* `__func__` (11.4.1), where any enclosing function is a template, a member of a class template, or a generic lambda,
- (3.7) — a *template-id* that is dependent,
- (3.8) — a *conversion-function-id* that specifies a dependent type, or
- (3.9) — a *nested-name-specifier* or a *qualified-id* that names a member of an unknown specialization;

or if it names a dependent member of the current instantiation that is a static data member of type “array of unknown bound of T” for some T (17.6.1.3). Expressions of the following forms are type-dependent only if the type specified by the *type-id*, *simple-type-specifier* or *new-type-id* is dependent, even if any subexpression is type-dependent:

```
simple-type-specifier (expression-listopt)
::opt new new-placementopt new-type-id new-initializeropt
::opt new new-placementopt (type-id) new-initializeropt
dynamic_cast < type-id > (expression)
static_cast < type-id > (expression)
const_cast < type-id > (expression)
reinterpret_cast < type-id > (expression)
(type-id) cast-expression
```

- 4 Expressions of the following forms are never type-dependent (because the type of the expression cannot be dependent):

```

literal
postfix-expression . pseudo-destructor-name
postfix-expression -> pseudo-destructor-name
sizeof unary-expression
sizeof (type-id)
sizeof ... (identifier)
alignof (type-id)
typeid (expression)
typeid (type-id)
::opt delete cast-expression
::opt delete [] cast-expression
throw assignment-expressionopt
noexcept (expression)

```

[Note: For the standard library macro `offsetof`, see 21.2. — end note]

- 5 A class member access expression (8.5.1.5) is type-dependent if the expression refers to a member of the current instantiation and the type of the referenced member is dependent, or the class member access expression refers to a member of an unknown specialization. [Note: In an expression of the form `x.y` or `xp->y` the type of the expression is usually the type of the member `y` of the class of `x` (or the class pointed to by `xp`). However, if `x` or `xp` refers to a dependent type that is not the current instantiation, the type of `y` is always dependent. If `x` or `xp` refers to a non-dependent type or refers to the current instantiation, the type of `y` is the type of the class member access expression. — end note]
- 6 A *braced-init-list* is type-dependent if any element is type-dependent or is a pack expansion.
- 7 A *fold-expression* is type-dependent.

### 17.7.2.3 Value-dependent expressions

[temp.dep.constexpr]

- 1 Except as described below, an expression used in a context where a constant expression is required is value-dependent if any subexpression is value-dependent.
- 2 An *id-expression* is value-dependent if:
- (2.1) — it is type-dependent,
  - (2.2) — it is the name of a non-type template parameter,
  - (2.3) — it names a static data member that is a dependent member of the current instantiation and is not initialized in a *member-declarator*,
  - (2.4) — it names a static member function that is a dependent member of the current instantiation, or
  - (2.5) — it is a constant with literal type and is initialized with an expression that is value-dependent.

Expressions of the following form are value-dependent if the *unary-expression* or *expression* is type-dependent or the *type-id* is dependent:

```

sizeof unary-expression
sizeof (type-id)
typeid (expression)
typeid (type-id)
alignof (type-id)
noexcept (expression)

```

[Note: For the standard library macro `offsetof`, see 21.2. — end note]

- 3 Expressions of the following form are value-dependent if either the *type-id* or *simple-type-specifier* is dependent or the *expression* or *cast-expression* is value-dependent:

```

simple-type-specifier (expression-listopt)
static_cast < type-id > (expression)
const_cast < type-id > (expression)
reinterpret_cast < type-id > (expression)
(type-id) cast-expression

```

- 4 Expressions of the following form are value-dependent:

```
sizeof ... (identifier)
fold-expression
```

- <sup>5</sup> An expression of the form *&qualified-id* where the *qualified-id* names a dependent member of the current instantiation is value-dependent. An expression of the form *&cast-expression* is also value-dependent if evaluating *cast-expression* as a core constant expression (8.6) succeeds and the result of the evaluation refers to a templated entity that is an object with static or thread storage duration or a member function.

#### 17.7.2.4 Dependent template arguments [temp.dep.temp]

- <sup>1</sup> A type *template-argument* is dependent if the type it specifies is dependent.
- <sup>2</sup> A non-type *template-argument* is dependent if its type is dependent or the constant expression it specifies is value-dependent.
- <sup>3</sup> Furthermore, a non-type *template-argument* is dependent if the corresponding non-type *template-parameter* is of reference or pointer type and the *template-argument* designates or points to a member of the current instantiation or a member of a dependent type.
- <sup>4</sup> A template *template-argument* is dependent if it names a *template-parameter* or is a *qualified-id* that refers to a member of an unknown specialization.

#### 17.7.3 Non-dependent names [temp.nondep]

- <sup>1</sup> Non-dependent names used in a template definition are found using the usual name lookup and bound at the point they are used. [Example:

```
void g(double);
void h();

template<class T> class Z {
public:
 void f() {
 g(1); // calls g(double)
 h++; // ill-formed: cannot increment function; this could be diagnosed
 // either here or at the point of instantiation
 }
};

void g(int); // not in scope at the point of the template definition, not considered for the call g(1)
— end example]
```

#### 17.7.4 Dependent name resolution [temp.dep.res]

- <sup>1</sup> In resolving dependent names, names from the following sources are considered:
- (1.1) — Declarations that are visible at the point of definition of the template.
- (1.2) — Declarations from namespaces associated with the types of the function arguments both from the instantiation context (17.7.4.1) and from the definition context.

##### 17.7.4.1 Point of instantiation [temp.point]

- <sup>1</sup> For a function template specialization, a member function template specialization, or a specialization for a member function or static data member of a class template, if the specialization is implicitly instantiated because it is referenced from within another template specialization and the context from which it is referenced depends on a template parameter, the point of instantiation of the specialization is the point of instantiation of the enclosing specialization. Otherwise, the point of instantiation for such a specialization immediately follows the namespace scope declaration or definition that refers to the specialization.
- <sup>2</sup> If a function template or member function of a class template is called in a way which uses the definition of a default argument of that function template or member function, the point of instantiation of the default argument is the point of instantiation of the function template or member function specialization.
- <sup>3</sup> For a *noexcept-specifier* of a function template specialization or specialization of a member function of a class template, if the *noexcept-specifier* is implicitly instantiated because it is needed by another template specialization and the context that requires it depends on a template parameter, the point of instantiation of the *noexcept-specifier* is the point of instantiation of the specialization that requires it. Otherwise, the

point of instantiation for such a *noexcept-specifier* immediately follows the namespace scope declaration or definition that requires the *noexcept-specifier*.

- 4 For a class template specialization, a class member template specialization, or a specialization for a class member of a class template, if the specialization is implicitly instantiated because it is referenced from within another template specialization, if the context from which the specialization is referenced depends on a template parameter, and if the specialization is not instantiated previous to the instantiation of the enclosing template, the point of instantiation is immediately before the point of instantiation of the enclosing template. Otherwise, the point of instantiation for such a specialization immediately precedes the namespace scope declaration or definition that refers to the specialization.
- 5 If a virtual function is implicitly instantiated, its point of instantiation is immediately following the point of instantiation of its enclosing class template specialization.
- 6 An explicit instantiation definition is an instantiation point for the specialization or specializations specified by the explicit instantiation.
- 7 The instantiation context of an expression that depends on the template arguments is the set of declarations with external linkage declared prior to the point of instantiation of the template specialization in the same translation unit.
- 8 A specialization for a function template, a member function template, or of a member function or static data member of a class template may have multiple points of instantiations within a translation unit, and in addition to the points of instantiation described above, for any such specialization that has a point of instantiation within the translation unit, the end of the translation unit is also considered a point of instantiation. A specialization for a class template has at most one point of instantiation within a translation unit. A specialization for any template may have points of instantiation in multiple translation units. If two different points of instantiation give a template specialization different meanings according to the one-definition rule (6.2), the program is ill-formed, no diagnostic required.

#### 17.7.4.2 Candidate functions

[temp.dep.candidate]

- 1 For a function call where the *postfix-expression* is a dependent name, the candidate functions are found using the usual lookup rules (6.4.1, 6.4.2) except that:
  - (1.1) — For the part of the lookup using unqualified name lookup (6.4.1), only function declarations from the template definition context are found.
  - (1.2) — For the part of the lookup using associated namespaces (6.4.2), only function declarations found in either the template definition context or the template instantiation context are found.

If the call would be ill-formed or would find a better match had the lookup within the associated namespaces considered all the function declarations with external linkage introduced in those namespaces in all translation units, not just considering those declarations found in the template definition and template instantiation contexts, then the program has undefined behavior.

#### 17.7.5 Friend names declared within a class template

[temp.inject]

- 1 Friend classes or functions can be declared within a class template. When a template is instantiated, the names of its friends are treated as if the specialization had been explicitly declared at its point of instantiation.
- 2 As with non-template classes, the names of namespace-scope friend functions of a class template specialization are not visible during an ordinary lookup unless explicitly declared at namespace scope (14.3). Such names may be found under the rules for associated classes (6.4.2).<sup>142</sup> [Example:

```
template<typename T> struct number {
 number(int);
 friend number gcd(number x, number y) { return 0; };
};

void g() {
 number<double> a(3), b(4);
 a = gcd(a,b); // finds gcd because number<double> is an associated class,
 // making gcd visible in its namespace (global scope)
 b = gcd(3,4); // ill-formed; gcd is not visible
}
```

<sup>142</sup> Friend declarations do not introduce new names into any scope, either when the template is declared or when it is instantiated.

— end example]

## 17.8 Template instantiation and specialization [temp.spec]

- 1 The act of instantiating a function, a class, a member of a class template or a member template is referred to as *template instantiation*.
- 2 A function instantiated from a function template is called an instantiated function. A class instantiated from a class template is called an instantiated class. A member function, a member class, a member enumeration, or a static data member of a class template instantiated from the member definition of the class template is called, respectively, an instantiated member function, member class, member enumeration, or static data member. A member function instantiated from a member function template is called an instantiated member function. A member class instantiated from a member class template is called an instantiated member class. A variable instantiated from a variable template is called an instantiated variable. A static data member instantiated from a static data member template is called an instantiated static data member.
- 3 An explicit specialization may be declared for a function template, a class template, a member of a class template or a member template. An explicit specialization declaration is introduced by `template<>`. In an explicit specialization declaration for a class template, a member of a class template or a class member template, the name of the class that is explicitly specialized shall be a *simple-template-id*. In the explicit specialization declaration for a function template or a member function template, the name of the function or member function explicitly specialized may be a *template-id*. [Example:

```
template<class T = int> struct A {
 static int x;
};
template<class U> void g(U) { }

template<> struct A<double> { }; // specialize for T == double
template<> struct A<> { }; // specialize for T == int
template<> void g(char) { } // specialize for U == char
 // U is deduced from the parameter type

template<> void g<int>(int) { } // specialize for U == int
template<> int A<char>::x = 0; // specialize for T == char

template<class T = int> struct B {
 static int x;
};
template<> int B<>::x = 1; // specialize for T == int
```

— end example]

- 4 An instantiated template specialization can be either implicitly instantiated (17.8.1) for a given argument list or be explicitly instantiated (17.8.2). A specialization is a class, function, or class member that is either instantiated or explicitly specialized (17.8.3).
- 5 For a given template and a given set of *template-arguments*,
  - (5.1) — an explicit instantiation definition shall appear at most once in a program,
  - (5.2) — an explicit specialization shall be defined at most once in a program, as specified in 6.2, and
  - (5.3) — both an explicit instantiation and a declaration of an explicit specialization shall not appear in a program unless the explicit instantiation follows a declaration of the explicit specialization.

An implementation is not required to diagnose a violation of this rule.

- 6 The usual access checking rules do not apply to names in a declaration of an explicit instantiation or explicit specialization, with the exception of names appearing in a function body, default argument, base-clause, member-specification, enumerator-list, or static data member or variable template initializer. [Note: In particular, the template arguments and names used in the function declarator (including parameter types, return types and exception specifications) may be private types or objects that would normally not be accessible. — end note]
- 7 Each class template specialization instantiated from a template has its own copy of any static members. [Example:

```

template<class T> class X {
 static T s;
};
template<class T> T X<T>::s = 0;
X<int> aa;
X<char*> bb;

```

`X<int>` has a static member `s` of type `int` and `X<char*>` has a static member `s` of type `char*`. — *end example*

- 8 If a function declaration acquired its function type through a dependent type (17.7.2.1) without using the syntactic form of a function declarator, the program is ill-formed. [*Example:*

```

template<class T> struct A {
 static T t;
};
typedef int function();
A<function> a; // ill-formed: would declare A<function>::t as a static member function

```

— *end example*]

### 17.8.1 Implicit instantiation

[temp.inst]

- 1 Unless a class template specialization has been explicitly instantiated (17.8.2) or explicitly specialized (17.8.3), the class template specialization is implicitly instantiated when the specialization is referenced in a context that requires a completely-defined object type or when the completeness of the class type affects the semantics of the program. [*Note:* In particular, if the semantics of an expression depend on the member or base class lists of a class template specialization, the class template specialization is implicitly generated. For instance, deleting a pointer to class type depends on whether or not the class declares a destructor, and a conversion between pointers to class type depends on the inheritance relationship between the two classes involved. — *end note*] [*Example:*

```

template<class T> class B { /* ... */ };
template<class T> class D : public B<T> { /* ... */ };

void f(void*);
void f(B<int>*);

void g(D<int>* p, D<char>* pp, D<double>* ppp) {
 f(p); // instantiation of D<int> required: call f(B<int>*)
 B<char>* q = pp; // instantiation of D<char> required: convert D<char>* to B<char>*
 delete ppp; // instantiation of D<double> required
}

```

— *end example*] If a class template has been declared, but not defined, at the point of instantiation (17.7.4.1), the instantiation yields an incomplete class type (6.7). [*Example:*

```

template<class T> class X;
X<char> ch; // error: incomplete type X<char>

```

— *end example*] [*Note:* Within a template declaration, a local class (12.4) or enumeration and the members of a local class are never considered to be entities that can be separately instantiated (this includes their default arguments, *noexcept-specifiers*, and non-static data member initializers, if any, but not their *partial-concept-ids* or *requires-clauses*). As a result, the dependent names are looked up, the semantic constraints are checked, and any templates used are instantiated as part of the instantiation of the entity within which the local class or enumeration is declared. — *end note*]

- 2 The implicit instantiation of a class template specialization causes
- (2.1) — the implicit instantiation of the declarations, but not of the definitions, of the non-deleted class member functions, member classes, scoped member enumerations, static data members, member templates, and friends; and
  - (2.2) — the implicit instantiation of the definitions of deleted member functions, unscoped member enumerations, and member anonymous unions.

The implicit instantiation of a class template specialization does not cause the implicit instantiation of default arguments or *noexcept-specifiers* of the class member functions. [*Example:*

```

template<class T>
struct C {
 void f() { T x; }
 void g() = delete;
};
C<void> c; // OK, definition of C<void>::f is not instantiated at this point
template<> void C<int>::g() { } // error: redefinition of C<int>::g

```

— *end example*] However, for the purpose of determining whether an instantiated redeclaration is valid according to 6.2 and 12.2, a declaration that corresponds to a definition in the template is considered to be a definition. [*Example*:

```

template<class T, class U>
struct Outer {
 template<class X, class Y> struct Inner;
 template<class Y> struct Inner<T, Y>; // #1a
 template<class Y> struct Inner<T, Y> { }; // #1b; OK: valid redeclaration of #1a
 template<class Y> struct Inner<U, Y> { }; // #2
};

Outer<int, int> outer; // error at #2

```

Outer<int, int>::Inner<int, Y> is redeclared at #1b. (It is not defined but noted as being associated with a definition in Outer<T, U>.) #2 is also a redeclaration of #1a. It is noted as associated with a definition, so it is an invalid redeclaration of the same partial specialization.

```

template<typename T> struct Friendly {
 template<typename U> friend int f(U) { return sizeof(T); }
};
Friendly<char> fc;
Friendly<float> ff; // ill-formed: produces second definition of f(U)

```

— *end example*]

- 3 Unless a member of a class template or a member template has been explicitly instantiated or explicitly specialized, the specialization of the member is implicitly instantiated when the specialization is referenced in a context that requires the member definition to exist or if the existence of the definition of the member affects the semantics of the program; in particular, the initialization (and any associated side effects) of a static data member does not occur unless the static data member is itself used in a way that requires the definition of the static data member to exist.
- 4 Unless a function template specialization has been explicitly instantiated or explicitly specialized, the function template specialization is implicitly instantiated when the specialization is referenced in a context that requires a function definition to exist or if the existence of the definition affects the semantics of the program. A function whose declaration was instantiated from a friend function definition is implicitly instantiated when it is referenced in a context that requires a function definition to exist or if the existence of the definition affects the semantics of the program. Unless a call is to a function template explicit specialization or to a member function of an explicitly specialized class template, a default argument for a function template or a member function of a class template is implicitly instantiated when the function is called in a context that requires the value of the default argument.
- 5 [*Example*:

```

template<class T> struct Z {
 void f();
 void g();
};

void h() {
 Z<int> a; // instantiation of class Z<int> required
 Z<char>* p; // instantiation of class Z<char> not required
 Z<double>* q; // instantiation of class Z<double> not required

 a.f(); // instantiation of Z<int>::f() required
 p->g(); // instantiation of class Z<char> required, and
 // instantiation of Z<char>::g() required
}

```

Nothing in this example requires `class Z<double>`, `Z<int>::g()`, or `Z<char>::f()` to be implicitly instantiated. — *end example*]

- 6 Unless a variable template specialization has been explicitly instantiated or explicitly specialized, the variable template specialization is implicitly instantiated when it is referenced in a context that requires a variable definition to exist or if the existence of the definition affects the semantics of the program. A default template argument for a variable template is implicitly instantiated when the variable template is referenced in a context that requires the value of the default argument.
- 7 The existence of a definition of a variable or function is considered to affect the semantics of the program if the variable or function is needed for constant evaluation by an expression (8.6), even if constant evaluation of the expression is not required or if constant expression evaluation does not use the definition.

[*Example:*

```
template<typename T> constexpr int f() { return T::value; }
template<bool B, typename T> void g(decltype(B ? f<T>() : 0));
template<bool B, typename T> void g(...);
template<bool B, typename T> void h(decltype(int{B ? f<T>() : 0}));
template<bool B, typename T> void h(...);
void x() {
 g<false, int>(0); // OK, B ? f<T>() : 0 is not potentially constant evaluated
 h<false, int>(0); // error, instantiates f<int> even though B evaluates to false and
 // list-initialization of int from int cannot be narrowing
}
```

— *end example*]

- 8 If the function selected by overload resolution (16.3) can be determined without instantiating a class template definition, it is unspecified whether that instantiation actually takes place. [*Example:*

```
template <class T> struct S {
 operator int();
};

void f(int);
void f(S<int>&);
void f(S<float>);

void g(S<int>& sr) {
 f(sr); // instantiation of S<int> allowed but not required
 // instantiation of S<float> allowed but not required
};
```

— *end example*]

- 9 If a function template or a member function template specialization is used in a way that involves overload resolution, a declaration of the specialization is implicitly instantiated (17.9.3).
- 10 An implementation shall not implicitly instantiate a function template, a variable template, a member template, a non-virtual member function, a member class, a static data member of a class template, or a substatement of a constexpr if statement (9.4.1), unless such instantiation is required. [*Note:* The instantiation of a generic lambda does not require instantiation of substatements of a constexpr if statement within its *compound-statement* unless the call operator template is instantiated. — *end note*] It is unspecified whether or not an implementation implicitly instantiates a virtual member function of a class template if the virtual member function would not otherwise be instantiated. The use of a template specialization in a default argument shall not cause the template to be implicitly instantiated except that a class template may be instantiated where its complete type is needed to determine the correctness of the default argument. The use of a default argument in a function call causes specializations in the default argument to be implicitly instantiated.
- 11 Implicitly instantiated class, function, and variable template specializations are placed in the namespace where the template is defined. Implicitly instantiated specializations for members of a class template are placed in the namespace where the enclosing class template is defined. Implicitly instantiated member templates are placed in the namespace where the enclosing class or class template is defined. [*Example:*

```
namespace N {
 template<class T> class List {
```



```

 public:
 T* get();
 };
}

template<class K, class V> class Map {
public:
 N::List<V> lt;
 V get(K);
};

void g(Map<const char*,int>& m) {
 int i = m.get("Nicholas");
}

```

A call of `lt.get()` from `Map<const char*,int>::get()` would place `List<int>::get()` in the namespace `N` rather than in the global namespace. — *end example*]

- 12 If a function template `f` is called in a way that requires a default argument to be used, the dependent names are looked up, the semantics constraints are checked, and the instantiation of any template used in the default argument is done as if the default argument had been an initializer used in a function template specialization with the same scope, the same template parameters and the same access as that of the function template `f` used at that point, except that the scope in which a closure type is declared (8.4.5.1) – and therefore its associated namespaces – remain as determined from the context of the definition for the default argument. This analysis is called *default argument instantiation*. The instantiated default argument is then used as the argument of `f`.

- 13 Each default argument is instantiated independently. [*Example:*

```

template<class T> void f(T x, T y = ydef(T()), T z = zdef(T()));

class A { };

A zdef(A);

void g(A a, A b, A c) {
 f(a, b, c); // no default argument instantiation
 f(a, b); // default argument z = zdef(T()) instantiated
 f(a); // ill-formed; ydef is not declared
}

```

— *end example*]

- 14 The *noexcept-specifier* of a function template specialization is not instantiated along with the function declaration; it is instantiated when needed (18.4). If such an *noexcept-specifier* is needed but has not yet been instantiated, the dependent names are looked up, the semantics constraints are checked, and the instantiation of any template used in the *noexcept-specifier* is done as if it were being done as part of instantiating the declaration of the specialization at that point.

- 15 [Note: 17.7.4.1 defines the point of instantiation of a template specialization. — *end note*]

- 16 There is an implementation-defined quantity that specifies the limit on the total depth of recursive instantiations (Annex B), which could involve more than one template. The result of an infinite recursion in instantiation is undefined. [*Example:*

```

template<class T> class X {
 X<T*> p; // OK
 X<T*> a; // implicit generation of X<T> requires
 // the implicit instantiation of X<T*> which requires
 // the implicit instantiation of X<T**> which ...
};

```

— *end example*]

- 17 The *partial-concept-ids* and *requires-clause* of a template specialization or member function are not instantiated along with the specialization or function itself, even for a member function of a local class; substitution into the atomic constraints formed from them is instead performed as specified in 17.4.2 and 17.4.1.2 when

determining whether the constraints are satisfied. [Note: The satisfaction of constraints is determined during name lookup or overload resolution (16.3). — end note] [Example:

```
template<typename T> concept C = sizeof(T) > 2;
template<typename T> concept D = C<T> && sizeof(T) > 4;

template<typename T> struct S {
 S() requires C<T> { } // #1
 S() requires D<T> { } // #2
};

S<char> s1; // error: no matching constructor
S<char[8]> s2; // OK, calls #2
```

When `S<char>` is instantiated, both constructors are part of the specialization. Their constraints are not satisfied, and they suppress the implicit declaration of a default constructor for `S<char>` (15.1), so there is no viable constructor for `s1`. — end example] [Example:

```
template<typename T> struct S1 {
 template<typename U>
 requires false
 struct Inner1; // ill-formed, no diagnostic required
};

template<typename T> struct S2 {
 template<typename U>
 requires (sizeof(T[-(int)sizeof(T)]) > 1)
 struct Inner2; // ill-formed, no diagnostic required
};
```

The class `S1<T>::Inner1` is ill-formed, no diagnostic required, because it has no valid specializations. `S2` is ill-formed, no diagnostic required, since no substitution into the constraints of its `Inner2` template would result in a valid expression. — end example]

## 17.8.2 Explicit instantiation [temp.explicit]

- <sup>1</sup> A class, function, variable, or member template specialization can be explicitly instantiated from its template. A member function, member class or static data member of a class template can be explicitly instantiated from the member definition associated with its class template. An explicit instantiation of a function template, member function of a class template, or variable template shall not use the `inline` or `constexpr` specifiers.
- <sup>2</sup> The syntax for explicit instantiation is:

*explicit-instantiation:*  
**extern<sub>opt</sub> template declaration**

There are two forms of explicit instantiation: an explicit instantiation definition and an explicit instantiation declaration. An explicit instantiation declaration begins with the `extern` keyword.

- <sup>3</sup> If the explicit instantiation is for a class or member class, the *elaborated-type-specifier* in the *declaration* shall include a *simple-template-id*; otherwise, the *declaration* shall be a *simple-declaration* whose *init-declarator-list* comprises a single *init-declarator* that does not have an *initializer*. If the explicit instantiation is for a function or member function, the *unqualified-id* in the *declarator* shall be either a *template-id* or, where all template arguments can be deduced, a *template-name* or *operator-function-id*. [Note: The declaration may declare a *qualified-id*, in which case the *unqualified-id* of the *qualified-id* must be a *template-id*. — end note] If the explicit instantiation is for a member function, a member class or a static data member of a class template specialization, the name of the class template specialization in the *qualified-id* for the member name shall be a *simple-template-id*. If the explicit instantiation is for a variable template specialization, the *unqualified-id* in the *declarator* shall be a *simple-template-id*. An explicit instantiation shall appear in an enclosing namespace of its template. If the name declared in the explicit instantiation is an unqualified name, the explicit instantiation shall appear in the namespace where its template is declared or, if that namespace is inline (10.3.1), any namespace from its enclosing namespace set. [Note: Regarding qualified names in declarators, see 11.3. — end note] [Example:

```
template<class T> class Array { void mf(); };
template class Array<char>;
template void Array<int>::mf();
```

```
template<class T> void sort(Array<T>& v) { /* ... */ }
template void sort(Array<char>&); // argument is deduced here
```

```
namespace N {
 template<class T> void f(T&) { }
}
template void N::f<int>(int&);
```

— end example]

- 4 A declaration of a function template, a variable template, a member function or static data member of a class template, or a member function template of a class or class template shall precede an explicit instantiation of that entity. A definition of a class template, a member class of a class template, or a member class template of a class or class template shall precede an explicit instantiation of that entity unless the explicit instantiation is preceded by an explicit specialization of the entity with the same template arguments. If the *declaration* of the explicit instantiation names an implicitly-declared special member function (Clause 15), the program is ill-formed.
- 5 The *declaration* in an *explicit-instantiation* and the *declaration* produced by the corresponding substitution into the templated function, variable, or class are two declarations of the same entity. [Note: These declarations are required to have matching types as specified in 6.5, except as specified in 18.4. [Example:

```
template<typename T> T var = {};
template float var<float>; // OK, instantiated variable has type float
template int var<int[16]>[]; // OK, absence of major array bound is permitted
template int *var<int>; // error: instantiated variable has type int

template<typename T> auto av = T();
template int av<int>; // OK, variable with type int can be redeclared with type auto

template<typename T> auto f() {}
template void f<int>(); // error: function with deduced return type
// redeclared with non-deduced return type (10.1.7.4)
```

— end example] — end note] Despite its syntactic form, the *declaration* in an *explicit-instantiation* for a variable is not itself a definition and does not conflict with the definition instantiated by an explicit instantiation definition for that variable.

- 6 For a given set of template arguments, if an explicit instantiation of a template appears after a declaration of an explicit specialization for that template, the explicit instantiation has no effect. Otherwise, for an explicit instantiation definition the definition of a function template, a variable template, a member function template, or a member function or static data member of a class template shall be present in every translation unit in which it is explicitly instantiated.
- 7 An explicit instantiation of a class, function template, or variable template specialization is placed in the namespace in which the template is defined. An explicit instantiation for a member of a class template is placed in the namespace where the enclosing class template is defined. An explicit instantiation for a member template is placed in the namespace where the enclosing class or class template is defined. [Example:

```
namespace N {
 template<class T> class Y { void mf() { } };
}

template class Y<int>; // error: class template Y not visible in the global namespace

using N::Y;
template class Y<int>; // error: explicit instantiation outside of the namespace of the template

template class N::Y<char*>; // OK: explicit instantiation in namespace N
template void N::Y<double>::mf(); // OK: explicit instantiation in namespace N
```

— end example]

- 8 A trailing *template-argument* can be left unspecified in an explicit instantiation of a function template specialization or of a member function template specialization provided it can be deduced from the type of a function parameter (17.9.2). [Example:

```
template<class T> class Array { /* ... */ };
```

```
template<class T> void sort(Array<T>& v) { /* ... */ }

// instantiate sort(Array<int>&) – template-argument deduced
template void sort<>(Array<int>&);
```

— end example]

- <sup>9</sup> [Note: An explicit instantiation of a constrained template shall satisfy that template’s associated constraints (17.4.2). The satisfaction of constraints is determined when forming the template name of an explicit instantiation in which all template arguments are specified (17.2), or, for explicit instantiations of function templates, during template argument deduction (17.9.2.6) when one or more trailing template arguments are left unspecified. — end note]
- <sup>10</sup> An explicit instantiation that names a class template specialization is also an explicit instantiation of the same kind (declaration or definition) of each of its members (not including members inherited from base classes and members that are templates) that has not been previously explicitly specialized in the translation unit containing the explicit instantiation, provided that the associated constraints, if any, of that member are satisfied by the template arguments of the explicit instantiation (17.4.2, 17.4.1), except as described below. [Note: In addition, it will typically be an explicit instantiation of certain implementation-dependent data about the class. — end note]
- <sup>11</sup> An explicit instantiation definition that names a class template specialization explicitly instantiates the class template specialization and is an explicit instantiation definition of only those members that have been defined at the point of instantiation.
- <sup>12</sup> Except for inline functions and variables, declarations with types deduced from their initializer or return value (10.1.7.4), **const** variables of literal types, variables of reference types, and class template specializations, explicit instantiation declarations have the effect of suppressing the implicit instantiation of the definition of the entity to which they refer. [Note: The intent is that an inline function that is the subject of an explicit instantiation declaration will still be implicitly instantiated when odr-used (6.2) so that the body can be considered for inlining, but that no out-of-line copy of the inline function would be generated in the translation unit. — end note]
- <sup>13</sup> If an entity is the subject of both an explicit instantiation declaration and an explicit instantiation definition in the same translation unit, the definition shall follow the declaration. An entity that is the subject of an explicit instantiation declaration and that is also used in a way that would otherwise cause an implicit instantiation (17.8.1) in the translation unit shall be the subject of an explicit instantiation definition somewhere in the program; otherwise the program is ill-formed, no diagnostic required. [Note: This rule does apply to inline functions even though an explicit instantiation declaration of such an entity has no other normative effect. This is needed to ensure that if the address of an inline function is taken in a translation unit in which the implementation chose to suppress the out-of-line body, another translation unit will supply the body. — end note] An explicit instantiation declaration shall not name a specialization of a template with internal linkage.
- <sup>14</sup> An explicit instantiation does not constitute a use of a default argument, so default argument instantiation is not done. [Example:

```
char* p = 0;
template<class T> T g(T x = &p) { return x; }
template int g<int>(int); // OK even though &p isn't an int.
```

— end example]

### 17.8.3 Explicit specialization

[temp.expl.spec]

- <sup>1</sup> An explicit specialization of any of the following:
- (1.1) — function template
  - (1.2) — class template
  - (1.3) — variable template
  - (1.4) — member function of a class template
  - (1.5) — static data member of a class template
  - (1.6) — member class of a class template
  - (1.7) — member enumeration of a class template

- (1.8) — member class template of a class or class template  
 (1.9) — member function template of a class or class template

can be declared by a declaration introduced by `template<>`; that is:

*explicit-specialization:*  
`template < > declaration`

[*Example:*

```
template<class T> class stream;

template<> class stream<char> { /* ... */ };

template<class T> class Array { /* ... */ };
template<class T> void sort(Array<T>& v) { /* ... */ }

template<> void sort<char*>(Array<char*>&);
```

Given these declarations, `stream<char>` will be used as the definition of streams of `chars`; other streams will be handled by class template specializations instantiated from the class template. Similarly, `sort<char*>` will be used as the sort function for arguments of type `Array<char*>`; other `Array` types will be sorted by functions generated from the template. — *end example*]

- 2 An explicit specialization may be declared in any scope in which the corresponding primary template may be defined (10.3.1.2, 12.2, 17.6.2).  
 3 A declaration of a function template, class template, or variable template being explicitly specialized shall precede the declaration of the explicit specialization. [*Note:* A declaration, but not a definition of the template is required. — *end note*] The definition of a class or class template shall precede the declaration of an explicit specialization for a member template of the class or class template. [*Example:*

```
template<> class X<int> { /* ... */ }; // error: X not a template

template<class T> class X;

template<> class X<char*> { /* ... */ }; // OK: X is a template
```

— *end example*]

- 4 A member function, a member function template, a member class, a member enumeration, a member class template, a static data member, or a static data member template of a class template may be explicitly specialized for a class specialization that is implicitly instantiated; in this case, the definition of the class template shall precede the explicit specialization for the member of the class template. If such an explicit specialization for the member of a class template names an implicitly-declared special member function (Clause 15), the program is ill-formed.  
 5 A member of an explicitly specialized class is not implicitly instantiated from the member declaration of the class template; instead, the member of the class template specialization shall itself be explicitly defined if its definition is required. In this case, the definition of the class template explicit specialization shall be in scope at the point at which the member is defined. The definition of an explicitly specialized class is unrelated to the definition of a generated specialization. That is, its members need not have the same names, types, etc. as the members of a generated specialization. Members of an explicitly specialized class template are defined in the same manner as members of normal classes, and not using the `template<>` syntax. The same is true when defining a member of an explicitly specialized member class. However, `template<>` is used in defining a member of an explicitly specialized member class template that is specialized as a class template. [*Example:*

```
template<class T> struct A {
 struct B { };
 template<class U> struct C { };
};

template<> struct A<int> {
 void f(int);
};

void h() {
 A<int> a;
```

```

 a.f(16); // A<int>::f must be defined somewhere
}

// template<> not used for a member of an explicitly specialized class template
void A<int>::f(int) { /* ... */ }

template<> struct A<char>::B {
 void f();
};
// template<> also not used when defining a member of an explicitly specialized member class
void A<char>::B::f() { /* ... */ }

template<> template<class U> struct A<char>::C {
 void f();
};
// template<> is used when defining a member of an explicitly specialized member class template
// specialized as a class template
template<>
template<class U> void A<char>::C<U>::f() { /* ... */ }

template<> struct A<short>::B {
 void f();
};
template<> void A<short>::B::f() { /* ... */ } // error: template<> not permitted

template<> template<class U> struct A<short>::C {
 void f();
};
template<class U> void A<short>::C<U>::f() { /* ... */ } // error: template<> required

```

— end example]

- <sup>6</sup> If a template, a member template or a member of a class template is explicitly specialized then that specialization shall be declared before the first use of that specialization that would cause an implicit instantiation to take place, in every translation unit in which such a use occurs; no diagnostic is required. If the program does not provide a definition for an explicit specialization and either the specialization is used in a way that would cause an implicit instantiation to take place or the member is a virtual member function, the program is ill-formed, no diagnostic required. An implicit instantiation is never generated for an explicit specialization that is declared but not defined. [*Example*:

```

class String { };
template<class T> class Array { /* ... */ };
template<class T> void sort(Array<T>& v) { /* ... */ }

void f(Array<String>& v) {
 sort(v); // use primary template sort(Array<T>&), T is String
}

template<> void sort<String>(Array<String>& v); // error: specialization after use of primary template
template<> void sort<>(Array<char*>& v); // OK: sort<char*> not yet used
template<class T> struct A {
 enum E : T;
 enum class S : T;
};
template<> enum A<int>::E : int { eint }; // OK
template<> enum class A<int>::S : int { sint }; // OK
template<class T> enum A<T>::E : T { eT };
template<class T> enum class A<T>::S : T { sT };
template<> enum A<char>::E : char { echar }; // ill-formed, A<char>::E was instantiated
// when A<char> was instantiated
template<> enum class A<char>::S : char { schar }; // OK

```

— end example]

- <sup>7</sup> The placement of explicit specialization declarations for function templates, class templates, variable templates, member functions of class templates, static data members of class templates, member classes of class templates,

member enumerations of class templates, member class templates of class templates, member function templates of class templates, static data member templates of class templates, member functions of member templates of class templates, member functions of member templates of non-template classes, static data member templates of non-template classes, member function templates of member classes of class templates, etc., and the placement of partial specialization declarations of class templates, variable templates, member class templates of non-template classes, static data member templates of non-template classes, member class templates of class templates, etc., can affect whether a program is well-formed according to the relative positioning of the explicit specialization declarations and their points of instantiation in the translation unit as specified above and below. When writing a specialization, be careful about its location; or to make it compile will be such a trial as to kindle its self-immolation.

- 8 A template explicit specialization is in the scope of the namespace in which the template was defined. [Example:

```
namespace N {
 template<class T> class X { /* ... */ };
 template<class T> class Y { /* ... */ };

 template<> class X<int> { /* ... */ }; // OK: specialization in same namespace
 template<> class Y<double>; // forward-declare intent to specialize for double
}

template<> class N::Y<double> { /* ... */ }; // OK: specialization in enclosing namespace
template<> class N::Y<short> { /* ... */ }; // OK: specialization in enclosing namespace
```

— end example]

- 9 A *simple-template-id* that names a class template explicit specialization that has been declared but not defined can be used exactly like the names of other incompletely-defined classes (6.7). [Example:

```
template<class T> class X; // X is a class template
template<> class X<int>;

X<int>* p; // OK: pointer to declared class X<int>
X<int> x; // error: object of incomplete class X<int>
```

— end example]

- 10 A trailing *template-argument* can be left unspecified in the *template-id* naming an explicit function template specialization provided it can be deduced from the function argument type. [Example:

```
template<class T> class Array { /* ... */ };
template<class T> void sort(Array<T>& v);

// explicit specialization for sort(Array<int>&)
// with deduced template-argument of type int
template<> void sort(Array<int>&);
```

— end example]

- 11 [Note: An explicit specialization of a constrained template shall satisfy that template's associated constraints (17.4.2). The satisfaction of constraints is determined when forming the template name of an explicit specialization in which all template arguments are specified (17.2), or, for explicit specializations of function templates, during template argument deduction (17.9.2.6) when one or more trailing template arguments are left unspecified. — end note]

- 12 A function with the same name as a template and a type that exactly matches that of a template specialization is not an explicit specialization (17.6.6).

- 13 An explicit specialization of a function or variable template is inline only if it is declared with the `inline` specifier or defined as deleted, and independently of whether its function or variable template is inline.

[Example:

```
template<class T> void f(T) { /* ... */ }
template<class T> inline T g(T) { /* ... */ }

template<> inline void f<>(int) { /* ... */ } // OK: inline
template<> int g<>(int) { /* ... */ } // OK: not inline
```

— end example]

14 [Note: For an explicit specialization of a function template, the contract conditions (10.6.4) of the explicit specialization are independent of those of the primary template. — end note]

15 An explicit specialization of a static data member of a template or an explicit specialization of a static data member template is a definition if the declaration includes an initializer; otherwise, it is a declaration. [Note: The definition of a static data member of a template that requires default-initialization must use a *braced-init-list*:

```
template<X> X Q<int>::x; // declaration
template<X> X Q<int>::x (); // error: declares a function
template<X> X Q<int>::x { }; // definition
```

— end note]

16 A member or a member template of a class template may be explicitly specialized for a given implicit instantiation of the class template, even if the member or member template is defined in the class template definition. An explicit specialization of a member or member template is specified using the syntax for explicit specialization. [Example:

```
template<class T> struct A {
 void f(T);
 template<class X1> void g1(T, X1);
 template<class X2> void g2(T, X2);
 void h(T) { }
};

// specialization
template<> void A<int>::f(int);

// out of class member template definition
template<class T> template<class X1> void A<T>::g1(T, X1) { }

// member template specialization
template<> template<class X1> void A<int>::g1(int, X1);

// member template specialization
template<> template<>
 void A<int>::g1(int, char); // X1 deduced as char
template<> template<>
 void A<int>::g2<char>(int, char); // X2 specified as char

// member specialization even if defined in class definition
template<> void A<int>::h(int) { }
```

— end example]

17 A member or a member template may be nested within many enclosing class templates. In an explicit specialization for such a member, the member declaration shall be preceded by a `template<>` for each enclosing class template that is explicitly specialized. [Example:

```
template<class T1> class A {
 template<class T2> class B {
 void mf();
 };
};
template<> template<> class A<int>::B<double>;
template<> template<> void A<char>::B<char>::mf();
```

— end example]

18 In an explicit specialization declaration for a member of a class template or a member template that appears in namespace scope, the member template and some of its enclosing class templates may remain unspecialized, except that the declaration shall not explicitly specialize a class member template if its enclosing class templates are not explicitly specialized as well. In such explicit specialization declaration, the keyword `template` followed by a *template-parameter-list* shall be provided instead of the `template<>` preceding the explicit specialization declaration of the member. The types of the *template-parameters* in the *template-parameter-list* shall be the same as those specified in the primary template definition. [Example:



```

template <class T1> class A {
 template<class T2> class B {
 template<class T3> void mf1(T3);
 void mf2();
 };
};
template <> template <class X>
class A<int>::B {
 template <class T> void mf1(T);
};
template <> template <> template<class T>
void A<int>::B<double>::mf1(T t) { }
template <class Y> template <>
void A<Y>::B<double>::mf2() { } // ill-formed; B<double> is specialized but
 // its enclosing class template A is not

```

— end example]

- 19 A specialization of a member function template, member class template, or static data member template of a non-specialized class template is itself a template.
- 20 An explicit specialization declaration shall not be a friend declaration.
- 21 Default function arguments shall not be specified in a declaration or a definition for one of the following explicit specializations:
- (21.1) — the explicit specialization of a function template;
- (21.2) — the explicit specialization of a member function template;
- (21.3) — the explicit specialization of a member function of a class template where the class template specialization to which the member function specialization belongs is implicitly instantiated. [Note: Default function arguments may be specified in the declaration or definition of a member function of a class template specialization that is explicitly specialized. — end note]

## 17.9 Function template specializations

[temp.fct.spec]

- 1 A function instantiated from a function template is called a function template specialization; so is an explicit specialization of a function template. Template arguments can be explicitly specified when naming the function template specialization, deduced from the context (e.g., deduced from the function arguments in a call to the function template specialization, see 17.9.2), or obtained from default template arguments.
- 2 Each function template specialization instantiated from a template has its own copy of any static variable. [Example:

```

template<class T> void f(T* p) {
 static T s;
};

void g(int a, char* b) {
 f(&a); // calls f<int>(int*)
 f(&b); // calls f<char*>(char**)
}

```

Here `f<int>(int*)` has a static variable `s` of type `int` and `f<char*>(char**)` has a static variable `s` of type `char*`. — end example]

### 17.9.1 Explicit template argument specification

[temp.arg.explicit]

- 1 Template arguments can be specified when referring to a function template specialization by qualifying the function template name with the list of *template-arguments* in the same way as *template-arguments* are specified in uses of a class template specialization. [Example:

```

template<class T> void sort(Array<T>& v);
void f(Array<dcomplex>& cv, Array<int>& ci) {
 sort<dcomplex>(cv); // sort(Array<dcomplex>&)
 sort<int>(ci); // sort(Array<int>&)
}

```

and

```

template<class U, class V> U convert(V v);

void g(double d) {
 int i = convert<int,double>(d); // int convert(double)
 char c = convert<char,double>(d); // char convert(double)
}

```

— *end example*]

- 2 A template argument list may be specified when referring to a specialization of a function template
- (2.1) — when a function is called,
  - (2.2) — when the address of a function is taken, when a function initializes a reference to function, or when a pointer to member function is formed,
  - (2.3) — in an explicit specialization,
  - (2.4) — in an explicit instantiation, or
  - (2.5) — in a friend declaration.

- 3 Trailing template arguments that can be deduced (17.9.2) or obtained from default *template-arguments* may be omitted from the list of explicit *template-arguments*. A trailing template parameter pack (17.6.3) not otherwise deduced will be deduced to an empty sequence of template arguments. If all of the template arguments can be deduced, they may all be omitted; in this case, the empty template argument list <> itself may also be omitted. In contexts where deduction is done and fails, or in contexts where deduction is not done, if a template argument list is specified and it, along with any default template arguments, identifies a single function template specialization, then the *template-id* is an lvalue for the function template specialization. [*Example*:

```

template<class X, class Y> X f(Y);
template<class X, class Y, class ... Z> X g(Y);
void h() {
 int i = f<int>(5.6); // Y is deduced to be double
 int j = f(5.6); // ill-formed: X cannot be deduced
 f<void>(f<int, bool>); // Y for outer f deduced to be int (*)(bool)
 f<void>(f<int>); // ill-formed: f<int> does not denote a single function template specialization
 int k = g<int>(5.6); // Y is deduced to be double, Z is deduced to an empty sequence
 f<void>(g<int, bool>); // Y for outer f is deduced to be int (*)(bool),
 // Z is deduced to an empty sequence
}

```

— *end example*]

- 4 [*Note*: An empty template argument list can be used to indicate that a given use refers to a specialization of a function template even when a non-template function (11.3.5) is visible that would otherwise be used. For example:

```

template <class T> int f(T); // #1
int f(int); // #2
int k = f(1); // uses #2
int l = f<>(1); // uses #1

```

— *end note*]

- 5 Template arguments that are present shall be specified in the declaration order of their corresponding *template-parameters*. The template argument list shall not specify more *template-arguments* than there are corresponding *template-parameters* unless one of the *template-parameters* is a template parameter pack. [*Example*:

```

template<class X, class Y, class Z> X f(Y,Z);
template<class ... Args> void f2();
void g() {
 f<int,const char*,double>("aa",3.0);
 f<int,const char*>("aa",3.0); // Z is deduced to be double
 f<int>("aa",3.0); // Y is deduced to be const char*, and Z is deduced to be double
 f("aa",3.0); // error: X cannot be deduced
 f2<char, short, int, long>(); // OK
}

```

— *end example*]

- 6 Implicit conversions (Clause 7) will be performed on a function argument to convert it to the type of the corresponding function parameter if the parameter type contains no *template-parameters* that participate in template argument deduction. [Note: Template parameters do not participate in template argument deduction if they are explicitly specified. For example,

```
template<class T> void f(T);

class Complex {
 Complex(double);
};

void g() {
 f<Complex>(1); // OK, means f<Complex>(Complex(1))
}
```

— *end note*]

- 7 [Note: Because the explicit template argument list follows the function template name, and because constructor templates (15.1) are named without using a function name (6.4.3.1), there is no way to provide an explicit template argument list for these function templates. — *end note*]
- 8 Template argument deduction can extend the sequence of template arguments corresponding to a template parameter pack, even when the sequence contains explicitly specified template arguments. [Example:

```
template<class ... Types> void f(Types ... values);

void g() {
 f<int*, float*>(0, 0, 0); // Types is deduced to the sequence int*, float*, int
}
```

— *end example*]

## 17.9.2 Template argument deduction

[temp.deduct]

- 1 When a function template specialization is referenced, all of the template arguments shall have values. The values can be explicitly specified or, in some cases, be deduced from the use or obtained from default *template-arguments*. [Example:

```
void f(Array<dcomplex>& cv, Array<int>& ci) {
 sort(cv); // calls sort(Array<dcomplex>&)
 sort(ci); // calls sort(Array<int>&)
}
```

and

```
void g(double d) {
 int i = convert<int>(d); // calls convert<int,double>(double)
 int c = convert<char>(d); // calls convert<char,double>(double)
}
```

— *end example*]

- 2 When an explicit template argument list is specified, if the given *template-id* is not valid (17.2), type deduction fails. Otherwise, the specified template argument values are substituted for the corresponding template parameters as specified below.
- 3 After this substitution is performed, the function parameter type adjustments described in 11.3.5 are performed. [Example: A parameter type of “void (const int, int [5])” becomes “void(\*) (int, int\*)”. — *end example*] [Note: A top-level qualifier in a function parameter declaration does not affect the function type but still affects the type of the function parameter variable within the function. — *end note*] [Example:

```
template <class T> void f(T t);
template <class X> void g(const X x);
template <class Z> void h(Z, Z*);

int main() {
 // #1: function type is f(int), t is non const
 f<int>(1);
}
```

```

// #2: function type is f(int), t is const
f<const int>(1);

// #3: function type is g(int), x is const
g<int>(1);

// #4: function type is g(int), x is const
g<const int>(1);

// #5: function type is h(int, const int*)
h<const int>(1,0);
}

```

— end example]

- 4 [Note: `f<int>(1)` and `f<const int>(1)` call distinct functions even though both of the functions called have the same function type. — end note]
- 5 The resulting substituted and adjusted function type is used as the type of the function template for template argument deduction. If a template argument has not been deduced and its corresponding template parameter has a default argument, the template argument is determined by substituting the template arguments determined for preceding template parameters into the default argument. If the substitution results in an invalid type, as described above, type deduction fails. [Example:

```

template <class T, class U = double>
void f(T t = 0, U u = 0);

void g() {
 f(1, 'c'); // f<int,char>(1,'c')
 f(1); // f<int,double>(1,0)
 f(); // error: T cannot be deduced
 f<int>(); // f<int,double>(0,0)
 f<int,char>(); // f<int,char>(0,0)
}

```

— end example]

When all template arguments have been deduced or obtained from default template arguments, all uses of template parameters in the template parameter list of the template and the function type are replaced with the corresponding deduced or default argument values. If the substitution results in an invalid type, as described above, type deduction fails. If the function template has associated constraints (17.4.2), those constraints are checked for satisfaction (17.4.1). If the constraints are not satisfied, type deduction fails.

- 6 At certain points in the template argument deduction process it is necessary to take a function type that makes use of template parameters and replace those template parameters with the corresponding template arguments. This is done at the beginning of template argument deduction when any explicitly specified template arguments are substituted into the function type, and again at the end of template argument deduction when any template arguments that were deduced or obtained from default arguments are substituted.
- 7 The substitution occurs in all types and expressions that are used in the function type and in template parameter declarations. The expressions include not only constant expressions such as those that appear in array bounds or as nontype template arguments but also general expressions (i.e., non-constant expressions) inside `sizeof`, `decltype`, and other contexts that allow non-constant expressions. The substitution proceeds in lexical order and stops when a condition that causes deduction to fail is encountered. If substitution into different declarations of the same function template would cause template instantiations to occur in a different order or not at all, the program is ill-formed; no diagnostic required. [Note: The equivalent substitution in exception specifications is done only when the *noexcept-specifier* is instantiated, at which point a program is ill-formed if the substitution results in an invalid type or expression. — end note] [Example:

```

template <class T> struct A { using X = typename T::X; };
template <class T> typename T::X f(typename A<T>::X);
template <class T> void f(...) { }
template <class T> auto g(typename A<T>::X) -> typename T::X;
template <class T> void g(...) { }
template <class T> typename T::X h(typename A<T>::X);
template <class T> auto h(typename A<T>::X) -> typename T::X; // redeclaration

```

```

template <class T> void h(...) { }

void x() {
 f<int>(0); // OK, substituting return type causes deduction to fail
 g<int>(0); // error, substituting parameter type instantiates A<int>
 h<int>(0); // ill-formed, no diagnostic required
}

```

— end example]

- 8 If a substitution results in an invalid type or expression, type deduction fails. An invalid type or expression is one that would be ill-formed, with a diagnostic required, if written using the substituted arguments. [Note: If no diagnostic is required, the program is still ill-formed. Access checking is done as part of the substitution process. — end note] Only invalid types and expressions in the immediate context of the function type, its template parameter types, and its *explicit-specifier* can result in a deduction failure. [Note: The substitution into types and expressions can result in effects such as the instantiation of class template specializations and/or function template specializations, the generation of implicitly-defined functions, etc. Such effects are not in the “immediate context” and can result in the program being ill-formed. — end note]
- 9 A *lambda-expression* appearing in a function type or a template parameter is not considered part of the immediate context for the purposes of template argument deduction. [Note: The intent is to avoid requiring implementations to deal with substitution failure involving arbitrary statements. [Example:

```

template <class T>
 auto f(T) -> decltype([]() { T::invalid; } ());
void f(...);
f(0); // error: invalid expression not part of the immediate context

template <class T, std::size_t = sizeof([]() { T::invalid; })>
 void g(T);
void g(...);
g(0); // error: invalid expression not part of the immediate context

template <class T>
 auto h(T) -> decltype([x = T::invalid]() { });
void h(...);
h(0); // error: invalid expression not part of the immediate context

template <class T>
 auto i(T) -> decltype([]() -> typename T::invalid { });
void i(...);
i(0); // error: invalid expression not part of the immediate context

template <class T>
 auto j(T t) -> decltype([](auto x) -> decltype(x.invalid) { } (t)); // #1
void j(...); // #2
j(0); // deduction fails on #1, calls #2

```

— end example] — end note]

- 10 [Example:

```

struct X { };
struct Y {
 Y(X){}
};

template <class T> auto f(T t1, T t2) -> decltype(t1 + t2); // #1
X f(Y, Y); // #2

X x1, x2;
X x3 = f(x1, x2); // deduction fails on #1 (cannot add X+X), calls #2

```

— end example]

- 11 [Note: Type deduction may fail for the following reasons:

(11.1) — Attempting to instantiate a pack expansion containing multiple packs of differing lengths.

- (11.2) — Attempting to create an array with an element type that is `void`, a function type, or a reference type, or attempting to create an array with a size that is zero or negative. [*Example:*

```
template <class T> int f(T[5]);
int I = f<int>(0);
int j = f<void>(0); // invalid array
```

— *end example*]

- (11.3) — Attempting to use a type that is not a class or enumeration type in a qualified name. [*Example:*

```
template <class T> int f(typename T::B*);
int i = f<int>(0);
```

— *end example*]

- (11.4) — Attempting to use a type in a *nested-name-specifier* of a *qualified-id* when that type does not contain the specified member, or

(11.4.1) — the specified member is not a type where a type is required, or

(11.4.2) — the specified member is not a template where a template is required, or

(11.4.3) — the specified member is not a non-type where a non-type is required.

[*Example:*

```
template <int I> struct X { };
template <template <class T> class> struct Z { };
template <class T> void f(typename T::Y*){}
template <class T> void g(X<T::N>*){}
template <class T> void h(Z<T::template TT>*){}
struct A {};
struct B { int Y; };
struct C {
 typedef int N;
};
struct D {
 typedef int TT;
};

int main() {
 // Deduction fails in each of these cases:
 f<A>(0); // A does not contain a member Y
 f(0); // The Y member of B is not a type
 g<C>(0); // The N member of C is not a non-type
 h<D>(0); // The TT member of D is not a template
}
```

— *end example*]

- (11.5) — Attempting to create a pointer to reference type.

(11.6) — Attempting to create a reference to `void`.

- (11.7) — Attempting to create “pointer to member of T” when T is not a class type. [*Example:*

```
template <class T> int f(int T::*);
int i = f<int>(0);
```

— *end example*]

- (11.8) — Attempting to give an invalid type to a non-type template parameter. [*Example:*

```
template <class T, T> struct S {};
template <class T> int f(S<T, T()>*);
struct X {};
int i0 = f<X>(0);
```

— *end example*]

- (11.9) — Attempting to perform an invalid conversion in either a template argument expression, or an expression used in the function declaration. [*Example:*

```
template <class T, T*> int f(int);
```

```
int i2 = f<int,1>(0); // can't conv 1 to int*
— end example]
```

- (11.10) — Attempting to create a function type in which a parameter has a type of `void`, or in which the return type is a function type or array type.

— end note]

- <sup>12</sup> [Example: In the following example, assuming a `signed char` cannot represent the value 1000, a narrowing conversion (11.6.4) would be required to convert the *template-argument* of type `int` to `signed char`, therefore substitution fails for the second template (17.3.2).

```
template <int> int f(int);
template <signed char> int f(int);
int i1 = f<1000>(0); // OK
int i2 = f<1>(0); // ambiguous; not narrowing
```

— end example]

### 17.9.2.1 Deducing template arguments from a function call

[temp.deduct.call]

- <sup>1</sup> Template argument deduction is done by comparing each function template parameter type (call it *P*) that contains *template-parameters* that participate in template argument deduction with the type of the corresponding argument of the call (call it *A*) as described below. If removing references and cv-qualifiers from *P* gives `std::initializer_list<P'>` or `P'[N]` for some *P'* and *N* and the argument is a non-empty initializer list (11.6.4), then deduction is performed instead for each element of the initializer list, taking *P'* as a function template parameter type and the initializer element as its argument, and in the `P'[N]` case, if *N* is a non-type template parameter, *N* is deduced from the length of the initializer list. Otherwise, an initializer list argument causes the parameter to be considered a non-deduced context (17.9.2.5). [Example:

```
template<class T> void f(std::initializer_list<T>);
f({1,2,3}); // T deduced to int
f({1,"asdf"}); // error: T deduced to both int and const char*

template<class T> void g(T);
g({1,2,3}); // error: no argument deduced for T

template<class T, int N> void h(T const(&)[N]);
h({1,2,3}); // T deduced to int, N deduced to 3

template<class T> void j(T const(&)[3]);
j({42}); // T deduced to int, array bound not considered

struct Aggr { int i; int j; };
template<int N> void k(Aggr const(&)[N]);
k({1,2,3}); // error: deduction fails, no conversion from int to Aggr
k({{1},{2},{3}}); // OK, N deduced to 3

template<int M, int N> void m(int const(&)[M][N]);
m({{1,2},{3,4}}); // M and N both deduced to 2

template<class T, int N> void n(T const(&)[N], T);
n({{1},{2},{3}},Aggr()); // OK, T is Aggr, N is 3
```

— end example] For a function parameter pack that occurs at the end of the *parameter-declaration-list*, deduction is performed for each remaining argument of the call, taking the type *P* of the *declarator-id* of the function parameter pack as the corresponding function template parameter type. Each deduction deduces template arguments for subsequent positions in the template parameter packs expanded by the function parameter pack. When a function parameter pack appears in a non-deduced context (17.9.2.5), the type of that pack is never deduced. [Example:

```
template<class ... Types> void f(Types& ...);
template<class T1, class ... Types> void g(T1, Types ...);
template<class T1, class ... Types> void g1(Types ..., T1);

void h(int x, float& y) {
 const int z = x;
```

```

 f(x, y, z); // Types is deduced to int, float, const int
 g(x, y, z); // T1 is deduced to int; Types is deduced to float, int
 g1(x, y, z); // error: Types is not deduced
 g1<int, int, int>(x, y, z); // OK, no deduction occurs
}

```

— end example]

2 If P is not a reference type:

- (2.1) — If A is an array type, the pointer type produced by the array-to-pointer standard conversion (7.2) is used in place of A for type deduction; otherwise,
- (2.2) — If A is a function type, the pointer type produced by the function-to-pointer standard conversion (7.3) is used in place of A for type deduction; otherwise,
- (2.3) — If A is a cv-qualified type, the top-level cv-qualifiers of A’s type are ignored for type deduction.

3 If P is a cv-qualified type, the top-level cv-qualifiers of P’s type are ignored for type deduction. If P is a reference type, the type referred to by P is used for type deduction. [Example:

```

template<class T> int f(const T&);
int n1 = f(5); // calls f<int>(const int&)
const int i = 0;
int n2 = f(i); // calls f<int>(const int&)
template <class T> int g(volatile T&);
int n3 = g(i); // calls g<const int>(const volatile int&)

```

— end example] A forwarding reference is an rvalue reference to a cv-unqualified template parameter that does not represent a template parameter of a class template (during class template argument deduction (16.3.1.8)). If P is a forwarding reference and the argument is an lvalue, the type “lvalue reference to A” is used in place of A for type deduction. [Example:

```

template <class T> int f(T&& heisenreference);
template <class T> int g(const T&&);
int i;
int n1 = f(i); // calls f<int&>(int&)
int n2 = f(0); // calls f<int>(int&&)
int n3 = g(i); // error: would call g<int>(const int&&), which
 // would bind an rvalue reference to an lvalue

template <class T> struct A {
 template <class U>
 A(T&&, U&&, int*); // #1: T&& is not a forwarding reference.
 // U&& is a forwarding reference.
 A(T&&, int*); // #2
};

template <class T> A(T&&, int*) -> A<T>; // #3: T&& is a forwarding reference.

int *ip;
A a{i, 0, ip}; // error: cannot deduce from #1
A a0{0, 0, ip}; // uses #1 to deduce A<int> and #1 to initialize
A a2{i, ip}; // uses #3 to deduce A<int&> and #2 to initialize

```

— end example]

4 In general, the deduction process attempts to find template argument values that will make the deduced A identical to A (after the type A is transformed as described above). However, there are three cases that allow a difference:

- (4.1) — If the original P is a reference type, the deduced A (i.e., the type referred to by the reference) can be more cv-qualified than the transformed A.
- (4.2) — The transformed A can be another pointer or pointer-to-member type that can be converted to the deduced A via a function pointer conversion (7.13) and/or qualification conversion (7.5).
- (4.3) — If P is a class and P has the form *simple-template-id*, then the transformed A can be a derived class of the deduced A. Likewise, if P is a pointer to a class of the form *simple-template-id*, the transformed A can be a pointer to a derived class pointed to by the deduced A.



5 These alternatives are considered only if type deduction would otherwise fail. If they yield more than one possible deduced A, the type deduction fails. [Note: If a *template-parameter* is not used in any of the function parameters of a function template, or is used only in a non-deduced context, its corresponding *template-argument* cannot be deduced from a function call and the *template-argument* must be explicitly specified. — end note]

6 When P is a function type, function pointer type, or pointer-to-member-function type:

(6.1) — If the argument is an overload set containing one or more function templates, the parameter is treated as a non-deduced context.

(6.2) — If the argument is an overload set (not containing function templates), trial argument deduction is attempted using each of the members of the set. If deduction succeeds for only one of the overload set members, that member is used as the argument value for the deduction. If deduction succeeds for more than one member of the overload set the parameter is treated as a non-deduced context.

7 [Example:

*// Only one function of an overload set matches the call so the function parameter is a deduced context.*

```
template <class T> int f(T (*p)(T));
int g(int);
int g(char);
int i = f(g); // calls f(int (*)(int))
```

— end example]

8 [Example:

*// Ambiguous deduction causes the second function parameter to be a non-deduced context.*

```
template <class T> int f(T, T (*p)(T));
int g(int);
char g(char);
int i = f(1, g); // calls f(int, int (*)(int))
```

— end example]

9 [Example:

*// The overload set contains a template, causing the second function parameter to be a non-deduced context.*

```
template <class T> int f(T, T (*p)(T));
char g(char);
template <class T> T g(T);
int i = f(1, g); // calls f(int, int (*)(int))
```

— end example]

10 If deduction succeeds for all parameters that contain *template-parameters* that participate in template argument deduction, and all template arguments are explicitly specified, deduced, or obtained from default template arguments, remaining parameters are then compared with the corresponding arguments. For each remaining parameter P with a type that was non-dependent before substitution of any explicitly-specified template arguments, if the corresponding argument A cannot be implicitly converted to P, deduction fails. [Note: Parameters with dependent types in which no *template-parameters* participate in template argument deduction, and parameters that became non-dependent due to substitution of explicitly-specified template arguments, will be checked during overload resolution. — end note] [Example:

```
template <class T> struct Z {
 typedef typename T::x xx;
};
template <class T> typename Z<T>::xx f(void *, T); // #1
template <class T> void f(int, T); // #2
struct A { } a;
int main() {
 f(1, a); // OK, deduction fails for #1 because there is no conversion from int to void*
}
```

— end example]

### 17.9.2.2 Deducing template arguments taking the address of a function template [temp.deduct.funcaddr]

- <sup>1</sup> Template arguments can be deduced from the type specified when taking the address of an overloaded function (16.4). The function template's function type and the specified type are used as the types of P and A, and the deduction is done as described in 17.9.2.5.
- <sup>2</sup> A placeholder type (10.1.7.4) in the return type of a function template is a non-deduced context. If template argument deduction succeeds for such a function, the return type is determined from instantiation of the function body.

### 17.9.2.3 Deducing conversion function template arguments [temp.deduct.conv]

- <sup>1</sup> Template argument deduction is done by comparing the return type of the conversion function template (call it P) with the type that is required as the result of the conversion (call it A; see 11.6, 16.3.1.5, and 16.3.1.6 for the determination of that type) as described in 17.9.2.5.
- <sup>2</sup> If P is a reference type, the type referred to by P is used in place of P for type deduction and for any further references to or transformations of P in the remainder of this subclause.
- <sup>3</sup> If A is not a reference type:
  - (3.1) — If P is an array type, the pointer type produced by the array-to-pointer standard conversion (7.2) is used in place of P for type deduction; otherwise,
  - (3.2) — If P is a function type, the pointer type produced by the function-to-pointer standard conversion (7.3) is used in place of P for type deduction; otherwise,
  - (3.3) — If P is a cv-qualified type, the top-level cv-qualifiers of P's type are ignored for type deduction.
- <sup>4</sup> If A is a cv-qualified type, the top-level cv-qualifiers of A's type are ignored for type deduction. If A is a reference type, the type referred to by A is used for type deduction.
- <sup>5</sup> In general, the deduction process attempts to find template argument values that will make the deduced A identical to A. However, there are four cases that allow a difference:
  - (5.1) — If the original A is a reference type, A can be more cv-qualified than the deduced A (i.e., the type referred to by the reference)
  - (5.2) — If the original A is a function pointer type, A can be “pointer to function” even if the deduced A is “pointer to noexcept function”.
  - (5.3) — If the original A is a pointer-to-member-function type, A can be “pointer to member of type function” even if the deduced A is “pointer to member of type noexcept function”.
  - (5.4) — The deduced A can be another pointer or pointer-to-member type that can be converted to A via a qualification conversion.
- <sup>6</sup> These alternatives are considered only if type deduction would otherwise fail. If they yield more than one possible deduced A, the type deduction fails.
- <sup>7</sup> When the deduction process requires a qualification conversion for a pointer or pointer-to-member type as described above, the following process is used to determine the deduced template argument values:

If A is a type

$cv_{1,0}$  “pointer to ...”  $cv_{1,n-1}$  “pointer to”  $cv_{1,n}$  T1

and P is a type

$cv_{2,0}$  “pointer to ...”  $cv_{2,n-1}$  “pointer to”  $cv_{2,n}$  T2,

then the cv-unqualified T1 and T2 are used as the types of A and P respectively for type deduction. [Example:

```
struct A {
 template <class T> operator T***();
};
A a;
const int * const * const * p1 = a; // T is deduced as int, not const int
```

— end example]

**17.9.2.4 Deducing template arguments during partial ordering** [temp.deduct.partial]

- 1 Template argument deduction is done by comparing certain types associated with the two function templates being compared.
- 2 Two sets of types are used to determine the partial ordering. For each of the templates involved there is the original function type and the transformed function type. [Note: The creation of the transformed type is described in 17.6.6.2. — end note] The deduction process uses the transformed type as the argument template and the original type of the other template as the parameter template. This process is done twice for each type involved in the partial ordering comparison: once using the transformed template-1 as the argument template and template-2 as the parameter template and again using the transformed template-2 as the argument template and template-1 as the parameter template.
- 3 The types used to determine the ordering depend on the context in which the partial ordering is done:
  - (3.1) — In the context of a function call, the types used are those function parameter types for which the function call has arguments.<sup>143</sup>
  - (3.2) — In the context of a call to a conversion function, the return types of the conversion function templates are used.
  - (3.3) — In other contexts (17.6.6.2) the function template's function type is used.
- 4 Each type nominated above from the parameter template and the corresponding type from the argument template are used as the types of P and A.
- 5 Before the partial ordering is done, certain transformations are performed on the types used for partial ordering:
  - (5.1) — If P is a reference type, P is replaced by the type referred to.
  - (5.2) — If A is a reference type, A is replaced by the type referred to.
- 6 If both P and A were reference types (before being replaced with the type referred to above), determine which of the two types (if any) is more cv-qualified than the other; otherwise the types are considered to be equally cv-qualified for partial ordering purposes. The result of this determination will be used below.
- 7 Remove any top-level cv-qualifiers:
  - (7.1) — If P is a cv-qualified type, P is replaced by the cv-unqualified version of P.
  - (7.2) — If A is a cv-qualified type, A is replaced by the cv-unqualified version of A.
- 8 Using the resulting types P and A, the deduction is then done as described in 17.9.2.5. If P is a function parameter pack, the type A of each remaining parameter type of the argument template is compared with the type P of the *declarator-id* of the function parameter pack. Each comparison deduces template arguments for subsequent positions in the template parameter packs expanded by the function parameter pack. Similarly, if A was transformed from a function parameter pack, it is compared with each remaining parameter type of the parameter template. If deduction succeeds for a given type, the type from the argument template is considered to be at least as specialized as the type from the parameter template. [Example:
 

```

template<class... Args> void f(Args... args); // #1
template<class T1, class... Args> void f(T1 a1, Args... args); // #2
template<class T1, class T2> void f(T1 a1, T2 a2); // #3

f(); // calls #1
f(1, 2, 3); // calls #2
f(1, 2); // calls #3; non-variadic template #3 is more specialized
 // than the variadic templates #1 and #2

```

 — end example]
- 9 If, for a given type, the types are identical after the transformations above and both P and A were reference types (before being replaced with the type referred to above):
  - (9.1) — if the type from the argument template was an lvalue reference and the type from the parameter template was not, the parameter type is not considered to be at least as specialized as the argument type; otherwise,

---

143) Default arguments are not considered to be arguments in this context; they only become arguments after a function has been selected.

- (9.2) — if the type from the argument template is more cv-qualified than the type from the parameter template (as described above), the parameter type is not considered to be at least as specialized as the argument type.
- <sup>10</sup> Function template *F* is *at least as specialized as* function template *G* if, for each pair of types used to determine the ordering, the type from *F* is at least as specialized as the type from *G*. *F* is *more specialized than G* if *F* is at least as specialized as *G* and *G* is not at least as specialized as *F*.
- <sup>11</sup> If, after considering the above, function template *F* is at least as specialized as function template *G* and vice-versa, and if *G* has a trailing function parameter pack for which *F* does not have a corresponding parameter, and if *F* does not have a trailing function parameter pack, then *F* is more specialized than *G*.
- <sup>12</sup> In most cases, deduction fails if not all template parameters have values, but for partial ordering purposes a template parameter may remain without a value provided it is not used in the types being used for partial ordering. [Note: A template parameter used in a non-deduced context is considered used. — end note]

[Example:

```
template <class T> T f(int); // #1
template <class T, class U> T f(U); // #2
void g() {
 f<int>(1); // calls #1
}
```

— end example]

- <sup>13</sup> [Note: Partial ordering of function templates containing template parameter packs is independent of the number of deduced arguments for those template parameter packs. — end note] [Example:

```
template<class ...> struct Tuple { };
template<class ... Types> void g(Tuple<Types ...>); // #1
template<class T1, class ... Types> void g(Tuple<T1, Types ...>); // #2
template<class T1, class ... Types> void g(Tuple<T1, Types& ...>); // #3

g(Tuple<>()); // calls #1
g(Tuple<int, float>()); // calls #2
g(Tuple<int, float&>()); // calls #3
g(Tuple<int>()); // calls #3
```

— end example]

### 17.9.2.5 Deducing template arguments from a type

[temp.deduct.type]

- <sup>1</sup> Template arguments can be deduced in several different contexts, but in each case a type that is specified in terms of template parameters (call it *P*) is compared with an actual type (call it *A*), and an attempt is made to find template argument values (a type for a type parameter, a value for a non-type parameter, or a template for a template parameter) that will make *P*, after substitution of the deduced values (call it the deduced *A*), compatible with *A*.
- <sup>2</sup> In some cases, the deduction is done using a single set of types *P* and *A*, in other cases, there will be a set of corresponding types *P* and *A*. Type deduction is done independently for each *P/A* pair, and the deduced template argument values are then combined. If type deduction cannot be done for any *P/A* pair, or if for any pair the deduction leads to more than one possible set of deduced values, or if different pairs yield different deduced values, or if any template argument remains neither deduced nor explicitly specified, template argument deduction fails. The type of a type parameter is only deduced from an array bound if it is not otherwise deduced.
- <sup>3</sup> A given type *P* can be composed from a number of other types, templates, and non-type values:
- (3.1) — A function type includes the types of each of the function parameters and the return type.
- (3.2) — A pointer-to-member type includes the type of the class object pointed to and the type of the member pointed to.
- (3.3) — A type that is a specialization of a class template (e.g., *A<int>*) includes the types, templates, and non-type values referenced by the template argument list of the specialization.
- (3.4) — An array type includes the array element type and the value of the array bound.
- <sup>4</sup> In most cases, the types, templates, and non-type values that are used to compose *P* participate in template argument deduction. That is, they may be used to determine the value of a template argument, and template

argument deduction fails if the value so determined is not consistent with the values determined elsewhere. In certain contexts, however, the value does not participate in type deduction, but instead uses the values of template arguments that were either deduced elsewhere or explicitly specified. If a template parameter is used only in non-deduced contexts and is not explicitly specified, template argument deduction fails. [Note: Under 17.9.2.1, if P contains no *template-parameters* that appear in deduced contexts, no deduction is done, so P and A need not have the same form. — end note]

5 The non-deduced contexts are:

- (5.1) — The *nested-name-specifier* of a type that was specified using a *qualified-id*.
- (5.2) — The *expression* of a *decltype-specifier*.
- (5.3) — A non-type template argument or an array bound in which a subexpression references a template parameter.
- (5.4) — A template parameter used in the parameter type of a function parameter that has a default argument that is being used in the call for which argument deduction is being done.
- (5.5) — A function parameter for which argument deduction cannot be done because the associated function argument is a function, or a set of overloaded functions (16.4), and one or more of the following apply:
  - (5.5.1) — more than one function matches the function parameter type (resulting in an ambiguous deduction), or
  - (5.5.2) — no function matches the function parameter type, or
  - (5.5.3) — the set of functions supplied as an argument contains one or more function templates.
- (5.6) — A function parameter for which the associated argument is an initializer list (11.6.4) but the parameter does not have a type for which deduction from an initializer list is specified (17.9.2.1). [Example:

```
template<class T> void g(T);
g({1,2,3}); // error: no argument deduced for T
```

— end example]

- (5.7) — A function parameter pack that does not occur at the end of the *parameter-declaration-list*.

6 When a type name is specified in a way that includes a non-deduced context, all of the types that comprise that type name are also non-deduced. However, a compound type can include both deduced and non-deduced types. [Example: If a type is specified as `A<T>::B<T2>`, both T and T2 are non-deduced. Likewise, if a type is specified as `A<I+J>::X<T>`, I, J, and T are non-deduced. If a type is specified as `void f(typename A<T>::B, A<T>)`, the T in `A<T>::B` is non-deduced but the T in `A<T>` is deduced. — end example]

7 [Example: Here is an example in which different parameter/argument pairs produce inconsistent template argument deductions:

```
template<class T> void f(T x, T y) { /* ... */ }
struct A { /* ... */ };
struct B : A { /* ... */ };
void g(A a, B b) {
 f(a,b); // error: T could be A or B
 f(b,a); // error: T could be A or B
 f(a,a); // OK: T is A
 f(b,b); // OK: T is B
}
```

Here is an example where two template arguments are deduced from a single function parameter/argument pair. This can lead to conflicts that cause type deduction to fail:

```
template <class T, class U> void f(T (*) (T, U, U));

int g1(int, float, float);
char g2(int, float, float);
int g3(int, char, float);

void r() {
 f(g1); // OK: T is int and U is float
 f(g2); // error: T could be char or int
 f(g3); // error: U could be char or float
}
```

Here is an example where a qualification conversion applies between the argument type on the function call and the deduced template argument type:

```
template<class T> void f(const T*) { }
int* p;
void s() {
 f(p); // f(const int*)
}
```

Here is an example where the template argument is used to instantiate a derived class type of the corresponding function parameter type:

```
template <class T> struct B { };
template <class T> struct D : public B<T> {};
struct D2 : public B<int> {};
template <class T> void f(B<T>&){}
void t() {
 D<int> d;
 D2 d2;
 f(d); // calls f(B<int>&)
 f(d2); // calls f(B<int>&)
}
```

— end example]

- <sup>8</sup> A template type argument *T*, a template template argument *TT* or a template non-type argument *i* can be deduced if *P* and *A* have one of the following forms:

```
T
cv T
T*
T&
T&&
T[integer-constant]
template-name<T> (where template-name refers to a class template)
type(T)
T()
T(T)
T type::*
type T::*
T T::*
T (type::*)()
type (T::*)()
type (type::*)(T)
type (T::*)(T)
T (type::*)(T)
T (T::*)(T)
T (T::*)(T)
type [i]
template-name<i> (where template-name refers to a class template)
TT<T>
TT<i>
TT<>
```

where (T) represents a parameter-type-list (11.3.5) where at least one parameter type contains a T, and () represents a parameter-type-list where no parameter type contains a T. Similarly, <T> represents template argument lists where at least one argument contains a T, <i> represents template argument lists where at least one argument contains an *i* and <> represents template argument lists where no argument contains a T or an *i*.

- <sup>9</sup> If *P* has a form that contains <T> or <i>, then each argument *P<sub>i</sub>* of the respective template argument list of *P* is compared with the corresponding argument *A<sub>i</sub>* of the corresponding template argument list of *A*. If the template argument list of *P* contains a pack expansion that is not the last template argument, the entire template argument list is a non-deduced context. If *P<sub>i</sub>* is a pack expansion, then the pattern of *P<sub>i</sub>* is compared with each remaining argument in the template argument list of *A*. Each comparison deduces template arguments for subsequent positions in the template parameter packs expanded by *P<sub>i</sub>*. During partial ordering (17.9.2.4), if *A<sub>i</sub>* was originally a pack expansion:

- (9.1) — if P does not contain a template argument corresponding to  $A_i$  then  $A_i$  is ignored;
- (9.2) — otherwise, if  $P_i$  is not a pack expansion, template argument deduction fails.

[Example:

```
template<class T1, class... Z> class S; // #1
template<class T1, class... Z> class S<T1, const Z&...> { }; // #2
template<class T1, class T2> class S<T1, const T2&> { }; // #3
S<int, const int&> s; // both #2 and #3 match; #3 is more specialized

template<class T, class... U> struct A { }; // #1
template<class T1, class T2, class... U> struct A<T1, T2*, U...> { }; // #2
template<class T1, class T2> struct A<T1, T2> { }; // #3
template struct A<int, int*>; // selects #2
```

— end example]

- 10 Similarly, if P has a form that contains (T), then each parameter type  $P_i$  of the respective parameter-type-list (11.3.5) of P is compared with the corresponding parameter type  $A_i$  of the corresponding parameter-type-list of A. If P and A are function types that originated from deduction when taking the address of a function template (17.9.2.2) or when deducing template arguments from a function declaration (17.9.2.6) and  $P_i$  and  $A_i$  are parameters of the top-level parameter-type-list of P and A, respectively,  $P_i$  is adjusted if it is a forwarding reference (17.9.2.1) and  $A_i$  is an lvalue reference, in which case the type of  $P_i$  is changed to be the template parameter type (i.e., T&& is changed to simply T). [Note: As a result, when  $P_i$  is T&& and  $A_i$  is X&, the adjusted  $P_i$  will be T, causing T to be deduced as X&. — end note] [Example:

```
template <class T> void f(T&&);
template <> void f(int&) { } // #1
template <> void f(int&&) { } // #2
void g(int i) {
 f(i); // calls f<int&>(int&), i.e., #1
 f(0); // calls f<int>(int&&), i.e., #2
}
```

— end example]

If the *parameter-declaration* corresponding to  $P_i$  is a function parameter pack, then the type of its *declarator-id* is compared with each remaining parameter type in the parameter-type-list of A. Each comparison deduces template arguments for subsequent positions in the template parameter packs expanded by the function parameter pack. During partial ordering (17.9.2.4), if  $A_i$  was originally a function parameter pack:

- (10.1) — if P does not contain a function parameter type corresponding to  $A_i$  then  $A_i$  is ignored;
- (10.2) — otherwise, if  $P_i$  is not a function parameter pack, template argument deduction fails.

[Example:

```
template<class T, class... U> void f(T*, U...) { } // #1
template<class T> void f(T) { } // #2
template void f(int*); // selects #1
```

— end example]

- 11 These forms can be used in the same way as T is for further composition of types. [Example:

```
X<int> (*) (char[6])
```

is of the form

```
template-name<T> (*) (type [i])
```

which is a variant of

```
type (*) (T)
```

where type is X<int> and T is char[6]. — end example]

- 12 Template arguments cannot be deduced from function arguments involving constructs other than the ones specified above.
- 13 When the value of the argument corresponding to a non-type template parameter P that is declared with a dependent type is deduced from an expression, the template parameters in the type of P are deduced from the type of the value. [Example:

```

template<long n> struct A { };

template<typename T> struct C;
template<typename T, T n> struct C<A<n>> {
 using Q = T;
};

using R = long;
using R = C<A<2>>::Q; // OK; T was deduced to long from the
 // template argument value in the type A<2>

```

— end example] The type of N in the type T[N] is `std::size_t`. [Example:

```

template<typename T> struct S;
template<typename T, T n> struct S<int[n]> {
 using Q = T;
};

using V = decltype(sizeof 0);
using V = S<int[42]>::Q; // OK; T was deduced to std::size_t from the type int[42]

```

— end example]

14 [Example:

```

template<class T, T i> void f(int (&a)[i]);
int v[10];
void g() {
 f(v); // OK: T is std::size_t
}

```

— end example]

15 [Note: Except for reference and pointer types, a major array bound is not part of a function parameter type and cannot be deduced from an argument:

```

template<int i> void f1(int a[10][i]);
template<int i> void f2(int a[i][20]);
template<int i> void f3(int (&a)[i][20]);

void g() {
 int v[10][20];
 f1(v); // OK: i deduced to be 20
 f1<20>(v); // OK
 f2(v); // error: cannot deduce template-argument i
 f2<10>(v); // OK
 f3(v); // OK: i deduced to be 10
}

```

— end note]

16 [Note: If, in the declaration of a function template with a non-type template parameter, the non-type template parameter is used in a subexpression in the function parameter list, the expression is a non-deduced context as specified above. [Example:

```

template <int i> class A { /* ... */ };
template <int i> void g(A<i+1>);
template <int i> void f(A<i>, A<i+1>);
void k() {
 A<1> a1;
 A<2> a2;
 g(a1); // error: deduction fails for expression i+1
 g<0>(a1); // OK
 f(a1, a2); // OK
}

```

— end example] — end note]

17 [Note: Template parameters do not participate in template argument deduction if they are used only in non-deduced contexts. For example,



```

template<int i, typename T>
T deduce(typename A<T>::X x, // T is not deduced here
 T t, // but T is deduced here
 typename B<i>::Y y); // i is not deduced here
A<int> a;
B<77> b;

int x = deduce<77>(a.xm, 62, b.ym);
// T is deduced to be int, a.xm must be convertible to A<int>::X
// i is explicitly specified to be 77, b.ym must be convertible to B<77>::Y
— end note]

```

- 18 If P has a form that contains <i>, and if the type of i differs from the type of the corresponding template parameter of the template named by the enclosing *simple-template-id*, deduction fails. If P has a form that contains [i], and if the type of i is not an integral type, deduction fails.<sup>144</sup> [Example:

```

template<int i> class A { /* ... */ };
template<short s> void f(A<s>);
void k1() {
 A<1> a;
 f(a); // error: deduction fails for conversion from int to short
 f<1>(a); // OK
}

template<const short cs> class B { };
template<short s> void g(B<s>);
void k2() {
 B<1> b;
 g(b); // OK: cv-qualifiers are ignored on template parameter types
}

```

— end example]

- 19 A *template-argument* can be deduced from a function, pointer to function, or pointer-to-member-function type.

[Example:

```

template<class T> void f(void*)(T,int);
template<class T> void foo(T,int);
void g(int,int);
void g(char,int);

void h(int,int,int);
void h(char,int);
int m() {
 f(&g); // error: ambiguous
 f(&h); // OK: void h(char,int) is a unique match
 f(&foo); // error: type deduction fails because foo is a template
}

```

— end example]

- 20 A template *type-parameter* cannot be deduced from the type of a function default argument. [Example:

```

template <class T> void f(T = 5, T = 7);
void g() {
 f(1); // OK: call f<int>(1,7)
 f(); // error: cannot deduce T
 f<int>(); // OK: call f<int>(5,7)
}

```

— end example]

- 21 The *template-argument* corresponding to a template *template-parameter* is deduced from the type of the *template-argument* of a class template specialization used in the argument list of a function call. [Example:

<sup>144</sup> Although the *template-argument* corresponding to a *template-parameter* of type `bool` may be deduced from an array bound, the resulting value will always be `true` because the array bound will be nonzero.

```

template <template <class T> class X> struct A { };
template <template <class T> class X> void f(A<X>) { }
template<class T> struct B { };
A ab;
f(ab); // calls f(A)

```

— end example]

- <sup>22</sup> [Note: Template argument deduction involving parameter packs (17.6.3) can deduce zero or more arguments for each parameter pack. — end note] [Example:

```

template<class> struct X { };
template<class R, class ... ArgTypes> struct X<R(int, ArgTypes ...)> { };
template<class ... Types> struct Y { };
template<class T, class ... Types> struct Y<T, Types& ...> { };

template<class ... Types> int f(void (*)(Types ...));
void g(int, float);

X<int> x1; // uses primary template
X<int(int, float, double)> x2; // uses partial specialization; ArgTypes contains float, double
X<int(float, int)> x3; // uses primary template
Y<> y1; // use primary template; Types is empty
Y<int&, float&, double&> y2; // uses partial specialization; T is int&, Types contains float, double
Y<int, float, double> y3; // uses primary template; Types contains int, float, double
int fv = f(g); // OK; Types contains int, float

```

— end example]

### 17.9.2.6 Deducing template arguments from a function declaration [temp.deduct.decl]

- <sup>1</sup> In a declaration whose *declarator-id* refers to a specialization of a function template, template argument deduction is performed to identify the specialization to which the declaration refers. Specifically, this is done for explicit instantiations (17.8.2), explicit specializations (17.8.3), and certain friend declarations (17.6.4). This is also done to determine whether a deallocation function template specialization matches a placement operator `new` (6.6.4.4.2, 8.5.2.4). In all these cases, P is the type of the function template being considered as a potential match and A is either the function type from the declaration or the type of the deallocation function that would match the placement operator `new` as described in 8.5.2.4. The deduction is done as described in 17.9.2.5.
- <sup>2</sup> If, for the set of function templates so considered, there is either no match or more than one match after partial ordering has been considered (17.6.6.2), deduction fails and, in the declaration cases, the program is ill-formed.

### 17.9.3 Overload resolution [temp.over]

- <sup>1</sup> When a call to the name of a function or function template is written (explicitly, or implicitly using the operator notation), template argument deduction (17.9.2) and checking of any explicit template arguments (17.3) are performed for each function template to find the template argument values (if any) that can be used with that function template to instantiate a function template specialization that can be invoked with the call arguments. For each function template, if the argument deduction and checking succeeds, the *template-arguments* (deduced and/or explicit) are used to synthesize the declaration of a single function template specialization which is added to the candidate functions set to be used in overload resolution. If, for a given function template, argument deduction fails or the synthesized function template specialization would be ill-formed, no such function is added to the set of candidate functions for that template. The complete set of candidate functions includes all the synthesized declarations and all of the non-template overloaded functions of the same name. The synthesized declarations are treated like any other functions in the remainder of overload resolution, except as explicitly noted in 16.3.3.<sup>145</sup>
- <sup>2</sup> [Example:

```

template<class T> T max(T a, T b) { return a>b?a:b; }

```

<sup>145</sup> The parameters of function template specializations contain no template parameter types. The set of conversions allowed on deduced arguments is limited, because the argument deduction process produces function templates with parameters that either match the call arguments exactly or differ only in ways that can be bridged by the allowed limited conversions. Non-deduced arguments allow the full range of conversions. Note also that 16.3.3 specifies that a non-template function will be given preference over a template specialization if the two functions are otherwise equally good candidates for an overload match.

```
void f(int a, int b, char c, char d) {
 int m1 = max(a,b); // max(int a, int b)
 char m2 = max(c,d); // max(char a, char b)
 int m3 = max(a,c); // error: cannot generate max(int, char)
}
```

Adding the non-template function

```
int max(int,int);
```

to the example above would resolve the third call, by providing a function that could be called for `max(a,c)` after using the standard conversion of `char` to `int` for `c`. — *end example*]

- 3 [Example: Here is an example involving conversions on a function argument involved in *template-argument* deduction:

```
template<class T> struct B { /* ... */ };
template<class T> struct D : public B<T> { /* ... */ };
template<class T> void f(B<T>&);

void g(B<int>& bi, D<int>& di) {
 f(bi); // f(bi)
 f(di); // f((B<int>&)di)
}
```

— *end example*]

- 4 [Example: Here is an example involving conversions on a function argument not involved in *template-parameter* deduction:

```
template<class T> void f(T*,int); // #1
template<class T> void f(T,char); // #2

void h(int* pi, int i, char c) {
 f(pi,i); // #1: f<int>(pi,i)
 f(pi,c); // #2: f<int*>(pi,c)

 f(i,c); // #2: f<int>(i,c);
 f(i,i); // #2: f<int>(i,char(i))
}
```

— *end example*]

- 5 Only the signature of a function template specialization is needed to enter the specialization in a set of candidate functions. Therefore only the function template declaration is needed to resolve a call for which a template specialization is a candidate. [Example:

```
template<class T> void f(T); // declaration

void g() {
 f("Annemarie"); // call of f<const char*>
}
```

The call of `f` is well-formed even if the template `f` is only declared and not defined at the point of the call. The program will be ill-formed unless a specialization for `f<const char*>`, either implicitly or explicitly generated, is present in some translation unit. — *end example*]

## 17.10 Deduction guides

[temp.deduct.guide]

- 1 Deduction guides are used when a *template-name* appears as a type specifier for a deduced class type (10.1.7.5). Deduction guides are not found by name lookup. Instead, when performing class template argument deduction (16.3.1.8), any deduction guides declared for the class template are considered.

*deduction-guide:*

```
explicitopt template-name (parameter-declaration-clause) -> simple-template-id ;
```

- 2 [Example:

```
template<class T, class D = int>
struct S {
 T data;
};
```

```

template<class U>
S(U) -> S<typename U::type>;

struct A {
 using type = short;
 operator type();
};
S x{A}; // x is of type S<short, int>

```

— end example]

- <sup>3</sup> The same restrictions apply to the *parameter-declaration-clause* of a deduction guide as in a function declaration (11.3.5). The *simple-template-id* shall name a class template specialization. The *template-name* shall be the same *identifier* as the *template-name* of the *simple-template-id*. A *deduction-guide* shall be declared in the same scope as the corresponding class template and, for a member class template, with the same access. Two deduction guide declarations in the same translation unit for the same class template shall not have equivalent *parameter-declaration-clauses*.

# 18 Exception handling [except]

- <sup>1</sup> Exception handling provides a way of transferring control and information from a point in the execution of a thread to an exception handler associated with a point previously passed by the execution. A handler will be invoked only by throwing an exception in code executed in the handler's try block or in functions called from the handler's try block.

```

try-block:
 try compound-statement handler-seq

function-try-block:
 try ctor-initializeropt compound-statement handler-seq

handler-seq:
 handler handler-seqopt

handler:
 catch (exception-declaration) compound-statement

exception-declaration:
 attribute-specifier-seqopt type-specifier-seq declarator
 attribute-specifier-seqopt type-specifier-seq abstract-declaratoropt
 ...

```

The optional *attribute-specifier-seq* in an *exception-declaration* appertains to the parameter of the catch clause (18.3).

- <sup>2</sup> A *try-block* is a *statement* (Clause 9). [Note: Within this Clause “try block” is taken to mean both *try-block* and *function-try-block*. — end note]
- <sup>3</sup> A **goto** or **switch** statement shall not be used to transfer control into a try block or into a handler. [Example:

```

void f() {
 goto 11; // ill-formed
 goto 12; // ill-formed
 try {
 goto 11; // OK
 goto 12; // ill-formed
 11: ;
 } catch (...) {
 12: ;
 goto 11; // ill-formed
 goto 12; // OK
 }
}

```

— end example] A **goto**, **break**, **return**, or **continue** statement can be used to transfer control out of a try block or handler. When this happens, each variable declared in the try block will be destroyed in the context that directly contains its declaration. [Example:

```

lab: try {
 T1 t1;
 try {
 T2 t2;
 if (condition)
 goto lab;
 } catch(...) { /* handler 2 */ }
} catch(...) { /* handler 1 */ }

```

Here, executing **goto lab;** will destroy first **t2**, then **t1**, assuming the *condition* does not declare a variable. Any exception thrown while destroying **t2** will result in executing **handler 2**; any exception thrown while destroying **t1** will result in executing **handler 1**. — end example]

- <sup>4</sup> A *function-try-block* associates a *handler-seq* with the *ctor-initializer*, if present, and the *compound-statement*. An exception thrown during the execution of the *compound-statement* or, for constructors and destructors, during the initialization or destruction, respectively, of the class's subobjects, transfers control to a handler

in a *function-try-block* in the same way as an exception thrown during the execution of a *try-block* transfers control to other handlers. [Example:

```
int f(int);
class C {
 int i;
 double d;
public:
 C(int, double);
};

C::C(int ii, double id)
try : i(f(ii)), d(id) {
 // constructor statements
} catch (...) {
 // handles exceptions thrown from the ctor-initializer and from the constructor statements
}
```

— end example]

- <sup>5</sup> In this Clause, “before” and “after” refer to the “sequenced before” relation (6.8.1).

## 18.1 Throwing an exception

[except.throw]

- <sup>1</sup> Throwing an exception transfers control to a handler. [Note: An exception can be thrown from one of the following contexts: *throw-expressions* (8.5.17), allocation functions (6.6.4.4.1), `dynamic_cast` (8.5.1.7), `typeid` (8.5.1.8), *new-expressions* (8.5.2.4), and standard library functions (20.4.1.4). — end note] An object is passed and the type of that object determines which handlers can catch it. [Example:

```
throw "Help!";
```

can be caught by a *handler* of `const char*` type:

```
try {
 // ...
} catch(const char* p) {
 // handle character string exceptions here
}
```

and

```
class Overflow {
public:
 Overflow(char, double, double);
};

void f(double x) {
 throw Overflow('+', x, 3.45e107);
}
```

can be caught by a handler for exceptions of type `Overflow`:

```
try {
 f(1.2);
} catch(Overflow& oo) {
 // handle exceptions of type Overflow here
}
```

— end example]

- <sup>2</sup> When an exception is thrown, control is transferred to the nearest handler with a matching type (18.3); “nearest” means the handler for which the *compound-statement* or *ctor-initializer* following the `try` keyword was most recently entered by the thread of control and not yet exited.
- <sup>3</sup> Throwing an exception copy-initializes (11.6, 15.8) a temporary object, called the *exception object*. An lvalue denoting the temporary is used to initialize the variable declared in the matching *handler* (18.3). If the type of the exception object would be an incomplete type, an abstract class type (13.4), or a pointer to an incomplete type other than *cv void* the program is ill-formed.

4 The memory for the exception object is allocated in an unspecified way, except as noted in 6.6.4.4.1. If a handler exits by rethrowing, control is passed to another handler for the same exception object. The points of potential destruction for the exception object are:

- (4.1) — when an active handler for the exception exits by any means other than rethrowing, immediately after the destruction of the object (if any) declared in the *exception-declaration* in the handler;
- (4.2) — when an object of type `std::exception_ptr` (21.9.6) that refers to the exception object is destroyed, before the destructor of `std::exception_ptr` returns.

Among all points of potential destruction for the exception object, there is an unspecified last one where the exception object is destroyed. All other points happen before that last one (6.8.2.1). [Note: No other thread synchronization is implied in exception handling. — *end note*] The implementation may then deallocate the memory for the exception object; any such deallocation is done in an unspecified way. [Note: A thrown exception does not propagate to other threads unless caught, stored, and rethrown using appropriate library functions; see 21.9.6 and 34.6. — *end note*]

- 5 When the thrown object is a class object, the constructor selected for the copy-initialization as well as the constructor selected for a copy-initialization considering the thrown object as an lvalue shall be non-deleted and accessible, even if the copy/move operation is elided (15.8). The destructor is potentially invoked (15.4).
- 6 An exception is considered caught when a handler for that exception becomes active (18.3). [Note: An exception can have active handlers and still be considered uncaught if it is rethrown. — *end note*]
- 7 If the exception handling mechanism handling an uncaught exception (18.5.2) directly invokes a function that exits via an exception, the function `std::terminate` is called (18.5.1). [Example:

```

struct C {
 C() { }
 C(const C&) {
 if (std::uncaught_exceptions()) {
 throw 0; // throw during copy to handler's exception-declaration object (18.3)
 }
 }
};

int main() {
 try {
 throw C(); // calls std::terminate if construction of the handler's
 // exception-declaration object is not elided (15.8)
 } catch(C) { }
}

```

— *end example*] [Note: Consequently, destructors should generally catch exceptions and not let them propagate. — *end note*]

## 18.2 Constructors and destructors

[**except.ctor**]

- 1 As control passes from the point where an exception is thrown to a handler, destructors are invoked by a process, specified in this subclause, called *stack unwinding*.
- 2 The destructor is invoked for each automatic object of class type constructed, but not yet destroyed, since the try block was entered. If an exception is thrown during the destruction of temporaries or local variables for a `return` statement (9.6.3), the destructor for the returned object (if any) is also invoked. The objects are destroyed in the reverse order of the completion of their construction. [Example:

```

struct A { };

struct Y { ~Y() noexcept(false) { throw 0; } };

A f() {
 try {
 A a;
 Y y;
 A b;
 return {}; // #1
 } catch (...) {
 }
}

```

```

 return {}; // #2
}

```

At #1, the returned object of type A is constructed. Then, the local variable `b` is destroyed (9.6). Next, the local variable `y` is destroyed, causing stack unwinding, resulting in the destruction of the returned object, followed by the destruction of the local variable `a`. Finally, the returned object is constructed again at #2. — *end example*]

- 3 If the initialization or destruction of an object other than by delegating constructor is terminated by an exception, the destructor is invoked for each of the object’s direct subobjects and, for a complete object, virtual base class subobjects, whose initialization has completed (11.6) and whose destructor has not yet begun execution, except that in the case of destruction, the variant members of a union-like class are not destroyed. The subobjects are destroyed in the reverse order of the completion of their construction. Such destruction is sequenced before entering a handler of the *function-try-block* of the constructor or destructor, if any.
- 4 If the *compound-statement* of the *function-body* of a delegating constructor for an object exits via an exception, the object’s destructor is invoked. Such destruction is sequenced before entering a handler of the *function-try-block* of a delegating constructor for that object, if any.
- 5 [Note: If the object was allocated by a *new-expression* (8.5.2.4), the matching deallocation function (6.6.4.4.2), if any, is called to free the storage occupied by the object. — *end note*]

### 18.3 Handling an exception

[**except.handle**]

- 1 The *exception-declaration* in a *handler* describes the type(s) of exceptions that can cause that *handler* to be entered. The *exception-declaration* shall not denote an incomplete type, an abstract class type, or an rvalue reference type. The *exception-declaration* shall not denote a pointer or reference to an incomplete type, other than `void*`, `const void*`, `volatile void*`, or `const volatile void*`.
- 2 A handler of type “array of T” or function type T is adjusted to be of type “pointer to T”.
- 3 A *handler* is a match for an exception object of type E if
  - (3.1) — The *handler* is of type `cv T` or `cv T&` and E and T are the same type (ignoring the top-level *cv-qualifiers*), or
  - (3.2) — the *handler* is of type `cv T` or `cv T&` and T is an unambiguous public base class of E, or
  - (3.3) — the *handler* is of type `cv T` or `const T&` where T is a pointer or pointer-to-member type and E is a pointer or pointer-to-member type that can be converted to T by one or more of
    - (3.3.1) — a standard pointer conversion (7.11) not involving conversions to pointers to private or protected or ambiguous classes
    - (3.3.2) — a function pointer conversion (7.13)
    - (3.3.3) — a qualification conversion (7.5), or
  - (3.4) — the *handler* is of type `cv T` or `const T&` where T is a pointer or pointer-to-member type and E is `std::nullptr_t`.

[Note: A *throw-expression* whose operand is an integer literal with value zero does not match a handler of pointer or pointer-to-member type. A handler of reference to array or function type is never a match for any exception object (8.5.17). — *end note*]

[Example:

```

class Matherr { /* ... */ virtual void vf(); };
class Overflow: public Matherr { /* ... */ };
class Underflow: public Matherr { /* ... */ };
class Zerodivide: public Matherr { /* ... */ };

void f() {
 try {
 g();
 } catch (Overflow oo) {
 // ...
 } catch (Matherr mm) {
 // ...
 }
}

```



```
 }
```

Here, the `Overflow` handler will catch exceptions of type `Overflow` and the `Matherr` handler will catch exceptions of type `Matherr` and of all types publicly derived from `Matherr` including exceptions of type `Underflow` and `Zerodivide`. — *end example*]

- 4 The handlers for a try block are tried in order of appearance. [*Note*: This makes it possible to write handlers that can never be executed, for example by placing a handler for a final derived class after a handler for a corresponding unambiguous public base class. — *end note*]
- 5 A `...` in a handler's *exception-declaration* functions similarly to `...` in a function parameter declaration; it specifies a match for any exception. If present, a `...` handler shall be the last handler for its try block.
- 6 If no match is found among the handlers for a try block, the search for a matching handler continues in a dynamically surrounding try block of the same thread.
- 7 A handler is considered *active* when initialization is complete for the parameter (if any) of the catch clause. [*Note*: The stack will have been unwound at that point. — *end note*] Also, an implicit handler is considered active when the function `std::terminate` is entered due to a throw. A handler is no longer considered active when the catch clause exits.
- 8 The exception with the most recently activated handler that is still active is called the *currently handled exception*.
- 9 If no matching handler is found, the function `std::terminate` is called; whether or not the stack is unwound before this call to `std::terminate` is implementation-defined (18.5.1).
- 10 Referring to any non-static member or base class of an object in the handler for a *function-try-block* of a constructor or destructor for that object results in undefined behavior.
- 11 The scope and lifetime of the parameters of a function or constructor extend into the handlers of a *function-try-block*.
- 12 Exceptions thrown in destructors of objects with static storage duration or in constructors of namespace-scope objects with static storage duration are not caught by a *function-try-block* on the `main` function (6.8.3.1). Exceptions thrown in destructors of objects with thread storage duration or in constructors of namespace-scope objects with thread storage duration are not caught by a *function-try-block* on the initial function of the thread.
- 13 If a `return` statement (9.6.3) appears in a handler of the *function-try-block* of a constructor, the program is ill-formed.
- 14 The currently handled exception is rethrown if control reaches the end of a handler of the *function-try-block* of a constructor or destructor. Otherwise, flowing off the end of the *compound-statement* of a handler of a *function-try-block* is equivalent to flowing off the end of the *compound-statement* of that function (see 9.6.3).
- 15 The variable declared by the *exception-declaration*, of type *cv T* or *cv T&*, is initialized from the exception object, of type *E*, as follows:
  - (15.1) — if *T* is a base class of *E*, the variable is copy-initialized (11.6) from the corresponding base class subobject of the exception object;
  - (15.2) — otherwise, the variable is copy-initialized (11.6) from the exception object.

The lifetime of the variable ends when the handler exits, after the destruction of any automatic objects initialized within the handler.

- 16 When the handler declares an object, any changes to that object will not affect the exception object. When the handler declares a reference to an object, any changes to the referenced object are changes to the exception object and will have effect should that object be rethrown.

## 18.4 Exception specifications

[**except.spec**]

- 1 The predicate indicating whether a function cannot exit via an exception is called the *exception specification* of the function. If the predicate is false, the function has a *potentially-throwing exception specification*, otherwise it has a *non-throwing exception specification*. The exception specification is either defined implicitly, or defined explicitly by using a *noexcept-specifier* as a suffix of a function declarator (11.3.5).

```

noexcept-specifier:
 noexcept (constant-expression)
 noexcept

```

- <sup>2</sup> In a *noexcept-specifier*, the *constant-expression*, if supplied, shall be a contextually converted constant expression of type `bool` (8.6); that constant expression is the exception specification of the function type in which the *noexcept-specifier* appears. A `(` token that follows `noexcept` is part of the *noexcept-specifier* and does not commence an initializer (11.6). The *noexcept-specifier* `noexcept` without a *constant-expression* is equivalent to the *noexcept-specifier* `noexcept(true)`.
- <sup>3</sup> If a declaration of a function does not have a *noexcept-specifier*, the declaration has a potentially throwing exception specification unless it is a destructor or a deallocation function or is defaulted on its first declaration, in which cases the exception specification is as specified below and no other declaration for that function shall have a *noexcept-specifier*. In an explicit instantiation (17.8.2) a *noexcept-specifier* may be specified, but is not required. If a *noexcept-specifier* is specified in an explicit instantiation directive, the exception specification shall be the same as the exception specification of all other declarations of that function. A diagnostic is required only if the exception specifications are not the same within a single translation unit.
- <sup>4</sup> If a virtual function has a non-throwing exception specification, all declarations, including the definition, of any function that overrides that virtual function in any derived class shall have a non-throwing exception specification, unless the overriding function is defined as deleted. [Example:

```

struct B {
 virtual void f() noexcept;
 virtual void g();
 virtual void h() noexcept = delete;
};

struct D: B {
 void f(); // ill-formed
 void g() noexcept; // OK
 void h() = delete; // OK
};

```

The declaration of `D::f` is ill-formed because it has a potentially-throwing exception specification, whereas `B::f` has a non-throwing exception specification. — end example]

- <sup>5</sup> Whenever an exception is thrown and the search for a handler (18.3) encounters the outermost block of a function with a non-throwing exception specification, the function `std::terminate` is called (18.5.1). [Note: An implementation shall not reject an expression merely because, when executed, it throws or might throw an exception from a function with a non-throwing exception specification. — end note] [Example:

```

extern void f(); // potentially-throwing

void g() noexcept {
 f(); // valid, even if f throws
 throw 42; // valid, effectively a call to std::terminate
}

```

The call to `f` is well-formed even though, when called, `f` might throw an exception. — end example]

- <sup>6</sup> An expression `e` is *potentially-throwing* if

- (6.1) — `e` is a function call (8.5.1.2) whose *postfix-expression* has a function type, or a pointer-to-function type, with a potentially-throwing exception specification, or
- (6.2) — `e` implicitly invokes a function (such as an overloaded operator, an allocation function in a *new-expression*, a constructor for a function argument, or a destructor if `e` is a full-expression (6.8.1)) that is potentially-throwing, or
- (6.3) — `e` is a *throw-expression* (8.5.17), or
- (6.4) — `e` is a `dynamic_cast` expression that casts to a reference type and requires a runtime check (8.5.1.7), or
- (6.5) — `e` is a `typeid` expression applied to a (possibly parenthesized) built-in unary `*` operator applied to a pointer to a polymorphic class type (8.5.1.8), or
- (6.6) — any of the immediate subexpressions (6.8.1) of `e` is potentially-throwing.

7 An implicitly-declared constructor for a class **X**, or a constructor without a *noexcept-specifier* that is defaulted on its first declaration, has a potentially-throwing exception specification if and only if any of the following constructs is potentially-throwing:

- (7.1) — a constructor selected by overload resolution in the implicit definition of the constructor for class **X** to initialize a potentially constructed subobject, or
- (7.2) — a subexpression of such an initialization, such as a default argument expression, or,
- (7.3) — for a default constructor, a default member initializer.

[*Note:* Even though destructors for fully-constructed subobjects are invoked when an exception is thrown during the execution of a constructor (18.2), their exception specifications do not contribute to the exception specification of the constructor, because an exception thrown from such a destructor would call the function `std::terminate` rather than escape the constructor (18.1, 18.5.1). — *end note*]

- 8 The exception specification for an implicitly-declared destructor, or a destructor without a *noexcept-specifier*, is potentially-throwing if and only if any of the destructors for any of its potentially constructed subobjects is potentially throwing.
- 9 The exception specification for an implicitly-declared assignment operator, or an assignment-operator without a *noexcept-specifier* that is defaulted on its first declaration, is potentially-throwing if and only if the invocation of any assignment operator in the implicit definition is potentially-throwing.
- 10 A deallocation function (6.6.4.4.2) with no explicit *noexcept-specifier* has a non-throwing exception specification.
- 11 The exception specification for a comparison operator (8.5.8, 8.5.9, 8.5.10) without a *noexcept-specifier* that is defaulted on its first declaration is potentially-throwing if and only if the invocation of any comparison operator in the implicit definition is potentially-throwing.

12 [*Example:*

```
struct A {
 A(int = A(5), 0) noexcept;
 A(const A&) noexcept;
 A(A&&) noexcept;
 ~A();
};
struct B {
 B() noexcept;
 B(const B&) = default; // implicit exception specification is noexcept(true)
 B(B&&, int = (throw Y(), 0)) noexcept;
 ~B() noexcept(false);
};
int n = 7;
struct D : public A, public B {
 int * p = new int[n];
 // D::D() potentially-throwing, as the new operator may throw bad_alloc or bad_array_new_length
 // D::D(const D&) non-throwing
 // D::D(D&&) potentially-throwing, as the default argument for B's constructor may throw
 // D::~~D() potentially-throwing
};
```

Furthermore, if `A::~~A()` were virtual, the program would be ill-formed since a function that overrides a virtual function from a base class shall not have a potentially-throwing exception specification if the base class function has a non-throwing exception specification. — *end example*]

13 An exception specification is considered to be *needed* when:

- (13.1) — in an expression, the function is the unique lookup result or the selected member of a set of overloaded functions (6.4, 16.3, 16.4);
- (13.2) — the function is odr-used (6.2) or, if it appears in an unevaluated operand, would be odr-used if the expression were potentially-evaluated;
- (13.3) — the exception specification is compared to that of another declaration (e.g., an explicit specialization or an overriding virtual function);
- (13.4) — the function is defined; or

- (13.5) — the exception specification is needed for a defaulted special member function that calls the function. [Note: A defaulted declaration does not require the exception specification of a base member function to be evaluated until the implicit exception specification of the derived function is needed, but an explicit *noexcept-specifier* needs the implicit exception specification to compare against. — end note]

The exception specification of a defaulted special member function is evaluated as described above only when needed; similarly, the *noexcept-specifier* of a specialization of a function template or member function of a class template is instantiated only when needed.

## 18.5 Special functions [except.special]

- <sup>1</sup> The function `std::terminate` (18.5.1) is used by the exception handling mechanism for coping with errors related to the exception handling mechanism itself. The function `std::current_exception()` (21.9.6) and the class `std::nested_exception` (21.9.7) can be used by a program to capture the currently handled exception.

### 18.5.1 The `std::terminate` function [except.terminate]

- <sup>1</sup> In some situations exception handling must be abandoned for less subtle error handling techniques. [Note: These situations are:
- (1.1) — when the exception handling mechanism, after completing the initialization of the exception object but before activation of a handler for the exception (18.1), calls a function that exits via an exception, or
  - (1.2) — when the exception handling mechanism cannot find a handler for a thrown exception (18.3), or
  - (1.3) — when the search for a handler (18.3) encounters the outermost block of a function with a non-throwing exception specification (18.4), or
  - (1.4) — when the destruction of an object during stack unwinding (18.2) terminates by throwing an exception, or
  - (1.5) — when initialization of a non-local variable with static or thread storage duration (6.8.3.3) exits via an exception, or
  - (1.6) — when destruction of an object with static or thread storage duration exits via an exception (6.8.3.4), or
  - (1.7) — when execution of a function registered with `std::atexit` or `std::at_quick_exit` exits via an exception (21.5), or
  - (1.8) — when evaluation of the predicate of a contract (10.6.4) exits via an exception, or
  - (1.9) — when the violation handler invoked for a failed contract condition check (10.6.4) on a `noexcept` function exits via an exception, or
  - (1.10) — when the violation handler has completed after a failed contract check and the continuation mode is *off*, or
  - (1.11) — when a *throw-expression* (8.5.17) with no operand attempts to rethrow an exception and no exception is being handled (18.1), or
  - (1.12) — when the function `std::nested_exception::rethrow_nested` is called for an object that has captured no exception (21.9.7), or
  - (1.13) — when execution of the initial function of a thread exits via an exception (34.3.2.2), or
  - (1.14) — for a parallel algorithm whose `ExecutionPolicy` specifies such behavior (24.19.4, 24.19.5, 24.19.6), when execution of an element access function (29.4.1) of the parallel algorithm exits via an exception (29.4.4), or
  - (1.15) — when the destructor or the copy assignment operator is invoked on an object of type `std::thread` that refers to a joinable thread (34.3.2.3, 34.3.2.4), or
  - (1.16) — when a call to a `wait()`, `wait_until()`, or `wait_for()` function on a condition variable (34.5.3, 34.5.4) fails to meet a postcondition.
- end note]
- <sup>2</sup> In such cases, the function `std::terminate` is called (21.9.4). In the situation where no matching handler is found, it is implementation-defined whether or not the stack is unwound before `std::terminate` is called. In the situation where the search for a handler (18.3) encounters the outermost block of a function with a non-throwing exception specification (18.4), it is implementation-defined whether the stack is unwound,

unwound partially, or not unwound at all before the function `std::terminate` is called. In all other situations, the stack shall not be unwound before the function `std::terminate` is called. An implementation is not permitted to finish stack unwinding prematurely based on a determination that the unwind process will eventually cause a call to the function `std::terminate`.

### 18.5.2 The `std::uncaught_exceptions()` function [except.uncaught]

- <sup>1</sup> An exception is considered uncaught after completing the initialization of the exception object (18.1) until completing the activation of a handler for the exception (18.3). This includes stack unwinding. If an exception is rethrown (8.5.17, 21.9.6), it is considered uncaught from the point of rethrow until the rethrown exception is caught. The function `std::uncaught_exceptions()` (21.9.5) returns the number of uncaught exceptions in the current thread.

# 19 Preprocessing directives [cpp]

- <sup>1</sup> A *preprocessing directive* consists of a sequence of preprocessing tokens that satisfies the following constraints: The first token in the sequence is a # preprocessing token that (at the start of translation phase 4) is either the first character in the source file (optionally after white space containing no new-line characters) or that follows white space containing at least one new-line character. The last token in the sequence is the first new-line character that follows the first token in the sequence.<sup>146</sup> A new-line character ends the preprocessing directive even if it occurs within what would otherwise be an invocation of a function-like macro.

*preprocessing-file:*

*group<sub>opt</sub>*

*group:*

*group-part*

*group group-part*

*group-part:*

*control-line*

*if-section*

*text-line*

# *conditionally-supported-directive*

*control-line:*

# **include** *pp-tokens new-line*

# **define** *identifier replacement-list new-line*

# **define** *identifier lparen identifier-list<sub>opt</sub> ) replacement-list new-line*

# **define** *identifier lparen ... ) replacement-list new-line*

# **define** *identifier lparen identifier-list , ... ) replacement-list new-line*

# **undef** *identifier new-line*

# **line** *pp-tokens new-line*

# **error** *pp-tokens<sub>opt</sub> new-line*

# **pragma** *pp-tokens<sub>opt</sub> new-line*

# *new-line*

*if-section:*

*if-group elif-groups<sub>opt</sub> else-group<sub>opt</sub> endif-line*

*if-group:*

# **if** *constant-expression new-line group<sub>opt</sub>*

# **ifdef** *identifier new-line group<sub>opt</sub>*

# **ifndef** *identifier new-line group<sub>opt</sub>*

*elif-groups:*

*elif-group*

*elif-groups elif-group*

*elif-group:*

# **elif** *constant-expression new-line group<sub>opt</sub>*

*else-group:*

# **else** *new-line group<sub>opt</sub>*

*endif-line:*

# **endif** *new-line*

*text-line:*

*pp-tokens<sub>opt</sub> new-line*

*conditionally-supported-directive:*

*pp-tokens new-line*

*lparen:*

a ( character not immediately preceded by white-space

---

146) Thus, preprocessing directives are commonly called “lines”. These “lines” have no other syntactic significance, as all white space is equivalent except in certain situations during preprocessing (see the # character string literal creation operator in 19.3.2, for example).

*identifier-list*:  
*identifier*  
*identifier-list* , *identifier*

*replacement-list*:  
*pp-tokens*<sub>opt</sub>

*pp-tokens*:  
*preprocessing-token*  
*pp-tokens preprocessing-token*

*new-line*:  
the new-line character

- 2 A text line shall not begin with a # preprocessing token. A *conditionally-supported-directive* shall not begin with any of the directive names appearing in the syntax. A *conditionally-supported-directive* is conditionally-supported with implementation-defined semantics.
- 3 When in a group that is skipped (19.1), the directive syntax is relaxed to allow any sequence of preprocessing tokens to occur between the directive name and the following new-line character.
- 4 The only white-space characters that shall appear between preprocessing tokens within a preprocessing directive (from just after the introducing # preprocessing token through just before the terminating new-line character) are space and horizontal-tab (including spaces that have replaced comments or possibly other white-space characters in translation phase 3).
- 5 The implementation can process and skip sections of source files conditionally, include other source files, and replace macros. These capabilities are called *preprocessing*, because conceptually they occur before translation of the resulting translation unit.
- 6 The preprocessing tokens within a preprocessing directive are not subject to macro expansion unless otherwise stated.

[*Example*: In:

```
#define EMPTY
EMPTY # include <file.h>
```

the sequence of preprocessing tokens on the second line is *not* a preprocessing directive, because it does not begin with a # at the start of translation phase 4, even though it will do so after the macro `EMPTY` has been replaced. — *end example*]

## 19.1 Conditional inclusion

[`cpp.cond`]

*defined-macro-expression*:  
**defined** *identifier*  
**defined** ( *identifier* )

*h-preprocessing-token*:  
any *preprocessing-token* other than >

*h-pp-tokens*:  
*h-preprocessing-token*  
*h-pp-tokens h-preprocessing-token*

*has-include-expression*:  
**\_\_has\_include** ( < *h-char-sequence* > )  
**\_\_has\_include** ( " *q-char-sequence* " )  
**\_\_has\_include** ( *string-literal* )  
**\_\_has\_include** ( < *h-pp-tokens* > )

*has-attribute-expression*:  
**\_\_has\_cpp\_attribute** ( *pp-tokens* )

- 1 The expression that controls conditional inclusion shall be an integral constant expression except that identifiers (including those lexically identical to keywords) are interpreted as described below<sup>147</sup> and it may contain zero or more *defined-macro-expressions* and/or *has-include-expressions* and/or *has-attribute-expressions* as unary operator expressions.

---

<sup>147</sup> Because the controlling constant expression is evaluated during translation phase 4, all identifiers either are or are not macro names — there simply are no keywords, enumeration constants, etc.

- 2 A *defined-macro-expression* evaluates to 1 if the identifier is currently defined as a macro name (that is, if it is predefined or if it has been the subject of a `#define` preprocessing directive without an intervening `#undef` directive with the same subject identifier), 0 if it is not.
- 3 The third and fourth forms of *has-include-expression* are considered only if neither of the first or second forms matches, in which case the preprocessing tokens are processed just as in normal text.
- 4 The header or source file identified by the parenthesized preprocessing token sequence in each contained *has-include-expression* is searched for as if that preprocessing token sequence were the *pp-tokens* in a `#include` directive, except that no further macro expansion is performed. If such a directive would not satisfy the syntactic requirements of a `#include` directive, the program is ill-formed. The *has-include-expression* evaluates to 1 if the search for the source file succeeds, and to 0 if the search fails.
- 5 Each *has-attribute-expression* is replaced by a non-zero *pp-number* matching the form of an *integer-literal* if the implementation supports an attribute with the name specified by interpreting the *pp-tokens* as an *attribute-token*, and by 0 otherwise. The program is ill-formed if the *pp-tokens* do not match the form of an *attribute-token*.
- 6 For an attribute specified in this document, the value of the *has-attribute-expression* is given by Table 15. For other attributes recognized by the implementation, the value is implementation-defined. [Note: It is expected that the availability of an attribute can be detected by any non-zero result. — end note]

Table 15 — `__has_cpp_attribute` values

| Attribute                       | Value   |
|---------------------------------|---------|
| <code>assert</code>             | 201806L |
| <code>carries_dependency</code> | 200809L |
| <code>deprecated</code>         | 201309L |
| <code>ensures</code>            | 201806L |
| <code>expects</code>            | 201806L |
| <code>fallthrough</code>        | 201603L |
| <code>likely</code>             | 201803L |
| <code>maybe_unused</code>       | 201603L |
| <code>no_unique_address</code>  | 201803L |
| <code>nodiscard</code>          | 201603L |
| <code>noreturn</code>           | 200809L |
| <code>unlikely</code>           | 201803L |

- 7 The `#ifdef` and `#ifndef` directives, and the `defined` conditional inclusion operator, shall treat `__has_include` and `__has_cpp_attribute` as if they were the names of defined macros. The identifiers `__has_include` and `__has_cpp_attribute` shall not appear in any context not mentioned in this subclass.
- 8 Each preprocessing token that remains (in the list of preprocessing tokens that will become the controlling expression) after all macro replacements have occurred shall be in the lexical form of a token (5.6).
- 9 Preprocessing directives of the forms
 

```
if constant-expression new-line groupopt
elif constant-expression new-line groupopt
```

 check whether the controlling constant expression evaluates to nonzero.
- 10 Prior to evaluation, macro invocations in the list of preprocessing tokens that will become the controlling constant expression are replaced (except for those macro names modified by the `defined` unary operator), just as in normal text. If the token `defined` is generated as a result of this replacement process or use of the `defined` unary operator does not match one of the two specified forms prior to macro replacement, the behavior is undefined.
- 11 After all replacements due to macro expansion and evaluations of *defined-macro-expressions* and *has-include-expressions* have been performed, all remaining identifiers and keywords, except for `true` and `false`, are replaced with the *pp-number* 0, and then each preprocessing token is converted into a token. [Note: An alternative token (5.5) is not an identifier, even when its spelling consists entirely of letters and underscores. Therefore it is not subject to this replacement. — end note]
- 12 The resulting tokens comprise the controlling constant expression which is evaluated according to the rules of 8.6 using arithmetic that has at least the ranges specified in 21.3. For the purposes of this token



conversion and evaluation all signed and unsigned integer types act as if they have the same representation as, respectively, `intmax_t` or `uintmax_t` (21.4). [Note: Thus on an implementation where `std::numeric_limits<int>::max()` is `0x7FFF` and `std::numeric_limits<unsigned int>::max()` is `0xFFFF`, the integer literal `0x8000` is signed and positive within a `#if` expression even though it is unsigned in translation phase 7 (5.2). — end note] This includes interpreting character literals, which may involve converting escape sequences into execution character set members. Whether the numeric value for these character literals matches the value obtained when an identical character literal occurs in an expression (other than within a `#if` or `#elif` directive) is implementation-defined. [Note: Thus, the constant expression in the following `#if` directive and `if` statement (9.4.1) is not guaranteed to evaluate to the same value in these two contexts:

```
#if 'z' - 'a' == 25
if ('z' - 'a' == 25)
```

— end note] Also, whether a single-character character literal may have a negative value is implementation-defined. Each subexpression with type `bool` is subjected to integral promotion before processing continues.

- 13 Preprocessing directives of the forms

```
ifdef identifier new-line groupopt
ifndef identifier new-line groupopt
```

check whether the identifier is or is not currently defined as a macro name. Their conditions are equivalent to `#if defined identifier` and `#if !defined identifier` respectively.

- 14 Each directive's condition is checked in order. If it evaluates to false (zero), the group that it controls is skipped: directives are processed only through the name that determines the directive in order to keep track of the level of nested conditionals; the rest of the directives' preprocessing tokens are ignored, as are the other preprocessing tokens in the group. Only the first group whose control condition evaluates to true (nonzero) is processed; any following groups are skipped and their controlling directives are processed as if they were in a group that is skipped. If none of the conditions evaluates to true, and there is a `#else` directive, the group controlled by the `#else` is processed; lacking a `#else` directive, all the groups until the `#endif` are skipped.<sup>148</sup>

- 15 [Example: This demonstrates a way to include a library optional facility only if it is available:

```
#if __has_include(<optional>)
include <optional>
if __cpp_lib_optional >= 201603
define have_optional 1
endif
#elif __has_include(<experimental/optional>)
include <experimental/optional>
if __cpp_lib_experimental_optional >= 201411
define have_optional 1
define experimental_optional 1
endif
#endif
#ifdef have_optional
define have_optional 0
#endif
```

— end example]

- 16 [Example: This demonstrates a way to use the attribute `[[acme::deprecated]]` only if it is available.

```
#if __has_cpp_attribute(acme::deprecated)
define ATTR_DEPRECATED(msg) [[acme::deprecated(msg)]]
#else
define ATTR_DEPRECATED(msg) [[deprecated(msg)]]
#endif
ATTR_DEPRECATED("This function is deprecated") void anvil();
```

— end example]

## 19.2 Source file inclusion

[cpp.include]

- <sup>1</sup> A `#include` directive shall identify a header or source file that can be processed by the implementation.

<sup>148</sup>) As indicated by the syntax, a preprocessing token shall not follow a `#else` or `#endif` directive before the terminating new-line character. However, comments may appear anywhere in a source file, including within a preprocessing directive.

- 2 A preprocessing directive of the form

```
include < h-char-sequence > new-line
```

searches a sequence of implementation-defined places for a header identified uniquely by the specified sequence between the < and > delimiters, and causes the replacement of that directive by the entire contents of the header. How the places are specified or the header identified is implementation-defined.

- 3 A preprocessing directive of the form

```
include " q-char-sequence " new-line
```

causes the replacement of that directive by the entire contents of the source file identified by the specified sequence between the " delimiters. The named source file is searched for in an implementation-defined manner. If this search is not supported, or if the search fails, the directive is reprocessed as if it read

```
include < h-char-sequence > new-line
```

with the identical contained sequence (including > characters, if any) from the original directive.

- 4 A preprocessing directive of the form

```
include pp-tokens new-line
```

(that does not match one of the two previous forms) is permitted. The preprocessing tokens after `include` in the directive are processed just as in normal text (i.e., each identifier currently defined as a macro name is replaced by its replacement list of preprocessing tokens). If the directive resulting after all replacements does not match one of the two previous forms, the behavior is undefined.<sup>149</sup> The method by which a sequence of preprocessing tokens between a < and a > preprocessing token pair or a pair of " characters is combined into a single header name preprocessing token is implementation-defined.

- 5 The implementation shall provide unique mappings for sequences consisting of one or more *nondigits* or *digits* (5.10) followed by a period (.) and a single *nondigit*. The first character shall not be a *digit*. The implementation may ignore distinctions of alphabetical case.

- 6 A `#include` preprocessing directive may appear in a source file that has been read because of a `#include` directive in another file, up to an implementation-defined nesting limit.

- 7 [Note: Although an implementation may provide a mechanism for making arbitrary source files available to the < > search, in general programmers should use the < > form for headers provided with the implementation, and the " " form for sources outside the control of the implementation. For instance:

```
#include <stdio.h>
#include <unistd.h>
#include "usefullib.h"
#include "myprog.h"
```

— end note]

- 8 [Example: This illustrates macro-replaced `#include` directives:

```
#if VERSION == 1
 #define INCFILE "vers1.h"
#elif VERSION == 2
 #define INCFILE "vers2.h" // and so on
#else
 #define INCFILE "versN.h"
#endif
#include INCFILE
```

— end example]

### 19.3 Macro replacement

[cpp.replace]

- 1 Two replacement lists are identical if and only if the preprocessing tokens in both have the same number, ordering, spelling, and white-space separation, where all white-space separations are considered identical.
- 2 An identifier currently defined as an object-like macro (see below) may be redefined by another `#define` preprocessing directive provided that the second definition is an object-like macro definition and the two replacement lists are identical, otherwise the program is ill-formed. Likewise, an identifier currently defined as a function-like macro (see below) may be redefined by another `#define` preprocessing directive provided that

<sup>149</sup> Note that adjacent string literals are not concatenated into a single string literal (see the translation phases in 5.2); thus, an expansion that results in two string literals is an invalid directive.

the second definition is a function-like macro definition that has the same number and spelling of parameters, and the two replacement lists are identical, otherwise the program is ill-formed.

- 3 There shall be white-space between the identifier and the replacement list in the definition of an object-like macro.
- 4 If the *identifier-list* in the macro definition does not end with an ellipsis, the number of arguments (including those arguments consisting of no preprocessing tokens) in an invocation of a function-like macro shall equal the number of parameters in the macro definition. Otherwise, there shall be at least as many arguments in the invocation as there are parameters in the macro definition (excluding the ...). There shall exist a ) preprocessing token that terminates the invocation.
- 5 The identifiers `__VA_ARGS__` and `__VA_OPT__` shall occur only in the *replacement-list* of a function-like macro that uses the ellipsis notation in the parameters.
- 6 A parameter identifier in a function-like macro shall be uniquely declared within its scope.
- 7 The identifier immediately following the `define` is called the *macro name*. There is one name space for macro names. Any white-space characters preceding or following the replacement list of preprocessing tokens are not considered part of the replacement list for either form of macro.
- 8 If a # preprocessing token, followed by an identifier, occurs lexically at the point at which a preprocessing directive could begin, the identifier is not subject to macro replacement.
- 9 A preprocessing directive of the form

```
define identifier replacement-list new-line
```

defines an *object-like macro* that causes each subsequent instance of the macro name<sup>150</sup> to be replaced by the replacement list of preprocessing tokens that constitute the remainder of the directive.<sup>151</sup> The replacement list is then rescanned for more macro names as specified below.

- 10 A preprocessing directive of the form

```
define identifier lparen identifier-listopt) replacement-list new-line
define identifier lparen ...) replacement-list new-line
define identifier lparen identifier-list , ...) replacement-list new-line
```

defines a *function-like macro* with parameters, whose use is similar syntactically to a function call. The parameters are specified by the optional list of identifiers, whose scope extends from their declaration in the identifier list until the new-line character that terminates the `#define` preprocessing directive. Each subsequent instance of the function-like macro name followed by a ( as the next preprocessing token introduces the sequence of preprocessing tokens that is replaced by the replacement list in the definition (an invocation of the macro). The replaced sequence of preprocessing tokens is terminated by the matching ) preprocessing token, skipping intervening matched pairs of left and right parenthesis preprocessing tokens. Within the sequence of preprocessing tokens making up an invocation of a function-like macro, new-line is considered a normal white-space character.

- 11 The sequence of preprocessing tokens bounded by the outside-most matching parentheses forms the list of arguments for the function-like macro. The individual arguments within the list are separated by comma preprocessing tokens, but comma preprocessing tokens between matching inner parentheses do not separate arguments. If there are sequences of preprocessing tokens within the list of arguments that would otherwise act as preprocessing directives,<sup>152</sup> the behavior is undefined.
- 12 If there is a ... immediately preceding the ) in the function-like macro definition, then the trailing arguments (if any), including any separating comma preprocessing tokens, are merged to form a single item: the *variable arguments*. The number of arguments so combined is such that, following merger, the number of arguments is either equal to or one more than the number of parameters in the macro definition (excluding the ...).

### 19.3.1 Argument substitution

[cpp.subst]

- 1 After the arguments for the invocation of a function-like macro have been identified, argument substitution takes place. For each parameter in the replacement list that is neither preceded by a # or ## preprocessing

150) Since, by macro-replacement time, all character literals and string literals are preprocessing tokens, not sequences possibly containing identifier-like subsequences (see 5.2, translation phases), they are never scanned for macro names or parameters.

151) An alternative token (5.5) is not an identifier, even when its spelling consists entirely of letters and underscores. Therefore it is not possible to define a macro whose name is the same as that of an alternative token.

152) A *conditionally-supported-directive* is a preprocessing directive regardless of whether the implementation supports it.

token nor followed by a **##** preprocessing token, the preprocessing tokens naming the parameter are replaced by a token sequence determined as follows:

- (1.1) — If the parameter is of the form `__VA_OPT__(content)`, the replacement preprocessing tokens are the preprocessing token sequence for the corresponding argument.
- (1.2) — Otherwise, the replacement preprocessing tokens are the preprocessing tokens of corresponding argument after all macros contained therein have been expanded. The argument's preprocessing tokens are completely macro replaced before being substituted as if they formed the rest of the preprocessing file with no other preprocessing tokens being available.

[Example:

```
#define LPAREN() (
#define G(Q) 42
#define F(R, X, ...) __VA_OPT__(G R X)
int x = F(LPAREN(), 0, <:-); // replaced by int x = 42;
```

— end example]

- 2 An identifier `__VA_ARGS__` that occurs in the replacement list shall be treated as if it were a parameter, and the variable arguments shall form the preprocessing tokens used to replace it.
- 3 The identifier `__VA_OPT__` shall always occur as part of the preprocessing token sequence `__VA_OPT__(content)`, where *content* is an arbitrary sequence of *preprocessing-tokens* other than `__VA_OPT__`, which is terminated by the closing `)` and skips intervening pairs of matching left and right parentheses. If *content* would be ill-formed as the replacement list of the current function-like macro, the program is ill-formed. The preprocessing token sequence `__VA_OPT__(content)` shall be treated as if it were a parameter, and the preprocessing token sequence for the corresponding argument is defined as follows. If the substitution of `__VA_ARGS__` as neither an operand of `#` nor `##` consists of no preprocessing tokens, the argument consists of a single placemaker preprocessing token (19.3.3, 19.3.4). Otherwise, the argument consists of the results of the expansion of *content* as the replacement list of the current function-like macro before removal of placemaker tokens, rescanning, and further replacement. [Note: The placemaker tokens are removed before stringization (19.3.2), and can be removed by rescanning and further replacement (19.3.4). — end note]

[Example:

```
#define F(...) f(0 __VA_OPT__(,) __VA_ARGS__)
#define G(X, ...) f(0, X __VA_OPT__(,) __VA_ARGS__)
#define SDEF(sname, ...) S sname __VA_OPT__(= { __VA_ARGS__ })
#define EMP

F(a, b, c) // replaced by f(0, a, b, c)
F() // replaced by f(0)
F(EMP) // replaced by f(0)

G(a, b, c) // replaced by f(0, a, b, c)
G(a,) // replaced by f(0, a)
G(a) // replaced by f(0, a)

SDEF(foo); // replaced by S foo;
SDEF(bar, 1, 2); // replaced by S bar = { 1, 2 };

#define H1(X, ...) X __VA_OPT__(##) __VA_ARGS__ // ill-formed: ## may not appear at
 // the beginning of a replacement list (19.3.3)

#define H2(X, Y, ...) __VA_OPT__(X ## Y,) __VA_ARGS__
H2(a, b, c, d) // replaced by ab, c, d

#define H3(X, ...) #__VA_OPT__(X##X X##X)
H3(, 0) // replaced by ""

#define H4(X, ...) __VA_OPT__(a X ## X) ## b
H4(, 1) // replaced by a b

#define H5A(...) __VA_OPT__()/**/__VA_OPT__()
#define H5B(X) a ## X ## b
#define H5C(X) H5B(X)
```

```
H5C(H5A()) // replaced by ab
— end example]
```

### 19.3.2 The # operator [cpp.stringize]

- <sup>1</sup> Each # preprocessing token in the replacement list for a function-like macro shall be followed by a parameter as the next preprocessing token in the replacement list.
- <sup>2</sup> A *character string literal* is a *string-literal* with no prefix. If, in the replacement list, a parameter is immediately preceded by a # preprocessing token, both are replaced by a single character string literal preprocessing token that contains the spelling of the preprocessing token sequence for the corresponding argument (excluding placemaker tokens). Let the *stringizing argument* be the preprocessing token sequence for the corresponding argument with placemaker tokens removed. Each occurrence of white space between the stringizing argument's preprocessing tokens becomes a single space character in the character string literal. White space before the first preprocessing token and after the last preprocessing token comprising the stringizing argument is deleted. Otherwise, the original spelling of each preprocessing token in the stringizing argument is retained in the character string literal, except for special handling for producing the spelling of string literals and character literals: a \ character is inserted before each " and \ character of a character literal or string literal (including the delimiting " characters). If the replacement that results is not a valid character string literal, the behavior is undefined. The character string literal corresponding to an empty stringizing argument is "". The order of evaluation of # and ## operators is unspecified.

### 19.3.3 The ## operator [cpp.concat]

- <sup>1</sup> A ## preprocessing token shall not occur at the beginning or at the end of a replacement list for either form of macro definition.
- <sup>2</sup> If, in the replacement list of a function-like macro, a parameter is immediately preceded or followed by a ## preprocessing token, the parameter is replaced by the corresponding argument's preprocessing token sequence; however, if an argument consists of no preprocessing tokens, the parameter is replaced by a placemaker preprocessing token instead.<sup>153</sup>
- <sup>3</sup> For both object-like and function-like macro invocations, before the replacement list is reexamined for more macro names to replace, each instance of a ## preprocessing token in the replacement list (not from an argument) is deleted and the preceding preprocessing token is concatenated with the following preprocessing token. Placemaker preprocessing tokens are handled specially: concatenation of two placemarkers results in a single placemaker preprocessing token, and concatenation of a placemaker with a non-placemaker preprocessing token results in the non-placemaker preprocessing token. If the result is not a valid preprocessing token, the behavior is undefined. The resulting token is available for further macro replacement. The order of evaluation of ## operators is unspecified.

[Example: In the following fragment:

```
#define hash_hash # ## #
#define mkstr(a) # a
#define in_between(a) mkstr(a)
#define join(c, d) in_between(c hash_hash d)
char p[] = join(x, y); // equivalent to char p[] = "x ## y";
```

The expansion produces, at various stages:

```
join(x, y)
in_between(x hash_hash y)
in_between(x ## y)
mkstr(x ## y)
"x ## y"
```

In other words, expanding `hash_hash` produces a new token, consisting of two adjacent sharp signs, but this new token is not the ## operator. — end example]

### 19.3.4 Rescanning and further replacement [cpp.rescan]

- <sup>1</sup> After all parameters in the replacement list have been substituted and # and ## processing has taken place, all placemaker preprocessing tokens are removed. Then the resulting preprocessing token sequence is rescanned, along with all subsequent preprocessing tokens of the source file, for more macro names to replace.

---

<sup>153</sup>) Placemaker preprocessing tokens do not appear in the syntax because they are temporary entities that exist only within translation phase 4.

- 2 If the name of the macro being replaced is found during this scan of the replacement list (not including the rest of the source file's preprocessing tokens), it is not replaced. Furthermore, if any nested replacements encounter the name of the macro being replaced, it is not replaced. These nonreplaced macro name preprocessing tokens are no longer available for further replacement even if they are later (re)examined in contexts in which that macro name preprocessing token would otherwise have been replaced.
- 3 The resulting completely macro-replaced preprocessing token sequence is not processed as a preprocessing directive even if it resembles one, but all pragma unary operator expressions within it are then processed as specified in 19.9 below.

### 19.3.5 Scope of macro definitions

[cpp.scope]

- 1 A macro definition lasts (independent of block structure) until a corresponding `#undef` directive is encountered or (if none is encountered) until the end of the translation unit. Macro definitions have no significance after translation phase 4.

- 2 A preprocessing directive of the form

```
undef identifier new-line
```

causes the specified identifier no longer to be defined as a macro name. It is ignored if the specified identifier is not currently defined as a macro name.

- 3 [Example: The simplest use of this facility is to define a “manifest constant”, as in

```
#define TABSIZE 100
int table[TABSIZE];
```

— end example]

- 4 [Example: The following defines a function-like macro whose value is the maximum of its arguments. It has the advantages of working for any compatible types of the arguments and of generating in-line code without the overhead of function calling. It has the disadvantages of evaluating one or the other of its arguments a second time (including side effects) and generating more code than a function if invoked several times. It also cannot have its address taken, as it has none.

```
#define max(a, b) ((a) > (b) ? (a) : (b))
```

The parentheses ensure that the arguments and the resulting expression are bound properly. — end example]

- 5 [Example: To illustrate the rules for redefinition and reexamination, the sequence

```
#define x 3
#define f(a) f(x * (a))
#undef x
#define x 2
#define g f
#define z z[0]
#define h g(~
#define m(a) a(w)
#define w 0,1
#define t(a) a
#define p() int
#define q(x) x
#define r(x,y) x ## y
#define str(x) # x
```

```
f(y+1) + f(f(z)) % t(t(g)(0) + t)(1);
g(x+(3,4)-w | h 5) & m
(f)^m(m);
p() i[q()] = { q(1), r(2,3), r(4,), r(,5), r(,) };
char c[2][6] = { str(hello), str() };
```

results in

```
f(2 * (y+1)) + f(2 * (f(2 * (z[0]))) % f(2 * (0)) + t(1);
f(2 * (2+(3,4)-0,1)) | f(2 * (~ 5)) & f(2 * (0,1))^m(0,1);
int i[] = { 1, 23, 4, 5, };
char c[2][6] = { "hello", "" };
```

— end example]

- 6 [Example: To illustrate the rules for creating character string literals and concatenating tokens, the sequence

```
#define str(s) # s
#define xstr(s) str(s)
#define debug(s, t) printf("x" # s " = %d, x" # t " = %s", \
 x ## s, x ## t)
#define INCFILE(n) vers ## n
#define glue(a, b) a ## b
#define xglue(a, b) glue(a, b)
#define HIGHLOW "hello"
#define LOW LOW " , world"

debug(1, 2);
fputs(str(strncmp("abc\0d", "abc", '\4')
 == 0) str(: @\n), s);
#include xstr(INCFILE(2).h)
glue(HIGH, LOW);
xglue(HIGH, LOW)
```

results in

```
printf("x" "1" " = %d, x" "2" " = %s", x1, x2);
fputs("strncmp(\"abc\0d\", \"abc\", '\4') == 0" ": @\n", s);
#include "vers2.h" (after macro replacement, before file access)
"hello";
"hello" " , world"
```

or, after concatenation of the character string literals,

```
printf("x1= %d, x2= %s", x1, x2);
fputs("strncmp(\"abc\0d\", \"abc\", '\4') == 0: @\n", s);
#include "vers2.h" (after macro replacement, before file access)
"hello";
"hello, world"
```

Space around the # and ## tokens in the macro definition is optional. — end example]

- 7 [Example: To illustrate the rules for placemaker preprocessing tokens, the sequence

```
#define t(x,y,z) x ## y ## z
int j[] = { t(1,2,3), t(,4,5), t(6,,7), t(8,9,),
 t(10,,), t(,11,), t(,,12), t(,,) };
```

results in

```
int j[] = { 123, 45, 67, 89,
 10, 11, 12, };
```

— end example]

- 8 [Example: To demonstrate the redefinition rules, the following sequence is valid.

```
#define OBJ_LIKE (1-1)
#define OBJ_LIKE /* white space */ (1-1) /* other */
#define FUNC_LIKE(a) (a)
#define FUNC_LIKE(a)(/* note the white space */ \
 a /* other stuff on this line
 */)
```

But the following redefinitions are invalid:

```
#define OBJ_LIKE (0) // different token sequence
#define OBJ_LIKE (1 - 1) // different white space
#define FUNC_LIKE(b) (a) // different parameter usage
#define FUNC_LIKE(b) (b) // different parameter spelling
```

— end example]

- 9 [Example: Finally, to show the variable argument list macro facilities:

```
#define debug(...) fprintf(stderr, __VA_ARGS__)
#define showlist(...) puts(#__VA_ARGS__)
#define report(test, ...) ((test) ? puts(#test) : printf(__VA_ARGS__))
debug("Flag");
```

```

debug("X = %d\n", x);
showlist(The first, second, and third items.);
report(x>y, "x is %d but y is %d", x, y);

```

results in

```

fprintf(stderr, "Flag");
fprintf(stderr, "X = %d\n", x);
puts("The first, second, and third items.");
((x>y) ? puts("x>y") : printf("x is %d but y is %d", x, y));

```

— *end example*]

## 19.4 Line control

[cpp.line]

- <sup>1</sup> The string literal of a `#line` directive, if present, shall be a character string literal.
- <sup>2</sup> The *line number* of the current source line is one greater than the number of new-line characters read or introduced in translation phase 1 (5.2) while processing the source file to the current token.
- <sup>3</sup> A preprocessing directive of the form

```
line digit-sequence new-line
```

causes the implementation to behave as if the following sequence of source lines begins with a source line that has a line number as specified by the digit sequence (interpreted as a decimal integer). If the digit sequence specifies zero or a number greater than 2147483647, the behavior is undefined.

- <sup>4</sup> A preprocessing directive of the form

```
line digit-sequence " s-char-sequenceopt " new-line
```

sets the presumed line number similarly and changes the presumed name of the source file to be the contents of the character string literal.

- <sup>5</sup> A preprocessing directive of the form

```
line pp-tokens new-line
```

(that does not match one of the two previous forms) is permitted. The preprocessing tokens after `line` on the directive are processed just as in normal text (each identifier currently defined as a macro name is replaced by its replacement list of preprocessing tokens). If the directive resulting after all replacements does not match one of the two previous forms, the behavior is undefined; otherwise, the result is processed as appropriate.

## 19.5 Error directive

[cpp.error]

- <sup>1</sup> A preprocessing directive of the form

```
error pp-tokensopt new-line
```

causes the implementation to produce a diagnostic message that includes the specified sequence of preprocessing tokens, and renders the program ill-formed.

## 19.6 Pragma directive

[cpp.pragma]

- <sup>1</sup> A preprocessing directive of the form

```
pragma pp-tokensopt new-line
```

causes the implementation to behave in an implementation-defined manner. The behavior might cause translation to fail or cause the translator or the resulting program to behave in a non-conforming manner. Any pragma that is not recognized by the implementation is ignored.

## 19.7 Null directive

[cpp.null]

- <sup>1</sup> A preprocessing directive of the form

```
new-line
```

has no effect.

## 19.8 Predefined macro names

[cpp.predefined]

- <sup>1</sup> The following macro names shall be defined by the implementation:



**\_\_cplusplus**

The integer literal 201703L. [*Note*: It is intended that future versions of this International Standard will replace the value of this macro with a greater value. — *end note*]

**\_\_DATE\_\_**

The date of translation of the source file: a character string literal of the form "Mmm dd yyyy", where the names of the months are the same as those generated by the `asctime` function, and the first character of `dd` is a space character if the value is less than 10. If the date of translation is not available, an implementation-defined valid date shall be supplied.

**\_\_FILE\_\_**

The presumed name of the current source file (a character string literal).<sup>154</sup>

**\_\_LINE\_\_**

The presumed line number (within the current source file) of the current source line (an integer literal).<sup>155</sup>

**\_\_STDC\_HOSTED\_\_**

The integer literal 1 if the implementation is a hosted implementation or the integer literal 0 if it is not.

**\_\_STDCPP\_DEFAULT\_NEW\_ALIGNMENT\_\_**

An integer literal of type `std::size_t` whose value is the alignment guaranteed by a call to `operator new(std::size_t)` or `operator new[](std::size_t)`. [*Note*: Larger alignments will be passed to `operator new(std::size_t, std::align_val_t)`, etc. (8.5.2.4). — *end note*]

**\_\_TIME\_\_**

The time of translation of the source file: a character string literal of the form "hh:mm:ss" as in the time generated by the `asctime` function. If the time of translation is not available, an implementation-defined valid time shall be supplied.

The names listed in Table 16.

The macros defined in Table 16 shall be defined to the corresponding integer literal. [*Note*: Future versions of this International Standard might replace the values of these macros with greater values. — *end note*]

Table 16 — Feature-test macros

| Macro name                                 | Value   |
|--------------------------------------------|---------|
| <code>__cpp_aggregate_bases</code>         | 201603L |
| <code>__cpp_aggregate_nsdmi</code>         | 201304L |
| <code>__cpp_alias_templates</code>         | 200704L |
| <code>__cpp_aligned_new</code>             | 201606L |
| <code>__cpp_attributes</code>              | 200809L |
| <code>__cpp_binary_literals</code>         | 201304L |
| <code>__cpp_capture_star_this</code>       | 201603L |
| <code>__cpp_constexpr</code>               | 201603L |
| <code>__cpp_decltype</code>                | 200707L |
| <code>__cpp_decltype_auto</code>           | 201304L |
| <code>__cpp_deduction_guides</code>        | 201703L |
| <code>__cpp_delegating_constructors</code> | 200604L |
| <code>__cpp_enumerator_attributes</code>   | 201411L |
| <code>__cpp_explicit_bool</code>           | 201806L |
| <code>__cpp_fold_expressions</code>        | 201603L |
| <code>__cpp_generic_lambdas</code>         | 201304L |
| <code>__cpp_guaranteed_copy_elision</code> | 201606L |
| <code>__cpp_hex_float</code>               | 201603L |
| <code>__cpp_if_constexpr</code>            | 201606L |

154) The presumed source file name can be changed by the `#line` directive.

155) The presumed line number can be changed by the `#line` directive.

Table 16 — Feature-test macros (continued)

| Name                                                | Value   |
|-----------------------------------------------------|---------|
| <code>__cpp_inheriting_constructors</code>          | 201511L |
| <code>__cpp_init_captures</code>                    | 201304L |
| <code>__cpp_initializer_lists</code>                | 200806L |
| <code>__cpp_inline_variables</code>                 | 201606L |
| <code>__cpp_lambdas</code>                          | 200907L |
| <code>__cpp_namespace_attributes</code>             | 201411L |
| <code>__cpp_noexcept_function_type</code>           | 201510L |
| <code>__cpp_nontype_template_args</code>            | 201411L |
| <code>__cpp_nontype_template_parameter_auto</code>  | 201606L |
| <code>__cpp_nontype_template_parameter_class</code> | 201806L |
| <code>__cpp_nsdmi</code>                            | 200809L |
| <code>__cpp_range_based_for</code>                  | 201603L |
| <code>__cpp_raw_strings</code>                      | 200710L |
| <code>__cpp_ref_qualifiers</code>                   | 200710L |
| <code>__cpp_return_type_deduction</code>            | 201304L |
| <code>__cpp_rvalue_references</code>                | 200610L |
| <code>__cpp_sized_deallocation</code>               | 201309L |
| <code>__cpp_static_assert</code>                    | 201411L |
| <code>__cpp_structured_bindings</code>              | 201606L |
| <code>__cpp_template_template_args</code>           | 201611L |
| <code>__cpp_threadsafe_static_init</code>           | 200806L |
| <code>__cpp_unicode_characters</code>               | 200704L |
| <code>__cpp_unicode_literals</code>                 | 200710L |
| <code>__cpp_user_defined_literals</code>            | 200809L |
| <code>__cpp_variable_templates</code>               | 201304L |
| <code>__cpp_variadic_templates</code>               | 200704L |
| <code>__cpp_variadic_using</code>                   | 201611L |

<sup>2</sup> The following macro names are conditionally defined by the implementation:

`__STDC__`

Whether `__STDC__` is predefined and if so, what its value is, are implementation-defined.

`__STDC_MB_MIGHT_NEQ_WC__`

The integer literal 1, intended to indicate that, in the encoding for `wchar_t`, a member of the basic character set need not have a code value equal to its value when used as the lone character in an ordinary character literal.

`__STDC_VERSION__`

Whether `__STDC_VERSION__` is predefined and if so, what its value is, are implementation-defined.

`__STDC_ISO_10646__`

An integer literal of the form `yyymmL` (for example, `199712L`). If this symbol is defined, then every character in the Unicode required set, when stored in an object of type `wchar_t`, has the same value as the short identifier of that character. The *Unicode required set* consists of all the characters that are defined by ISO/IEC 10646, along with all amendments and technical corrigenda as of the specified year and month.

`__STDCPP_STRICT_POINTER_SAFETY__`

Defined, and has the value integer literal 1, if and only if the implementation has strict pointer safety (6.6.4.4.3).

`__STDCPP_THREADS__`

Defined, and has the value integer literal 1, if and only if a program can have more than one thread of execution (6.8.2).

- <sup>3</sup> The values of the predefined macros (except for `__FILE__` and `__LINE__`) remain constant throughout the translation unit.
- <sup>4</sup> If any of the pre-defined macro names in this subclause, or the identifier `defined`, is the subject of a `#define` or a `#undef` preprocessing directive, the behavior is undefined. Any other predefined macro names shall begin with a leading underscore followed by an uppercase letter or a second underscore.

## 19.9 Pragma operator

[`cpp.pragma.op`]

- <sup>1</sup> A unary operator expression of the form:

```
_Pragma (string-literal)
```

is processed as follows: The string literal is *destringized* by deleting the L prefix, if present, deleting the leading and trailing double-quotes, replacing each escape sequence `\` by a double-quote, and replacing each escape sequence `\\` by a single backslash. The resulting sequence of characters is processed through translation phase 3 to produce preprocessing tokens that are executed as if they were the *pp-tokens* in a pragma directive. The original four preprocessing tokens in the unary operator expression are removed.

- <sup>2</sup> [*Example:*

```
#pragma listing on "..\listing.dir"
```

can also be expressed as:

```
_Pragma ("listing on \"..\listing.dir\"")
```

The latter form is processed in the same way whether it appears literally as shown, or results from macro replacement, as in:

```
#define LISTING(x) PRAGMA(listing on #x)
#define PRAGMA(x) _Pragma(#x)
```

```
LISTING(..\listing.dir)
```

— *end example*]

## 20 Library introduction

[library]

### 20.1 General

[library.general]

- <sup>1</sup> This Clause describes the contents of the *C++ standard library*, how a well-formed C++ program makes use of the library, and how a conforming implementation may provide the entities in the library.
- <sup>2</sup> The following subclauses describe the definitions (20.3), method of description (20.4), and organization (20.5.1) of the library. 20.5, Clause 21 through Clause 34, and Annex D specify the contents of the library, as well as library requirements and constraints on both well-formed C++ programs and conforming implementations.
- <sup>3</sup> Detailed specifications for each of the components in the library are in Clause 21–Clause 34, as shown in Table 17.

Table 17 — Library categories

| Clause    | Category                    |
|-----------|-----------------------------|
| Clause 21 | Language support library    |
| Clause 22 | Concepts library            |
| Clause 23 | Diagnostics library         |
| Clause 24 | General utilities library   |
| Clause 25 | Strings library             |
| Clause 26 | Localization library        |
| Clause 27 | Containers library          |
| Clause 28 | Iterators library           |
| Clause 29 | Algorithms library          |
| Clause 30 | Numerics library            |
| Clause 31 | Input/output library        |
| Clause 32 | Regular expressions library |
| Clause 33 | Atomic operations library   |
| Clause 34 | Thread support library      |

- <sup>4</sup> The language support library (Clause 21) provides components that are required by certain parts of the C++ language, such as memory allocation (8.5.2.4, 8.5.2.5) and exception processing (Clause 18).
- <sup>5</sup> The concepts library (Clause 22) describes library components that C++ programs may use to perform compile-time validation of template arguments and perform function dispatch based on properties of types.
- <sup>6</sup> The diagnostics library (Clause 23) provides a consistent framework for reporting errors in a C++ program, including predefined exception classes.
- <sup>7</sup> The general utilities library (Clause 24) includes components used by other library elements, such as a predefined storage allocator for dynamic storage management (6.6.4.4), and components used as infrastructure in C++ programs, such as tuples, function wrappers, and time facilities.
- <sup>8</sup> The strings library (Clause 25) provides support for manipulating text represented as sequences of type `char`, sequences of type `char16_t`, sequences of type `char32_t`, sequences of type `wchar_t`, and sequences of any other character-like type.
- <sup>9</sup> The localization library (Clause 26) provides extended internationalization support for text processing.
- <sup>10</sup> The containers (Clause 27), iterators (Clause 28), and algorithms (Clause 29) libraries provide a C++ program with access to a subset of the most widely used algorithms and data structures.
- <sup>11</sup> The numerics library (Clause 30) provides numeric algorithms and complex number components that extend support for numeric processing. The `valarray` component provides support for *n*-at-a-time processing, potentially implemented as parallel operations on platforms that support such processing. The random number component provides facilities for generating pseudo-random numbers.
- <sup>12</sup> The input/output library (Clause 31) provides the `iostream` components that are the primary mechanism for C++ program input and output. They can be used with other elements of the library, particularly strings, locales, and iterators.

- <sup>13</sup> The regular expressions library (Clause 32) provides regular expression matching and searching.
- <sup>14</sup> The atomic operations library (Clause 33) allows more fine-grained concurrent access to shared data than is possible with locks.
- <sup>15</sup> The thread support library (Clause 34) provides components to create and manage threads, including mutual exclusion and interthread communication.

## 20.2 The C standard library [library.c]

- <sup>1</sup> The C++ standard library also makes available the facilities of the C standard library, suitably adjusted to ensure static type safety.
- <sup>2</sup> The descriptions of many library functions rely on the C standard library for the semantics of those functions. In some cases, the signatures specified in this document may be different from the signatures in the C standard library, and additional overloads may be declared in this document, but the behavior and the preconditions (including any preconditions implied by the use of an ISO C `restrict` qualifier) are the same unless otherwise stated.

## 20.3 Definitions [definitions]

- <sup>1</sup> [Note: Clause 3 defines additional terms used elsewhere in this document. — end note]

### 20.3.1 [defns.arbitrary.stream] arbitrary-positional stream

stream (described in Clause 31) that can seek to any integral position within the length of the stream

[Note 1 to entry: Every arbitrary-positional stream is also a repositional stream. — end note]

### 20.3.2 [defns.character] character

⟨Clause 25, Clause 26, Clause 31, and Clause 32⟩ object which, when treated sequentially, can represent text

[Note 1 to entry: The term does not mean only `char`, `char16_t`, `char32_t`, and `wchar_t` objects, but any value that can be represented by a type that provides the definitions specified in these Clauses. — end note]

### 20.3.3 [defns.character.container] character container type

class or a type used to represent a character

[Note 1 to entry: It is used for one of the template parameters of the `string`, `iostream`, and regular expression class templates. — end note]

### 20.3.4 [defns.comparison] comparison function

operator function (16.5) for any of the equality (8.5.10) or relational (8.5.9) operators

### 20.3.5 [defns.component] component

group of library entities directly related as members, parameters, or return types

[Note 1 to entry: For example, the class template `basic_string` and the non-member function templates that operate on strings are referred to as the *string component*. — end note]

### 20.3.6 [defns.const.subexpr] constant subexpression

expression whose evaluation as subexpression of a *conditional-expression* CE (8.5.16) would not prevent CE from being a core constant expression (8.6)

### 20.3.7 [defns.deadlock] deadlock

situation wherein one or more threads are unable to continue execution because each is blocked waiting for one or more of the others to satisfy some condition

### 20.3.8 [defns.default.behavior.impl] default behavior

⟨implementation⟩ specific behavior provided by the implementation, within the scope of the required behavior

- 20.3.9** [defns.default.behavior.func]  
**default behavior**  
 (specification) description of replacement function and handler function semantics
- 20.3.10** [defns.direct-non-list-init]  
**direct-non-list-initialization**  
 direct-initialization (11.6) that is not list-initialization (11.6.4)
- 20.3.11** [defns.expression-equivalent]  
**expression-equivalent**  
 expressions that all have the same effects, either are all potentially-throwing (18.4) or are all not potentially-throwing, and either are all constant subexpressions or are all not constant subexpressions  
 [Example: For a value `x` of type `int` and a function `f` that accepts integer arguments, the expressions `f(x + 2)`, `f(2 + x)`, and `f(1 + x + 1)` are expression-equivalent. — end example]
- 20.3.12** [defns.handler]  
**handler function**  
 non-reserved function whose definition may be provided by a C++ program  
 [Note 1 to entry: A C++ program may designate a handler function at various points in its execution by supplying a pointer to the function when calling any of the library functions that install handler functions (Clause 21). — end note]
- 20.3.13** [defns.iostream.templates]  
**iostream class templates**  
 templates, defined in Clause 31, that take two template arguments  
 [Note 1 to entry: The arguments are named `charT` and `traits`. The argument `charT` is a character container class, and the argument `traits` is a class which defines additional characteristics and functions of the character type represented by `charT` necessary to implement the iostream class templates. — end note]
- 20.3.14** [defns.modifier]  
**modifier function**  
 class member function (12.2.1) other than a constructor, assignment operator, or destructor that alters the state of an object of the class
- 20.3.15** [defns.move.assign]  
**move assignment**  
 assignment of an rvalue of some object type to a modifiable lvalue of the same type
- 20.3.16** [defns.move.constr]  
**move construction**  
 direct-initialization of an object of some type with an rvalue of the same type
- 20.3.17** [defns.ntcts]  
**NTCTS**  
 sequence of values that have character type that precede the terminating null character type value `charT()`
- 20.3.18** [defns.observer]  
**observer function**  
 class member function (12.2.1) that accesses the state of an object of the class but does not alter that state  
 [Note 1 to entry: Observer functions are specified as `const` member functions (12.2.2.1). — end note]
- 20.3.19** [defns.prog.def.spec]  
**program-defined specialization**  
 explicit template specialization or partial specialization that is not part of the C++ standard library and not defined by the implementation

### 20.3.20 [defns.prog.def.type] **program-defined type**

class type or enumeration type that is not part of the C++ standard library and not defined by the implementation, or an instantiation of a program-defined specialization

[*Note 1 to entry:* Types defined by the implementation include extensions (4.1) and internal types used by the library. — *end note*]

### 20.3.21 [defns.referenceable] **referenceable type**

type that is either an object type, a function type that does not have cv-qualifiers or a *ref-qualifier*, or a reference type

[*Note 1 to entry:* The term describes a type to which a reference can be created, including reference types. — *end note*]

### 20.3.22 [defns.replacement] **replacement function**

non-reserved function whose definition is provided by a C++ program

[*Note 1 to entry:* Only one definition for such a function is in effect for the duration of the program's execution, as the result of creating the program (5.2) and resolving the definitions of all translation units (6.5). — *end note*]

### 20.3.23 [defns.repositional.stream] **repositional stream**

stream (described in [Clause 31](#)) that can seek to a position that was previously encountered

### 20.3.24 [defns.required.behavior] **required behavior**

description of replacement function and handler function semantics applicable to both the behavior provided by the implementation and the behavior of any such function definition in the program

[*Note 1 to entry:* If such a function defined in a C++ program fails to meet the required behavior when it executes, the behavior is undefined. — *end note*]

### 20.3.25 [defns.reserved.function] **reserved function**

function, specified as part of the C++ standard library, that is defined by the implementation

[*Note 1 to entry:* If a C++ program provides a definition for any reserved function, the results are undefined. — *end note*]

### 20.3.26 [defns.stable] **stable algorithm**

algorithm that preserves, as appropriate to the particular algorithm, the order of elements

[*Note 1 to entry:* Requirements for stable algorithms are given in [20.5.5.7](#). — *end note*]

### 20.3.27 [defns.traits] **traits class**

class that encapsulates a set of types and functions necessary for class templates and function templates to manipulate objects of types for which they are instantiated

### 20.3.28 [defns.valid] **valid but unspecified state**

value of an object that is not specified except that the object's invariants are met and operations on the object behave as specified for its type

[*Example:* If an object `x` of type `std::vector<int>` is in a valid but unspecified state, `x.empty()` can be called unconditionally, and `x.front()` can be called only if `x.empty()` returns `false`. — *end example*]

## 20.4 Method of description (Informative) [description]

- <sup>1</sup> This subclause describes the conventions used to specify the C++ standard library. 20.4.1 describes the structure of the normative Clause 21 through Clause 34 and Annex D. 20.4.2 describes other editorial conventions.

### 20.4.1 Structure of each clause [structure]

#### 20.4.1.1 Elements [structure.elements]

- <sup>1</sup> Each library clause contains the following elements, as applicable:<sup>156</sup>

- (1.1) — Summary
- (1.2) — Requirements
- (1.3) — Detailed specifications
- (1.4) — References to the C standard library

#### 20.4.1.2 Summary [structure.summary]

- <sup>1</sup> The Summary provides a synopsis of the category, and introduces the first-level subclauses. Each subclause also provides a summary, listing the headers specified in the subclause and the library entities provided in each header.

- <sup>2</sup> The contents of the summary and the detailed specifications include:

- (2.1) — macros
- (2.2) — values
- (2.3) — types
- (2.4) — classes and class templates
- (2.5) — functions and function templates
- (2.6) — objects
- (2.7) — concepts

#### 20.4.1.3 Requirements [structure.requirements]

- <sup>1</sup> Requirements describe constraints that shall be met by a C++ program that extends the standard library. Such extensions are generally one of the following:

- (1.1) — Template arguments
- (1.2) — Derived classes
- (1.3) — Containers, iterators, and algorithms that meet an interface convention or satisfy a concept

- <sup>2</sup> The string and iostream components use an explicit representation of operations required of template arguments. They use a class template `char_traits` to define these constraints.

- <sup>3</sup> Interface convention requirements are stated as generally as possible. Instead of stating “class X has to define a member function `operator++()`”, the interface requires “for any object x of class X, `++x` is defined”. That is, whether the operator is a member is unspecified.

- <sup>4</sup> Requirements are stated in terms of well-defined expressions that define valid terms of the types that satisfy the requirements. For every set of well-defined expression requirements there is either a named concept or a table that specifies an initial set of the valid expressions and their semantics. Any generic algorithm (Clause 29) that uses the well-defined expression requirements is described in terms of the valid expressions for its template type parameters.

- <sup>5</sup> The library specification uses a typographical convention for naming requirements. Names in *italic* type that begin with the prefix *Cpp17* refer to sets of well-defined expression requirements typically presented in tabular form, possibly with additional prose semantic requirements. For example, *Cpp17Destructible* (Table 29) is such a named requirement. Names in **constant width** type refer to library concepts which are presented as a concept definition (Clause 17), possibly with additional prose semantic requirements. For example, **Destructible** (22.4.10) is such a named requirement.

---

<sup>156</sup>) To save space, items that do not apply to a Clause are omitted. For example, if a Clause does not specify any requirements, there will be no “Requirements” subclause.



- 6 Template argument requirements are sometimes referenced by name. See 20.4.2.1.
- 7 In some cases the semantic requirements are presented as C++ code. Such code is intended as a specification of equivalence of a construct to another construct, not necessarily as the way the construct must be implemented.<sup>157</sup>
- 8 Required operations of any concept defined in this document need not be total functions; that is, some arguments to a required operation may result in the required semantics failing to be satisfied. [*Example*: The required < operator of the `StrictTotallyOrdered` concept (22.5.4) does not meet the semantic requirements of that concept when operating on NaNs. — *end example*] This does not affect whether a type satisfies the concept.
- 9 A declaration may explicitly impose requirements through its associated constraints (17.4.2). When the associated constraints refer to a concept (17.6.8), the semantic constraints specified for that concept are additionally imposed on the use of the declaration.

#### 20.4.1.4 Detailed specifications

[structure.specifications]

- 1 The detailed specifications each contain the following elements:

- (1.1) — name and brief description
- (1.2) — synopsis (class definition or function declaration, as appropriate)
- (1.3) — restrictions on template arguments, if any
- (1.4) — description of class invariants
- (1.5) — description of function semantics

- 2 Descriptions of class member functions follow the order (as appropriate):<sup>158</sup>

- (2.1) — constructor(s) and destructor
- (2.2) — copying, moving & assignment functions
- (2.3) — comparison functions
- (2.4) — modifier functions
- (2.5) — observer functions
- (2.6) — operators and other non-member functions

- 3 Descriptions of function semantics contain the following elements (as appropriate):<sup>159</sup>

- (3.1) — *Requires*: the preconditions for calling the function.
- (3.2) — *Constraints*: the conditions for the function’s participation in overload resolution (16.3). [*Note*: Failure to meet such a condition results in the function’s silent non-viability. — *end note*] [*Example*: An implementation might express such a condition via a *constraint-expression* (17.4.2). — *end example*]
- (3.3) — *Mandates*: the conditions that, if not met, render the program ill-formed. [*Example*: An implementation might express such a condition via the *constant-expression* in a *static\_assert-declaration* (Clause 10). If the diagnostic is to be emitted only after the function has been selected by overload resolution, an implementation might express such a condition via a *constraint-expression* (17.4.2) and also define the function as deleted. — *end example*]
- (3.4) — *Expects*: the conditions (sometimes termed preconditions) that the function assumes to hold whenever it is called. [*Example*: An implementation might express such conditions via an attribute such as `[[expects]]` (10.6.4). However, some such conditions might not lend themselves to expression via code. — *end example*]
- (3.5) — *Effects*: the actions performed by the function.
- (3.6) — *Synchronization*: the synchronization operations (6.8.2) applicable to the function.
- (3.7) — *Ensures*: the conditions (sometimes termed observable results or postconditions) established by the function.

<sup>157</sup> Although in some cases the code given is unambiguously the optimum implementation.

<sup>158</sup> To save space, items that do not apply to a class are omitted. For example, if a class does not specify any comparison functions, there will be no “Comparison functions” subclause.

<sup>159</sup> To save space, elements that do not apply to a function are omitted. For example, if a function specifies no preconditions, there will be no *Expects*: element.

- (3.8) — *Returns*: a description of the value(s) returned by the function.
  - (3.9) — *Throws*: any exceptions thrown by the function, and the conditions that would cause the exception.
  - (3.10) — *Complexity*: the time and/or space complexity of the function.
  - (3.11) — *Remarks*: additional semantic constraints on the function.
  - (3.12) — *Error conditions*: the error conditions for error codes reported by the function.
- 4 Whenever the *Effects* element specifies that the semantics of some function F are *Equivalent to* some code sequence, then the various elements are interpreted as follows. If F's semantics specifies any *Constraints* or *Mandates* elements, then those requirements are logically imposed prior to the *equivalent-to* semantics. Next, the semantics of the code sequence are determined by the *Constraints*, *Mandates*, *Expects*, *Effects*, *Synchronization*, *Ensures*, *Returns*, *Throws*, *Complexity*, *Remarks*, and *Error conditions* specified for the function invocations contained in the code sequence. The value returned from F is specified by F's *Returns* element, or if F has no *Returns* element, a non-void return from F is specified by the `return` statements (9.6.3) in the code sequence. If F's semantics contains a *Throws*, *Ensures*, or *Complexity* element, then that supersedes any occurrences of that element in the code sequence.
  - 5 For non-reserved replacement and handler functions, Clause 21 specifies two behaviors for the functions in question: their required and default behavior. The *default behavior* describes a function definition provided by the implementation. The *required behavior* describes the semantics of a function definition provided by either the implementation or a C++ program. Where no distinction is explicitly made in the description, the behavior described is the required behavior.
  - 6 If the formulation of a complexity requirement calls for a negative number of operations, the actual requirement is zero operations.<sup>160</sup>
  - 7 Complexity requirements specified in the library clauses are upper bounds, and implementations that provide better complexity guarantees satisfy the requirements.
  - 8 Error conditions specify conditions where a function may fail. The conditions are listed, together with a suitable explanation, as the `enum class errc` constants (23.5).

#### 20.4.1.5 C library [structure.see.also]

- 1 Paragraphs labeled “SEE ALSO” contain cross-references to the relevant portions of other standards (Clause 2).

#### 20.4.2 Other conventions [conventions]

- 1 This subclause describes several editorial conventions used to describe the contents of the C++ standard library. These conventions are for describing implementation-defined types (20.4.2.1), and member functions (20.4.2.2).

##### 20.4.2.1 Type descriptions [type.descriptions]

###### 20.4.2.1.1 General [type.descriptions.general]

- 1 The Requirements subclauses may describe names that are used to specify constraints on template arguments.<sup>161</sup> These names are used in library Clauses to describe the types that may be supplied as arguments by a C++ program when instantiating template components from the library.
- 2 Certain types defined in Clause 31 are used to describe implementation-defined types. They are based on other types, but with added constraints.

###### 20.4.2.1.2 Exposition-only types [expos.only.types]

- 1 Several types defined in Clause 21 through Clause 34 and Annex D that are used as function parameter or return types are defined for the purpose of exposition only in order to capture their language linkage. The declarations of such types are followed by a comment ending in *exposition only*. [Example:

```
namespace std {
 extern "C" using some-handler = int(int, void*, double); // exposition only
}
```

The type placeholder *some-handler* can now be used to specify a function that takes a callback parameter with C language linkage. — end example]

<sup>160</sup>) This simplifies the presentation of complexity requirements in some cases.

<sup>161</sup>) Examples from 20.5.3 include: *Cpp17EqualityComparable*, *Cpp17LessThanComparable*, *Cpp17CopyConstructible*. Examples from 28.2 include: *Cpp17InputIterator*, *Cpp17ForwardIterator*.

## 20.4.2.1.3 Enumerated types

[enumerated.types]

- <sup>1</sup> Several types defined in [Clause 31](#) are *enumerated types*. Each enumerated type may be implemented as an enumeration or as a synonym for an enumeration.<sup>162</sup>
- <sup>2</sup> The enumerated type *enumerated* can be written:

```
enum enumerated { V0, V1, V2, V3, };

inline const enumerated C0(V0);
inline const enumerated C1(V1);
inline const enumerated C2(V2);
inline const enumerated C3(V3);
:
:
```

- <sup>3</sup> Here, the names  $C_0$ ,  $C_1$ , etc. represent *enumerated elements* for this particular enumerated type. All such elements have distinct values.

## 20.4.2.1.4 Bitmask types

[bitmask.types]

- <sup>1</sup> Several types defined in [Clause 21](#) through [Clause 34](#) and [Annex D](#) are *bitmask types*. Each bitmask type can be implemented as an enumerated type that overloads certain operators, as an integer type, or as a bitset ([24.9.2](#)).
- <sup>2</sup> The bitmask type *bitmask* can be written:

```
// For exposition only.
// int_type is an integral type capable of representing all values of the bitmask type.
enum bitmask : int_type {
 V0 = 1 << 0, V1 = 1 << 1, V2 = 1 << 2, V3 = 1 << 3,
};

inline constexpr bitmask C0(V0);
inline constexpr bitmask C1(V1);
inline constexpr bitmask C2(V2);
inline constexpr bitmask C3(V3);
:
:

constexpr bitmask operator&(bitmask X, bitmask Y) {
 return static_cast<bitmask>(
 static_cast<int_type>(X) & static_cast<int_type>(Y));
}
constexpr bitmask operator|(bitmask X, bitmask Y) {
 return static_cast<bitmask>(
 static_cast<int_type>(X) | static_cast<int_type>(Y));
}
constexpr bitmask operator^(bitmask X, bitmask Y){
 return static_cast<bitmask>(
 static_cast<int_type>(X) ^ static_cast<int_type>(Y));
}
constexpr bitmask operator~(bitmask X){
 return static_cast<bitmask>(~static_cast<int_type>(X));
}
bitmask& operator&=(bitmask& X, bitmask Y){
 X = X & Y; return X;
}
bitmask& operator|=(bitmask& X, bitmask Y) {
 X = X | Y; return X;
}
bitmask& operator^=(bitmask& X, bitmask Y) {
 X = X ^ Y; return X;
}
}
```

<sup>162</sup>) Such as an integer type, with constant integer values ([6.7.1](#)).

<sup>3</sup> Here, the names  $C_0$ ,  $C_1$ , etc. represent *bitmask elements* for this particular bitmask type. All such elements have distinct, nonzero values such that, for any pair  $C_i$  and  $C_j$  where  $i \neq j$ ,  $C_i \& C_i$  is nonzero and  $C_i \& C_j$  is zero. Additionally, the value 0 is used to represent an *empty bitmask*, in which no bitmask elements are set.

<sup>4</sup> The following terms apply to objects and values of bitmask types:

(4.1) — To *set* a value  $Y$  in an object  $X$  is to evaluate the expression  $X |= Y$ .

(4.2) — To *clear* a value  $Y$  in an object  $X$  is to evaluate the expression  $X \&= \sim Y$ .

(4.3) — The value  $Y$  is *set* in the object  $X$  if the expression  $X \& Y$  is nonzero.

#### 20.4.2.1.5 Character sequences

[character.seq]

<sup>1</sup> The C standard library makes widespread use of characters and character sequences that follow a few uniform conventions:

(1.1) — A *letter* is any of the 26 lowercase or 26 uppercase letters in the basic execution character set.

(1.2) — The *decimal-point character* is the (single-byte) character used by functions that convert between a (single-byte) character sequence and a value of one of the floating-point types. It is used in the character sequence to denote the beginning of a fractional part. It is represented in [Clause 21](#) through [Clause 34](#) and [Annex D](#) by a period, '.', which is also its value in the "C" locale, but may change during program execution by a call to `setlocale(int, const char*)`,<sup>163</sup> or by a change to a locale object, as described in [26.3](#) and [Clause 31](#).

(1.3) — A *character sequence* is an array object ([11.3.4](#))  $A$  that can be declared as  $TA[M]$ , where  $T$  is any of the types `char`, `unsigned char`, or `signed char` ([6.7.1](#)), optionally qualified by any combination of `const` or `volatile`. The initial elements of the array have defined contents up to and including an element determined by some predicate. A character sequence can be designated by a pointer value  $S$  that points to its first element.

##### 20.4.2.1.5.1 Byte strings

[byte.strings]

<sup>1</sup> A *null-terminated byte string*, or NTBS, is a character sequence whose highest-addressed element with defined content has the value zero (the *terminating null character*); no other element in the sequence has the value zero.<sup>164</sup>

<sup>2</sup> The *length of an NTBS* is the number of elements that precede the terminating null character. An *empty NTBS* has a length of zero.

<sup>3</sup> The *value of an NTBS* is the sequence of values of the elements up to and including the terminating null character.

<sup>4</sup> A *static NTBS* is an NTBS with static storage duration.<sup>165</sup>

##### 20.4.2.1.5.2 Multibyte strings

[multibyte.strings]

<sup>1</sup> A *null-terminated multibyte string*, or NTMBS, is an NTBS that constitutes a sequence of valid multibyte characters, beginning and ending in the initial shift state.<sup>166</sup>

<sup>2</sup> A *static NTMBS* is an NTMBS with static storage duration.

#### 20.4.2.1.6 Customization Point Object types

[customization.point.object]

<sup>1</sup> A *customization point object* is a function object ([24.14](#)) with a literal class type that interacts with program-defined types while enforcing semantic requirements on that interaction.

<sup>2</sup> The type of a customization point object shall satisfy `Semiregular` ([22.6](#)).

<sup>3</sup> All instances of a specific customization point object type shall be equal ([22.2](#)).

<sup>4</sup> The type  $T$  of a customization point object shall satisfy `Invocable<const T&, Args...>` ([22.7.2](#)) when the types in `Args...` meet the requirements specified in that customization point object's definition. When the types of `Args...` do not meet the customization point object's requirements,  $T$  shall not have a function call operator that participates in overload resolution.

<sup>163</sup> declared in `<locale>` ([26.5](#)).

<sup>164</sup> Many of the objects manipulated by function signatures declared in `<cstring>` ([25.5](#)) are character sequences or NTBSs. The size of some of these character sequences is limited by a length value, maintained separately from the character sequence.

<sup>165</sup> A string literal, such as "abc", is a static NTBS.

<sup>166</sup> An NTBS that contains characters only from the basic execution character set is also an NTMBS. Each multibyte character then consists of a single byte.

- 5 Each customization point object type constrains its return type to satisfy a particular concept.
- 6 [Note: Many of the customization point objects in the library evaluate function call expressions with an unqualified name which results in a call to a program-defined function found by argument dependent name lookup (6.4.2). To preclude such an expression resulting in a call to unconstrained functions with the same name in namespace `std`, customization point objects specify that lookup for these expressions is performed in a context that includes deleted overloads matching the signatures of overloads defined in namespace `std`. When the deleted overloads are viable, program-defined overloads need be more specialized (17.6.6.2) or more constrained (17.4.4) to be used by a customization point object. — *end note*]

#### 20.4.2.2 Functions within classes [functions.within.classes]

- 1 For the sake of exposition, Clause 21 through Clause 34 and Annex D do not describe copy/move constructors, assignment operators, or (non-virtual) destructors with the same apparent semantics as those that can be generated by default (15.1, 15.4, 15.8). It is unspecified whether the implementation provides explicit definitions for such member function signatures, or for virtual destructors that can be generated by default.

#### 20.4.2.3 Operators [operators]

- 1 In this library, whenever a declaration is provided for an `operator!=`, `operator>`, `operator<=`, or `operator>=` for a type `T`, its requirements and semantics are as follows, unless explicitly specified otherwise.

```
bool operator!=(const T& x, const T& y);
```

- 2 *Requires:* Type `T` is *Cpp17EqualityComparable* (Table 22).

3 *Returns:* `!(x == y)`.

```
bool operator>(const T& x, const T& y);
```

- 4 *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

5 *Returns:* `y < x`.

```
bool operator<=(const T& x, const T& y);
```

- 6 *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

7 *Returns:* `!(y < x)`.

```
bool operator>=(const T& x, const T& y);
```

- 8 *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

9 *Returns:* `!(x < y)`.

#### 20.4.2.4 Private members [objects.within.classes]

- 1 Clause 21 through Clause 34 and Annex D do not specify the representation of classes, and intentionally omit specification of class members (12.2). An implementation may define static or non-static class members, or both, as needed to implement the semantics of the member functions specified in Clause 21 through Clause 34 and Annex D.
- 2 For the sake of exposition, some subclasses provide representative declarations, and semantic requirements, for private members of classes that meet the external specifications of the classes. The declarations for such members are followed by a comment that ends with *exposition only*, as in:

```
streambuf* sb; // exposition only
```

- 3 An implementation may use any technique that provides equivalent observable behavior.

### 20.5 Library-wide requirements [requirements]

- 1 This subclause specifies requirements that apply to the entire C++ standard library. Clause 21 through Clause 34 and Annex D specify the requirements of individual entities within the library.
- 2 Requirements specified in terms of interactions between threads do not apply to programs having only a single thread of execution.
- 3 Within this subclause, 20.5.1 describes the library's contents and organization, 20.5.2 describes how well-formed C++ programs gain access to library entities, 20.5.3 describes constraints on types and functions used with the C++ standard library, 20.5.4 describes constraints on well-formed C++ programs, and 20.5.5 describes constraints on conforming implementations.

## 20.5.1 Library contents and organization [organization]

- <sup>1</sup> 20.5.1.1 describes the entities and macros defined in the C++ standard library. 20.5.1.2 lists the standard library headers and some constraints on those headers. 20.5.1.3 lists requirements for a freestanding implementation of the C++ standard library.

### 20.5.1.1 Library contents [contents]

- <sup>1</sup> The C++ standard library provides definitions for the entities and macros described in the synopses of the C++ standard library headers (20.5.1.2).
- <sup>2</sup> All library entities except `operator new` and `operator delete` are defined within the namespace `std` or namespaces nested within namespace `std`.<sup>167</sup> It is unspecified whether names declared in a specific namespace are declared directly in that namespace or in an inline namespace inside that namespace.<sup>168</sup>
- <sup>3</sup> Whenever a name `x` defined in the standard library is mentioned, the name `x` is assumed to be fully qualified as `::std::x`, unless explicitly described otherwise. For example, if the *Effects:* element for library function `F` is described as calling library function `G`, the function `::std::G` is meant.

### 20.5.1.2 Headers [headers]

- <sup>1</sup> Each element of the C++ standard library is declared or defined (as appropriate) in a *header*.<sup>169</sup>
- <sup>2</sup> The C++ standard library provides the *C++ library headers*, shown in Table 18.

Table 18 — C++ library headers

|                      |                    |                    |                 |
|----------------------|--------------------|--------------------|-----------------|
| <algorithm>          | <forward_list>     | <new>              | <sstream>       |
| <any>                | <fstream>          | <numeric>          | <syncstream>    |
| <array>              | <functional>       | <optional>         | <system_error>  |
| <atomic>             | <future>           | <ostream>          | <thread>        |
| <bit>                | <initializer_list> | <queue>            | <tuple>         |
| <bitset>             | <iomanip>          | <random>           | <typeindex>     |
| <charconv>           | <ios>              | <ratio>            | <typeinfo>      |
| <chrono>             | <iosfwd>           | <regex>            | <type_traits>   |
| <codecvt>            | <iostream>         | <scoped_allocator> | <unordered_map> |
| <compare>            | <istream>          | <set>              | <unordered_set> |
| <complex>            | <iterator>         | <shared_mutex>     | <utility>       |
| <concepts>           | <limits>           | <span>             | <valarray>      |
| <condition_variable> | <list>             | <sstream>          | <variant>       |
| <contract>           | <locale>           | <stack>            | <vector>        |
| <deque>              | <map>              | <stdexcept>        | <version>       |
| <exception>          | <memory>           | <streambuf>        |                 |
| <execution>          | <memory_resource>  | <string>           |                 |
| <filesystem>         | <mutex>            | <string_view>      |                 |

- <sup>3</sup> The facilities of the C standard library are provided in the additional headers shown in Table 19.<sup>170</sup>

Table 19 — C++ headers for C library facilities

|           |              |           |           |           |           |           |
|-----------|--------------|-----------|-----------|-----------|-----------|-----------|
| <cassert> | <cfenv>      | <climits> | <csetjmp> | <cstddef> | <cstdlib> | <cuchar>  |
| <cctype>  | <cfloat>     | <locale>  | <csignal> | <cstdint> | <cstring> | <wchar>   |
| <cerrno>  | < cinttypes> | <cmath>   | <cstdarg> | <stdio>   | <ctime>   | <cwctype> |

- <sup>4</sup> Except as noted in Clause 20 through Clause 34 and Annex D, the contents of each header *cname* is the same as that of the corresponding header *name.h* as specified in the C standard library (Clause 2). In the C++ standard library, however, the declarations (except for names which are defined as macros in C) are

<sup>167</sup> The C standard library headers (D.6) also define names within the global namespace, while the C++ headers for C library facilities (20.5.1.2) may also define names within the global namespace.

<sup>168</sup> This gives implementers freedom to use inline namespaces to support multiple configurations of the library.

<sup>169</sup> A header is not necessarily a source file, nor are the sequences delimited by < and > in header names necessarily valid source file names (19.2).

<sup>170</sup> It is intentional that there is no C++ header for any of these C headers: <stdatomic.h>, <stdnoreturn.h>, <threads.h>.

within namespace scope (6.3.6) of the namespace `std`. It is unspecified whether these names (including any overloads added in Clause 21 through Clause 34 and Annex D) are first declared within the global namespace scope and are then injected into namespace `std` by explicit *using-declarations* (10.3.3).

- 5 Names which are defined as macros in C shall be defined as macros in the C++ standard library, even if C grants license for implementation as functions. [Note: The names defined as macros in C include the following: `assert`, `offsetof`, `setjmp`, `va_arg`, `va_end`, and `va_start`. — *end note*]
- 6 Names that are defined as functions in C shall be defined as functions in the C++ standard library.<sup>171</sup>
- 7 Identifiers that are keywords or operators in C++ shall not be defined as macros in C++ standard library headers.<sup>172</sup>
- 8 D.6, C standard library headers, describes the effects of using the *name.h* (C header) form in a C++ program.<sup>173</sup>
- 9 Annex K of the C standard describes a large number of functions, with associated types and macros, which “promote safer, more secure programming” than many of the traditional C library functions. The names of the functions have a suffix of `_s`; most of them provide the same service as the C library function with the unsuffixed name, but generally take an additional argument whose value is the size of the result array. If any C++ header is included, it is implementation-defined whether any of these names is declared in the global namespace. (None of them is declared in namespace `std`.)
- 10 Table 20 lists the Annex K names that may be declared in some header. These names are also subject to the restrictions of 20.5.4.3.2.

Table 20 — C standard Annex K names

|                                   |                                       |                           |                         |
|-----------------------------------|---------------------------------------|---------------------------|-------------------------|
| <code>abort_handler_s</code>      | <code>mbstowcs_s</code>               | <code>strncat_s</code>    | <code>vswscanf_s</code> |
| <code>asctime_s</code>            | <code>memcpy_s</code>                 | <code>strncpy_s</code>    | <code>vwprintf_s</code> |
| <code>bsearch_s</code>            | <code>memmove_s</code>                | <code>strtok_s</code>     | <code>vswscanf_s</code> |
| <code>constraint_handler_t</code> | <code>memset_s</code>                 | <code>swprintf_s</code>   | <code>wcrtomb_s</code>  |
| <code>ctime_s</code>              | <code>printf_s</code>                 | <code>swscanf_s</code>    | <code>wcscat_s</code>   |
| <code>errno_t</code>              | <code>qsort_s</code>                  | <code>tmpfile_s</code>    | <code>wcscpy_s</code>   |
| <code>fopen_s</code>              | <code>RSIZE_MAX</code>                | <code>TMP_MAX_S</code>    | <code>wcsncat_s</code>  |
| <code>fprintf_s</code>            | <code>rsize_t</code>                  | <code>tmpnam_s</code>     | <code>wcsncpy_s</code>  |
| <code>freopen_s</code>            | <code>scanf_s</code>                  | <code>vfprintf_s</code>   | <code>wcsnlen_s</code>  |
| <code>fscanf_s</code>             | <code>set_constraint_handler_s</code> | <code>vfscanf_s</code>    | <code>wcrtombs_s</code> |
| <code>fwprintf_s</code>           | <code>snprintf_s</code>               | <code>vfwprintf_s</code>  | <code>wcstok_s</code>   |
| <code>fwscanf_s</code>            | <code>snwprintf_s</code>              | <code>vfwscanf_s</code>   | <code>wcstombs_s</code> |
| <code>getenv_s</code>             | <code>sprintf_s</code>                | <code>vprintf_s</code>    | <code>wctomb_s</code>   |
| <code>gets_s</code>               | <code>sscanf_s</code>                 | <code>vscanf_s</code>     | <code>wmemcpy_s</code>  |
| <code>gmtime_s</code>             | <code>strcat_s</code>                 | <code>vsnprintf_s</code>  | <code>wmemmove_s</code> |
| <code>ignore_handler_s</code>     | <code>strcpy_s</code>                 | <code>vsnwprintf_s</code> | <code>wprintf_s</code>  |
| <code>localtime_s</code>          | <code>strerrorlen_s</code>            | <code>vsprintf_s</code>   | <code>wscanf_s</code>   |
| <code>L_tmpnam_s</code>           | <code>strerror_s</code>               | <code>vsscanf_s</code>    |                         |
| <code>mbsrtowcs_s</code>          | <code>strlen_s</code>                 | <code>vswprintf_s</code>  |                         |

### 20.5.1.3 Freestanding implementations

[compliance]

- 1 Two kinds of implementations are defined: *hosted* and *freestanding* (4.1). For a hosted implementation, this document describes the set of available headers.
- 2 A freestanding implementation has an implementation-defined set of headers. This set shall include at least the headers shown in Table 21.
- 3 The supplied version of the header `<cstdliblib>` shall declare at least the functions `abort`, `atexit`, `at_quick_exit`, `exit`, and `quick_exit` (21.5). The other headers listed in this table shall meet the same requirements as for a hosted implementation.

171) This disallows the practice, allowed in C, of providing a masking macro in addition to the function prototype. The only way to achieve equivalent inline behavior in C++ is to provide a definition as an extern inline function.

172) In particular, including the standard header `<iso646.h>` has no effect.

173) The “.h” headers dump all their names into the global namespace, whereas the newer forms keep their names in namespace `std`. Therefore, the newer forms are the preferred forms for all uses except for C++ programs which are intended to be strictly compatible with C.

Table 21 — C++ headers for freestanding implementations

| Subclause | Header(s)                 |                                       |
|-----------|---------------------------|---------------------------------------|
| 21.2      | Types                     | <cstdlib>                             |
| 21.3      | Implementation properties | <cfloat> <limits> <climits> <version> |
| 21.4      | Integer types             | <stdint>                              |
| 21.5      | Start and termination     | <stdlib>                              |
| 21.6      | Dynamic memory management | <new>                                 |
| 21.7      | Type identification       | <typeinfo>                            |
| 21.9      | Exception handling        | <exception>                           |
| 21.10     | Initializer lists         | <initializer_list>                    |
| 21.12     | Other runtime support     | <cstdlibarg>                          |
| 24.15     | Type traits               | <type_traits>                         |
| 30.6      | Bit manipulation          | <bit>                                 |
| Clause 33 | Atomics                   | <atomic>                              |

## 20.5.2 Using the library [using]

### 20.5.2.1 Overview [using.overview]

- <sup>1</sup> Subclause 20.5.2 describes how a C++ program gains access to the facilities of the C++ standard library. 20.5.2.2 describes effects during translation phase 4, while 20.5.2.3 describes effects during phase 8 (5.2).

### 20.5.2.2 Headers [using.headers]

- <sup>1</sup> The entities in the C++ standard library are defined in headers, whose contents are made available to a translation unit when it contains the appropriate `#include` preprocessing directive (19.2).
- <sup>2</sup> A translation unit may include library headers in any order (Clause 5). Each may be included more than once, with no effect different from being included exactly once, except that the effect of including either `<cassert>` or `<assert.h>` depends each time on the lexically current definition of `NDEBUG`.<sup>174</sup>
- <sup>3</sup> A translation unit shall include a header only outside of any declaration or definition, and shall include the header lexically before the first reference in that translation unit to any of the entities declared in that header. No diagnostic is required.

### 20.5.2.3 Linkage [using.linkage]

- <sup>1</sup> Entities in the C++ standard library have external linkage (6.5). Unless otherwise specified, objects and functions have the default `extern "C++"` linkage (10.5).
- <sup>2</sup> Whether a name from the C standard library declared with external linkage has `extern "C"` or `extern "C++"` linkage is implementation-defined. It is recommended that an implementation use `extern "C++"` linkage for this purpose.<sup>175</sup>
- <sup>3</sup> Objects and functions defined in the library and required by a C++ program are included in the program prior to program startup.
- <sup>4</sup> See also replacement functions (20.5.4.6), runtime changes (20.5.4.7).

## 20.5.3 Requirements on types and expressions [utility.requirements]

- <sup>1</sup> 20.5.3.1 describes requirements on types and expressions used to instantiate templates defined in the C++ standard library. 20.5.3.2 describes the requirements on swappable types and swappable expressions. 20.5.3.3 describes the requirements on pointer-like types that support null values. 20.5.3.4 describes the requirements on hash function objects. 20.5.3.5 describes the requirements on storage allocators.

### 20.5.3.1 Template argument requirements [utility.arg.requirements]

- <sup>1</sup> The template definitions in the C++ standard library refer to various named requirements whose details are set out in Tables 22–29. In these tables, `T` is an object or reference type to be supplied by a C++ program instantiating a template; `a`, `b`, and `c` are values of type (possibly `const`) `T`; `s` and `t` are modifiable lvalues of

<sup>174</sup>) This is the same as the C standard library.

<sup>175</sup>) The only reliable way to declare an object or function signature from the C standard library is by including the header that declares it, notwithstanding the latitude granted in 7.1.4 of the C Standard.



type  $T$ ;  $u$  denotes an identifier;  $rv$  is an rvalue of type  $T$ ; and  $v$  is an lvalue of type (possibly `const`)  $T$  or an rvalue of type `const T`.

- <sup>2</sup> In general, a default constructor is not required. Certain container class member function signatures specify  $T()$  as a default argument.  $T()$  shall be a well-defined expression (11.6) if one of those signatures is called using the default argument (11.3.6).

Table 22 — *Cpp17EqualityComparable* requirements

| Expression | Return type                         | Requirement                                                                                                                                                                                                                                                                                                                              |
|------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $a == b$   | convertible to<br><code>bool</code> | <code>==</code> is an equivalence relation, that is, it has the following properties: <ul style="list-style-type: none"> <li>— For all <math>a</math>, <math>a == a</math>.</li> <li>— If <math>a == b</math>, then <math>b == a</math>.</li> <li>— If <math>a == b</math> and <math>b == c</math>, then <math>a == c</math>.</li> </ul> |

Table 23 — *Cpp17LessThanComparable* requirements

| Expression | Return type                         | Requirement                                                 |
|------------|-------------------------------------|-------------------------------------------------------------|
| $a < b$    | convertible to<br><code>bool</code> | <code>&lt;</code> is a strict weak ordering relation (29.7) |

Table 24 — *Cpp17DefaultConstructible* requirements

| Expression       | Post-condition                                                      |
|------------------|---------------------------------------------------------------------|
| $T\ t;$          | object $t$ is default-initialized                                   |
| $T\ u\{\};$      | object $u$ is value-initialized or aggregate-initialized            |
| $T()$<br>$T\{\}$ | an object of type $T$ is value-initialized or aggregate-initialized |

Table 25 — *Cpp17MoveConstructible* requirements

| Expression   | Post-condition                                                                                                                                                                                                                                                              |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $T\ u = rv;$ | $u$ is equivalent to the value of $rv$ before the construction                                                                                                                                                                                                              |
| $T(rv)$      | $T(rv)$ is equivalent to the value of $rv$ before the construction                                                                                                                                                                                                          |
|              | $rv$ 's state is unspecified [ <i>Note: <math>rv</math> must still meet the requirements of the library component that is using it. The operations listed in those requirements must work as specified whether <math>rv</math> has been moved from or not. — end note</i> ] |

Table 26 — *Cpp17CopyConstructible* requirements (in addition to *Cpp17MoveConstructible*)

| Expression  | Post-condition                                            |
|-------------|-----------------------------------------------------------|
| $T\ u = v;$ | the value of $v$ is unchanged and is equivalent to $u$    |
| $T(v)$      | the value of $v$ is unchanged and is equivalent to $T(v)$ |

Table 27 — *Cpp17MoveAssignable* requirements

| Expression                                                                                                                                                                                                                                                                                                                                                 | Return type         | Return value   | Post-condition                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>t = rv</code>                                                                                                                                                                                                                                                                                                                                        | <code>T&amp;</code> | <code>t</code> | If <code>t</code> and <code>rv</code> do not refer to the same object, <code>t</code> is equivalent to the value of <code>rv</code> before the assignment |
| <code>rv</code> 's state is unspecified. [Note: <code>rv</code> must still meet the requirements of the library component that is using it, whether or not <code>t</code> and <code>rv</code> refer to the same object. The operations listed in those requirements must work as specified whether <code>rv</code> has been moved from or not. — end note] |                     |                |                                                                                                                                                           |

Table 28 — *Cpp17CopyAssignable* requirements (in addition to *Cpp17MoveAssignable*)

| Expression         | Return type         | Return value   | Post-condition                                                                            |
|--------------------|---------------------|----------------|-------------------------------------------------------------------------------------------|
| <code>t = v</code> | <code>T&amp;</code> | <code>t</code> | <code>t</code> is equivalent to <code>v</code> , the value of <code>v</code> is unchanged |

Table 29 — *Cpp17Destructible* requirements

| Expression          | Post-condition                                                                   |
|---------------------|----------------------------------------------------------------------------------|
| <code>u.~T()</code> | All resources owned by <code>u</code> are reclaimed, no exception is propagated. |

### 20.5.3.2 Swappable requirements

[swappable.requirements]

- <sup>1</sup> This subclause provides definitions for swappable types and expressions. In these definitions, let `t` denote an expression of type `T`, and let `u` denote an expression of type `U`.
- <sup>2</sup> An object `t` is *swappable with* an object `u` if and only if:
  - (2.1) — the expressions `swap(t, u)` and `swap(u, t)` are valid when evaluated in the context described below, and
  - (2.2) — these expressions have the following effects:
    - (2.2.1) — the object referred to by `t` has the value originally held by `u` and
    - (2.2.2) — the object referred to by `u` has the value originally held by `t`.
- <sup>3</sup> The context in which `swap(t, u)` and `swap(u, t)` are evaluated shall ensure that a binary non-member function named “swap” is selected via overload resolution (16.3) on a candidate set that includes:
  - (3.1) — the two `swap` function templates defined in `<utility>` (24.2) and
  - (3.2) — the lookup set produced by argument-dependent lookup (6.4.2).

[Note: If `T` and `U` are both fundamental types or arrays of fundamental types and the declarations from the header `<utility>` are in scope, the overall lookup set described above is equivalent to that of the qualified name lookup applied to the expression `std::swap(t, u)` or `std::swap(u, t)` as appropriate. — end note]

[Note: It is unspecified whether a library component that has a swappable requirement includes the header `<utility>` to ensure an appropriate evaluation context. — end note]

- <sup>4</sup> An rvalue or lvalue `t` is *swappable* if and only if `t` is swappable with any rvalue or lvalue, respectively, of type `T`.
- <sup>5</sup> A type `X` satisfying any of the iterator requirements (28.2) satisfies the *Cpp17ValueSwappable* requirements if, for any dereferenceable object `x` of type `X`, `*x` is swappable.

[Example: User code can ensure that the evaluation of `swap` calls is performed in an appropriate context under the various conditions as follows:

```
#include <utility>
```

```

// Requires: std::forward<T>(t) shall be swappable with std::forward<U>(u).
template<class T, class U>
void value_swap(T&& t, U&& u) {
 using std::swap;
 swap(std::forward<T>(t), std::forward<U>(u)); // OK: uses “swappable with” conditions
 // for rvalues and lvalues
}

// Requires: lvalues of T shall be swappable.
template<class T>
void lv_swap(T& t1, T& t2) {
 using std::swap;
 swap(t1, t2); // OK: uses swappable conditions for lvalues of type T
}

namespace N {
 struct A { int m; };
 struct Proxy { A* a; };
 Proxy proxy(A& a) { return Proxy{ &a }; }

 void swap(A& x, Proxy p) {
 std::swap(x.m, p.a->m); // OK: uses context equivalent to swappable
 // conditions for fundamental types
 }
 void swap(Proxy p, A& x) { swap(x, p); } // satisfy symmetry constraint
}

int main() {
 int i = 1, j = 2;
 lv_swap(i, j);
 assert(i == 2 && j == 1);

 N::A a1 = { 5 }, a2 = { -5 };
 value_swap(a1, proxy(a2));
 assert(a1.m == -5 && a2.m == 5);
}

```

— end example]

### 20.5.3.3 *Cpp17NullablePointer* requirements [nullablepointer.requirements]

<sup>1</sup> A *Cpp17NullablePointer* type is a pointer-like type that supports null values. A type P satisfies the *Cpp17NullablePointer* requirements if:

- (1.1) — P satisfies the *Cpp17EqualityComparable*, *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, *Cpp17CopyAssignable*, and *Cpp17Destructible* requirements,
  - (1.2) — lvalues of type P are swappable (20.5.3.2),
  - (1.3) — the expressions shown in Table 30 are valid and have the indicated semantics, and
  - (1.4) — P satisfies all the other requirements of this subclause.
- <sup>2</sup> A value-initialized object of type P produces the null value of the type. The null value shall be equivalent only to itself. A default-initialized object of type P may have an indeterminate value. [Note: Operations involving indeterminate values may cause undefined behavior. — end note]
- <sup>3</sup> An object p of type P can be contextually converted to bool (Clause 7). The effect shall be as if p != nullptr had been evaluated in place of p.
- <sup>4</sup> No operation which is part of the *Cpp17NullablePointer* requirements shall exit via an exception.
- <sup>5</sup> In Table 30, u denotes an identifier, t denotes a non-const lvalue of type P, a and b denote values of type (possibly const) P, and np denotes a value of type (possibly const) std::nullptr\_t.

### 20.5.3.4 *Cpp17Hash* requirements [hash.requirements]

<sup>1</sup> A type H meets the *Cpp17Hash* requirements if:

- (1.1) — it is a function object type (24.14),

Table 30 — *Cpp17NullablePointer* requirements

| Expression                                      | Return type                                   | Operational semantics                         |
|-------------------------------------------------|-----------------------------------------------|-----------------------------------------------|
| <code>P u(np);</code><br><code>P u = np;</code> |                                               | <i>Ensures:</i> <code>u == nullptr</code>     |
| <code>P(np)</code>                              |                                               | <i>Ensures:</i> <code>P(np) == nullptr</code> |
| <code>t = np</code>                             | <code>P&amp;</code>                           | <i>Ensures:</i> <code>t == nullptr</code>     |
| <code>a != b</code>                             | contextually convertible to <code>bool</code> | <code>!(a == b)</code>                        |
| <code>a == np</code><br><code>np == a</code>    | contextually convertible to <code>bool</code> | <code>a == P()</code>                         |
| <code>a != np</code><br><code>np != a</code>    | contextually convertible to <code>bool</code> | <code>!(a == np)</code>                       |

- (1.2) — it satisfies the *Cpp17CopyConstructible* (Table 26) and *Cpp17Destructible* (Table 29) requirements, and
- (1.3) — the expressions shown in Table 31 are valid and have the indicated semantics.
- <sup>2</sup> Given `Key` is an argument type for function objects of type `H`, in Table 31 `h` is a value of type (possibly `const`) `H`, `u` is an lvalue of type `Key`, and `k` is a value of a type convertible to (possibly `const`) `Key`.

Table 31 — *Cpp17Hash* requirements

| Expression        | Return type         | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>h(k)</code> | <code>size_t</code> | The value returned shall depend only on the argument <code>k</code> for the duration of the program. [ <i>Note:</i> Thus all evaluations of the expression <code>h(k)</code> with the same value for <code>k</code> yield the same result for a given execution of the program. — <i>end note</i> ]<br>[ <i>Note:</i> For two different values <code>t1</code> and <code>t2</code> , the probability that <code>h(t1)</code> and <code>h(t2)</code> compare equal should be very small, approaching <code>1.0 / numeric_limits&lt;size_t&gt;::max()</code> . — <i>end note</i> ] |
| <code>h(u)</code> | <code>size_t</code> | Shall not modify <code>u</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

### 20.5.3.5 *Cpp17Allocator* requirements

[allocator.requirements]

- <sup>1</sup> The library describes a standard set of requirements for *allocators*, which are class-type objects that encapsulate the information about an allocation model. This information includes the knowledge of pointer types, the type of their difference, the type of the size of objects in this allocation model, as well as the memory allocation and deallocation primitives for it. All of the string types (Clause 25), containers (Clause 27) (except array), string buffers and string streams (Clause 31), and `match_results` (Clause 32) are parameterized in terms of allocators.
- <sup>2</sup> The class template `allocator_traits` (24.10.9) supplies a uniform interface to all allocator types. Table 32 describes the types manipulated through allocators. Table 33 describes the requirements on allocator types and thus on types used to instantiate `allocator_traits`. A requirement is optional if the last column of Table 33 specifies a default for a given expression. Within the standard library `allocator_traits` template, an optional requirement that is not supplied by an allocator is replaced by the specified default expression. A user specialization of `allocator_traits` may provide different defaults and may provide defaults for different requirements than the primary template. Within Tables 32 and 33, the use of `move` and `forward` always refers to `std::move` and `std::forward`, respectively.

Table 32 — Descriptive variable definitions

| Variable             | Definition                                                |
|----------------------|-----------------------------------------------------------|
| <code>T, U, C</code> | any <i>cv</i> -unqualified object type (6.7)              |
| <code>X</code>       | an allocator class for type <code>T</code>                |
| <code>Y</code>       | the corresponding allocator class for type <code>U</code> |
| <code>XX</code>      | the type <code>allocator_traits&lt;X&gt;</code>           |

Table 32 — Descriptive variable definitions (continued)

| Variable  | Definition                                                                                                                                                                                                         |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| YY        | the type <code>allocator_traits&lt;Y&gt;</code>                                                                                                                                                                    |
| a, a1, a2 | lvalues of type X                                                                                                                                                                                                  |
| u         | the name of a variable being declared                                                                                                                                                                              |
| b         | a value of type Y                                                                                                                                                                                                  |
| c         | a pointer of type <code>C*</code> through which indirection is valid                                                                                                                                               |
| p         | a value of type <code>XX::pointer</code> , obtained by calling <code>a1.allocate</code> , where <code>a1 == a</code>                                                                                               |
| q         | a value of type <code>XX::const_pointer</code> obtained by conversion from a value p.                                                                                                                              |
| r         | a value of type <code>T&amp;</code> obtained by the expression <code>*p</code> .                                                                                                                                   |
| w         | a value of type <code>XX::void_pointer</code> obtained by conversion from a value p                                                                                                                                |
| x         | a value of type <code>XX::const_void_pointer</code> obtained by conversion from a value q or a value w                                                                                                             |
| y         | a value of type <code>XX::const_void_pointer</code> obtained by conversion from a result value of <code>YY::allocate</code> , or else a value of type (possibly <code>const</code> ) <code>std::nullptr_t</code> . |
| n         | a value of type <code>XX::size_type</code> .                                                                                                                                                                       |
| Args      | a template parameter pack                                                                                                                                                                                          |
| args      | a function parameter pack with the pattern <code>Args&amp;&amp;</code>                                                                                                                                             |

Table 33 — *Cpp17Allocator* requirements

| Expression                                                               | Return type           | Assertion/note<br>pre-/post-condition                                                                                                                                                                                                              | Default                                                                 |
|--------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <code>X::pointer</code>                                                  |                       |                                                                                                                                                                                                                                                    | <code>T*</code>                                                         |
| <code>X::const_pointer</code>                                            |                       | <code>X::pointer</code> is convertible to <code>X::const_pointer</code>                                                                                                                                                                            | <code>pointer_traits&lt;X::pointer&gt;::rebind&lt;const T&gt;</code>    |
| <code>X::void_pointer</code><br><code>Y::void_pointer</code>             |                       | <code>X::pointer</code> is convertible to <code>X::void_pointer</code> .<br><code>X::void_pointer</code> and <code>Y::void_pointer</code> are the same type.                                                                                       | <code>pointer_traits&lt;X::pointer&gt;::rebind&lt;void&gt;</code>       |
| <code>X::const_void_pointer</code><br><code>Y::const_void_pointer</code> |                       | <code>X::pointer</code> , <code>X::const_pointer</code> , and <code>X::void_pointer</code> are convertible to <code>X::const_void_pointer</code> .<br><code>X::const_void_pointer</code> and <code>Y::const_void_pointer</code> are the same type. | <code>pointer_traits&lt;X::pointer&gt;::rebind&lt;const void&gt;</code> |
| <code>X::value_type</code>                                               | Identical to T        |                                                                                                                                                                                                                                                    |                                                                         |
| <code>X::size_type</code>                                                | unsigned integer type | a type that can represent the size of the largest object in the allocation model.                                                                                                                                                                  | <code>make_unsigned_t&lt;X::difference_type&gt;</code>                  |

Table 33 — *Cpp17Allocator* requirements (continued)

| Expression                                                                               | Return type                   | Assertion/note<br>pre-/post-condition                                                                                                                                                                                                                                                | Default                                                                  |
|------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <code>X::difference_type</code>                                                          | signed integer type           | a type that can represent the difference between any two pointers in the allocation model.                                                                                                                                                                                           | <code>pointer_traits&lt;X::pointer&gt;::difference_type</code>           |
| <code>typename</code><br><code>X::template</code><br><code>rebind&lt;U&gt;::other</code> | Y                             | For all U (including T),<br><code>Y::template</code><br><code>rebind&lt;T&gt;::other</code> is X.                                                                                                                                                                                    | See Note A, below.                                                       |
| <code>*p</code>                                                                          | T&                            |                                                                                                                                                                                                                                                                                      |                                                                          |
| <code>*q</code>                                                                          | const T&                      | <code>*q</code> refers to the same object as <code>*p</code>                                                                                                                                                                                                                         |                                                                          |
| <code>p-&gt;m</code>                                                                     | type of <code>T::m</code>     | <i>Requires:</i> <code>(*p).m</code> is well-defined. equivalent to <code>(*p).m</code>                                                                                                                                                                                              |                                                                          |
| <code>q-&gt;m</code>                                                                     | type of <code>T::m</code>     | <i>Requires:</i> <code>(*q).m</code> is well-defined. equivalent to <code>(*q).m</code>                                                                                                                                                                                              |                                                                          |
| <code>static_cast&lt;X::pointer&gt;(w)</code>                                            | <code>X::pointer</code>       | <code>static_cast&lt;X::pointer&gt;(w) == p</code>                                                                                                                                                                                                                                   |                                                                          |
| <code>static_cast&lt;X::const_pointer&gt;(x)</code>                                      | <code>X::const_pointer</code> | <code>static_cast&lt;X::const_pointer&gt;(x) == q</code>                                                                                                                                                                                                                             |                                                                          |
| <code>pointer_traits&lt;X::pointer&gt;::pointer_to(r)</code>                             | <code>X::pointer</code>       | same as p                                                                                                                                                                                                                                                                            |                                                                          |
| <code>a.allocate(n)</code>                                                               | <code>X::pointer</code>       | Memory is allocated for n objects of type T but objects are not constructed. <code>allocate</code> may throw an appropriate exception. <sup>176</sup> [ <i>Note:</i> If <code>n == 0</code> , the return value is unspecified. — <i>end note</i> ]                                   |                                                                          |
| <code>a.allocate(n, y)</code>                                                            | <code>X::pointer</code>       | Same as <code>a.allocate(n)</code> . The use of <code>y</code> is unspecified, but it is intended as an aid to locality.                                                                                                                                                             | <code>a.allocate(n)</code>                                               |
| <code>a.deallocate(p,n)</code>                                                           | (not used)                    | <i>Requires:</i> p shall be a value returned by an earlier call to <code>allocate</code> that has not been invalidated by an intervening call to <code>deallocate</code> . n shall match the value passed to <code>allocate</code> to obtain this memory.<br><i>Throws:</i> Nothing. |                                                                          |
| <code>a.max_size()</code>                                                                | <code>X::size_type</code>     | the largest value that can meaningfully be passed to <code>X::allocate()</code>                                                                                                                                                                                                      | <code>numeric_limits&lt;size_type&gt;::max() / sizeof(value_type)</code> |

176) It is intended that `a.allocate` be an efficient means of allocating a single object of type T, even when `sizeof(T)` is small. That is, there is no need for a container to maintain its own free list.

Table 33 — *Cpp17Allocator* requirements (continued)

| Expression                                                          | Return type                                                                    | Assertion/note<br>pre-/post-condition                                                                                                                                                                                  | Default                                                                                        |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>a1 == a2</code>                                               | <code>bool</code>                                                              | returns <code>true</code> only if storage allocated from each can be deallocated via the other.<br><code>operator==</code> shall be reflexive, symmetric, and transitive, and shall not exit via an exception.         |                                                                                                |
| <code>a1 != a2</code>                                               | <code>bool</code>                                                              | same as <code>!(a1 == a2)</code>                                                                                                                                                                                       |                                                                                                |
| <code>a == b</code>                                                 | <code>bool</code>                                                              | same as <code>a ==</code><br><code>Y::rebind&lt;T&gt;::other(b)</code>                                                                                                                                                 |                                                                                                |
| <code>a != b</code>                                                 | <code>bool</code>                                                              | same as <code>!(a == b)</code>                                                                                                                                                                                         |                                                                                                |
| <code>X u(a);</code><br><code>X u = a;</code>                       |                                                                                | Shall not exit via an exception.<br><i>Ensures:</i> <code>u == a</code>                                                                                                                                                |                                                                                                |
| <code>X u(b);</code>                                                |                                                                                | Shall not exit via an exception.<br><i>Ensures:</i> <code>Y(u) == b</code> , <code>u == X(b)</code>                                                                                                                    |                                                                                                |
| <code>X u(std::move(a));</code><br><code>X u = std::move(a);</code> |                                                                                | Shall not exit via an exception.<br><i>Ensures:</i> The value of <code>a</code> is unchanged and is equal to <code>u</code> .                                                                                          |                                                                                                |
| <code>X u(std::move(b));</code>                                     |                                                                                | Shall not exit via an exception.<br><i>Ensures:</i> <code>u</code> is equal to the prior value of <code>X(b)</code> .                                                                                                  |                                                                                                |
| <code>a.construct(c, args)</code>                                   | (not used)                                                                     | <i>Effects:</i> Constructs an object of type <code>C</code> at <code>c</code>                                                                                                                                          | <code>::new</code><br><code>((void*)c)</code><br><code>C(forward&lt;Args&gt;(args)...) </code> |
| <code>a.destroy(c)</code>                                           | (not used)                                                                     | <i>Effects:</i> Destroys the object at <code>c</code>                                                                                                                                                                  | <code>c-&gt;~C()</code>                                                                        |
| <code>a.select_on_container_copy_construction()</code>              | <code>X</code>                                                                 | Typically returns either <code>a</code> or <code>X()</code>                                                                                                                                                            | <code>return a;</code>                                                                         |
| <code>X::propagate_on_container_copy_assignment</code>              | Identical to or derived from <code>true_type</code> or <code>false_type</code> | <code>true_type</code> only if an allocator of type <code>X</code> should be copied when the client container is copy-assigned. See Note B, below.                                                                     | <code>false_type</code>                                                                        |
| <code>X::propagate_on_container_move_assignment</code>              | Identical to or derived from <code>true_type</code> or <code>false_type</code> | <code>true_type</code> only if an allocator of type <code>X</code> should be moved when the client container is move-assigned. See Note B, below.                                                                      | <code>false_type</code>                                                                        |
| <code>X::propagate_on_container_swap</code>                         | Identical to or derived from <code>true_type</code> or <code>false_type</code> | <code>true_type</code> only if an allocator of type <code>X</code> should be swapped when the client container is swapped. See Note B, below.                                                                          | <code>false_type</code>                                                                        |
| <code>X::is_always_equal</code>                                     | Identical to or derived from <code>true_type</code> or <code>false_type</code> | <code>true_type</code> only if the expression <code>a1 == a2</code> is guaranteed to be <code>true</code> for any two (possibly <code>const</code> ) values <code>a1</code> , <code>a2</code> of type <code>X</code> . | <code>is_empty&lt;X&gt;::type</code>                                                           |

<sup>3</sup> Note A: The member class template `rebind` in the table above is effectively a typedef template. [*Note:* In general, if the name `Allocator` is bound to `SomeAllocator<T>`, then `Allocator::rebind<U>::other` is the same type as `SomeAllocator<U>`, where `SomeAllocator<T>::value_type` is `T` and `SomeAllocator<U>::value_type` is `U`. — *end note*] If `Allocator` is a class template instantiation of the form `SomeAllocator<T`,

`Args>`, where `Args` is zero or more type arguments, and `Allocator` does not supply a `rebind` member template, the standard `allocator_traits` template uses `SomeAllocator<U, Args>` in place of `Allocator::rebind<U>::other` by default. For allocator types that are not template instantiations of the above form, no default is provided.

- 4 Note B: If `X::propagate_on_container_copy_assignment::value` is true, `X` shall satisfy the *Cpp17CopyAssignable* requirements (Table 28) and the copy operation shall not throw exceptions. If `X::propagate_on_container_move_assignment::value` is true, `X` shall satisfy the *Cpp17MoveAssignable* requirements (Table 27) and the move operation shall not throw exceptions. If `X::propagate_on_container_swap::value` is true, lvalues of type `X` shall be swappable (20.5.3.2) and the `swap` operation shall not throw exceptions.
- 5 An allocator type `X` shall satisfy the *Cpp17CopyConstructible* requirements (Table 26). The `X::pointer`, `X::const_pointer`, `X::void_pointer`, and `X::const_void_pointer` types shall satisfy the *Cpp17NullablePointer* requirements (Table 30). No constructor, comparison function, copy operation, move operation, or swap operation on these pointer types shall exit via an exception. `X::pointer` and `X::const_pointer` shall also satisfy the requirements for a random access iterator (28.2.7) and of a contiguous iterator (28.2.1).
- 6 Let `x1` and `x2` denote objects of (possibly different) types `X::void_pointer`, `X::const_void_pointer`, `X::pointer`, or `X::const_pointer`. Then, `x1` and `x2` are *equivalently-valued* pointer values, if and only if both `x1` and `x2` can be explicitly converted to the two corresponding objects `px1` and `px2` of type `X::const_pointer`, using a sequence of `static_casts` using only these four types, and the expression `px1 == px2` evaluates to true.

- 7 Let `w1` and `w2` denote objects of type `X::void_pointer`. Then for the expressions

```
w1 == w2
w1 != w2
```

either or both objects may be replaced by an equivalently-valued object of type `X::const_void_pointer` with no change in semantics.

- 8 Let `p1` and `p2` denote objects of type `X::pointer`. Then for the expressions

```
p1 == p2
p1 != p2
p1 < p2
p1 <= p2
p1 >= p2
p1 > p2
p1 - p2
```

either or both objects may be replaced by an equivalently-valued object of type `X::const_pointer` with no change in semantics.

- 9 An allocator may constrain the types on which it can be instantiated and the arguments for which its `construct` or `destroy` members may be called. If a type cannot be used with a particular allocator, the allocator class or the call to `construct` or `destroy` may fail to instantiate.

[*Example:* The following is an allocator class template supporting the minimal interface that satisfies the requirements of Table 33:

```
template<class Tp>
struct SimpleAllocator {
 typedef Tp value_type;
 SimpleAllocator(ctor args);

 template<class T> SimpleAllocator(const SimpleAllocator<T>& other);

 [[nodiscard]] Tp* allocate(std::size_t n);
 void deallocate(Tp* p, std::size_t n);
};

template<class T, class U>
bool operator==(const SimpleAllocator<T>&, const SimpleAllocator<U>&);
template<class T, class U>
bool operator!=(const SimpleAllocator<T>&, const SimpleAllocator<U>&);
```

— *end example*]



- 10 If the alignment associated with a specific over-aligned type is not supported by an allocator, instantiation of the allocator for that type may fail. The allocator also may silently ignore the requested alignment. [Note: Additionally, the member function `allocate` for that type may fail by throwing an object of type `bad_alloc`. — *end note*]

#### 20.5.3.5.1 Allocator completeness requirements [allocator.requirements.completeness]

- 1 If `X` is an allocator class for type `T`, `X` additionally satisfies the allocator completeness requirements if, whether or not `T` is a complete type:
- (1.1) — `X` is a complete type, and
  - (1.2) — all the member types of `allocator_traits<X>` (24.10.9) other than `value_type` are complete types.

### 20.5.4 Constraints on programs [constraints]

#### 20.5.4.1 Overview [constraints.overview]

- 1 Subclause 20.5.4 describes restrictions on C++ programs that use the facilities of the C++ standard library. The following subclauses specify constraints on the program's use of namespaces (20.5.4.2.1), its use of various reserved names (20.5.4.3), its use of headers (20.5.4.4), its use of standard library classes as base classes (20.5.4.5), its definitions of replacement functions (20.5.4.6), and its installation of handler functions during execution (20.5.4.7).

#### 20.5.4.2 Namespace use [namespace.constraints]

##### 20.5.4.2.1 Namespace `std` [namespace.std]

- 1 Unless otherwise specified, the behavior of a C++ program is undefined if it adds declarations or definitions to namespace `std` or to a namespace within namespace `std`.
- 2 Unless explicitly prohibited, a program may add a template specialization for any standard library class template to namespace `std` provided that (a) the added declaration depends on at least one program-defined type and (b) the specialization meets the standard library requirements for the original template.<sup>177</sup>
- 3 The behavior of a C++ program is undefined if it declares an explicit or partial specialization of any standard library variable template, except where explicitly permitted by the specification of that variable template.
- 4 The behavior of a C++ program is undefined if it declares
- (4.1) — an explicit specialization of any member function of a standard library class template, or
  - (4.2) — an explicit specialization of any member function template of a standard library class or class template, or
  - (4.3) — an explicit or partial specialization of any member class template of a standard library class or class template, or
  - (4.4) — a deduction guide for any standard library class template.
- 5 A program may explicitly instantiate a class template defined in the standard library only if the declaration (a) depends on the name of at least one program-defined type and (b) the instantiation meets the standard library requirements for the original template.
- 6 Let *F* denote a standard library function (20.5.5.4), a standard library static member function, or an instantiation of a standard library function template. Unless *F* is designated an *addressable function*, the behavior of a C++ program is unspecified (possibly ill-formed) if it explicitly or implicitly attempts to form a pointer to *F*. [Note: Possible means of forming such pointers include application of the unary `&` operator (8.5.2.1), `addressof` (24.10.11.1), or a function-to-pointer standard conversion (7.3). — *end note*] Moreover, the behavior of a C++ program is unspecified (possibly ill-formed) if it attempts to form a reference to *F* or if it attempts to form a pointer-to-member designating either a standard library non-static member function (20.5.5.5) or an instantiation of a standard library member function template.
- 7 Other than in namespace `std` or in a namespace within namespace `std`, a program may provide an overload for any library function template designated as a *customization point*, provided that (a) the overload's declaration depends on at least one user-defined type and (b) the overload meets the standard library requirements for

<sup>177</sup>) Any library code that instantiates other library templates must be prepared to work adequately with any user-supplied specialization that meets the minimum requirements of this document.

the customization point.<sup>178</sup> [*Note: This permits a (qualified or unqualified) call to the customization point to invoke the most appropriate overload for the given arguments. — end note*]

- <sup>8</sup> A translation unit shall not declare namespace `std` to be an inline namespace (10.3.1).

#### 20.5.4.2.2 Namespace `posix` [namespace.posix]

- <sup>1</sup> The behavior of a C++ program is undefined if it adds declarations or definitions to namespace `posix` or to a namespace within namespace `posix` unless otherwise specified. The namespace `posix` is reserved for use by ISO/IEC 9945 and other POSIX standards.

#### 20.5.4.2.3 Namespaces for future standardization [namespace.future]

- <sup>1</sup> Top level namespaces with a name starting with `std` and followed by a non-empty sequence of digits are reserved for future standardization. The behavior of a C++ program is undefined if it adds declarations or definitions to such a namespace. [*Example: The top level namespace `std2` is reserved for use by future revisions of this International Standard. — end example*]

#### 20.5.4.3 Reserved names [reserved.names]

- <sup>1</sup> The C++ standard library reserves the following kinds of names:

- (1.1) — macros
- (1.2) — global names
- (1.3) — names with external linkage

- <sup>2</sup> If a program declares or defines a name in a context where it is reserved, other than as explicitly allowed by this Clause, its behavior is undefined.

##### 20.5.4.3.1 Zombie names [zombie.names]

- <sup>1</sup> In namespace `std`, the following names are reserved for previous standardization:

- (1.1) — `auto_ptr`,
- (1.2) — `auto_ptr_ref`,
- (1.3) — `binary_function`,
- (1.4) — `binary_negate`,
- (1.5) — `bind1st`,
- (1.6) — `bind2nd`,
- (1.7) — `binder1st`,
- (1.8) — `binder2nd`,
- (1.9) — `const_mem_fun1_ref_t`,
- (1.10) — `const_mem_fun1_t`,
- (1.11) — `const_mem_fun_ref_t`,
- (1.12) — `const_mem_fun_t`,
- (1.13) — `get_temporary_buffer`,
- (1.14) — `get_unexpected`,
- (1.15) — `gets`,
- (1.16) — `is_literal_type`,
- (1.17) — `is_literal_type_v`,
- (1.18) — `mem_fun1_ref_t`,
- (1.19) — `mem_fun1_t`,
- (1.20) — `mem_fun_ref_t`,

---

<sup>178</sup> Any library customization point must be prepared to work adequately with any user-defined overload that meets the minimum requirements of this document. Therefore an implementation may elect, under the as-if rule (6.8.1), to provide any customization point in the form of an instantiated function object (24.14) even though the customization point's specification is in the form of a function template. The template parameters of each such function object and the function parameters and return type of the object's `operator()` must match those of the corresponding customization point's specification.

- (1.21) — `mem_fun_ref`,
- (1.22) — `mem_fun_t`,
- (1.23) — `mem_fun`,
- (1.24) — `not1`,
- (1.25) — `not2`,
- (1.26) — `pointer_to_binary_function`,
- (1.27) — `pointer_to_unary_function`,
- (1.28) — `ptr_fun`,
- (1.29) — `random_shuffle`,
- (1.30) — `raw_storage_iterator`,
- (1.31) — `result_of`,
- (1.32) — `result_of_t`,
- (1.33) — `return_temporary_buffer`,
- (1.34) — `set_unexpected`,
- (1.35) — `unary_function`,
- (1.36) — `unary_negate`,
- (1.37) — `uncaught_exception`,
- (1.38) — `unexpected`, and
- (1.39) — `unexpected_handler`.

<sup>2</sup> The following names are reserved as member types for previous standardization, and may not be used as a name for object-like macros in portable code:

- (2.1) — `argument_type`,
- (2.2) — `first_argument_type`,
- (2.3) — `io_state`,
- (2.4) — `open_mode`,
- (2.5) — `second_argument_type`, and
- (2.6) — `seek_dir`,

<sup>3</sup> The name `stoss` is reserved as a member function for previous standardization, and may not be used as a name for function-like macros in portable code.

<sup>4</sup> The header names `<ccomplex>`, `<ciso646>`, `<cstdalign>`, `<cstdbool>`, and `<ctgmath>` are reserved for previous standardization.

#### 20.5.4.3.2 Macro names

[**macro.names**]

<sup>1</sup> A translation unit that includes a standard library header shall not `#define` or `#undef` names declared in any standard library header.

<sup>2</sup> A translation unit shall not `#define` or `#undef` names lexically identical to keywords, to the identifiers listed in Table 4, or to the *attribute-tokens* described in 10.6.

#### 20.5.4.3.3 External linkage

[**extern.names**]

<sup>1</sup> Each name declared as an object with external linkage in a header is reserved to the implementation to designate that library object with external linkage,<sup>179</sup> both in namespace `std` and in the global namespace.

<sup>2</sup> Each global function signature declared with external linkage in a header is reserved to the implementation to designate that function signature with external linkage.<sup>180</sup>

<sup>3</sup> Each name from the C standard library declared with external linkage is reserved to the implementation for use as a name with **extern "C"** linkage, both in namespace `std` and in the global namespace.

<sup>179</sup> The list of such reserved names includes `errno`, declared or defined in `<cerrno>`.

<sup>180</sup> The list of such reserved function signatures with external linkage includes `setjmp(jmp_buf)`, declared or defined in `<setjmp>`, and `va_end(va_list)`, declared or defined in `<stdarg>`.

- <sup>4</sup> Each function signature from the C standard library declared with external linkage is reserved to the implementation for use as a function signature with both `extern "C"` and `extern "C++"` linkage,<sup>181</sup> or as a name of namespace scope in the global namespace.

#### 20.5.4.3.4 Types [extern.types]

- <sup>1</sup> For each type T from the C standard library,<sup>182</sup> the types `::T` and `std::T` are reserved to the implementation and, when defined, `::T` shall be identical to `std::T`.

#### 20.5.4.3.5 User-defined literal suffixes [usrлит.suffix]

- <sup>1</sup> Literal suffix identifiers (16.5.8) that do not start with an underscore are reserved for future standardization.

#### 20.5.4.4 Headers [alt.headers]

- <sup>1</sup> If a file with a name equivalent to the derived file name for one of the C++ standard library headers is not provided as part of the implementation, and a file with that name is placed in any of the standard places for a source file to be included (19.2), the behavior is undefined.

#### 20.5.4.5 Derived classes [derived.classes]

- <sup>1</sup> Virtual member function signatures defined for a base class in the C++ standard library may be overridden in a derived class defined in the program (13.3).

#### 20.5.4.6 Replacement functions [replacement.functions]

- <sup>1</sup> [Clause 21](#) through [Clause 34](#) and [Annex D](#) describe the behavior of numerous functions defined by the C++ standard library. Under some circumstances, however, certain of these function descriptions also apply to replacement functions defined in the program (20.3).
- <sup>2</sup> A C++ program may provide the definition for any of the following dynamic memory allocation function signatures declared in header `<new>` (6.6.4.4, 21.6):

```
operator new(std::size_t)
operator new(std::size_t, std::align_val_t)
operator new(std::size_t, const std::nothrow_t&)
operator new(std::size_t, std::align_val_t, const std::nothrow_t&)

operator delete(void*)
operator delete(void*, std::size_t)
operator delete(void*, std::align_val_t)
operator delete(void*, std::size_t, std::align_val_t)
operator delete(void*, const std::nothrow_t&)
operator delete(void*, std::align_val_t, const std::nothrow_t&)

operator new[](std::size_t)
operator new[](std::size_t, std::align_val_t)
operator new[](std::size_t, const std::nothrow_t&)
operator new[](std::size_t, std::align_val_t, const std::nothrow_t&)

operator delete[](void*)
operator delete[](void*, std::size_t)
operator delete[](void*, std::align_val_t)
operator delete[](void*, std::size_t, std::align_val_t)
operator delete[](void*, const std::nothrow_t&)
operator delete[](void*, std::align_val_t, const std::nothrow_t&)
```

- <sup>3</sup> The program's definitions are used instead of the default versions supplied by the implementation (21.6). Such replacement occurs prior to program startup (6.2, 6.8.3). The program's declarations shall not be specified as `inline`. No diagnostic is required.

#### 20.5.4.7 Handler functions [handler.functions]

- <sup>1</sup> The C++ standard library provides a default version of the following handler function ([Clause 21](#)):

(1.1) — `terminate_handler`

<sup>181</sup>) The function signatures declared in `<cuchar>`, `<wchar>`, and `<cwctype>` are always reserved, notwithstanding the restrictions imposed in subclause 4.5.1 of Amendment 1 to the C Standard for these headers.

<sup>182</sup>) These types are `clock_t`, `div_t`, `FILE`, `fpos_t`, `lconv`, `ldiv_t`, `mbstate_t`, `ptrdiff_t`, `sig_atomic_t`, `size_t`, `time_t`, `tm`, `va_list`, `wctrans_t`, `wctype_t`, and `wint_t`.

2 A C++ program may install different handler functions during execution, by supplying a pointer to a function defined in the program or the library as an argument to (respectively):

(2.1) — `set_new_handler`

(2.2) — `set_terminate`

See also subclauses 21.6.3, Storage allocation errors, and 21.9, Exception handling.

3 A C++ program can get a pointer to the current handler function by calling the following functions:

(3.1) — `get_new_handler`

(3.2) — `get_terminate`

4 Calling the `set_*` and `get_*` functions shall not incur a data race. A call to any of the `set_*` functions shall synchronize with subsequent calls to the same `set_*` function and to the corresponding `get_*` function.

#### 20.5.4.8 Other functions [res.on.functions]

1 In certain cases (replacement functions, handler functions, operations on types used to instantiate standard library template components), the C++ standard library depends on components supplied by a C++ program. If these components do not meet their requirements, this document places no requirements on the implementation.

2 In particular, the effects are undefined in the following cases:

(2.1) — for replacement functions (21.6.2), if the installed replacement function does not implement the semantics of the applicable *Required behavior*: paragraph.

(2.2) — for handler functions (21.6.3.3, 21.9.4.1), if the installed handler function does not implement the semantics of the applicable *Required behavior*: paragraph

(2.3) — for types used as template arguments when instantiating a template component, if the operations on the type do not implement the semantics of the applicable *Requirements* subclause (20.5.3.5, 27.2, 28.2, 29.3, 30.3). Operations on such types can report a failure by throwing an exception unless otherwise specified.

(2.4) — if any replacement function or handler function or destructor operation exits via an exception, unless specifically allowed in the applicable *Required behavior*: paragraph.

(2.5) — if an incomplete type (6.7) is used as a template argument when instantiating a template component or evaluating a concept, unless specifically allowed for that component.

#### 20.5.4.9 Function arguments [res.on.arguments]

1 Each of the following applies to all arguments to functions defined in the C++ standard library, unless explicitly stated otherwise.

(1.1) — If an argument to a function has an invalid value (such as a value outside the domain of the function or a pointer invalid for its intended use), the behavior is undefined.

(1.2) — If a function argument is described as being an array, the pointer actually passed to the function shall have a value such that all address computations and accesses to objects (that would be valid if the pointer did point to the first element of such an array) are in fact valid.

(1.3) — If a function argument binds to an rvalue reference parameter, the implementation may assume that this parameter is a unique reference to this argument. [*Note*: If the parameter is a generic parameter of the form `T&&` and an lvalue of type `A` is bound, the argument binds to an lvalue reference (17.9.2.1) and thus is not covered by the previous sentence. — *end note*] [*Note*: If a program casts an lvalue to an xvalue while passing that lvalue to a library function (e.g., by calling the function with the argument `std::move(x)`), the program is effectively asking that function to treat that lvalue as a temporary object. The implementation is free to optimize away aliasing checks which might be needed if the argument was an lvalue. — *end note*]

#### 20.5.4.10 Library object access [res.on.objects]

1 The behavior of a program is undefined if calls to standard library functions from different threads may introduce a data race. The conditions under which this may occur are specified in 20.5.5.9. [*Note*: Modifying an object of a standard library type that is shared between threads risks undefined behavior unless objects of that type are explicitly specified as being shareable without data races or the user supplies a locking mechanism. — *end note*]

- <sup>2</sup> If an object of a standard library type is accessed, and the beginning of the object's lifetime (6.6.3) does not happen before the access, or the access does not happen before the end of the object's lifetime, the behavior is undefined unless otherwise specified. [*Note*: This applies even to objects such as mutexes intended for thread synchronization. — *end note*]

#### 20.5.4.11 Requires paragraph [res.on.required]

- <sup>1</sup> Violation of any preconditions specified in a function's *Requires*: element results in undefined behavior unless the function's *Throws*: element specifies throwing an exception when the precondition is violated.
- <sup>2</sup> Violation of any preconditions specified in a function's *Expects*: element results in undefined behavior.

#### 20.5.4.12 Semantic requirements [res.on.requirements]

- <sup>1</sup> If the semantic requirements of a declaration's constraints (20.4.1.3) are not satisfied at the point of use, the program is ill-formed, no diagnostic required.

### 20.5.5 Conforming implementations [conforming]

#### 20.5.5.1 Overview [conforming.overview]

- <sup>1</sup> Subclause 20.5.5 describes the constraints upon, and latitude of, implementations of the C++ standard library.
- <sup>2</sup> An implementation's use of headers is discussed in 20.5.5.2, its use of macros in 20.5.5.3, non-member functions in 20.5.5.4, member functions in 20.5.5.5, data race avoidance in 20.5.5.9, access specifiers in 20.5.5.10, class derivation in 20.5.5.11, and exceptions in 20.5.5.12.

#### 20.5.5.2 Headers [res.on.headers]

- <sup>1</sup> A C++ header may include other C++ headers. A C++ header shall provide the declarations and definitions that appear in its synopsis. A C++ header shown in its synopsis as including other C++ headers shall provide the declarations and definitions that appear in the synopses of those other headers.
- <sup>2</sup> Certain types and macros are defined in more than one header. Every such entity shall be defined such that any header that defines it may be included after any other header that also defines it (6.2).
- <sup>3</sup> The C standard library headers (D.6) shall include only their corresponding C++ standard library header, as described in 20.5.1.2.

#### 20.5.5.3 Restrictions on macro definitions [res.on.macro.definitions]

- <sup>1</sup> The names and global function signatures described in 20.5.1.1 are reserved to the implementation.
- <sup>2</sup> All object-like macros defined by the C standard library and described in this Clause as expanding to integral constant expressions are also suitable for use in `#if` preprocessing directives, unless explicitly stated otherwise.

#### 20.5.5.4 Non-member functions [global.functions]

- <sup>1</sup> It is unspecified whether any non-member functions in the C++ standard library are defined as inline (10.1.6).
- <sup>2</sup> A call to a non-member function signature described in Clause 21 through Clause 34 and Annex D shall behave as if the implementation declared no additional non-member function signatures.<sup>183</sup>
- <sup>3</sup> An implementation shall not declare a non-member function signature with additional default arguments.
- <sup>4</sup> Unless otherwise specified, calls made by functions in the standard library to non-operator, non-member functions do not use functions from another namespace which are found through argument-dependent name lookup (6.4.2). [*Note*: The phrase “unless otherwise specified” applies to cases such as the swappable with requirements (20.5.3.2). The exception for overloaded operators allows argument-dependent lookup in cases like that of `ostream_iterator::operator=` (28.6.2.2):

*Effects*:

```
*out_stream << value;
if (delim != 0)
 *out_stream << delim;
return *this;
```

— *end note*]

<sup>183</sup>) A valid C++ program always calls the expected library non-member function. An implementation may also define additional non-member functions that would otherwise not be called by a valid C++ program.

**20.5.5.5 Member functions** [member.functions]

- <sup>1</sup> It is unspecified whether any member functions in the C++ standard library are defined as inline (10.1.6).
- <sup>2</sup> For a non-virtual member function described in the C++ standard library, an implementation may declare a different set of member function signatures, provided that any call to the member function that would select an overload from the set of declarations described in this document behaves as if that overload were selected. [*Note*: For instance, an implementation may add parameters with default values, or replace a member function with default arguments with two or more member functions with equivalent behavior, or add additional signatures for a member function name. — *end note*]

**20.5.5.6 Constexpr functions and constructors** [constexpr.functions]

- <sup>1</sup> This document explicitly requires that certain standard library functions are `constexpr` (10.1.5). An implementation shall not declare any standard library function signature as `constexpr` except for those where it is explicitly required. Within any header that provides any non-defining declarations of `constexpr` functions or constructors an implementation shall provide corresponding definitions.

**20.5.5.7 Requirements for stable algorithms** [algorithm.stable]

- <sup>1</sup> When the requirements for an algorithm state that it is “stable” without further elaboration, it means:
  - (1.1) — For the sort algorithms the relative order of equivalent elements is preserved.
  - (1.2) — For the remove and copy algorithms the relative order of the elements that are not removed is preserved.
  - (1.3) — For the merge algorithms, for equivalent elements in the original two ranges, the elements from the first range (preserving their original order) precede the elements from the second range (preserving their original order).

**20.5.5.8 Reentrancy** [reentrancy]

- <sup>1</sup> Except where explicitly specified in this document, it is implementation-defined which functions in the C++ standard library may be recursively reentered.

**20.5.5.9 Data race avoidance** [res.on.data.races]

- <sup>1</sup> This subclause specifies requirements that implementations shall meet to prevent data races (6.8.2). Every standard library function shall meet each requirement unless otherwise specified. Implementations may prevent data races in cases other than those specified below.
- <sup>2</sup> A C++ standard library function shall not directly or indirectly access objects (6.8.2) accessible by threads other than the current thread unless the objects are accessed directly or indirectly via the function’s arguments, including `this`.
- <sup>3</sup> A C++ standard library function shall not directly or indirectly modify objects (6.8.2) accessible by threads other than the current thread unless the objects are accessed directly or indirectly via the function’s non-const arguments, including `this`.
- <sup>4</sup> [*Note*: This means, for example, that implementations can’t use a static object for internal purposes without synchronization because it could cause a data race even in programs that do not explicitly share objects between threads. — *end note*]
- <sup>5</sup> A C++ standard library function shall not access objects indirectly accessible via its arguments or via elements of its container arguments except by invoking functions required by its specification on those container elements.
- <sup>6</sup> Operations on iterators obtained by calling a standard library container or string member function may access the underlying container, but shall not modify it. [*Note*: In particular, container operations that invalidate iterators conflict with operations on iterators associated with that container. — *end note*]
- <sup>7</sup> Implementations may share their own internal objects between threads if the objects are not visible to users and are protected against data races.
- <sup>8</sup> Unless otherwise specified, C++ standard library functions shall perform all operations solely within the current thread if those operations have effects that are visible (6.8.2) to users.
- <sup>9</sup> [*Note*: This allows implementations to parallelize operations if there are no visible side effects. — *end note*]

**20.5.5.10 Protection within classes** [protection.within.classes]

- <sup>1</sup> It is unspecified whether any function signature or class described in [Clause 21](#) through [Clause 34](#) and [Annex D](#) is a friend of another class in the C++ standard library.

**20.5.5.11 Derived classes** [derivation]

- <sup>1</sup> An implementation may derive any class in the C++ standard library from a class with a name reserved to the implementation.
- <sup>2</sup> Certain classes defined in the C++ standard library are required to be derived from other classes in the C++ standard library. An implementation may derive such a class directly from the required base or indirectly through a hierarchy of base classes with names reserved to the implementation.
- <sup>3</sup> In any case:
- (3.1) — Every base class described as `virtual` shall be virtual;
  - (3.2) — Every base class not specified as `virtual` shall not be virtual;
  - (3.3) — Unless explicitly stated otherwise, types with distinct names shall be distinct types.<sup>184</sup>
- <sup>4</sup> All types specified in the C++ standard library shall be non-`final` types unless otherwise specified.

**20.5.5.12 Restrictions on exception handling** [res.on.exception.handling]

- <sup>1</sup> Any of the functions defined in the C++ standard library can report a failure by throwing an exception of a type described in its *Throws:* paragraph, or of a type derived from a type named in the *Throws:* paragraph that would be caught by an exception handler for the base type.
- <sup>2</sup> Functions from the C standard library shall not throw exceptions<sup>185</sup> except when such a function calls a program-supplied function that throws an exception.<sup>186</sup>
- <sup>3</sup> Destructor operations defined in the C++ standard library shall not throw exceptions. Every destructor in the C++ standard library shall behave as if it had a non-throwing exception specification.
- <sup>4</sup> Functions defined in the C++ standard library that do not have a *Throws:* paragraph but do have a potentially-throwing exception specification may throw implementation-defined exceptions.<sup>187</sup> Implementations should report errors by throwing exceptions of or derived from the standard exception classes ([21.6.3.1](#), [21.9](#), [23.2](#)).
- <sup>5</sup> An implementation may strengthen the exception specification for a non-virtual function by adding a non-throwing exception specification.

**20.5.5.13 Restrictions on storage of pointers** [res.on.pointer.storage]

- <sup>1</sup> Objects constructed by the standard library that may hold a user-supplied pointer value or an integer of type `std::intptr_t` shall store such values in a traceable pointer location ([6.6.4.4.3](#)). [*Note:* Other libraries are strongly encouraged to do the same, since not doing so may result in accidental use of pointers that are not safely derived. Libraries that store pointers outside the user's address space should make it appear that they are stored and retrieved from a traceable pointer location. — *end note*]

**20.5.5.14 Value of error codes** [value.error.codes]

- <sup>1</sup> Certain functions in the C++ standard library report errors via a `std::error_code` ([23.5.3.1](#)) object. That object's `category()` member shall return `std::system_category()` for errors originating from the operating system, or a reference to an implementation-defined `error_category` object for errors originating elsewhere. The implementation shall define the possible values of `value()` for each of these error categories. [*Example:* For operating systems that are based on POSIX, implementations should define the `std::system_category()` values as identical to the POSIX `errno` values, with additional values as defined by the operating system's documentation. Implementations for operating systems that are not based on POSIX should define values identical to the operating system's values. For errors that do not originate from the operating system, the implementation may provide enums for the associated values. — *end example*]

<sup>184</sup> There is an implicit exception to this rule for types that are described as synonyms for basic integral types, such as `size_t` ([21.2](#)) and `streamoff` ([31.5.2](#)).

<sup>185</sup> That is, the C library functions can all be treated as if they are marked `noexcept`. This allows implementations to make performance optimizations based on the absence of exceptions at runtime.

<sup>186</sup> The functions `qsort()` and `bsearch()` ([29.8](#)) meet this condition.

<sup>187</sup> In particular, they can report a failure to allocate storage by throwing an exception of type `bad_alloc`, or a class derived from `bad_alloc` ([21.6.3.1](#)).



**20.5.5.15 Moved-from state of library types****[lib.types.movedfrom]**

- <sup>1</sup> Objects of types defined in the C++ standard library may be moved from (15.8). Move operations may be explicitly specified or implicitly generated. Unless otherwise specified, such moved-from objects shall be placed in a valid but unspecified state.

# 21 Language support library

## [language.support]

### 21.1 General

[support.general]

- <sup>1</sup> This Clause describes the function signatures that are called implicitly, and the types of objects generated implicitly, during the execution of some C++ programs. It also describes the headers that declare these function signatures and define any related types.
- <sup>2</sup> The following subclauses describe common type definitions used throughout the library, characteristics of the predefined types, functions supporting start and termination of a C++ program, support for dynamic memory management, support for dynamic type identification, support for contract violation handling, support for exception processing, support for initializer lists, and other runtime support, as summarized in Table 34.

Table 34 — Language support library summary

| Subclause                        | Header(s)                                     |
|----------------------------------|-----------------------------------------------|
| 21.2 Common definitions          | <cstdlib><br><stdlib>                         |
| 21.3 Implementation properties   | <limits><br><climits><br><float><br><version> |
| 21.4 Integer types               | <stdint>                                      |
| 21.5 Start and termination       | <stdlib>                                      |
| 21.6 Dynamic memory management   | <new>                                         |
| 21.7 Type identification         | <typeinfo>                                    |
| 21.8 Contract violation handling | <contract>                                    |
| 21.9 Exception handling          | <exception>                                   |
| 21.10 Initializer lists          | <initializer_list>                            |
| 21.11 Comparisons                | <compare>                                     |
| 21.12 Other runtime support      | <signal><br><setjmp><br><stdarg><br><stdlib>  |

### 21.2 Common definitions

[support.types]

#### 21.2.1 Header <cstdlib> synopsis

[cstdlib.syn]

```

namespace std {
 using ptrdiff_t = see below;
 using size_t = see below;
 using max_align_t = see below;
 using nullptr_t = decltype(nullptr);

 enum class byte : unsigned char {};

 // 21.2.5, byte type operations
 template<class IntType>
 constexpr byte& operator<<=(byte& b, IntType shift) noexcept;
 template<class IntType>
 constexpr byte operator<<(byte b, IntType shift) noexcept;
 template<class IntType>
 constexpr byte& operator>>=(byte& b, IntType shift) noexcept;
 template<class IntType>
 constexpr byte operator>>(byte b, IntType shift) noexcept;

```

```

constexpr byte& operator|=(byte& l, byte r) noexcept;
constexpr byte operator|(byte l, byte r) noexcept;
constexpr byte& operator&=(byte& l, byte r) noexcept;
constexpr byte operator&(byte l, byte r) noexcept;
constexpr byte& operator^=(byte& l, byte r) noexcept;
constexpr byte operator^(byte l, byte r) noexcept;
constexpr byte operator~(byte b) noexcept;
template<class IntType>
 constexpr IntType to_integer(byte b) noexcept;
}

```

```

#define NULL see below
#define offsetof(P, D) see below

```

- <sup>1</sup> The contents and meaning of the header `<cstddef>` are the same as the C standard library header `<stddef.h>`, except that it does not declare the type `wchar_t`, that it also declares the type `byte` and its associated operations (21.2.5), and as noted in 21.2.3 and 21.2.4.

SEE ALSO: ISO C 7.19

## 21.2.2 Header `<cstdlib>` synopsis

[`cstdlib.syn`]

```

namespace std {
 using size_t = see below;
 using div_t = see below;
 using ldiv_t = see below;
 using lldiv_t = see below;
}

#define NULL see below
#define EXIT_FAILURE see below
#define EXIT_SUCCESS see below
#define RAND_MAX see below
#define MB_CUR_MAX see below

namespace std {
 // Exposition-only function type aliases
 extern "C" using c-atexit-handler = void(); // exposition only
 extern "C++" using atexit-handler = void(); // exposition only
 extern "C" using c-compare-pred = int(const void*, const void*); // exposition only
 extern "C++" using compare-pred = int(const void*, const void*); // exposition only

 // 21.5, start and termination
 [[noreturn]] void abort() noexcept;
 int atexit(c-atexit-handler* func) noexcept;
 int atexit(atexit-handler* func) noexcept;
 int at_quick_exit(c-atexit-handler* func) noexcept;
 int at_quick_exit(atexit-handler* func) noexcept;
 [[noreturn]] void exit(int status);
 [[noreturn]] void _Exit(int status) noexcept;
 [[noreturn]] void quick_exit(int status) noexcept;

 char* getenv(const char* name);
 int system(const char* string);

 // 24.10.12, C library memory allocation
 void* aligned_alloc(size_t alignment, size_t size);
 void* calloc(size_t nmemb, size_t size);
 void free(void* ptr);
 void* malloc(size_t size);
 void* realloc(void* ptr, size_t size);

 double atof(const char* nptr);
 int atoi(const char* nptr);
 long int atol(const char* nptr);

```

```

long long int atoll(const char* nptr);
double strtod(const char* nptr, char** endptr);
float strtodf(const char* nptr, char** endptr);
long double strtold(const char* nptr, char** endptr);
long int strtol(const char* nptr, char** endptr, int base);
long long int strtoll(const char* nptr, char** endptr, int base);
unsigned long int strtoul(const char* nptr, char** endptr, int base);
unsigned long long int strtoull(const char* nptr, char** endptr, int base);

// 25.5.6, multibyte / wide string and character conversion functions
int mblen(const char* s, size_t n);
int mbtowc(wchar_t* pwc, const char* s, size_t n);
int wctomb(char* s, wchar_t wchar);
size_t mbstowcs(wchar_t* pwcs, const char* s, size_t n);
size_t wcstombs(char* s, const wchar_t* pwcs, size_t n);

// 29.8, C standard library algorithms
void* bsearch(const void* key, const void* base, size_t nmemb, size_t size,
 c-compare-pred* compar);
void* bsearch(const void* key, const void* base, size_t nmemb, size_t size,
 compare-pred* compar);
void qsort(void* base, size_t nmemb, size_t size, c-compare-pred* compar);
void qsort(void* base, size_t nmemb, size_t size, compare-pred* compar);

// 30.7.9, low-quality random number generation
int rand();
void srand(unsigned int seed);

// 30.10.2, absolute values
int abs(int j);
long int abs(long int j);
long long int abs(long long int j);
float abs(float j);
double abs(double j);
long double abs(long double j);

long int labs(long int j);
long long int llabs(long long int j);

div_t div(int numer, int denom);
ldiv_t div(long int numer, long int denom); // see 20.2
lldiv_t div(long long int numer, long long int denom); // see 20.2
ldiv_t ldiv(long int numer, long int denom);
lldiv_t lldiv(long long int numer, long long int denom);
}

```

- <sup>1</sup> The contents and meaning of the header `<cstdlib>` are the same as the C standard library header `<stdlib.h>`, except that it does not declare the type `wchar_t`, and except as noted in 21.2.3, 21.2.4, 21.5, 24.10.12, 25.5.6, 29.8, 30.7.9, and 30.10.2. [Note: Several functions have additional overloads in this document, but they have the same behavior as in the C standard library (20.2). — end note]

SEE ALSO: ISO C 7.22

### 21.2.3 Null pointers

[support.types.nullptr]

- <sup>1</sup> The type `nullptr_t` is a synonym for the type of a `nullptr` expression, and it has the characteristics described in 6.7.1 and 7.11. [Note: Although `nullptr`'s address cannot be taken, the address of another `nullptr_t` object that is an lvalue can be taken. — end note]
- <sup>2</sup> The macro `NULL` is an implementation-defined null pointer constant.<sup>188</sup>

SEE ALSO: ISO C 7.19

<sup>188</sup> Possible definitions include 0 and 0L, but not (void\*)0.

## 21.2.4 Sizes, alignments, and offsets [support.types.layout]

- 1 The macro `offsetof(type, member-designator)` has the same semantics as the corresponding macro in the C standard library header `<stddef.h>`, but accepts a restricted set of *type* arguments in this document. Use of the `offsetof` macro with a *type* other than a standard-layout class (Clause 12) is conditionally-supported.<sup>189</sup> The expression `offsetof(type, member-designator)` is never type-dependent (17.7.2.2) and it is value-dependent (17.7.2.3) if and only if *type* is dependent. The result of applying the `offsetof` macro to a static data member or a function member is undefined. No operation invoked by the `offsetof` macro shall throw an exception and `noexcept(offsetof(type, member-designator))` shall be true.
- 2 The type `ptrdiff_t` is an implementation-defined signed integer type that can hold the difference of two subscripts in an array object, as described in 8.5.6.
- 3 The type `size_t` is an implementation-defined unsigned integer type that is large enough to contain the size in bytes of any object (8.5.2.3).
- 4 [Note: It is recommended that implementations choose types for `ptrdiff_t` and `size_t` whose integer conversion ranks (6.7.4) are no greater than that of signed long int unless a larger size is necessary to contain all the possible values. — end note]
- 5 The type `max_align_t` is a trivial standard-layout type whose alignment requirement is at least as great as that of every scalar type, and whose alignment requirement is supported in every context (6.6.5).

SEE ALSO: ISO C 7.19

## 21.2.5 byte type operations [support.types.byteops]

```
template<class IntType>
```

```
constexpr byte& operator<<=(byte& b, IntType shift) noexcept;
```

- 1 *Effects:* Equivalent to: `return b = b << shift;`

- 2 *Remarks:* This function shall not participate in overload resolution unless `is_integral_v<IntType>` is true.

```
template<class IntType>
```

```
constexpr byte operator<<(byte b, IntType shift) noexcept;
```

- 3 *Effects:* Equivalent to:

```
return static_cast<byte>(static_cast<unsigned char>(
 static_cast<unsigned int>(b) << shift));
```

- 4 *Remarks:* This function shall not participate in overload resolution unless `is_integral_v<IntType>` is true.

```
template<class IntType>
```

```
constexpr byte& operator>>=(byte& b, IntType shift) noexcept;
```

- 5 *Effects:* Equivalent to: `return b >> shift;`

- 6 *Remarks:* This function shall not participate in overload resolution unless `is_integral_v<IntType>` is true.

```
template<class IntType>
```

```
constexpr byte operator>>(byte b, IntType shift) noexcept;
```

- 7 *Effects:* Equivalent to:

```
return static_cast<byte>(static_cast<unsigned char>(
 static_cast<unsigned int>(b) >> shift));
```

- 8 *Remarks:* This function shall not participate in overload resolution unless `is_integral_v<IntType>` is true.

```
constexpr byte& operator|=(byte& l, byte r) noexcept;
```

- 9 *Effects:* Equivalent to: `return l = l | r;`

---

<sup>189</sup>) Note that `offsetof` is required to work as specified even if unary `operator&` is overloaded for any of the types involved.

```

constexpr byte operator|(byte l, byte r) noexcept;
10 Effects: Equivalent to:
 return static_cast<byte>(static_cast<unsigned char>(static_cast<unsigned int>(l) |
 static_cast<unsigned int>(r)));

constexpr byte& operator&=(byte& l, byte r) noexcept;
11 Effects: Equivalent to: return l = l & r;

constexpr byte operator&(byte l, byte r) noexcept;
12 Effects: Equivalent to:
 return static_cast<byte>(static_cast<unsigned char>(static_cast<unsigned int>(l) &
 static_cast<unsigned int>(r)));

constexpr byte& operator^=(byte& l, byte r) noexcept;
13 Effects: Equivalent to: return l = l ^ r;

constexpr byte operator^(byte l, byte r) noexcept;
14 Effects: Equivalent to:
 return static_cast<byte>(static_cast<unsigned char>(static_cast<unsigned int>(l) ^
 static_cast<unsigned int>(r)));

constexpr byte operator~(byte b) noexcept;
15 Effects: Equivalent to:
 return static_cast<byte>(static_cast<unsigned char>(
 ~static_cast<unsigned int>(b)));

template<class IntType>
constexpr IntType to_integer(byte b) noexcept;
16 Effects: Equivalent to: return static_cast<IntType>(b);
17 Remarks: This function shall not participate in overload resolution unless is_integral_v<IntType> is
 true.

```

## 21.3 Implementation properties [support.limits]

### 21.3.1 General [support.limits.general]

- 1 The headers `<limits>` (21.3.2), `<climits>` (21.3.5), and `<cfloat>` (21.3.6) supply characteristics of implementation-dependent arithmetic types (6.7.1).
- 2 The header `<version>` supplies implementation-dependent information about the C++ standard library (e.g., version number and release date).
- 3 The macros in Table 35 are defined after inclusion of the header `<version>` or one of the corresponding headers specified in the table. [*Note:* Future versions of this International Standard might replace the values of these macros with greater values. — *end note*]

Table 35 — Standard library feature-test macros

| Macro name                                              | Value   | Header(s)                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>__cpp_lib_addressof_constexpr</code>              | 201603L | <code>&lt;memory&gt;</code>                                                                                                                                                                                                                                                                                                                             |
| <code>__cpp_lib_allocator_traits_is_always_equal</code> | 201411L | <code>&lt;memory&gt;</code> <code>&lt;scoped_allocator&gt;</code><br><code>&lt;string&gt;</code> <code>&lt;deque&gt;</code><br><code>&lt;forward_list&gt;</code> <code>&lt;list&gt;</code><br><code>&lt;vector&gt;</code> <code>&lt;map&gt;</code> <code>&lt;set&gt;</code><br><code>&lt;unordered_map&gt;</code><br><code>&lt;unordered_set&gt;</code> |
| <code>__cpp_lib_any</code>                              | 201606L | <code>&lt;any&gt;</code>                                                                                                                                                                                                                                                                                                                                |
| <code>__cpp_lib_apply</code>                            | 201603L | <code>&lt;tuple&gt;</code>                                                                                                                                                                                                                                                                                                                              |
| <code>__cpp_lib_array_constexpr</code>                  | 201603L | <code>&lt;iterator&gt;</code> <code>&lt;array&gt;</code>                                                                                                                                                                                                                                                                                                |
| <code>__cpp_lib_as_const</code>                         | 201510L | <code>&lt;utility&gt;</code>                                                                                                                                                                                                                                                                                                                            |

Table 35 — Standard library feature-test macros (continued)

| Macro name                                               | Value   | Header(s)                                                                                                                          |
|----------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------|
| <code>__cpp_lib_atomic_is_always_lock_free</code>        | 201603L | <atomic>                                                                                                                           |
| <code>__cpp_lib_atomic_ref</code>                        | 201806L | <atomic>                                                                                                                           |
| <code>__cpp_lib_bit_cast</code>                          | 201806L | <bit>                                                                                                                              |
| <code>__cpp_lib_bool_constant</code>                     | 201505L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_boyer_moore_searcher</code>              | 201603L | <functional>                                                                                                                       |
| <code>__cpp_lib_byte</code>                              | 201603L | <cstdint>                                                                                                                          |
| <code>__cpp_lib_chrono</code>                            | 201611L | <chrono>                                                                                                                           |
| <code>__cpp_lib_clamp</code>                             | 201603L | <algorithm>                                                                                                                        |
| <code>__cpp_lib_complex_udls</code>                      | 201309L | <complex>                                                                                                                          |
| <code>__cpp_lib_concepts</code>                          | 201806L | <concepts>                                                                                                                         |
| <code>__cpp_lib_constexpr_swap_algorithms</code>         | 201806L | <algorithm>                                                                                                                        |
| <code>__cpp_lib_enable_shared_from_this</code>           | 201603L | <memory>                                                                                                                           |
| <code>__cpp_lib_exchange_function</code>                 | 201304L | <utility>                                                                                                                          |
| <code>__cpp_lib_execution</code>                         | 201603L | <execution>                                                                                                                        |
| <code>__cpp_lib_filesystem</code>                        | 201703L | <filesystem>                                                                                                                       |
| <code>__cpp_lib_gcd_lcm</code>                           | 201606L | <numeric>                                                                                                                          |
| <code>__cpp_lib_generic_associative_lookup</code>        | 201304L | <map> <set>                                                                                                                        |
| <code>__cpp_lib_hardware_interference_size</code>        | 201703L | <new>                                                                                                                              |
| <code>__cpp_lib_has_unique_object_representations</code> | 201606L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_hypot</code>                             | 201603L | <cmath>                                                                                                                            |
| <code>__cpp_lib_incomplete_container_elements</code>     | 201505L | <forward_list> <list><br><vector>                                                                                                  |
| <code>__cpp_lib_integer_sequence</code>                  | 201304L | <utility>                                                                                                                          |
| <code>__cpp_lib_integral_constant_callable</code>        | 201304L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_invoke</code>                            | 201411L | <functional>                                                                                                                       |
| <code>__cpp_lib_is_aggregate</code>                      | 201703L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_is_final</code>                          | 201402L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_is_invocable</code>                      | 201703L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_is_null_pointer</code>                   | 201309L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_is_swappable</code>                      | 201603L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_laundry</code>                           | 201606L | <new>                                                                                                                              |
| <code>__cpp_lib_list_remove_return_type</code>           | 201806L | <forward_list> <list>                                                                                                              |
| <code>__cpp_lib_logical_traits</code>                    | 201510L | <type_traits>                                                                                                                      |
| <code>__cpp_lib_make_from_tuple</code>                   | 201606L | <tuple>                                                                                                                            |
| <code>__cpp_lib_make_reverse_iterator</code>             | 201402L | <iterator>                                                                                                                         |
| <code>__cpp_lib_make_unique</code>                       | 201304L | <memory>                                                                                                                           |
| <code>__cpp_lib_map_try_emplace</code>                   | 201411L | <map>                                                                                                                              |
| <code>__cpp_lib_math_special_functions</code>            | 201603L | <cmath>                                                                                                                            |
| <code>__cpp_lib_memory_resource</code>                   | 201603L | <memory_resource>                                                                                                                  |
| <code>__cpp_lib_node_extract</code>                      | 201606L | <map> <set> <unordered_map><br><unordered_set>                                                                                     |
| <code>__cpp_lib_nonmember_container_access</code>        | 201411L | <iterator> <array> <deque><br><forward_list> <list> <map><br><regex> <set> <string><br><unordered_map><br><unordered_set> <vector> |
| <code>__cpp_lib_not_fn</code>                            | 201603L | <functional>                                                                                                                       |
| <code>__cpp_lib_null_iterators</code>                    | 201304L | <iterator>                                                                                                                         |
| <code>__cpp_lib_optional</code>                          | 201606L | <optional>                                                                                                                         |
| <code>__cpp_lib_parallel_algorithm</code>                | 201603L | <algorithm> <numeric>                                                                                                              |
| <code>__cpp_lib_quoted_string_io</code>                  | 201304L | <iomanip>                                                                                                                          |
| <code>__cpp_lib_raw_memory_algorithms</code>             | 201606L | <memory>                                                                                                                           |
| <code>__cpp_lib_result_of_sfinae</code>                  | 201210L | <functional> <type_traits>                                                                                                         |
| <code>__cpp_lib_robust_nonmodifying_seq_ops</code>       | 201304L | <algorithm>                                                                                                                        |

Table 35 — Standard library feature-test macros (continued)

| Macro name                                           | Value   | Header(s)              |
|------------------------------------------------------|---------|------------------------|
| <code>__cpp_lib_sample</code>                        | 201603L | <algorithm>            |
| <code>__cpp_lib_scoped_lock</code>                   | 201703L | <mutex>                |
| <code>__cpp_lib_shared_mutex</code>                  | 201505L | <shared_mutex>         |
| <code>__cpp_lib_shared_ptr_arrays</code>             | 201611L | <memory>               |
| <code>__cpp_lib_shared_ptr_weak_type</code>          | 201606L | <memory>               |
| <code>__cpp_lib_shared_timed_mutex</code>            | 201402L | <shared_mutex>         |
| <code>__cpp_lib_string_udls</code>                   | 201304L | <string>               |
| <code>__cpp_lib_string_view</code>                   | 201606L | <string> <string_view> |
| <code>__cpp_lib_to_chars</code>                      | 201611L | <utility>              |
| <code>__cpp_lib_transformation_trait_aliases</code>  | 201304L | <type_traits>          |
| <code>__cpp_lib_transparent_operators</code>         | 201510L | <memory> <functional>  |
| <code>__cpp_lib_tuple_element_t</code>               | 201402L | <tuple>                |
| <code>__cpp_lib_tuples_by_type</code>                | 201304L | <utility> <tuple>      |
| <code>__cpp_lib_type_trait_variable_templates</code> | 201510L | <type_traits>          |
| <code>__cpp_lib_uncaught_exceptions</code>           | 201411L | <exception>            |
| <code>__cpp_lib_unordered_map_try_emplace</code>     | 201411L | <unordered_map>        |
| <code>__cpp_lib_variant</code>                       | 201606L | <variant>              |
| <code>__cpp_lib_void_t</code>                        | 201411L | <type_traits>          |

### 21.3.2 Header <limits> synopsis

[limits.syn]

```

namespace std {
 // 21.3.3, floating-point type properties
 enum float_round_style;
 enum float_denorm_style;

 // 21.3.4, class template numeric_limits
 template<class T> class numeric_limits;

 template<> class numeric_limits<bool>;

 template<> class numeric_limits<char>;
 template<> class numeric_limits<signed char>;
 template<> class numeric_limits<unsigned char>;
 template<> class numeric_limits<char16_t>;
 template<> class numeric_limits<char32_t>;
 template<> class numeric_limits<wchar_t>;

 template<> class numeric_limits<short>;
 template<> class numeric_limits<int>;
 template<> class numeric_limits<long>;
 template<> class numeric_limits<long long>;
 template<> class numeric_limits<unsigned short>;
 template<> class numeric_limits<unsigned int>;
 template<> class numeric_limits<unsigned long>;
 template<> class numeric_limits<unsigned long long>;

 template<> class numeric_limits<float>;
 template<> class numeric_limits<double>;
 template<> class numeric_limits<long double>;
}

```

### 21.3.3 Floating-point type properties

[fp.style]

#### 21.3.3.1 Type `float_round_style`

[round.style]

```

namespace std {
 enum float_round_style {
 round_indeterminate = -1,
 round_toward_zero = 0,

```



```

 round_to_nearest = 1,
 round_toward_infinity = 2,
 round_toward_neg_infinity = 3
};
}

```

<sup>1</sup> The rounding mode for floating-point arithmetic is characterized by the values:

- (1.1) — `round_indeterminate` if the rounding style is indeterminable
- (1.2) — `round_toward_zero` if the rounding style is toward zero
- (1.3) — `round_to_nearest` if the rounding style is to the nearest representable value
- (1.4) — `round_toward_infinity` if the rounding style is toward infinity
- (1.5) — `round_toward_neg_infinity` if the rounding style is toward negative infinity

### 21.3.3.2 Type `float_denorm_style`

[`denorm.style`]

```

namespace std {
 enum float_denorm_style {
 denorm_indeterminate = -1,
 denorm_absent = 0,
 denorm_present = 1
 };
}

```

<sup>1</sup> The presence or absence of subnormal numbers (variable number of exponent bits) is characterized by the values:

- (1.1) — `denorm_indeterminate` if it cannot be determined whether or not the type allows subnormal values
- (1.2) — `denorm_absent` if the type does not allow subnormal values
- (1.3) — `denorm_present` if the type does allow subnormal values

### 21.3.4 Class template `numeric_limits`

[`numeric.limits`]

<sup>1</sup> The `numeric_limits` class template provides a C++ program with information about various properties of the implementation's representation of the arithmetic types.

```

namespace std {
 template<class T> class numeric_limits {
 public:
 static constexpr bool is_specialized = false;
 static constexpr T min() noexcept { return T(); }
 static constexpr T max() noexcept { return T(); }
 static constexpr T lowest() noexcept { return T(); }

 static constexpr int digits = 0;
 static constexpr int digits10 = 0;
 static constexpr int max_digits10 = 0;
 static constexpr bool is_signed = false;
 static constexpr bool is_integer = false;
 static constexpr bool is_exact = false;
 static constexpr int radix = 0;
 static constexpr T epsilon() noexcept { return T(); }
 static constexpr T round_error() noexcept { return T(); }

 static constexpr int min_exponent = 0;
 static constexpr int min_exponent10 = 0;
 static constexpr int max_exponent = 0;
 static constexpr int max_exponent10 = 0;

 static constexpr bool has_infinity = false;
 static constexpr bool has_quiet_NaN = false;
 static constexpr bool has_signaling_NaN = false;
 static constexpr float_denorm_style has_denorm = denorm_absent;
 static constexpr bool has_denorm_loss = false;
 static constexpr T infinity() noexcept { return T(); }
 };
}

```

```

static constexpr T quiet_NaN() noexcept { return T(); }
static constexpr T signaling_NaN() noexcept { return T(); }
static constexpr T denorm_min() noexcept { return T(); }

static constexpr bool is_iec559 = false;
static constexpr bool is_bounded = false;
static constexpr bool is_modulo = false;

static constexpr bool traps = false;
static constexpr bool tinyness_before = false;
static constexpr float_round_style round_style = round_toward_zero;
};

template<class T> class numeric_limits<const T>;
template<class T> class numeric_limits<volatile T>;
template<class T> class numeric_limits<const volatile T>;
}

```

- 2 For all members declared `static constexpr` in the `numeric_limits` template, specializations shall define these values in such a way that they are usable as constant expressions.
- 3 The default `numeric_limits<T>` template shall have all members, but with 0 or `false` values.
- 4 Specializations shall be provided for each arithmetic type, both floating-point and integer, including `bool`. The member `is_specialized` shall be `true` for all such specializations of `numeric_limits`.
- 5 The value of each member of a specialization of `numeric_limits` on a cv-qualified type cv T shall be equal to the value of the corresponding member of the specialization on the unqualified type T.
- 6 Non-arithmetic standard types, such as `complex<T>` (30.5.2), shall not have specializations.

#### 21.3.4.1 `numeric_limits` members

[`numeric.limits.members`]

- 1 Each member function defined in this subclause is signal-safe (21.12.4).

```
static constexpr T min() noexcept;
```

- 2 Minimum finite value.<sup>190</sup>

- 3 For floating-point types with subnormal numbers, returns the minimum positive normalized value.

- 4 Meaningful for all specializations in which `is_bounded != false`, or `is_bounded == false && is_signed == false`.

```
static constexpr T max() noexcept;
```

- 5 Maximum finite value.<sup>191</sup>

- 6 Meaningful for all specializations in which `is_bounded != false`.

```
static constexpr T lowest() noexcept;
```

- 7 A finite value x such that there is no other finite value y where  $y < x$ .<sup>192</sup>

- 8 Meaningful for all specializations in which `is_bounded != false`.

```
static constexpr int digits;
```

- 9 Number of `radix` digits that can be represented without change.

- 10 For integer types, the number of non-sign bits in the representation.

- 11 For floating-point types, the number of `radix` digits in the mantissa.<sup>193</sup>

```
static constexpr int digits10;
```

- 12 Number of base 10 digits that can be represented without change.<sup>194</sup>

190) Equivalent to `CHAR_MIN`, `SHRT_MIN`, `FLT_MIN`, `DBL_MIN`, etc.

191) Equivalent to `CHAR_MAX`, `SHRT_MAX`, `FLT_MAX`, `DBL_MAX`, etc.

192) `lowest()` is necessary because not all floating-point representations have a smallest (most negative) value that is the negative of the largest (most positive) finite value.

193) Equivalent to `FLT_MANT_DIG`, `DBL_MANT_DIG`, `LDBL_MANT_DIG`.

194) Equivalent to `FLT_DIG`, `DBL_DIG`, `LDBL_DIG`.

13        Meaningful for all specializations in which `is_bounded` `!= false`.

```
static constexpr int max_digits10;
```

14        Number of base 10 digits required to ensure that values which differ are always differentiated.

15        Meaningful for all floating-point types.

```
static constexpr bool is_signed;
```

16        `true` if the type is signed.

17        Meaningful for all specializations.

```
static constexpr bool is_integer;
```

18        `true` if the type is integer.

19        Meaningful for all specializations.

```
static constexpr bool is_exact;
```

20        `true` if the type uses an exact representation. All integer types are exact, but not all exact types are integer. For example, rational and fixed-exponent representations are exact but not integer.

21        Meaningful for all specializations.

```
static constexpr int radix;
```

22        For floating-point types, specifies the base or radix of the exponent representation (often 2).<sup>195</sup>

23        For integer types, specifies the base of the representation.<sup>196</sup>

24        Meaningful for all specializations.

```
static constexpr T epsilon() noexcept;
```

25        Machine epsilon: the difference between 1 and the least value greater than 1 that is representable.<sup>197</sup>

26        Meaningful for all floating-point types.

```
static constexpr T round_error() noexcept;
```

27        Measure of the maximum rounding error.<sup>198</sup>

```
static constexpr int min_exponent;
```

28        Minimum negative integer such that `radix` raised to the power of one less than that integer is a normalized floating-point number.<sup>199</sup>

29        Meaningful for all floating-point types.

```
static constexpr int min_exponent10;
```

30        Minimum negative integer such that 10 raised to that power is in the range of normalized floating-point numbers.<sup>200</sup>

31        Meaningful for all floating-point types.

```
static constexpr int max_exponent;
```

32        Maximum positive integer such that `radix` raised to the power one less than that integer is a representable finite floating-point number.<sup>201</sup>

33        Meaningful for all floating-point types.

---

195) Equivalent to `FLT_RADIX`.

196) Distinguishes types with bases other than 2 (e.g. BCD).

197) Equivalent to `FLT_EPSILON`, `DBL_EPSILON`, `LDBL_EPSILON`.

198) Rounding error is described in LIA-1 Section 5.2.4 and Annex C Rationale Section C.5.2.4 — Rounding and rounding constants.

199) Equivalent to `FLT_MIN_EXP`, `DBL_MIN_EXP`, `LDBL_MIN_EXP`.

200) Equivalent to `FLT_MIN_10_EXP`, `DBL_MIN_10_EXP`, `LDBL_MIN_10_EXP`.

201) Equivalent to `FLT_MAX_EXP`, `DBL_MAX_EXP`, `LDBL_MAX_EXP`.

```

static constexpr int max_exponent10;
34 Maximum positive integer such that 10 raised to that power is in the range of representable finite
 floating-point numbers.202
35 Meaningful for all floating-point types.

static constexpr bool has_infinity;
36 true if the type has a representation for positive infinity.
37 Meaningful for all floating-point types.
38 Shall be true for all specializations in which is_iec559 != false.

static constexpr bool has_quiet_NaN;
39 true if the type has a representation for a quiet (non-signaling) “Not a Number”.203
40 Meaningful for all floating-point types.
41 Shall be true for all specializations in which is_iec559 != false.

static constexpr bool has_signaling_NaN;
42 true if the type has a representation for a signaling “Not a Number”.204
43 Meaningful for all floating-point types.
44 Shall be true for all specializations in which is_iec559 != false.

static constexpr float_denorm_style has_denorm;
45 denorm_present if the type allows subnormal values (variable number of exponent bits)205, denorm_
 absent if the type does not allow subnormal values, and denorm_indeterminate if it is indeterminate
 at compile time whether the type allows subnormal values.
46 Meaningful for all floating-point types.

static constexpr bool has_denorm_loss;
47 true if loss of accuracy is detected as a denormalization loss, rather than as an inexact result.206

static constexpr T infinity() noexcept;
48 Representation of positive infinity, if available.207
49 Meaningful for all specializations for which has_infinity != false. Required in specializations for
 which is_iec559 != false.

static constexpr T quiet_NaN() noexcept;
50 Representation of a quiet “Not a Number”, if available.208
51 Meaningful for all specializations for which has_quiet_NaN != false. Required in specializations for
 which is_iec559 != false.

static constexpr T signaling_NaN() noexcept;
52 Representation of a signaling “Not a Number”, if available.209
53 Meaningful for all specializations for which has_signaling_NaN != false. Required in specializations
 for which is_iec559 != false.

static constexpr T denorm_min() noexcept;
54 Minimum positive subnormal value.210

```

---

202) Equivalent to FLT\_MAX\_10\_EXP, DBL\_MAX\_10\_EXP, LDBL\_MAX\_10\_EXP.

203) Required by LIA-1.

204) Required by LIA-1.

205) Required by LIA-1.

206) See ISO/IEC/IEEE 60559.

207) Required by LIA-1.

208) Required by LIA-1.

209) Required by LIA-1.

210) Required by LIA-1.

55 Meaningful for all floating-point types.

56 In specializations for which `has_denorm == false`, returns the minimum positive normalized value.

```
static constexpr bool is_iec559;
```

57 true if and only if the type adheres to ISO/IEC/IEEE 60559.<sup>211</sup>

58 Meaningful for all floating-point types.

```
static constexpr bool is_bounded;
```

59 true if the set of values representable by the type is finite.<sup>212</sup> [Note: All fundamental types (6.7.1) are bounded. This member would be false for arbitrary precision types. — end note]

60 Meaningful for all specializations.

```
static constexpr bool is_modulo;
```

61 true if the type is modulo.<sup>213</sup> A type is modulo if, for any operation involving +, -, or \* on values of that type whose result would fall outside the range `[min(), max()]`, the value returned differs from the true value by an integer multiple of `max() - min() + 1`.

62 [Example: `is_modulo` is false for signed integer types (6.7.1) unless an implementation, as an extension to this document, defines signed integer overflow to wrap. — end example]

63 Meaningful for all specializations.

```
static constexpr bool traps;
```

64 true if, at program startup, there exists a value of the type that would cause an arithmetic operation using that value to trap.<sup>214</sup>

65 Meaningful for all specializations.

```
static constexpr bool tinyness_before;
```

66 true if tinyness is detected before rounding.<sup>215</sup>

67 Meaningful for all floating-point types.

```
static constexpr float_round_style round_style;
```

68 The rounding style for the type.<sup>216</sup>

69 Meaningful for all floating-point types. Specializations for integer types shall return `round_toward_zero`.

#### 21.3.4.2 numeric\_limits specializations [numeric.special]

1 All members shall be provided for all specializations. However, many values are only required to be meaningful under certain conditions (for example, `epsilon()` is only meaningful if `is_integer` is false). Any value that is not “meaningful” shall be set to 0 or false.

2 [Example:

```
namespace std {
 template<> class numeric_limits<float> {
 public:
 static constexpr bool is_specialized = true;

 static constexpr float min() noexcept { return 1.17549435E-38F; }
 static constexpr float max() noexcept { return 3.40282347E+38F; }
 static constexpr float lowest() noexcept { return -3.40282347E+38F; }

 static constexpr int digits = 24;
 static constexpr int digits10 = 6;
 static constexpr int max_digits10 = 9;
```

211) ISO/IEC/IEEE 60559:2011 is the same as IEEE 754-2008.

212) Required by LIA-1.

213) Required by LIA-1.

214) Required by LIA-1.

215) Refer to ISO/IEC/IEEE 60559. Required by LIA-1.

216) Equivalent to `FLT_ROUNDS`. Required by LIA-1.

```

static constexpr bool is_signed = true;
static constexpr bool is_integer = false;
static constexpr bool is_exact = false;

static constexpr int radix = 2;
static constexpr float epsilon() noexcept { return 1.19209290E-07F; }
static constexpr float round_error() noexcept { return 0.5F; }

static constexpr int min_exponent = -125;
static constexpr int min_exponent10 = - 37;
static constexpr int max_exponent = +128;
static constexpr int max_exponent10 = + 38;

static constexpr bool has_infinity = true;
static constexpr bool has_quiet_NaN = true;
static constexpr bool has_signaling_NaN = true;
static constexpr float_denorm_style has_denorm = denorm_absent;
static constexpr bool has_denorm_loss = false;

static constexpr float infinity() noexcept { return value; }
static constexpr float quiet_NaN() noexcept { return value; }
static constexpr float signaling_NaN() noexcept { return value; }
static constexpr float denorm_min() noexcept { return min(); }

static constexpr bool is_iec559 = true;
static constexpr bool is_bounded = true;
static constexpr bool is_modulo = false;
static constexpr bool traps = true;
static constexpr bool tinyness_before = true;

static constexpr float_round_style round_style = round_to_nearest;
};
}

```

— *end example*]

- <sup>3</sup> The specialization for bool shall be provided as follows:

```

namespace std {
 template<> class numeric_limits<bool> {
 public:
 static constexpr bool is_specialized = true;
 static constexpr bool min() noexcept { return false; }
 static constexpr bool max() noexcept { return true; }
 static constexpr bool lowest() noexcept { return false; }

 static constexpr int digits = 1;
 static constexpr int digits10 = 0;
 static constexpr int max_digits10 = 0;

 static constexpr bool is_signed = false;
 static constexpr bool is_integer = true;
 static constexpr bool is_exact = true;
 static constexpr int radix = 2;
 static constexpr bool epsilon() noexcept { return 0; }
 static constexpr bool round_error() noexcept { return 0; }

 static constexpr int min_exponent = 0;
 static constexpr int min_exponent10 = 0;
 static constexpr int max_exponent = 0;
 static constexpr int max_exponent10 = 0;

 static constexpr bool has_infinity = false;
 static constexpr bool has_quiet_NaN = false;
 static constexpr bool has_signaling_NaN = false;

```

```

static constexpr float_denorm_style has_denorm = denorm_absent;
static constexpr bool has_denorm_loss = false;
static constexpr bool infinity() noexcept { return 0; }
static constexpr bool quiet_NaN() noexcept { return 0; }
static constexpr bool signaling_NaN() noexcept { return 0; }
static constexpr bool denorm_min() noexcept { return 0; }

static constexpr bool is_iec559 = false;
static constexpr bool is_bounded = true;
static constexpr bool is_modulo = false;

static constexpr bool traps = false;
static constexpr bool tinyness_before = false;
static constexpr float_round_style round_style = round_toward_zero;
};
}

```

### 21.3.5 Header <climits> synopsis

[climits.syn]

```

#define CHAR_BIT see below
#define SCHAR_MIN see below
#define SCHAR_MAX see below
#define UCHAR_MAX see below
#define CHAR_MIN see below
#define CHAR_MAX see below
#define MB_LEN_MAX see below
#define SHRT_MIN see below
#define SHRT_MAX see below
#define USHRT_MAX see below
#define INT_MIN see below
#define INT_MAX see below
#define UINT_MAX see below
#define LONG_MIN see below
#define LONG_MAX see below
#define ULONG_MAX see below
#define LLONG_MIN see below
#define LLONG_MAX see below
#define ULLONG_MAX see below

```

- <sup>1</sup> The header <climits> defines all macros the same as the C standard library header <limits.h>. [Note: The types of the constants defined by macros in <climits> are not required to match the types to which the macros refer. — end note]

SEE ALSO: ISO C 5.2.4.2.1

### 21.3.6 Header <cfloat> synopsis

[cfloat.syn]

```

#define FLT_ROUNDS see below
#define FLT_EVAL_METHOD see below
#define FLT_HAS_SUBNORM see below
#define DBL_HAS_SUBNORM see below
#define LDBL_HAS_SUBNORM see below
#define FLT_RADIX see below
#define FLT_MANT_DIG see below
#define DBL_MANT_DIG see below
#define LDBL_MANT_DIG see below
#define FLT_DECIMAL_DIG see below
#define DBL_DECIMAL_DIG see below
#define LDBL_DECIMAL_DIG see below
#define DECIMAL_DIG see below
#define FLT_DIG see below
#define DBL_DIG see below
#define LDBL_DIG see below
#define FLT_MIN_EXP see below
#define DBL_MIN_EXP see below
#define LDBL_MIN_EXP see below

```

```

#define FLT_MIN_10_EXP see below
#define DBL_MIN_10_EXP see below
#define LDBL_MIN_10_EXP see below
#define FLT_MAX_EXP see below
#define DBL_MAX_EXP see below
#define LDBL_MAX_EXP see below
#define FLT_MAX_10_EXP see below
#define DBL_MAX_10_EXP see below
#define LDBL_MAX_10_EXP see below
#define FLT_MAX see below
#define DBL_MAX see below
#define LDBL_MAX see below
#define FLT_EPSILON see below
#define DBL_EPSILON see below
#define LDBL_EPSILON see below
#define FLT_MIN see below
#define DBL_MIN see below
#define LDBL_MIN see below
#define FLT_TRUE_MIN see below
#define DBL_TRUE_MIN see below
#define LDBL_TRUE_MIN see below

```

<sup>1</sup> The header <cfloat> defines all macros the same as the C standard library header <float.h>.

SEE ALSO: ISO C 5.2.4.2.2

## 21.4 Integer types

[cstdint]

### 21.4.1 Header <cstdint> synopsis

[cstdint.syn]

```

namespace std {
 using int8_t = signed integer type; // optional
 using int16_t = signed integer type; // optional
 using int32_t = signed integer type; // optional
 using int64_t = signed integer type; // optional

 using int_fast8_t = signed integer type;
 using int_fast16_t = signed integer type;
 using int_fast32_t = signed integer type;
 using int_fast64_t = signed integer type;

 using int_least8_t = signed integer type;
 using int_least16_t = signed integer type;
 using int_least32_t = signed integer type;
 using int_least64_t = signed integer type;

 using intmax_t = signed integer type;
 using intptr_t = signed integer type; // optional

 using uint8_t = unsigned integer type; // optional
 using uint16_t = unsigned integer type; // optional
 using uint32_t = unsigned integer type; // optional
 using uint64_t = unsigned integer type; // optional

 using uint_fast8_t = unsigned integer type;
 using uint_fast16_t = unsigned integer type;
 using uint_fast32_t = unsigned integer type;
 using uint_fast64_t = unsigned integer type;

 using uint_least8_t = unsigned integer type;
 using uint_least16_t = unsigned integer type;
 using uint_least32_t = unsigned integer type;
 using uint_least64_t = unsigned integer type;

 using uintmax_t = unsigned integer type;

```



```

 using uintptr_t = unsigned integer type; // optional
}

```

1 The header also defines numerous macros of the form:

```

INT_[FAST LEAST]{8 16 32 64}_MIN
[U]INT_[FAST LEAST]{8 16 32 64}_MAX
INT{MAX PTR}_MIN
[U]INT{MAX PTR}_MAX
{PTRDIFF SIG_ATOMIC WCHAR WINT}_{_MAX _MIN}
SIZE_MAX

```

plus function macros of the form:

```
[U]INT{8 16 32 64 MAX}_C
```

2 The header defines all types and macros the same as the C standard library header `<stdint.h>`.

SEE ALSO: ISO C 7.20

## 21.5 Start and termination

[support.start.term]

1 [Note: The header `<cstdlib>` (21.2.2) declares the functions described in this subclause. — end note]

```
[[noreturn]] void _Exit(int status) noexcept;
```

2 *Effects:* This function has the semantics specified in the C standard library.

3 *Remarks:* The program is terminated without executing destructors for objects of automatic, thread, or static storage duration and without calling functions passed to `atexit()` (6.8.3.4). The function `_Exit` is signal-safe (21.12.4).

```
[[noreturn]] void abort() noexcept;
```

4 *Effects:* This function has the semantics specified in the C standard library.

5 *Remarks:* The program is terminated without executing destructors for objects of automatic, thread, or static storage duration and without calling functions passed to `atexit()` (6.8.3.4). The function `abort` is signal-safe (21.12.4).

```
int atexit(c-atexit-handler* f) noexcept;
```

```
int atexit(atexit-handler* f) noexcept;
```

6 *Effects:* The `atexit()` functions register the function pointed to by `f` to be called without arguments at normal program termination. It is unspecified whether a call to `atexit()` that does not happen before (6.8.2) a call to `exit()` will succeed. [Note: The `atexit()` functions do not introduce a data race (20.5.5.9). — end note]

7 *Implementation limits:* The implementation shall support the registration of at least 32 functions.

8 *Returns:* The `atexit()` function returns zero if the registration succeeds, nonzero if it fails.

```
[[noreturn]] void exit(int status);
```

9 *Effects:*

(9.1) — First, objects with thread storage duration and associated with the current thread are destroyed. Next, objects with static storage duration are destroyed and functions registered by calling `atexit` are called.<sup>217</sup> See 6.8.3.4 for the order of destructions and calls. (Automatic objects are not destroyed as a result of calling `exit()`.)<sup>218</sup>

If control leaves a registered function called by `exit` because the function does not provide a handler for a thrown exception, the function `std::terminate` shall be called (18.5.1).

(9.2) — Next, all open C streams (as mediated by the function signatures declared in `<cstdio>`) with unwritten buffered data are flushed, all open C streams are closed, and all files created by calling `tmpfile()` are removed.

217) A function is called for every time it is registered.

218) Objects with automatic storage duration are all destroyed in a program whose `main` function (6.8.3.1) contains no automatic objects and executes the call to `exit()`. Control can be transferred directly to such a `main` function by throwing an exception that is caught in `main`.

- (9.3) — Finally, control is returned to the host environment. If `status` is zero or `EXIT_SUCCESS`, an implementation-defined form of the status *successful termination* is returned. If `status` is `EXIT_FAILURE`, an implementation-defined form of the status *unsuccessful termination* is returned. Otherwise the status returned is implementation-defined.<sup>219</sup>

```
int at_quick_exit(c-atexit_handler* f) noexcept;
int at_quick_exit(atexit_handler* f) noexcept;
```

- 10 *Effects:* The `at_quick_exit()` functions register the function pointed to by `f` to be called without arguments when `quick_exit` is called. It is unspecified whether a call to `at_quick_exit()` that does not happen before (6.8.2) all calls to `quick_exit` will succeed. [*Note:* The `at_quick_exit()` functions do not introduce a data race (20.5.5.9). — *end note*] [*Note:* The order of registration may be indeterminate if `at_quick_exit` was called from more than one thread. — *end note*] [*Note:* The `at_quick_exit` registrations are distinct from the `atexit` registrations, and applications may need to call both registration functions with the same argument. — *end note*]

- 11 *Implementation limits:* The implementation shall support the registration of at least 32 functions.

- 12 *Returns:* Zero if the registration succeeds, nonzero if it fails.

```
[[noreturn]] void quick_exit(int status) noexcept;
```

- 13 *Effects:* Functions registered by calls to `at_quick_exit` are called in the reverse order of their registration, except that a function shall be called after any previously registered functions that had already been called at the time it was registered. Objects shall not be destroyed as a result of calling `quick_exit`. If control leaves a registered function called by `quick_exit` because the function does not provide a handler for a thrown exception, the function `std::terminate` shall be called. [*Note:* A function registered via `at_quick_exit` is invoked by the thread that calls `quick_exit`, which can be a different thread than the one that registered it, so registered functions should not rely on the identity of objects with thread storage duration. — *end note*] After calling registered functions, `quick_exit` shall call `_Exit(status)`.

- 14 *Remarks:* The function `quick_exit` is signal-safe (21.12.4) when the functions registered with `at_quick_exit` are.

SEE ALSO: ISO C 7.22.4

## 21.6 Dynamic memory management

[support.dynamic]

- <sup>1</sup> The header `<new>` defines several functions that manage the allocation of dynamic storage in a program. It also defines components for reporting storage management errors.

### 21.6.1 Header `<new>` synopsis

[new.syn]

```
namespace std {
 class bad_alloc;
 class bad_array_new_length;

 struct destroying_delete_t {
 explicit destroying_delete_t() = default;
 };
 inline constexpr destroying_delete_t destroying_delete{};

 enum class align_val_t : size_t {};

 struct nothrow_t { explicit nothrow_t() = default; };
 extern const nothrow_t nothrow;

 using new_handler = void (*)();
 new_handler get_new_handler() noexcept;
 new_handler set_new_handler(new_handler new_p) noexcept;

 // 21.6.4, pointer optimization barrier
 template<class T> [[nodiscard]] constexpr T* launder(T* p) noexcept;
```

<sup>219)</sup> The macros `EXIT_FAILURE` and `EXIT_SUCCESS` are defined in `<cstdlib>`.

```

// 21.6.5, hardware interference size
inline constexpr size_t hardware_destructive_interference_size = implementation-defined;
inline constexpr size_t hardware_constructive_interference_size = implementation-defined;
}

[[nodiscard]] void* operator new(std::size_t size);
[[nodiscard]] void* operator new(std::size_t size, std::align_val_t alignment);
[[nodiscard]] void* operator new(std::size_t size, const std::nothrow_t&) noexcept;
[[nodiscard]] void* operator new(std::size_t size, std::align_val_t alignment,
 const std::nothrow_t&) noexcept;

void operator delete(void* ptr) noexcept;
void operator delete(void* ptr, std::size_t size) noexcept;
void operator delete(void* ptr, std::align_val_t alignment) noexcept;
void operator delete(void* ptr, std::size_t size, std::align_val_t alignment) noexcept;
void operator delete(void* ptr, const std::nothrow_t&) noexcept;
void operator delete(void* ptr, std::align_val_t alignment, const std::nothrow_t&) noexcept;

[[nodiscard]] void* operator new[](std::size_t size);
[[nodiscard]] void* operator new[](std::size_t size, std::align_val_t alignment);
[[nodiscard]] void* operator new[](std::size_t size, const std::nothrow_t&) noexcept;
[[nodiscard]] void* operator new[](std::size_t size, std::align_val_t alignment,
 const std::nothrow_t&) noexcept;

void operator delete[](void* ptr) noexcept;
void operator delete[](void* ptr, std::size_t size) noexcept;
void operator delete[](void* ptr, std::align_val_t alignment) noexcept;
void operator delete[](void* ptr, std::size_t size, std::align_val_t alignment) noexcept;
void operator delete[](void* ptr, const std::nothrow_t&) noexcept;
void operator delete[](void* ptr, std::align_val_t alignment, const std::nothrow_t&) noexcept;

[[nodiscard]] void* operator new (std::size_t size, void* ptr) noexcept;
[[nodiscard]] void* operator new[](std::size_t size, void* ptr) noexcept;
void operator delete (void* ptr, void*) noexcept;
void operator delete[](void* ptr, void*) noexcept;

```

## 21.6.2 Storage allocation and deallocation [new.delete]

- <sup>1</sup> Except where otherwise specified, the provisions of 6.6.4.4 apply to the library versions of `operator new` and `operator delete`. If the value of an alignment argument passed to any of these functions is not a valid alignment value, the behavior is undefined.

### 21.6.2.1 Single-object forms [new.delete.single]

```

[[nodiscard]] void* operator new(std::size_t size);
[[nodiscard]] void* operator new(std::size_t size, std::align_val_t alignment);

```

- <sup>1</sup> *Effects:* The allocation functions (6.6.4.4.1) called by a *new-expression* (8.5.2.4) to allocate `size` bytes of storage. The second form is called for a type with new-extended alignment, and allocates storage with the specified alignment. The first form is called otherwise, and allocates storage suitably aligned to represent any object of that size provided the object's type does not have new-extended alignment.
- <sup>2</sup> *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.
- <sup>3</sup> *Required behavior:* Return a non-null pointer to suitably aligned storage (6.6.4.4), or else throw a `bad_alloc` exception. This requirement is binding on any replacement versions of these functions.
- <sup>4</sup> *Default behavior:*
- (4.1) — Executes a loop: Within the loop, the function first attempts to allocate the requested storage. Whether the attempt involves a call to the C standard library functions `malloc` or `aligned_alloc` is unspecified.
- (4.2) — Returns a pointer to the allocated storage if the attempt is successful. Otherwise, if the current `new_handler` (21.6.3.5) is a null pointer value, throws `bad_alloc`.

- (4.3) — Otherwise, the function calls the current `new_handler` function (21.6.3.3). If the called function returns, the loop repeats.
- (4.4) — The loop terminates when an attempt to allocate the requested storage is successful or when a called `new_handler` function does not return.

```
[[nodiscard]] void* operator new(std::size_t size, const std::nothrow_t&) noexcept;
[[nodiscard]] void* operator new(std::size_t size, std::align_val_t alignment,
 const std::nothrow_t&) noexcept;
```

5 *Effects:* Same as above, except that these are called by a placement version of a *new-expression* when a C++ program prefers a null pointer result as an error indication, instead of a `bad_alloc` exception.

6 *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.

7 *Required behavior:* Return a non-null pointer to suitably aligned storage (6.6.4.4), or else return a null pointer. Each of these `nothrow` versions of `operator new` returns a pointer obtained as if acquired from the (possibly replaced) corresponding non-placement function. This requirement is binding on any replacement versions of these functions.

8 *Default behavior:* Calls `operator new(size)`, or `operator new(size, alignment)`, respectively. If the call returns normally, returns the result of that call. Otherwise, returns a null pointer.

9 *[Example:*

```
 T* p1 = new T; // throws bad_alloc if it fails
 T* p2 = new(nothrow) T; // returns nullptr if it fails
— end example]
```

```
void operator delete(void* ptr) noexcept;
void operator delete(void* ptr, std::size_t size) noexcept;
void operator delete(void* ptr, std::align_val_t alignment) noexcept;
void operator delete(void* ptr, std::size_t size, std::align_val_t alignment) noexcept;
```

10 *Effects:* The deallocation functions (6.6.4.4.2) called by a *delete-expression* (8.5.2.5) to render the value of `ptr` invalid.

11 *Replaceable:* A C++ program may define functions with any of these function signatures, and thereby displace the default versions defined by the C++ standard library. If a function without a `size` parameter is defined, the program should also define the corresponding function with a `size` parameter. If a function with a `size` parameter is defined, the program shall also define the corresponding version without the `size` parameter. *[Note:* The default behavior below may change in the future, which will require replacing both deallocation functions when replacing the allocation function. — end note]

12 *Requires:* `ptr` shall be a null pointer or its value shall represent the address of a block of memory allocated by an earlier call to a (possibly replaced) `operator new(std::size_t)` or `operator new(std::size_t, std::align_val_t)` which has not been invalidated by an intervening call to `operator delete`.

13 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then `ptr` shall be a safely-derived pointer.

14 *Requires:* If the `alignment` parameter is not present, `ptr` shall have been returned by an allocation function without an `alignment` parameter. If present, the `alignment` argument shall equal the `alignment` argument passed to the allocation function that returned `ptr`. If present, the `size` argument shall equal the `size` argument passed to the allocation function that returned `ptr`.

15 *Required behavior:* A call to an `operator delete` with a `size` parameter may be changed to a call to the corresponding `operator delete` without a `size` parameter, without affecting memory allocation. *[Note:* A conforming implementation is for `operator delete(void* ptr, std::size_t size)` to simply call `operator delete(ptr)`. — end note]

16 *Default behavior:* The functions that have a `size` parameter forward their other parameters to the corresponding function without a `size` parameter. *[Note:* See the note in the above *Replaceable:* paragraph. — end note]

17 *Default behavior:* If `ptr` is null, does nothing. Otherwise, reclaims the storage allocated by the earlier call to `operator new`.

18 *Remarks:* It is unspecified under what conditions part or all of such reclaimed storage will be allocated by subsequent calls to `operator new` or any of `aligned_alloc`, `calloc`, `malloc`, or `realloc`, declared in `<cstdlib>`.

```
void operator delete(void* ptr, const std::nothrow_t&) noexcept;
void operator delete(void* ptr, std::align_val_t alignment, const std::nothrow_t&) noexcept;
```

19 *Effects:* The deallocation functions (6.6.4.4.2) called by the implementation to render the value of `ptr` invalid when the constructor invoked from a `nothrow` placement version of the *new-expression* throws an exception.

20 *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.

21 *Requires:* `ptr` shall be a null pointer or its value shall represent the address of a block of memory allocated by an earlier call to a (possibly replaced) `operator new(std::size_t)` or `operator new(std::size_t, std::align_val_t)` which has not been invalidated by an intervening call to `operator delete`.

22 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then `ptr` shall be a safely-derived pointer.

23 *Requires:* If the `alignment` parameter is not present, `ptr` shall have been returned by an allocation function without an `alignment` parameter. If present, the `alignment` argument shall equal the `alignment` argument passed to the allocation function that returned `ptr`.

24 *Default behavior:* Calls `operator delete(ptr)`, or `operator delete(ptr, alignment)`, respectively.

### 21.6.2.2 Array forms

[`new.delete.array`]

```
[[nodiscard]] void* operator new[](std::size_t size);
[[nodiscard]] void* operator new[](std::size_t size, std::align_val_t alignment);
```

1 *Effects:* The allocation functions (6.6.4.4.1) called by the array form of a *new-expression* (8.5.2.4) to allocate `size` bytes of storage. The second form is called for a type with new-extended alignment, and allocates storage with the specified alignment. The first form is called otherwise, and allocates storage suitably aligned to represent any array object of that size or smaller, provided the object's type does not have new-extended alignment.<sup>220</sup>

2 *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.

3 *Required behavior:* Same as for the corresponding single-object forms. This requirement is binding on any replacement versions of these functions.

4 *Default behavior:* Returns `operator new(size)`, or `operator new(size, alignment)`, respectively.

```
[[nodiscard]] void* operator new[](std::size_t size, const std::nothrow_t&) noexcept;
[[nodiscard]] void* operator new[](std::size_t size, std::align_val_t alignment,
 const std::nothrow_t&) noexcept;
```

5 *Effects:* Same as above, except that these are called by a placement version of a *new-expression* when a C++ program prefers a null pointer result as an error indication, instead of a `bad_alloc` exception.

6 *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.

7 *Required behavior:* Return a non-null pointer to suitably aligned storage (6.6.4.4), or else return a null pointer. Each of these `nothrow` versions of `operator new[]` returns a pointer obtained as if acquired from the (possibly replaced) corresponding non-placement function. This requirement is binding on any replacement versions of these functions.

8 *Default behavior:* Calls `operator new[](size)`, or `operator new[](size, alignment)`, respectively. If the call returns normally, returns the result of that call. Otherwise, returns a null pointer.

```
void operator delete[](void* ptr) noexcept;
void operator delete[](void* ptr, std::size_t size) noexcept;
void operator delete[](void* ptr, std::align_val_t alignment) noexcept;
```

220) It is not the direct responsibility of `operator new[]` or `operator delete[]` to note the repetition count or element size of the array. Those operations are performed elsewhere in the array `new` and `delete` expressions. The array `new` expression, may, however, increase the `size` argument to `operator new[]` to obtain space to store supplemental information.

```
void operator delete[](void* ptr, std::size_t size, std::align_val_t alignment) noexcept;
```

9 *Effects:* The deallocation functions (6.6.4.4.2) called by the array form of a *delete-expression* to render the value of `ptr` invalid.

10 *Replaceable:* A C++ program may define functions with any of these function signatures, and thereby displace the default versions defined by the C++ standard library. If a function without a `size` parameter is defined, the program should also define the corresponding function with a `size` parameter. If a function with a `size` parameter is defined, the program shall also define the corresponding version without the `size` parameter. [*Note:* The default behavior below may change in the future, which will require replacing both deallocation functions when replacing the allocation function. — *end note*]

11 *Requires:* `ptr` shall be a null pointer or its value shall represent the address of a block of memory allocated by an earlier call to a (possibly replaced) `operator new[](std::size_t)` or `operator new[](std::size_t, std::align_val_t)` which has not been invalidated by an intervening call to `operator delete[]`.

12 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then `ptr` shall be a safely-derived pointer.

13 *Requires:* If the `alignment` parameter is not present, `ptr` shall have been returned by an allocation function without an `alignment` parameter. If present, the `alignment` argument shall equal the `alignment` argument passed to the allocation function that returned `ptr`. If present, the `size` argument shall equal the `size` argument passed to the allocation function that returned `ptr`.

14 *Required behavior:* A call to an `operator delete[]` with a `size` parameter may be changed to a call to the corresponding `operator delete[]` without a `size` parameter, without affecting memory allocation. [*Note:* A conforming implementation is for `operator delete[](void* ptr, std::size_t size)` to simply call `operator delete[](ptr)`. — *end note*]

15 *Default behavior:* The functions that have a `size` parameter forward their other parameters to the corresponding function without a `size` parameter. The functions that do not have a `size` parameter forward their parameters to the corresponding `operator delete` (single-object) function.

```
void operator delete[](void* ptr, const std::nothrow_t&) noexcept;
```

```
void operator delete[](void* ptr, std::align_val_t alignment, const std::nothrow_t&) noexcept;
```

16 *Effects:* The deallocation functions (6.6.4.4.2) called by the implementation to render the value of `ptr` invalid when the constructor invoked from a *nothrow* placement version of the array *new-expression* throws an exception.

17 *Replaceable:* A C++ program may define functions with either of these function signatures, and thereby displace the default versions defined by the C++ standard library.

18 *Requires:* `ptr` shall be a null pointer or its value shall represent the address of a block of memory allocated by an earlier call to a (possibly replaced) `operator new[](std::size_t)` or `operator new[](std::size_t, std::align_val_t)` which has not been invalidated by an intervening call to `operator delete[]`.

19 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then `ptr` shall be a safely-derived pointer.

20 *Requires:* If the `alignment` parameter is not present, `ptr` shall have been returned by an allocation function without an `alignment` parameter. If present, the `alignment` argument shall equal the `alignment` argument passed to the allocation function that returned `ptr`.

21 *Default behavior:* Calls `operator delete[](ptr)`, or `operator delete[](ptr, alignment)`, respectively.

### 21.6.2.3 Non-allocating forms

[`new.delete.placement`]

1 These functions are reserved; a C++ program may not define functions that displace the versions in the C++ standard library (20.5.4). The provisions of 6.6.4.4 do not apply to these reserved placement forms of `operator new` and `operator delete`.

```
[[nodiscard]] void* operator new(std::size_t size, void* ptr) noexcept;
```

2 *Returns:* `ptr`.

3 *Remarks:* Intentionally performs no other action.

4 *[Example: This can be useful for constructing an object at a known address:*

```
void* place = operator new(sizeof(Something));
Something* p = new (place) Something();
— end example]
```

```
[[nodiscard]] void* operator new[](std::size_t size, void* ptr) noexcept;
```

5 *Returns:* ptr.

6 *Remarks:* Intentionally performs no other action.

```
void operator delete(void* ptr, void*) noexcept;
```

7 *Effects:* Intentionally performs no action.

8 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then ptr shall be a safely-derived pointer.

9 *Remarks:* Default function called when any part of the initialization in a placement *new-expression* that invokes the library's non-array placement operator new terminates by throwing an exception (8.5.2.4).

```
void operator delete[](void* ptr, void*) noexcept;
```

10 *Effects:* Intentionally performs no action.

11 *Requires:* If an implementation has strict pointer safety (6.6.4.4.3) then ptr shall be a safely-derived pointer.

12 *Remarks:* Default function called when any part of the initialization in a placement *new-expression* that invokes the library's array placement operator new terminates by throwing an exception (8.5.2.4).

#### 21.6.2.4 Data races

[new.delete.dataraces]

1 For purposes of determining the existence of data races, the library versions of `operator new`, user replacement versions of global `operator new`, the C standard library functions `aligned_alloc`, `calloc`, and `malloc`, the library versions of `operator delete`, user replacement versions of `operator delete`, the C standard library function `free`, and the C standard library function `realloc` shall not introduce a data race (20.5.5.9). Calls to these functions that allocate or deallocate a particular unit of storage shall occur in a single total order, and each such deallocation call shall happen before (6.8.2) the next allocation (if any) in this order.

### 21.6.3 Storage allocation errors

[alloc.errors]

#### 21.6.3.1 Class bad\_alloc

[bad.alloc]

```
namespace std {
class bad_alloc : public exception {
public:
 bad_alloc() noexcept;
 bad_alloc(const bad_alloc&) noexcept;
 bad_alloc& operator=(const bad_alloc&) noexcept;
 const char* what() const noexcept override;
};
}
```

1 The class `bad_alloc` defines the type of objects thrown as exceptions by the implementation to report a failure to allocate storage.

```
bad_alloc() noexcept;
```

2 *Effects:* Constructs an object of class `bad_alloc`.

```
bad_alloc(const bad_alloc&) noexcept;
bad_alloc& operator=(const bad_alloc&) noexcept;
```

3 *Effects:* Copies an object of class `bad_alloc`.

```
const char* what() const noexcept override;
```

4 *Returns:* An implementation-defined NTBS.

5 *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4).

**21.6.3.2 Class `bad_array_new_length`** **[new.badlength]**

```
namespace std {
 class bad_array_new_length : public bad_alloc {
 public:
 bad_array_new_length() noexcept;
 const char* what() const noexcept override;
 };
}
```

- <sup>1</sup> The class `bad_array_new_length` defines the type of objects thrown as exceptions by the implementation to report an attempt to allocate an array of size less than zero or greater than an implementation-defined limit (8.5.2.4).

```
bad_array_new_length() noexcept;
```

- <sup>2</sup> *Effects:* Constructs an object of class `bad_array_new_length`.

```
const char* what() const noexcept override;
```

- <sup>3</sup> *Returns:* An implementation-defined NTBS.

- <sup>4</sup> *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4).

**21.6.3.3 Type `new_handler`** **[new.handler]**

```
using new_handler = void (*)();
```

- <sup>1</sup> The type of a *handler function* to be called by operator `new()` or operator `new[]()` (21.6.2) when they cannot satisfy a request for additional storage.

- <sup>2</sup> *Required behavior:* A `new_handler` shall perform one of the following:

- (2.1) — make more storage available for allocation and then return;
- (2.2) — throw an exception of type `bad_alloc` or a class derived from `bad_alloc`;
- (2.3) — terminate execution of the program without returning to the caller.

**21.6.3.4 `set_new_handler`** **[set.new.handler]**

```
new_handler set_new_handler(new_handler new_p) noexcept;
```

- <sup>1</sup> *Effects:* Establishes the function designated by `new_p` as the current `new_handler`.

- <sup>2</sup> *Returns:* The previous `new_handler`.

- <sup>3</sup> *Remarks:* The initial `new_handler` is a null pointer.

**21.6.3.5 `get_new_handler`** **[get.new.handler]**

```
new_handler get_new_handler() noexcept;
```

- <sup>1</sup> *Returns:* The current `new_handler`. [*Note:* This may be a null pointer value. — *end note*]

**21.6.4 Pointer optimization barrier** **[ptr.laundry]**

```
template<class T> [[nodiscard]] constexpr T* launder(T* p) noexcept;
```

- <sup>1</sup> *Requires:* `p` represents the address *A* of a byte in memory. An object *X* that is within its lifetime (6.6.3) and whose type is similar (7.5) to `T` is located at the address *A*. All bytes of storage that would be reachable through the result are reachable through `p` (see below).

- <sup>2</sup> *Returns:* A value of type `T *` that points to *X*.

- <sup>3</sup> *Remarks:* An invocation of this function may be used in a core constant expression whenever the value of its argument may be used in a core constant expression. A byte of storage is reachable through a pointer value that points to an object *Y* if it is within the storage occupied by *Y*, an object that is pointer-interconvertible with *Y*, or the immediately-enclosing array object if *Y* is an array element. The program is ill-formed if `T` is a function type or *cv void*.

- <sup>4</sup> [*Note:* If a new object is created in storage occupied by an existing object of the same type, a pointer to the original object can be used to refer to the new object unless the type contains `const` or reference



members; in the latter cases, this function can be used to obtain a usable pointer to the new object. See 6.6.3. — end note]

5 [Example:

```
struct X { const int n; };
X *p = new X{3};
const int a = p->n;
new (p) X{5}; // p does not point to new object (6.6.3) because X::n is const
const int b = p->n; // undefined behavior
const int c = std::launder(p)->n; // OK
```

— end example]

### 21.6.5 Hardware interference size

[hardware.interference]

```
inline constexpr size_t hardware_destructive_interference_size = implementation-defined;
```

- 1 This number is the minimum recommended offset between two concurrently-accessed objects to avoid additional performance degradation due to contention introduced by the implementation. It shall be at least `alignof(max_align_t)`.

[Example:

```
struct keep_apart {
 alignas(hardware_destructive_interference_size) atomic<int> cat;
 alignas(hardware_destructive_interference_size) atomic<int> dog;
};
```

— end example]

```
inline constexpr size_t hardware_constructive_interference_size = implementation-defined;
```

- 2 This number is the maximum recommended size of contiguous memory occupied by two objects accessed with temporal locality by concurrent threads. It shall be at least `alignof(max_align_t)`.

[Example:

```
struct together {
 atomic<int> dog;
 int puppy;
};
struct kennel {
 // Other data members...
 alignas(sizeof(together)) together pack;
 // Other data members...
};
static_assert(sizeof(together) <= hardware_constructive_interference_size);
```

— end example]

### 21.7 Type identification

[support.rtti]

- 1 The header `<typeinfo>` defines a type associated with type information generated by the implementation. It also defines two types for reporting dynamic type identification errors.

#### 21.7.1 Header `<typeinfo>` synopsis

[typeinfo.syn]

```
namespace std {
 class type_info;
 class bad_cast;
 class bad_typeid;
}
```

#### 21.7.2 Class `type_info`

[type.info]

```
namespace std {
 class type_info {
 public:
 virtual ~type_info();
 bool operator==(const type_info& rhs) const noexcept;
 bool operator!=(const type_info& rhs) const noexcept;
```

```

 bool before(const type_info& rhs) const noexcept;
 size_t hash_code() const noexcept;
 const char* name() const noexcept;

 type_info(const type_info& rhs) = delete; // cannot be copied
 type_info& operator=(const type_info& rhs) = delete; // cannot be copied
};
}

```

- <sup>1</sup> The class `type_info` describes type information generated by the implementation (8.5.1.8). Objects of this class effectively store a pointer to a name for the type, and an encoded value suitable for comparing two types for equality or collating order. The names, encoding rule, and collating sequence for types are all unspecified and may differ between programs.

```
bool operator==(const type_info& rhs) const noexcept;
```

- <sup>2</sup> *Effects:* Compares the current object with `rhs`.  
<sup>3</sup> *Returns:* true if the two values describe the same type.

```
bool operator!=(const type_info& rhs) const noexcept;
```

- <sup>4</sup> *Returns:* `!(*this == rhs)`.

```
bool before(const type_info& rhs) const noexcept;
```

- <sup>5</sup> *Effects:* Compares the current object with `rhs`.  
<sup>6</sup> *Returns:* true if `*this` precedes `rhs` in the implementation's collation order.

```
size_t hash_code() const noexcept;
```

- <sup>7</sup> *Returns:* An unspecified value, except that within a single execution of the program, it shall return the same value for any two `type_info` objects which compare equal.  
<sup>8</sup> *Remarks:* An implementation should return different values for two `type_info` objects which do not compare equal.

```
const char* name() const noexcept;
```

- <sup>9</sup> *Returns:* An implementation-defined NTBS.  
<sup>10</sup> *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4)

### 21.7.3 Class `bad_cast`

[`bad.cast`]

```

namespace std {
 class bad_cast : public exception {
 public:
 bad_cast() noexcept;
 bad_cast(const bad_cast&) noexcept;
 bad_cast& operator=(const bad_cast&) noexcept;
 const char* what() const noexcept override;
 };
}

```

- <sup>1</sup> The class `bad_cast` defines the type of objects thrown as exceptions by the implementation to report the execution of an invalid `dynamic_cast` expression (8.5.1.7).

```
bad_cast() noexcept;
```

- <sup>2</sup> *Effects:* Constructs an object of class `bad_cast`.

```
bad_cast(const bad_cast&) noexcept;
bad_cast& operator=(const bad_cast&) noexcept;
```

- <sup>3</sup> *Effects:* Copies an object of class `bad_cast`.

```
const char* what() const noexcept override;
```

- <sup>4</sup> *Returns:* An implementation-defined NTBS.

- 5 *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4)

## 21.7.4 Class `bad_typeid` [`bad.typeid`]

```
namespace std {
 class bad_typeid : public exception {
 public:
 bad_typeid() noexcept;
 bad_typeid(const bad_typeid&) noexcept;
 bad_typeid& operator=(const bad_typeid&) noexcept;
 const char* what() const noexcept override;
 };
}
```

- 1 The class `bad_typeid` defines the type of objects thrown as exceptions by the implementation to report a null pointer in a `typeid` expression (8.5.1.8).

```
bad_typeid() noexcept;
```

- 2 *Effects:* Constructs an object of class `bad_typeid`.

```
bad_typeid(const bad_typeid&) noexcept;
bad_typeid& operator=(const bad_typeid&) noexcept;
```

- 3 *Effects:* Copies an object of class `bad_typeid`.

```
const char* what() const noexcept override;
```

- 4 *Returns:* An implementation-defined NTBS.

- 5 *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4)

## 21.8 Contract violation handling [`support.contract`]

### 21.8.1 Header `<contract>` synopsis [`contract.syn`]

The header `<contract>` defines a type for reporting information about contract violations generated by the implementation.

```
namespace std {
 class contract_violation;
}
```

### 21.8.2 Class `contract_violation` [`support.contract.cviol`]

```
namespace std {
 class contract_violation {
 public:
 uint_least32_t line_number() const noexcept;
 string_view file_name() const noexcept;
 string_view function_name() const noexcept;
 string_view comment() const noexcept;
 string_view assertion_level() const noexcept;
 };
}
```

- 1 The class `contract_violation` describes information about a contract violation generated by the implementation.

```
uint_least32_t line_number() const noexcept;
```

- 2 *Returns:* The source code location where the contract violation happened (10.6.4). If the location is unknown, an implementation may return 0.

```
string_view file_name() const noexcept;
```

- 3 *Returns:* The source file name where the contract violation happened (10.6.4). If the file name is unknown, an implementation may return `string_view{}`.

```
string_view function_name() const noexcept;
```

- 4 *Returns:* The name of the function where the contract violation happened (10.6.4). If the function name is unknown, an implementation may return `string_view{}`.

```
string_view comment() const noexcept;
```

- 5 *Returns:* Implementation-defined text describing the predicate of the violated contract.

```
string_view assertion_level() const noexcept;
```

- 6 *Returns:* Text describing the *assertion-level* of the violated contract.

## 21.9 Exception handling

[support.exception]

- 1 The header `<exception>` defines several types and functions related to the handling of exceptions in a C++ program.

### 21.9.1 Header `<exception>` synopsis

[exception.syn]

```
namespace std {
 class exception;
 class bad_exception;
 class nested_exception;

 using terminate_handler = void (*)();
 terminate_handler get_terminate() noexcept;
 terminate_handler set_terminate(terminate_handler f) noexcept;
 [[noreturn]] void terminate() noexcept;

 int uncaught_exceptions() noexcept;

 using exception_ptr = unspecified;

 exception_ptr current_exception() noexcept;
 [[noreturn]] void rethrow_exception(exception_ptr p);
 template<class E> exception_ptr make_exception_ptr(E e) noexcept;

 template<class T> [[noreturn]] void throw_with_nested(T&& t);
 template<class E> void rethrow_if_nested(const E& e);
}

```

### 21.9.2 Class `exception`

[exception]

```
namespace std {
 class exception {
 public:
 exception() noexcept;
 exception(const exception&) noexcept;
 exception& operator=(const exception&) noexcept;
 virtual ~exception();
 virtual const char* what() const noexcept;
 };
}

```

- 1 The class `exception` defines the base class for the types of objects thrown as exceptions by C++ standard library components, and certain expressions, to report errors detected during program execution.
- 2 Each standard library class `T` that derives from class `exception` shall have a publicly accessible copy constructor and a publicly accessible copy assignment operator that do not exit with an exception. These member functions shall meet the following postcondition: If two objects `lhs` and `rhs` both have dynamic type `T` and `lhs` is a copy of `rhs`, then `strcmp(lhs.what(), rhs.what())` shall equal 0.

```
exception() noexcept;
```

- 3 *Effects:* Constructs an object of class `exception`.

```
exception(const exception& rhs) noexcept;
exception& operator=(const exception& rhs) noexcept;
```

4 *Effects:* Copies an exception object.

5 *Ensures:* If `*this` and `rhs` both have dynamic type `exception` then the value of the expression `strcmp(what(), rhs.what())` shall equal 0.

```
virtual ~exception();
```

6 *Effects:* Destroys an object of class `exception`.

```
virtual const char* what() const noexcept;
```

7 *Returns:* An implementation-defined NTBS.

8 *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4). The return value remains valid until the exception object from which it is obtained is destroyed or a non-const member function of the exception object is called.

### 21.9.3 Class `bad_exception`

[`bad.exception`]

```
namespace std {
 class bad_exception : public exception {
 public:
 bad_exception() noexcept;
 bad_exception(const bad_exception&) noexcept;
 bad_exception& operator=(const bad_exception&) noexcept;
 const char* what() const noexcept override;
 };
}
```

1 The class `bad_exception` defines the type of the object referenced by the `exception_ptr` returned from a call to `current_exception` (21.9.6) when the currently active exception object fails to copy.

```
bad_exception() noexcept;
```

2 *Effects:* Constructs an object of class `bad_exception`.

```
bad_exception(const bad_exception&) noexcept;
bad_exception& operator=(const bad_exception&) noexcept;
```

3 *Effects:* Copies an object of class `bad_exception`.

```
const char* what() const noexcept override;
```

4 *Returns:* An implementation-defined NTBS.

5 *Remarks:* The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4).

### 21.9.4 Abnormal termination

[`exception.terminate`]

#### 21.9.4.1 Type `terminate_handler`

[`terminate.handler`]

```
using terminate_handler = void (*)();
```

1 The type of a *handler function* to be called by `std::terminate()` when terminating exception processing.

2 *Required behavior:* A `terminate_handler` shall terminate execution of the program without returning to the caller.

3 *Default behavior:* The implementation's default `terminate_handler` calls `abort()`.

#### 21.9.4.2 `set_terminate`

[`set.terminate`]

```
terminate_handler set_terminate(terminate_handler f) noexcept;
```

1 *Effects:* Establishes the function designated by `f` as the current handler function for terminating exception processing.

2 *Remarks:* It is unspecified whether a null pointer value designates the default `terminate_handler`.

3 *Returns:* The previous `terminate_handler`.

**21.9.4.3 get\_terminate** **[get.terminate]**

```
terminate_handler get_terminate() noexcept;
```

1 *Returns:* The current `terminate_handler`. [*Note:* This may be a null pointer value. — *end note*]

**21.9.4.4 terminate** **[terminate]**

```
[[noreturn]] void terminate() noexcept;
```

1 *Remarks:* Called by the implementation when exception handling must be abandoned for any of several reasons (18.5.1). May also be called directly by the program.

2 *Effects:* Calls a `terminate_handler` function. It is unspecified which `terminate_handler` function will be called if an exception is active during a call to `set_terminate`. Otherwise calls the current `terminate_handler` function. [*Note:* A default `terminate_handler` is always considered a callable handler in this context. — *end note*]

**21.9.5 uncaught\_exceptions** **[uncaught.exceptions]**

```
int uncaught_exceptions() noexcept;
```

1 *Returns:* The number of uncaught exceptions (18.5.2).

2 *Remarks:* When `uncaught_exceptions() > 0`, throwing an exception can result in a call of the function `std::terminate` (18.5.1).

**21.9.6 Exception propagation** **[propagation]**

```
using exception_ptr = unspecified;
```

1 The type `exception_ptr` can be used to refer to an exception object.

2 `exception_ptr` shall satisfy the requirements of *Cpp17NullablePointer* (Table 30).

3 Two non-null values of type `exception_ptr` are equivalent and compare equal if and only if they refer to the same exception.

4 The default constructor of `exception_ptr` produces the null value of the type.

5 `exception_ptr` shall not be implicitly convertible to any arithmetic, enumeration, or pointer type.

6 [*Note:* An implementation might use a reference-counted smart pointer as `exception_ptr`. — *end note*]

7 For purposes of determining the presence of a data race, operations on `exception_ptr` objects shall access and modify only the `exception_ptr` objects themselves and not the exceptions they refer to. Use of `rethrow_exception` on `exception_ptr` objects that refer to the same exception object shall not introduce a data race. [*Note:* If `rethrow_exception` rethrows the same exception object (rather than a copy), concurrent access to that rethrown exception object may introduce a data race. Changes in the number of `exception_ptr` objects that refer to a particular exception do not introduce a data race. — *end note*]

```
exception_ptr current_exception() noexcept;
```

8 *Returns:* An `exception_ptr` object that refers to the currently handled exception (18.3) or a copy of the currently handled exception, or a null `exception_ptr` object if no exception is being handled. The referenced object shall remain valid at least as long as there is an `exception_ptr` object that refers to it. If the function needs to allocate memory and the attempt fails, it returns an `exception_ptr` object that refers to an instance of `bad_alloc`. It is unspecified whether the return values of two successive calls to `current_exception` refer to the same exception object. [*Note:* That is, it is unspecified whether `current_exception` creates a new copy each time it is called. — *end note*] If the attempt to copy the current exception object throws an exception, the function returns an `exception_ptr` object that refers to the thrown exception or, if this is not possible, to an instance of `bad_exception`. [*Note:* The copy constructor of the thrown exception may also fail, so the implementation is allowed to substitute a `bad_exception` object to avoid infinite recursion. — *end note*]

```
[[noreturn]] void rethrow_exception(exception_ptr p);
```

9 *Requires:* `p` shall not be a null pointer.

10 *Throws:* The exception object to which `p` refers.

```
template<class E> exception_ptr make_exception_ptr(E e) noexcept;
```

11 *Effects:* Creates an `exception_ptr` object that refers to a copy of `e`, as if:

```
try {
 throw e;
} catch(...) {
 return current_exception();
}
```

12 [*Note:* This function is provided for convenience and efficiency reasons. — *end note*]

### 21.9.7 nested\_exception

[`except.nested`]

```
namespace std {
 class nested_exception {
 public:
 nested_exception() noexcept;
 nested_exception(const nested_exception&) noexcept = default;
 nested_exception& operator=(const nested_exception&) noexcept = default;
 virtual ~nested_exception() = default;

 // access functions
 [[noreturn]] void rethrow_nested() const;
 exception_ptr nested_ptr() const noexcept;
 };

 template<class T> [[noreturn]] void throw_with_nested(T&& t);
 template<class E> void rethrow_if_nested(const E& e);
}
```

1 The class `nested_exception` is designed for use as a mixin through multiple inheritance. It captures the currently handled exception and stores it for later use.

2 [*Note:* `nested_exception` has a virtual destructor to make it a polymorphic class. Its presence can be tested for with `dynamic_cast`. — *end note*]

```
nested_exception() noexcept;
```

3 *Effects:* The constructor calls `current_exception()` and stores the returned value.

```
[[noreturn]] void rethrow_nested() const;
```

4 *Effects:* If `nested_ptr()` returns a null pointer, the function calls the function `std::terminate`. Otherwise, it throws the stored exception captured by `*this`.

```
exception_ptr nested_ptr() const noexcept;
```

5 *Returns:* The stored exception captured by this `nested_exception` object.

```
template<class T> [[noreturn]] void throw_with_nested(T&& t);
```

6 Let `U` be `decay_t<T>`.

7 *Requires:* `U` shall be *Cpp17CopyConstructible*.

8 *Throws:* If `is_class_v<U> && !is_final_v<U> && !is_base_of_v<nested_exception, U>` is true, an exception of unspecified type that is publicly derived from both `U` and `nested_exception` and constructed from `std::forward<T>(t)`, otherwise `std::forward<T>(t)`.

```
template<class E> void rethrow_if_nested(const E& e);
```

9 *Effects:* If `E` is not a polymorphic class type, or if `nested_exception` is an inaccessible or ambiguous base class of `E`, there is no effect. Otherwise, performs:

```
if (auto p = dynamic_cast<const nested_exception*>(addressof(e)))
 p->rethrow_nested();
```

## 21.10 Initializer lists [support.initlist]

- <sup>1</sup> The header `<initializer_list>` defines a class template and several support functions related to list-initialization (see 11.6.4). All functions specified in this subclause are signal-safe (21.12.4).

### 21.10.1 Header `<initializer_list>` synopsis [initializer\_list.syn]

```
namespace std {
 template<class E> class initializer_list {
 public:
 using value_type = E;
 using reference = const E&;
 using const_reference = const E&;
 using size_type = size_t;

 using iterator = const E*;
 using const_iterator = const E*;

 constexpr initializer_list() noexcept;

 constexpr size_t size() const noexcept; // number of elements
 constexpr const E* begin() const noexcept; // first element
 constexpr const E* end() const noexcept; // one past the last element
 };

 // 21.10.4, initializer list range access
 template<class E> constexpr const E* begin(initializer_list<E> il) noexcept;
 template<class E> constexpr const E* end(initializer_list<E> il) noexcept;
}

```

- <sup>1</sup> An object of type `initializer_list<E>` provides access to an array of objects of type `const E`. [Note: A pair of pointers or a pointer plus a length would be obvious representations for `initializer_list`. `initializer_list` is used to implement initializer lists as specified in 11.6.4. Copying an initializer list does not copy the underlying elements. — end note]
- <sup>2</sup> If an explicit specialization or partial specialization of `initializer_list` is declared, the program is ill-formed.

### 21.10.2 Initializer list constructors [support.initlist.cons]

```
constexpr initializer_list() noexcept;
```

- <sup>1</sup> *Effects:* Constructs an empty `initializer_list` object.
- <sup>2</sup> *Ensures:* `size() == 0`.

### 21.10.3 Initializer list access [support.initlist.access]

```
constexpr const E* begin() const noexcept;
```

- <sup>1</sup> *Returns:* A pointer to the beginning of the array. If `size() == 0` the values of `begin()` and `end()` are unspecified but they shall be identical.

```
constexpr const E* end() const noexcept;
```

- <sup>2</sup> *Returns:* `begin() + size()`.

```
constexpr size_t size() const noexcept;
```

- <sup>3</sup> *Returns:* The number of elements in the array.

- <sup>4</sup> *Complexity:* Constant time.

### 21.10.4 Initializer list range access [support.initlist.range]

```
template<class E> constexpr const E* begin(initializer_list<E> il) noexcept;
```

- <sup>1</sup> *Returns:* `il.begin()`.



```
template<class E> constexpr const E* end(initializer_list<E> il) noexcept;
```

<sup>2</sup> Returns: `il.end()`.

## 21.11 Comparisons [cmp]

### 21.11.1 Header <compare> synopsis [compare.syn]

<sup>1</sup> The header <compare> specifies types, objects, and functions for use primarily in connection with the three-way comparison operator (8.5.8).

```
namespace std {
 // 21.11.2, comparison category types
 class weak_equality;
 class strong_equality;
 class partial_ordering;
 class weak_ordering;
 class strong_ordering;

 // named comparison functions
 constexpr bool is_eq (weak_equality cmp) noexcept { return cmp == 0; }
 constexpr bool is_neq (weak_equality cmp) noexcept { return cmp != 0; }
 constexpr bool is_lt (partial_ordering cmp) noexcept { return cmp < 0; }
 constexpr bool is_lteq (partial_ordering cmp) noexcept { return cmp <= 0; }
 constexpr bool is_gt (partial_ordering cmp) noexcept { return cmp > 0; }
 constexpr bool is_gteq (partial_ordering cmp) noexcept { return cmp >= 0; }

 // 21.11.3, common comparison category type
 template<class... Ts>
 struct common_comparison_category {
 using type = see below;
 };
 template<class... Ts>
 using common_comparison_category_t = typename common_comparison_category<Ts...>::type;

 // 21.11.4, comparison algorithms
 template<class T> constexpr strong_ordering strong_order(const T& a, const T& b);
 template<class T> constexpr weak_ordering weak_order(const T& a, const T& b);
 template<class T> constexpr partial_ordering partial_order(const T& a, const T& b);
 template<class T> constexpr strong_equality strong_equal(const T& a, const T& b);
 template<class T> constexpr weak_equality weak_equal(const T& a, const T& b);
}

```

### 21.11.2 Comparison category types [cmp.categories]

#### 21.11.2.1 Preamble [cmp.categories.pre]

<sup>1</sup> The types `weak_equality`, `strong_equality`, `partial_ordering`, `weak_ordering`, and `strong_ordering` are collectively termed the *comparison category types*. Each is specified in terms of an exposition-only data member named `value` whose value typically corresponds to that of an enumerator from one of the following exposition-only enumerations:

```
enum class eq { equal = 0, equivalent = equal,
 nonequal = 1, nonequivalent = nonequal }; // exposition only
enum class ord { less = -1, greater = 1 }; // exposition only
enum class ncmp { unordered = -127 }; // exposition only

```

<sup>2</sup> [Note: The types `strong_ordering` and `weak_equality` correspond, respectively, to the terms total ordering and equivalence in mathematics. — end note]

<sup>3</sup> The relational and equality operators for the comparison category types are specified with an anonymous parameter of unspecified type. This type shall be selected by the implementation such that these parameters can accept literal 0 as a corresponding argument. [Example: `nullptr_t` satisfies this requirement. — end example] In this context, the behavior of a program that supplies an argument other than a literal 0 is undefined.

<sup>4</sup> For the purposes of this subclause, *substitutability* is the property that `f(a) == f(b)` is true whenever `a == b` is true, where `f` denotes a function that reads only comparison-salient state that is accessible via the argument's public `const` members.

**21.11.2.2 Class weak\_equality** **[cmp.weakeq]**

- <sup>1</sup> The `weak_equality` type is typically used as the result type of a three-way comparison operator (8.5.8) that (a) admits only equality and inequality comparisons, and (b) does not imply substitutability.

```
namespace std {
 class weak_equality {
 int value; // exposition only

 // exposition-only constructor
 explicit constexpr weak_equality(eq v) noexcept : value(int(v)) {} // exposition only

 public:
 // valid values
 static const weak_equality equivalent;
 static const weak_equality nonequivalent;

 // comparisons
 friend constexpr bool operator==(weak_equality v, unspecified) noexcept;
 friend constexpr bool operator!=(weak_equality v, unspecified) noexcept;
 friend constexpr bool operator==(unspecified, weak_equality v) noexcept;
 friend constexpr bool operator!=(unspecified, weak_equality v) noexcept;
 friend constexpr weak_equality operator<=>(weak_equality v, unspecified) noexcept;
 friend constexpr weak_equality operator<=>(unspecified, weak_equality v) noexcept;
 };

 // valid values' definitions
 inline constexpr weak_equality weak_equality::equivalent(eq::equivalent);
 inline constexpr weak_equality weak_equality::nonequivalent(eq::nonequivalent);
}

constexpr bool operator==(weak_equality v, unspecified) noexcept;
constexpr bool operator==(unspecified, weak_equality v) noexcept;
```

- <sup>2</sup> Returns: `v.value == 0`.

```
constexpr bool operator!=(weak_equality v, unspecified) noexcept;
constexpr bool operator!=(unspecified, weak_equality v) noexcept;
```

- <sup>3</sup> Returns: `v.value != 0`.

```
constexpr weak_equality operator<=>(weak_equality v, unspecified) noexcept;
constexpr weak_equality operator<=>(unspecified, weak_equality v) noexcept;
```

- <sup>4</sup> Returns: `v`.

**21.11.2.3 Class strong\_equality** **[cmp.strongeq]**

- <sup>1</sup> The `strong_equality` type is typically used as the result type of a three-way comparison operator (8.5.8) that (a) admits only equality and inequality comparisons, and (b) does imply substitutability.

```
namespace std {
 class strong_equality {
 int value; // exposition only

 // exposition-only constructor
 explicit constexpr strong_equality(eq v) noexcept : value(int(v)) {} // exposition only

 public:
 // valid values
 static const strong_equality equal;
 static const strong_equality nonequal;
 static const strong_equality equivalent;
 static const strong_equality nonequivalent;

 // conversion
 constexpr operator weak_equality() const noexcept;
```

```

// comparisons
friend constexpr bool operator==(strong_equality v, unspecified) noexcept;
friend constexpr bool operator!=(strong_equality v, unspecified) noexcept;
friend constexpr bool operator==(unspecified, strong_equality v) noexcept;
friend constexpr bool operator!=(unspecified, strong_equality v) noexcept;
friend constexpr strong_equality operator<=>(strong_equality v, unspecified) noexcept;
friend constexpr strong_equality operator<=>(unspecified, strong_equality v) noexcept;
};

```

```

// valid values' definitions
inline constexpr strong_equality strong_equality::equal(eq::equal);
inline constexpr strong_equality strong_equality::nonequal(eq::nonequal);
inline constexpr strong_equality strong_equality::equivalent(eq::equivalent);
inline constexpr strong_equality strong_equality::nonequivalent(eq::nonequivalent);
}

```

```
constexpr operator weak_equality() const noexcept;
```

2 *Returns:* value == 0 ? weak\_equality::equivalent : weak\_equality::nonequivalent.

```
constexpr bool operator==(strong_equality v, unspecified) noexcept;
constexpr bool operator==(unspecified, strong_equality v) noexcept;
```

3 *Returns:* v.value == 0.

```
constexpr bool operator!=(strong_equality v, unspecified) noexcept;
constexpr bool operator!=(unspecified, strong_equality v) noexcept;
```

4 *Returns:* v.value != 0.

```
constexpr strong_equality operator<=>(strong_equality v, unspecified) noexcept;
constexpr strong_equality operator<=>(unspecified, strong_equality v) noexcept;
```

5 *Returns:* v.

#### 21.11.2.4 Class partial\_ordering

[cmp.partialord]

<sup>1</sup> The partial\_ordering type is typically used as the result type of a three-way comparison operator (8.5.8) that (a) admits all of the six two-way comparison operators (8.5.9, 8.5.10), (b) does not imply substitutability, and (c) permits two values to be incomparable.<sup>221</sup>

```

namespace std {
class partial_ordering {
 int value; // exposition only
 bool is_ordered; // exposition only

 // exposition-only constructors
 explicit constexpr
 partial_ordering(eq v) noexcept : value(int(v)), is_ordered(true) {} // exposition only
 explicit constexpr
 partial_ordering(ord v) noexcept : value(int(v)), is_ordered(true) {} // exposition only
 explicit constexpr
 partial_ordering(ncmp v) noexcept : value(int(v)), is_ordered(false) {} // exposition only

public:
 // valid values
 static const partial_ordering less;
 static const partial_ordering equivalent;
 static const partial_ordering greater;
 static const partial_ordering unordered;

 // conversion
 constexpr operator weak_equality() const noexcept;

```

<sup>221</sup>) That is,  $a < b$ ,  $a == b$ , and  $a > b$  might all be false.

```

// comparisons
friend constexpr bool operator==(partial_ordering v, unspecified) noexcept;
friend constexpr bool operator!=(partial_ordering v, unspecified) noexcept;
friend constexpr bool operator< (partial_ordering v, unspecified) noexcept;
friend constexpr bool operator> (partial_ordering v, unspecified) noexcept;
friend constexpr bool operator<=(partial_ordering v, unspecified) noexcept;
friend constexpr bool operator>=(partial_ordering v, unspecified) noexcept;
friend constexpr bool operator==(unspecified, partial_ordering v) noexcept;
friend constexpr bool operator!=(unspecified, partial_ordering v) noexcept;
friend constexpr bool operator< (unspecified, partial_ordering v) noexcept;
friend constexpr bool operator> (unspecified, partial_ordering v) noexcept;
friend constexpr bool operator<=(unspecified, partial_ordering v) noexcept;
friend constexpr bool operator>=(unspecified, partial_ordering v) noexcept;
friend constexpr partial_ordering operator<=>(partial_ordering v, unspecified) noexcept;
friend constexpr partial_ordering operator<=>(unspecified, partial_ordering v) noexcept;
};

```

```

// valid values' definitions
inline constexpr partial_ordering partial_ordering::less(ord::less);
inline constexpr partial_ordering partial_ordering::equivalent(eq::equivalent);
inline constexpr partial_ordering partial_ordering::greater(ord::greater);
inline constexpr partial_ordering partial_ordering::unordered(ncmp::unordered);
}

```

```
constexpr operator weak_equality() const noexcept;
```

- 2 *Returns:* value == 0 ? weak\_equality::equivalent : weak\_equality::nonequivalent. [Note: The result is independent of the is\_ordered member. — end note]

```
constexpr bool operator==(partial_ordering v, unspecified) noexcept;
constexpr bool operator< (partial_ordering v, unspecified) noexcept;
constexpr bool operator> (partial_ordering v, unspecified) noexcept;
constexpr bool operator<=(partial_ordering v, unspecified) noexcept;
constexpr bool operator>=(partial_ordering v, unspecified) noexcept;
```

- 3 *Returns:* For operator@, v.is\_ordered && v.value @ 0.

```
constexpr bool operator==(unspecified, partial_ordering v) noexcept;
constexpr bool operator< (unspecified, partial_ordering v) noexcept;
constexpr bool operator> (unspecified, partial_ordering v) noexcept;
constexpr bool operator<=(unspecified, partial_ordering v) noexcept;
constexpr bool operator>=(unspecified, partial_ordering v) noexcept;
```

- 4 *Returns:* For operator@, v.is\_ordered && 0 @ v.value.

```
constexpr bool operator!=(partial_ordering v, unspecified) noexcept;
constexpr bool operator!=(unspecified, partial_ordering v) noexcept;
```

- 5 *Returns:* For operator@, !v.is\_ordered || v.value != 0.

```
constexpr partial_ordering operator<=>(partial_ordering v, unspecified) noexcept;
```

- 6 *Returns:* v.

```
constexpr partial_ordering operator<=>(unspecified, partial_ordering v) noexcept;
```

- 7 *Returns:* v < 0 ? partial\_ordering::greater : v > 0 ? partial\_ordering::less : v.

### 21.11.2.5 Class weak\_ordering

[cmp.weakord]

- 1 The weak\_ordering type is typically used as the result type of a three-way comparison operator (8.5.8) that (a) admits all of the six two-way comparison operators (8.5.9, 8.5.10), and (b) does not imply substitutability.

```

namespace std {
class weak_ordering {
int value; // exposition only

// exposition-only constructors
explicit constexpr weak_ordering(eq v) noexcept : value(int(v)) {} // exposition only

```

```

explicit constexpr weak_ordering(ord v) noexcept : value(int(v)) {} // exposition only

public:
 // valid values
 static const weak_ordering less;
 static const weak_ordering equivalent;
 static const weak_ordering greater;

 // conversions
 constexpr operator weak_equality() const noexcept;
 constexpr operator partial_ordering() const noexcept;

 // comparisons
 friend constexpr bool operator==(weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator!=(weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator< (weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator> (weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator<=(weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator>=(weak_ordering v, unspecified) noexcept;
 friend constexpr bool operator==(unspecified, weak_ordering v) noexcept;
 friend constexpr bool operator!=(unspecified, weak_ordering v) noexcept;
 friend constexpr bool operator< (unspecified, weak_ordering v) noexcept;
 friend constexpr bool operator> (unspecified, weak_ordering v) noexcept;
 friend constexpr bool operator<=(unspecified, weak_ordering v) noexcept;
 friend constexpr bool operator>=(unspecified, weak_ordering v) noexcept;
 friend constexpr weak_ordering operator<=>(weak_ordering v, unspecified) noexcept;
 friend constexpr weak_ordering operator<=>(unspecified, weak_ordering v) noexcept;
};

// valid values' definitions
inline constexpr weak_ordering weak_ordering::less(ord::less);
inline constexpr weak_ordering weak_ordering::equivalent(eq::equivalent);
inline constexpr weak_ordering weak_ordering::greater(ord::greater);
}

constexpr operator weak_equality() const noexcept;
2 Returns: value == 0 ? weak_equality::equivalent : weak_equality::nonequivalent.

constexpr operator partial_ordering() const noexcept;
3 Returns:
 value == 0 ? partial_ordering::equivalent :
 value < 0 ? partial_ordering::less :
 partial_ordering::greater

constexpr bool operator==(weak_ordering v, unspecified) noexcept;
constexpr bool operator!=(weak_ordering v, unspecified) noexcept;
constexpr bool operator< (weak_ordering v, unspecified) noexcept;
constexpr bool operator> (weak_ordering v, unspecified) noexcept;
constexpr bool operator<=(weak_ordering v, unspecified) noexcept;
constexpr bool operator>=(weak_ordering v, unspecified) noexcept;
4 Returns: v.value @ 0 for operator@.

constexpr bool operator==(unspecified, weak_ordering v) noexcept;
constexpr bool operator!=(unspecified, weak_ordering v) noexcept;
constexpr bool operator< (unspecified, weak_ordering v) noexcept;
constexpr bool operator> (unspecified, weak_ordering v) noexcept;
constexpr bool operator<=(unspecified, weak_ordering v) noexcept;
constexpr bool operator>=(unspecified, weak_ordering v) noexcept;
5 Returns: 0 @ v.value for operator@.

constexpr weak_ordering operator<=>(weak_ordering v, unspecified) noexcept;
6 Returns: v.

```

```
constexpr weak_ordering operator<=>(unspecified, weak_ordering v) noexcept;
```

7 *Returns:*  $v < 0$  ? `weak_ordering::greater` :  $v > 0$  ? `weak_ordering::less` :  $v$ .

### 21.11.2.6 Class `strong_ordering`

[cmp.strongord]

1 The `strong_ordering` type is typically used as the result type of a three-way comparison operator (8.5.8) that (a) admits all of the six two-way comparison operators (8.5.9, 8.5.10), and (b) does imply substitutability.

```
namespace std {
 class strong_ordering {
 int value; // exposition only

 // exposition-only constructors
 explicit constexpr strong_ordering(eq v) noexcept : value(int(v)) {} // exposition only
 explicit constexpr strong_ordering(ord v) noexcept : value(int(v)) {} // exposition only

 public:
 // valid values
 static const strong_ordering less;
 static const strong_ordering equal;
 static const strong_ordering equivalent;
 static const strong_ordering greater;

 // conversions
 constexpr operator weak_equality() const noexcept;
 constexpr operator strong_equality() const noexcept;
 constexpr operator partial_ordering() const noexcept;
 constexpr operator weak_ordering() const noexcept;

 // comparisons
 friend constexpr bool operator==(strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator!=(strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator< (strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator> (strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator<=(strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator>=(strong_ordering v, unspecified) noexcept;
 friend constexpr bool operator==(unspecified, strong_ordering v) noexcept;
 friend constexpr bool operator!=(unspecified, strong_ordering v) noexcept;
 friend constexpr bool operator< (unspecified, strong_ordering v) noexcept;
 friend constexpr bool operator> (unspecified, strong_ordering v) noexcept;
 friend constexpr bool operator<=(unspecified, strong_ordering v) noexcept;
 friend constexpr bool operator>=(unspecified, strong_ordering v) noexcept;
 friend constexpr strong_ordering operator<=>(strong_ordering v, unspecified) noexcept;
 friend constexpr strong_ordering operator<=>(unspecified, strong_ordering v) noexcept;
 };

 // valid values' definitions
 inline constexpr strong_ordering strong_ordering::less(ord::less);
 inline constexpr strong_ordering strong_ordering::equal(eq::equal);
 inline constexpr strong_ordering strong_ordering::equivalent(eq::equivalent);
 inline constexpr strong_ordering strong_ordering::greater(ord::greater);
}

```

```
constexpr operator weak_equality() const noexcept;
```

2 *Returns:*  $value == 0$  ? `weak_equality::equivalent` : `weak_equality::nonequivalent`.

```
constexpr operator strong_equality() const noexcept;
```

3 *Returns:*  $value == 0$  ? `strong_equality::equal` : `strong_equality::nonequal`.

```
constexpr operator partial_ordering() const noexcept;
```

4 *Returns:*

```

value == 0 ? partial_ordering::equivalent :
value < 0 ? partial_ordering::less :
 partial_ordering::greater

```

```
constexpr operator weak_ordering() const noexcept;
```

5 *Returns:*

```

value == 0 ? weak_ordering::equivalent :
value < 0 ? weak_ordering::less :
 weak_ordering::greater

```

```

constexpr bool operator==(strong_ordering v, unspecified) noexcept;
constexpr bool operator!=(strong_ordering v, unspecified) noexcept;
constexpr bool operator<(strong_ordering v, unspecified) noexcept;
constexpr bool operator>(strong_ordering v, unspecified) noexcept;
constexpr bool operator<=(strong_ordering v, unspecified) noexcept;
constexpr bool operator>=(strong_ordering v, unspecified) noexcept;

```

6 *Returns:* v.value @ 0 for operator@.

```

constexpr bool operator==(unspecified, strong_ordering v) noexcept;
constexpr bool operator!=(unspecified, strong_ordering v) noexcept;
constexpr bool operator<(unspecified, strong_ordering v) noexcept;
constexpr bool operator>(unspecified, strong_ordering v) noexcept;
constexpr bool operator<=(unspecified, strong_ordering v) noexcept;
constexpr bool operator>=(unspecified, strong_ordering v) noexcept;

```

7 *Returns:* 0 @ v.value for operator@.

```
constexpr strong_ordering operator<=>(strong_ordering v, unspecified) noexcept;
```

8 *Returns:* v.

```
constexpr strong_ordering operator<=>(unspecified, strong_ordering v) noexcept;
```

9 *Returns:* v < 0 ? strong\_ordering::greater : v > 0 ? strong\_ordering::less : v.

### 21.11.3 Class template `common_comparison_category` [cmp.common]

1 The type `common_comparison_category` provides an alias for the strongest comparison category to which all of the template arguments can be converted. [Note: A comparison category type is stronger than another if they are distinct types and an instance of the former can be converted to an instance of the latter. — end note]

```

template<class... Ts>
struct common_comparison_category {
 using type = see below;
};

```

2 *Remarks:* The member *typedef-name* `type` denotes the common comparison type (15.9.2) of `Ts...`, the expanded parameter pack. [Note: This is well-defined even if the expansion is empty or includes a type that is not a comparison category type. — end note]

### 21.11.4 Comparison algorithms [cmp.alg]

```
template<class T> constexpr strong_ordering strong_order(const T& a, const T& b);
```

1 *Effects:* Compares two values and produces a result of type `strong_ordering`:

- (1.1) — If `numeric_limits<T>::is_iec559` is true, returns a result of type `strong_ordering` that is consistent with the `totalOrder` operation as specified in ISO/IEC/IEEE 60559.
- (1.2) — Otherwise, returns `a <=> b` if that expression is well-formed and convertible to `strong_ordering`.
- (1.3) — Otherwise, if the expression `a <=> b` is well-formed, then the function is defined as deleted.
- (1.4) — Otherwise, if the expressions `a == b` and `a < b` are each well-formed and convertible to `bool`, then
  - (1.4.1) — if `a == b` is true, returns `strong_ordering::equal`;
  - (1.4.2) — otherwise, if `a < b` is true, returns `strong_ordering::less`;

(1.4.3) — otherwise, returns `strong_ordering::greater`.

(1.5) — Otherwise, the function is defined as deleted.

```
template<class T> constexpr weak_ordering weak_order(const T& a, const T& b);
```

2 *Effects:* Compares two values and produces a result of type `weak_ordering`:

(2.1) — Returns `a <=> b` if that expression is well-formed and convertible to `weak_ordering`.

(2.2) — Otherwise, if the expression `a <=> b` is well-formed, then the function is defined as deleted.

(2.3) — Otherwise, if the expressions `a == b` and `a < b` are each well-formed and convertible to `bool`, then

(2.3.1) — if `a == b` is true, returns `weak_ordering::equivalent`;

(2.3.2) — otherwise, if `a < b` is true, returns `weak_ordering::less`;

(2.3.3) — otherwise, returns `weak_ordering::greater`.

(2.4) — Otherwise, the function is defined as deleted.

```
template<class T> constexpr partial_ordering partial_order(const T& a, const T& b);
```

3 *Effects:* Compares two values and produces a result of type `partial_ordering`:

(3.1) — Returns `a <=> b` if that expression is well-formed and convertible to `partial_ordering`.

(3.2) — Otherwise, if the expression `a <=> b` is well-formed, then the function is defined as deleted.

(3.3) — Otherwise, if the expressions `a == b` and `a < b` are each well-formed and convertible to `bool`, then

(3.3.1) — if `a == b` is true, returns `partial_ordering::equivalent`;

(3.3.2) — otherwise, if `a < b` is true, returns `partial_ordering::less`;

(3.3.3) — otherwise, returns `partial_ordering::greater`.

(3.4) — Otherwise, the function is defined as deleted.

```
template<class T> constexpr strong_equality strong_equal(const T& a, const T& b);
```

4 *Effects:* Compares two values and produces a result of type `strong_equality`:

(4.1) — Returns `a <=> b` if that expression is well-formed and convertible to `strong_equality`.

(4.2) — Otherwise, if the expression `a <=> b` is well-formed, then the function is defined as deleted.

(4.3) — Otherwise, if the expression `a == b` is well-formed and convertible to `bool`, then

(4.3.1) — if `a == b` is true, returns `strong_equality::equal`;

(4.3.2) — otherwise, returns `strong_equality::nonequal`.

(4.4) — Otherwise, the function is defined as deleted.

```
template<class T> constexpr weak_equality weak_equal(const T& a, const T& b);
```

5 *Effects:* Compares two values and produces a result of type `weak_equality`:

(5.1) — Returns `a <=> b` if that expression is well-formed and convertible to `weak_equality`.

(5.2) — Otherwise, if the expression `a <=> b` is well-formed, then the function is defined as deleted.

(5.3) — Otherwise, if the expression `a == b` is well-formed and convertible to `bool`, then

(5.3.1) — if `a == b` is true, returns `weak_equality::equivalent`;

(5.3.2) — otherwise, returns `weak_equality::nonequivalent`.

(5.4) — Otherwise, the function is defined as deleted.

## 21.12 Other runtime support

[support.runtime]

<sup>1</sup> Headers `<csetjmp>` (nonlocal jumps), `<csignal>` (signal handling), `<cstdarg>` (variable arguments), and `<cstdliblib>` (runtime environment `getenv`, `system`), provide further compatibility with C code.



- 2 Calls to the function `getenv` (21.2.2) shall not introduce a data race (20.5.5.9) provided that nothing modifies the environment. [Note: Calls to the POSIX functions `setenv` and `putenv` modify the environment. — end note]
- 3 A call to the `setlocale` function (26.5) may introduce a data race with other calls to the `setlocale` function or with calls to functions that are affected by the current C locale. The implementation shall behave as if no library function other than `locale::global` calls the `setlocale` function.

### 21.12.1 Header <cstdarg> synopsis

[cstdarg.syn]

```
namespace std {
 using va_list = see below;
}

#define va_arg(V, P) see below
#define va_copy(VDST, VSRC) see below
#define va_end(V) see below
#define va_start(V, P) see below
```

- 1 The contents of the header <cstdarg> are the same as the C standard library header <stdarg.h>, with the following changes: The restrictions that ISO C places on the second parameter to the `va_start` macro in header <stdarg.h> are different in this document. The parameter `parmN` is the rightmost parameter in the variable parameter list of the function definition (the one just before the `...`).<sup>222</sup> If the parameter `parmN` is a pack expansion (17.6.3) or an entity resulting from a lambda capture (8.4.5), the program is ill-formed, no diagnostic required. If the parameter `parmN` is of a reference type, or of a type that is not compatible with the type that results when passing an argument for which there is no parameter, the behavior is undefined.

SEE ALSO: ISO C 7.16.1.1

### 21.12.2 Header <csetjmp> synopsis

[csetjmp.syn]

```
namespace std {
 using jmp_buf = see below;
 [[noreturn]] void longjmp(jmp_buf env, int val);
}

#define setjmp(env) see below
```

- 1 The contents of the header <csetjmp> are the same as the C standard library header <setjmp.h>.
- 2 The function signature `longjmp(jmp_buf jbuf, int val)` has more restricted behavior in this document. A `setjmp/longjmp` call pair has undefined behavior if replacing the `setjmp` and `longjmp` by `catch` and `throw` would invoke any non-trivial destructors for any automatic objects.

SEE ALSO: ISO C 7.13

### 21.12.3 Header <csignal> synopsis

[csignal.syn]

```
namespace std {
 using sig_atomic_t = see below;

 // 21.12.4, signal handlers
 extern "C" using signal_handler = void(int); // exposition only
 signal_handler* signal(int sig, signal_handler* func);

 int raise(int sig);
}

#define SIG_DFL see below
#define SIG_ERR see below
#define SIG_IGN see below
#define SIGABRT see below
#define SIGFPE see below
#define SIGILL see below
#define SIGINT see below
#define SIGSEGV see below
```

---

<sup>222</sup>) Note that `va_start` is required to work as specified even if unary `operator&` is overloaded for the type of `parmN`.

```
#define SIGTERM see below
```

<sup>1</sup> The contents of the header `<csignal>` are the same as the C standard library header `<signal.h>`.

#### 21.12.4 Signal handlers [support.signal]

<sup>1</sup> A call to the function `signal` synchronizes with any resulting invocation of the signal handler so installed.

<sup>2</sup> A *plain lock-free atomic operation* is an invocation of a function `f` from [Clause 33](#), such that:

- (2.1) — `f` is the function `atomic_is_lock_free()`, or
- (2.2) — `f` is the member function `is_lock_free()`, or
- (2.3) — `f` is a non-static member function invoked on an object `A`, such that `A.is_lock_free()` yields `true`, or
- (2.4) — `f` is a non-member function, and for every pointer-to-atomic argument `A` passed to `f`, `atomic_is_lock_free(A)` yields `true`.

<sup>3</sup> An evaluation is *signal-safe* unless it includes one of the following:

- (3.1) — a call to any standard library function, except for plain lock-free atomic operations and functions explicitly identified as signal-safe. [*Note*: This implicitly excludes the use of `new` and `delete` expressions that rely on a library-provided memory allocator. — *end note*]
- (3.2) — an access to an object with thread storage duration;
- (3.3) — a `dynamic_cast` expression;
- (3.4) — throwing of an exception;
- (3.5) — control entering a *try-block* or *function-try-block*;
- (3.6) — initialization of a variable with static storage duration requiring dynamic initialization ([6.8.3.3](#), [9.7](#))<sup>223</sup>; or
- (3.7) — waiting for the completion of the initialization of a variable with static storage duration ([9.7](#)).

A signal handler invocation has undefined behavior if it includes an evaluation that is not signal-safe.

<sup>4</sup> The function `signal` is signal-safe if it is invoked with the first argument equal to the signal number corresponding to the signal that caused the invocation of the handler.

SEE ALSO: ISO C 7.14

---

<sup>223</sup>) Such initialization might occur because it is the first odr-use ([6.2](#)) of that variable.

## 22 Concepts library

[concepts]

### 22.1 General

[concepts.general]

- <sup>1</sup> This Clause describes library components that C++ programs may use to perform compile-time validation of template arguments and perform function dispatch based on properties of types. The purpose of these concepts is to establish a foundation for equational reasoning in programs.
- <sup>2</sup> The following subclauses describe language-related concepts, comparison concepts, object concepts, and callable concepts as summarized in Table 36.

Table 36 — Fundamental concepts library summary

| Subclause | Header(s)                            |
|-----------|--------------------------------------|
| 22.4      | Language-related concepts <concepts> |
| 22.5      | Comparison concepts                  |
| 22.6      | Object concepts                      |
| 22.7      | Callable concepts                    |

### 22.2 Equality preservation

[concepts.equality]

- <sup>1</sup> An expression is *equality-preserving* if, given equal inputs, the expression results in equal outputs. The inputs to an expression are the set of the expression’s operands. The output of an expression is the expression’s result and all operands modified by the expression.
- <sup>2</sup> Not all input values need be valid for a given expression; e.g., for integers *a* and *b*, the expression *a / b* is not well-defined when *b* is 0. This does not preclude the expression *a / b* being equality-preserving. The *domain* of an expression is the set of input values for which the expression is required to be well-defined.
- <sup>3</sup> Expressions required by this document to be equality-preserving are further required to be stable: two evaluations of such an expression with the same input objects are required to have equal outputs absent any explicit intervening modification of those input objects. [Note: This requirement allows generic code to reason about the current values of objects based on knowledge of the prior values as observed via equality-preserving expressions. It effectively forbids spontaneous changes to an object, changes to an object from another thread of execution, changes to an object as side effects of non-modifying expressions, and changes to an object as side effects of modifying a distinct object if those changes could be observable to a library function via an equality-preserving expression that is required to be valid for that object. — end note]
- <sup>4</sup> Expressions declared in a *requires-expression* in this document are required to be equality-preserving, except for those annotated with the comment “not required to be equality-preserving.” An expression so annotated may be equality-preserving, but is not required to be so.
- <sup>5</sup> An expression that may alter the value of one or more of its inputs in a manner observable to equality-preserving expressions is said to modify those inputs. This document uses a notational convention to specify which expressions declared in a *requires-expression* modify which inputs: except where otherwise specified, an expression operand that is a non-constant lvalue or rvalue may be modified. Operands that are constant lvalues or rvalues are required to not be modified.
- <sup>6</sup> Where a *requires-expression* declares an expression that is non-modifying for some constant lvalue operand, additional variations of that expression that accept a non-constant lvalue or (possibly constant) rvalue for the given operand are also required except where such an expression variation is explicitly required with differing semantics. These *implicit expression variations* are required to meet the semantic requirements of the declared expression. The extent to which an implementation validates the syntax of the variations is unspecified.
- <sup>7</sup> [Example:

```

template<class T> concept C = requires(T a, T b, const T c, const T d) {
 c == d; // #1
 a = std::move(b); // #2

```

```

 a = c; // #3
};

```

For the above example:

- (7.1) — Expression #1 does not modify either of its operands, #2 modifies both of its operands, and #3 modifies only its first operand `a`.
- (7.2) — Expression #1 implicitly requires additional expression variations that meet the requirements for `c == d` (including non-modification), as if the expressions

```

 c == b;
 c == std::move(b);
 c == std::move(d); std::move(c) == b;
 std::move(c) == d; std::move(c) == std::move(b);
 std::move(c) == std::move(d); std::move(c) == std::move(b);

 a == b;
 a == std::move(b);
 a == d; a == std::move(b);
 a == std::move(d); std::move(a) == b;
 std::move(a) == d; std::move(a) == std::move(b);
 std::move(a) == std::move(d); std::move(a) == std::move(b);

```

had been declared as well.

- (7.3) — Expression #3 implicitly requires additional expression variations that meet the requirements for `a = c` (including non-modification of the second operand), as if the expressions `a = b` and `a = std::move(c)` had been declared. Expression #3 does not implicitly require an expression variation with a non-constant rvalue second operand, since expression #2 already specifies exactly such an expression explicitly.

— *end example*]

- 8 [Example: The following type `T` meets the explicitly stated syntactic requirements of concept `C` above but does not meet the additional implicit requirements:

```

struct T {
 bool operator==(const T&) const { return true; }
 bool operator==(T&) = delete;
};

```

`T` fails to meet the implicit requirements of `C`, so `C<T>` is not satisfied. Since implementations are not required to validate the syntax of implicit requirements, it is unspecified whether an implementation diagnoses as ill-formed a program that requires `C<T>`. — *end example*]

## 22.3 Header `<concepts>` synopsis

[concepts.syn]

```

namespace std {
 // 22.4, language-related concepts
 // 22.4.2, concept Same
 template<class T, class U>
 concept Same = see below;

 // 22.4.3, concept DerivedFrom
 template<class Derived, class Base>
 concept DerivedFrom = see below;

 // 22.4.4, concept ConvertibleTo
 template<class From, class To>
 concept ConvertibleTo = see below;

 // 22.4.5, concept CommonReference
 template<class T, class U>
 concept CommonReference = see below;

 // 22.4.6, concept Common
 template<class T, class U>
 concept Common = see below;

 // 22.4.7, integral concepts
 template<class T>
 concept Integral = see below;

```

```
template<class T>
 concept SignedIntegral = see below;
template<class T>
 concept UnsignedIntegral = see below;

// 22.4.8, concept Assignable
template<class LHS, class RHS>
 concept Assignable = see below;

// 22.4.9, concept Swappable
template<class T>
 concept Swappable = see below;
template<class T, class U>
 concept SwappableWith = see below;

// 22.4.10, concept Destructible
template<class T>
 concept Destructible = see below;

// 22.4.11, concept Constructible
template<class T, class... Args>
 concept Constructible = see below;

// 22.4.12, concept DefaultConstructible
template<class T>
 concept DefaultConstructible = see below;

// 22.4.13, concept MoveConstructible
template<class T>
 concept MoveConstructible = see below;

// 22.4.14, concept CopyConstructible
template<class T>
 concept CopyConstructible = see below;

// 22.5, comparison concepts
// 22.5.2, concept Boolean
template<class B>
 concept Boolean = see below;

// 22.5.3, concept EqualityComparable
template<class T>
 concept EqualityComparable = see below;
template<class T, class U>
 concept EqualityComparableWith = see below;

// 22.5.4, concept StrictTotallyOrdered
template<class T>
 concept StrictTotallyOrdered = see below;
template<class T, class U>
 concept StrictTotallyOrderedWith = see below;

// 22.6, object concepts
template<class T>
 concept Movable = see below;
template<class T>
 concept Copyable = see below;
template<class T>
 concept Semiregular = see below;
template<class T>
 concept Regular = see below;
```

```

// 22.7, callable concepts
// 22.7.2, concept Invocable
template<class F, class... Args>
 concept Invocable = see below;

// 22.7.3, concept RegularInvocable
template<class F, class... Args>
 concept RegularInvocable = see below;

// 22.7.4, concept Predicate
template<class F, class... Args>
 concept Predicate = see below;

// 22.7.5, concept Relation
template<class R, class T, class U>
 concept Relation = see below;

// 22.7.6, concept StrictWeakOrder
template<class R, class T, class U>
 concept StrictWeakOrder = see below;
}

```

## 22.4 Language-related concepts [concepts.lang]

### 22.4.1 General [concepts.lang.general]

- <sup>1</sup> This subclause contains the definition of concepts corresponding to language features. These concepts express relationships between types, type classifications, and fundamental type properties.

### 22.4.2 Concept Same [concept.same]

```

template<class T, class U>
 concept Same = is_same_v<T, U>;

```

- <sup>1</sup> Same<T, U> subsumes Same<U, T> and vice versa.

### 22.4.3 Concept DerivedFrom [concept.derivedfrom]

```

template<class Derived, class Base>
 concept DerivedFrom =
 is_base_of_v<Base, Derived> &&
 is_convertible_v<const volatile Derived*, const volatile Base*>;

```

- <sup>1</sup> [Note: DerivedFrom<Derived, Base> is satisfied if and only if Derived is publicly and unambiguously derived from Base, or Derived and Base are the same class type ignoring cv-qualifiers. — end note]

### 22.4.4 Concept ConvertibleTo [concept.convertibleto]

- <sup>1</sup> The ConvertibleTo concept requires an expression of a particular type and value category to be both implicitly and explicitly convertible to some other type. The implicit and explicit conversions are required to produce equal results.

```

template<class From, class To>
 concept ConvertibleTo =
 is_convertible_v<From, To> &&
 requires(From (&f)()) {
 static_cast<To>(f());
 };

```

- <sup>2</sup> Let test be the invented function:

```

 To test(From (&f)()) {
 return f();
 }

```

and let f be a function with no arguments and return type From such that f() is equality-preserving. ConvertibleTo<From, To> is satisfied only if:

- (2.1) — To is not an object or reference-to-object type, or static\_cast<To>(f()) is equal to test(f).

- (2.2) — **From** is not a reference-to-object type, or
- (2.2.1) — If **From** is an rvalue reference to a non const-qualified type, the resulting state of the object referred by `f()` after either above expression is valid but unspecified (20.5.5.15).
- (2.2.2) — Otherwise, the object referred to by `f()` is not modified by either above expression.

#### 22.4.5 Concept `CommonReference` [concept.commonref]

- 1 For two types `T` and `U`, if `common_reference_t<T, U>` is well-formed and denotes a type `C` such that both `ConvertibleTo<T, C>` and `ConvertibleTo<U, C>` are satisfied, then `T` and `U` share a *common reference type*, `C`. [Note: `C` could be the same as `T`, or `U`, or it could be a different type. `C` may be a reference type. — end note]

```
template<class T, class U>
concept CommonReference =
 Same<common_reference_t<T, U>, common_reference_t<U, T>> &&
 ConvertibleTo<T, common_reference_t<T, U>> &&
 ConvertibleTo<U, common_reference_t<T, U>>;
```

- 2 Let `C` be `common_reference_t<T, U>`. Let `t` be a function whose return type is `T`, and let `u` be a function whose return type is `U`. `CommonReference<T, U>` is satisfied only if:
- (2.1) — `C(t())` equals `C(t())` if and only if `t()` is an equality-preserving expression (22.2).
- (2.2) — `C(u())` equals `C(u())` if and only if `u()` is an equality-preserving expression.
- 3 [Note: Users can customize the behavior of `CommonReference` by specializing the `basic_common_reference` class template (24.15.7.6). — end note]

#### 22.4.6 Concept `Common` [concept.common]

- 1 If `T` and `U` can both be explicitly converted to some third type, `C`, then `T` and `U` share a *common type*, `C`. [Note: `C` could be the same as `T`, or `U`, or it could be a different type. `C` might not be unique. — end note]

```
template<class T, class U>
concept Common =
 Same<common_type_t<T, U>, common_type_t<U, T>> &&
 ConvertibleTo<T, common_type_t<T, U>> &&
 ConvertibleTo<U, common_type_t<T, U>> &&
 CommonReference<
 add_lvalue_reference_t<const T>,
 add_lvalue_reference_t<const U>> &&
 CommonReference<
 add_lvalue_reference_t<common_type_t<T, U>>,
 common_reference_t<
 add_lvalue_reference_t<const T>,
 add_lvalue_reference_t<const U>>>>;
```

- 2 Let `C` be `common_type_t<T, U>`. Let `t` be a function whose return type is `T`, and let `u` be a function whose return type is `U`. `Common<T, U>` is satisfied only if:
- (2.1) — `C(t())` equals `C(t())` if and only if `t()` is an equality-preserving expression (22.2).
- (2.2) — `C(u())` equals `C(u())` if and only if `u()` is an equality-preserving expression (22.2).
- 3 [Note: Users can customize the behavior of `Common` by specializing the `common_type` class template (24.15.7.6). — end note]

#### 22.4.7 Integral concepts [concepts.integral]

```
template<class T>
concept Integral = is_integral_v<T>;
template<class T>
concept SignedIntegral = Integral<T> && is_signed_v<T>;
template<class T>
concept UnsignedIntegral = Integral<T> && !SignedIntegral<T>;
```

- 1 [Note: `SignedIntegral<T>` can be satisfied even by types that are not signed integral types (6.7.1); for example, `char`. — end note]

- 2 [Note: `UnsignedIntegral<T>` can be satisfied even by types that are not unsigned integral types (6.7.1); for example, `bool`. — end note]

## 22.4.8 Concept Assignable [concept.assignable]

```
template<class LHS, class RHS>
concept Assignable =
 is_lvalue_reference_v<LHS> &&
 CommonReference<const remove_reference_t<LHS>&, const remove_reference_t<RHS>&> &&
 requires(LHS lhs, RHS&& rhs) {
 lhs = std::forward<RHS>(rhs);
 requires Same<decltype(lhs = std::forward<RHS>(rhs)), LHS>;
 };
```

1 Let:

- (1.1) — `lhs` be an lvalue that refers to an object `lcopy` such that `decltype((lhs))` is `LHS`,
  - (1.2) — `rhs` be an expression such that `decltype((rhs))` is `RHS`, and
  - (1.3) — `rcopy` be a distinct object that is equal to `rhs`.
- `Assignable<LHS, RHS>` is satisfied only if
- (1.4) — `addressof(lhs = rhs) == addressof(lcopy)`.
  - (1.5) — After evaluating `lhs = rhs`:
    - (1.5.1) — `lhs` is equal to `rcopy`, unless `rhs` is a non-const xvalue that refers to `lcopy`.
    - (1.5.2) — If `rhs` is a non-const xvalue, the resulting state of the object to which it refers is valid but unspecified (20.5.5.15).
    - (1.5.3) — Otherwise, if `rhs` is a glvalue, the object to which it refers is not modified.

- 2 [Note: Assignment need not be a total function (20.4.1.3); in particular, if assignment to an object `x` can result in a modification of some other object `y`, then `x = y` is likely not in the domain of `=`. — end note]

## 22.4.9 Concept Swappable [concept.swappable]

```
template<class T>
concept Swappable = is_swappable_v<T>;
```

1 Let `a1` and `a2` denote distinct equal objects of type `T`, and let `b1` and `b2` similarly denote distinct equal objects of type `T`. `Swappable<T>` is satisfied only if after evaluating either `swap(a1, b1)` or `swap(b1, a1)` in the context described below, `a1` is equal to `b2` and `b1` is equal to `a2`.

2 The context in which `swap(a1, b1)` or `swap(b1, a1)` is evaluated shall ensure that a binary non-member function named `swap` is selected via overload resolution (16.3) on a candidate set that includes:

- (2.1) — the two `swap` function templates defined in `<utility>` (24.2) and
- (2.2) — the lookup set produced by argument-dependent lookup (6.4.2).

```
template<class T, class U>
concept SwappableWith =
 is_swappable_with_v<T, T> && is_swappable_with_v<U, U> &&
 CommonReference<const remove_reference_t<T>&, const remove_reference_t<U>&> &&
 is_swappable_with_v<T, U> && is_swappable_with_v<U, T>;
```

3 Let:

- (3.1) — `t1` and `t2` denote distinct equal objects of type `remove_cvref_t<T>`,
- (3.2) —  $E_t$  be an expression that denotes `t1` such that `decltype((Et))` is `T`,
- (3.3) — `u1` and `u2` similarly denote distinct equal objects of type `remove_cvref_t<U>`,
- (3.4) —  $E_u$  be an expression that denotes `u1` such that `decltype((Eu))` is `U`, and
- (3.5) — `C` be

```
common_reference_t<const remove_reference_t<T>&, const remove_reference_t<U>&>
```



`SwappableWith<T, U>` is satisfied only if after evaluating either `swap( $E_t$ ,  $E_u$ )` or `swap( $E_u$ ,  $E_t$ )` in the context described above,  $C(t1)$  is equal to  $C(u2)$  and  $C(u1)$  is equal to  $C(t2)$ .

4 The context in which `swap( $E_t$ ,  $E_u$ )` or `swap( $E_u$ ,  $E_t$ )` is evaluated shall ensure that a binary non-member function named `swap` is selected via overload resolution (16.3) on a candidate set that includes:

(4.1) — the two `swap` function templates defined in `<utility>` (24.2) and

(4.2) — the lookup set produced by argument-dependent lookup (6.4.2).

5 [Example: User code can ensure that the evaluation of `swap` calls is performed in an appropriate context under the various conditions as follows:

```
#include <cassert>
#include <concepts>
#include <utility>

template<class T, std::SwappableWith<T> U>
void value_swap(T&& t, U&& u) {
 using std::swap;
 swap(std::forward<T>(t), std::forward<U>(u)); // OK: uses "swappable with" conditions
 // for rvalues and lvalues
}

template<std::Swappable T>
void lv_swap(T& t1, T& t2) {
 using std::swap;
 swap(t1, t2); // OK: uses swappable conditions for
 // lvalues of type T
}

namespace N {
 struct A { int m; };
 struct Proxy { A* a; };
 Proxy proxy(A& a) { return Proxy{ &a }; }

 void swap(A& x, Proxy p) {
 std::swap(x.m, p.a->m); // OK: uses context equivalent to swappable
 // conditions for fundamental types
 }
 void swap(Proxy p, A& x) { swap(x, p); } // satisfy symmetry constraint
}

int main() {
 int i = 1, j = 2;
 lv_swap(i, j);
 assert(i == 2 && j == 1);

 N::A a1 = { 5 }, a2 = { -5 };
 value_swap(a1, proxy(a2));
 assert(a1.m == -5 && a2.m == 5);
}
```

— end example]

### 22.4.10 Concept Destructible

[concept.destructible]

1 The `Destructible` concept specifies properties of all types, instances of which can be destroyed at the end of their lifetime, or reference types.

```
template<class T>
concept Destructible = is_nothrow_destructible_v<T>;
```

2 [Note: Unlike the `Cpp17Destructible` requirements (Table 29), this concept forbids destructors that are potentially throwing, even if a particular invocation of the destructor does not actually throw. — end note]

**22.4.11 Concept Constructible** [concept.constructible]

- <sup>1</sup> The Constructible concept constrains the initialization of a variable of a given type with a particular set of argument types.

```
template<class T, class... Args>
 concept Constructible = Destructible<T> && is_constructible_v<T, Args...>;
```

**22.4.12 Concept DefaultConstructible** [concept.defaultconstructible]

```
template<class T>
 concept DefaultConstructible = Constructible<T>;
```

**22.4.13 Concept MoveConstructible** [concept.moveconstructible]

```
template<class T>
 concept MoveConstructible = Constructible<T, T> && ConvertibleTo<T, T>;
```

- <sup>1</sup> If T is an object type, then let rv be an rvalue of type T and u2 a distinct object of type T equal to rv. MoveConstructible<T> is satisfied only if

- (1.1) — After the definition T u = rv;, u is equal to u2.
- (1.2) — T(rv) is equal to u2.
- (1.3) — If T is not const, rv's resulting state is valid but unspecified (20.5.5.15); otherwise, it is unchanged.

**22.4.14 Concept CopyConstructible** [concept.copyconstructible]

```
template<class T>
 concept CopyConstructible =
 MoveConstructible<T> &&
 Constructible<T, T&> && ConvertibleTo<T&, T> &&
 Constructible<T, const T&> && ConvertibleTo<const T&, T> &&
 Constructible<T, const T> && ConvertibleTo<const T, T>;
```

- <sup>1</sup> If T is an object type, then let v be an lvalue of type (possibly const) T or an rvalue of type const T. CopyConstructible<T> is satisfied only if

- (1.1) — After the definition T u = v;, u is equal to v.
- (1.2) — T(v) is equal to v.

**22.5 Comparison concepts** [concepts.compare]**22.5.1 General** [concepts.compare.general]

- <sup>1</sup> This subclause describes concepts that establish relationships and orderings on values of possibly differing object types.

**22.5.2 Concept Boolean** [concept.boolean]

- <sup>1</sup> The Boolean concept specifies the requirements on a type that is usable in Boolean contexts.

```
template<class B>
 concept Boolean =
 Movable<remove_cvref_t> && // (see 22.6)
 requires(const remove_reference_t& b1,
 const remove_reference_t& b2, const bool a) {
 requires ConvertibleTo<const remove_reference_t&, bool>;
 !b1; requires ConvertibleTo<decltype(!b1), bool>;
 b1 && a; requires Same<decltype(b1 && a), bool>;
 b1 || a; requires Same<decltype(b1 || a), bool>;
 b1 && b2; requires Same<decltype(b1 && b2), bool>;
 a && b2; requires Same<decltype(a && b2), bool>;
 b1 || b2; requires Same<decltype(b1 || b2), bool>;
 a || b2; requires Same<decltype(a || b2), bool>;
 b1 == b2; requires ConvertibleTo<decltype(b1 == b2), bool>;
 b1 == a; requires ConvertibleTo<decltype(b1 == a), bool>;
 a == b2; requires ConvertibleTo<decltype(a == b2), bool>;
 b1 != b2; requires ConvertibleTo<decltype(b1 != b2), bool>;
```

```

 b1 != a; requires ConvertibleTo<decltype(b1 != a), bool>;
 a != b2; requires ConvertibleTo<decltype(a != b2), bool>;
};

```

2 Let `b1` and `b2` be lvalues of type `const remove_reference_t<B>`. `Boolean<B>` is satisfied only if

- (2.1) — `bool(b1) == !bool(!b1)`.
- (2.2) — `(b1 && b2)`, `(b1 && bool(b2))`, and `(bool(b1) && b2)` are all equal to `(bool(b1) && bool(b2))`, and have the same short-circuit evaluation.
- (2.3) — `(b1 || b2)`, `(b1 || bool(b2))`, and `(bool(b1) || b2)` are all equal to `(bool(b1) || bool(b2))`, and have the same short-circuit evaluation.
- (2.4) — `bool(b1 == b2)`, `bool(b1 == bool(b2))`, and `bool(bool(b1) == b2)` are all equal to `(bool(b1) == bool(b2))`.
- (2.5) — `bool(b1 != b2)`, `bool(b1 != bool(b2))`, and `bool(bool(b1) != b2)` are all equal to `(bool(b1) != bool(b2))`.

3 [Example: The types `bool`, `true_type` (24.15.2), and `bitset<N>::reference` (24.9.2) are Boolean types. Pointers, smart pointers, and types with only explicit conversions to `bool` are not Boolean types. — end example]

### 22.5.3 Concept EqualityComparable

[concept.equalitycomparable]

```

template<class T, class U>
concept weakly-equality-comparable-with = // exposition only
requires(const remove_reference_t<T>& t,
 const remove_reference_t<U>& u) {
 t == u; requires Boolean<decltype(t == u)>;
 t != u; requires Boolean<decltype(t != u)>;
 u == t; requires Boolean<decltype(u == t)>;
 u != t; requires Boolean<decltype(u != t)>;
};

```

1 Let `t` and `u` be lvalues of types `const remove_reference_t<T>` and `const remove_reference_t<U>` respectively. *weakly-equality-comparable-with*<T, U> is satisfied only if:

- (1.1) — `t == u`, `u == t`, `t != u`, and `u != t` have the same domain.
- (1.2) — `bool(u == t) == bool(t == u)`.
- (1.3) — `bool(t != u) == !bool(t == u)`.
- (1.4) — `bool(u != t) == bool(t != u)`.

```

template<class T>
concept EqualityComparable = weakly-equality-comparable-with<T, T>;

```

2 Let `a` and `b` be objects of type `T`. `EqualityComparable<T>` is satisfied only if `bool(a == b)` is true when `a` is equal to `b` (22.2), and false otherwise.

3 [Note: The requirement that the expression `a == b` is equality-preserving implies that `==` is transitive and symmetric. — end note]

```

template<class T, class U>
concept EqualityComparableWith =
EqualityComparable<T> && EqualityComparable<U> &&
CommonReference<const remove_reference_t<T>&, const remove_reference_t<U>&> &&
EqualityComparable<
 common_reference_t<
 const remove_reference_t<T>&,
 const remove_reference_t<U>&>> &&
weakly-equality-comparable-with<T, U>;

```

4 Let `t` be an lvalue of type `const remove_reference_t<T>`, `u` be an lvalue of type `const remove_reference_t<U>`, and `C` be:

```

common_reference_t<const remove_reference_t<T>&, const remove_reference_t<U>&>

```

`EqualityComparableWith<T, U>` is satisfied only if `bool(t == u) == bool(C(t) == C(u))`.

22.5.4 Concept `StrictTotallyOrdered`

[concept.stricttotallyordered]

```

template<class T>
concept StrictTotallyOrdered =
 EqualityComparable<T> &&
 requires(const remove_reference_t<T>& a,
 const remove_reference_t<T>& b) {
 a < b; requires Boolean<decltype(a < b)>;
 a > b; requires Boolean<decltype(a > b)>;
 a <= b; requires Boolean<decltype(a <= b)>;
 a >= b; requires Boolean<decltype(a >= b)>;
 };

```

<sup>1</sup> Let `a`, `b`, and `c` be lvalues of type `const remove_reference_t<T>`. `StrictTotallyOrdered<T>` is satisfied only if

- (1.1) — Exactly one of `bool(a < b)`, `bool(a > b)`, or `bool(a == b)` is true.
- (1.2) — If `bool(a < b)` and `bool(b < c)`, then `bool(a < c)`.
- (1.3) — `bool(a > b) == bool(b < a)`.
- (1.4) — `bool(a <= b) == !bool(b < a)`.
- (1.5) — `bool(a >= b) == !bool(a < b)`.

```

template<class T, class U>
concept StrictTotallyOrderedWith =
 StrictTotallyOrdered<T> && StrictTotallyOrdered<U> &&
 CommonReference<const remove_reference_t<T>&, const remove_reference_t<U>&> &&
 StrictTotallyOrdered<
 common_reference_t<
 const remove_reference_t<T>&,
 const remove_reference_t<U>&>> &&
 EqualityComparableWith<T, U> &&
 requires(const remove_reference_t<T>& t,
 const remove_reference_t<U>& u) {
 t < u; requires Boolean<decltype(t < u)>;
 t > u; requires Boolean<decltype(t > u)>;
 t <= u; requires Boolean<decltype(t <= u)>;
 t >= u; requires Boolean<decltype(t >= u)>;
 u < t; requires Boolean<decltype(u < t)>;
 u > t; requires Boolean<decltype(u > t)>;
 u <= t; requires Boolean<decltype(u <= t)>;
 u >= t; requires Boolean<decltype(u >= t)>;
 };

```

<sup>2</sup> Let `t` be an lvalue of type `const remove_reference_t<T>`, `u` be an lvalue of type `const remove_reference_t<U>`, and `C` be:

```
common_reference_t<const remove_reference_t<T>&, const remove_reference_t<U>&>
```

`StrictTotallyOrderedWith<T, U>` is satisfied only if

- (2.1) — `bool(t < u) == bool(C(t) < C(u))`.
- (2.2) — `bool(t > u) == bool(C(t) > C(u))`.
- (2.3) — `bool(t <= u) == bool(C(t) <= C(u))`.
- (2.4) — `bool(t >= u) == bool(C(t) >= C(u))`.
- (2.5) — `bool(u < t) == bool(C(u) < C(t))`.
- (2.6) — `bool(u > t) == bool(C(u) > C(t))`.
- (2.7) — `bool(u <= t) == bool(C(u) <= C(t))`.
- (2.8) — `bool(u >= t) == bool(C(u) >= C(t))`.

## 22.6 Object concepts

[concepts.object]

<sup>1</sup> This subclause describes concepts that specify the basis of the value-oriented programming style on which the library is based.

```

template<class T>
 concept Movable = is_object_v<T> && MoveConstructible<T> && Assignable<T&, T> && Swappable<T>;
template<class T>
 concept Copyable = CopyConstructible<T> && Movable<T> && Assignable<T&, const T&>;
template<class T>
 concept Semiregular = Copyable<T> && DefaultConstructible<T>;
template<class T>
 concept Regular = Semiregular<T> && EqualityComparable<T>;

```

2 [Note: The `Semiregular` concept is satisfied by types that behave similarly to built-in types like `int`, except that they might not be comparable with `==`. — end note]

3 [Note: The `Regular` concept is satisfied by types that behave similarly to built-in types like `int` and that are comparable with `==`. — end note]

## 22.7 Callable concepts [concepts.callable]

### 22.7.1 General [concepts.callable.general]

1 The concepts in this subclause describe the requirements on function objects (24.14) and their arguments.

### 22.7.2 Concept Invocable [concept.invocable]

1 The `Invocable` concept specifies a relationship between a callable type (24.14.2) `F` and a set of argument types `Args...` which can be evaluated by the library function `invoke` (24.14.4).

```

template<class F, class... Args>
 concept Invocable = requires(F&& f, Args&&... args) {
 invoke(std::forward<F>(f), std::forward<Args>(args)...); // not required to be equality-preserving
 };

```

2 [Example: A function that generates random numbers can satisfy `Invocable`, since the `invoke` function call expression is not required to be equality-preserving (22.2). — end example]

### 22.7.3 Concept RegularInvocable [concept.regularinvocable]

```

template<class F, class... Args>
 concept RegularInvocable = Invocable<F, Args...>;

```

1 The `invoke` function call expression shall be equality-preserving and shall not modify the function object or the arguments (22.2). [Note: This requirement supersedes the annotation in the definition of `Invocable`. — end note]

2 [Example: A random number generator does not satisfy `RegularInvocable`. — end example]

3 [Note: The distinction between `Invocable` and `RegularInvocable` is purely semantic. — end note]

### 22.7.4 Concept Predicate [concept.predicate]

```

template<class F, class... Args>
 concept Predicate = RegularInvocable<F, Args...> && Boolean<invoke_result_t<F, Args...>>;

```

### 22.7.5 Concept Relation [concept.relation]

```

template<class R, class T, class U>
 concept Relation =
 Predicate<R, T, T> && Predicate<R, U, U> &&
 CommonReference<const remove_reference_t<T>&, const remove_reference_t<U>&> &&
 Predicate<R,
 common_reference_t<const remove_reference_t<T>&, const remove_reference_t<U>&>,
 common_reference_t<const remove_reference_t<T>&, const remove_reference_t<U>&>> &&
 Predicate<R, T, U> && Predicate<R, U, T>;

```

1 Let

(1.1) — `r` be an expression such that `decltype((r))` is `R`,

(1.2) — `t` be an expression such that `decltype((t))` is `T`,

(1.3) — `u` be an expression such that `decltype((u))` is `U`, and

(1.4) — C be  
`common_reference_t<const remove_reference_t<T>&,  
const remove_reference_t<U>&>`

Relation<R, T, U> is satisfied only if

(1.5) — `bool(r(t, u)) == bool(r(C(t), C(u)))`.

(1.6) — `bool(r(u, t)) == bool(r(C(u), C(t)))`.

## 22.7.6 Concept StrictWeakOrder

[concept.strictweakorder]

```
template<class R, class T, class U>
concept StrictWeakOrder = Relation<R, T, U>;
```

1 A Relation satisfies `StrictWeakOrder` only if it imposes a *strict weak ordering* on its arguments.

2 The term *strict* refers to the requirement of an irreflexive relation (`!comp(x, x)` for all `x`), and the term *weak* to requirements that are not as strong as those for a total ordering, but stronger than those for a partial ordering. If we define `equiv(a, b)` as `!comp(a, b) && !comp(b, a)`, then the requirements are that `comp` and `equiv` both be transitive relations:

(2.1) — `comp(a, b) && comp(b, c)` implies `comp(a, c)`

(2.2) — `equiv(a, b) && equiv(b, c)` implies `equiv(a, c)`

3 [Note: Under these conditions, it can be shown that

(3.1) — `equiv` is an equivalence relation,

(3.2) — `comp` induces a well-defined relation on the equivalence classes determined by `equiv`, and

(3.3) — the induced relation is a strict total ordering.

— *end note*]

## 23 Diagnostics library [diagnostics]

### 23.1 General [diagnostics.general]

- <sup>1</sup> This Clause describes components that C++ programs may use to detect and report error conditions.
- <sup>2</sup> The following subclauses describe components for reporting several kinds of exceptional conditions, documenting program assertions, and a global variable for error number codes, as summarized in Table 37.

Table 37 — Diagnostics library summary

| Subclause                                 | Header(s)                         |
|-------------------------------------------|-----------------------------------|
| <a href="#">23.2</a> Exception classes    | <code>&lt;stdexcept&gt;</code>    |
| <a href="#">23.3</a> Assertions           | <code>&lt;cassert&gt;</code>      |
| <a href="#">23.4</a> Error numbers        | <code>&lt;cerrno&gt;</code>       |
| <a href="#">23.5</a> System error support | <code>&lt;system_error&gt;</code> |

### 23.2 Exception classes [std.exceptions]

- <sup>1</sup> The C++ standard library provides classes to be used to report certain errors ([20.5.5.12](#)) in C++ programs. In the error model reflected in these classes, errors are divided into two broad categories: *logic* errors and *runtime* errors.
- <sup>2</sup> The distinguishing characteristic of logic errors is that they are due to errors in the internal logic of the program. In theory, they are preventable.
- <sup>3</sup> By contrast, runtime errors are due to events beyond the scope of the program. They cannot be easily predicted in advance. The header `<stdexcept>` defines several types of predefined exceptions for reporting errors in a C++ program. These exceptions are related by inheritance.

#### 23.2.1 Header `<stdexcept>` synopsis [stdexcept.syn]

```
namespace std {
 class logic_error;
 class domain_error;
 class invalid_argument;
 class length_error;
 class out_of_range;
 class runtime_error;
 class range_error;
 class overflow_error;
 class underflow_error;
}
```

#### 23.2.2 Class `logic_error` [logic.error]

```
namespace std {
 class logic_error : public exception {
 public:
 explicit logic_error(const string& what_arg);
 explicit logic_error(const char* what_arg);
 };
}
```

- <sup>1</sup> The class `logic_error` defines the type of objects thrown as exceptions to report errors presumably detectable before the program executes, such as violations of logical preconditions or class invariants.

```
logic_error(const string& what_arg);
```

- <sup>2</sup> *Effects:* Constructs an object of class `logic_error`.
- <sup>3</sup> *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
logic_error(const char* what_arg);
```

4       *Effects:* Constructs an object of class `logic_error`.

5       *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.3 Class `domain_error`

[`domain.error`]

```
namespace std {
 class domain_error : public logic_error {
 public:
 explicit domain_error(const string& what_arg);
 explicit domain_error(const char* what_arg);
 };
}
```

1 The class `domain_error` defines the type of objects thrown as exceptions by the implementation to report domain errors.

```
domain_error(const string& what_arg);
```

2       *Effects:* Constructs an object of class `domain_error`.

3       *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
domain_error(const char* what_arg);
```

4       *Effects:* Constructs an object of class `domain_error`.

5       *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.4 Class `invalid_argument`

[`invalid.argument`]

```
namespace std {
 class invalid_argument : public logic_error {
 public:
 explicit invalid_argument(const string& what_arg);
 explicit invalid_argument(const char* what_arg);
 };
}
```

1 The class `invalid_argument` defines the type of objects thrown as exceptions to report an invalid argument.

```
invalid_argument(const string& what_arg);
```

2       *Effects:* Constructs an object of class `invalid_argument`.

3       *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
invalid_argument(const char* what_arg);
```

4       *Effects:* Constructs an object of class `invalid_argument`.

5       *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.5 Class `length_error`

[`length.error`]

```
namespace std {
 class length_error : public logic_error {
 public:
 explicit length_error(const string& what_arg);
 explicit length_error(const char* what_arg);
 };
}
```

1 The class `length_error` defines the type of objects thrown as exceptions to report an attempt to produce an object whose length exceeds its maximum allowable size.

```
length_error(const string& what_arg);
```

2       *Effects:* Constructs an object of class `length_error`.

3       *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.



```
length_error(const char* what_arg);
```

4 *Effects:* Constructs an object of class `length_error`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.6 Class `out_of_range`

[out.of.range]

```
namespace std {
 class out_of_range : public logic_error {
 public:
 explicit out_of_range(const string& what_arg);
 explicit out_of_range(const char* what_arg);
 };
}
```

1 The class `out_of_range` defines the type of objects thrown as exceptions to report an argument value not in its expected range.

```
out_of_range(const string& what_arg);
```

2 *Effects:* Constructs an object of class `out_of_range`.

3 *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
out_of_range(const char* what_arg);
```

4 *Effects:* Constructs an object of class `out_of_range`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.7 Class `runtime_error`

[runtime.error]

```
namespace std {
 class runtime_error : public exception {
 public:
 explicit runtime_error(const string& what_arg);
 explicit runtime_error(const char* what_arg);
 };
}
```

1 The class `runtime_error` defines the type of objects thrown as exceptions to report errors presumably detectable only when the program executes.

```
runtime_error(const string& what_arg);
```

2 *Effects:* Constructs an object of class `runtime_error`.

3 *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
runtime_error(const char* what_arg);
```

4 *Effects:* Constructs an object of class `runtime_error`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.8 Class `range_error`

[range.error]

```
namespace std {
 class range_error : public runtime_error {
 public:
 explicit range_error(const string& what_arg);
 explicit range_error(const char* what_arg);
 };
}
```

1 The class `range_error` defines the type of objects thrown as exceptions to report range errors in internal computations.

```
range_error(const string& what_arg);
```

2 *Effects:* Constructs an object of class `range_error`.

3 *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
range_error(const char* what_arg);
```

4 *Effects:* Constructs an object of class `range_error`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.9 Class `overflow_error`

[overflow.error]

```
namespace std {
 class overflow_error : public runtime_error {
 public:
 explicit overflow_error(const string& what_arg);
 explicit overflow_error(const char* what_arg);
 };
}
```

1 The class `overflow_error` defines the type of objects thrown as exceptions to report an arithmetic overflow error.

```
overflow_error(const string& what_arg);
```

2 *Effects:* Constructs an object of class `overflow_error`.

3 *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
overflow_error(const char* what_arg);
```

4 *Effects:* Constructs an object of class `overflow_error`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

### 23.2.10 Class `underflow_error`

[underflow.error]

```
namespace std {
 class underflow_error : public runtime_error {
 public:
 explicit underflow_error(const string& what_arg);
 explicit underflow_error(const char* what_arg);
 };
}
```

1 The class `underflow_error` defines the type of objects thrown as exceptions to report an arithmetic underflow error.

```
underflow_error(const string& what_arg);
```

2 *Effects:* Constructs an object of class `underflow_error`.

3 *Ensures:* `strcmp(what(), what_arg.c_str()) == 0`.

```
underflow_error(const char* what_arg);
```

4 *Effects:* Constructs an object of class `underflow_error`.

5 *Ensures:* `strcmp(what(), what_arg) == 0`.

## 23.3 Assertions

[assertions]

1 The header `<cassert>` provides a macro for documenting C++ program assertions and a mechanism for disabling the assertion checks.

### 23.3.1 Header `<cassert>` synopsis

[cassert.syn]

```
#define assert(E) see below
```

1 The contents are the same as the C standard library header `<assert.h>`, except that a macro named `static_assert` is not defined.

SEE ALSO: ISO C 7.2

### 23.3.2 The `assert` macro

[assertions.assert]

1 An expression `assert(E)` is a constant subexpression (20.3.6), if

(1.1) — `NDEBUG` is defined at the point where `assert` is last defined or redefined, or

- (1.2) — E contextually converted to `bool` (Clause 7) is a constant subexpression that evaluates to the value `true`.

## 23.4 Error numbers

[errno]

- <sup>1</sup> The contents of the header `<cerrno>` are the same as the POSIX header `<errno.h>`, except that `errno` shall be defined as a macro. [Note: The intent is to remain in close alignment with the POSIX standard. — *end note*] A separate `errno` value shall be provided for each thread.

### 23.4.1 Header `<cerrno>` synopsis

[cerrno.syn]

```
#define errno see below

#define E2BIG see below
#define EACCES see below
#define EADDRINUSE see below
#define EADDRNOTAVAIL see below
#define EAFNOSUPPORT see below
#define EAGAIN see below
#define EALREADY see below
#define EBADF see below
#define EBADMSG see below
#define EBUSY see below
#define ECANCELED see below
#define ECHILD see below
#define ECONNABORTED see below
#define ECONNREFUSED see below
#define ECONNRESET see below
#define EDEADLK see below
#define EDESTADDRREQ see below
#define EDOM see below
#define EEXIST see below
#define EFAULT see below
#define EFBIG see below
#define EHOSTUNREACH see below
#define EIDRM see below
#define EILSEQ see below
#define EINPROGRESS see below
#define EINTR see below
#define EINVAL see below
#define EIO see below
#define EISCONN see below
#define EISDIR see below
#define ELOOP see below
#define EMFILE see below
#define EMLINK see below
#define EMSGSIZE see below
#define ENAMETOOLONG see below
#define ENETDOWN see below
#define ENETRESET see below
#define ENETUNREACH see below
#define ENFILE see below
#define ENOBUFS see below
#define ENODATA see below
#define ENODEV see below
#define ENOENT see below
#define ENOEXEC see below
#define ENOLCK see below
#define ENOLINK see below
#define ENOMEM see below
#define ENOMSG see below
#define ENOPROTOPT see below
#define ENOSPC see below
#define ENOSR see below
#define ENOSTR see below
```

```

#define ENOSYS see below
#define ENOTCONN see below
#define ENOTDIR see below
#define ENOTEMPTY see below
#define ENOTRECOVERABLE see below
#define ENOTSOCK see below
#define ENOTSUP see below
#define ENOTTY see below
#define ENXIO see below
#define EOPNOTSUPP see below
#define EOVERFLOW see below
#define EOWNERDEAD see below
#define EPERM see below
#define EPIPE see below
#define EPROTO see below
#define EPROTONOSUPPORT see below
#define EPROTOTYPE see below
#define ERANGE see below
#define EROFS see below
#define ESPIPE see below
#define ESRCH see below
#define ETIME see below
#define ETIMEDOUT see below
#define ETXTBSY see below
#define EWOULDBLOCK see below
#define EXDEV see below

```

<sup>1</sup> The meaning of the macros in this header is defined by the POSIX standard.

SEE ALSO: ISO C 7.5

### 23.5 System error support

[syserr]

- <sup>1</sup> This subclause describes components that the standard library and C++ programs may use to report error conditions originating from the operating system or other low-level application program interfaces.
- <sup>2</sup> Components described in this subclause shall not change the value of `errno` (23.4). Implementations should leave the error states provided by other libraries unchanged.

#### 23.5.1 Header <system\_error> synopsis

[system\_error.syn]

```

namespace std {
 class error_category;
 const error_category& generic_category() noexcept;
 const error_category& system_category() noexcept;

 class error_code;
 class error_condition;
 class system_error;

 template<class T>
 struct is_error_code_enum : public false_type {};

 template<class T>
 struct is_error_condition_enum : public false_type {};

 enum class errc {
 address_family_not_supported, // EAFNOSUPPORT
 address_in_use, // EADDRINUSE
 address_not_available, // EADDRNOTAVAIL
 already_connected, // EISCONN
 argument_list_too_long, // E2BIG
 argument_out_of_domain, // EDOM
 bad_address, // EFAULT
 bad_file_descriptor, // EBADF
 bad_message, // EBADMSG
 };

```

|                                     |                    |
|-------------------------------------|--------------------|
| broken_pipe,                        | // EPIPE           |
| connection_aborted,                 | // ECONNABORTED    |
| connection_already_in_progress,     | // EALREADY        |
| connection_refused,                 | // ECONNREFUSED    |
| connection_reset,                   | // ECONNRESET      |
| cross_device_link,                  | // EXDEV           |
| destination_address_required,       | // EDESTADDRREQ    |
| device_or_resource_busy,            | // EBUSY           |
| directory_not_empty,                | // ENOTEMPTY       |
| executable_format_error,            | // ENOEXEC         |
| file_exists,                        | // EEXIST          |
| file_too_large,                     | // EFBIG           |
| filename_too_long,                  | // ENAMETOOLONG    |
| function_not_supported,             | // ENOSYS          |
| host_unreachable,                   | // EHOSTUNREACH    |
| identifier_removed,                 | // EIDRM           |
| illegal_byte_sequence,              | // EILSEQ          |
| inappropriate_io_control_operation, | // ENOTTY          |
| interrupted,                        | // EINTR           |
| invalid_argument,                   | // EINVAL          |
| invalid_seek,                       | // ESPIPE          |
| io_error,                           | // EIO             |
| is_a_directory,                     | // EISDIR          |
| message_size,                       | // EMSGSIZE        |
| network_down,                       | // ENETDOWN        |
| network_reset,                      | // ENETRESET       |
| network_unreachable,                | // ENETUNREACH     |
| no_buffer_space,                    | // ENOBUFS         |
| no_child_process,                   | // ECHILD          |
| no_link,                            | // ENOLINK         |
| no_lock_available,                  | // ENOLCK          |
| no_message_available,               | // ENODATA         |
| no_message,                         | // ENOMSG          |
| no_protocol_option,                 | // ENOPROTOOPT     |
| no_space_on_device,                 | // ENOSPC          |
| no_stream_resources,                | // ENOSR           |
| no_such_device_or_address,          | // ENXIO           |
| no_such_device,                     | // ENODEV          |
| no_such_file_or_directory,          | // ENOENT          |
| no_such_process,                    | // ESRCH           |
| not_a_directory,                    | // ENOTDIR         |
| not_a_socket,                       | // ENOTSOCK        |
| not_a_stream,                       | // ENOSTR          |
| not_connected,                      | // ENOTCONN        |
| not_enough_memory,                  | // ENOMEM          |
| not_supported,                      | // ENOTSUP         |
| operation_canceled,                 | // ECANCELED       |
| operation_in_progress,              | // EINPROGRESS     |
| operation_not_permitted,            | // EPERM           |
| operation_not_supported,            | // EOPNOTSUPP      |
| operation_would_block,              | // EWOULDBLOCK     |
| owner_dead,                         | // EOWNERDEAD      |
| permission_denied,                  | // EACCES          |
| protocol_error,                     | // EPROTO          |
| protocol_not_supported,             | // EPROTONOSUPPORT |
| read_only_file_system,              | // EROFS           |
| resource_deadlock_would_occur,      | // EDEADLK         |
| resource_unavailable_try_again,     | // EAGAIN          |
| result_out_of_range,                | // ERANGE          |
| state_not_recoverable,              | // ENOTRECOVERABLE |
| stream_timeout,                     | // ETIME           |
| text_file_busy,                     | // ETXTBSY         |
| timed_out,                          | // ETIMEDOUT       |
| too_many_files_open_in_system,      | // ENFILE          |

```

 too_many_files_open, // EMFILE
 too_many_links, // EMLINK
 too_many_symbolic_link_levels, // ELOOP
 value_too_large, // EOVERFLOW
 wrong_protocol_type, // EPROTOTYPE
};

template<> struct is_error_condition_enum<errc> : true_type {};

// 23.5.3.5, non-member functions
error_code make_error_code(errc e) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const error_code& ec);

// 23.5.4.5, non-member functions
error_condition make_error_condition(errc e) noexcept;

// 23.5.5, comparison functions
bool operator==(const error_code& lhs, const error_code& rhs) noexcept;
bool operator==(const error_code& lhs, const error_condition& rhs) noexcept;
bool operator==(const error_condition& lhs, const error_code& rhs) noexcept;
bool operator==(const error_condition& lhs, const error_condition& rhs) noexcept;
bool operator!=(const error_code& lhs, const error_code& rhs) noexcept;
bool operator!=(const error_code& lhs, const error_condition& rhs) noexcept;
bool operator!=(const error_condition& lhs, const error_code& rhs) noexcept;
bool operator!=(const error_condition& lhs, const error_condition& rhs) noexcept;
bool operator<(const error_code& lhs, const error_code& rhs) noexcept;
bool operator<(const error_code& lhs, const error_condition& rhs) noexcept;
bool operator<(const error_condition& lhs, const error_code& rhs) noexcept;
bool operator<(const error_condition& lhs, const error_condition& rhs) noexcept;

// 23.5.6, hash support
template<class T> struct hash;
template<> struct hash<error_code>;
template<> struct hash<error_condition>;

// 23.5, system error support
template<class T>
 inline constexpr bool is_error_code_enum_v = is_error_code_enum<T>::value;
template<class T>
 inline constexpr bool is_error_condition_enum_v = is_error_condition_enum<T>::value;
}

```

- <sup>1</sup> The value of each enum `errc` constant shall be the same as the value of the `<cerrno>` macro shown in the above synopsis. Whether or not the `<system_error>` implementation exposes the `<cerrno>` macros is unspecified.
- <sup>2</sup> The `is_error_code_enum` and `is_error_condition_enum` may be specialized for program-defined types to indicate that such types are eligible for `class error_code` and `class error_condition` automatic conversions, respectively.

## 23.5.2 Class `error_category`

[syserr.errcat]

### 23.5.2.1 Overview

[syserr.errcat.overview]

- <sup>1</sup> The class `error_category` serves as a base class for types used to identify the source and encoding of a particular category of error code. Classes may be derived from `error_category` to support categories of errors in addition to those defined in this document. Such classes shall behave as specified in this subclause 23.5.2. [Note: `error_category` objects are passed by reference, and two such objects are equal if they have the same address. This means that applications using custom `error_category` types should create a single object of each such type. — end note]

```

namespace std {
 class error_category {
 public:
 constexpr error_category() noexcept;

```

```

 virtual ~error_category();
 error_category(const error_category&) = delete;
 error_category& operator=(const error_category&) = delete;
 virtual const char* name() const noexcept = 0;
 virtual error_condition default_error_condition(int ev) const noexcept;
 virtual bool equivalent(int code, const error_condition& condition) const noexcept;
 virtual bool equivalent(const error_code& code, int condition) const noexcept;
 virtual string message(int ev) const = 0;

 bool operator==(const error_category& rhs) const noexcept;
 bool operator!=(const error_category& rhs) const noexcept;
 bool operator< (const error_category& rhs) const noexcept;
};

const error_category& generic_category() noexcept;
const error_category& system_category() noexcept;
}

```

### 23.5.2.2 Virtual members

[syserr.errcat.virtuals]

```

virtual ~error_category();
1 Effects: Destroys an object of class error_category.

virtual const char* name() const noexcept = 0;
2 Returns: A string naming the error category.

virtual error_condition default_error_condition(int ev) const noexcept;
3 Returns: error_condition(ev, *this).

virtual bool equivalent(int code, const error_condition& condition) const noexcept;
4 Returns: default_error_condition(code) == condition.

virtual bool equivalent(const error_code& code, int condition) const noexcept;
5 Returns: *this == code.category() && code.value() == condition.

virtual string message(int ev) const = 0;
6 Returns: A string that describes the error condition denoted by ev.

```

### 23.5.2.3 Non-virtual members

[syserr.errcat.nonvirtuals]

```

constexpr error_category() noexcept;
1 Effects: Constructs an object of class error_category.

bool operator==(const error_category& rhs) const noexcept;
2 Returns: this == &rhs.

bool operator!=(const error_category& rhs) const noexcept;
3 Returns: !(*this == rhs).

bool operator<(const error_category& rhs) const noexcept;
4 Returns: less<const error_category*>()(this, &rhs).
 [Note: less (24.14.7) provides a total ordering for pointers. — end note]

```

### 23.5.2.4 Program-defined classes derived from error\_category

[syserr.errcat.derived]

```

virtual const char* name() const noexcept = 0;
1 Returns: A string naming the error category.

virtual error_condition default_error_condition(int ev) const noexcept;
2 Returns: An object of type error_condition that corresponds to ev.

```

```
virtual bool equivalent(int code, const error_condition& condition) const noexcept;
```

- 3 *Returns:* true if, for the category of error represented by *\*this*, code is considered equivalent to condition; otherwise, false.

```
virtual bool equivalent(const error_code& code, int condition) const noexcept;
```

- 4 *Returns:* true if, for the category of error represented by *\*this*, code is considered equivalent to condition; otherwise, false.

### 23.5.2.5 Error category objects [syserr.errcat.objects]

```
const error_category& generic_category() noexcept;
```

- 1 *Returns:* A reference to an object of a type derived from class `error_category`. All calls to this function shall return references to the same object.

- 2 *Remarks:* The object's `default_error_condition` and `equivalent` virtual functions shall behave as specified for the class `error_category`. The object's `name` virtual function shall return a pointer to the string "generic".

```
const error_category& system_category() noexcept;
```

- 3 *Returns:* A reference to an object of a type derived from class `error_category`. All calls to this function shall return references to the same object.

- 4 *Remarks:* The object's `equivalent` virtual functions shall behave as specified for class `error_category`. The object's `name` virtual function shall return a pointer to the string "system". The object's `default_error_condition` virtual function shall behave as follows:

If the argument `ev` corresponds to a POSIX `errno` value `posv`, the function shall return `error_condition(posv, generic_category())`. Otherwise, the function shall return `error_condition(ev, system_category())`. What constitutes correspondence for any given operating system is unspecified. [Note: The number of potential system error codes is large and unbounded, and some may not correspond to any POSIX `errno` value. Thus implementations are given latitude in determining correspondence. — end note]

## 23.5.3 Class `error_code` [syserr.errcode]

### 23.5.3.1 Overview [syserr.errcode.overview]

- 1 The class `error_code` describes an object used to hold error code values, such as those originating from the operating system or other low-level application program interfaces. [Note: Class `error_code` is an adjunct to error reporting by exception. — end note]

```
namespace std {
 class error_code {
 public:
 // 23.5.3.2, constructors
 error_code() noexcept;
 error_code(int val, const error_category& cat) noexcept;
 template<class ErrorCodeEnum>
 error_code(ErrorCodeEnum e) noexcept;

 // 23.5.3.3, modifiers
 void assign(int val, const error_category& cat) noexcept;
 template<class ErrorCodeEnum>
 error_code& operator=(ErrorCodeEnum e) noexcept;
 void clear() noexcept;

 // 23.5.3.4, observers
 int value() const noexcept;
 const error_category& category() const noexcept;
 error_condition default_error_condition() const noexcept;
 string message() const;
 explicit operator bool() const noexcept;
 };
};
```



```

private:
 int val_; // exposition only
 const error_category* cat_; // exposition only
};

// 23.5.3.5, non-member functions
error_code make_error_code(errc e) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const error_code& ec);
}

```

### 23.5.3.2 Constructors [syserr.errcode.constructors]

```
error_code() noexcept;
```

- 1 *Effects:* Constructs an object of type `error_code`.  
 2 *Ensures:* `val_ == 0` and `cat_ == &system_category()`.

```
error_code(int val, const error_category& cat) noexcept;
```

- 3 *Effects:* Constructs an object of type `error_code`.  
 4 *Ensures:* `val_ == val` and `cat_ == &cat`.

```
template<class ErrorCodeEnum>
 error_code(ErrorCodeEnum e) noexcept;
```

- 5 *Effects:* Constructs an object of type `error_code`.  
 6 *Ensures:* `*this == make_error_code(e)`.  
 7 *Remarks:* This constructor shall not participate in overload resolution unless `is_error_code_enum_v<ErrorCodeEnum>` is true.

### 23.5.3.3 Modifiers [syserr.errcode.modifiers]

```
void assign(int val, const error_category& cat) noexcept;
```

- 1 *Ensures:* `val_ == val` and `cat_ == &cat`.

```
template<class ErrorCodeEnum>
 error_code& operator=(ErrorCodeEnum e) noexcept;
```

- 2 *Ensures:* `*this == make_error_code(e)`.  
 3 *Returns:* `*this`.  
 4 *Remarks:* This operator shall not participate in overload resolution unless `is_error_code_enum_v<ErrorCodeEnum>` is true.

```
void clear() noexcept;
```

- 5 *Ensures:* `value() == 0` and `category() == system_category()`.

### 23.5.3.4 Observers [syserr.errcode.observers]

```
int value() const noexcept;
```

- 1 *Returns:* `val_`.

```
const error_category& category() const noexcept;
```

- 2 *Returns:* `*cat_`.

```
error_condition default_error_condition() const noexcept;
```

- 3 *Returns:* `category().default_error_condition(value())`.

```
string message() const;
```

- 4 *Returns:* `category().message(value())`.

```
explicit operator bool() const noexcept;
```

5 *Returns:* value() != 0.

### 23.5.3.5 Non-member functions

[syserr.errcode.nonmembers]

```
error_code make_error_code(errc e) noexcept;
```

1 *Returns:* error\_code(static\_cast<int>(e), generic\_category()).

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& os, const error_code& ec);
```

2 *Effects:* As if by: os << ec.category().name() << ':' << ec.value();

## 23.5.4 Class error\_condition

[syserr.errcondition]

### 23.5.4.1 Overview

[syserr.errcondition.overview]

1 The class `error_condition` describes an object used to hold values identifying error conditions. [*Note:* `error_condition` values are portable abstractions, while `error_code` values (23.5.3) are implementation specific. — *end note*]

```
namespace std {
 class error_condition {
 public:
 // 23.5.4.2, constructors
 error_condition() noexcept;
 error_condition(int val, const error_category& cat) noexcept;
 template<class ErrorConditionEnum>
 error_condition(ErrorConditionEnum e) noexcept;

 // 23.5.4.3, modifiers
 void assign(int val, const error_category& cat) noexcept;
 template<class ErrorConditionEnum>
 error_condition& operator=(ErrorConditionEnum e) noexcept;
 void clear() noexcept;

 // 23.5.4.4, observers
 int value() const noexcept;
 const error_category& category() const noexcept;
 string message() const;
 explicit operator bool() const noexcept;

 private:
 int val_; // exposition only
 const error_category* cat_; // exposition only
 };
}
```

### 23.5.4.2 Constructors

[syserr.errcondition.constructors]

```
error_condition() noexcept;
```

1 *Effects:* Constructs an object of type `error_condition`.

2 *Ensures:* val\_ == 0 and cat\_ == &generic\_category().

```
error_condition(int val, const error_category& cat) noexcept;
```

3 *Effects:* Constructs an object of type `error_condition`.

4 *Ensures:* val\_ == val and cat\_ == &cat.

```
template<class ErrorConditionEnum>
```

```
error_condition(ErrorConditionEnum e) noexcept;
```

5 *Effects:* Constructs an object of type `error_condition`.

6 *Ensures:* \*this == make\_error\_condition(e).

7 *Remarks:* This constructor shall not participate in overload resolution unless `is_error_condition_enum_v<ErrorConditionEnum>` is true.

### 23.5.4.3 Modifiers

[syserr.errcondition.modifiers]

```
void assign(int val, const error_category& cat) noexcept;
```

1 *Ensures:* `val_ == val` and `cat_ == &cat`.

```
template<class ErrorConditionEnum>
```

```
error_condition& operator=(ErrorConditionEnum e) noexcept;
```

2 *Ensures:* `*this == make_error_condition(e)`.

3 *Returns:* `*this`.

4 *Remarks:* This operator shall not participate in overload resolution unless `is_error_condition_enum_v<ErrorConditionEnum>` is true.

```
void clear() noexcept;
```

5 *Ensures:* `value() == 0` and `category() == generic_category()`.

### 23.5.4.4 Observers

[syserr.errcondition.observers]

```
int value() const noexcept;
```

1 *Returns:* `val_`.

```
const error_category& category() const noexcept;
```

2 *Returns:* `*cat_`.

```
string message() const;
```

3 *Returns:* `category().message(value())`.

```
explicit operator bool() const noexcept;
```

4 *Returns:* `value() != 0`.

### 23.5.4.5 Non-member functions

[syserr.errcondition.nonmembers]

```
error_condition make_error_condition(errc e) noexcept;
```

1 *Returns:* `error_condition(static_cast<int>(e), generic_category())`.

### 23.5.5 Comparison functions

[syserr.compare]

```
bool operator==(const error_code& lhs, const error_code& rhs) noexcept;
```

1 *Returns:*

```
lhs.category() == rhs.category() && lhs.value() == rhs.value()
```

```
bool operator==(const error_code& lhs, const error_condition& rhs) noexcept;
```

2 *Returns:*

```
lhs.category().equivalent(lhs.value(), rhs) || rhs.category().equivalent(lhs, rhs.value())
```

```
bool operator==(const error_condition& lhs, const error_code& rhs) noexcept;
```

3 *Returns:*

```
rhs.category().equivalent(rhs.value(), lhs) || lhs.category().equivalent(rhs, lhs.value())
```

```
bool operator==(const error_condition& lhs, const error_condition& rhs) noexcept;
```

4 *Returns:*

```
lhs.category() == rhs.category() && lhs.value() == rhs.value()
```

```
bool operator!=(const error_code& lhs, const error_code& rhs) noexcept;
```

```
bool operator!=(const error_code& lhs, const error_condition& rhs) noexcept;
```

```
bool operator!=(const error_condition& lhs, const error_code& rhs) noexcept;
```

```
bool operator!=(const error_condition& lhs, const error_condition& rhs) noexcept;
```

5 *Returns:* `!(lhs == rhs)`.

```
bool operator<(const error_code& lhs, const error_code& rhs) noexcept;
```

6 *Returns:*

```
lhs.category() < rhs.category() ||
(lhs.category() == rhs.category() && lhs.value() < rhs.value())
```

```
bool operator<(const error_condition& lhs, const error_condition& rhs) noexcept;
```

7 *Returns:*

```
lhs.category() < rhs.category() ||
(lhs.category() == rhs.category() && lhs.value() < rhs.value())
```

### 23.5.6 System error hash support

[syserr.hash]

```
template<> struct hash<error_code>;
template<> struct hash<error_condition>;
```

1 The specializations are enabled (24.14.16).

### 23.5.7 Class `system_error`

[syserr.syserr]

#### 23.5.7.1 Overview

[syserr.syserr.overview]

1 The class `system_error` describes an exception object used to report error conditions that have an associated error code. Such error conditions typically originate from the operating system or other low-level application program interfaces.

2 [Note: If an error represents an out-of-memory condition, implementations are encouraged to throw an exception object of type `bad_alloc` (21.6.3.1) rather than `system_error`. — end note]

```
namespace std {
 class system_error : public runtime_error {
 public:
 system_error(error_code ec, const string& what_arg);
 system_error(error_code ec, const char* what_arg);
 system_error(error_code ec);
 system_error(int ev, const error_category& ecat, const string& what_arg);
 system_error(int ev, const error_category& ecat, const char* what_arg);
 system_error(int ev, const error_category& ecat);
 const error_code& code() const noexcept;
 const char* what() const noexcept override;
 };
}
```

#### 23.5.7.2 Members

[syserr.syserr.members]

```
system_error(error_code ec, const string& what_arg);
```

1 *Effects:* Constructs an object of class `system_error`.

2 *Ensures:* `code() == ec` and `string(what()).find(what_arg) != string::npos`.

```
system_error(error_code ec, const char* what_arg);
```

3 *Effects:* Constructs an object of class `system_error`.

4 *Ensures:* `code() == ec` and `string(what()).find(what_arg) != string::npos`.

```
system_error(error_code ec);
```

5 *Effects:* Constructs an object of class `system_error`.

6 *Ensures:* `code() == ec`.

```
system_error(int ev, const error_category& ecat, const string& what_arg);
```

7 *Effects:* Constructs an object of class `system_error`.

8       *Ensures:* `code() == error_code(ev, ecat)` and  
           `string(what()).find(what_arg) != string::npos`.

`system_error(int ev, const error_category& ecat, const char* what_arg);`

9       *Effects:* Constructs an object of class `system_error`.

10       *Ensures:* `code() == error_code(ev, ecat)` and  
           `string(what()).find(what_arg) != string::npos`.

`system_error(int ev, const error_category& ecat);`

11       *Effects:* Constructs an object of class `system_error`.

12       *Ensures:* `code() == error_code(ev, ecat)`.

`const error_code& code() const noexcept;`

13       *Returns:* `ec` or `error_code(ev, ecat)`, from the constructor, as appropriate.

`const char* what() const noexcept override;`

14       *Returns:* An NTBS incorporating the arguments supplied in the constructor.

[*Note:* The returned NTBS might be the contents of `what_arg + ": " + code.message()`. — *end note*]

## 24 General utilities library [utilities]

### 24.1 General [utilities.general]

- <sup>1</sup> This Clause describes utilities that are generally useful in C++ programs; some of these utilities are used by other elements of the C++ standard library. These utilities are summarized in Table 38.

Table 38 — General utilities library summary

| Subclause | Header(s)                        |                       |
|-----------|----------------------------------|-----------------------|
| 24.2      | Utility components               | <utility>             |
| 24.3      | Compile-time integer sequences   | <utility>             |
| 24.4      | Pairs                            | <utility>             |
| 24.5      | Tuples                           | <tuple>               |
| 24.6      | Optional objects                 | <optional>            |
| 24.7      | Variants                         | <variant>             |
| 24.8      | Storage for any type             | <any>                 |
| 24.9      | Fixed-size sequences of bits     | <bitset>              |
| 24.10     | Memory                           | <memory><br><cstdlib> |
| 24.11     | Smart pointers                   | <memory>              |
| 24.12     | Memory resources                 | <memory_resource>     |
| 24.13     | Scoped allocators                | <scoped_allocator>    |
| 24.14     | Function objects                 | <functional>          |
| 24.15     | Type traits                      | <type_traits>         |
| 24.16     | Compile-time rational arithmetic | <ratio>               |
| 24.17     | Time utilities                   | <chrono><br><ctime>   |
| 24.18     | Type indexes                     | <typeindex>           |
| 24.19     | Execution policies               | <execution>           |
| 24.20     | Primitive numeric conversions    | <charconv>            |

### 24.2 Utility components [utility]

#### 24.2.1 Header <utility> synopsis [utility.syn]

- <sup>1</sup> The header <utility> contains some basic function and class templates that are used throughout the rest of the library.

```
#include <initializer_list> // see 21.10.1

namespace std {
 // 24.2.2, swap
 template<class T>
 constexpr void swap(T& a, T& b) noexcept(see below);
 template<class T, size_t N>
 constexpr void swap(T (&a)[N], T (&b)[N]) noexcept(is_nothrow_swappable_v<T>);

 // 24.2.3, exchange
 template<class T, class U = T>
 constexpr T exchange(T& obj, U&& new_val);

 // 24.2.4, forward/move
 template<class T>
 constexpr T&& forward(remove_reference_t<T>& t) noexcept;
 template<class T>
 constexpr T&& forward(remove_reference_t<T>&& t) noexcept;
```

```

template<class T>
constexpr remove_reference_t<T>&& move(T&&) noexcept;
template<class T>
constexpr conditional_t<
 !is_nothrow_move_constructible_v<T> && is_copy_constructible_v<T>, const T&, T&&>
 move_if_noexcept(T& x) noexcept;

// 24.2.5, as_const
template<class T>
constexpr add_const_t<T>& as_const(T& t) noexcept;
template<class T>
void as_const(const T&&) = delete;

// 24.2.6, declval
template<class T>
add_rvalue_reference_t<T> declval() noexcept; // as unevaluated operand

// 24.3, Compile-time integer sequences
template<class T, T...>
struct integer_sequence;
template<size_t... I>
using index_sequence = integer_sequence<size_t, I...>;

template<class T, T N>
using make_integer_sequence = integer_sequence<T, see below>;
template<size_t N>
using make_index_sequence = make_integer_sequence<size_t, N>;

template<class... T>
using index_sequence_for = make_index_sequence<sizeof...(T)>;

// 24.4, class template pair
template<class T1, class T2>
struct pair;

// 24.4.3, pair specialized algorithms
template<class T1, class T2>
constexpr bool operator==(const pair<T1, T2>&, const pair<T1, T2>&);
template<class T1, class T2>
constexpr bool operator!=(const pair<T1, T2>&, const pair<T1, T2>&);
template<class T1, class T2>
constexpr bool operator<(const pair<T1, T2>&, const pair<T1, T2>&);
template<class T1, class T2>
constexpr bool operator>(const pair<T1, T2>&, const pair<T1, T2>&);
template<class T1, class T2>
constexpr bool operator<=(const pair<T1, T2>&, const pair<T1, T2>&);
template<class T1, class T2>
constexpr bool operator>=(const pair<T1, T2>&, const pair<T1, T2>&);

template<class T1, class T2>
void swap(pair<T1, T2>& x, pair<T1, T2>& y) noexcept(noexcept(x.swap(y)));

template<class T1, class T2>
constexpr see below make_pair(T1&&, T2&&);

// 24.4.4, tuple-like access to pair
template<class T> class tuple_size;
template<size_t I, class T> class tuple_element;

template<class T1, class T2> struct tuple_size<pair<T1, T2>>;
template<size_t I, class T1, class T2> struct tuple_element<I, pair<T1, T2>>;

template<size_t I, class T1, class T2>
constexpr tuple_element_t<I, pair<T1, T2>>& get(pair<T1, T2>&) noexcept;

```

```

template<size_t I, class T1, class T2>
 constexpr tuple_element_t<I, pair<T1, T2>>&& get(pair<T1, T2>&&) noexcept;
template<size_t I, class T1, class T2>
 constexpr const tuple_element_t<I, pair<T1, T2>>& get(const pair<T1, T2>&) noexcept;
template<size_t I, class T1, class T2>
 constexpr const tuple_element_t<I, pair<T1, T2>>&& get(const pair<T1, T2>&&) noexcept;
template<class T1, class T2>
 constexpr T1& get(pair<T1, T2>& p) noexcept;
template<class T1, class T2>
 constexpr const T1& get(const pair<T1, T2>& p) noexcept;
template<class T1, class T2>
 constexpr T1&& get(pair<T1, T2>&& p) noexcept;
template<class T1, class T2>
 constexpr const T1&& get(const pair<T1, T2>&& p) noexcept;
template<class T2, class T1>
 constexpr T2& get(pair<T1, T2>& p) noexcept;
template<class T2, class T1>
 constexpr const T2& get(const pair<T1, T2>& p) noexcept;
template<class T2, class T1>
 constexpr T2&& get(pair<T1, T2>&& p) noexcept;
template<class T2, class T1>
 constexpr const T2&& get(const pair<T1, T2>&& p) noexcept;

// 24.4.5, pair piecewise construction
struct piecewise_construct_t {
 explicit piecewise_construct_t() = default;
};
inline constexpr piecewise_construct_t piecewise_construct{};
template<class... Types> class tuple; // defined in <tuple> (24.5.2)

// in-place construction
struct in_place_t {
 explicit in_place_t() = default;
};
inline constexpr in_place_t in_place{};
template<class T>
 struct in_place_type_t {
 explicit in_place_type_t() = default;
 };
template<class T> inline constexpr in_place_type_t<T> in_place_type{};
template<size_t I>
 struct in_place_index_t {
 explicit in_place_index_t() = default;
 };
template<size_t I> inline constexpr in_place_index_t<I> in_place_index{};
}

```

### 24.2.2 swap

[utility.swap]

```

template<class T>
 constexpr void swap(T& a, T& b) noexcept(see below);

```

- <sup>1</sup> *Remarks:* This function is a designated customization point (20.5.4.2.1) and shall not participate in overload resolution unless `is_move_constructible_v<T>` is true and `is_move_assignable_v<T>` is true. The expression inside `noexcept` is equivalent to:

```

 is_nothrow_move_constructible_v<T> && is_nothrow_move_assignable_v<T>

```

- <sup>2</sup> *Requires:* Type `T` shall be *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27).

- <sup>3</sup> *Effects:* Exchanges values stored in two locations.

```

template<class T, size_t N>
 constexpr void swap(T (&a)[N], T (&b)[N]) noexcept(is_nothrow_swappable_v<T>);

```

- <sup>4</sup> *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<T>` is true.



5 *Requires:* `a[i]` shall be swappable with (20.5.3.2) `b[i]` for all `i` in the range `[0, N)`.

6 *Effects:* As if by `swap_ranges(a, a + N, b)`.

### 24.2.3 exchange

[utility.exchange]

```
template<class T, class U = T>
constexpr T exchange(T& obj, U&& new_val);
```

1 *Effects:* Equivalent to:

```
T old_val = std::move(obj);
obj = std::forward<U>(new_val);
return old_val;
```

### 24.2.4 Forward/move helpers

[forward]

1 The library provides templated helper functions to simplify applying move semantics to an lvalue and to simplify the implementation of forwarding functions. All functions specified in this subclause are signal-safe (21.12.4).

```
template<class T> constexpr T&& forward(remove_reference_t<T>& t) noexcept;
template<class T> constexpr T&& forward(remove_reference_t<T>&& t) noexcept;
```

2 *Returns:* `static_cast<T&&>(t)`.

3 *Remarks:* If the second form is instantiated with an lvalue reference type, the program is ill-formed.

4 *[Example:*

```
template<class T, class A1, class A2>
shared_ptr<T> factory(A1&& a1, A2&& a2) {
 return shared_ptr<T>(new T(std::forward<A1>(a1), std::forward<A2>(a2)));
}

struct A {
 A(int&, const double&);
};

void g() {
 shared_ptr<A> sp1 = factory<A>(2, 1.414); // error: 2 will not bind to int&
 int i = 2;
 shared_ptr<A> sp2 = factory<A>(i, 1.414); // OK
}
```

In the first call to `factory`, `A1` is deduced as `int`, so `2` is forwarded to `A`'s constructor as an rvalue. In the second call to `factory`, `A1` is deduced as `int&`, so `i` is forwarded to `A`'s constructor as an lvalue. In both cases, `A2` is deduced as `double`, so `1.414` is forwarded to `A`'s constructor as an rvalue. — *end example*]

```
template<class T> constexpr remove_reference_t<T>&& move(T&& t) noexcept;
```

5 *Returns:* `static_cast<remove_reference_t<T>&&>(t)`.

6 *[Example:*

```
template<class T, class A1>
shared_ptr<T> factory(A1&& a1) {
 return shared_ptr<T>(new T(std::forward<A1>(a1)));
}

struct A {
 A();
 A(const A&); // copies from lvalues
 A(A&&); // moves from rvalues
};

void g() {
 A a;
 shared_ptr<A> sp1 = factory<A>(a); // "a" binds to A(const A&)
```

```

 shared_ptr<A> sp1 = factory<A>(std::move(a)); // “a” binds to A(A&&)
}

```

In the first call to `factory`, `A1` is deduced as `A&`, so `a` is forwarded as a non-const lvalue. This binds to the constructor `A(const A&)`, which copies the value from `a`. In the second call to `factory`, because of the call `std::move(a)`, `A1` is deduced as `A`, so `a` is forwarded as an rvalue. This binds to the constructor `A(A&&)`, which moves the value from `a`. — *end example*]

```

template<class T> constexpr conditional_t<
 !is_nothrow_move_constructible_v<T> && is_copy_constructible_v<T>, const T&, T&&>
 move_if_noexcept(T& x) noexcept;

```

7 *Returns:* `std::move(x)`.

### 24.2.5 Function template `as_const` [utility.as\_const]

```

template<class T> constexpr add_const_t<T>& as_const(T& t) noexcept;

```

1 *Returns:* `t`.

### 24.2.6 Function template `declval` [declval]

1 The library provides the function template `declval` to simplify the definition of expressions which occur as unevaluated operands (8.2).

```

template<class T> add_rvalue_reference_t<T> declval() noexcept; // as unevaluated operand

```

2 *Remarks:* If this function is odr-used (6.2), the program is ill-formed.

3 *Remarks:* The template parameter `T` of `declval` may be an incomplete type.

4 *[Example:*

```

 template<class To, class From> decltype(static_cast<To>(declval<From>())) convert(From&&);

```

declares a function template `convert` which only participates in overloading if the type `From` can be explicitly converted to type `To`. For another example see class template `common_type` (24.15.7.6). — *end example*]

## 24.3 Compile-time integer sequences [intseq]

### 24.3.1 In general [intseq.general]

1 The library provides a class template that can represent an integer sequence. When used as an argument to a function template the template parameter pack defining the sequence can be deduced and used in a pack expansion. [*Note:* The `index_sequence` alias template is provided for the common case of an integer sequence of type `size_t`; see also 24.5.3.5. — *end note*]

### 24.3.2 Class template `integer_sequence` [intseq.intseq]

```

namespace std {
 template<class T, T... I> struct integer_sequence {
 using value_type = T;
 static constexpr size_t size() noexcept { return sizeof...(I); }
 };
}

```

1 `T` shall be an integer type.

### 24.3.3 Alias template `make_integer_sequence` [intseq.make]

```

template<class T, T N>
 using make_integer_sequence = integer_sequence<T, see below>;

```

1 If `N` is negative the program is ill-formed. The alias template `make_integer_sequence` denotes a specialization of `integer_sequence` with `N` template non-type arguments. The type `make_integer_sequence<T, N>` denotes the type `integer_sequence<T, 0, 1, ..., N-1>`. [*Note:* `make_integer_sequence<int, 0>` denotes the type `integer_sequence<int>` — *end note*]

## 24.4 Pairs

[pairs]

### 24.4.1 In general

[pairs.general]

- <sup>1</sup> The library provides a template for heterogeneous pairs of values. The library also provides a matching function template to simplify their construction and several templates that provide access to pair objects as if they were tuple objects (see 24.5.3.6 and 24.5.3.7).

### 24.4.2 Class template pair

[pairs.pair]

```

namespace std {
 template<class T1, class T2>
 struct pair {
 using first_type = T1;
 using second_type = T2;

 T1 first;
 T2 second;

 pair(const pair&) = default;
 pair(pair&&) = default;
 explicit(see below) constexpr pair();
 explicit(see below) constexpr pair(const T1& x, const T2& y);
 template<class U1, class U2>
 explicit(see below) constexpr pair(U1&& x, U2&& y);
 template<class U1, class U2>
 explicit(see below) constexpr pair(const pair<U1, U2>& p);
 template<class U1, class U2>
 explicit(see below) constexpr pair(pair<U1, U2>&& p);
 template<class... Args1, class... Args2>
 pair(piecewise_construct_t, tuple<Args1...> first_args, tuple<Args2...> second_args);

 pair& operator=(const pair& p);
 template<class U1, class U2>
 pair& operator=(const pair<U1, U2>& p);
 pair& operator=(pair&& p) noexcept(see below);
 template<class U1, class U2>
 pair& operator=(pair<U1, U2>&& p);

 void swap(pair& p) noexcept(see below);
 };

 template<class T1, class T2>
 pair(T1, T2) -> pair<T1, T2>;
}

```

- <sup>1</sup> Constructors and member functions of `pair` shall not throw exceptions unless one of the element-wise operations specified to be called for that operation throws an exception.
- <sup>2</sup> The defaulted move and copy constructor, respectively, of `pair` shall be a `constexpr` function if and only if all required element-wise initializations for copy and move, respectively, would satisfy the requirements for a `constexpr` function.
- <sup>3</sup> If `(is_trivially_destructible_v<T1> && is_trivially_destructible_v<T2>)` is true, then the destructor of `pair` is trivial.

`explicit(see below) constexpr pair();`

- <sup>4</sup> *Effects:* Value-initializes `first` and `second`.

- <sup>5</sup> *Remarks:* This constructor shall not participate in overload resolution unless `is_default_constructible_v<first_type>` is true and `is_default_constructible_v<second_type>` is true. [Note: This behavior can be implemented by a constructor template with default template arguments. — end note] The expression inside `explicit` evaluates to true if and only if either `first_type` or `second_type` is not implicitly default-constructible. [Note: This behavior can be implemented with a trait that checks whether a `const first_type&` or a `const second_type&` can be initialized with `{}`. — end note]

```
explicit(see below) constexpr pair(const T1& x, const T2& y);
```

6 *Effects:* Initializes `first` with `x` and `second` with `y`.

7 *Remarks:* This constructor shall not participate in overload resolution unless `is_copy_constructible_v<first_type>` is true and `is_copy_constructible_v<second_type>` is true. The expression inside `explicit` is equivalent to:

```
!is_convertible_v<const first_type&, first_type> ||
!is_convertible_v<const second_type&, second_type>
```

```
template<class U1, class U2> explicit(see below) constexpr pair(U1&& x, U2&& y);
```

8 *Effects:* Initializes `first` with `std::forward<U1>(x)` and `second` with `std::forward<U2>(y)`.

9 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<first_type, U1&&>` is true and `is_constructible_v<second_type, U2&&>` is true. The expression inside `explicit` is equivalent to:

```
!is_convertible_v<U1, first_type> || !is_convertible_v<U2, second_type>
```

```
template<class U1, class U2> explicit(see below) constexpr pair(const pair<U1, U2>& p);
```

10 *Effects:* Initializes members from the corresponding members of the argument.

11 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<first_type, const U1&>` is true and `is_constructible_v<second_type, const U2&>` is true. The expression inside `explicit` is equivalent to:

```
!is_convertible_v<const U1&, first_type> || !is_convertible_v<const U2&, second_type>
```

```
template<class U1, class U2> explicit(see below) constexpr pair(pair<U1, U2>&& p);
```

12 *Effects:* Initializes `first` with `std::forward<U1>(p.first)` and `second` with `std::forward<U2>(p.second)`.

13 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<first_type, U1&&>` is true and `is_constructible_v<second_type, U2&&>` is true. The expression inside `explicit` is equivalent to:

```
!is_convertible_v<U1, first_type> || !is_convertible_v<U2, second_type>
```

```
template<class... Args1, class... Args2>
pair(piecewise_construct_t, tuple<Args1...> first_args, tuple<Args2...> second_args);
```

14 *Requires:* `is_constructible_v<first_type, Args1&&...>` is true and `is_constructible_v<second_type, Args2&&...>` is true.

15 *Effects:* Initializes `first` with arguments of types `Args1...` obtained by forwarding the elements of `first_args` and initializes `second` with arguments of types `Args2...` obtained by forwarding the elements of `second_args`. (Here, forwarding an element `x` of type `U` within a `tuple` object means calling `std::forward<U>(x)`.) This form of construction, whereby constructor arguments for `first` and `second` are each provided in a separate `tuple` object, is called *piecewise construction*.

```
pair& operator=(const pair& p);
```

16 *Effects:* Assigns `p.first` to `first` and `p.second` to `second`.

17 *Remarks:* This operator shall be defined as deleted unless `is_copy_assignable_v<first_type>` is true and `is_copy_assignable_v<second_type>` is true.

18 *Returns:* `*this`.

```
template<class U1, class U2> pair& operator=(const pair<U1, U2>& p);
```

19 *Effects:* Assigns `p.first` to `first` and `p.second` to `second`.

20 *Remarks:* This operator shall not participate in overload resolution unless `is_assignable_v<first_type&, const U1&>` is true and `is_assignable_v<second_type&, const U2&>` is true.

21 *Returns:* `*this`.

```
pair& operator=(pair&& p) noexcept(see below);
```

22 *Effects:* Assigns to first with `std::forward<first_type>(p.first)` and to second with `std::forward<second_type>(p.second)`.

23 *Remarks:* This operator shall not participate in overload resolution unless `is_move_assignable_v<first_type>` is true and `is_move_assignable_v<second_type>` is true.

24 *Remarks:* The expression inside `noexcept` is equivalent to:

```
is_nothrow_move_assignable_v<T1> && is_nothrow_move_assignable_v<T2>
```

25 *Returns:* `*this`.

```
template<class U1, class U2> pair& operator=(pair<U1, U2>&& p);
```

26 *Effects:* Assigns to first with `std::forward<U1>(p.first)` and to second with `std::forward<U2>(p.second)`.

27 *Remarks:* This operator shall not participate in overload resolution unless `is_assignable_v<first_type&, U1&&>` is true and `is_assignable_v<second_type&, U2&&>` is true.

28 *Returns:* `*this`.

```
void swap(pair& p) noexcept(see below);
```

29 *Requires:* first shall be swappable with (20.5.3.2) `p.first` and second shall be swappable with `p.second`.

30 *Effects:* Swaps first with `p.first` and second with `p.second`.

31 *Remarks:* The expression inside `noexcept` is equivalent to:

```
is_nothrow_swappable_v<first_type> && is_nothrow_swappable_v<second_type>
```

### 24.4.3 Specialized algorithms

[pairs.spec]

```
template<class T1, class T2>
```

```
constexpr bool operator==(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

1 *Returns:* `x.first == y.first && x.second == y.second`.

```
template<class T1, class T2>
```

```
constexpr bool operator!=(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

2 *Returns:* `!(x == y)`.

```
template<class T1, class T2>
```

```
constexpr bool operator<(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

3 *Returns:* `x.first < y.first || (!(y.first < x.first) && x.second < y.second)`.

```
template<class T1, class T2>
```

```
constexpr bool operator>(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

4 *Returns:* `y < x`.

```
template<class T1, class T2>
```

```
constexpr bool operator<=(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

5 *Returns:* `!(y < x)`.

```
template<class T1, class T2>
```

```
constexpr bool operator>=(const pair<T1, T2>& x, const pair<T1, T2>& y);
```

6 *Returns:* `!(x < y)`.

```
template<class T1, class T2>
```

```
void swap(pair<T1, T2>& x, pair<T1, T2>& y) noexcept(noexcept(x.swap(y)));
```

7 *Effects:* As if by `x.swap(y)`.

8 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<T1>` is true and `is_swappable_v<T2>` is true.

```
template<class T1, class T2>
constexpr pair<V1, V2> make_pair(T1&& x, T2&& y);
```

- 9 *Returns:* pair<V1, V2>(std::forward<T1>(x), std::forward<T2>(y)), where V1 and V2 are determined as follows: Let  $U_i$  be decay\_t<T $_i$ > for each T $_i$ . If  $U_i$  is a specialization of reference\_wrapper, then V $_i$  is  $U_i::\text{type}\&$ , otherwise V $_i$  is  $U_i$ .

10 [Example: In place of:

```
return pair<int, double>(5, 3.1415926); // explicit types
```

a C++ program may contain:

```
return make_pair(5, 3.1415926); // types are deduced
```

— end example]

#### 24.4.4 Tuple-like access to pair

[pair.astuple]

```
template<class T1, class T2>
struct tuple_size<pair<T1, T2>> : integral_constant<size_t, 2> { };
```

```
tuple_element<I, pair<T1, T2>>::type
```

- 1 *Requires:*  $I < 2$ . The program is ill-formed if  $I$  is out of bounds.

- 2 *Value:* The type T1 if  $I == 0$ , otherwise the type T2.

```
template<size_t I, class T1, class T2>
constexpr tuple_element_t<I, pair<T1, T2>>& get(pair<T1, T2>& p) noexcept;
template<size_t I, class T1, class T2>
constexpr const tuple_element_t<I, pair<T1, T2>>& get(const pair<T1, T2>& p) noexcept;
template<size_t I, class T1, class T2>
constexpr tuple_element_t<I, pair<T1, T2>>&& get(pair<T1, T2>&& p) noexcept;
template<size_t I, class T1, class T2>
constexpr const tuple_element_t<I, pair<T1, T2>>&& get(const pair<T1, T2>&& p) noexcept;
```

- 3 *Returns:* If  $I == 0$  returns a reference to p.first; if  $I == 1$  returns a reference to p.second; otherwise the program is ill-formed.

```
template<class T1, class T2>
constexpr T1& get(pair<T1, T2>& p) noexcept;
template<class T1, class T2>
constexpr const T1& get(const pair<T1, T2>& p) noexcept;
template<class T1, class T2>
constexpr T1&& get(pair<T1, T2>&& p) noexcept;
template<class T1, class T2>
constexpr const T1&& get(const pair<T1, T2>&& p) noexcept;
```

- 4 *Requires:* T1 and T2 are distinct types. Otherwise, the program is ill-formed.

- 5 *Returns:* A reference to p.first.

```
template<class T2, class T1>
constexpr T2& get(pair<T1, T2>& p) noexcept;
template<class T2, class T1>
constexpr const T2& get(const pair<T1, T2>& p) noexcept;
template<class T2, class T1>
constexpr T2&& get(pair<T1, T2>&& p) noexcept;
template<class T2, class T1>
constexpr const T2&& get(const pair<T1, T2>&& p) noexcept;
```

- 6 *Requires:* T1 and T2 are distinct types. Otherwise, the program is ill-formed.

- 7 *Returns:* A reference to p.second.

#### 24.4.5 Piecewise construction

[pair.piecewise]

```
struct piecewise_construct_t {
 explicit piecewise_construct_t() = default;
};
```

```
inline constexpr piecewise_construct_t piecewise_construct{};
```

- <sup>1</sup> The struct `piecewise_construct_t` is an empty structure type used as a unique type to disambiguate constructor and function overloading. Specifically, `pair` has a constructor with `piecewise_construct_t` as the first argument, immediately followed by two tuple (24.5) arguments used for piecewise construction of the elements of the `pair` object.

## 24.5 Tuples

[tuple]

### 24.5.1 In general

[tuple.general]

- <sup>1</sup> This subclause describes the tuple library that provides a tuple type as the class template `tuple` that can be instantiated with any number of arguments. Each template argument specifies the type of an element in the `tuple`. Consequently, tuples are heterogeneous, fixed-size collections of values. An instantiation of `tuple` with two arguments is similar to an instantiation of `pair` with the same two arguments. See 24.4.

### 24.5.2 Header <tuple> synopsis

[tuple.syn]

```
namespace std {
 // 24.5.3, class template tuple
 template<class... Types>
 class tuple;

 // 24.5.3.4, tuple creation functions
 inline constexpr unspecified ignore;

 template<class... TTypes>
 constexpr tuple<VTTypes...> make_tuple(TTypes&&...);

 template<class... TTypes>
 constexpr tuple<TTypes&&...> forward_as_tuple(TTypes&&...) noexcept;

 template<class... TTypes>
 constexpr tuple<TTypes&...> tie(TTypes&...) noexcept;

 template<class... Tuples>
 constexpr tuple<CTypes...> tuple_cat(Tuples&&...);

 // 24.5.3.5, calling a function with a tuple of arguments
 template<class F, class Tuple>
 constexpr decltype(auto) apply(F&& f, Tuple&& t);

 template<class T, class Tuple>
 constexpr T make_from_tuple(Tuple&& t);

 // 24.5.3.6, tuple helper classes
 template<class T> class tuple_size; // not defined
 template<class T> class tuple_size<const T>;
 template<class T> class tuple_size<volatile T>;
 template<class T> class tuple_size<const volatile T>;

 template<class... Types> class tuple_size<tuple<Types...>>;

 template<size_t I, class T> class tuple_element; // not defined
 template<size_t I, class T> class tuple_element<I, const T>;
 template<size_t I, class T> class tuple_element<I, volatile T>;
 template<size_t I, class T> class tuple_element<I, const volatile T>;

 template<size_t I, class... Types>
 class tuple_element<I, tuple<Types...>>;

 template<size_t I, class T>
 using tuple_element_t = typename tuple_element<I, T>::type;
}
```

```

// 24.5.3.7, element access
template<size_t I, class... Types>
 constexpr tuple_element_t<I, tuple<Types...>& get(tuple<Types...>&) noexcept;
template<size_t I, class... Types>
 constexpr tuple_element_t<I, tuple<Types...>&& get(tuple<Types...>&&) noexcept;
template<size_t I, class... Types>
 constexpr const tuple_element_t<I, tuple<Types...>& get(const tuple<Types...>&) noexcept;
template<size_t I, class... Types>
 constexpr const tuple_element_t<I, tuple<Types...>&& get(const tuple<Types...>&&) noexcept;
template<class T, class... Types>
 constexpr T& get(tuple<Types...>& t) noexcept;
template<class T, class... Types>
 constexpr T&& get(tuple<Types...>&& t) noexcept;
template<class T, class... Types>
 constexpr const T& get(const tuple<Types...>& t) noexcept;
template<class T, class... Types>
 constexpr const T&& get(const tuple<Types...>&& t) noexcept;

// 24.5.3.8, relational operators
template<class... TTypes, class... UTypes>
 constexpr bool operator==(const tuple<TTypes...>&, const tuple<UTypes...>&);
template<class... TTypes, class... UTypes>
 constexpr bool operator!=(const tuple<TTypes...>&, const tuple<UTypes...>&);
template<class... TTypes, class... UTypes>
 constexpr bool operator<(const tuple<TTypes...>&, const tuple<UTypes...>&);
template<class... TTypes, class... UTypes>
 constexpr bool operator>(const tuple<TTypes...>&, const tuple<UTypes...>&);
template<class... TTypes, class... UTypes>
 constexpr bool operator<=(const tuple<TTypes...>&, const tuple<UTypes...>&);
template<class... TTypes, class... UTypes>
 constexpr bool operator>=(const tuple<TTypes...>&, const tuple<UTypes...>&);

// 24.5.3.9, allocator-related traits
template<class... Types, class Alloc>
 struct uses_allocator<tuple<Types...>, Alloc>;

// 24.5.3.10, specialized algorithms
template<class... Types>
 void swap(tuple<Types...>& x, tuple<Types...>& y) noexcept(see below);

// 24.5.3.6, tuple helper classes
template<class T>
 inline constexpr size_t tuple_size_v = tuple_size<T>::value;
}

```

### 24.5.3 Class template tuple

[tuple(tuple)]

```

namespace std {
 template<class... Types>
 class tuple {
 public:
 // 24.5.3.1, tuple construction
 explicit(see below) constexpr tuple();
 explicit(see below) constexpr tuple(const Types&...); // only if sizeof...(Types) >= 1
 template<class... UTypes>
 explicit(see below) constexpr tuple(UTypes&&...); // only if sizeof...(Types) >= 1

 tuple(const tuple&) = default;
 tuple(tuple&&) = default;

 template<class... UTypes>
 explicit(see below) constexpr tuple(const tuple<UTypes...>&);
 template<class... UTypes>
 explicit(see below) constexpr tuple(tuple<UTypes...>&&);
 };
}

```



```

template<class U1, class U2>
 explicit(see below) constexpr tuple(const pair<U1, U2>&); // only if sizeof...(Types) == 2
template<class U1, class U2>
 explicit(see below) constexpr tuple(pair<U1, U2>&&); // only if sizeof...(Types) == 2

// allocator-extended constructors
template<class Alloc>
 tuple(allocator_arg_t, const Alloc& a);
template<class Alloc>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, const Types&...);
template<class Alloc, class... UTypes>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, UTypes&&...);
template<class Alloc>
 tuple(allocator_arg_t, const Alloc& a, const tuple&);
template<class Alloc>
 tuple(allocator_arg_t, const Alloc& a, tuple&&);
template<class Alloc, class... UTypes>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, const tuple<UTypes...>&);
template<class Alloc, class... UTypes>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, tuple<UTypes...>&&);
template<class Alloc, class U1, class U2>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, const pair<U1, U2>&);
template<class Alloc, class U1, class U2>
 explicit(see below) tuple(allocator_arg_t, const Alloc& a, pair<U1, U2>&&);

// 24.5.3.2, tuple assignment
tuple& operator=(const tuple&);
tuple& operator=(tuple&&) noexcept(see below);

template<class... UTypes>
 tuple& operator=(const tuple<UTypes...>&);
template<class... UTypes>
 tuple& operator=(tuple<UTypes...>&&);

template<class U1, class U2>
 tuple& operator=(const pair<U1, U2>&); // only if sizeof...(Types) == 2
template<class U1, class U2>
 tuple& operator=(pair<U1, U2>&&); // only if sizeof...(Types) == 2

// 24.5.3.3, tuple swap
void swap(tuple&) noexcept(see below);
};

template<class... UTypes>
 tuple(UTypes...) -> tuple<UTypes...>;
template<class T1, class T2>
 tuple(pair<T1, T2>) -> tuple<T1, T2>;
template<class Alloc, class... UTypes>
 tuple(allocator_arg_t, Alloc, UTypes...) -> tuple<UTypes...>;
template<class Alloc, class T1, class T2>
 tuple(allocator_arg_t, Alloc, pair<T1, T2>) -> tuple<T1, T2>;
template<class Alloc, class... UTypes>
 tuple(allocator_arg_t, Alloc, tuple<UTypes...>) -> tuple<UTypes...>;
}

```

### 24.5.3.1 Construction

[tuple.cnstr]

- <sup>1</sup> In the descriptions that follow, let  $i$  be in the range  $[0, \text{sizeof} \dots (\text{Types}))$  in order,  $T_i$  be the  $i^{\text{th}}$  type in `Types`, and  $U_i$  be the  $i^{\text{th}}$  type in a template parameter pack named `UTypes`, where indexing is zero-based.
- <sup>2</sup> For each `tuple` constructor, an exception is thrown only if the construction of one of the types in `Types` throws an exception.

3 The defaulted move and copy constructor, respectively, of `tuple` shall be a constexpr function if and only if all required element-wise initializations for copy and move, respectively, would satisfy the requirements for a constexpr function. The defaulted move and copy constructor of `tuple<>` shall be constexpr functions.

4 If `is_trivially_destructible_v<Ti>` is true for all  $T_i$ , then the destructor of `tuple` is trivial.

```
explicit(see below) constexpr tuple();
```

5 *Effects:* Value-initializes each element.

6 *Remarks:* This constructor shall not participate in overload resolution unless `is_default_constructible_v<Ti>` is true for all  $i$ . [*Note:* This behavior can be implemented by a constructor template with default template arguments. — *end note*] The expression inside `explicit` evaluates to true if and only if  $T_i$  is not implicitly default-constructible for at least one  $i$ . [*Note:* This behavior can be implemented with a trait that checks whether a `const Ti&` can be initialized with `{}`. — *end note*]

```
explicit(see below) constexpr tuple(const Types&...);
```

7 *Effects:* Initializes each element with the value of the corresponding parameter.

8 *Remarks:* This constructor shall not participate in overload resolution unless `sizeof...(Types) >= 1` and `is_copy_constructible_v<Ti>` is true for all  $i$ . The expression inside `explicit` is equivalent to:

```
!conjunction_v<is_convertible<const Types&, Types>...>
```

```
template<class... UTypes> explicit(see below) constexpr tuple(UTypes&&... u);
```

9 *Effects:* Initializes the elements in the tuple with the corresponding value in `std::forward<UTypes>(u)`.

10 *Remarks:* This constructor shall not participate in overload resolution unless `sizeof...(Types) == sizeof...(UTypes)` and `sizeof...(Types) >= 1` and `is_constructible_v<Ti, Ui&&>` is true for all  $i$ . The expression inside `explicit` is equivalent to:

```
!conjunction_v<is_convertible<UTypes, Types>...>
```

```
tuple(const tuple& u) = default;
```

11 *Requires:* `is_copy_constructible_v<Ti>` is true for all  $i$ .

12 *Effects:* Initializes each element of `*this` with the corresponding element of `u`.

```
tuple(tuple&& u) = default;
```

13 *Requires:* `is_move_constructible_v<Ti>` is true for all  $i$ .

14 *Effects:* For all  $i$ , initializes the  $i^{\text{th}}$  element of `*this` with `std::forward<Ti>(get< $i$ >(u))`.

```
template<class... UTypes> explicit(see below) constexpr tuple(const tuple<UTypes...>& u);
```

15 *Effects:* Initializes each element of `*this` with the corresponding element of `u`.

16 *Remarks:* This constructor shall not participate in overload resolution unless

(16.1) — `sizeof...(Types) == sizeof...(UTypes)` and

(16.2) — `is_constructible_v<Ti, const Ui&&>` is true for all  $i$ , and

(16.3) — either `sizeof...(Types) != 1`, or (when `Types...` expands to `T` and `UTypes...` expands to `U`) `is_convertible_v<const tuple<U>&, T>`, `is_constructible_v<T, const tuple<U>&>`, and `is_same_v<T, U>` are all false.

The expression inside `explicit` is equivalent to:

```
!conjunction_v<is_convertible<const UTypes&, Types>...>
```

```
template<class... UTypes> explicit(see below) constexpr tuple(tuple<UTypes...>&& u);
```

17 *Effects:* For all  $i$ , initializes the  $i^{\text{th}}$  element of `*this` with `std::forward<Ui>(get< $i$ >(u))`.

18 *Remarks:* This constructor shall not participate in overload resolution unless

(18.1) — `sizeof...(Types) == sizeof...(UTypes)`, and

(18.2) — `is_constructible_v<Ti, Ui&&>` is true for all  $i$ , and

- (18.3) — either `sizeof...(Types) != 1`, or (when `Types...` expands to `T` and `UTypes...` expands to `U`) `is_convertible_v<tuple<U>, T>`, `is_constructible_v<T, tuple<U>>`, and `is_same_v<T, U>` are all false.

The expression inside `explicit` is equivalent to:

```
!conjunction_v<is_convertible<UTypes, Types>...>
```

```
template<class U1, class U2> explicit(see below) constexpr tuple(const pair<U1, U2>& u);
```

19 *Effects:* Initializes the first element with `u.first` and the second element with `u.second`.

20 *Remarks:* This constructor shall not participate in overload resolution unless `sizeof...(Types) == 2`, `is_constructible_v<T0, const U1&>` is true and `is_constructible_v<T1, const U2&>` is true.

21 The expression inside `explicit` is equivalent to:

```
!is_convertible_v<const U1&, T0> || !is_convertible_v<const U2&, T1>
```

```
template<class U1, class U2> explicit(see below) constexpr tuple(pair<U1, U2>&& u);
```

22 *Effects:* Initializes the first element with `std::forward<U1>(u.first)` and the second element with `std::forward<U2>(u.second)`.

23 *Remarks:* This constructor shall not participate in overload resolution unless `sizeof...(Types) == 2`, `is_constructible_v<T0, U1&&>` is true and `is_constructible_v<T1, U2&&>` is true.

24 The expression inside `explicit` is equivalent to:

```
!is_convertible_v<U1, T0> || !is_convertible_v<U2, T1>
```

```
template<class Alloc>
```

```
tuple(allocator_arg_t, const Alloc& a);
```

```
template<class Alloc>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, const Types&...);
```

```
template<class Alloc, class... UTypes>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, UTypes&&...);
```

```
template<class Alloc>
```

```
tuple(allocator_arg_t, const Alloc& a, const tuple&);
```

```
template<class Alloc>
```

```
tuple(allocator_arg_t, const Alloc& a, tuple&&);
```

```
template<class Alloc, class... UTypes>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, const tuple<UTypes...>&);
```

```
template<class Alloc, class... UTypes>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, tuple<UTypes...>&&);
```

```
template<class Alloc, class U1, class U2>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, const pair<U1, U2>&);
```

```
template<class Alloc, class U1, class U2>
```

```
explicit(see below) tuple(allocator_arg_t, const Alloc& a, pair<U1, U2>&&);
```

25 *Requires:* `Alloc` shall satisfy the *Cpp17Allocator* requirements (Table 33).

26 *Effects:* Equivalent to the preceding constructors except that each element is constructed with `uses_allocator` construction (24.10.8.2).

### 24.5.3.2 Assignment

[`tuple.assign`]

- 1 For each `tuple` assignment operator, an exception is thrown only if the assignment of one of the types in `Types` throws an exception. In the function descriptions that follow, let  $i$  be in the range  $[0, \text{sizeof}...(Types))$  in order,  $T_i$  be the  $i^{\text{th}}$  type in `Types`, and  $U_i$  be the  $i^{\text{th}}$  type in a template parameter pack named `UTypes`, where indexing is zero-based.

```
tuple& operator=(const tuple& u);
```

2 *Effects:* Assigns each element of `u` to the corresponding element of `*this`.

3 *Remarks:* This operator shall be defined as deleted unless `is_copy_assignable_v<Ti>` is true for all  $i$ .

4 *Returns:* `*this`.

```
tuple& operator=(tuple&& u) noexcept(see below);
```

5 *Effects:* For all  $i$ , assigns `std::forward<Ti>(get<i>(u))` to `get<i>(*this)`.

6 *Remarks:* This operator shall not participate in overload resolution unless `is_move_assignable_v<Ti>` is `true` for all *i*.

7 *Remarks:* The expression inside `noexcept` is equivalent to the logical AND of the following expressions:

`is_nothrow_move_assignable_v<Ti>`

where  $T_i$  is the  $i^{\text{th}}$  type in `Types`.

8 *Returns:* `*this`.

```
template<class... UTypes> tuple& operator=(const tuple<UTypes...>& u);
```

9 *Effects:* Assigns each element of `u` to the corresponding element of `*this`.

10 *Remarks:* This operator shall not participate in overload resolution unless `sizeof...(Types) == sizeof...(UTypes)` and `is_assignable_v<Ti&, const Ui&>` is true for all *i*.

11 *Returns:* `*this`.

```
template<class... UTypes> tuple& operator=(tuple<UTypes...>&& u);
```

12 *Effects:* For all *i*, assigns `std::forward<Ui>(get<i>(u))` to `get<i>(*this)`.

13 *Remarks:* This operator shall not participate in overload resolution unless `is_assignable_v<Ti&, Ui&&> == true` for all *i* and `sizeof...(Types) == sizeof...(UTypes)`.

14 *Returns:* `*this`.

```
template<class U1, class U2> tuple& operator=(const pair<U1, U2>& u);
```

15 *Effects:* Assigns `u.first` to the first element of `*this` and `u.second` to the second element of `*this`.

16 *Remarks:* This operator shall not participate in overload resolution unless `sizeof...(Types) == 2` and `is_assignable_v<T0&, const U1&>` is true for the first type  $T_0$  in `Types` and `is_assignable_v<T1&, const U2&>` is true for the second type  $T_1$  in `Types`.

17 *Returns:* `*this`.

```
template<class U1, class U2> tuple& operator=(pair<U1, U2>&& u);
```

18 *Effects:* Assigns `std::forward<U1>(u.first)` to the first element of `*this` and `std::forward<U2>(u.second)` to the second element of `*this`.

19 *Remarks:* This operator shall not participate in overload resolution unless `sizeof...(Types) == 2` and `is_assignable_v<T0&, U1&&>` is true for the first type  $T_0$  in `Types` and `is_assignable_v<T1&, U2&&>` is true for the second type  $T_1$  in `Types`.

20 *Returns:* `*this`.

### 24.5.3.3 swap

[tuple.swap]

```
void swap(tuple& rhs) noexcept(see below);
```

1 *Requires:* Each element in `*this` shall be swappable with (20.5.3.2) the corresponding element in `rhs`.

2 *Effects:* Calls `swap` for each element in `*this` and its corresponding element in `rhs`.

3 *Remarks:* The expression inside `noexcept` is equivalent to the logical AND of the following expressions:

`is_nothrow_swappable_v<Ti>`

where  $T_i$  is the  $i^{\text{th}}$  type in `Types`.

4 *Throws:* Nothing unless one of the element-wise `swap` calls throws an exception.

### 24.5.3.4 Tuple creation functions

[tuple.creation]

1 In the function descriptions that follow, the members of a template parameter pack `XTypes` are denoted by `Xi` for *i* in `[0, sizeof...(XTypes))` in order, where indexing is zero-based.

```
template<class... TTypes>
constexpr tuple<VTypes...> make_tuple(TTypes&&... t);
```

2 The pack `VTypes` is defined as follows. Let  $U_i$  be `decay_t<Ti>` for each  $T_i$  in `TTypes`. If  $U_i$  is a specialization of `reference_wrapper`, then  $V_i$  in `VTypes` is `Ui::type&`, otherwise  $V_i$  is  $U_i$ .

3 *Returns:* `tuple<VTypes...>(std::forward<TTypes>(t)...) .`

4 [Example:

```
int i; float j;
make_tuple(1, ref(i), cref(j))
```

creates a tuple of type `tuple<int, int&, const float&>`. — end example]

```
template<class... TTypes>
constexpr tuple<TTypes&&...> forward_as_tuple(TTypes&&... t) noexcept;
```

5 *Effects:* Constructs a tuple of references to the arguments in `t` suitable for forwarding as arguments to a function. Because the result may contain references to temporary variables, a program shall ensure that the return value of this function does not outlive any of its arguments (e.g., the program should typically not store the result in a named variable).

6 *Returns:* `tuple<TTypes&&...>(std::forward<TTypes>(t)...) .`

```
template<class... TTypes>
constexpr tuple<TTypes&...> tie(TTypes&... t) noexcept;
```

7 *Returns:* `tuple<TTypes&...>(t...)`. When an argument in `t` is `ignore`, assigning any value to the corresponding tuple element has no effect.

8 [Example: `tie` functions allow one to create tuples that unpack tuples into variables. `ignore` can be used for elements that are not needed:

```
int i; std::string s;
tie(i, ignore, s) = make_tuple(42, 3.14, "C++");
// i == 42, s == "C++"
```

— end example]

```
template<class... Tuples>
constexpr tuple<CTypes...> tuple_cat(Tuples&&... tpls);
```

9 In the following paragraphs, let  $T_i$  be the  $i^{\text{th}}$  type in `Tuples`,  $U_i$  be `remove_reference_t<T_i>`, and  $tp_i$  be the  $i^{\text{th}}$  parameter in the function parameter pack `tpls`, where all indexing is zero-based.

10 *Requires:* For all  $i$ ,  $U_i$  shall be the type `cvi tuple<Argsi...>`, where `cvi` is the (possibly empty)  $i^{\text{th}}$  *cv-qualifier-seq* and `Argsi` is the template parameter pack representing the element types in  $U_i$ . Let  $A_{ik}$  be the  $k^{\text{th}}$  type in `Argsi`. For all  $A_{ik}$  the following requirements shall be satisfied:

(10.1) — If  $T_i$  is deduced as an lvalue reference type, then `is_constructible_v<Aik, cvi Aik&&> == true`, otherwise

(10.2) — `is_constructible_v<Aik, cvi Aik&&> == true`.

11 *Remarks:* The types in `CTypes` shall be equal to the ordered sequence of the extended types `Args0...`, `Args1...`, ..., `Argsn-1...`, where  $n$  is equal to `sizeof...(Tuples)`. Let  $e_i...$  be the  $i^{\text{th}}$  ordered sequence of tuple elements of the resulting tuple object corresponding to the type sequence `Argsi`.

12 *Returns:* A tuple object constructed by initializing the  $k_i^{\text{th}}$  type element  $e_{ik}$  in  $e_i...$  with

```
get<ki>(std::forward<Tii))
```

for each valid  $k_i$  and each group  $e_i$  in order.

13 [Note: An implementation may support additional types in the template parameter pack `Tuples` that support the tuple-like protocol, such as `pair` and `array`. — end note]

### 24.5.3.5 Calling a function with a tuple of arguments

[tuple.apply]

```
template<class F, class Tuple>
constexpr decltype(auto) apply(F&& f, Tuple&& t);
```

1 *Effects:* Given the exposition-only function:

```
template<class F, class Tuple, size_t... I>
constexpr decltype(auto)
 apply_impl(F&& f, Tuple&& t, index_sequence<I...>) { // exposition only
 return INVOKE(std::forward<F>(f), std::get<I>(std::forward<Tuple>(t))...); // see 24.14.3
 }
```

Equivalent to:

```
return apply_impl(std::forward<F>(f), std::forward<Tuple>(t),
 make_index_sequence<tuple_size_v<remove_reference_t<Tuple>>>{});
```

```
template<class T, class Tuple>
constexpr T make_from_tuple(Tuple&& t);
```

2 *Effects:* Given the exposition-only function:

```
template<class T, class Tuple, size_t... I>
constexpr T make_from_tuple_impl(Tuple&& t, index_sequence<I...>) { // exposition only
 return T(get<I>(std::forward<Tuple>(t))...);
}
```

Equivalent to:

```
return make_from_tuple_impl<T>(
 forward<Tuple>(t),
 make_index_sequence<tuple_size_v<remove_reference_t<Tuple>>>{});
```

[*Note:* The type of T must be supplied as an explicit template parameter, as it cannot be deduced from the argument list. — *end note*]

### 24.5.3.6 Tuple helper classes

[`tuple.helper`]

```
template<class T> struct tuple_size;
```

1 *Remarks:* All specializations of `tuple_size` shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1) with a base characteristic of `integral_constant<size_t, N>` for some N.

```
template<class... Types>
class tuple_size<tuple<Types...>> : public integral_constant<size_t, sizeof...(Types)> { };
```

```
template<size_t I, class... Types>
class tuple_element<I, tuple<Types...>> {
public:
 using type = TI;
};
```

2 *Requires:*  $I < \text{sizeof} \dots (\text{Types})$ . The program is ill-formed if I is out of bounds.

3 *Type:* TI is the type of the I<sup>th</sup> element of Types, where indexing is zero-based.

```
template<class T> class tuple_size<const T>;
template<class T> class tuple_size<volatile T>;
template<class T> class tuple_size<const volatile T>;
```

4 Let TS denote `tuple_size<T>` of the *cv*-unqualified type T. If the expression `TS::value` is well-formed when treated as an unevaluated operand, then each of the three templates shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1) with a base characteristic of

```
integral_constant<size_t, TS::value>
```

Otherwise, they shall have no member `value`.

5 Access checking is performed as if in a context unrelated to TS and T. Only the validity of the immediate context of the expression is considered. [*Note:* The compilation of the expression can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — *end note*]

6 In addition to being available via inclusion of the `<tuple>` header, the three templates are available when either of the headers `<array>` or `<utility>` are included.

```
template<size_t I, class T> class tuple_element<I, const T>;
template<size_t I, class T> class tuple_element<I, volatile T>;
template<size_t I, class T> class tuple_element<I, const volatile T>;
```

7 Let TE denote `tuple_element_t<I, T>` of the *cv*-unqualified type T. Then each of the three templates shall satisfy the *Cpp17TransformationTrait* requirements (24.15.1) with a member typedef `type` that names the following type:

(7.1) — for the first specialization, `add_const_t<TE>`,

(7.2) — for the second specialization, `add_volatile_t<TE>`, and

(7.3) — for the third specialization, `add_cv_t<TE>`.

8 In addition to being available via inclusion of the `<tuple>` header, the three templates are available when either of the headers `<array>` or `<utility>` are included.

### 24.5.3.7 Element access

[tuple.elem]

```
template<size_t I, class... Types>
constexpr tuple_element_t<I, tuple<Types...>&
 get(tuple<Types...>& t) noexcept;
template<size_t I, class... Types>
constexpr tuple_element_t<I, tuple<Types...>&&
 get(tuple<Types...>&& t) noexcept; // Note A
template<size_t I, class... Types>
constexpr const tuple_element_t<I, tuple<Types...>&
 get(const tuple<Types...>& t) noexcept; // Note B
template<size_t I, class... Types>
constexpr const tuple_element_t<I, tuple<Types...>&& get(const tuple<Types...>&& t) noexcept;
```

1 *Requires:* `I < sizeof...(Types)`. The program is ill-formed if `I` is out of bounds.

2 *Returns:* A reference to the  $I^{\text{th}}$  element of `t`, where indexing is zero-based.

3 [Note A: If a `T` in `Types` is some reference type `X&`, the return type is `X&`, not `X&&`. However, if the element type is a non-reference type `T`, the return type is `T&&`. — end note]

4 [Note B: Constness is shallow. If a `T` in `Types` is some reference type `X&`, the return type is `X&`, not `const X&`. However, if the element type is a non-reference type `T`, the return type is `const T&`. This is consistent with how constness is defined to work for member variables of reference type. — end note]

```
template<class T, class... Types>
constexpr T& get(tuple<Types...>& t) noexcept;
template<class T, class... Types>
constexpr T&& get(tuple<Types...>&& t) noexcept;
template<class T, class... Types>
constexpr const T& get(const tuple<Types...>& t) noexcept;
template<class T, class... Types>
constexpr const T&& get(const tuple<Types...>&& t) noexcept;
```

5 *Requires:* The type `T` occurs exactly once in `Types...`. Otherwise, the program is ill-formed.

6 *Returns:* A reference to the element of `t` corresponding to the type `T` in `Types...`

7 [Example:

```
 const tuple<int, const int, double, double> t(1, 2, 3.4, 5.6);
 const int& i1 = get<int>(t); // OK. Not ambiguous. i1 == 1
 const int& i2 = get<const int>(t); // OK. Not ambiguous. i2 == 2
 const double& d = get<double>(t); // ERROR. ill-formed
```

— end example]

8 [Note: The reason `get` is a non-member function is that if this functionality had been provided as a member function, code where the type depended on a template parameter would have required using the `template` keyword. — end note]

### 24.5.3.8 Relational operators

[tuple.rel]

```
template<class... TTypes, class... UTypes>
constexpr bool operator==(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

1 *Requires:* For all `i`, where `0 <= i` and `i < sizeof...(TTypes)`, `get<i>(t) == get<i>(u)` is a valid expression returning a type that is convertible to `bool`. `sizeof...(TTypes) == sizeof...(UTypes)`.

2 *Returns:* `true` if `get<i>(t) == get<i>(u)` for all `i`, otherwise `false`. For any two zero-length tuples `e` and `f`, `e == f` returns `true`.

3 *Effects:* The elementary comparisons are performed in order from the zeroth index upwards. No comparisons or element accesses are performed after the first equality comparison that evaluates to `false`.

```
template<class... TTypes, class... UTypes>
constexpr bool operator!=(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

4 *Returns:* !(t == u).

```
template<class... TTypes, class... UTypes>
constexpr bool operator<(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

5 *Requires:* For all  $i$ , where  $0 \leq i$  and  $i < \text{sizeof...}(TTypes)$ , both  $\text{get}\langle i \rangle(t) < \text{get}\langle i \rangle(u)$  and  $\text{get}\langle i \rangle(u) < \text{get}\langle i \rangle(t)$  are valid expressions returning types that are convertible to `bool`.  $\text{sizeof...}(TTypes) == \text{sizeof...}(UTypes)$ .

6 *Returns:* The result of a lexicographical comparison between `t` and `u`. The result is defined as:  $(\text{bool})(\text{get}\langle 0 \rangle(t) < \text{get}\langle 0 \rangle(u)) \ || \ (!(\text{bool})(\text{get}\langle 0 \rangle(u) < \text{get}\langle 0 \rangle(t)) \ \&\& \ t_{\text{tail}} < u_{\text{tail}})$ , where  $r_{\text{tail}}$  for some tuple `r` is a tuple containing all but the first element of `r`. For any two zero-length tuples `e` and `f`,  $e < f$  returns `false`.

```
template<class... TTypes, class... UTypes>
constexpr bool operator>(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

7 *Returns:* `u < t`.

```
template<class... TTypes, class... UTypes>
constexpr bool operator<=(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

8 *Returns:* !(`u < t`).

```
template<class... TTypes, class... UTypes>
constexpr bool operator>=(const tuple<TTypes...>& t, const tuple<UTypes...>& u);
```

9 *Returns:* !(`t < u`).

10 [Note: The above definitions for comparison functions do not require  $t_{\text{tail}}$  (or  $u_{\text{tail}}$ ) to be constructed. It may not even be possible, as `t` and `u` are not required to be copy constructible. Also, all comparison functions are short circuited; they do not perform element accesses beyond what is required to determine the result of the comparison. — end note]

### 24.5.3.9 Tuple traits

[tuple.traits]

```
template<class... Types, class Alloc>
struct uses_allocator<tuple<Types...>, Alloc> : true_type { };
```

1 *Requires:* `Alloc` shall satisfy the *Cpp17Allocator* requirements (Table 33).

2 [Note: Specialization of this trait informs other library components that `tuple` can be constructed with an allocator, even though it does not have a nested `allocator_type`. — end note]

### 24.5.3.10 Tuple specialized algorithms

[tuple.special]

```
template<class... Types>
void swap(tuple<Types...>& x, tuple<Types...>& y) noexcept(see below);
```

1 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<Ti>` is `true` for all  $i$ , where  $0 \leq i < \text{sizeof...}(Types)$ . The expression inside `noexcept` is equivalent to:

```
noexcept(x.swap(y))
```

2 *Effects:* As if by `x.swap(y)`.

## 24.6 Optional objects

[optional]

### 24.6.1 In general

[optional.general]

1 This subclause describes class template `optional` that represents optional objects. An *optional object* is an object that contains the storage for another object and manages the lifetime of this contained object, if any. The contained object may be initialized after the optional object has been initialized, and may be destroyed before the optional object has been destroyed. The initialization state of the contained object is tracked by the optional object.



## 24.6.2 Header &lt;optional&gt; synopsis

[optional.syn]

```

namespace std {
 // 24.6.3, class template optional
 template<class T>
 class optional;

 // 24.6.4, no-value state indicator
 struct nullopt_t{see below};
 inline constexpr nullopt_t nullopt(unspecified);

 // 24.6.5, class bad_optional_access
 class bad_optional_access;

 // 24.6.6, relational operators
 template<class T, class U>
 constexpr bool operator==(const optional<T>&, const optional<U>&);
 template<class T, class U>
 constexpr bool operator!=(const optional<T>&, const optional<U>&);
 template<class T, class U>
 constexpr bool operator<(const optional<T>&, const optional<U>&);
 template<class T, class U>
 constexpr bool operator>(const optional<T>&, const optional<U>&);
 template<class T, class U>
 constexpr bool operator<=(const optional<T>&, const optional<U>&);
 template<class T, class U>
 constexpr bool operator>=(const optional<T>&, const optional<U>&);

 // 24.6.7, comparison with nullopt
 template<class T> constexpr bool operator==(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator==(nullopt_t, const optional<T>&) noexcept;
 template<class T> constexpr bool operator!=(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator!=(nullopt_t, const optional<T>&) noexcept;
 template<class T> constexpr bool operator<(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator<(nullopt_t, const optional<T>&) noexcept;
 template<class T> constexpr bool operator>(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator>(nullopt_t, const optional<T>&) noexcept;
 template<class T> constexpr bool operator<=(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator<=(nullopt_t, const optional<T>&) noexcept;
 template<class T> constexpr bool operator>=(const optional<T>&, nullopt_t) noexcept;
 template<class T> constexpr bool operator>=(nullopt_t, const optional<T>&) noexcept;

 // 24.6.8, comparison with T
 template<class T, class U> constexpr bool operator==(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator==(const T&, const optional<U>&);
 template<class T, class U> constexpr bool operator!=(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator!=(const T&, const optional<U>&);
 template<class T, class U> constexpr bool operator<(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator<(const T&, const optional<U>&);
 template<class T, class U> constexpr bool operator>(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator>(const T&, const optional<U>&);
 template<class T, class U> constexpr bool operator<=(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator<=(const T&, const optional<U>&);
 template<class T, class U> constexpr bool operator>=(const optional<T>&, const U&);
 template<class T, class U> constexpr bool operator>=(const T&, const optional<U>&);

 // 24.6.9, specialized algorithms
 template<class T>
 void swap(optional<T>&, optional<T>&) noexcept(see below);

 template<class T>
 constexpr optional<see below> make_optional(T&&);
 template<class T, class... Args>
 constexpr optional<T> make_optional(Args&&... args);

```

```

template<class T, class U, class... Args>
 constexpr optional<T> make_optional(initializer_list<U> il, Args&&... args);

// 24.6.10, hash support
template<class T> struct hash;
template<class T> struct hash<optional<T>>;
}

```

### 24.6.3 Class template optional

[optional.optional]

```

namespace std {
 template<class T>
 class optional {
 public:
 using value_type = T;

// 24.6.3.1, constructors
 constexpr optional() noexcept;
 constexpr optional(nullopt_t) noexcept;
 constexpr optional(const optional&);
 constexpr optional(optional&&) noexcept(see below);
 template<class... Args>
 constexpr explicit optional(in_place_t, Args&&...);
 template<class U, class... Args>
 constexpr explicit optional(in_place_t, initializer_list<U>, Args&&...);
 template<class U = T>
 explicit(see below) constexpr optional(U&&);
 template<class U>
 explicit(see below) optional(const optional<U>&);
 template<class U>
 explicit(see below) optional(optional<U>&&);

// 24.6.3.2, destructor
 ~optional();

// 24.6.3.3, assignment
 optional& operator=(nullopt_t) noexcept;
 optional& operator=(const optional&);
 optional& operator=(optional&&) noexcept(see below);
 template<class U = T> optional& operator=(U&&);
 template<class U> optional& operator=(const optional<U>&);
 template<class U> optional& operator=(optional<U>&&);
 template<class... Args> T& emplace(Args&&...);
 template<class U, class... Args> T& emplace(initializer_list<U>, Args&&...);

// 24.6.3.4, swap
 void swap(optional&) noexcept(see below);

// 24.6.3.5, observers
 constexpr const T* operator->() const;
 constexpr T* operator->();
 constexpr const T& operator*() const&
 constexpr T& operator*() &;
 constexpr T&& operator*() &&;
 constexpr const T&& operator*() const&&;
 constexpr explicit operator bool() const noexcept;
 constexpr bool has_value() const noexcept;
 constexpr const T& value() const&;
 constexpr T& value() &;
 constexpr T&& value() &&;
 constexpr const T&& value() const&&;
 template<class U> constexpr T value_or(U&&) const&;
 template<class U> constexpr T value_or(U&&) &&;

```

```

// 24.6.3.6, modifiers
void reset() noexcept;

private:
 T *val; // exposition only
};

template<class T>
 optional(T) -> optional<T>;
}

```

- 1 Any instance of `optional<T>` at any given time either contains a value or does not contain a value. When an instance of `optional<T>` *contains a value*, it means that an object of type `T`, referred to as the optional object's *contained value*, is allocated within the storage of the optional object. Implementations are not permitted to use additional storage, such as dynamic memory, to allocate its contained value. The contained value shall be allocated in a region of the `optional<T>` storage suitably aligned for the type `T`. When an object of type `optional<T>` is contextually converted to `bool`, the conversion returns `true` if the object contains a value; otherwise the conversion returns `false`.
- 2 Member `val` is provided for exposition only. When an `optional<T>` object contains a value, `val` points to the contained value.
- 3 `T` shall be an object type other than `cv in_place_t` or `cv nullopt_t` and shall satisfy the *Cpp17Destructible* requirements (Table 29).

### 24.6.3.1 Constructors

[optional.ctor]

```
constexpr optional() noexcept;
constexpr optional(nullopt_t) noexcept;
```

1 *Ensures:* `*this` does not contain a value.

2 *Remarks:* No contained value is initialized. For every object type `T` these constructors shall be `constexpr` constructors (10.1.5).

```
constexpr optional(const optional& rhs);
```

3 *Effects:* If `rhs` contains a value, initializes the contained value as if direct-non-list-initializing an object of type `T` with the expression `*rhs`.

4 *Ensures:* `bool(rhs) == bool(*this)`.

5 *Throws:* Any exception thrown by the selected constructor of `T`.

6 *Remarks:* This constructor shall be defined as deleted unless `is_copy_constructible_v<T>` is `true`. If `is_trivially_copy_constructible_v<T>` is `true`, this constructor shall be a `constexpr` constructor.

```
constexpr optional(optional&& rhs) noexcept(see below);
```

7 *Effects:* If `rhs` contains a value, initializes the contained value as if direct-non-list-initializing an object of type `T` with the expression `std::move(*rhs)`. `bool(rhs)` is unchanged.

8 *Ensures:* `bool(rhs) == bool(*this)`.

9 *Throws:* Any exception thrown by the selected constructor of `T`.

10 *Remarks:* The expression inside `noexcept` is equivalent to `is_nothrow_move_constructible_v<T>`. This constructor shall not participate in overload resolution unless `is_move_constructible_v<T>` is `true`. If `is_trivially_move_constructible_v<T>` is `true`, this constructor shall be a `constexpr` constructor.

```
template<class... Args> constexpr explicit optional(in_place_t, Args&&... args);
```

11 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type `T` with the arguments `std::forward<Args>(args)...`

12 *Ensures:* `*this` contains a value.

13 *Throws:* Any exception thrown by the selected constructor of `T`.

14 *Remarks:* If T's constructor selected for the initialization is a constexpr constructor, this constructor shall be a constexpr constructor. This constructor shall not participate in overload resolution unless `is_constructible_v<T, Args...>` is true.

```
template<class U, class... Args>
constexpr explicit optional(in_place_t, initializer_list<U> il, Args&&... args);
```

15 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type T with the arguments `il, std::forward<Args>(args)...`

16 *Ensures:* `*this` contains a value.

17 *Throws:* Any exception thrown by the selected constructor of T.

18 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<T, initializer_list<U>&, Args&&...>` is true. If T's constructor selected for the initialization is a constexpr constructor, this constructor shall be a constexpr constructor.

```
template<class U = T> explicit(see below) constexpr optional(U&& v);
```

19 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type T with the expression `std::forward<U>(v)`.

20 *Ensures:* `*this` contains a value.

21 *Throws:* Any exception thrown by the selected constructor of T.

22 *Remarks:* If T's selected constructor is a constexpr constructor, this constructor shall be a constexpr constructor. This constructor shall not participate in overload resolution unless `is_constructible_v<T, U&&>` is true, `is_same_v<remove_cvref_t<U>, in_place_t>` is false, and `is_same_v<remove_cvref_t<U>, optional>` is false. The expression inside `explicit` is equivalent to:

```
!is_convertible_v<U, T>
```

```
template<class U> explicit(see below) optional(const optional<U>& rhs);
```

23 *Effects:* If `rhs` contains a value, initializes the contained value as if direct-non-list-initializing an object of type T with the expression `*rhs`.

24 *Ensures:* `bool(rhs) == bool(*this)`.

25 *Throws:* Any exception thrown by the selected constructor of T.

26 *Remarks:* This constructor shall not participate in overload resolution unless

(26.1) — `is_constructible_v<T, const U&>` is true,

(26.2) — `is_constructible_v<T, optional<U>&>` is false,

(26.3) — `is_constructible_v<T, optional<U>&&>` is false,

(26.4) — `is_constructible_v<T, const optional<U>&>` is false,

(26.5) — `is_constructible_v<T, const optional<U>&&>` is false,

(26.6) — `is_convertible_v<optional<U>&, T>` is false,

(26.7) — `is_convertible_v<optional<U>&&, T>` is false,

(26.8) — `is_convertible_v<const optional<U>&, T>` is false, and

(26.9) — `is_convertible_v<const optional<U>&&, T>` is false.

The expression inside `explicit` is equivalent to:

```
!is_convertible_v<const U&, T>
```

```
template<class U> explicit(see below) optional(optional<U>&& rhs);
```

27 *Effects:* If `rhs` contains a value, initializes the contained value as if direct-non-list-initializing an object of type T with the expression `std::move(*rhs)`. `bool(rhs)` is unchanged.

28 *Ensures:* `bool(rhs) == bool(*this)`.

29 *Throws:* Any exception thrown by the selected constructor of T.

30 *Remarks:* This constructor shall not participate in overload resolution unless

(30.1) — `is_constructible_v<T, U&&>` is true,

- (30.2) — `is_constructible_v<T, optional<U>&>` is false,  
 (30.3) — `is_constructible_v<T, optional<U>&&>` is false,  
 (30.4) — `is_constructible_v<T, const optional<U>&>` is false,  
 (30.5) — `is_constructible_v<T, const optional<U>&&>` is false,  
 (30.6) — `is_convertible_v<optional<U>&, T>` is false,  
 (30.7) — `is_convertible_v<optional<U>&&, T>` is false,  
 (30.8) — `is_convertible_v<const optional<U>&, T>` is false, and  
 (30.9) — `is_convertible_v<const optional<U>&&, T>` is false.

The expression inside `explicit` is equivalent to:

```
!is_convertible_v<U, T>
```

### 24.6.3.2 Destructor

[optional.dtor]

```
~optional();
```

1 *Effects:* If `is_trivially_destructible_v<T> != true` and `*this` contains a value, calls `val->T::~~T()`

2 *Remarks:* If `is_trivially_destructible_v<T>` is true, then this destructor is trivial.

### 24.6.3.3 Assignment

[optional.assign]

```
optional<T>& operator=(nullopt_t) noexcept;
```

1 *Effects:* If `*this` contains a value, calls `val->T::~~T()` to destroy the contained value; otherwise no effect.

2 *Returns:* `*this`.

3 *Ensures:* `*this` does not contain a value.

```
optional<T>& operator=(const optional& rhs);
```

4 *Effects:* See Table 39.

Table 39 — `optional::operator=(const optional&)` effects

|                                     | <b>*this contains a value</b>                                         | <b>*this does not contain a value</b>                                                                                      |
|-------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>rhs contains a value</b>         | assigns <code>*rhs</code> to the contained value                      | initializes the contained value as if direct-non-list-initializing an object of type <code>T</code> with <code>*rhs</code> |
| <b>rhs does not contain a value</b> | destroys the contained value by calling <code>val-&gt;T::~~T()</code> | no effect                                                                                                                  |

5 *Returns:* `*this`.

6 *Ensures:* `bool(rhs) == bool(*this)`.

7 *Remarks:* If any exception is thrown, the result of the expression `bool(*this)` remains unchanged. If an exception is thrown during the call to `T`'s copy constructor, no effect. If an exception is thrown during the call to `T`'s copy assignment, the state of its contained value is as defined by the exception safety guarantee of `T`'s copy assignment. This operator shall be defined as deleted unless `is_copy_constructible_v<T>` is true and `is_copy_assignable_v<T>` is true.

```
optional<T>& operator=(optional&& rhs) noexcept(see below);
```

8 *Effects:* See Table 40. The result of the expression `bool(rhs)` remains unchanged.

9 *Returns:* `*this`.

10 *Ensures:* `bool(rhs) == bool(*this)`.

11 *Remarks:* The expression inside `noexcept` is equivalent to:

Table 40 — `optional::operator=(optional&&)` effects

|                                     | <b>*this contains a value</b>                                        | <b>*this does not contain a value</b>                                                                                    |
|-------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>rhs contains a value</b>         | assigns <code>std::move(*rhs)</code> to the contained value          | initializes the contained value as if direct-non-list-initializing an object of type T with <code>std::move(*rhs)</code> |
| <b>rhs does not contain a value</b> | destroys the contained value by calling <code>val-&gt;T::~T()</code> | no effect                                                                                                                |

```
is_nothrow_move_assignable_v<T> && is_nothrow_move_constructible_v<T>
```

12 If any exception is thrown, the result of the expression `bool(*this)` remains unchanged. If an exception is thrown during the call to T's move constructor, the state of `*rhs.val` is determined by the exception safety guarantee of T's move constructor. If an exception is thrown during the call to T's move assignment, the state of `*val` and `*rhs.val` is determined by the exception safety guarantee of T's move assignment. This operator shall not participate in overload resolution unless `is_move_constructible_v<T>` is true and `is_move_assignable_v<T>` is true.

```
template<class U = T> optional<T>& operator=(U&& v);
```

13 *Effects:* If `*this` contains a value, assigns `std::forward<U>(v)` to the contained value; otherwise initializes the contained value as if direct-non-list-initializing object of type T with `std::forward<U>(v)`.

14 *Returns:* `*this`.

15 *Ensures:* `*this` contains a value.

16 *Remarks:* If any exception is thrown, the result of the expression `bool(*this)` remains unchanged. If an exception is thrown during the call to T's constructor, the state of `v` is determined by the exception safety guarantee of T's constructor. If an exception is thrown during the call to T's assignment, the state of `*val` and `v` is determined by the exception safety guarantee of T's assignment. This function shall not participate in overload resolution unless `is_same_v<remove_cvref_t<U>, optional>` is false, `conjunction_v<is_scalar<T>, is_same<T, decay_t<U>>>` is false, `is_constructible_v<T, U>` is true, and `is_assignable_v<T&, U>` is true.

```
template<class U> optional<T>& operator=(const optional<U>& rhs);
```

17 *Effects:* See Table 41.

Table 41 — `optional::operator=(const optional<U>&)` effects

|                                     | <b>*this contains a value</b>                                        | <b>*this does not contain a value</b>                                                                         |
|-------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>rhs contains a value</b>         | assigns <code>*rhs</code> to the contained value                     | initializes the contained value as if direct-non-list-initializing an object of type T with <code>*rhs</code> |
| <b>rhs does not contain a value</b> | destroys the contained value by calling <code>val-&gt;T::~T()</code> | no effect                                                                                                     |

18 *Returns:* `*this`.

19 *Ensures:* `bool(rhs) == bool(*this)`.

20 *Remarks:* If any exception is thrown, the result of the expression `bool(*this)` remains unchanged. If an exception is thrown during the call to T's constructor, the state of `*rhs.val` is determined by the exception safety guarantee of T's constructor. If an exception is thrown during the call to T's assignment, the state of `*val` and `*rhs.val` is determined by the exception safety guarantee of T's assignment. This function shall not participate in overload resolution unless

(20.1) — `is_constructible_v<T, const U&>` is true,

(20.2) — `is_assignable_v<T&, const U&>` is true,

- (20.3) — `is_constructible_v<T, optional<U>&>` is false,
- (20.4) — `is_constructible_v<T, optional<U>&&>` is false,
- (20.5) — `is_constructible_v<T, const optional<U>&>` is false,
- (20.6) — `is_constructible_v<T, const optional<U>&&>` is false,
- (20.7) — `is_convertible_v<optional<U>&, T>` is false,
- (20.8) — `is_convertible_v<optional<U>&&, T>` is false,
- (20.9) — `is_convertible_v<const optional<U>&, T>` is false,
- (20.10) — `is_convertible_v<const optional<U>&&, T>` is false,
- (20.11) — `is_assignable_v<T&, optional<U>&>` is false,
- (20.12) — `is_assignable_v<T&, optional<U>&&>` is false,
- (20.13) — `is_assignable_v<T&, const optional<U>&>` is false, and
- (20.14) — `is_assignable_v<T&, const optional<U>&&>` is false.

```
template<class U> optional<T>& operator=(optional<U>&& rhs);
```

21 *Effects:* See Table 42. The result of the expression `bool(rhs)` remains unchanged.

Table 42 — `optional::operator=(optional<U>&&)` effects

|                                     | <b>*this contains a value</b>                                         | <b>*this does not contain a value</b>                                                                                                 |
|-------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>rhs contains a value</b>         | assigns <code>std::move(*rhs)</code> to the contained value           | initializes the contained value as if direct-non-list-initializing an object of type <code>T</code> with <code>std::move(*rhs)</code> |
| <b>rhs does not contain a value</b> | destroys the contained value by calling <code>val-&gt;T::~~T()</code> | no effect                                                                                                                             |

22 *Returns:* `*this`.

23 *Ensures:* `bool(rhs) == bool(*this)`.

24 *Remarks:* If any exception is thrown, the result of the expression `bool(*this)` remains unchanged. If an exception is thrown during the call to `T`'s constructor, the state of `*rhs.val` is determined by the exception safety guarantee of `T`'s constructor. If an exception is thrown during the call to `T`'s assignment, the state of `*val` and `*rhs.val` is determined by the exception safety guarantee of `T`'s assignment. This function shall not participate in overload resolution unless

- (24.1) — `is_constructible_v<T, U>` is true,
- (24.2) — `is_assignable_v<T&, U>` is true,
- (24.3) — `is_constructible_v<T, optional<U>&>` is false,
- (24.4) — `is_constructible_v<T, optional<U>&&>` is false,
- (24.5) — `is_constructible_v<T, const optional<U>&>` is false,
- (24.6) — `is_constructible_v<T, const optional<U>&&>` is false,
- (24.7) — `is_convertible_v<optional<U>&, T>` is false,
- (24.8) — `is_convertible_v<optional<U>&&, T>` is false,
- (24.9) — `is_convertible_v<const optional<U>&, T>` is false,
- (24.10) — `is_convertible_v<const optional<U>&&, T>` is false,
- (24.11) — `is_assignable_v<T&, optional<U>&>` is false,
- (24.12) — `is_assignable_v<T&, optional<U>&&>` is false,
- (24.13) — `is_assignable_v<T&, const optional<U>&>` is false, and
- (24.14) — `is_assignable_v<T&, const optional<U>&&>` is false.

```
template<class... Args> T& emplace(Args&&... args);
```

25 *Requires:* `is_constructible_v<T, Args&&...>` is true.

26 *Effects:* Calls `*this = nullptr`. Then initializes the contained value as if direct-non-list-initializing an object of type T with the arguments `std::forward<Args>(args)...`

27 *Ensures:* `*this` contains a value.

28 *Returns:* A reference to the new contained value.

29 *Throws:* Any exception thrown by the selected constructor of T.

30 *Remarks:* If an exception is thrown during the call to T's constructor, `*this` does not contain a value, and the previous `*val` (if any) has been destroyed.

```
template<class U, class... Args> T& emplace(initializer_list<U> il, Args&&... args);
```

31 *Effects:* Calls `*this = nullptr`. Then initializes the contained value as if direct-non-list-initializing an object of type T with the arguments `il, std::forward<Args>(args)...`

32 *Ensures:* `*this` contains a value.

33 *Returns:* A reference to the new contained value.

34 *Throws:* Any exception thrown by the selected constructor of T.

35 *Remarks:* If an exception is thrown during the call to T's constructor, `*this` does not contain a value, and the previous `*val` (if any) has been destroyed. This function shall not participate in overload resolution unless `is_constructible_v<T, initializer_list<U>&, Args&&...>` is true.

#### 24.6.3.4 Swap

[optional.swap]

```
void swap(optional& rhs) noexcept(see below);
```

1 *Requires:* Lvalues of type T shall be swappable and `is_move_constructible_v<T>` is true.

2 *Effects:* See Table 43.

Table 43 — `optional::swap(optional&)` effects

|                                     | <b>*this contains a value</b>                                                                                                                                                                                                                                                                                     | <b>*this does not contain a value</b>                                                                                                                                                                                                                                                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>rhs contains a value</b>         | calls <code>swap&gt;(*this, rhs)</code>                                                                                                                                                                                                                                                                           | initializes the contained value of <code>*this</code> as if direct-non-list-initializing an object of type T with the expression <code>std::move(rhs)</code> , followed by <code>rhs.val-&gt;T::~T()</code> ; postcondition is that <code>*this</code> contains a value and <code>rhs</code> does not contain a value |
| <b>rhs does not contain a value</b> | initializes the contained value of <code>rhs</code> as if direct-non-list-initializing an object of type T with the expression <code>std::move(*this)</code> , followed by <code>val-&gt;T::~T()</code> ; postcondition is that <code>*this</code> does not contain a value and <code>rhs</code> contains a value | no effect                                                                                                                                                                                                                                                                                                             |

3 *Throws:* Any exceptions thrown by the operations in the relevant part of Table 43.

4 *Remarks:* The expression inside `noexcept` is equivalent to:

```
is_nothrow_move_constructible_v<T> && is_nothrow_swappable_v<T>
```



If any exception is thrown, the results of the expressions `bool(*this)` and `bool(rhs)` remain unchanged. If an exception is thrown during the call to function `swap`, the state of `*val` and `*rhs.val` is determined by the exception safety guarantee of `swap` for lvalues of `T`. If an exception is thrown during the call to `T`'s move constructor, the state of `*val` and `*rhs.val` is determined by the exception safety guarantee of `T`'s move constructor.

#### 24.6.3.5 Observers

[optional.observe]

```
constexpr const T* operator->() const;
constexpr T* operator->();
```

1 *Requires:* `*this` contains a value.

2 *Returns:* `val`.

3 *Throws:* Nothing.

4 *Remarks:* These functions shall be constexpr functions.

```
constexpr const T& operator*() const&;
constexpr T& operator*() &;
```

5 *Requires:* `*this` contains a value.

6 *Returns:* `*val`.

7 *Throws:* Nothing.

8 *Remarks:* These functions shall be constexpr functions.

```
constexpr T&& operator*() &&;
constexpr const T&& operator*() const&&;
```

9 *Requires:* `*this` contains a value.

10 *Effects:* Equivalent to: `return std::move(*val);`

```
constexpr explicit operator bool() const noexcept;
```

11 *Returns:* `true` if and only if `*this` contains a value.

12 *Remarks:* This function shall be a constexpr function.

```
constexpr bool has_value() const noexcept;
```

13 *Returns:* `true` if and only if `*this` contains a value.

14 *Remarks:* This function shall be a constexpr function.

```
constexpr const T& value() const&;
constexpr T& value() &;
```

15 *Effects:* Equivalent to:

```
return bool(*this) ? *val : throw bad_optional_access();
```

```
constexpr T&& value() &&;
constexpr const T&& value() const&&;
```

16 *Effects:* Equivalent to:

```
return bool(*this) ? std::move(*val) : throw bad_optional_access();
```

```
template<class U> constexpr T value_or(U&& v) const&;
```

17 *Effects:* Equivalent to:

```
return bool(*this) ? **this : static_cast<T>(std::forward<U>(v));
```

18 *Remarks:* If `is_copy_constructible_v<T> && is_convertible_v<U&&, T>` is false, the program is ill-formed.

```
template<class U> constexpr T value_or(U&& v) &&;
```

19 *Effects:* Equivalent to:

```
return bool(*this) ? std::move(**this) : static_cast<T>(std::forward<U>(v));
```

20 *Remarks:* If `is_move_constructible_v<T> && is_convertible_v<U&&, T>` is false, the program is ill-formed.

### 24.6.3.6 Modifiers [optional.mod]

```
void reset() noexcept;
```

1 *Effects:* If `*this` contains a value, calls `val->T::~~T()` to destroy the contained value; otherwise no effect.

2 *Ensures:* `*this` does not contain a value.

### 24.6.4 No-value state indicator [optional.nullopt]

```
struct nullopt_t{see below};
inline constexpr nullopt_t nullopt(unspecified);
```

1 The struct `nullopt_t` is an empty structure type used as a unique type to indicate the state of not containing a value for optional objects. In particular, `optional<T>` has a constructor with `nullopt_t` as a single argument; this indicates that an optional object not containing a value shall be constructed.

2 Type `nullopt_t` shall not have a default constructor or an initializer-list constructor, and shall not be an aggregate.

### 24.6.5 Class `bad_optional_access` [optional.bad.access]

```
class bad_optional_access : public exception {
public:
 bad_optional_access();
};
```

1 The class `bad_optional_access` defines the type of objects thrown as exceptions to report the situation where an attempt is made to access the value of an optional object that does not contain a value.

```
bad_optional_access();
```

2 *Effects:* Constructs an object of class `bad_optional_access`.

3 *Ensures:* `what()` returns an implementation-defined NTBS.

### 24.6.6 Relational operators [optional.relops]

```
template<class T, class U> constexpr bool operator==(const optional<T>& x, const optional<U>& y);
```

1 *Requires:* The expression `*x == *y` shall be well-formed and its result shall be convertible to `bool`. [Note: T need not be *Cpp17EqualityComparable*. — end note]

2 *Returns:* If `bool(x) != bool(y)`, false; otherwise if `bool(x) == false`, true; otherwise `*x == *y`.

3 *Remarks:* Specializations of this function template for which `*x == *y` is a core constant expression shall be constexpr functions.

```
template<class T, class U> constexpr bool operator!=(const optional<T>& x, const optional<U>& y);
```

4 *Requires:* The expression `*x != *y` shall be well-formed and its result shall be convertible to `bool`.

5 *Returns:* If `bool(x) != bool(y)`, true; otherwise, if `bool(x) == false`, false; otherwise `*x != *y`.

6 *Remarks:* Specializations of this function template for which `*x != *y` is a core constant expression shall be constexpr functions.

```
template<class T, class U> constexpr bool operator<(const optional<T>& x, const optional<U>& y);
```

7 *Requires:* `*x < *y` shall be well-formed and its result shall be convertible to `bool`.

8 *Returns:* If `!y`, false; otherwise, if `!x`, true; otherwise `*x < *y`.

9 *Remarks:* Specializations of this function template for which `*x < *y` is a core constant expression shall be constexpr functions.

```
template<class T, class U> constexpr bool operator>(const optional<T>& x, const optional<U>& y);
```

10 *Requires:* The expression `*x > *y` shall be well-formed and its result shall be convertible to `bool`.

11 *Returns:* If `!x`, false; otherwise, if `!y`, true; otherwise `*x > *y`.

12 *Remarks:* Specializations of this function template for which `*x > *y` is a core constant expression shall be constexpr functions.

```
template<class T, class U> constexpr bool operator<=(const optional<T>& x, const optional<U>& y);
```

13 *Requires:* The expression `*x <= *y` shall be well-formed and its result shall be convertible to `bool`.

14 *Returns:* If `!x`, `true`; otherwise, if `!y`, `false`; otherwise `*x <= *y`.

15 *Remarks:* Specializations of this function template for which `*x <= *y` is a core constant expression shall be constexpr functions.

```
template<class T, class U> constexpr bool operator>=(const optional<T>& x, const optional<U>& y);
```

16 *Requires:* The expression `*x >= *y` shall be well-formed and its result shall be convertible to `bool`.

17 *Returns:* If `!y`, `true`; otherwise, if `!x`, `false`; otherwise `*x >= *y`.

18 *Remarks:* Specializations of this function template for which `*x >= *y` is a core constant expression shall be constexpr functions.

### 24.6.7 Comparison with `nullopt` [optional.nullopts]

```
template<class T> constexpr bool operator==(const optional<T>& x, nullopt_t) noexcept;
template<class T> constexpr bool operator==(nullopt_t, const optional<T>& x) noexcept;
```

1 *Returns:* `!x`.

```
template<class T> constexpr bool operator!=(const optional<T>& x, nullopt_t) noexcept;
template<class T> constexpr bool operator!=(nullopt_t, const optional<T>& x) noexcept;
```

2 *Returns:* `bool(x)`.

```
template<class T> constexpr bool operator<(const optional<T>& x, nullopt_t) noexcept;
```

3 *Returns:* `false`.

```
template<class T> constexpr bool operator<(nullopt_t, const optional<T>& x) noexcept;
```

4 *Returns:* `bool(x)`.

```
template<class T> constexpr bool operator>(const optional<T>& x, nullopt_t) noexcept;
```

5 *Returns:* `bool(x)`.

```
template<class T> constexpr bool operator>(nullopt_t, const optional<T>& x) noexcept;
```

6 *Returns:* `false`.

```
template<class T> constexpr bool operator<=(const optional<T>& x, nullopt_t) noexcept;
```

7 *Returns:* `!x`.

```
template<class T> constexpr bool operator<=(nullopt_t, const optional<T>& x) noexcept;
```

8 *Returns:* `true`.

```
template<class T> constexpr bool operator>=(const optional<T>& x, nullopt_t) noexcept;
```

9 *Returns:* `true`.

```
template<class T> constexpr bool operator>=(nullopt_t, const optional<T>& x) noexcept;
```

10 *Returns:* `!x`.

### 24.6.8 Comparison with `T` [optional.comp\_with\_t]

```
template<class T, class U> constexpr bool operator==(const optional<T>& x, const U& v);
```

1 *Requires:* The expression `*x == v` shall be well-formed and its result shall be convertible to `bool`.  
[Note: `T` need not be `Cpp17EqualityComparable`. — end note]

2 *Effects:* Equivalent to: `return bool(x) ? *x == v : false;`

```

template<class T, class U> constexpr bool operator==(const T& v, const optional<U>& x);
3 Requires: The expression v == *x shall be well-formed and its result shall be convertible to bool.
4 Effects: Equivalent to: return bool(x) ? v == *x : false;

template<class T, class U> constexpr bool operator!=(const optional<T>& x, const U& v);
5 Requires: The expression *x != v shall be well-formed and its result shall be convertible to bool.
6 Effects: Equivalent to: return bool(x) ? *x != v : true;

template<class T, class U> constexpr bool operator!=(const T& v, const optional<U>& x);
7 Requires: The expression v != *x shall be well-formed and its result shall be convertible to bool.
8 Effects: Equivalent to: return bool(x) ? v != *x : true;

template<class T, class U> constexpr bool operator<(const optional<T>& x, const U& v);
9 Requires: The expression *x < v shall be well-formed and its result shall be convertible to bool.
10 Effects: Equivalent to: return bool(x) ? *x < v : true;

template<class T, class U> constexpr bool operator<(const T& v, const optional<U>& x);
11 Requires: The expression v < *x shall be well-formed and its result shall be convertible to bool.
12 Effects: Equivalent to: return bool(x) ? v < *x : false;

template<class T, class U> constexpr bool operator>(const optional<T>& x, const U& v);
13 Requires: The expression *x > v shall be well-formed and its result shall be convertible to bool.
14 Effects: Equivalent to: return bool(x) ? *x > v : false;

template<class T, class U> constexpr bool operator>(const T& v, const optional<U>& x);
15 Requires: The expression v > *x shall be well-formed and its result shall be convertible to bool.
16 Effects: Equivalent to: return bool(x) ? v > *x : true;

template<class T, class U> constexpr bool operator<=(const optional<T>& x, const U& v);
17 Requires: The expression *x <= v shall be well-formed and its result shall be convertible to bool.
18 Effects: Equivalent to: return bool(x) ? *x <= v : true;

template<class T, class U> constexpr bool operator<=(const T& v, const optional<U>& x);
19 Requires: The expression v <= *x shall be well-formed and its result shall be convertible to bool.
20 Effects: Equivalent to: return bool(x) ? v <= *x : false;

template<class T, class U> constexpr bool operator>=(const optional<T>& x, const U& v);
21 Requires: The expression *x >= v shall be well-formed and its result shall be convertible to bool.
22 Effects: Equivalent to: return bool(x) ? *x >= v : false;

template<class T, class U> constexpr bool operator>=(const T& v, const optional<U>& x);
23 Requires: The expression v >= *x shall be well-formed and its result shall be convertible to bool.
24 Effects: Equivalent to: return bool(x) ? v >= *x : true;

```

### 24.6.9 Specialized algorithms

[optional.specalg]

```

template<class T> void swap(optional<T>& x, optional<T>& y) noexcept(noexcept(x.swap(y)));
1 Effects: Calls x.swap(y).
2 Remarks: This function shall not participate in overload resolution unless is_move_constructible_
 v<T> is true and is_swappable_v<T> is true.

template<class T> constexpr optional<decay_t<T>> make_optional(T&& v);
3 Returns: optional<decay_t<T>>(std::forward<T>(v)).

```

```
template<class T, class...Args>
constexpr optional<T> make_optional(Args&&... args);
```

4 *Effects:* Equivalent to: `return optional<T>(in_place, std::forward<Args>(args)...);`

```
template<class T, class U, class... Args>
constexpr optional<T> make_optional(initializer_list<U> il, Args&&... args);
```

5 *Effects:* Equivalent to: `return optional<T>(in_place, il, std::forward<Args>(args)...);`

### 24.6.10 Hash support [optional.hash]

```
template<class T> struct hash<optional<T>>;
```

1 The specialization `hash<optional<T>>` is enabled (24.14.16) if and only if `hash<remove_const_t<T>>` is enabled. When enabled, for an object `o` of type `optional<T>`, if `bool(o) == true`, then `hash<optional<T>>(o)` shall evaluate to the same value as `hash<remove_const_t<T>>(*o)`; otherwise it evaluates to an unspecified value. The member functions are not guaranteed to be `noexcept`.

## 24.7 Variants [variant]

### 24.7.1 In general [variant.general]

1 A variant object holds and manages the lifetime of a value. If the **variant** holds a value, that value's type has to be one of the template argument types given to **variant**. These template arguments are called alternatives.

### 24.7.2 Header <variant> synopsis [variant.syn]

```
namespace std {
 // 24.7.3, class template variant
 template<class... Types>
 class variant;

 // 24.7.4, variant helper classes
 template<class T> struct variant_size; // not defined
 template<class T> struct variant_size<const T>;
 template<class T> struct variant_size<volatile T>;
 template<class T> struct variant_size<const volatile T>;
 template<class T>
 inline constexpr size_t variant_size_v = variant_size<T>::value;

 template<class... Types>
 struct variant_size<variant<Types...>>;

 template<size_t I, class T> struct variant_alternative; // not defined
 template<size_t I, class T> struct variant_alternative<I, const T>;
 template<size_t I, class T> struct variant_alternative<I, volatile T>;
 template<size_t I, class T> struct variant_alternative<I, const volatile T>;
 template<size_t I, class T>
 using variant_alternative_t = typename variant_alternative<I, T>::type;

 template<size_t I, class... Types>
 struct variant_alternative<I, variant<Types...>>;

 inline constexpr size_t variant_npos = -1;

 // 24.7.5, value access
 template<class T, class... Types>
 constexpr bool holds_alternative(const variant<Types...>&) noexcept;

 template<size_t I, class... Types>
 constexpr variant_alternative_t<I, variant<Types...>& get(variant<Types...>&);
 template<size_t I, class... Types>
 constexpr variant_alternative_t<I, variant<Types...>&& get(variant<Types...>&&);
 template<size_t I, class... Types>
 constexpr const variant_alternative_t<I, variant<Types...>& get(const variant<Types...>&);
```

```

template<size_t I, class... Types>
 constexpr const variant_alternative_t<I, variant<Types...>&& get(const variant<Types...>&&);

template<class T, class... Types>
 constexpr T& get(variant<Types...>&);
template<class T, class... Types>
 constexpr T&& get(variant<Types...>&&);
template<class T, class... Types>
 constexpr const T& get(const variant<Types...>&);
template<class T, class... Types>
 constexpr const T&& get(const variant<Types...>&&);

template<size_t I, class... Types>
 constexpr add_pointer_t<variant_alternative_t<I, variant<Types...>>
 get_if(variant<Types...>*) noexcept;
template<size_t I, class... Types>
 constexpr add_pointer_t<const variant_alternative_t<I, variant<Types...>>
 get_if(const variant<Types...>*) noexcept;

template<class T, class... Types>
 constexpr add_pointer_t<T>
 get_if(variant<Types...>*) noexcept;
template<class T, class... Types>
 constexpr add_pointer_t<const T>
 get_if(const variant<Types...>*) noexcept;

// 24.7.6, relational operators
template<class... Types>
 constexpr bool operator==(const variant<Types...>&, const variant<Types...>&);
template<class... Types>
 constexpr bool operator!=(const variant<Types...>&, const variant<Types...>&);
template<class... Types>
 constexpr bool operator<(const variant<Types...>&, const variant<Types...>&);
template<class... Types>
 constexpr bool operator>(const variant<Types...>&, const variant<Types...>&);
template<class... Types>
 constexpr bool operator<=(const variant<Types...>&, const variant<Types...>&);
template<class... Types>
 constexpr bool operator>=(const variant<Types...>&, const variant<Types...>&);

// 24.7.7, visitation
template<class Visitor, class... Variants>
 constexpr see below visit(Visitor&&, Variants&&...);

// 24.7.8, class monostate
struct monostate;

// 24.7.9, monostate relational operators
constexpr bool operator==(monostate, monostate) noexcept;
constexpr bool operator!=(monostate, monostate) noexcept;
constexpr bool operator<(monostate, monostate) noexcept;
constexpr bool operator>(monostate, monostate) noexcept;
constexpr bool operator<=(monostate, monostate) noexcept;
constexpr bool operator>=(monostate, monostate) noexcept;

// 24.7.10, specialized algorithms
template<class... Types>
 void swap(variant<Types...>&, variant<Types...>&) noexcept(see below);

// 24.7.11, class bad_variant_access
class bad_variant_access;

// 24.7.12, hash support
template<class T> struct hash;

```

```

 template<class... Types> struct hash<variant<Types...>>;
 template<> struct hash<monostate>;
}

```

### 24.7.3 Class template variant

[variant.variant]

```

namespace std {
 template<class... Types>
 class variant {
 public:
 // 24.7.3.1, constructors
 constexpr variant() noexcept(see below);
 variant(const variant&);
 variant(variant&&) noexcept(see below);

 template<class T>
 constexpr variant(T&&) noexcept(see below);

 template<class T, class... Args>
 constexpr explicit variant(in_place_type_t<T>, Args&&...);
 template<class T, class U, class... Args>
 constexpr explicit variant(in_place_type_t<T>, initializer_list<U>, Args&&...);

 template<size_t I, class... Args>
 constexpr explicit variant(in_place_index_t<I>, Args&&...);
 template<size_t I, class U, class... Args>
 constexpr explicit variant(in_place_index_t<I>, initializer_list<U>, Args&&...);

 // 24.7.3.2, destructor
 ~variant();

 // 24.7.3.3, assignment
 variant& operator=(const variant&);
 variant& operator=(variant&&) noexcept(see below);

 template<class T> variant& operator=(T&&) noexcept(see below);

 // 24.7.3.4, modifiers
 template<class T, class... Args>
 T& emplace(Args&&...);
 template<class T, class U, class... Args>
 T& emplace(initializer_list<U>, Args&&...);
 template<size_t I, class... Args>
 variant_alternative_t<I, variant<Types...>&& emplace(Args&&...);
 template<size_t I, class U, class... Args>
 variant_alternative_t<I, variant<Types...>&& emplace(initializer_list<U>, Args&&...);

 // 24.7.3.5, value status
 constexpr bool valueless_by_exception() const noexcept;
 constexpr size_t index() const noexcept;

 // 24.7.3.6, swap
 void swap(variant&) noexcept(see below);
 };
}

```

- <sup>1</sup> Any instance of `variant` at any given time either holds a value of one of its alternative types, or it holds no value. When an instance of `variant` holds a value of alternative type `T`, it means that a value of type `T`, referred to as the `variant` object's *contained value*, is allocated within the storage of the `variant` object. Implementations are not permitted to use additional storage, such as dynamic memory, to allocate the contained value. The contained value shall be allocated in a region of the `variant` storage suitably aligned for all types in `Types...` It is implementation-defined whether over-aligned types are supported.
- <sup>2</sup> All types in `Types...` shall be (possibly cv-qualified) object types that are not arrays.
- <sup>3</sup> A program that instantiates the definition of `variant` with no template arguments is ill-formed.

### 24.7.3.1 Constructors [variant.ctor]

1 In the descriptions that follow, let  $i$  be in the range  $[0, \text{sizeof} \dots (\text{Types}))$ , and  $T_i$  be the  $i^{\text{th}}$  type in  $\text{Types} \dots$ .

```
constexpr variant() noexcept(see below);
```

2 *Effects:* Constructs a `variant` holding a value-initialized value of type  $T_0$ .

3 *Ensures:* `valueless_by_exception()` is false and `index()` is 0.

4 *Throws:* Any exception thrown by the value-initialization of  $T_0$ .

5 *Remarks:* This function shall be `constexpr` if and only if the value-initialization of the alternative type  $T_0$  would satisfy the requirements for a `constexpr` function. The expression inside `noexcept` is equivalent to `is_nothrow_default_constructible_v<T0>`. This function shall not participate in overload resolution unless `is_default_constructible_v<T0>` is true. [Note: See also class `monostate`. — end note]

```
variant(const variant& w);
```

6 *Effects:* If `w` holds a value, initializes the `variant` to hold the same alternative as `w` and direct-initializes the contained value with `get<j>(w)`, where  $j$  is `w.index()`. Otherwise, initializes the `variant` to not hold a value.

7 *Throws:* Any exception thrown by direct-initializing any  $T_i$  for all  $i$ .

8 *Remarks:* This constructor shall be defined as deleted unless `is_copy_constructible_v<Ti>` is true for all  $i$ .

```
variant(variant&& w) noexcept(see below);
```

9 *Effects:* If `w` holds a value, initializes the `variant` to hold the same alternative as `w` and direct-initializes the contained value with `get<j>(std::move(w))`, where  $j$  is `w.index()`. Otherwise, initializes the `variant` to not hold a value.

10 *Throws:* Any exception thrown by move-constructing any  $T_i$  for all  $i$ .

11 *Remarks:* The expression inside `noexcept` is equivalent to the logical AND of `is_nothrow_move_constructible_v<Ti>` for all  $i$ . This function shall not participate in overload resolution unless `is_move_constructible_v<Ti>` is true for all  $i$ .

```
template<class T> constexpr variant(T&& t) noexcept(see below);
```

12 Let  $T_j$  be a type that is determined as follows: build an imaginary function  $FUN(T_i)$  for each alternative type  $T_i$ . The overload  $FUN(T_j)$  selected by overload resolution for the expression  $FUN(\text{std}::\text{forward}<T>(t))$  defines the alternative  $T_j$  which is the type of the contained value after construction.

13 *Effects:* Initializes `*this` to hold the alternative type  $T_j$  and direct-initializes the contained value as if direct-non-list-initializing it with `std::forward<T>(t)`.

14 *Ensures:* `holds_alternative<Tj>(*this)` is true.

15 *Throws:* Any exception thrown by the initialization of the selected alternative  $T_j$ .

16 *Remarks:* This function shall not participate in overload resolution unless

(16.1) — `sizeof... (Types)` is nonzero,

(16.2) — `is_same_v<remove_cvref_t<T>, variant>` is false,

(16.3) — `remove_cvref_t<T>` is neither a specialization of `in_place_type_t` nor a specialization of `in_place_index_t`,

(16.4) — `is_constructible_v<Tj, T>` is true, and

(16.5) — the expression  $FUN(\text{std}::\text{forward}<T>(t))$  (with  $FUN$  being the above-mentioned set of imaginary functions) is well-formed.

17 [Note:

```
variant<string, string> v("abc");
```

is ill-formed, as both alternative types have an equally viable constructor for the argument. — end note]



18 The expression inside `noexcept` is equivalent to `is_nothrow_constructible_v<Tj, T>`. If `Tj`'s selected constructor is a `constexpr` constructor, this constructor shall be a `constexpr` constructor.

```
template<class T, class... Args> constexpr explicit variant(in_place_type_t<T>, Args&&... args);
```

19 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type `T` with the arguments `std::forward<Args>(args)`....

20 *Ensures:* `holds_alternative<T>(*this)` is true.

21 *Throws:* Any exception thrown by calling the selected constructor of `T`.

22 *Remarks:* This function shall not participate in overload resolution unless there is exactly one occurrence of `T` in `Types...` and `is_constructible_v<T, Args...>` is true. If `T`'s selected constructor is a `constexpr` constructor, this constructor shall be a `constexpr` constructor.

```
template<class T, class U, class... Args>
constexpr explicit variant(in_place_type_t<T>, initializer_list<U> il, Args&&... args);
```

23 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type `T` with the arguments `il`, `std::forward<Args>(args)`....

24 *Ensures:* `holds_alternative<T>(*this)` is true.

25 *Throws:* Any exception thrown by calling the selected constructor of `T`.

26 *Remarks:* This function shall not participate in overload resolution unless there is exactly one occurrence of `T` in `Types...` and `is_constructible_v<T, initializer_list<U>&, Args...>` is true. If `T`'s selected constructor is a `constexpr` constructor, this constructor shall be a `constexpr` constructor.

```
template<size_t I, class... Args> constexpr explicit variant(in_place_index_t<I>, Args&&... args);
```

27 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type `TI` with the arguments `std::forward<Args>(args)`....

28 *Ensures:* `index()` is `I`.

29 *Throws:* Any exception thrown by calling the selected constructor of `TI`.

30 *Remarks:* This function shall not participate in overload resolution unless

(30.1) — `I` is less than `sizeof...(Types)` and

(30.2) — `is_constructible_v<TI, Args...>` is true.

If `TI`'s selected constructor is a `constexpr` constructor, this constructor shall be a `constexpr` constructor.

```
template<size_t I, class U, class... Args>
constexpr explicit variant(in_place_index_t<I>, initializer_list<U> il, Args&&... args);
```

31 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type `TI` with the arguments `il`, `std::forward<Args>(args)`....

32 *Ensures:* `index()` is `I`.

33 *Remarks:* This function shall not participate in overload resolution unless

(33.1) — `I` is less than `sizeof...(Types)` and

(33.2) — `is_constructible_v<TI, initializer_list<U>&, Args...>` is true.

If `TI`'s selected constructor is a `constexpr` constructor, this constructor shall be a `constexpr` constructor.

### 24.7.3.2 Destructor

[variant.dtor]

```
~variant();
```

1 *Effects:* If `valueless_by_exception()` is false, destroys the currently contained value.

2 *Remarks:* If `is_trivially_destructible_v<Ti>` is true for all `Ti`, then this destructor is trivial.

### 24.7.3.3 Assignment

[variant.assign]

```
variant& operator=(const variant& rhs);
```

1 Let `j` be `rhs.index()`.

2 *Effects:*

- (2.1) — If neither `*this` nor `rhs` holds a value, there is no effect.
- (2.2) — Otherwise, if `*this` holds a value but `rhs` does not, destroys the value contained in `*this` and sets `*this` to not hold a value.
- (2.3) — Otherwise, if `index() == j`, assigns the value contained in `rhs` to the value contained in `*this`.
- (2.4) — Otherwise, if either `is_nothrow_copy_constructible_v<Tj>` is true or `is_nothrow_move_constructible_v<Tj>` is false, equivalent to `emplace<j>(get<j>(rhs))`.
- (2.5) — Otherwise, equivalent to `operator=(variant(rhs))`.

3 *Returns:* `*this`.

4 *Ensures:* `index() == rhs.index()`.

5 *Remarks:* This operator shall be defined as deleted unless `is_copy_constructible_v<Ti>` && `is_copy_assignable_v<Ti>` is true for all  $i$ .

```
variant& operator=(variant&& rhs) noexcept(see below);
```

6 Let  $j$  be `rhs.index()`.

7 *Effects:*

- (7.1) — If neither `*this` nor `rhs` holds a value, there is no effect.
- (7.2) — Otherwise, if `*this` holds a value but `rhs` does not, destroys the value contained in `*this` and sets `*this` to not hold a value.
- (7.3) — Otherwise, if `index() == j`, assigns `get<j>(std::move(rhs))` to the value contained in `*this`.
- (7.4) — Otherwise, equivalent to `emplace<j>(get<j>(std::move(rhs)))`.

8 *Returns:* `*this`.

9 *Remarks:* This function shall not participate in overload resolution unless `is_move_constructible_v<Ti>` && `is_move_assignable_v<Ti>` is true for all  $i$ . The expression inside `noexcept` is equivalent to: `is_nothrow_move_constructible_v<Ti>` && `is_nothrow_move_assignable_v<Ti>` for all  $i$ .

- (9.1) — If an exception is thrown during the call to  $T_j$ 's move construction (with  $j$  being `rhs.index()`), the `variant` will hold no value.
- (9.2) — If an exception is thrown during the call to  $T_j$ 's move assignment, the state of the contained value is as defined by the exception safety guarantee of  $T_j$ 's move assignment; `index()` will be  $j$ .

```
template<class T> variant& operator=(T&& t) noexcept(see below);
```

10 Let  $T_j$  be a type that is determined as follows: build an imaginary function  $FUN(T_i)$  for each alternative type  $T_i$ . The overload  $FUN(T_j)$  selected by overload resolution for the expression  $FUN(std::forward<T>(t))$  defines the alternative  $T_j$  which is the type of the contained value after assignment.

11 *Effects:*

- (11.1) — If `*this` holds a  $T_j$ , assigns `std::forward<T>(t)` to the value contained in `*this`.
- (11.2) — Otherwise, if `is_nothrow_constructible_v<Tj, T>` || `!is_nothrow_move_constructible_v<Tj>` is true, equivalent to `emplace<j>(std::forward<T>(t))`.
- (11.3) — Otherwise, equivalent to `operator=(variant(std::forward<T>(t)))`.

12 *Ensures:* `holds_alternative<Tj>(*this)` is true, with  $T_j$  selected by the imaginary function overload resolution described above.

13 *Returns:* `*this`.

14 *Remarks:* This function shall not participate in overload resolution unless

- (14.1) — `is_same_v<remove_cvref_t<T>, variant>` is false,
- (14.2) — `is_assignable_v<Tj&, T>` && `is_constructible_v<Tj, T>` is true, and
- (14.3) — the expression  $FUN(std::forward<T>(t))$  (with  $FUN$  being the above-mentioned set of imaginary functions) is well-formed.

15 [Note:

```
variant<string, string> v;
v = "abc";
```

is ill-formed, as both alternative types have an equally viable constructor for the argument. — *end note*

16 The expression inside `noexcept` is equivalent to:

```
is_nothrow_assignable_v<Tj&, T> && is_nothrow_constructible_v<Tj, T>
```

(16.1) — If an exception is thrown during the assignment of `std::forward<T>(t)` to the value contained in `*this`, the state of the contained value and `t` are as defined by the exception safety guarantee of the assignment expression; `valueless_by_exception()` will be `false`.

(16.2) — If an exception is thrown during the initialization of the contained value, the `variant` object might not hold a value.

#### 24.7.3.4 Modifiers

[variant.mod]

```
template<class T, class... Args> T& emplace(Args&&... args);
```

1 Let  $I$  be the zero-based index of `T` in `Types`....

2 *Effects:* Equivalent to: `return emplace<I>(std::forward<Args>(args)...) ;`

3 *Remarks:* This function shall not participate in overload resolution unless `is_constructible_v<T, Args...>` is true, and `T` occurs exactly once in `Types`....

```
template<class T, class U, class... Args> T& emplace(initializer_list<U> il, Args&&... args);
```

4 Let  $I$  be the zero-based index of `T` in `Types`....

5 *Effects:* Equivalent to: `return emplace<I>(il, std::forward<Args>(args)...) ;`

6 *Remarks:* This function shall not participate in overload resolution unless `is_constructible_v<T, initializer_list<U>&, Args...>` is true, and `T` occurs exactly once in `Types`....

```
template<size_t I, class... Args>
variant_alternative_t<I, variant<Types...>& emplace(Args&&... args);
```

7 *Requires:* `I < sizeof...(Types)`.

8 *Effects:* Destroys the currently contained value if `valueless_by_exception()` is `false`. Then initializes the contained value as if direct-non-list-initializing a value of type `TI` with the arguments `std::forward<Args>(args)`....

9 *Ensures:* `index()` is `I`.

10 *Returns:* A reference to the new contained value.

11 *Throws:* Any exception thrown during the initialization of the contained value.

12 *Remarks:* This function shall not participate in overload resolution unless `is_constructible_v<TI, Args...>` is true. If an exception is thrown during the initialization of the contained value, the `variant` might not hold a value.

```
template<size_t I, class U, class... Args>
variant_alternative_t<I, variant<Types...>& emplace(initializer_list<U> il, Args&&... args);
```

13 *Requires:* `I < sizeof...(Types)`.

14 *Effects:* Destroys the currently contained value if `valueless_by_exception()` is `false`. Then initializes the contained value as if direct-non-list-initializing a value of type `TI` with the arguments `il, std::forward<Args>(args)`....

15 *Ensures:* `index()` is `I`.

16 *Returns:* A reference to the new contained value.

17 *Throws:* Any exception thrown during the initialization of the contained value.

18 *Remarks:* This function shall not participate in overload resolution unless `is_constructible_v<TI, initializer_list<U>&, Args...>` is true. If an exception is thrown during the initialization of the contained value, the `variant` might not hold a value.

## 24.7.3.5 Value status

[variant.status]

```
constexpr bool valueless_by_exception() const noexcept;
```

1 *Effects:* Returns `false` if and only if the `variant` holds a value.

2 [Note: A `variant` might not hold a value if an exception is thrown during a type-changing assignment or emplacement. The latter means that even a `variant<float, int>` can become `valueless_by_exception()`, for instance by

```
struct S { operator int() { throw 42; } };
variant<float, int> v{12.f};
v.emplace<1>(S());
— end note]
```

```
constexpr size_t index() const noexcept;
```

3 *Effects:* If `valueless_by_exception()` is `true`, returns `variant_npos`. Otherwise, returns the zero-based index of the alternative of the contained value.

## 24.7.3.6 Swap

[variant.swap]

```
void swap(variant& rhs) noexcept(see below);
```

1 *Requires:* Lvalues of type  $T_i$  shall be swappable (20.5.3.2) and `is_move_constructible_v<Ti>` shall be `true` for all  $i$ .

2 *Effects:*

(2.1) — If `valueless_by_exception() && rhs.valueless_by_exception()` no effect.

(2.2) — Otherwise, if `index() == rhs.index()`, calls `swap(get<i>(*this), get<i>(rhs))` where  $i$  is `index()`.

(2.3) — Otherwise, exchanges values of `rhs` and `*this`.

3 *Throws:* If `index() == rhs.index()`, any exception thrown by `swap(get<i>(*this), get<i>(rhs))` with  $i$  being `index()`. Otherwise, any exception thrown by the move constructor of  $T_i$  or  $T_j$  with  $i$  being `index()` and  $j$  being `rhs.index()`.

4 *Remarks:* If an exception is thrown during the call to function `swap(get<i>(*this), get<i>(rhs))`, the states of the contained values of `*this` and of `rhs` are determined by the exception safety guarantee of `swap` for lvalues of  $T_i$  with  $i$  being `index()`. If an exception is thrown during the exchange of the values of `*this` and `rhs`, the states of the values of `*this` and of `rhs` are determined by the exception safety guarantee of `variant`'s move constructor. The expression inside `noexcept` is equivalent to the logical AND of `is_nothrow_move_constructible_v<Ti> && is_nothrow_swappable_v<Ti>` for all  $i$ .

## 24.7.4 variant helper classes

[variant.helper]

```
template<class T> struct variant_size;
```

1 *Remarks:* All specializations of `variant_size` shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1) with a base characteristic of `integral_constant<size_t, N>` for some  $N$ .

```
template<class T> class variant_size<const T>;
template<class T> class variant_size<volatile T>;
template<class T> class variant_size<const volatile T>;
```

2 Let `VS` denote `variant_size<T>` of the cv-qualified type  $T$ . Then each of the three templates shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1) with a base characteristic of `integral_constant<size_t, VS::value>`.

```
template<class... Types>
struct variant_size<variant<Types...>> : integral_constant<size_t, sizeof...(Types)> { };
```

```
template<size_t I, class T> class variant_alternative<I, const T>;
template<size_t I, class T> class variant_alternative<I, volatile T>;
```

```
template<size_t I, class T> class variant_alternative<I, const volatile T>;
```

- 3 Let VA denote `variant_alternative<I, T>` of the cv-unqualified type T. Then each of the three templates shall meet the *Cpp17TransformationTrait* requirements (24.15.1) with a member typedef type that names the following type:

- (3.1) — for the first specialization, `add_const_t<VA::type>`,  
 (3.2) — for the second specialization, `add_volatile_t<VA::type>`, and  
 (3.3) — for the third specialization, `add_cv_t<VA::type>`.

```
variant_alternative<I, variant<Types...>>::type
```

- 4 *Requires:* `I < sizeof...(Types)`. The program is ill-formed if I is out of bounds.

- 5 *Value:* The type  $T_I$ .

## 24.7.5 Value access

[variant.get]

```
template<class T, class... Types>
constexpr bool holds_alternative(const variant<Types...>& v) noexcept;
```

- 1 *Requires:* The type T occurs exactly once in `Types...`. Otherwise, the program is ill-formed.

- 2 *Returns:* `true` if `index()` is equal to the zero-based index of T in `Types...`

```
template<size_t I, class... Types>
constexpr variant_alternative_t<I, variant<Types...>& get(variant<Types...>& v);
template<size_t I, class... Types>
constexpr variant_alternative_t<I, variant<Types...>&& get(variant<Types...>&& v);
template<size_t I, class... Types>
constexpr const variant_alternative_t<I, variant<Types...>& get(const variant<Types...>& v);
template<size_t I, class... Types>
constexpr const variant_alternative_t<I, variant<Types...>&& get(const variant<Types...>&& v);
```

- 3 *Requires:* `I < sizeof...(Types)`. Otherwise, the program is ill-formed.

- 4 *Effects:* If `v.index()` is I, returns a reference to the object stored in the `variant`. Otherwise, throws an exception of type `bad_variant_access`.

```
template<class T, class... Types> constexpr T& get(variant<Types...>& v);
template<class T, class... Types> constexpr T&& get(variant<Types...>&& v);
template<class T, class... Types> constexpr const T& get(const variant<Types...>& v);
template<class T, class... Types> constexpr const T&& get(const variant<Types...>&& v);
```

- 5 *Requires:* The type T occurs exactly once in `Types...`. Otherwise, the program is ill-formed.

- 6 *Effects:* If `v` holds a value of type T, returns a reference to that value. Otherwise, throws an exception of type `bad_variant_access`.

```
template<size_t I, class... Types>
constexpr add_pointer_t<variant_alternative_t<I, variant<Types...>>>
get_if(variant<Types...>* v) noexcept;
template<size_t I, class... Types>
constexpr add_pointer_t<const variant_alternative_t<I, variant<Types...>>>
get_if(const variant<Types...>* v) noexcept;
```

- 7 *Requires:* `I < sizeof...(Types)`. Otherwise, the program is ill-formed.

- 8 *Returns:* A pointer to the value stored in the `variant`, if `v != nullptr` and `v->index() == I`. Otherwise, returns `nullptr`.

```
template<class T, class... Types>
constexpr add_pointer_t<T>
get_if(variant<Types...>* v) noexcept;
template<class T, class... Types>
constexpr add_pointer_t<const T>
get_if(const variant<Types...>* v) noexcept;
```

- 9 *Requires:* The type T occurs exactly once in `Types...`. Otherwise, the program is ill-formed.

- 10 *Effects:* Equivalent to: `return get_if<i>(v);` with *i* being the zero-based index of T in `Types...`

## 24.7.6 Relational operators

[variant.relops]

```
template<class... Types>
```

```
constexpr bool operator==(const variant<Types...>& v, const variant<Types...>& w);
```

1 *Requires:* `get<i>(v) == get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

2 *Returns:* If `v.index() != w.index()`, `false`; otherwise if `v.valueless_by_exception()`, `true`; otherwise `get<i>(v) == get<i>(w)` with  $i$  being `v.index()`.

```
template<class... Types>
```

```
constexpr bool operator!=(const variant<Types...>& v, const variant<Types...>& w);
```

3 *Requires:* `get<i>(v) != get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

4 *Returns:* If `v.index() != w.index()`, `true`; otherwise if `v.valueless_by_exception()`, `false`; otherwise `get<i>(v) != get<i>(w)` with  $i$  being `v.index()`.

```
template<class... Types>
```

```
constexpr bool operator<(const variant<Types...>& v, const variant<Types...>& w);
```

5 *Requires:* `get<i>(v) < get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

6 *Returns:* If `w.valueless_by_exception()`, `false`; otherwise if `v.valueless_by_exception()`, `true`; otherwise, if `v.index() < w.index()`, `true`; otherwise if `v.index() > w.index()`, `false`; otherwise `get<i>(v) < get<i>(w)` with  $i$  being `v.index()`.

```
template<class... Types>
```

```
constexpr bool operator>(const variant<Types...>& v, const variant<Types...>& w);
```

7 *Requires:* `get<i>(v) > get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

8 *Returns:* If `v.valueless_by_exception()`, `false`; otherwise if `w.valueless_by_exception()`, `true`; otherwise, if `v.index() > w.index()`, `true`; otherwise if `v.index() < w.index()`, `false`; otherwise `get<i>(v) > get<i>(w)` with  $i$  being `v.index()`.

```
template<class... Types>
```

```
constexpr bool operator<=(const variant<Types...>& v, const variant<Types...>& w);
```

9 *Requires:* `get<i>(v) <= get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

10 *Returns:* If `v.valueless_by_exception()`, `true`; otherwise if `w.valueless_by_exception()`, `false`; otherwise, if `v.index() < w.index()`, `true`; otherwise if `v.index() > w.index()`, `false`; otherwise `get<i>(v) <= get<i>(w)` with  $i$  being `v.index()`.

```
template<class... Types>
```

```
constexpr bool operator>=(const variant<Types...>& v, const variant<Types...>& w);
```

11 *Requires:* `get<i>(v) >= get<i>(w)` is a valid expression returning a type that is convertible to `bool`, for all  $i$ .

12 *Returns:* If `w.valueless_by_exception()`, `true`; otherwise if `v.valueless_by_exception()`, `false`; otherwise, if `v.index() > w.index()`, `true`; otherwise if `v.index() < w.index()`, `false`; otherwise `get<i>(v) >= get<i>(w)` with  $i$  being `v.index()`.

## 24.7.7 Visitation

[variant.visit]

```
template<class Visitor, class... Variants>
```

```
constexpr see below visit(Visitor&& vis, Variants&&... vars);
```

1 Let  $n$  be `sizeof... (Variants)`. Let  $m$  be a pack of  $n$  values of type `size_t`. Such a pack is called valid if  $0 \leq m_i < \text{variant\_size\_v}<\text{remove\_reference\_t}<\text{Variants}_i>>$  for all  $0 \leq i < n$ . For each valid pack  $m$ , let  $e(m)$  denote the expression:

```
INVOKE(std::forward<Visitor>(vis), get<m>(std::forward<Variants>(vars))...) // see 24.14.3
```

2 *Requires:* For each valid pack  $m$ ,  $e(m)$  shall be a valid expression. All such expressions shall be of the same type and value category; otherwise, the program is ill-formed.

3 *Returns:*  $e(m)$ , where  $m$  is the pack for which  $m_i$  is `varsi.index()` for all  $0 \leq i < n$ . The return type is `decltype(e(m))`.

4 *Throws:* `bad_variant_access` if any `variant` in `vars` is `valueless_by_exception()`.

5 *Complexity:* For  $n \leq 1$ , the invocation of the callable object is implemented in constant time, i.e., for  $n = 1$ , it does not depend on the number of alternative types of `Variants0`. For  $n > 1$ , the invocation of the callable object has no complexity requirements.

### 24.7.8 Class `monostate` [variant.monostate]

```
struct monostate{};
```

1 The class `monostate` can serve as a first alternative type for a `variant` to make the `variant` type default constructible.

### 24.7.9 `monostate` relational operators [variant.monostate.relops]

```
constexpr bool operator==(monostate, monostate) noexcept { return true; }
constexpr bool operator!=(monostate, monostate) noexcept { return false; }
constexpr bool operator<(monostate, monostate) noexcept { return false; }
constexpr bool operator>(monostate, monostate) noexcept { return false; }
constexpr bool operator<=(monostate, monostate) noexcept { return true; }
constexpr bool operator>=(monostate, monostate) noexcept { return true; }
```

1 [Note: `monostate` objects have only a single state; they thus always compare equal. — end note]

### 24.7.10 Specialized algorithms [variant.specalg]

```
template<class... Types>
void swap(variant<Types...& v, variant<Types...& w) noexcept(see below);
```

1 *Effects:* Equivalent to `v.swap(w)`.

2 *Remarks:* This function shall not participate in overload resolution unless `is_move_constructible_v<Ti> && is_swappable_v<Ti>` is true for all  $i$ . The expression inside `noexcept` is equivalent to `noexcept(v.swap(w))`.

### 24.7.11 Class `bad_variant_access` [variant.bad.access]

```
class bad_variant_access : public exception {
public:
 bad_variant_access() noexcept;
 const char* what() const noexcept override;
};
```

1 Objects of type `bad_variant_access` are thrown to report invalid accesses to the value of a `variant` object.

```
bad_variant_access() noexcept;
```

2 Constructs a `bad_variant_access` object.

```
const char* what() const noexcept override;
```

3 *Returns:* An implementation-defined NTBS.

### 24.7.12 Hash support [variant.hash]

```
template<class... Types> struct hash<variant<Types...>>;
```

1 The specialization `hash<variant<Types...>>` is enabled (24.14.16) if and only if every specialization in `hash<remove_const_t<Types>>...` is enabled. The member functions are not guaranteed to be `noexcept`.

```
template<> struct hash<monostate>;
```

2 The specialization is enabled (24.14.16).

## 24.8 Storage for any type [any]

- <sup>1</sup> This subclause describes components that C++ programs may use to perform operations on objects of a discriminated type.
- <sup>2</sup> [*Note*: The discriminated type may contain values of different types but does not attempt conversion between them, i.e., 5 is held strictly as an `int` and is not implicitly convertible either to "5" or to 5.0. This indifference to interpretation but awareness of type effectively allows safe, generic containers of single values, with no scope for surprises from ambiguous conversions. — *end note*]

### 24.8.1 Header `<any>` synopsis [any.synop]

```
namespace std {
 // 24.8.2, class bad_any_cast
 class bad_any_cast;

 // 24.8.3, class any
 class any;

 // 24.8.4, non-member functions
 void swap(any& x, any& y) noexcept;

 template<class T, class... Args>
 any make_any(Args&& ...args);
 template<class T, class U, class... Args>
 any make_any(initializer_list<U> il, Args&& ...args);

 template<class T>
 T any_cast(const any& operand);
 template<class T>
 T any_cast(any& operand);
 template<class T>
 T any_cast(any&& operand);

 template<class T>
 const T* any_cast(const any* operand) noexcept;
 template<class T>
 T* any_cast(any* operand) noexcept;
}
```

### 24.8.2 Class `bad_any_cast` [any.bad\_any\_cast]

```
class bad_any_cast : public bad_cast {
public:
 const char* what() const noexcept override;
};
```

- <sup>1</sup> Objects of type `bad_any_cast` are thrown by a failed `any_cast` (24.8.4).

```
const char* what() const noexcept override;
```

- <sup>2</sup> *Returns*: An implementation-defined NTBS.

- <sup>3</sup> *Remarks*: The message may be a null-terminated multibyte string (20.4.2.1.5.2), suitable for conversion and display as a `wstring` (25.3, 26.4.1.4).

### 24.8.3 Class `any` [any.class]

```
namespace std {
 class any {
public:
 // 24.8.3.1, construction and destruction
 constexpr any() noexcept;

 any(const any& other);
 any(any&& other) noexcept;
```



```

template<class T>
 any(T&& value);

template<class T, class... Args>
 explicit any(in_place_type_t<T>, Args&&...);
template<class T, class U, class... Args>
 explicit any(in_place_type_t<T>, initializer_list<U>, Args&&...);

~any();

// 24.8.3.2, assignments
any& operator=(const any& rhs);
any& operator=(any&& rhs) noexcept;

template<class T>
 any& operator=(T&& rhs);

// 24.8.3.3, modifiers
template<class T, class... Args>
 decay_t<T>& emplace(Args&& ...);
template<class T, class U, class... Args>
 decay_t<T>& emplace(initializer_list<U>, Args&&...);
void reset() noexcept;
void swap(any& rhs) noexcept;

// 24.8.3.4, observers
bool has_value() const noexcept;
const type_info& type() const noexcept;
};
}

```

- 1 An object of class `any` stores an instance of any type that satisfies the constructor requirements or it has no value, and this is referred to as the *state* of the class `any` object. The stored instance is called the *contained value*. Two states are equivalent if either they both have no value, or both have a value and the contained values are equivalent.
- 2 The non-member `any_cast` functions provide type-safe access to the contained value.
- 3 Implementations should avoid the use of dynamically allocated memory for a small contained value. However, any such small-object optimization shall only be applied to types `T` for which `is_nothrow_move_constructible_v<T>` is `true`. [*Example*: A contained value of type `int` could be stored in an internal buffer, not in separately-allocated memory. — *end example*]

### 24.8.3.1 Construction and destruction

[**any.cons**]

```
constexpr any() noexcept;
```

- 1 *Ensures*: `has_value()` is `false`.

```
any(const any& other);
```

- 2 *Effects*: If `other.has_value()` is `false`, constructs an object that has no value. Otherwise, equivalent to `any(in_place_type<T>, any_cast<const T&>(other))` where `T` is the type of the contained value.
- 3 *Throws*: Any exceptions arising from calling the selected constructor for the contained value.

```
any(any&& other) noexcept;
```

- 4 *Effects*: If `other.has_value()` is `false`, constructs an object that has no value. Otherwise, constructs an object of type `any` that contains either the contained value of `other`, or contains an object of the same type constructed from the contained value of `other` considering that contained value as an rvalue.

- 5 *Ensures*: `other` is left in a valid but otherwise unspecified state.

```
template<class T>
 any(T&& value);
```

- 6 Let `VT` be `decay_t<T>`.

7 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.  
 8 *Effects:* Constructs an object of type any that contains an object of type VT direct-initialized with  
 std::forward<T>(value).  
 9 *Remarks:* This constructor shall not participate in overload resolution unless VT is not the same type  
 as any, VT is not a specialization of in\_place\_type\_t, and is\_copy\_constructible\_v<VT> is true.  
 10 *Throws:* Any exception thrown by the selected constructor of VT.

```
template<class T, class... Args>
 explicit any(in_place_type_t<T>, Args&&... args);
```

11 Let VT be decay\_t<T>.  
 12 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.  
 13 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type VT with the  
 arguments std::forward<Args>(args)....  
 14 *Ensures:* \*this contains a value of type VT.  
 15 *Throws:* Any exception thrown by the selected constructor of VT.  
 16 *Remarks:* This constructor shall not participate in overload resolution unless is\_copy\_constructible\_  
 v<VT> is true and is\_constructible\_v<VT, Args...> is true.

```
template<class T, class U, class... Args>
 explicit any(in_place_type_t<T>, initializer_list<U> il, Args&&... args);
```

17 Let VT be decay\_t<T>.  
 18 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.  
 19 *Effects:* Initializes the contained value as if direct-non-list-initializing an object of type VT with the  
 arguments il, std::forward<Args>(args)....  
 20 *Ensures:* \*this contains a value.  
 21 *Throws:* Any exception thrown by the selected constructor of VT.  
 22 *Remarks:* This constructor shall not participate in overload resolution unless is\_copy\_constructible\_  
 v<VT> is true and is\_constructible\_v<VT, initializer\_list<U>&, Args...> is true.

```
~any();
```

23 *Effects:* As if by reset().

### 24.8.3.2 Assignment

[any.assign]

```
any& operator=(const any& rhs);
```

1 *Effects:* As if by any(rhs).swap(\*this). No effects if an exception is thrown.  
 2 *Returns:* \*this.  
 3 *Throws:* Any exceptions arising from the copy constructor for the contained value.

```
any& operator=(any&& rhs) noexcept;
```

4 *Effects:* As if by any(std::move(rhs)).swap(\*this).  
 5 *Returns:* \*this.  
 6 *Ensures:* The state of \*this is equivalent to the original state of rhs and rhs is left in a valid but  
 otherwise unspecified state.

```
template<class T>
 any& operator=(T&& rhs);
```

7 Let VT be decay\_t<T>.  
 8 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.  
 9 *Effects:* Constructs an object tmp of type any that contains an object of type VT direct-initialized with  
 std::forward<T>(rhs), and tmp.swap(\*this). No effects if an exception is thrown.  
 10 *Returns:* \*this.

11 *Remarks:* This operator shall not participate in overload resolution unless VT is not the same type as any and `is_copy_constructible_v<VT>` is true.

12 *Throws:* Any exception thrown by the selected constructor of VT.

### 24.8.3.3 Modifiers

[any.modifiers]

```
template<class T, class... Args>
decay_t<T>& emplace(Args&&... args);
```

1 Let VT be `decay_t<T>`.

2 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.

3 *Effects:* Calls `reset()`. Then initializes the contained value as if direct-non-list-initializing an object of type VT with the arguments `std::forward<Args>(args)...`

4 *Ensures:* `*this` contains a value.

5 *Returns:* A reference to the new contained value.

6 *Throws:* Any exception thrown by the selected constructor of VT.

7 *Remarks:* If an exception is thrown during the call to VT's constructor, `*this` does not contain a value, and any previously contained value has been destroyed. This function shall not participate in overload resolution unless `is_copy_constructible_v<VT>` is true and `is_constructible_v<VT, Args...>` is true.

```
template<class T, class U, class... Args>
decay_t<T>& emplace(initializer_list<U> il, Args&&... args);
```

8 Let VT be `decay_t<T>`.

9 *Requires:* VT shall satisfy the *Cpp17CopyConstructible* requirements.

10 *Effects:* Calls `reset()`. Then initializes the contained value as if direct-non-list-initializing an object of type VT with the arguments `il, std::forward<Args>(args)...`

11 *Ensures:* `*this` contains a value.

12 *Returns:* A reference to the new contained value.

13 *Throws:* Any exception thrown by the selected constructor of VT.

14 *Remarks:* If an exception is thrown during the call to VT's constructor, `*this` does not contain a value, and any previously contained value has been destroyed. The function shall not participate in overload resolution unless `is_copy_constructible_v<VT>` is true and `is_constructible_v<VT, initializer_list<U>&, Args...>` is true.

```
void reset() noexcept;
```

15 *Effects:* If `has_value()` is true, destroys the contained value.

16 *Ensures:* `has_value()` is false.

```
void swap(any& rhs) noexcept;
```

17 *Effects:* Exchanges the states of `*this` and `rhs`.

### 24.8.3.4 Observers

[any.observers]

```
bool has_value() const noexcept;
```

1 *Returns:* true if `*this` contains an object, otherwise false.

```
const type_info& type() const noexcept;
```

2 *Returns:* `typeid(T)` if `*this` has a contained value of type T, otherwise `typeid(void)`.

3 [Note: Useful for querying against types known either at compile time or only at runtime. — end note]

### 24.8.4 Non-member functions

[any.nonmembers]

```
void swap(any& x, any& y) noexcept;
```

1 *Effects:* As if by `x.swap(y)`.

```
template<class T, class... Args>
 any make_any(Args&& ...args);
```

2     *Effects:* Equivalent to: return any(in\_place\_type<T>, std::forward<Args>(args)...);

```
template<class T, class U, class... Args>
 any make_any(initializer_list<U> il, Args&& ...args);
```

3     *Effects:* Equivalent to: return any(in\_place\_type<T>, il, std::forward<Args>(args)...);

```
template<class T>
 T any_cast(const any& operand);
template<class T>
 T any_cast(any& operand);
template<class T>
 T any_cast(any&& operand);
```

4     Let U be the type remove\_cvref\_t<T>.

5     *Requires:* For the first overload, is\_constructible\_v<T, const U&> is true. For the second overload, is\_constructible\_v<T, U&> is true. For the third overload, is\_constructible\_v<T, U> is true. Otherwise the program is ill-formed.

6     *Returns:* For the first and second overload, static\_cast<T>(\*any\_cast<U>(&operand)). For the third overload, static\_cast<T>(std::move(\*any\_cast<U>(&operand))).

7     *Throws:* bad\_any\_cast if operand.type() != typeid(remove\_reference\_t<T>).

8     [*Example:*

```
 any x(5); // x holds int
 assert(any_cast<int>(x) == 5); // cast to value
 any_cast<int&&>(x) = 10; // cast to reference
 assert(any_cast<int>(x) == 10);

 x = "Meow"; // x holds const char*
 assert(strcmp(any_cast<const char*>(x), "Meow") == 0);
 any_cast<const char*&>(x) = "Harry";
 assert(strcmp(any_cast<const char*>(x), "Harry") == 0);

 x = string("Meow"); // x holds string
 string s, s2("Jane");
 s = move(any_cast<string&>(x)); // move from any
 assert(s == "Meow");
 any_cast<string&>(x) = move(s2); // move to any
 assert(any_cast<const string&>(x) == "Jane");

 string cat("Meow");
 const any y(cat); // const y holds string
 assert(any_cast<const string&>(y) == cat);

 any_cast<string&>(y); // error; cannot
 // any_cast away const
```

— end example]

```
template<class T>
 const T* any_cast(const any* operand) noexcept;
template<class T>
 T* any_cast(any* operand) noexcept;
```

9     *Returns:* If operand != nullptr && operand->type() == typeid(T), a pointer to the object contained by operand; otherwise, nullptr.

10    [*Example:*

```
 bool is_string(const any& operand) {
 return any_cast<string>(&operand) != nullptr;
 }
```

— end example]

## 24.9 Bitsets

[bitset]

### 24.9.1 Header <bitset> synopsis

[bitset.syn]

```
#include <string>
#include <iosfwd> // for istream (31.7.1), ostream (31.7.2), see 31.3.1

namespace std {
 template<size_t N> class bitset;

 // 24.9.4, bitset operators
 template<size_t N>
 bitset<N> operator&(const bitset<N>&, const bitset<N>&) noexcept;
 template<size_t N>
 bitset<N> operator|(const bitset<N>&, const bitset<N>&) noexcept;
 template<size_t N>
 bitset<N> operator^(const bitset<N>&, const bitset<N>&) noexcept;
 template<class charT, class traits, size_t N>
 basic_istream<charT, traits>&
 operator>>(basic_istream<charT, traits>& is, bitset<N>& x);
 template<class charT, class traits, size_t N>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const bitset<N>& x);
}

```

- <sup>1</sup> The header <bitset> defines a class template and several related functions for representing and manipulating fixed-size sequences of bits.

### 24.9.2 Class template bitset

[template.bitset]

```
namespace std {
 template<size_t N> class bitset {
 public:
 // bit reference
 class reference {
 friend class bitset;
 reference() noexcept;

 public:
 reference(const reference&) = default;
 ~reference();
 reference& operator=(bool x) noexcept; // for b[i] = x;
 reference& operator=(const reference&) noexcept; // for b[i] = b[j];
 bool operator~() const noexcept; // flips the bit
 operator bool() const noexcept; // for x = b[i];
 reference& flip() noexcept; // for b[i].flip();
 };

 // 24.9.2.1, constructors
 constexpr bitset() noexcept;
 constexpr bitset(unsigned long long val) noexcept;
 template<class charT, class traits, class Allocator>
 explicit bitset(
 const basic_string<charT, traits, Allocator>& str,
 typename basic_string<charT, traits, Allocator>::size_type pos = 0,
 typename basic_string<charT, traits, Allocator>::size_type n
 = basic_string<charT, traits, Allocator>::npos,
 charT zero = charT('0'),
 charT one = charT('1'));
 template<class charT>
 explicit bitset(
 const charT* str,
 typename basic_string<charT>::size_type n = basic_string<charT>::npos,
 charT zero = charT('0'),
 charT one = charT('1'));
}

```

```

// 24.9.2.2, bitset operations
bitset<N>& operator&=(const bitset<N>& rhs) noexcept;
bitset<N>& operator|=(const bitset<N>& rhs) noexcept;
bitset<N>& operator^=(const bitset<N>& rhs) noexcept;
bitset<N>& operator<<=(size_t pos) noexcept;
bitset<N>& operator>>=(size_t pos) noexcept;
bitset<N>& set() noexcept;
bitset<N>& set(size_t pos, bool val = true);
bitset<N>& reset() noexcept;
bitset<N>& reset(size_t pos);
bitset<N> operator~() const noexcept;
bitset<N>& flip() noexcept;
bitset<N>& flip(size_t pos);

// element access
constexpr bool operator[](size_t pos) const; // for b[i];
reference operator[](size_t pos); // for b[i];

unsigned long to_ulong() const;
unsigned long long to_ullong() const;
template<class charT = char,
 class traits = char_traits<charT>,
 class Allocator = allocator<charT>>
 basic_string<charT, traits, Allocator>
 to_string(charT zero = charT('0'), charT one = charT('1')) const;

size_t count() const noexcept;
constexpr size_t size() const noexcept;
bool operator==(const bitset<N>& rhs) const noexcept;
bool operator!=(const bitset<N>& rhs) const noexcept;
bool test(size_t pos) const;
bool all() const noexcept;
bool any() const noexcept;
bool none() const noexcept;
bitset<N> operator<<(size_t pos) const noexcept;
bitset<N> operator>>(size_t pos) const noexcept;
};

// 24.9.3, hash support
template<class T> struct hash;
template<size_t N> struct hash<bitset<N>>;
}

```

- 1 The class template `bitset<N>` describes an object that can store a sequence consisting of a fixed number of bits, `N`.
- 2 Each bit represents either the value zero (reset) or one (set). To *toggle* a bit is to change the value zero to one, or the value one to zero. Each bit has a non-negative position `pos`. When converting between an object of class `bitset<N>` and a value of some integral type, bit position `pos` corresponds to the *bit value* `1 << pos`. The integral value corresponding to two or more bits is the sum of their bit values.
- 3 The functions described in this subclause can report three kinds of errors, each associated with a distinct exception:
  - (3.1) — an *invalid-argument* error is associated with exceptions of type `invalid_argument` (23.2.4);
  - (3.2) — an *out-of-range* error is associated with exceptions of type `out_of_range` (23.2.6);
  - (3.3) — an *overflow* error is associated with exceptions of type `overflow_error` (23.2.9).

#### 24.9.2.1 bitset constructors

[bitset.cons]

```
constexpr bitset() noexcept;
```

- 1 *Effects:* Constructs an object of class `bitset<N>`, initializing all bits to zero.

```
constexpr bitset(unsigned long long val) noexcept;
```

- 2 *Effects:* Constructs an object of class `bitset<N>`, initializing the first `M` bit positions to the corresponding bit values in `val`. `M` is the smaller of `N` and the number of bits in the value representation (6.7) of unsigned long long. If `M < N`, the remaining bit positions are initialized to zero.

```
template<class charT, class traits, class Allocator>
explicit bitset(
 const basic_string<charT, traits, Allocator>& str,
 typename basic_string<charT, traits, Allocator>::size_type pos = 0,
 typename basic_string<charT, traits, Allocator>::size_type n
 = basic_string<charT, traits, Allocator>::npos,
 charT zero = charT('0'),
 charT one = charT('1'));
```

- 3 *Throws:* `out_of_range` if `pos > str.size()` or `invalid_argument` if an invalid character is found (see below).

- 4 *Effects:* Determines the effective length `rlen` of the initializing string as the smaller of `n` and `str.size() - pos`.

The function then throws `invalid_argument` if any of the `rlen` characters in `str` beginning at position `pos` is other than `zero` or `one`. The function uses `traits::eq()` to compare the character values.

Otherwise, the function constructs an object of class `bitset<N>`, initializing the first `M` bit positions to values determined from the corresponding characters in the string `str`. `M` is the smaller of `N` and `rlen`.

- 5 An element of the constructed object has value zero if the corresponding character in `str`, beginning at position `pos`, is zero. Otherwise, the element has the value one. Character position `pos + M - 1` corresponds to bit position zero. Subsequent decreasing character positions correspond to increasing bit positions.

- 6 If `M < N`, remaining bit positions are initialized to zero.

```
template<class charT>
explicit bitset(
 const charT* str,
 typename basic_string<charT>::size_type n = basic_string<charT>::npos,
 charT zero = charT('0'),
 charT one = charT('1'));
```

- 7 *Effects:* Constructs an object of class `bitset<N>` as if by:

```
 bitset(n == basic_string<charT>::npos
 ? basic_string<charT>(str)
 : basic_string<charT>(str, n),
 0, n, zero, one)
```

### 24.9.2.2 bitset members

[bitset.members]

```
bitset<N>& operator&=(const bitset<N>& rhs) noexcept;
```

- 1 *Effects:* Clears each bit in `*this` for which the corresponding bit in `rhs` is clear, and leaves all other bits unchanged.

- 2 *Returns:* `*this`.

```
bitset<N>& operator|=(const bitset<N>& rhs) noexcept;
```

- 3 *Effects:* Sets each bit in `*this` for which the corresponding bit in `rhs` is set, and leaves all other bits unchanged.

- 4 *Returns:* `*this`.

```
bitset<N>& operator^=(const bitset<N>& rhs) noexcept;
```

- 5 *Effects:* Toggles each bit in `*this` for which the corresponding bit in `rhs` is set, and leaves all other bits unchanged.

- 6 *Returns:* `*this`.

`bitset<N>& operator<<=(size_t pos) noexcept;`

7       *Effects:* Replaces each bit at position `I` in `*this` with a value determined as follows:

(7.1)     — If `I < pos`, the new value is zero;

(7.2)     — If `I >= pos`, the new value is the previous value of the bit at position `I - pos`.

8       *Returns:* `*this`.

`bitset<N>& operator>>=(size_t pos) noexcept;`

9       *Effects:* Replaces each bit at position `I` in `*this` with a value determined as follows:

(9.1)     — If `pos >= N - I`, the new value is zero;

(9.2)     — If `pos < N - I`, the new value is the previous value of the bit at position `I + pos`.

10       *Returns:* `*this`.

`bitset<N>& set() noexcept;`

11       *Effects:* Sets all bits in `*this`.

12       *Returns:* `*this`.

`bitset<N>& set(size_t pos, bool val = true);`

13       *Throws:* `out_of_range` if `pos` does not correspond to a valid bit position.

14       *Effects:* Stores a new value in the bit at position `pos` in `*this`. If `val` is `true`, the stored value is one, otherwise it is zero.

15       *Returns:* `*this`.

`bitset<N>& reset() noexcept;`

16       *Effects:* Resets all bits in `*this`.

17       *Returns:* `*this`.

`bitset<N>& reset(size_t pos);`

18       *Throws:* `out_of_range` if `pos` does not correspond to a valid bit position.

19       *Effects:* Resets the bit at position `pos` in `*this`.

20       *Returns:* `*this`.

`bitset<N> operator~() const noexcept;`

21       *Effects:* Constructs an object `x` of class `bitset<N>` and initializes it with `*this`.

22       *Returns:* `x.flip()`.

`bitset<N>& flip() noexcept;`

23       *Effects:* Toggles all bits in `*this`.

24       *Returns:* `*this`.

`bitset<N>& flip(size_t pos);`

25       *Throws:* `out_of_range` if `pos` does not correspond to a valid bit position.

26       *Effects:* Toggles the bit at position `pos` in `*this`.

27       *Returns:* `*this`.

`unsigned long to_ulong() const;`

28       *Throws:* `overflow_error` if the integral value `x` corresponding to the bits in `*this` cannot be represented as type `unsigned long`.

29       *Returns:* `x`.

`unsigned long long to_ullong() const;`

30       *Throws:* `overflow_error` if the integral value `x` corresponding to the bits in `*this` cannot be represented as type `unsigned long long`.



31 *Returns:* *x*.

```
template<class charT = char,
 class traits = char_traits<charT>,
 class Allocator = allocator<charT>>
basic_string<charT, traits, Allocator>
to_string(charT zero = charT('0'), charT one = charT('1')) const;
```

32 *Effects:* Constructs a string object of the appropriate type and initializes it to a string of length *N* characters. Each character is determined by the value of its corresponding bit position in *\*this*. Character position *N* - 1 corresponds to bit position zero. Subsequent decreasing character positions correspond to increasing bit positions. Bit value zero becomes the character **zero**, bit value one becomes the character **one**.

33 *Returns:* The created object.

```
size_t count() const noexcept;
```

34 *Returns:* A count of the number of bits set in *\*this*.

```
constexpr size_t size() const noexcept;
```

35 *Returns:* *N*.

```
bool operator==(const bitset<N>& rhs) const noexcept;
```

36 *Returns:* true if the value of each bit in *\*this* equals the value of the corresponding bit in *rhs*.

```
bool operator!=(const bitset<N>& rhs) const noexcept;
```

37 *Returns:* true if *!(\*this == rhs)*.

```
bool test(size_t pos) const;
```

38 *Throws:* *out\_of\_range* if *pos* does not correspond to a valid bit position.

39 *Returns:* true if the bit at position *pos* in *\*this* has the value one.

```
bool all() const noexcept;
```

40 *Returns:* *count() == size()*.

```
bool any() const noexcept;
```

41 *Returns:* *count() != 0*.

```
bool none() const noexcept;
```

42 *Returns:* *count() == 0*.

```
bitset<N> operator<<(size_t pos) const noexcept;
```

43 *Returns:* *bitset<N>(\*this) <<= pos*.

```
bitset<N> operator>>(size_t pos) const noexcept;
```

44 *Returns:* *bitset<N>(\*this) >>= pos*.

```
constexpr bool operator[](size_t pos) const;
```

45 *Requires:* *pos* shall be valid.

46 *Returns:* true if the bit at position *pos* in *\*this* has the value one, otherwise false.

47 *Throws:* Nothing.

```
bitset<N>::reference operator[](size_t pos);
```

48 *Requires:* *pos* shall be valid.

49 *Returns:* An object of type *bitset<N>::reference* such that *(\*this)[pos] == this->test(pos)*, and such that *(\*this)[pos] = val* is equivalent to *this->set(pos, val)*.

50 *Throws:* Nothing.

51 *Remarks:* For the purpose of determining the presence of a data race (6.8.2), any access or update through the resulting reference potentially accesses or modifies, respectively, the entire underlying bitset.

### 24.9.3 bitset hash support [bitset.hash]

```
template<size_t N> struct hash<bitset<N>>;
```

1 The specialization is enabled (24.14.16).

### 24.9.4 bitset operators [bitset.operators]

```
bitset<N> operator&(const bitset<N>& lhs, const bitset<N>& rhs) noexcept;
```

1 *Returns:* bitset<N>(lhs) &= rhs.

```
bitset<N> operator|(const bitset<N>& lhs, const bitset<N>& rhs) noexcept;
```

2 *Returns:* bitset<N>(lhs) |= rhs.

```
bitset<N> operator^(const bitset<N>& lhs, const bitset<N>& rhs) noexcept;
```

3 *Returns:* bitset<N>(lhs) ^= rhs.

```
template<class charT, class traits, size_t N>
basic_istream<charT, traits>&
operator>>(basic_istream<charT, traits>& is, bitset<N>& x);
```

4 A formatted input function (31.7.4.2).

5 *Effects:* Extracts up to N characters from is. Stores these characters in a temporary object **str** of type `basic_string<charT, traits>`, then evaluates the expression `x = bitset<N>(str)`. Characters are extracted and stored until any of the following occurs:

(5.1) — N characters have been extracted and stored;

(5.2) — end-of-file occurs on the input sequence;

(5.3) — the next input character is neither `is.widen('0')` nor `is.widen('1')` (in which case the input character is not extracted).

6 If no characters are stored in **str**, calls `is.setstate(ios_base::failbit)` (which may throw `ios_base::failure` (31.5.5.4)).

7 *Returns:* is.

```
template<class charT, class traits, size_t N>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const bitset<N>& x);
```

8 *Returns:*

```
os << x.template to_string<charT, traits, allocator<charT>>(
 use_facet<ctype<charT>>(os.getloc()).widen('0'),
 use_facet<ctype<charT>>(os.getloc()).widen('1'))
```

(see 31.7.5.2).

## 24.10 Memory [memory]

### 24.10.1 In general [memory.general]

1 This subclause describes the contents of the header `<memory>` (24.10.2) and some of the contents of the header `<cstdlib>` (21.2.2).

### 24.10.2 Header `<memory>` synopsis [memory.syn]

1 The header `<memory>` defines several types and function templates that describe properties of pointers and pointer-like types, manage memory for containers and other template types, destroy objects, and construct multiple objects in uninitialized memory buffers (24.10.3–24.10.11). The header also defines the templates `unique_ptr`, `shared_ptr`, `weak_ptr`, and various function templates that operate on objects of these types (24.11).

```

namespace std {
 // 24.10.3, pointer traits
 template<class Ptr> struct pointer_traits;
 template<class T> struct pointer_traits<T*>;

 // 24.10.4, pointer conversion
 template<class Ptr>
 auto to_address(const Ptr& p) noexcept;
 template<class T>
 constexpr T* to_address(T* p) noexcept;

 // 24.10.5, pointer safety
 enum class pointer_safety { relaxed, preferred, strict };
 void declare_reachable(void* p);
 template<class T>
 T* undeclare_reachable(T* p);
 void declare_no_pointers(char* p, size_t n);
 void undeclare_no_pointers(char* p, size_t n);
 pointer_safety get_pointer_safety() noexcept;

 // 24.10.6, pointer alignment function
 void* align(size_t alignment, size_t size, void*& ptr, size_t& space);

 // 24.10.7, allocator argument tag
 struct allocator_arg_t { explicit allocator_arg_t() = default; };
 inline constexpr allocator_arg_t allocator_arg{};

 // 24.10.8, uses_allocator
 template<class T, class Alloc> struct uses_allocator;

 // 24.10.9, allocator traits
 template<class Alloc> struct allocator_traits;

 // 24.10.10, the default allocator
 template<class T> class allocator;
 template<class T, class U>
 bool operator==(const allocator<T>&, const allocator<U>&) noexcept;
 template<class T, class U>
 bool operator!=(const allocator<T>&, const allocator<U>&) noexcept;

 // 24.10.11, specialized algorithms
 template<class T>
 constexpr T* addressof(T& r) noexcept;
 template<class T>
 const T* addressof(const T&&) = delete;
 template<class ForwardIterator>
 void uninitialized_default_construct(ForwardIterator first, ForwardIterator last);
 template<class ExecutionPolicy, class ForwardIterator>
 void uninitialized_default_construct(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, ForwardIterator last);
 template<class ForwardIterator, class Size>
 ForwardIterator uninitialized_default_construct_n(ForwardIterator first, Size n);
 template<class ExecutionPolicy, class ForwardIterator, class Size>
 ForwardIterator uninitialized_default_construct_n(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, Size n);
 template<class ForwardIterator>
 void uninitialized_value_construct(ForwardIterator first, ForwardIterator last);
 template<class ExecutionPolicy, class ForwardIterator>
 void uninitialized_value_construct(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, ForwardIterator last);
 template<class ForwardIterator, class Size>
 ForwardIterator uninitialized_value_construct_n(ForwardIterator first, Size n);

```

```

template<class ExecutionPolicy, class ForwardIterator, class Size>
 ForwardIterator uninitialized_value_construct_n(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, Size n);
template<class InputIterator, class ForwardIterator>
 ForwardIterator uninitialized_copy(InputIterator first, InputIterator last,
 ForwardIterator result);
template<class ExecutionPolicy, class InputIterator, class ForwardIterator>
 ForwardIterator uninitialized_copy(ExecutionPolicy&& exec, // see 29.4.5
 InputIterator first, InputIterator last,
 ForwardIterator result);
template<class InputIterator, class Size, class ForwardIterator>
 ForwardIterator uninitialized_copy_n(InputIterator first, Size n,
 ForwardIterator result);
template<class ExecutionPolicy, class InputIterator, class Size, class ForwardIterator>
 ForwardIterator uninitialized_copy_n(ExecutionPolicy&& exec, // see 29.4.5
 InputIterator first, Size n,
 ForwardIterator result);
template<class InputIterator, class ForwardIterator>
 ForwardIterator uninitialized_move(InputIterator first, InputIterator last,
 ForwardIterator result);
template<class ExecutionPolicy, class InputIterator, class ForwardIterator>
 ForwardIterator uninitialized_move(ExecutionPolicy&& exec, // see 29.4.5
 InputIterator first, InputIterator last,
 ForwardIterator result);
template<class InputIterator, class Size, class ForwardIterator>
 pair<InputIterator, ForwardIterator> uninitialized_move_n(InputIterator first, Size n,
 ForwardIterator result);
template<class ExecutionPolicy, class InputIterator, class Size, class ForwardIterator>
 pair<InputIterator, ForwardIterator> uninitialized_move_n(ExecutionPolicy&& exec, // see 29.4.5
 InputIterator first, Size n,
 ForwardIterator result);
template<class ForwardIterator, class T>
 void uninitialized_fill(ForwardIterator first, ForwardIterator last, const T& x);
template<class ExecutionPolicy, class ForwardIterator, class T>
 void uninitialized_fill(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, ForwardIterator last, const T& x);
template<class ForwardIterator, class Size, class T>
 ForwardIterator uninitialized_fill_n(ForwardIterator first, Size n, const T& x);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T>
 ForwardIterator uninitialized_fill_n(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, Size n, const T& x);
template<class T>
 void destroy_at(T* location);
template<class ForwardIterator>
 void destroy(ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
 void destroy(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Size>
 ForwardIterator destroy_n(ForwardIterator first, Size n);
template<class ExecutionPolicy, class ForwardIterator, class Size>
 ForwardIterator destroy_n(ExecutionPolicy&& exec, // see 29.4.5
 ForwardIterator first, Size n);

// 24.11.1, class template unique_ptr
template<class T> struct default_delete;
template<class T> struct default_delete<T[]>;
template<class T, class D = default_delete<T>> class unique_ptr;
template<class T, class D> class unique_ptr<T[], D>;

template<class T, class... Args> unique_ptr<T>
 make_unique(Args&&... args); // T is not array
template<class T> unique_ptr<T>
 make_unique(size_t n); // T is U[]

```

```

template<class T, class... Args>
 unspecified make_unique(Args&&...) = delete; // T is U[N]

template<class T, class D>
 void swap(unique_ptr<T, D>& x, unique_ptr<T, D>& y) noexcept;

template<class T1, class D1, class T2, class D2>
 bool operator==(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
template<class T1, class D1, class T2, class D2>
 bool operator!=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
template<class T1, class D1, class T2, class D2>
 bool operator<(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
template<class T1, class D1, class T2, class D2>
 bool operator>(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
template<class T1, class D1, class T2, class D2>
 bool operator<=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
template<class T1, class D1, class T2, class D2>
 bool operator>=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);

template<class T, class D>
 bool operator==(const unique_ptr<T, D>& x, nullptr_t) noexcept;
template<class T, class D>
 bool operator==(nullptr_t, const unique_ptr<T, D>& y) noexcept;
template<class T, class D>
 bool operator!=(const unique_ptr<T, D>& x, nullptr_t) noexcept;
template<class T, class D>
 bool operator!=(nullptr_t, const unique_ptr<T, D>& y) noexcept;
template<class T, class D>
 bool operator<(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
 bool operator<(nullptr_t, const unique_ptr<T, D>& y);
template<class T, class D>
 bool operator>(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
 bool operator>(nullptr_t, const unique_ptr<T, D>& y);
template<class T, class D>
 bool operator<=(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
 bool operator<=(nullptr_t, const unique_ptr<T, D>& y);
template<class T, class D>
 bool operator>=(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
 bool operator>=(nullptr_t, const unique_ptr<T, D>& y);

template<class E, class T, class Y, class D>
 basic_ostream<E, T>& operator<<(basic_ostream<E, T>& os, const unique_ptr<Y, D>& p);

// 24.11.2, class bad_weak_ptr
class bad_weak_ptr;

// 24.11.3, class template shared_ptr
template<class T> class shared_ptr;

// 24.11.3.6, shared_ptr creation
template<class T, class... Args>
 shared_ptr<T> make_shared(Args&&... args); // T is not array
template<class T, class A, class... Args>
 shared_ptr<T> allocate_shared(const A& a, Args&&... args); // T is not array

template<class T>
 shared_ptr<T> make_shared(size_t N); // T is U[]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a, size_t N); // T is U[]

```

```

template<class T>
 shared_ptr<T> make_shared(); // T is U[N]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a); // T is U[N]

template<class T>
 shared_ptr<T> make_shared(size_t N, const remove_extent_t<T>& u); // T is U[]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a, size_t N,
 const remove_extent_t<T>& u); // T is U[]

template<class T> shared_ptr<T>
 make_shared(const remove_extent_t<T>& u); // T is U[N]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a, const remove_extent_t<T>& u); // T is U[N]

// 24.11.3.7, shared_ptr comparisons
template<class T, class U>
 bool operator==(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;
template<class T, class U>
 bool operator!=(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;
template<class T, class U>
 bool operator<(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;
template<class T, class U>
 bool operator>(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;
template<class T, class U>
 bool operator<=(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;
template<class T, class U>
 bool operator>=(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;

template<class T>
 bool operator==(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator==(nullptr_t, const shared_ptr<T>& y) noexcept;
template<class T>
 bool operator!=(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator!=(nullptr_t, const shared_ptr<T>& y) noexcept;
template<class T>
 bool operator<(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator<(nullptr_t, const shared_ptr<T>& y) noexcept;
template<class T>
 bool operator>(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator>(nullptr_t, const shared_ptr<T>& y) noexcept;
template<class T>
 bool operator<=(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator<=(nullptr_t, const shared_ptr<T>& y) noexcept;
template<class T>
 bool operator>=(const shared_ptr<T>& x, nullptr_t) noexcept;
template<class T>
 bool operator>=(nullptr_t, const shared_ptr<T>& y) noexcept;

// 24.11.3.8, shared_ptr specialized algorithms
template<class T>
 void swap(shared_ptr<T>& a, shared_ptr<T>& b) noexcept;

// 24.11.3.9, shared_ptr casts
template<class T, class U>
 shared_ptr<T> static_pointer_cast(const shared_ptr<U>& r) noexcept;
template<class T, class U>
 shared_ptr<T> dynamic_pointer_cast(const shared_ptr<U>& r) noexcept;

```

```

template<class T, class U>
 shared_ptr<T> const_pointer_cast(const shared_ptr<U>& r) noexcept;
template<class T, class U>
 shared_ptr<T> reinterpret_pointer_cast(const shared_ptr<U>& r) noexcept;

// 24.11.3.10, shared_ptr get_deleter
template<class D, class T>
 D* get_deleter(const shared_ptr<T>& p) noexcept;

// 24.11.3.11, shared_ptr I/O
template<class E, class T, class Y>
 basic_ostream<E, T>& operator<<(basic_ostream<E, T>& os, const shared_ptr<Y>& p);

// 24.11.4, class template weak_ptr
template<class T> class weak_ptr;

// 24.11.4.6, weak_ptr specialized algorithms
template<class T> void swap(weak_ptr<T>& a, weak_ptr<T>& b) noexcept;

// 24.11.5, class template owner_less
template<class T = void> struct owner_less;

// 24.11.6, class template enable_shared_from_this
template<class T> class enable_shared_from_this;

// 24.11.7, hash support
template<class T> struct hash;
template<class T, class D> struct hash<unique_ptr<T, D>>;
template<class T> struct hash<shared_ptr<T>>;

// 24.11.8, atomic smart pointers
template<class T> struct atomic<shared_ptr<T>>;
template<class T> struct atomic<weak_ptr<T>>;

// 24.10.8.1, uses_allocator
template<class T, class Alloc>
 inline constexpr bool uses_allocator_v = uses_allocator<T, Alloc>::value;
}

```

### 24.10.3 Pointer traits

[pointer.traits]

- <sup>1</sup> The class template `pointer_traits` supplies a uniform interface to certain attributes of pointer-like types.

```

namespace std {
 template<class Ptr> struct pointer_traits {
 using pointer = Ptr;
 using element_type = see below;
 using difference_type = see below;

 template<class U> using rebind = see below;

 static pointer pointer_to(see below r);
 };

 template<class T> struct pointer_traits<T*> {
 using pointer = T*;
 using element_type = T;
 using difference_type = ptrdiff_t;

 template<class U> using rebind = U*;

 static pointer pointer_to(see below r) noexcept;
 };
}

```

**24.10.3.1 Pointer traits member types****[pointer.traits.types]**

```
using element_type = see below;
```

- 1 *Type:* `Ptr::element_type` if the *qualified-id* `Ptr::element_type` is valid and denotes a type (17.9.2); otherwise, `T` if `Ptr` is a class template instantiation of the form `SomePointer<T, Args>`, where `Args` is zero or more type arguments; otherwise, the specialization is ill-formed.

```
using difference_type = see below;
```

- 2 *Type:* `Ptr::difference_type` if the *qualified-id* `Ptr::difference_type` is valid and denotes a type (17.9.2); otherwise, `ptrdiff_t`.

```
template<class U> using rebind = see below;
```

- 3 *Alias template:* `Ptr::rebind<U>` if the *qualified-id* `Ptr::rebind<U>` is valid and denotes a type (17.9.2); otherwise, `SomePointer<U, Args>` if `Ptr` is a class template instantiation of the form `SomePointer<T, Args>`, where `Args` is zero or more type arguments; otherwise, the instantiation of `rebind` is ill-formed.

**24.10.3.2 Pointer traits member functions****[pointer.traits.functions]**

```
static pointer pointer_traits::pointer_to(see below r);
static pointer pointer_traits<T*>::pointer_to(see below r) noexcept;
```

- 1 *Remarks:* If `element_type` is *cv void*, the type of `r` is unspecified; otherwise, it is `element_type&`.
- 2 *Returns:* The first member function returns a pointer to `r` obtained by calling `Ptr::pointer_to(r)` through which indirection is valid; an instantiation of this function is ill-formed if `Ptr` does not have a matching `pointer_to` static member function. The second member function returns `addressof(r)`.

**24.10.3.3 Pointer traits optional members****[pointer.traits.optmem]**

- 1 Specializations of `pointer_traits` may define the member declared in this subclass to customize the behavior of the standard library.

```
static element_type* to_address(pointer p) noexcept;
```

- 2 *Returns:* A pointer of type `element_type*` that references the same location as the argument `p`.
- 3 *[Note:* This function should be the inverse of `pointer_to`. If defined, it customizes the behavior of the non-member function `to_address` (24.10.4). — *end note*]

**24.10.4 Pointer conversion****[pointer.conversion]**

```
template<class Ptr> auto to_address(const Ptr& p) noexcept;
```

- 1 *Returns:* `pointer_traits<Ptr>::to_address(p)` if that expression is well-formed (see 24.10.3.3), otherwise `to_address(p.operator->())`.

```
template<class T> constexpr T* to_address(T* p) noexcept;
```

- 2 *Requires:* `T` is not a function type. Otherwise the program is ill-formed.
- 3 *Returns:* `p`.

**24.10.5 Pointer safety****[util.dynamic.safety]**

- 1 A complete object is *declared reachable* while the number of calls to `declare_reachable` with an argument referencing the object exceeds the number of calls to `undeclare_reachable` with an argument referencing the object.

```
void declare_reachable(void* p);
```

- 2 *Requires:* `p` shall be a safely-derived pointer (6.6.4.4.3) or a null pointer value.
- 3 *Effects:* If `p` is not null, the complete object referenced by `p` is subsequently declared reachable (6.6.4.4.3).
- 4 *Throws:* May throw `bad_alloc` if the system cannot allocate additional memory that may be required to track objects declared reachable.



```
template<class T> T* undeclare_reachable(T* p);
```

5 *Requires:* If `p` is not null, the complete object referenced by `p` shall have been previously declared reachable, and shall be live (6.6.3) from the time of the call until the last `undeclare_reachable(p)` call on the object.

6 *Returns:* A safely derived copy of `p` which shall compare equal to `p`.

7 *Throws:* Nothing.

8 [Note: It is expected that calls to `declare_reachable(p)` will consume a small amount of memory in addition to that occupied by the referenced object until the matching call to `undeclare_reachable(p)` is encountered. Long running programs should arrange that calls are matched. — end note]

```
void declare_no_pointers(char* p, size_t n);
```

9 *Requires:* No bytes in the specified range are currently registered with `declare_no_pointers()`. If the specified range is in an allocated object, then it shall be entirely within a single allocated object. The object shall be live until the corresponding `undeclare_no_pointers()` call. [Note: In a garbage-collecting implementation, the fact that a region in an object is registered with `declare_no_pointers()` should not prevent the object from being collected. — end note]

10 *Effects:* The `n` bytes starting at `p` no longer contain traceable pointer locations, independent of their type. Hence indirection through a pointer located there is undefined if the object it points to was created by global operator `new` and not previously declared reachable. [Note: This may be used to inform a garbage collector or leak detector that this region of memory need not be traced. — end note]

11 *Throws:* Nothing.

12 [Note: Under some conditions implementations may need to allocate memory. However, the request can be ignored if memory allocation fails. — end note]

```
void undeclare_no_pointers(char* p, size_t n);
```

13 *Requires:* The same range shall previously have been passed to `declare_no_pointers()`.

14 *Effects:* Unregisters a range registered with `declare_no_pointers()` for destruction. It shall be called before the lifetime of the object ends.

15 *Throws:* Nothing.

```
pointer_safety get_pointer_safety() noexcept;
```

16 *Returns:* `pointer_safety::strict` if the implementation has strict pointer safety (6.6.4.4.3). It is implementation-defined whether `get_pointer_safety` returns `pointer_safety::relaxed` or `pointer_safety::preferred` if the implementation has relaxed pointer safety.<sup>224</sup>

## 24.10.6 Align

[ptr.align]

```
void* align(size_t alignment, size_t size, void*& ptr, size_t& space);
```

1 *Effects:* If it is possible to fit `size` bytes of storage aligned by `alignment` into the buffer pointed to by `ptr` with length `space`, the function updates `ptr` to represent the first possible address of such storage and decreases `space` by the number of bytes used for alignment. Otherwise, the function does nothing.

2 *Requires:*

(2.1) — `alignment` shall be a power of two

(2.2) — `ptr` shall represent the address of contiguous storage of at least `space` bytes

3 *Returns:* A null pointer if the requested aligned buffer would not fit into the available space, otherwise the adjusted value of `ptr`.

4 [Note: The function updates its `ptr` and `space` arguments so that it can be called repeatedly with possibly different `alignment` and `size` arguments for the same buffer. — end note]

<sup>224</sup>) `pointer_safety::preferred` might be returned to indicate that a leak detector is running so that the program can avoid spurious leak reports.

**24.10.7 Allocator argument tag****[allocator.tag]**

```
namespace std {
 struct allocator_arg_t { explicit allocator_arg_t() = default; };
 inline constexpr allocator_arg_t allocator_arg{};
}
```

- <sup>1</sup> The `allocator_arg_t` struct is an empty structure type used as a unique type to disambiguate constructor and function overloading. Specifically, several types (see [tuple 24.5](#)) have constructors with `allocator_arg_t` as the first argument, immediately followed by an argument of a type that satisfies the *Cpp17Allocator* requirements ([Table 33](#)).

**24.10.8 uses\_allocator****[allocator.uses]****24.10.8.1 uses\_allocator trait****[allocator.uses.trait]**

```
template<class T, class Alloc> struct uses_allocator;
```

- <sup>1</sup> *Remarks:* Automatically detects whether T has a nested `allocator_type` that is convertible from `Alloc`. Meets the *Cpp17BinaryTypeTrait* requirements ([24.15.1](#)). The implementation shall provide a definition that is derived from `true_type` if the *qualified-id* `T::allocator_type` is valid and denotes a type ([17.9.2](#)) and `is_convertible_v<Alloc, T::allocator_type> != false`, otherwise it shall be derived from `false_type`. A program may specialize this template to derive from `true_type` for a program-defined type T that does not have a nested `allocator_type` but nonetheless can be constructed with an allocator where either:

- (1.1) — the first argument of a constructor has type `allocator_arg_t` and the second argument has type `Alloc` or
- (1.2) — the last argument of a constructor has type `Alloc`.

**24.10.8.2 Uses-allocator construction****[allocator.uses.construction]**

- <sup>1</sup> *Uses-allocator construction* with allocator `Alloc` refers to the construction of an object `obj` of type T, using constructor arguments `v1`, `v2`, ..., `vN` of types `V1`, `V2`, ..., `VN`, respectively, and an allocator `alloc` of type `Alloc`, according to the following rules:

- (1.1) — if `uses_allocator_v<T, Alloc>` is `false` and `is_constructible_v<T, V1, V2, ..., VN>` is `true`, then `obj` is initialized as `obj(v1, v2, ..., vN)`;
- (1.2) — otherwise, if `uses_allocator_v<T, Alloc>` is `true` and `is_constructible_v<T, allocator_arg_t, Alloc, V1, V2, ..., VN>` is `true`, then `obj` is initialized as `obj(allocator_arg, alloc, v1, v2, ..., vN)`;
- (1.3) — otherwise, if `uses_allocator_v<T, Alloc>` is `true` and `is_constructible_v<T, V1, V2, ..., VN, Alloc>` is `true`, then `obj` is initialized as `obj(v1, v2, ..., vN, alloc)`;
- (1.4) — otherwise, the request for uses-allocator construction is ill-formed. [*Note:* An error will result if `uses_allocator_v<T, Alloc>` is `true` but the specific constructor does not take an allocator. This definition prevents a silent failure to pass the allocator to an element. — *end note*]

**24.10.9 Allocator traits****[allocator.traits]**

- <sup>1</sup> The class template `allocator_traits` supplies a uniform interface to all allocator types. An allocator cannot be a non-class type, however, even if `allocator_traits` supplies the entire required interface. [*Note:* Thus, it is always possible to create a derived class from an allocator. — *end note*]

```
namespace std {
 template<class Alloc> struct allocator_traits {
 using allocator_type = Alloc;

 using value_type = typename Alloc::value_type;

 using pointer = see below;
 using const_pointer = see below;
 using void_pointer = see below;
 using const_void_pointer = see below;

 using difference_type = see below;
 using size_type = see below;
 };
}
```

```

using propagate_on_container_copy_assignment = see below;
using propagate_on_container_move_assignment = see below;
using propagate_on_container_swap = see below;
using is_always_equal = see below;

template<class T> using rebind_alloc = see below;
template<class T> using rebind_traits = allocator_traits<rebind_alloc<T>>;

[[nodiscard]] static pointer allocate(Alloc& a, size_type n);
[[nodiscard]] static pointer allocate(Alloc& a, size_type n, const_void_pointer hint);

static void deallocate(Alloc& a, pointer p, size_type n);

template<class T, class... Args>
 static void construct(Alloc& a, T* p, Args&&... args);

template<class T>
 static void destroy(Alloc& a, T* p);

static size_type max_size(const Alloc& a) noexcept;

static Alloc select_on_container_copy_construction(const Alloc& rhs);
};
}

```

#### 24.10.9.1 Allocator traits member types

[allocator.traits.types]

using pointer = see below;

- 1 *Type:* Alloc::pointer if the *qualified-id* Alloc::pointer is valid and denotes a type (17.9.2); otherwise, value\_type\*.

using const\_pointer = see below;

- 2 *Type:* Alloc::const\_pointer if the *qualified-id* Alloc::const\_pointer is valid and denotes a type (17.9.2); otherwise, pointer\_traits<pointer>::rebind<const value\_type>.

using void\_pointer = see below;

- 3 *Type:* Alloc::void\_pointer if the *qualified-id* Alloc::void\_pointer is valid and denotes a type (17.9.2); otherwise, pointer\_traits<pointer>::rebind<void>.

using const\_void\_pointer = see below;

- 4 *Type:* Alloc::const\_void\_pointer if the *qualified-id* Alloc::const\_void\_pointer is valid and denotes a type (17.9.2); otherwise, pointer\_traits<pointer>::rebind<const void>.

using difference\_type = see below;

- 5 *Type:* Alloc::difference\_type if the *qualified-id* Alloc::difference\_type is valid and denotes a type (17.9.2); otherwise, pointer\_traits<pointer>::difference\_type.

using size\_type = see below;

- 6 *Type:* Alloc::size\_type if the *qualified-id* Alloc::size\_type is valid and denotes a type (17.9.2); otherwise, make\_unsigned\_t<difference\_type>.

using propagate\_on\_container\_copy\_assignment = see below;

- 7 *Type:* Alloc::propagate\_on\_container\_copy\_assignment if the *qualified-id* Alloc::propagate\_on\_container\_copy\_assignment is valid and denotes a type (17.9.2); otherwise false\_type.

using propagate\_on\_container\_move\_assignment = see below;

- 8 *Type:* Alloc::propagate\_on\_container\_move\_assignment if the *qualified-id* Alloc::propagate\_on\_container\_move\_assignment is valid and denotes a type (17.9.2); otherwise false\_type.

```
using propagate_on_container_swap = see below;
```

- 9 *Type:* Alloc::propagate\_on\_container\_swap if the *qualified-id* Alloc::propagate\_on\_container\_swap is valid and denotes a type (17.9.2); otherwise false\_type.

```
using is_always_equal = see below;
```

- 10 *Type:* Alloc::is\_always\_equal if the *qualified-id* Alloc::is\_always\_equal is valid and denotes a type (17.9.2); otherwise is\_empty<Alloc>::type.

```
template<class T> using rebind_alloc = see below;
```

- 11 *Alias template:* Alloc::rebind<T>::other if the *qualified-id* Alloc::rebind<T>::other is valid and denotes a type (17.9.2); otherwise, Alloc<T, Args> if Alloc is a class template instantiation of the form Alloc<U, Args>, where Args is zero or more type arguments; otherwise, the instantiation of rebind\_alloc is ill-formed.

### 24.10.9.2 Allocator traits static member functions [allocator.traits.members]

```
[[nodiscard]] static pointer allocate(Alloc& a, size_type n);
```

- 1 *Returns:* a.allocate(n).

```
[[nodiscard]] static pointer allocate(Alloc& a, size_type n, const_void_pointer hint);
```

- 2 *Returns:* a.allocate(n, hint) if that expression is well-formed; otherwise, a.allocate(n).

```
static void deallocate(Alloc& a, pointer p, size_type n);
```

- 3 *Effects:* Calls a.deallocate(p, n).

- 4 *Throws:* Nothing.

```
template<class T, class... Args>
static void construct(Alloc& a, T* p, Args&&... args);
```

- 5 *Effects:* Calls a.construct(p, std::forward<Args>(args)...) if that call is well-formed; otherwise, invokes ::new (static\_cast<void\*>(p)) T(std::forward<Args>(args)...)..

```
template<class T>
static void destroy(Alloc& a, T* p);
```

- 6 *Effects:* Calls a.destroy(p) if that call is well-formed; otherwise, invokes p->~T().

```
static size_type max_size(const Alloc& a) noexcept;
```

- 7 *Returns:* a.max\_size() if that expression is well-formed; otherwise, numeric\_limits<size\_type>::max()/sizeof(value\_type).

```
static Alloc select_on_container_copy_construction(const Alloc& rhs);
```

- 8 *Returns:* rhs.select\_on\_container\_copy\_construction() if that expression is well-formed; otherwise, rhs.

### 24.10.10 The default allocator [default.allocator]

- 1 All specializations of the default allocator satisfy the allocator completeness requirements (20.5.3.5.1).

```
namespace std {
 template<class T> class allocator {
 public:
 using value_type = T;
 using size_type = size_t;
 using difference_type = ptrdiff_t;
 using propagate_on_container_move_assignment = true_type;
 using is_always_equal = true_type;

 constexpr allocator() noexcept;
 constexpr allocator(const allocator&) noexcept;
 template<class U> constexpr allocator(const allocator<U&&)& noexcept;
 ~allocator();
 allocator& operator=(const allocator&) = default;
 };
};
```

```

 [[nodiscard]] T* allocate(size_t n);
 void deallocate(T* p, size_t n);
};
}

```

#### 24.10.10.1 allocator members

[allocator.members]

- 1 Except for the destructor, member functions of the default allocator shall not introduce data races (6.8.2) as a result of concurrent calls to those member functions from different threads. Calls to these functions that allocate or deallocate a particular unit of storage shall occur in a single total order, and each such deallocation call shall happen before the next allocation (if any) in this order.

```
[[nodiscard]] T* allocate(size_t n);
```

- 2 *Returns:* A pointer to the initial element of an array of storage of size `n * sizeof(T)`, aligned appropriately for objects of type `T`.

- 3 *Remarks:* the storage is obtained by calling `::operator new` (21.6.2), but it is unspecified when or how often this function is called.

- 4 *Throws:* `bad_alloc` if the storage cannot be obtained.

```
void deallocate(T* p, size_t n);
```

- 5 *Requires:* `p` shall be a pointer value obtained from `allocate()`. `n` shall equal the value passed as the first argument to the invocation of `allocate` which returned `p`.

- 6 *Effects:* Deallocates the storage referenced by `p`.

- 7 *Remarks:* Uses `::operator delete` (21.6.2), but it is unspecified when this function is called.

#### 24.10.10.2 allocator globals

[allocator.globals]

```
template<class T, class U>
bool operator==(const allocator<T>&, const allocator<U>&) noexcept;
```

- 1 *Returns:* `true`.

```
template<class T, class U>
bool operator!=(const allocator<T>&, const allocator<U>&) noexcept;
```

- 2 *Returns:* `false`.

#### 24.10.11 Specialized algorithms

[specialized.algorithms]

- 1 Throughout this subclause, the names of template parameters are used to express type requirements.

- (1.1) — If an algorithm's template parameter is named `InputIterator`, the template argument shall satisfy the *Cpp17InputIterator* requirements (28.2.3).
- (1.2) — If an algorithm's template parameter is named `ForwardIterator`, the template argument shall satisfy the *Cpp17ForwardIterator* requirements (28.2.5), and is required to have the property that no exceptions are thrown from increment, assignment, comparison, or indirection through valid iterators.

Unless otherwise specified, if an exception is thrown in the following algorithms there are no effects.

##### 24.10.11.1 addressof

[specialized.addressof]

```
template<class T> constexpr T* addressof(T& r) noexcept;
```

- 1 *Returns:* The actual address of the object or function referenced by `r`, even in the presence of an overloaded `operator&`.

- 2 *Remarks:* An expression `addressof(E)` is a constant subexpression (20.3.6) if `E` is an lvalue constant subexpression.

##### 24.10.11.2 uninitialized\_default\_construct

[uninitialized.construct.default]

```
template<class ForwardIterator>
void uninitialized_default_construct(ForwardIterator first, ForwardIterator last);
```

- 1 *Effects:* Equivalent to:

```

 for (; first != last; ++first)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type;

```

```

template<class ForwardIterator, class Size>
ForwardIterator uninitialized_default_construct_n(ForwardIterator first, Size n);

```

2 *Effects:* Equivalent to:

```

 for (; n > 0; (void)++first, --n)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type;
 return first;

```

### 24.10.11.3 uninitialized\_value\_construct [uninitialized.construct.value]

```

template<class ForwardIterator>
void uninitialized_value_construct(ForwardIterator first, ForwardIterator last);

```

1 *Effects:* Equivalent to:

```

 for (; first != last; ++first)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type();

```

```

template<class ForwardIterator, class Size>
ForwardIterator uninitialized_value_construct_n(ForwardIterator first, Size n);

```

2 *Effects:* Equivalent to:

```

 for (; n > 0; (void)++first, --n)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type();
 return first;

```

### 24.10.11.4 uninitialized\_copy [uninitialized.copy]

```

template<class InputIterator, class ForwardIterator>
ForwardIterator uninitialized_copy(InputIterator first, InputIterator last,
 ForwardIterator result);

```

1 *Effects:* As if by:

```

 for (; first != last; ++result, (void) ++first)
 ::new (static_cast<void*>(addressof(*result)))
 typename iterator_traits<ForwardIterator>::value_type(*first);

```

2 *Returns:* result.

```

template<class InputIterator, class Size, class ForwardIterator>
ForwardIterator uninitialized_copy_n(InputIterator first, Size n, ForwardIterator result);

```

3 *Effects:* As if by:

```

 for (; n > 0; ++result, (void) ++first, --n) {
 ::new (static_cast<void*>(addressof(*result)))
 typename iterator_traits<ForwardIterator>::value_type(*first);
 }

```

4 *Returns:* result.

### 24.10.11.5 uninitialized\_move [uninitialized.move]

```

template<class InputIterator, class ForwardIterator>
ForwardIterator uninitialized_move(InputIterator first, InputIterator last,
 ForwardIterator result);

```

1 *Effects:* Equivalent to:

```

 for (; first != last; (void)++result, ++first)
 ::new (static_cast<void*>(addressof(*result)))
 typename iterator_traits<ForwardIterator>::value_type(std::move(*first));
 return result;

```

- 2 *Remarks:* If an exception is thrown, some objects in the range [first, last) are left in a valid but unspecified state.

```
template<class InputIterator, class Size, class ForwardIterator>
pair<InputIterator, ForwardIterator>
uninitialized_move_n(InputIterator first, Size n, ForwardIterator result);
```

- 3 *Effects:* Equivalent to:

```
for (; n > 0; ++result, (void) ++first, --n)
 ::new (static_cast<void*>(addressof(*result)))
 typename iterator_traits<ForwardIterator>::value_type(std::move(*first));
return {first,result};
```

- 4 *Remarks:* If an exception is thrown, some objects in the range [first, std::next(first,n)) are left in a valid but unspecified state.

#### 24.10.11.6 uninitialized\_fill [uninitialized.fill]

```
template<class ForwardIterator, class T>
void uninitialized_fill(ForwardIterator first, ForwardIterator last, const T& x);
```

- 1 *Effects:* As if by:

```
for (; first != last; ++first)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type(x);
```

```
template<class ForwardIterator, class Size, class T>
ForwardIterator uninitialized_fill_n(ForwardIterator first, Size n, const T& x);
```

- 2 *Effects:* As if by:

```
for (; n--; ++first)
 ::new (static_cast<void*>(addressof(*first)))
 typename iterator_traits<ForwardIterator>::value_type(x);
return first;
```

#### 24.10.11.7 destroy [specialized.destroy]

```
template<class T>
void destroy_at(T* location);
```

- 1 *Effects:* Equivalent to:

```
location->~T();
```

```
template<class ForwardIterator>
void destroy(ForwardIterator first, ForwardIterator last);
```

- 2 *Effects:* Equivalent to:

```
for (; first!=last; ++first)
 destroy_at(addressof(*first));
```

```
template<class ForwardIterator, class Size>
ForwardIterator destroy_n(ForwardIterator first, Size n);
```

- 3 *Effects:* Equivalent to:

```
for (; n > 0; (void)++first, --n)
 destroy_at(addressof(*first));
return first;
```

### 24.10.12 C library memory allocation [c.malloc]

- 1 [Note: The header <cstdlib> (21.2.2) declares the functions described in this subclause. — end note]

```
void* aligned_alloc(size_t alignment, size_t size);
void* calloc(size_t nmemb, size_t size);
void* malloc(size_t size);
void* realloc(void* ptr, size_t size);
```

- 2 *Effects:* These functions have the semantics specified in the C standard library.

- 3 *Remarks:* These functions do not attempt to allocate storage by calling `::operator new()` (21.6).
- 4 Storage allocated directly with these functions is implicitly declared reachable (see 6.6.4.4.3) on allocation, ceases to be declared reachable on deallocation, and need not cease to be declared reachable as the result of an `undecclare_reachable()` call. [*Note:* This allows existing C libraries to remain unaffected by restrictions on pointers that are not safely derived, at the expense of providing far fewer garbage collection and leak detection options for `malloc()`-allocated objects. It also allows `malloc()` to be implemented with a separate allocation arena, bypassing the normal `declare_reachable()` implementation. The above functions should never intentionally be used as a replacement for `declare_reachable()`, and newly written code is strongly encouraged to treat memory allocated with these functions as though it were allocated with `operator new`. — *end note*]

```
void free(void* ptr);
```

- 5 *Effects:* This function has the semantics specified in the C standard library.

- 6 *Remarks:* This function does not attempt to deallocate storage by calling `::operator delete()`.

SEE ALSO: ISO C 7.22.3

## 24.11 Smart pointers [smartptr]

### 24.11.1 Class template `unique_ptr` [unique.ptr]

- 1 A *unique pointer* is an object that owns another object and manages that other object through a pointer. More precisely, a unique pointer is an object  $u$  that stores a pointer to a second object  $p$  and will dispose of  $p$  when  $u$  is itself destroyed (e.g., when leaving block scope (9.7)). In this context,  $u$  is said to *own*  $p$ .
- 2 The mechanism by which  $u$  disposes of  $p$  is known as  $p$ 's associated *deleter*, a function object whose correct invocation results in  $p$ 's appropriate disposition (typically its deletion).
- 3 Let the notation  $u.p$  denote the pointer stored by  $u$ , and let  $u.d$  denote the associated deleter. Upon request,  $u$  can *reset* (replace)  $u.p$  and  $u.d$  with another pointer and deleter, but properly disposes of its owned object via the associated deleter before such replacement is considered completed.
- 4 Each object of a type  $U$  instantiated from the `unique_ptr` template specified in this subclause has the strict ownership semantics, specified above, of a unique pointer. In partial satisfaction of these semantics, each such  $U$  is *Cpp17MoveConstructible* and *Cpp17MoveAssignable*, but is not *Cpp17CopyConstructible* nor *Cpp17CopyAssignable*. The template parameter  $T$  of `unique_ptr` may be an incomplete type.
- 5 [*Note:* The uses of `unique_ptr` include providing exception safety for dynamically allocated memory, passing ownership of dynamically allocated memory to a function, and returning dynamically allocated memory from a function. — *end note*]

#### 24.11.1.1 Default deleters [unique.ptr.dltr]

##### 24.11.1.1.1 In general [unique.ptr.dltr.general]

- 1 The class template `default_delete` serves as the default deleter (destruction policy) for the class template `unique_ptr`.
- 2 The template parameter  $T$  of `default_delete` may be an incomplete type.

##### 24.11.1.1.2 `default_delete` [unique.ptr.dltr.dflt]

```
namespace std {
 template<class T> struct default_delete {
 constexpr default_delete() noexcept = default;
 template<class U> default_delete(const default_delete<U>&) noexcept;
 void operator()(T*) const;
 };
}
```

```
template<class U> default_delete(const default_delete<U>& other) noexcept;
```

- 1 *Effects:* Constructs a `default_delete` object from another `default_delete<U>` object.

- 2 *Remarks:* This constructor shall not participate in overload resolution unless  $U^*$  is implicitly convertible to  $T^*$ .



```
void operator()(T* ptr) const;
```

3 *Effects:* Calls delete on ptr.

4 *Remarks:* If T is an incomplete type, the program is ill-formed.

#### 24.11.1.1.3 default\_delete<T[]> [unique.ptr.dltr.dflt1]

```
namespace std {
 template<class T> struct default_delete<T[]> {
 constexpr default_delete() noexcept = default;
 template<class U> default_delete(const default_delete<U[]>&) noexcept;
 template<class U> void operator()(U* ptr) const;
 };
}
```

```
template<class U> default_delete(const default_delete<U[]>& other) noexcept;
```

1 *Effects:* Constructs a default\_delete object from another default\_delete<U[]> object.

2 *Remarks:* This constructor shall not participate in overload resolution unless U(\*) [] is convertible to T(\*) [].

```
template<class U> void operator()(U* ptr) const;
```

3 *Effects:* Calls delete[] on ptr.

4 *Remarks:* If U is an incomplete type, the program is ill-formed. This function shall not participate in overload resolution unless U(\*) [] is convertible to T(\*) [].

#### 24.11.1.2 unique\_ptr for single objects [unique.ptr.single]

```
namespace std {
 template<class T, class D = default_delete<T>> class unique_ptr {
 public:
 using pointer = see below;
 using element_type = T;
 using deleter_type = D;

 // 24.11.1.2.1, constructors
 constexpr unique_ptr() noexcept;
 explicit unique_ptr(pointer p) noexcept;
 unique_ptr(pointer p, see below d1) noexcept;
 unique_ptr(pointer p, see below d2) noexcept;
 unique_ptr(unique_ptr&& u) noexcept;
 constexpr unique_ptr(nullptr_t) noexcept;
 template<class U, class E>
 unique_ptr(unique_ptr<U, E>&& u) noexcept;

 // 24.11.1.2.2, destructor
 ~unique_ptr();

 // 24.11.1.2.3, assignment
 unique_ptr& operator=(unique_ptr&& u) noexcept;
 template<class U, class E>
 unique_ptr& operator=(unique_ptr<U, E>&& u) noexcept;
 unique_ptr& operator=(nullptr_t) noexcept;

 // 24.11.1.2.4, observers
 add_lvalue_reference_t<T> operator*() const;
 pointer operator->() const noexcept;
 pointer get() const noexcept;
 deleter_type& get_deleter() noexcept;
 const deleter_type& get_deleter() const noexcept;
 explicit operator bool() const noexcept;

 // 24.11.1.2.5, modifiers
 pointer release() noexcept;
 void reset(pointer p = pointer()) noexcept;
```

```

void swap(unique_ptr& u) noexcept;

// disable copy from lvalue
unique_ptr(const unique_ptr&) = delete;
unique_ptr& operator=(const unique_ptr&) = delete;
};
}

```

- 1 The default type for the template parameter D is `default_delete`. A client-supplied template argument D shall be a function object type (24.14), lvalue reference to function, or lvalue reference to function object type for which, given a value `d` of type D and a value `ptr` of type `unique_ptr<T, D>::pointer`, the expression `d(ptr)` is valid and has the effect of disposing of the pointer as appropriate for that deleter.
- 2 If the deleter's type D is not a reference type, D shall satisfy the *Cpp17Destructible* requirements (Table 29).
- 3 If the *qualified-id* `remove_reference_t<D>::pointer` is valid and denotes a type (17.9.2), then `unique_ptr<T, D>::pointer` shall be a synonym for `remove_reference_t<D>::pointer`. Otherwise `unique_ptr<T, D>::pointer` shall be a synonym for `element_type*`. The type `unique_ptr<T, D>::pointer` shall satisfy the *Cpp17NullablePointer* requirements (Table 30).
- 4 [Example: Given an allocator type X (Table 33) and letting A be a synonym for `allocator_traits<X>`, the types `A::pointer`, `A::const_pointer`, `A::void_pointer`, and `A::const_void_pointer` may be used as `unique_ptr<T, D>::pointer`. — end example]

#### 24.11.1.2.1 Constructors

[unique\_ptr.single.ctor]

```

constexpr unique_ptr() noexcept;
constexpr unique_ptr(nullptr_t) noexcept;

```

- 1 *Requires:* D shall satisfy the *Cpp17DefaultConstructible* requirements (Table 24), and that construction shall not throw an exception.
- 2 *Effects:* Constructs a `unique_ptr` object that owns nothing, value-initializing the stored pointer and the stored deleter.
- 3 *Ensures:* `get() == nullptr`. `get_deleter()` returns a reference to the stored deleter.
- 4 *Remarks:* If `is_pointer_v<deleter_type>` is true or `is_default_constructible_v<deleter_type>` is false, this constructor shall not participate in overload resolution.

```
explicit unique_ptr(pointer p) noexcept;
```

- 5 *Requires:* D shall satisfy the *Cpp17DefaultConstructible* requirements (Table 24), and that construction shall not throw an exception.
- 6 *Effects:* Constructs a `unique_ptr` which owns `p`, initializing the stored pointer with `p` and value-initializing the stored deleter.
- 7 *Ensures:* `get() == p`. `get_deleter()` returns a reference to the stored deleter.
- 8 *Remarks:* If `is_pointer_v<deleter_type>` is true or `is_default_constructible_v<deleter_type>` is false, this constructor shall not participate in overload resolution. If class template argument deduction (16.3.1.8) would select the function template corresponding to this constructor, then the program is ill-formed.

```
unique_ptr(pointer p, see below d1) noexcept;
unique_ptr(pointer p, see below d2) noexcept;
```

- 9 The signature of these constructors depends upon whether D is a reference type. If D is a non-reference type A, then the signatures are:

```

unique_ptr(pointer p, const A& d) noexcept;
unique_ptr(pointer p, A&& d) noexcept;

```

- 10 If D is an lvalue reference type `A&`, then the signatures are:

```

unique_ptr(pointer p, A& d) noexcept;
unique_ptr(pointer p, A&& d) = delete;

```

- 11 If D is an lvalue reference type `const A&`, then the signatures are:

```

unique_ptr(pointer p, const A& d) noexcept;
unique_ptr(pointer p, const A&& d) = delete;

```

12 *Requires:* For the first constructor, if D is not a reference type, D shall satisfy the *Cpp17CopyConstructible* requirements and such construction shall not exit via an exception. For the second constructor, if D is not a reference type, D shall satisfy the *Cpp17MoveConstructible* requirements and such construction shall not exit via an exception.

13 *Effects:* Constructs a `unique_ptr` object which owns p, initializing the stored pointer with p and initializing the deleter from `std::forward<decltype(d)>(d)`.

14 *Remarks:* These constructors shall not participate in overload resolution unless `is_constructible_v<D, decltype(d)>` is true.

15 *Ensures:* `get() == p.get_deleter()` returns a reference to the stored deleter. If D is a reference type then `get_deleter()` returns a reference to the lvalue d.

16 *Remarks:* If class template argument deduction (16.3.1.8) would select a function template corresponding to either of these constructors, then the program is ill-formed.

17 [Example:

```

 D d;
 unique_ptr<int, D> p1(new int, D()); // D must be Cpp17MoveConstructible
 unique_ptr<int, D> p2(new int, d); // D must be Cpp17CopyConstructible
 unique_ptr<int, D&&> p3(new int, d); // p3 holds a reference to d
 unique_ptr<int, const D&&> p4(new int, D()); // error: rvalue deleter object combined
 // with reference deleter type

```

— end example]

`unique_ptr(unique_ptr&& u) noexcept;`

18 *Requires:* If D is not a reference type, D shall satisfy the *Cpp17MoveConstructible* requirements (Table 25). Construction of the deleter from an rvalue of type D shall not throw an exception.

19 *Effects:* Constructs a `unique_ptr` from u. If D is a reference type, this deleter is copy constructed from u's deleter; otherwise, this deleter is move constructed from u's deleter. [Note: The construction of the deleter can be implemented with `std::forward<D>`. — end note]

20 *Ensures:* `get()` yields the value `u.get()` yielded before the construction. `u.get() == nullptr.get_deleter()` returns a reference to the stored deleter that was constructed from `u.get_deleter()`. If D is a reference type then `get_deleter()` and `u.get_deleter()` both reference the same lvalue deleter.

`template<class U, class E> unique_ptr(unique_ptr<U, E&&& u) noexcept;`

21 *Requires:* If E is not a reference type, construction of the deleter from an rvalue of type E shall be well-formed and shall not throw an exception. Otherwise, E is a reference type and construction of the deleter from an lvalue of type E shall be well-formed and shall not throw an exception.

22 *Remarks:* This constructor shall not participate in overload resolution unless:

(22.1) — `unique_ptr<U, E>::pointer` is implicitly convertible to `pointer`,

(22.2) — U is not an array type, and

(22.3) — either D is a reference type and E is the same type as D, or D is not a reference type and E is implicitly convertible to D.

23 *Effects:* Constructs a `unique_ptr` from u. If E is a reference type, this deleter is copy constructed from u's deleter; otherwise, this deleter is move constructed from u's deleter. [Note: The deleter constructor can be implemented with `std::forward<E>`. — end note]

24 *Ensures:* `get()` yields the value `u.get()` yielded before the construction. `u.get() == nullptr.get_deleter()` returns a reference to the stored deleter that was constructed from `u.get_deleter()`.

#### 24.11.1.2.2 Destructor

[unique\_ptr.single.dtor]

`~unique_ptr();`

1 *Requires:* The expression `get_deleter()(get())` shall be well-formed, shall have well-defined behavior, and shall not throw exceptions. [Note: The use of `default_delete` requires T to be a complete type. — end note]

2 *Effects:* If `get() == nullptr` there are no effects. Otherwise `get_deleter()(get())`.

**24.11.1.2.3 Assignment****[unique.ptr.single.asgn]**

```
unique_ptr& operator=(unique_ptr&& u) noexcept;
```

1 *Requires:* If D is not a reference type, D shall satisfy the *Cpp17MoveAssignable* requirements (Table 27) and assignment of the deleter from an rvalue of type D shall not throw an exception. Otherwise, D is a reference type; `remove_reference_t<D>` shall satisfy the *Cpp17CopyAssignable* requirements and assignment of the deleter from an lvalue of type D shall not throw an exception.

2 *Effects:* Calls `reset(u.release())` followed by `get_deleter() = std::forward<D>(u.get_deleter())`.

3 *Returns:* `*this`.

4 *Ensures:* `u.get() == nullptr`.

```
template<class U, class E> unique_ptr& operator=(unique_ptr<U, E>&& u) noexcept;
```

5 *Requires:* If E is not a reference type, assignment of the deleter from an rvalue of type E shall be well-formed and shall not throw an exception. Otherwise, E is a reference type and assignment of the deleter from an lvalue of type E shall be well-formed and shall not throw an exception.

6 *Remarks:* This operator shall not participate in overload resolution unless:

(6.1) — `unique_ptr<U, E>::pointer` is implicitly convertible to `pointer`, and

(6.2) — U is not an array type, and

(6.3) — `is_assignable_v<D&, E&&>` is true.

7 *Effects:* Calls `reset(u.release())` followed by `get_deleter() = std::forward<E>(u.get_deleter())`.

8 *Returns:* `*this`.

9 *Ensures:* `u.get() == nullptr`.

```
unique_ptr& operator=(nullptr_t) noexcept;
```

10 *Effects:* As if by `reset()`.

11 *Ensures:* `get() == nullptr`.

12 *Returns:* `*this`.

**24.11.1.2.4 Observers****[unique.ptr.single.observers]**

```
add_lvalue_reference_t<T> operator*() const;
```

1 *Requires:* `get() != nullptr`.

2 *Returns:* `*get()`.

```
pointer operator->() const noexcept;
```

3 *Requires:* `get() != nullptr`.

4 *Returns:* `get()`.

5 [Note: The use of this function typically requires that T be a complete type. — end note]

```
pointer get() const noexcept;
```

6 *Returns:* The stored pointer.

```
deleter_type& get_deleter() noexcept;
const deleter_type& get_deleter() const noexcept;
```

7 *Returns:* A reference to the stored deleter.

```
explicit operator bool() const noexcept;
```

8 *Returns:* `get() != nullptr`.

**24.11.1.2.5 Modifiers****[unique.ptr.single.modifiers]**

```
pointer release() noexcept;
```

1 *Ensures:* `get() == nullptr`.

2 *Returns:* The value `get()` had at the start of the call to `release`.

```
void reset(pointer p = pointer()) noexcept;
```

3 *Requires:* The expression `get_deleter()(get())` shall be well-formed, shall have well-defined behavior, and shall not throw exceptions.

4 *Effects:* Assigns `p` to the stored pointer, and then if and only if the old value of the stored pointer, `old_p`, was not equal to `nullptr`, calls `get_deleter()(old_p)`. [*Note:* The order of these operations is significant because the call to `get_deleter()` may destroy `*this`. — *end note*]

5 *Ensures:* `get() == p`. [*Note:* The postcondition does not hold if the call to `get_deleter()` destroys `*this` since `this->get()` is no longer a valid expression. — *end note*]

```
void swap(unique_ptr& u) noexcept;
```

6 *Requires:* `get_deleter()` shall be swappable (20.5.3.2) and shall not throw an exception under `swap`.

7 *Effects:* Invokes `swap` on the stored pointers and on the stored deleters of `*this` and `u`.

**24.11.1.3 unique\_ptr for array objects with a runtime length****[unique.ptr.runtime]**

```
namespace std {
 template<class T, class D> class unique_ptr<T[], D> {
 public:
 using pointer = see below;
 using element_type = T;
 using deleter_type = D;

 // 24.11.1.3.1, constructors
 constexpr unique_ptr() noexcept;
 template<class U> explicit unique_ptr(U p) noexcept;
 template<class U> unique_ptr(U p, see below d) noexcept;
 template<class U> unique_ptr(U p, see below d) noexcept;
 unique_ptr(unique_ptr&& u) noexcept;
 template<class U, class E>
 unique_ptr(unique_ptr<U, E>&& u) noexcept;
 constexpr unique_ptr(nullptr_t) noexcept;

 // destructor
 ~unique_ptr();

 // assignment
 unique_ptr& operator=(unique_ptr&& u) noexcept;
 template<class U, class E>
 unique_ptr& operator=(unique_ptr<U, E>&& u) noexcept;
 unique_ptr& operator=(nullptr_t) noexcept;

 // 24.11.1.3.3, observers
 T& operator[](size_t i) const;
 pointer get() const noexcept;
 deleter_type& get_deleter() noexcept;
 const deleter_type& get_deleter() const noexcept;
 explicit operator bool() const noexcept;

 // 24.11.1.3.4, modifiers
 pointer release() noexcept;
 template<class U> void reset(U p) noexcept;
 void reset(nullptr_t = nullptr) noexcept;
 void swap(unique_ptr& u) noexcept;

 // disable copy from lvalue
 unique_ptr(const unique_ptr&) = delete;
 };
};
```

```

 unique_ptr& operator=(const unique_ptr&) = delete;
 };
}

```

<sup>1</sup> A specialization for array types is provided with a slightly altered interface.

- (1.1) — Conversions between different types of `unique_ptr<T[], D>` that would be disallowed for the corresponding pointer-to-array types, and conversions to or from the non-array forms of `unique_ptr`, produce an ill-formed program.
- (1.2) — Pointers to types derived from `T` are rejected by the constructors, and by `reset`.
- (1.3) — The observers `operator*` and `operator->` are not provided.
- (1.4) — The indexing observer `operator[]` is provided.
- (1.5) — The default deleter will call `delete[]`.

<sup>2</sup> Descriptions are provided below only for members that differ from the primary template.

<sup>3</sup> The template argument `T` shall be a complete type.

#### 24.11.1.3.1 Constructors [unique.ptr.runtime.ctor]

```
template<class U> explicit unique_ptr(U p) noexcept;
```

<sup>1</sup> This constructor behaves the same as the constructor in the primary template that takes a single parameter of type `pointer` except that it additionally shall not participate in overload resolution unless

- (1.1) — `U` is the same type as `pointer`, or
- (1.2) — `pointer` is the same type as `element_type*`, `U` is a pointer type `V*`, and `V(*) []` is convertible to `element_type(*) []`.

```
template<class U> unique_ptr(U p, see below d) noexcept;
template<class U> unique_ptr(U p, see below d) noexcept;
```

<sup>2</sup> These constructors behave the same as the constructors in the primary template that take a parameter of type `pointer` and a second parameter except that they shall not participate in overload resolution unless either

- (2.1) — `U` is the same type as `pointer`,
- (2.2) — `U` is `nullptr_t`, or
- (2.3) — `pointer` is the same type as `element_type*`, `U` is a pointer type `V*`, and `V(*) []` is convertible to `element_type(*) []`.

```
template<class U, class E> unique_ptr(unique_ptr<U, E>&& u) noexcept;
```

<sup>3</sup> This constructor behaves the same as in the primary template, except that it shall not participate in overload resolution unless all of the following conditions hold, where `UP` is `unique_ptr<U, E>`:

- (3.1) — `U` is an array type, and
- (3.2) — `pointer` is the same type as `element_type*`, and
- (3.3) — `UP::pointer` is the same type as `UP::element_type*`, and
- (3.4) — `UP::element_type(*) []` is convertible to `element_type(*) []`, and
- (3.5) — either `D` is a reference type and `E` is the same type as `D`, or `D` is not a reference type and `E` is implicitly convertible to `D`.

[*Note*: This replaces the overload-resolution specification of the primary template — *end note*]

#### 24.11.1.3.2 Assignment [unique.ptr.runtime.asgn]

```
template<class U, class E> unique_ptr& operator=(unique_ptr<U, E>&& u)noexcept;
```

<sup>1</sup> This operator behaves the same as in the primary template, except that it shall not participate in overload resolution unless all of the following conditions hold, where `UP` is `unique_ptr<U, E>`:

- (1.1) — `U` is an array type, and
- (1.2) — `pointer` is the same type as `element_type*`, and
- (1.3) — `UP::pointer` is the same type as `UP::element_type*`, and

- (1.4) — `UP::element_type(*) []` is convertible to `element_type(*) []`, and  
 (1.5) — `is_assignable_v<D&, E&&>` is true.

[*Note:* This replaces the overload-resolution specification of the primary template — *end note*]

### 24.11.1.3.3 Observers [unique.ptr.runtime.observers]

`T& operator[](size_t i) const;`

1 *Requires:* `i` < the number of elements in the array to which the stored pointer points.

2 *Returns:* `get()[i]`.

### 24.11.1.3.4 Modifiers [unique.ptr.runtime.modifiers]

`void reset(nullptr_t p = nullptr) noexcept;`

1 *Effects:* Equivalent to `reset(pointer())`.

`template<class U> void reset(U p) noexcept;`

2 This function behaves the same as the `reset` member of the primary template, except that it shall not participate in overload resolution unless either

- (2.1) — `U` is the same type as `pointer`, or  
 (2.2) — `pointer` is the same type as `element_type*`, `U` is a pointer type `V*`, and `V(*) []` is convertible to `element_type(*) []`.

### 24.11.1.4 Creation [unique.ptr.create]

`template<class T, class... Args> unique_ptr<T> make_unique(Args&&... args);`

1 *Remarks:* This function shall not participate in overload resolution unless `T` is not an array.

2 *Returns:* `unique_ptr<T>(new T(std::forward<Args>(args)...))`.

`template<class T> unique_ptr<T> make_unique(size_t n);`

3 *Remarks:* This function shall not participate in overload resolution unless `T` is an array of unknown bound.

4 *Returns:* `unique_ptr<T>(new remove_extent_t<T>[n]())`.

`template<class T, class... Args> unspecified make_unique(Args&&...) = delete;`

5 *Remarks:* This function shall not participate in overload resolution unless `T` is an array of known bound.

### 24.11.1.5 Specialized algorithms [unique.ptr.special]

`template<class T, class D> void swap(unique_ptr<T, D>& x, unique_ptr<T, D>& y) noexcept;`

1 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<D>` is true.

2 *Effects:* Calls `x.swap(y)`.

`template<class T1, class D1, class T2, class D2>  
 bool operator==(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);`

3 *Returns:* `x.get() == y.get()`.

`template<class T1, class D1, class T2, class D2>  
 bool operator!=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);`

4 *Returns:* `x.get() != y.get()`.

`template<class T1, class D1, class T2, class D2>  
 bool operator<(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);`

5 *Requires:* Let `CT` denote

`common_type_t<typename unique_ptr<T1, D1>::pointer,  
 typename unique_ptr<T2, D2>::pointer>`

Then the specialization `less<CT>` shall be a function object type (24.14) that induces a strict weak ordering (29.7) on the pointer values.

6 *Returns:* `less<CT>()(x.get(), y.get())`.

7 *Remarks:* If `unique_ptr<T1, D1>::pointer` is not implicitly convertible to `CT` or `unique_ptr<T2, D2>::pointer` is not implicitly convertible to `CT`, the program is ill-formed.

```
template<class T1, class D1, class T2, class D2>
bool operator>(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
```

8 *Returns:* `y < x`.

```
template<class T1, class D1, class T2, class D2>
bool operator<=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
```

9 *Returns:* `!(y < x)`.

```
template<class T1, class D1, class T2, class D2>
bool operator>=(const unique_ptr<T1, D1>& x, const unique_ptr<T2, D2>& y);
```

10 *Returns:* `!(x < y)`.

```
template<class T, class D>
bool operator==(const unique_ptr<T, D>& x, nullptr_t) noexcept;
template<class T, class D>
bool operator==(nullptr_t, const unique_ptr<T, D>& x) noexcept;
```

11 *Returns:* `!x`.

```
template<class T, class D>
bool operator!=(const unique_ptr<T, D>& x, nullptr_t) noexcept;
template<class T, class D>
bool operator!=(nullptr_t, const unique_ptr<T, D>& x) noexcept;
```

12 *Returns:* `(bool)x`.

```
template<class T, class D>
bool operator<(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
bool operator<(nullptr_t, const unique_ptr<T, D>& x);
```

13 *Requires:* The specialization `less<unique_ptr<T, D>::pointer>` shall be a function object type (24.14) that induces a strict weak ordering (29.7) on the pointer values.

14 *Returns:* The first function template returns

```
less<unique_ptr<T, D>::pointer>()(x.get(), nullptr)
```

The second function template returns

```
less<unique_ptr<T, D>::pointer>()(nullptr, x.get())
```

```
template<class T, class D>
bool operator>(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
bool operator>(nullptr_t, const unique_ptr<T, D>& x);
```

15 *Returns:* The first function template returns `nullptr < x`. The second function template returns `x < nullptr`.

```
template<class T, class D>
bool operator<=(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
bool operator<=(nullptr_t, const unique_ptr<T, D>& x);
```

16 *Returns:* The first function template returns `!(nullptr < x)`. The second function template returns `!(x < nullptr)`.

```
template<class T, class D>
bool operator>=(const unique_ptr<T, D>& x, nullptr_t);
template<class T, class D>
bool operator>=(nullptr_t, const unique_ptr<T, D>& x);
```

17 *Returns:* The first function template returns `!(x < nullptr)`. The second function template returns `!(nullptr < x)`.



**24.11.1.6 I/O**

[unique.ptr.io]

```
template<class E, class T, class Y, class D>
basic_ostream<E, T>& operator<<(basic_ostream<E, T>& os, const unique_ptr<Y, D>& p);
```

1 *Effects:* Equivalent to: `os << p.get();`

2 *Returns:* `os.`

3 *Remarks:* This function shall not participate in overload resolution unless `os << p.get()` is a valid expression.

**24.11.2 Class bad\_weak\_ptr**

[util.smartptr.weak.bad]

```
namespace std {
 class bad_weak_ptr : public exception {
 public:
 bad_weak_ptr() noexcept;
 };
}
```

1 An exception of type `bad_weak_ptr` is thrown by the `shared_ptr` constructor taking a `weak_ptr`.

```
bad_weak_ptr() noexcept;
```

2 *Ensures:* `what()` returns an implementation-defined NTBS.

**24.11.3 Class template shared\_ptr**

[util.smartptr.shared]

1 The `shared_ptr` class template stores a pointer, usually obtained via `new`. `shared_ptr` implements semantics of shared ownership; the last remaining owner of the pointer is responsible for destroying the object, or otherwise releasing the resources associated with the stored pointer. A `shared_ptr` is said to be empty if it does not own a pointer.

```
namespace std {
 template<class T> class shared_ptr {
 public:
 using element_type = remove_extent_t<T>;
 using weak_type = weak_ptr<T>;

 // 24.11.3.1, constructors
 constexpr shared_ptr() noexcept;
 constexpr shared_ptr(nullptr_t) noexcept : shared_ptr() { }
 template<class Y>
 explicit shared_ptr(Y* p);
 template<class Y, class D>
 shared_ptr(Y* p, D d);
 template<class Y, class D, class A>
 shared_ptr(Y* p, D d, A a);
 template<class D>
 shared_ptr(nullptr_t p, D d);
 template<class D, class A>
 shared_ptr(nullptr_t p, D d, A a);
 template<class Y>
 shared_ptr(const shared_ptr<Y>& r, element_type* p) noexcept;
 shared_ptr(const shared_ptr& r) noexcept;
 template<class Y>
 shared_ptr(const shared_ptr<Y>& r) noexcept;
 shared_ptr(shared_ptr&& r) noexcept;
 template<class Y>
 shared_ptr(shared_ptr<Y>&& r) noexcept;
 template<class Y>
 explicit shared_ptr(const weak_ptr<Y>& r);
 template<class Y, class D>
 shared_ptr(unique_ptr<Y, D>&& r);

 // 24.11.3.2, destructor
 ~shared_ptr();
 };
}
```

```

// 24.11.3.3, assignment
shared_ptr& operator=(const shared_ptr& r) noexcept;
template<class Y>
 shared_ptr& operator=(const shared_ptr<Y>& r) noexcept;
shared_ptr& operator=(shared_ptr&& r) noexcept;
template<class Y>
 shared_ptr& operator=(shared_ptr<Y>&& r) noexcept;
template<class Y, class D>
 shared_ptr& operator=(unique_ptr<Y, D>&& r);

// 24.11.3.4, modifiers
void swap(shared_ptr& r) noexcept;
void reset() noexcept;
template<class Y>
 void reset(Y* p);
template<class Y, class D>
 void reset(Y* p, D d);
template<class Y, class D, class A>
 void reset(Y* p, D d, A a);

// 24.11.3.5, observers
element_type* get() const noexcept;
T& operator*() const noexcept;
T* operator->() const noexcept;
element_type& operator[](ptrdiff_t i) const;
long use_count() const noexcept;
explicit operator bool() const noexcept;
template<class U>
 bool owner_before(const shared_ptr<U>& b) const noexcept;
template<class U>
 bool owner_before(const weak_ptr<U>& b) const noexcept;
};

template<class T>
 shared_ptr(weak_ptr<T>) -> shared_ptr<T>;
template<class T, class D>
 shared_ptr(unique_ptr<T, D>) -> shared_ptr<T>;
}

```

- <sup>2</sup> Specializations of `shared_ptr` shall be *Cpp17CopyConstructible*, *Cpp17CopyAssignable*, and *Cpp17LessThanComparable*, allowing their use in standard containers. Specializations of `shared_ptr` shall be contextually convertible to `bool`, allowing their use in boolean expressions and declarations in conditions. The template parameter `T` of `shared_ptr` may be an incomplete type.

- <sup>3</sup> [Example:

```

 if (shared_ptr<X> px = dynamic_pointer_cast<X>(py)) {
 // do something with px
 }

```

— end example]

- <sup>4</sup> For purposes of determining the presence of a data race, member functions shall access and modify only the `shared_ptr` and `weak_ptr` objects themselves and not objects they refer to. Changes in `use_count()` do not reflect modifications that can introduce data races.
- <sup>5</sup> For the purposes of subclause 24.11, a pointer type `Y*` is said to be *compatible with* a pointer type `T*` when either `Y*` is convertible to `T*` or `Y` is `U[N]` and `T` is `cv U[]`.

### 24.11.3.1 Constructors

[util.smartptr.shared.const]

- <sup>1</sup> In the constructor definitions below, enables `shared_from_this` with `p`, for a pointer `p` of type `Y*`, means that if `Y` has an unambiguous and accessible base class that is a specialization of `enable_shared_from_this` (24.11.6), then `remove_cv_t<Y>*` shall be implicitly convertible to `T*` and the constructor evaluates the statement:

```

 if (p != nullptr && p->weak_this.expired())
 p->weak_this = shared_ptr<remove_cv_t<Y>>(*this, const_cast<remove_cv_t<Y>*>(p));

```

The assignment to the `weak_this` member is not atomic and conflicts with any potentially concurrent access to the same object (6.8.2).

```
constexpr shared_ptr() noexcept;
```

2 *Effects:* Constructs an empty `shared_ptr` object.

3 *Ensures:* `use_count() == 0` && `get() == nullptr`.

```
template<class Y> explicit shared_ptr(Y* p);
```

4 *Requires:* Y shall be a complete type. The expression `delete[] p`, when T is an array type, or `delete p`, when T is not an array type, shall have well-defined behavior, and shall not throw exceptions.

5 *Effects:* When T is not an array type, constructs a `shared_ptr` object that owns the pointer p. Otherwise, constructs a `shared_ptr` that owns p and a deleter of an unspecified type that calls `delete[] p`. When T is not an array type, enables `shared_from_this` with p. If an exception is thrown, `delete p` is called when T is not an array type, `delete[] p` otherwise.

6 *Ensures:* `use_count() == 1` && `get() == p`.

7 *Throws:* `bad_alloc`, or an implementation-defined exception when a resource other than memory could not be obtained.

8 *Remarks:* When T is an array type, this constructor shall not participate in overload resolution unless the expression `delete[] p` is well-formed and either T is `U[N]` and `Y(*)[N]` is convertible to `T*`, or T is `U[]` and `Y(*)[]` is convertible to `T*`. When T is not an array type, this constructor shall not participate in overload resolution unless the expression `delete p` is well-formed and `Y*` is convertible to `T*`.

```
template<class Y, class D> shared_ptr(Y* p, D d);
```

```
template<class Y, class D, class A> shared_ptr(Y* p, D d, A a);
```

```
template<class D> shared_ptr(nullptr_t p, D d);
```

```
template<class D, class A> shared_ptr(nullptr_t p, D d, A a);
```

9 *Requires:* Construction of d and a deleter of type D initialized with `std::move(d)` shall not throw exceptions. The expression `d(p)` shall have well-defined behavior and shall not throw exceptions. A shall satisfy the *Cpp17Allocator* requirements (Table 33).

10 *Effects:* Constructs a `shared_ptr` object that owns the object p and the deleter d. When T is not an array type, the first and second constructors enable `shared_from_this` with p. The second and fourth constructors shall use a copy of a to allocate memory for internal use. If an exception is thrown, `d(p)` is called.

11 *Ensures:* `use_count() == 1` && `get() == p`.

12 *Throws:* `bad_alloc`, or an implementation-defined exception when a resource other than memory could not be obtained.

13 *Remarks:* When T is an array type, this constructor shall not participate in overload resolution unless `is_move_constructible_v<D>` is `true`, the expression `d(p)` is well-formed, and either T is `U[N]` and `Y(*)[N]` is convertible to `T*`, or T is `U[]` and `Y(*)[]` is convertible to `T*`. When T is not an array type, this constructor shall not participate in overload resolution unless `is_move_constructible_v<D>` is `true`, the expression `d(p)` is well-formed, and `Y*` is convertible to `T*`.

```
template<class Y> shared_ptr(const shared_ptr<Y>& r, element_type* p) noexcept;
```

14 *Effects:* Constructs a `shared_ptr` instance that stores p and shares ownership with r.

15 *Ensures:* `get() == p` && `use_count() == r.use_count()`.

16 [Note: To avoid the possibility of a dangling pointer, the user of this constructor should ensure that p remains valid at least until the ownership group of r is destroyed. — end note]

17 [Note: This constructor allows creation of an empty `shared_ptr` instance with a non-null stored pointer. — end note]

```
shared_ptr(const shared_ptr& r) noexcept;
```

```
template<class Y> shared_ptr(const shared_ptr<Y>& r) noexcept;
```

18 *Remarks:* The second constructor shall not participate in overload resolution unless `Y*` is compatible with `T*`.

19 *Effects:* If `r` is empty, constructs an empty `shared_ptr` object; otherwise, constructs a `shared_ptr` object that shares ownership with `r`.

20 *Ensures:* `get() == r.get() && use_count() == r.use_count()`.

```
shared_ptr(shared_ptr&& r) noexcept;
template<class Y> shared_ptr(shared_ptr<Y>&& r) noexcept;
```

21 *Remarks:* The second constructor shall not participate in overload resolution unless `Y*` is compatible with `T*`.

22 *Effects:* Move constructs a `shared_ptr` instance from `r`.

23 *Ensures:* `*this` shall contain the old value of `r`. `r` shall be empty. `r.get() == nullptr`.

```
template<class Y> explicit shared_ptr(const weak_ptr<Y>& r);
```

24 *Effects:* Constructs a `shared_ptr` object that shares ownership with `r` and stores a copy of the pointer stored in `r`. If an exception is thrown, the constructor has no effect.

25 *Ensures:* `use_count() == r.use_count()`.

26 *Throws:* `bad_weak_ptr` when `r.expired()`.

27 *Remarks:* This constructor shall not participate in overload resolution unless `Y*` is compatible with `T*`.

```
template<class Y, class D> shared_ptr(unique_ptr<Y, D>&& r);
```

28 *Remarks:* This constructor shall not participate in overload resolution unless `Y*` is compatible with `T*` and `unique_ptr<Y, D>::pointer` is convertible to `element_type*`.

29 *Effects:* If `r.get() == nullptr`, equivalent to `shared_ptr()`. Otherwise, if `D` is not a reference type, equivalent to `shared_ptr(r.release(), r.get_deleter())`. Otherwise, equivalent to `shared_ptr(r.release(), ref(r.get_deleter()))`. If an exception is thrown, the constructor has no effect.

### 24.11.3.2 Destructor

[util.smartptr.shared.dest]

```
~shared_ptr();
```

1 *Effects:*

(1.1) — If `*this` is empty or shares ownership with another `shared_ptr` instance (`use_count() > 1`), there are no side effects.

(1.2) — Otherwise, if `*this` owns an object `p` and a deleter `d`, `d(p)` is called.

(1.3) — Otherwise, `*this` owns a pointer `p`, and `delete p` is called.

2 [Note: Since the destruction of `*this` decreases the number of instances that share ownership with `*this` by one, after `*this` has been destroyed all `shared_ptr` instances that shared ownership with `*this` will report a `use_count()` that is one less than its previous value. — end note]

### 24.11.3.3 Assignment

[util.smartptr.shared.assign]

```
shared_ptr& operator=(const shared_ptr& r) noexcept;
template<class Y> shared_ptr& operator=(const shared_ptr<Y>& r) noexcept;
```

1 *Effects:* Equivalent to `shared_ptr(r).swap(*this)`.

2 *Returns:* `*this`.

3 [Note: The use count updates caused by the temporary object construction and destruction are not observable side effects, so the implementation may meet the effects (and the implied guarantees) via different means, without creating a temporary. In particular, in the example:

```
shared_ptr<int> p(new int);
shared_ptr<void> q(p);
p = p;
q = p;
```

both assignments may be no-ops. — end note]

```
shared_ptr& operator=(shared_ptr&& r) noexcept;
template<class Y> shared_ptr& operator=(shared_ptr<Y>&& r) noexcept;
```

4 *Effects:* Equivalent to `shared_ptr(std::move(r)).swap(*this)`.

5 *Returns:* `*this`.

```
template<class Y, class D> shared_ptr& operator=(unique_ptr<Y, D>&& r);
```

6 *Effects:* Equivalent to `shared_ptr(std::move(r)).swap(*this)`.

7 *Returns:* `*this`.

#### 24.11.3.4 Modifiers

[util.smartptr.shared.mod]

```
void swap(shared_ptr& r) noexcept;
```

1 *Effects:* Exchanges the contents of `*this` and `r`.

```
void reset() noexcept;
```

2 *Effects:* Equivalent to `shared_ptr().swap(*this)`.

```
template<class Y> void reset(Y* p);
```

3 *Effects:* Equivalent to `shared_ptr(p).swap(*this)`.

```
template<class Y, class D> void reset(Y* p, D d);
```

4 *Effects:* Equivalent to `shared_ptr(p, d).swap(*this)`.

```
template<class Y, class D, class A> void reset(Y* p, D d, A a);
```

5 *Effects:* Equivalent to `shared_ptr(p, d, a).swap(*this)`.

#### 24.11.3.5 Observers

[util.smartptr.shared.obs]

```
element_type* get() const noexcept;
```

1 *Returns:* The stored pointer.

```
T& operator*() const noexcept;
```

2 *Requires:* `get() != 0`.

3 *Returns:* `*get()`.

4 *Remarks:* When `T` is an array type or *cv* void, it is unspecified whether this member function is declared. If it is declared, it is unspecified what its return type is, except that the declaration (although not necessarily the definition) of the function shall be well-formed.

```
T* operator->() const noexcept;
```

5 *Requires:* `get() != 0`.

6 *Returns:* `get()`.

7 *Remarks:* When `T` is an array type, it is unspecified whether this member function is declared. If it is declared, it is unspecified what its return type is, except that the declaration (although not necessarily the definition) of the function shall be well-formed.

```
element_type& operator[](ptrdiff_t i) const;
```

8 *Requires:* `get() != 0` && `i >= 0`. If `T` is `U[N]`, `i < N`.

9 *Returns:* `get()[i]`.

10 *Remarks:* When `T` is not an array type, it is unspecified whether this member function is declared. If it is declared, it is unspecified what its return type is, except that the declaration (although not necessarily the definition) of the function shall be well-formed.

11 *Throws:* Nothing.

```
long use_count() const noexcept;
```

12 *Returns:* The number of `shared_ptr` objects, `*this` included, that share ownership with `*this`, or 0 when `*this` is empty.

13 *Synchronization:* None.

14 [Note: `get() == nullptr` does not imply a specific return value of `use_count()`. — end note]

- 15 [Note: `weak_ptr<T>::lock()` can affect the return value of `use_count()`. — *end note*]
- 16 [Note: When multiple threads can affect the return value of `use_count()`, the result should be treated as approximate. In particular, `use_count() == 1` does not imply that accesses through a previously destroyed `shared_ptr` have in any sense completed. — *end note*]

`explicit operator bool() const noexcept;`

- 17 *Returns:* `get() != 0`.

`template<class U> bool owner_before(const shared_ptr<U>& b) const noexcept;`

`template<class U> bool owner_before(const weak_ptr<U>& b) const noexcept;`

- 18 *Returns:* An unspecified value such that

- (18.1) — `x.owner_before(y)` defines a strict weak ordering as defined in 29.7;
- (18.2) — under the equivalence relation defined by `owner_before`, `!a.owner_before(b) && !b.owner_before(a)`, two `shared_ptr` or `weak_ptr` instances are equivalent if and only if they share ownership or are both empty.

### 24.11.3.6 Creation

[`util.smartptr.shared.create`]

- 1 The common requirements that apply to all `make_shared` and `allocate_shared` overloads, unless specified otherwise, are described below.

`template<class T, ...>`

`shared_ptr<T> make_shared(args);`

`template<class T, class A, ...>`

`shared_ptr<T> allocate_shared(const A& a, args);`

- 2 *Requires:* A shall satisfy the *Cpp17Allocator* requirements (Table 33).

- 3 *Effects:* Allocates memory for an object of type T (or U[N] when T is U[], where N is determined from *args* as specified by the concrete overload). The object is initialized from *args* as specified by the concrete overload. The `allocate_shared` templates use a copy of *a* (rebound for an unspecified *value\_type*) to allocate memory. If an exception is thrown, the functions have no effect.

- 4 *Returns:* A `shared_ptr` instance that stores and owns the address of the newly constructed object.

- 5 *Ensures:* `r.get() != 0 && r.use_count() == 1`, where *r* is the return value.

- 6 *Throws:* `bad_alloc`, or an exception thrown from `allocate` or from the initialization of the object.

- 7 *Remarks:*

- (7.1) — Implementations should perform no more than one memory allocation. [Note: This provides efficiency equivalent to an intrusive smart pointer. — *end note*]
- (7.2) — When an object of an array type U is specified to have an initial value of *u* (of the same type), this shall be interpreted to mean that each array element of the object has as its initial value the corresponding element from *u*.
- (7.3) — When an object of an array type is specified to have a default initial value, this shall be interpreted to mean that each array element of the object has a default initial value.
- (7.4) — When a (sub)object of a non-array type U is specified to have an initial value of *v*, or U(1...), where 1... is a list of constructor arguments, `make_shared` shall initialize this (sub)object via the expression `::new(pv) U(v)` or `::new(pv) U(1...)` respectively, where *pv* has type `void*` and points to storage suitable to hold an object of type U.
- (7.5) — When a (sub)object of a non-array type U is specified to have an initial value of *v*, or U(1...), where 1... is a list of constructor arguments, `allocate_shared` shall initialize this (sub)object via the expression
- (7.5.1) — `allocator_traits<A2>::construct(a2, pv, v)` or
- (7.5.2) — `allocator_traits<A2>::construct(a2, pv, 1...)`

respectively, where *pv* points to storage suitable to hold an object of type U and *a2* of type A2 is a rebound copy of the allocator *a* passed to `allocate_shared` such that its *value\_type* is `remove_cv_t<U>`.

- (7.6) — When a (sub)object of non-array type `U` is specified to have a default initial value, `make_shared` shall initialize this (sub)object via the expression `::new(pv) U()`, where `pv` has type `void*` and points to storage suitable to hold an object of type `U`.
- (7.7) — When a (sub)object of non-array type `U` is specified to have a default initial value, `allocate_shared` shall initialize this (sub)object via the expression `allocator_traits<A2>::construct(a2, pv)`, where `pv` points to storage suitable to hold an object of type `U` and `a2` of type `A2` is a rebound copy of the allocator `a` passed to `allocate_shared` such that its `value_type` is `remove_cv_t<U>`.
- (7.8) — Array elements are initialized in ascending order of their addresses.
- (7.9) — When the lifetime of the object managed by the return value ends, or when the initialization of an array element throws an exception, the initialized elements are destroyed in the reverse order of their original construction.

[*Note:* These functions will typically allocate more memory than `sizeof(T)` to allow for internal bookkeeping structures such as reference counts. — *end note*]

```
template<class T, class... Args>
 shared_ptr<T> make_shared(Args&&... args); // T is not array
template<class T, class A, class... Args>
 shared_ptr<T> allocate_shared(const A& a, Args&&... args); // T is not array
```

8 *Returns:* A `shared_ptr` to an object of type `T` with an initial value `T(forward<Args>(args)...) .`

9 *Remarks:* These overloads shall only participate in overload resolution when `T` is not an array type. The `shared_ptr` constructors called by these functions enable `shared_from_this` with the address of the newly constructed object of type `T`.

10 [*Example:*

```
 shared_ptr<int> p = make_shared<int>(); // shared_ptr to int()
 shared_ptr<vector<int>> q = make_shared<vector<int>>(16, 1);
 // shared_ptr to vector of 16 elements with value 1
```

— *end example*]

```
template<class T> shared_ptr<T>
 make_shared(size_t N); // T is U[]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a, size_t N); // T is U[]
```

11 *Returns:* A `shared_ptr` to an object of type `U[N]` with a default initial value, where `U` is `remove_extent_t<T>`.

12 *Remarks:* These overloads shall only participate in overload resolution when `T` is of the form `U[]`.

13 [*Example:*

```
 shared_ptr<double[]> p = make_shared<double[]>(1024);
 // shared_ptr to a value-initialized double[1024]
 shared_ptr<double[] [2] [2]> q = make_shared<double[] [2] [2]>(6);
 // shared_ptr to a value-initialized double[6] [2] [2]
```

— *end example*]

```
template<class T>
 shared_ptr<T> make_shared(); // T is U[N]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a); // T is U[N]
```

14 *Returns:* A `shared_ptr` to an object of type `T` with a default initial value.

15 *Remarks:* These overloads shall only participate in overload resolution when `T` is of the form `U[N]`.

16 [*Example:*

```
 shared_ptr<double[1024]> p = make_shared<double[1024]>();
 // shared_ptr to a value-initialized double[1024]
 shared_ptr<double[6] [2] [2]> q = make_shared<double[6] [2] [2]>();
 // shared_ptr to a value-initialized double[6] [2] [2]
```

— *end example*]

```

template<class T>
 shared_ptr<T> make_shared(size_t N,
 const remove_extent_t<T>& u); // T is U[]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a, size_t N,
 const remove_extent_t<T>& u); // T is U[]

```

17 *Returns:* A `shared_ptr` to an object of type `U[N]`, where `U` is `remove_extent_t<T>` and each array element has an initial value of `u`.

18 *Remarks:* These overloads shall only participate in overload resolution when `T` is of the form `U[]`.

19 *[Example:*

```

 shared_ptr<double[]> p = make_shared<double[]>(1024, 1.0);
 // shared_ptr to a double[1024], where each element is 1.0
 shared_ptr<double[] [2]> q = make_shared<double[] [2]>(6, {1.0, 0.0});
 // shared_ptr to a double[6] [2], where each double[2] element is {1.0, 0.0}
 shared_ptr<vector<int>[]> r = make_shared<vector<int>[]>(4, {1, 2});
 // shared_ptr to a vector<int>[4], where each vector has contents {1, 2}
 — end example]

```

```

template<class T>
 shared_ptr<T> make_shared(const remove_extent_t<T>& u); // T is U[N]
template<class T, class A>
 shared_ptr<T> allocate_shared(const A& a,
 const remove_extent_t<T>& u); // T is U[N]

```

20 *Returns:* A `shared_ptr` to an object of type `T`, where each array element of type `remove_extent_t<T>` has an initial value of `u`.

21 *Remarks:* These overloads shall only participate in overload resolution when `T` is of the form `U[N]`.

22 *[Example:*

```

 shared_ptr<double[1024]> p = make_shared<double[1024]>(1.0);
 // shared_ptr to a double[1024], where each element is 1.0
 shared_ptr<double[6] [2]> q = make_shared<double[6] [2]>({1.0, 0.0});
 // shared_ptr to a double[6] [2], where each double[2] element is {1.0, 0.0}
 shared_ptr<vector<int>[4]> r = make_shared<vector<int>[4]>({1, 2});
 // shared_ptr to a vector<int>[4], where each vector has contents {1, 2}
 — end example]

```

### 24.11.3.7 Comparison

[util.smartptr.shared.cmp]

```

template<class T, class U>
 bool operator==(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;

```

1 *Returns:* `a.get() == b.get()`.

```

template<class T, class U>
 bool operator<(const shared_ptr<T>& a, const shared_ptr<U>& b) noexcept;

```

2 *Returns:* `less<>()(a.get(), b.get())`.

3 *[Note:* Defining a comparison function allows `shared_ptr` objects to be used as keys in associative containers. — end note]

```

template<class T>
 bool operator==(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator==(nullptr_t, const shared_ptr<T>& a) noexcept;

```

4 *Returns:* `!a`.

```

template<class T>
 bool operator!=(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator!=(nullptr_t, const shared_ptr<T>& a) noexcept;

```

5 *Returns:* `(bool)a`.



```

template<class T>
 bool operator<(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator<(nullptr_t, const shared_ptr<T>& a) noexcept;

```

6 *Returns:* The first function template returns  
`less<typename shared_ptr<T>::element_type*>(a.get(), nullptr)`  
The second function template returns  
`less<typename shared_ptr<T>::element_type*>(nullptr, a.get())`

```

template<class T>
 bool operator>(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator>(nullptr_t, const shared_ptr<T>& a) noexcept;

```

7 *Returns:* The first function template returns `nullptr < a`. The second function template returns `a < nullptr`.

```

template<class T>
 bool operator<=(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator<=(nullptr_t, const shared_ptr<T>& a) noexcept;

```

8 *Returns:* The first function template returns `!(nullptr < a)`. The second function template returns `!(a < nullptr)`.

```

template<class T>
 bool operator>=(const shared_ptr<T>& a, nullptr_t) noexcept;
template<class T>
 bool operator>=(nullptr_t, const shared_ptr<T>& a) noexcept;

```

9 *Returns:* The first function template returns `!(a < nullptr)`. The second function template returns `!(nullptr < a)`.

### 24.11.3.8 Specialized algorithms

[util.smartptr.shared.spec]

```

template<class T>
 void swap(shared_ptr<T>& a, shared_ptr<T>& b) noexcept;

```

1 *Effects:* Equivalent to `a.swap(b)`.

### 24.11.3.9 Casts

[util.smartptr.shared.cast]

```

template<class T, class U>
 shared_ptr<T> static_pointer_cast(const shared_ptr<U>& r) noexcept;

```

1 *Requires:* The expression `static_cast<T*>((U*)nullptr)` shall be well-formed.

2 *Returns:*

`shared_ptr<T>(r, static_cast<typename shared_ptr<T>::element_type*>(r.get()))`

3 [Note: The seemingly equivalent expression `shared_ptr<T>(static_cast<T*>(r.get()))` will eventually result in undefined behavior, attempting to delete the same object twice. — end note]

```

template<class T, class U>
 shared_ptr<T> dynamic_pointer_cast(const shared_ptr<U>& r) noexcept;

```

4 *Requires:* The expression `dynamic_cast<T*>((U*)nullptr)` shall be well-formed. The expression `dynamic_cast<typename shared_ptr<T>::element_type*>(r.get())` shall be well formed and shall have well-defined behavior.

5 *Returns:*

(5.1) — When `dynamic_cast<typename shared_ptr<T>::element_type*>(r.get())` returns a non-null value `p`, `shared_ptr<T>(r, p)`.

(5.2) — Otherwise, `shared_ptr<T>()`.

6 [Note: The seemingly equivalent expression `shared_ptr<T>(dynamic_cast<T*>(r.get()))` will eventually result in undefined behavior, attempting to delete the same object twice. — end note]

```
template<class T, class U>
 shared_ptr<T> const_pointer_cast(const shared_ptr<U>& r) noexcept;
```

7 *Requires:* The expression `const_cast<T*>((U*)nullptr)` shall be well-formed.

8 *Returns:*

```
 shared_ptr<T>(r, const_cast<typename shared_ptr<T>::element_type*>(r.get()))
```

9 [*Note:* The seemingly equivalent expression `shared_ptr<T>(const_cast<T*>(r.get()))` will eventually result in undefined behavior, attempting to delete the same object twice. — *end note*]

```
template<class T, class U>
 shared_ptr<T> reinterpret_pointer_cast(const shared_ptr<U>& r) noexcept;
```

10 *Requires:* The expression `reinterpret_cast<T*>((U*)nullptr)` shall be well-formed.

11 *Returns:*

```
 shared_ptr<T>(r, reinterpret_cast<typename shared_ptr<T>::element_type*>(r.get()))
```

12 [*Note:* The seemingly equivalent expression `shared_ptr<T>(reinterpret_cast<T*>(r.get()))` will eventually result in undefined behavior, attempting to delete the same object twice. — *end note*]

### 24.11.3.10 `get_deleter` [util.smartptr.getdeleter]

```
template<class D, class T>
 D* get_deleter(const shared_ptr<T>& p) noexcept;
```

1 *Returns:* If `p` owns a deleter `d` of type cv-unqualified `D`, returns `addressof(d)`; otherwise returns `nullptr`. The returned pointer remains valid as long as there exists a `shared_ptr` instance that owns `d`. [*Note:* It is unspecified whether the pointer remains valid longer than that. This can happen if the implementation doesn't destroy the deleter until all `weak_ptr` instances that share ownership with `p` have been destroyed. — *end note*]

### 24.11.3.11 `I/O` [util.smartptr.shared.io]

```
template<class E, class T, class Y>
 basic_ostream<E, T>& operator<<(basic_ostream<E, T>& os, const shared_ptr<Y>& p);
```

1 *Effects:* As if by: `os << p.get();`

2 *Returns:* `os`.

### 24.11.4 `Class template weak_ptr` [util.smartptr.weak]

1 The `weak_ptr` class template stores a weak reference to an object that is already managed by a `shared_ptr`. To access the object, a `weak_ptr` can be converted to a `shared_ptr` using the member function `lock`.

```
namespace std {
 template<class T> class weak_ptr {
 public:
 using element_type = remove_extent_t<T>;

 // 24.11.4.1, constructors
 constexpr weak_ptr() noexcept;
 template<class Y>
 weak_ptr(const shared_ptr<Y>& r) noexcept;
 weak_ptr(const weak_ptr& r) noexcept;
 template<class Y>
 weak_ptr(const weak_ptr<Y>& r) noexcept;
 weak_ptr(weak_ptr&& r) noexcept;
 template<class Y>
 weak_ptr(weak_ptr<Y>&& r) noexcept;

 // 24.11.4.2, destructor
 ~weak_ptr();

 // 24.11.4.3, assignment
 weak_ptr& operator=(const weak_ptr& r) noexcept;
```

```

template<class Y>
 weak_ptr& operator=(const weak_ptr<Y>& r) noexcept;
template<class Y>
 weak_ptr& operator=(const shared_ptr<Y>&& r) noexcept;
weak_ptr& operator=(weak_ptr&& r) noexcept;
template<class Y>
 weak_ptr& operator=(weak_ptr<Y>&& r) noexcept;

// 24.11.4.4, modifiers
void swap(weak_ptr& r) noexcept;
void reset() noexcept;

// 24.11.4.5, observers
long use_count() const noexcept;
bool expired() const noexcept;
shared_ptr<T> lock() const noexcept;
template<class U>
 bool owner_before(const shared_ptr<U>& b) const noexcept;
template<class U>
 bool owner_before(const weak_ptr<U>& b) const noexcept;
};

template<class T>
 weak_ptr(shared_ptr<T>) -> weak_ptr<T>;

// 24.11.4.6, specialized algorithms
template<class T>
 void swap(weak_ptr<T>& a, weak_ptr<T>& b) noexcept;
}

```

- 2 Specializations of `weak_ptr` shall be *Cpp17CopyConstructible* and *Cpp17CopyAssignable*, allowing their use in standard containers. The template parameter `T` of `weak_ptr` may be an incomplete type.

#### 24.11.4.1 Constructors

[util.smartptr.weak.const]

```
constexpr weak_ptr() noexcept;
```

- 1 *Effects:* Constructs an empty `weak_ptr` object.

- 2 *Ensures:* `use_count() == 0`.

```
weak_ptr(const weak_ptr& r) noexcept;
template<class Y> weak_ptr(const weak_ptr<Y>& r) noexcept;
template<class Y> weak_ptr(const shared_ptr<Y>& r) noexcept;
```

- 3 *Remarks:* The second and third constructors shall not participate in overload resolution unless `Y*` is compatible with `T*`.

- 4 *Effects:* If `r` is empty, constructs an empty `weak_ptr` object; otherwise, constructs a `weak_ptr` object that shares ownership with `r` and stores a copy of the pointer stored in `r`.

- 5 *Ensures:* `use_count() == r.use_count()`.

```
weak_ptr(weak_ptr&& r) noexcept;
template<class Y> weak_ptr(weak_ptr<Y>&& r) noexcept;
```

- 6 *Remarks:* The second constructor shall not participate in overload resolution unless `Y*` is compatible with `T*`.

- 7 *Effects:* Move constructs a `weak_ptr` instance from `r`.

- 8 *Ensures:* `*this` shall contain the old value of `r`. `r` shall be empty. `r.use_count() == 0`.

#### 24.11.4.2 Destructor

[util.smartptr.weak.dest]

```
~weak_ptr();
```

- 1 *Effects:* Destroys this `weak_ptr` object but has no effect on the object its stored pointer points to.

**24.11.4.3 Assignment**

[util.smartptr.weak.assign]

```
weak_ptr& operator=(const weak_ptr& r) noexcept;
template<class Y> weak_ptr& operator=(const weak_ptr<Y>& r) noexcept;
template<class Y> weak_ptr& operator=(const shared_ptr<Y>& r) noexcept;
```

1 *Effects:* Equivalent to `weak_ptr(r).swap(*this)`.

2 *Remarks:* The implementation may meet the effects (and the implied guarantees) via different means, without creating a temporary object.

3 *Returns:* `*this`.

```
weak_ptr& operator=(weak_ptr&& r) noexcept;
template<class Y> weak_ptr& operator=(weak_ptr<Y>&& r) noexcept;
```

4 *Effects:* Equivalent to `weak_ptr(std::move(r)).swap(*this)`.

5 *Returns:* `*this`.

**24.11.4.4 Modifiers**

[util.smartptr.weak.mod]

```
void swap(weak_ptr& r) noexcept;
```

1 *Effects:* Exchanges the contents of `*this` and `r`.

```
void reset() noexcept;
```

2 *Effects:* Equivalent to `weak_ptr().swap(*this)`.

**24.11.4.5 Observers**

[util.smartptr.weak.obs]

```
long use_count() const noexcept;
```

1 *Returns:* 0 if `*this` is empty; otherwise, the number of `shared_ptr` instances that share ownership with `*this`.

```
bool expired() const noexcept;
```

2 *Returns:* `use_count() == 0`.

```
shared_ptr<T> lock() const noexcept;
```

3 *Returns:* `expired() ? shared_ptr<T>() : shared_ptr<T>(*this)`, executed atomically.

```
template<class U> bool owner_before(const shared_ptr<U>& b) const noexcept;
```

```
template<class U> bool owner_before(const weak_ptr<U>& b) const noexcept;
```

4 *Returns:* An unspecified value such that

(4.1) — `x.owner_before(y)` defines a strict weak ordering as defined in 29.7;

(4.2) — under the equivalence relation defined by `owner_before`, `!a.owner_before(b) && !b.owner_before(a)`, two `shared_ptr` or `weak_ptr` instances are equivalent if and only if they share ownership or are both empty.

**24.11.4.6 Specialized algorithms**

[util.smartptr.weak.spec]

```
template<class T>
void swap(weak_ptr<T>& a, weak_ptr<T>& b) noexcept;
```

1 *Effects:* Equivalent to `a.swap(b)`.

**24.11.5 Class template owner\_less**

[util.smartptr.ownerless]

1 The class template `owner_less` allows ownership-based mixed comparisons of `shared` and `weak` pointers.

```
namespace std {
 template<class T = void> struct owner_less;

 template<class T> struct owner_less<shared_ptr<T>> {
 bool operator()(const shared_ptr<T>&, const shared_ptr<T>&) const noexcept;
 bool operator()(const shared_ptr<T>&, const weak_ptr<T>&) const noexcept;
 bool operator()(const weak_ptr<T>&, const shared_ptr<T>&) const noexcept;
 };
};
```

```

template<class T> struct owner_less<weak_ptr<T>> {
 bool operator()(const weak_ptr<T>&, const weak_ptr<T>&) const noexcept;
 bool operator()(const shared_ptr<T>&, const weak_ptr<T>&) const noexcept;
 bool operator()(const weak_ptr<T>&, const shared_ptr<T>&) const noexcept;
};

template<> struct owner_less<void> {
 template<class T, class U>
 bool operator()(const shared_ptr<T>&, const shared_ptr<U>&) const noexcept;
 template<class T, class U>
 bool operator()(const shared_ptr<T>&, const weak_ptr<U>&) const noexcept;
 template<class T, class U>
 bool operator()(const weak_ptr<T>&, const shared_ptr<U>&) const noexcept;
 template<class T, class U>
 bool operator()(const weak_ptr<T>&, const weak_ptr<U>&) const noexcept;

 using is_transparent = unspecified;
};

```

<sup>2</sup> `operator()` (`x`, `y`) shall return `x.owner_before(y)`. [*Note*: Note that

- (2.1) — `operator()` defines a strict weak ordering as defined in 29.7;
- (2.2) — under the equivalence relation defined by `operator()`, `!operator()(a, b) && !operator()(b, a)`, two `shared_ptr` or `weak_ptr` instances are equivalent if and only if they share ownership or are both empty.

— *end note*]

#### 24.11.6 Class template `enable_shared_from_this` [`util.smartptr.enab`]

<sup>1</sup> A class `T` can inherit from `enable_shared_from_this<T>` to inherit the `shared_from_this` member functions that obtain a `shared_ptr` instance pointing to `*this`.

<sup>2</sup> [*Example*:

```

struct X: public enable_shared_from_this<X> { };

int main() {
 shared_ptr<X> p(new X);
 shared_ptr<X> q = p->shared_from_this();
 assert(p == q);
 assert(!p.owner_before(q) && !q.owner_before(p)); // p and q share ownership
}

```

— *end example*]

```

namespace std {
 template<class T> class enable_shared_from_this {
 protected:
 constexpr enable_shared_from_this() noexcept;
 enable_shared_from_this(const enable_shared_from_this&) noexcept;
 enable_shared_from_this& operator=(const enable_shared_from_this&) noexcept;
 ~enable_shared_from_this();

 public:
 shared_ptr<T> shared_from_this();
 shared_ptr<T const> shared_from_this() const;
 weak_ptr<T> weak_from_this() noexcept;
 weak_ptr<T const> weak_from_this() const noexcept;

 private:
 mutable weak_ptr<T> weak_this; // exposition only
 };
}

```

<sup>3</sup> The template parameter `T` of `enable_shared_from_this` may be an incomplete type.

```
constexpr enable_shared_from_this() noexcept;
enable_shared_from_this(const enable_shared_from_this<T>&) noexcept;
```

4 *Effects:* Value-initializes `weak_this`.

```
enable_shared_from_this<T>& operator=(const enable_shared_from_this<T>&) noexcept;
```

5 *Returns:* `*this`.

6 [*Note:* `weak_this` is not changed. — *end note*]

```
shared_ptr<T> shared_from_this();
shared_ptr<T const> shared_from_this() const;
```

7 *Returns:* `shared_ptr<T>(weak_this)`.

```
weak_ptr<T> weak_from_this() noexcept;
weak_ptr<T const> weak_from_this() const noexcept;
```

8 *Returns:* `weak_this`.

### 24.11.7 Smart pointer hash support

[`util.smartptr.hash`]

```
template<class T, class D> struct hash<unique_ptr<T, D>>;
```

1 Letting `UP` be `unique_ptr<T,D>`, the specialization `hash<UP>` is enabled (24.14.16) if and only if `hash<typename UP::pointer>` is enabled. When enabled, for an object `p` of type `UP`, `hash<UP>()` (`p`) shall evaluate to the same value as `hash<typename UP::pointer>()` (`p.get()`). The member functions are not guaranteed to be `noexcept`.

```
template<class T> struct hash<shared_ptr<T>>;
```

2 For an object `p` of type `shared_ptr<T>`, `hash<shared_ptr<T>>()` (`p`) shall evaluate to the same value as `hash<typename shared_ptr<T>::element_type*>()` (`p.get()`).

### 24.11.8 Atomic specializations for smart pointers

[`util.smartptr.atomic`]

1 The library provides partial specializations of the `atomic` template for shared-ownership smart pointers. The behavior of all operations is as specified in 33.7, unless specified otherwise. The template parameter `T` of these partial specializations may be an incomplete type.

2 All changes to an atomic smart pointer in this subclause, and all associated `use_count` increments, are guaranteed to be performed atomically. Associated `use_count` decrements are sequenced after the atomic operation, but are not required to be part of it. Any associated deletion and deallocation are sequenced after the atomic update step and are not part of the atomic operation. [*Note:* If the atomic operation uses locks, locks acquired by the implementation will be held when any `use_count` adjustments are performed, and will not be held when any destruction or deallocation resulting from this is performed. — *end note*]

#### 24.11.8.1 Atomic specialization for `shared_ptr`

[`util.smartptr.atomic.shared`]

```
namespace std {
 template<class T> struct atomic<shared_ptr<T>> {
 using value_type = shared_ptr<T>;
 static constexpr bool is_always_lock_free = implementation-defined;

 bool is_lock_free() const noexcept;
 void store(shared_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
 shared_ptr<T> load(memory_order order = memory_order::seq_cst) const noexcept;
 operator shared_ptr<T>() const noexcept;

 shared_ptr<T> exchange(shared_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;

 bool compare_exchange_weak(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
 bool compare_exchange_strong(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
 };
}
```

```

bool compare_exchange_weak(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
bool compare_exchange_strong(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;

constexpr atomic() noexcept = default;
atomic(shared_ptr<T> desired) noexcept;
atomic(const atomic&) = delete;
void operator=(const atomic&) = delete;
void operator=(shared_ptr<T> desired) noexcept;

private:
 shared_ptr<T> p; // exposition only
};
}

constexpr atomic() noexcept = default;
1 Effects: Initializes p{}.

atomic(shared_ptr<T> desired) noexcept;
2 Effects: Initializes the object with the value desired. Initialization is not an atomic operation
(6.8.2). [Note: It is possible to have an access to an atomic object A race with its construction, for
example, by communicating the address of the just-constructed object A to another thread via memory_-
order::relaxed operations on a suitable atomic pointer variable, and then immediately accessing A in
the receiving thread. This results in undefined behavior. — end note]

void store(shared_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
3 Requires: The order argument shall not be memory_order::consume, memory_order::acquire, nor
memory_order::acq_rel.
4 Effects: Atomically replaces the value pointed to by this with the value of desired as if by
p.swap(desired). Memory is affected according to the value of order.

void operator=(shared_ptr<T> desired) noexcept;
5 Effects: Equivalent to store(desired).

shared_ptr<T> load(memory_order order = memory_order::seq_cst) const noexcept;
6 Requires: order shall not be memory_order::release nor memory_order::acq_rel.
7 Effects: Memory is affected according to the value of order.
8 Returns: Atomically returns p.

operator shared_ptr<T>() const noexcept;
9 Effects: Equivalent to: return load();

shared_ptr<T> exchange(shared_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
10 Effects: Atomically replaces p with desired as if by p.swap(desired). Memory is affected according
to the value of order. This is an atomic read-modify-write operation (6.8.2.1).
11 Returns: Atomically returns the value of p immediately before the effects.

bool compare_exchange_weak(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
bool compare_exchange_strong(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
12 Requires: failure shall not be memory_order::release nor memory_order::acq_rel.
13 Effects: If p is equivalent to expected, assigns desired to p and has synchronization semantics
corresponding to the value of success, otherwise assigns p to expected and has synchronization
semantics corresponding to the value of failure.
14 Returns: true if p was equivalent to expected, false otherwise.

```

15 *Remarks:* Two `shared_ptr` objects are equivalent if they store the same pointer value and either share ownership, or both are empty. The weak form may fail spuriously. See 33.7.1.

16 If the operation returns `true`, `expected` is not accessed after the atomic update and the operation is an atomic read-modify-write operation (6.8.2) on the memory pointed to by `this`. Otherwise, the operation is an atomic load operation on that memory, and `expected` is updated with the existing value read from the atomic object in the attempted atomic update. The `use_count` update corresponding to the write to `expected` is part of the atomic operation. The write to `expected` itself is not required to be part of the atomic operation.

```
bool compare_exchange_weak(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
```

17 *Effects:* Equivalent to:

```
return compare_exchange_weak(expected, desired, order, fail_order);
```

where `fail_order` is the same as `order` except that a value of `memory_order::acq_rel` shall be replaced by the value `memory_order::acquire` and a value of `memory_order::release` shall be replaced by the value `memory_order::relaxed`.

```
bool compare_exchange_strong(shared_ptr<T>& expected, shared_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
```

18 *Effects:* Equivalent to:

```
return compare_exchange_strong(expected, desired, order, fail_order);
```

where `fail_order` is the same as `order` except that a value of `memory_order::acq_rel` shall be replaced by the value `memory_order::acquire` and a value of `memory_order::release` shall be replaced by the value `memory_order::relaxed`.

#### 24.11.8.2 Atomic specialization for `weak_ptr`

[`util.smartptr.atomic.weak`]

```
namespace std {
template<class T> struct atomic<weak_ptr<T>> {
 using value_type = weak_ptr<T>;
 static constexpr bool is_always_lock_free = implementation-defined;

 bool is_lock_free() const noexcept;
 void store(weak_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
 weak_ptr<T> load(memory_order order = memory_order::seq_cst) const noexcept;
 operator weak_ptr<T>() const noexcept;

 weak_ptr<T> exchange(weak_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;

 bool compare_exchange_weak(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
 bool compare_exchange_strong(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;

 bool compare_exchange_weak(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
 bool compare_exchange_strong(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;

 constexpr atomic() noexcept = default;
 atomic(weak_ptr<T> desired) noexcept;
 atomic(const atomic&) = delete;
 void operator=(const atomic&) = delete;
 void operator=(weak_ptr<T> desired) noexcept;

private:
 weak_ptr<T> p; // exposition only
};
}
```



```

constexpr atomic() noexcept = default;
1 Effects: Initializes p{ }.

atomic(weak_ptr<T> desired) noexcept;
2 Effects: Initializes the object with the value desired. Initialization is not an atomic operation
(6.8.2). [Note: It is possible to have an access to an atomic object A race with its construction, for
example, by communicating the address of the just-constructed object A to another thread via memory_
order::relaxed operations on a suitable atomic pointer variable, and then immediately accessing A in
the receiving thread. This results in undefined behavior. — end note]

void store(weak_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
3 Requires: The order argument shall not be memory_order::consume, memory_order::acquire, nor
memory_order::acq_rel.
4 Effects: Atomically replaces the value pointed to by this with the value of desired as if by
p.swap(desired). Memory is affected according to the value of order.

void operator=(weak_ptr<T> desired) noexcept;
5 Effects: Equivalent to store(desired).

weak_ptr<T> load(memory_order order = memory_order::seq_cst) const noexcept;
6 Requires: order shall not be memory_order::release nor memory_order::acq_rel.
7 Effects: Memory is affected according to the value of order.
8 Returns: Atomically returns p.

operator weak_ptr<T>() const noexcept;
9 Effects: Equivalent to: return load();

weak_ptr<T> exchange(weak_ptr<T> desired, memory_order order = memory_order::seq_cst) noexcept;
10 Effects: Atomically replaces p with desired as if by p.swap(desired). Memory is affected according
to the value of order. This is an atomic read-modify-write operation (6.8.2.1).
11 Returns: Atomically returns the value of p immediately before the effects.

bool compare_exchange_weak(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
bool compare_exchange_strong(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order success, memory_order failure) noexcept;
12 Requires: failure shall not be memory_order::release nor memory_order::acq_rel.
13 Effects: If p is equivalent to expected, assigns desired to p and has synchronization semantics
corresponding to the value of success, otherwise assigns p to expected and has synchronization
semantics corresponding to the value of failure.
14 Returns: true if p was equivalent to expected, false otherwise.
15 Remarks: Two weak_ptr objects are equivalent if they store the same pointer value and either share
ownership, or both are empty. The weak form may fail spuriously. See 33.7.1.
16 If the operation returns true, expected is not accessed after the atomic update and the operation
is an atomic read-modify-write operation (6.8.2) on the memory pointed to by this. Otherwise, the
operation is an atomic load operation on that memory, and expected is updated with the existing value
read from the atomic object in the attempted atomic update. The use_count update corresponding to
the write to expected is part of the atomic operation. The write to expected itself is not required to
be part of the atomic operation.

bool compare_exchange_weak(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
17 Effects: Equivalent to:
 return compare_exchange_weak(expected, desired, order, fail_order);

```

where `fail_order` is the same as `order` except that a value of `memory_order::acq_rel` shall be replaced by the value `memory_order::acquire` and a value of `memory_order::release` shall be replaced by the value `memory_order::relaxed`.

```
bool compare_exchange_strong(weak_ptr<T>& expected, weak_ptr<T> desired,
 memory_order order = memory_order::seq_cst) noexcept;
```

18 *Effects:* Equivalent to:

```
return compare_exchange_strong(expected, desired, order, fail_order);
```

where `fail_order` is the same as `order` except that a value of `memory_order::acq_rel` shall be replaced by the value `memory_order::acquire` and a value of `memory_order::release` shall be replaced by the value `memory_order::relaxed`.

## 24.12 Memory resources

[mem.res]

### 24.12.1 Header <memory\_resource> synopsis

[mem.res.syn]

```
namespace std::pmr {
 // 24.12.2, class memory_resource
 class memory_resource;

 bool operator==(const memory_resource& a, const memory_resource& b) noexcept;
 bool operator!=(const memory_resource& a, const memory_resource& b) noexcept;

 // 24.12.3, class template polymorphic_allocator
 template<class Tp> class polymorphic_allocator;

 template<class T1, class T2>
 bool operator==(const polymorphic_allocator<T1>& a,
 const polymorphic_allocator<T2>& b) noexcept;
 template<class T1, class T2>
 bool operator!=(const polymorphic_allocator<T1>& a,
 const polymorphic_allocator<T2>& b) noexcept;

 // 24.12.4, global memory resources
 memory_resource* new_delete_resource() noexcept;
 memory_resource* null_memory_resource() noexcept;
 memory_resource* set_default_resource(memory_resource* r) noexcept;
 memory_resource* get_default_resource() noexcept;

 // 24.12.5, pool resource classes
 struct pool_options;
 class synchronized_pool_resource;
 class unsynchronized_pool_resource;
 class monotonic_buffer_resource;
}
```

### 24.12.2 Class `memory_resource`

[mem.res.class]

<sup>1</sup> The `memory_resource` class is an abstract interface to an unbounded set of classes encapsulating memory resources.

```
namespace std::pmr {
 class memory_resource {
 static constexpr size_t max_align = alignof(max_align_t); // exposition only

 public:
 memory_resource(const memory_resource&) = default;
 virtual ~memory_resource();

 memory_resource& operator=(const memory_resource&) = default;

 [[nodiscard]] void* allocate(size_t bytes, size_t alignment = max_align);
 void deallocate(void* p, size_t bytes, size_t alignment = max_align);

 bool is_equal(const memory_resource& other) const noexcept;
```

```

private:
 virtual void* do_allocate(size_t bytes, size_t alignment) = 0;
 virtual void do_deallocate(void* p, size_t bytes, size_t alignment) = 0;

 virtual bool do_is_equal(const memory_resource& other) const noexcept = 0;
};
}

```

#### 24.12.2.1 `memory_resource` public member functions [mem.res.public]

```
~memory_resource();
```

1 *Effects:* Destroys this `memory_resource`.

```
[[nodiscard]] void* allocate(size_t bytes, size_t alignment = max_align);
```

2 *Effects:* Equivalent to: `return do_allocate(bytes, alignment);`

```
void deallocate(void* p, size_t bytes, size_t alignment = max_align);
```

3 *Effects:* Equivalent to `do_deallocate(p, bytes, alignment)`.

```
bool is_equal(const memory_resource& other) const noexcept;
```

4 *Effects:* Equivalent to: `return do_is_equal(other);`

#### 24.12.2.2 `memory_resource` private virtual member functions [mem.res.private]

```
virtual void* do_allocate(size_t bytes, size_t alignment) = 0;
```

1 *Requires:* `alignment` shall be a power of two.

2 *Returns:* A derived class shall implement this function to return a pointer to allocated storage (6.6.4.4.1) with a size of at least `bytes`, aligned to the specified `alignment`.

3 *Throws:* A derived class implementation shall throw an appropriate exception if it is unable to allocate memory with the requested size and alignment.

```
virtual void do_deallocate(void* p, size_t bytes, size_t alignment) = 0;
```

4 *Requires:* `p` shall have been returned from a prior call to `allocate(bytes, alignment)` on a memory resource equal to `*this`, and the storage at `p` shall not yet have been deallocated.

5 *Effects:* A derived class shall implement this function to dispose of allocated storage.

6 *Throws:* Nothing.

```
virtual bool do_is_equal(const memory_resource& other) const noexcept = 0;
```

7 *Returns:* A derived class shall implement this function to return `true` if memory allocated from `this` can be deallocated from `other` and vice-versa, otherwise `false`. [Note: The most-derived type of `other` might not match the type of `this`. For a derived class D, an implementation of this function could immediately return `false` if `dynamic_cast<const D*>(&other) == nullptr`. — end note]

#### 24.12.2.3 `memory_resource` equality [mem.res.eq]

```
bool operator==(const memory_resource& a, const memory_resource& b) noexcept;
```

1 *Returns:* `&a == &b || a.is_equal(b)`.

```
bool operator!=(const memory_resource& a, const memory_resource& b) noexcept;
```

2 *Returns:* `!(a == b)`.

#### 24.12.3 Class template `polymorphic_allocator` [mem.poly.allocator.class]

1 A specialization of class template `pmr::polymorphic_allocator` satisfies the *Cpp17Allocator* requirements (Table 33). Constructed with different memory resources, different instances of the same specialization of `pmr::polymorphic_allocator` can exhibit entirely different allocation behavior. This runtime polymorphism allows objects that use `polymorphic_allocator` to behave as if they used different allocator types at run time even though they use the same static allocator type.

```

namespace std::pmr {
 template<class Tp> class polymorphic_allocator {
 memory_resource* memory_rsrc; // exposition only

 public:
 using value_type = Tp;

 // 24.12.3.1, constructors
 polymorphic_allocator() noexcept;
 polymorphic_allocator(memory_resource* r);

 polymorphic_allocator(const polymorphic_allocator& other) = default;

 template<class U>
 polymorphic_allocator(const polymorphic_allocator<U>& other) noexcept;

 polymorphic_allocator& operator=(const polymorphic_allocator& rhs) = delete;

 // 24.12.3.2, member functions
 [[nodiscard]] Tp* allocate(size_t n);
 void deallocate(Tp* p, size_t n);

 template<class T, class... Args>
 void construct(T* p, Args&&... args);

 template<class T1, class T2, class... Args1, class... Args2>
 void construct(pair<T1, T2>* p, piecewise_construct_t,
 tuple<Args1...> x, tuple<Args2...> y);
 template<class T1, class T2>
 void construct(pair<T1, T2>* p);
 template<class T1, class T2, class U, class V>
 void construct(pair<T1, T2>* p, U&& x, V&& y);
 template<class T1, class T2, class U, class V>
 void construct(pair<T1, T2>* p, const pair<U, V>& pr);
 template<class T1, class T2, class U, class V>
 void construct(pair<T1, T2>* p, pair<U, V>&& pr);

 template<class T>
 void destroy(T* p);

 polymorphic_allocator select_on_container_copy_construction() const;

 memory_resource* resource() const;
 };
}

```

### 24.12.3.1 polymorphic\_allocator constructors

[mem.poly.allocator.ctor]

```
polymorphic_allocator() noexcept;
```

<sup>1</sup> *Effects:* Sets `memory_rsrc` to `get_default_resource()`.

```
polymorphic_allocator(memory_resource* r);
```

<sup>2</sup> *Requires:* `r` is non-null.

<sup>3</sup> *Effects:* Sets `memory_rsrc` to `r`.

<sup>4</sup> *Throws:* Nothing.

<sup>5</sup> [*Note:* This constructor provides an implicit conversion from `memory_resource*`. — *end note*]

```
template<class U> polymorphic_allocator(const polymorphic_allocator<U>& other) noexcept;
```

<sup>6</sup> *Effects:* Sets `memory_rsrc` to `other.resource()`.

### 24.12.3.2 polymorphic\_allocator member functions [mem.poly\_allocator.mem]

```
[[nodiscard]] Tp* allocate(size_t n);
```

1 *Effects:* Equivalent to:

```
return static_cast<Tp*>(memory_rsrc->allocate(n * sizeof(Tp), alignof(Tp)));
```

```
void deallocate(Tp* p, size_t n);
```

2 *Requires:* p was allocated from a memory resource x, equal to \*memory\_rsrc, using x.allocate(n \* sizeof(Tp), alignof(Tp)).

3 *Effects:* Equivalent to memory\_rsrc->deallocate(p, n \* sizeof(Tp), alignof(Tp)).

4 *Throws:* Nothing.

```
template<class T, class... Args>
void construct(T* p, Args&&... args);
```

5 *Requires:* Uses-allocator construction of T with allocator \*this (see 24.10.8.2) and constructor arguments std::forward<Args>(args)... is well-formed. [*Note:* Uses-allocator construction is always well-formed for types that do not use allocators. — *end note*]

6 *Effects:* Construct a T object in the storage whose address is represented by p by uses-allocator construction with allocator \*this and constructor arguments std::forward<Args>(args)....

7 *Throws:* Nothing unless the constructor for T throws.

8 *Remarks:* This function shall not participate in overload resolution if T is a specialization of pair.

```
template<class T1, class T2, class... Args1, class... Args2>
void construct(pair<T1, T2>* p, piecewise_construct_t, tuple<Args1...> x, tuple<Args2...> y);
```

9 [*Note:* This member function and the construct member functions that follow are overloads for piecewise construction of pairs (24.4.2). — *end note*]

10 *Effects:* Let xprime be a tuple constructed from x according to the appropriate rule from the following list. [*Note:* The following description can be summarized as constructing a pair<T1, T2> object in the storage whose address is represented by p, as if by separate uses-allocator construction with allocator \*this (24.10.8.2) of p->first using the elements of x and p->second using the elements of y. — *end note*]

(10.1) — If uses\_allocator\_v<T1, polymorphic\_allocator> is false and is\_constructible\_v<T1, Args1...> is true, then xprime is x.

(10.2) — Otherwise, if uses\_allocator\_v<T1, polymorphic\_allocator> is true and is\_constructible\_v<T1, allocator\_arg\_t, polymorphic\_allocator, Args1...> is true, then xprime is tuple\_cat(make\_tuple(allocator\_arg, \*this), std::move(x)).

(10.3) — Otherwise, if uses\_allocator\_v<T1, polymorphic\_allocator> is true and is\_constructible\_v<T1, Args1..., polymorphic\_allocator> is true, then xprime is tuple\_cat(std::move(x), make\_tuple(\*this)).

(10.4) — Otherwise the program is ill formed.

Let yprime be a tuple constructed from y according to the appropriate rule from the following list:

(10.5) — If uses\_allocator\_v<T2, polymorphic\_allocator> is false and is\_constructible\_v<T2, Args2...> is true, then yprime is y.

(10.6) — Otherwise, if uses\_allocator\_v<T2, polymorphic\_allocator> is true and is\_constructible\_v<T2, allocator\_arg\_t, polymorphic\_allocator, Args2...> is true, then yprime is tuple\_cat(make\_tuple(allocator\_arg, \*this), std::move(y)).

(10.7) — Otherwise, if uses\_allocator\_v<T2, polymorphic\_allocator> is true and is\_constructible\_v<T2, Args2..., polymorphic\_allocator> is true, then yprime is tuple\_cat(std::move(y), make\_tuple(\*this)).

(10.8) — Otherwise the program is ill formed.

Then, using `piecewise_construct`, `xprime`, and `yprime` as the constructor arguments, this function constructs a `pair<T1, T2>` object in the storage whose address is represented by `p`.

```
template<class T1, class T2>
void construct(pair<T1, T2>* p);
```

11 *Effects:* Equivalent to:

```
construct(p, piecewise_construct, tuple<>(), tuple<>());
```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, U&& x, V&& y);
```

12 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(std::forward<U>(x)),
 forward_as_tuple(std::forward<V>(y)));
```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, const pair<U, V>& pr);
```

13 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(pr.first),
 forward_as_tuple(pr.second));
```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, pair<U, V>&& pr);
```

14 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(std::forward<U>(pr.first)),
 forward_as_tuple(std::forward<V>(pr.second)));
```

```
template<class T>
void destroy(T* p);
```

15 *Effects:* As if by `p->~T()`.

```
polymorphic_allocator select_on_container_copy_construction() const;
```

16 *Returns:* `polymorphic_allocator()`.

17 [*Note:* The memory resource is not propagated. — *end note*]

```
memory_resource* resource() const;
```

18 *Returns:* `memory_rsrc`.

### 24.12.3.3 polymorphic\_allocator equality

[mem.poly.allocator.eq]

```
template<class T1, class T2>
bool operator==(const polymorphic_allocator<T1>& a,
 const polymorphic_allocator<T2>& b) noexcept;
```

1 *Returns:* `*a.resource() == *b.resource()`.

```
template<class T1, class T2>
bool operator!=(const polymorphic_allocator<T1>& a,
 const polymorphic_allocator<T2>& b) noexcept;
```

2 *Returns:* `!(a == b)`.

### 24.12.4 Access to program-wide memory\_resource objects

[mem.res.global]

```
memory_resource* new_delete_resource() noexcept;
```

1 *Returns:* A pointer to a static-duration object of a type derived from `memory_resource` that can serve as a resource for allocating memory using `::operator new` and `::operator delete`. The same value is returned every time this function is called. For a return value `p` and a memory resource `r`, `p->is_equal(r)` returns `&r == p`.

```
memory_resource* null_memory_resource() noexcept;
```

2 *Returns:* A pointer to a static-duration object of a type derived from `memory_resource` for which `allocate()` always throws `bad_alloc` and for which `deallocate()` has no effect. The same value is returned every time this function is called. For a return value `p` and a memory resource `r`, `p->is_equal(r)` returns `&r == p`.

3 The *default memory resource pointer* is a pointer to a memory resource that is used by certain facilities when an explicit memory resource is not supplied through the interface. Its initial value is the return value of `new_delete_resource()`.

```
memory_resource* set_default_resource(memory_resource* r) noexcept;
```

4 *Effects:* If `r` is non-null, sets the value of the default memory resource pointer to `r`, otherwise sets the default memory resource pointer to `new_delete_resource()`.

5 *Returns:* The previous value of the default memory resource pointer.

6 *Remarks:* Calling the `set_default_resource` and `get_default_resource` functions shall not incur a data race. A call to the `set_default_resource` function shall synchronize with subsequent calls to the `set_default_resource` and `get_default_resource` functions.

```
memory_resource* get_default_resource() noexcept;
```

7 *Returns:* The current value of the default memory resource pointer.

## 24.12.5 Pool resource classes

[mem.res.pool]

### 24.12.5.1 Classes `synchronized_pool_resource` and `unsynchronized_pool_resource`

[mem.res.pool.overview]

1 The `synchronized_pool_resource` and `unsynchronized_pool_resource` classes (collectively called *pool resource classes*) are general-purpose memory resources having the following qualities:

- (1.1) — Each resource frees its allocated memory on destruction, even if `deallocate` has not been called for some of the allocated blocks.
- (1.2) — A pool resource consists of a collection of *pools*, serving requests for different block sizes. Each individual pool manages a collection of *chunks* that are in turn divided into blocks of uniform size, returned via calls to `do_allocate`. Each call to `do_allocate(size, alignment)` is dispatched to the pool serving the smallest blocks accommodating at least `size` bytes.
- (1.3) — When a particular pool is exhausted, allocating a block from that pool results in the allocation of an additional chunk of memory from the *upstream allocator* (supplied at construction), thus replenishing the pool. With each successive replenishment, the chunk size obtained increases geometrically. [Note: By allocating memory in chunks, the pooling strategy increases the chance that consecutive allocations will be close together in memory. — *end note*]
- (1.4) — Allocation requests that exceed the largest block size of any pool are fulfilled directly from the upstream allocator.
- (1.5) — A `pool_options` struct may be passed to the pool resource constructors to tune the largest block size and the maximum chunk size.

2 A `synchronized_pool_resource` may be accessed from multiple threads without external synchronization and may have thread-specific pools to reduce synchronization costs. An `unsynchronized_pool_resource` class may not be accessed from multiple threads simultaneously and thus avoids the cost of synchronization entirely in single-threaded applications.

```
namespace std::pmr {
 struct pool_options {
 size_t max_blocks_per_chunk = 0;
 size_t largest_required_pool_block = 0;
 };

 class synchronized_pool_resource : public memory_resource {
 public:
 synchronized_pool_resource(const pool_options& opts, memory_resource* upstream);
 };
};
```

```

synchronized_pool_resource()
 : synchronized_pool_resource(pool_options(), get_default_resource()) {}
explicit synchronized_pool_resource(memory_resource* upstream)
 : synchronized_pool_resource(pool_options(), upstream) {}
explicit synchronized_pool_resource(const pool_options& opts)
 : synchronized_pool_resource(opts, get_default_resource()) {}

synchronized_pool_resource(const synchronized_pool_resource&) = delete;
virtual ~synchronized_pool_resource();

synchronized_pool_resource& operator=(const synchronized_pool_resource&) = delete;

void release();
memory_resource* upstream_resource() const;
pool_options options() const;

protected:
void* do_allocate(size_t bytes, size_t alignment) override;
void do_deallocate(void* p, size_t bytes, size_t alignment) override;

bool do_is_equal(const memory_resource& other) const noexcept override;
};

class unsynchronized_pool_resource : public memory_resource {
public:
 unsynchronized_pool_resource(const pool_options& opts, memory_resource* upstream);

 unsynchronized_pool_resource()
 : unsynchronized_pool_resource(pool_options(), get_default_resource()) {}
 explicit unsynchronized_pool_resource(memory_resource* upstream)
 : unsynchronized_pool_resource(pool_options(), upstream) {}
 explicit unsynchronized_pool_resource(const pool_options& opts)
 : unsynchronized_pool_resource(opts, get_default_resource()) {}

 unsynchronized_pool_resource(const unsynchronized_pool_resource&) = delete;
 virtual ~unsynchronized_pool_resource();

 unsynchronized_pool_resource& operator=(const unsynchronized_pool_resource&) = delete;

 void release();
 memory_resource* upstream_resource() const;
 pool_options options() const;

protected:
 void* do_allocate(size_t bytes, size_t alignment) override;
 void do_deallocate(void* p, size_t bytes, size_t alignment) override;

 bool do_is_equal(const memory_resource& other) const noexcept override;
};
}

```

#### 24.12.5.2 pool\_options data members [mem.res.pool.options]

- <sup>1</sup> The members of `pool_options` comprise a set of constructor options for pool resources. The effect of each option on the pool resource behavior is described below:

```
size_t max_blocks_per_chunk;
```

- <sup>2</sup> The maximum number of blocks that will be allocated at once from the upstream memory resource (24.12.6) to replenish a pool. If the value of `max_blocks_per_chunk` is zero or is greater than an implementation-defined limit, that limit is used instead. The implementation may choose to use a smaller value than is specified in this field and may use different values for different pools.



```
size_t largest_required_pool_block;
```

- 3 The largest allocation size that is required to be fulfilled using the pooling mechanism. Attempts to allocate a single block larger than this threshold will be allocated directly from the upstream memory resource. If `largest_required_pool_block` is zero or is greater than an implementation-defined limit, that limit is used instead. The implementation may choose a pass-through threshold larger than specified in this field.

### 24.12.5.3 Pool resource constructors and destructors [mem.res.pool.ctor]

```
synchronized_pool_resource(const pool_options& opts, memory_resource* upstream);
unsynchronized_pool_resource(const pool_options& opts, memory_resource* upstream);
```

- 1 *Requires:* `upstream` is the address of a valid memory resource.
- 2 *Effects:* Constructs a pool resource object that will obtain memory from `upstream` whenever the pool resource is unable to satisfy a memory request from its own internal data structures. The resulting object will hold a copy of `upstream`, but will not own the resource to which `upstream` points. [*Note:* The intention is that calls to `upstream->allocate()` will be substantially fewer than calls to `this->allocate()` in most cases. — *end note*] The behavior of the pooling mechanism is tuned according to the value of the `opts` argument.
- 3 *Throws:* Nothing unless `upstream->allocate()` throws. It is unspecified if, or under what conditions, this constructor calls `upstream->allocate()`.

```
virtual ~synchronized_pool_resource();
virtual ~unsynchronized_pool_resource();
```

- 4 *Effects:* Calls `release()`.

### 24.12.5.4 Pool resource members [mem.res.pool.mem]

```
void release();
```

- 1 *Effects:* Calls `upstream_resource()->deallocate()` as necessary to release all allocated memory. [*Note:* The memory is released back to `upstream_resource()` even if `deallocate` has not been called for some of the allocated blocks. — *end note*]

```
memory_resource* upstream_resource() const;
```

- 2 *Returns:* The value of the `upstream` argument provided to the constructor of this object.

```
pool_options options() const;
```

- 3 *Returns:* The options that control the pooling behavior of this resource. The values in the returned struct may differ from those supplied to the pool resource constructor in that values of zero will be replaced with implementation-defined defaults, and sizes may be rounded to unspecified granularity.

```
void* do_allocate(size_t bytes, size_t alignment) override;
```

- 4 *Returns:* A pointer to allocated storage (6.6.4.4.1) with a size of at least `bytes`. The size and alignment of the allocated memory shall meet the requirements for a class derived from `memory_resource` (24.12.2).
- 5 *Effects:* If the pool selected for a block of size `bytes` is unable to satisfy the memory request from its own internal data structures, it will call `upstream_resource()->allocate()` to obtain more memory. If `bytes` is larger than that which the largest pool can handle, then memory will be allocated using `upstream_resource()->allocate()`.
- 6 *Throws:* Nothing unless `upstream_resource()->allocate()` throws.

```
void do_deallocate(void* p, size_t bytes, size_t alignment) override;
```

- 7 *Effects:* Returns the memory at `p` to the pool. It is unspecified if, or under what circumstances, this operation will result in a call to `upstream_resource()->deallocate()`.

- 8 *Throws:* Nothing.

```
bool do_is_equal(const memory_resource& other) const noexcept override;
```

- 9 *Returns:* `this == &other`.

### 24.12.6 Class `monotonic_buffer_resource` [mem.res.monotonic.buffer]

<sup>1</sup> A `monotonic_buffer_resource` is a special-purpose memory resource intended for very fast memory allocations in situations where memory is used to build up a few objects and then is released all at once when the memory resource object is destroyed. It has the following qualities:

- (1.1) — A call to `deallocate` has no effect, thus the amount of memory consumed increases monotonically until the resource is destroyed.
- (1.2) — The program can supply an initial buffer, which the allocator uses to satisfy memory requests.
- (1.3) — When the initial buffer (if any) is exhausted, it obtains additional buffers from an *upstream* memory resource supplied at construction. Each additional buffer is larger than the previous one, following a geometric progression.
- (1.4) — It is intended for access from one thread of control at a time. Specifically, calls to `allocate` and `deallocate` do not synchronize with one another.
- (1.5) — It frees the allocated memory on destruction, even if `deallocate` has not been called for some of the allocated blocks.

```
namespace std::pmr {
 class monotonic_buffer_resource : public memory_resource {
 memory_resource* upstream_rsrc; // exposition only
 void* current_buffer; // exposition only
 size_t next_buffer_size; // exposition only

 public:
 explicit monotonic_buffer_resource(memory_resource* upstream);
 monotonic_buffer_resource(size_t initial_size, memory_resource* upstream);
 monotonic_buffer_resource(void* buffer, size_t buffer_size, memory_resource* upstream);

 monotonic_buffer_resource()
 : monotonic_buffer_resource(get_default_resource()) {}
 explicit monotonic_buffer_resource(size_t initial_size)
 : monotonic_buffer_resource(initial_size, get_default_resource()) {}
 monotonic_buffer_resource(void* buffer, size_t buffer_size)
 : monotonic_buffer_resource(buffer, buffer_size, get_default_resource()) {}

 monotonic_buffer_resource(const monotonic_buffer_resource&) = delete;

 virtual ~monotonic_buffer_resource();

 monotonic_buffer_resource& operator=(const monotonic_buffer_resource&) = delete;

 void release();
 memory_resource* upstream_resource() const;

 protected:
 void* do_allocate(size_t bytes, size_t alignment) override;
 void do_deallocate(void* p, size_t bytes, size_t alignment) override;

 bool do_is_equal(const memory_resource& other) const noexcept override;
 };
}
```

#### 24.12.6.1 `monotonic_buffer_resource` constructor and destructor [mem.res.monotonic.buffer.ctor]

```
explicit monotonic_buffer_resource(memory_resource* upstream);
monotonic_buffer_resource(size_t initial_size, memory_resource* upstream);
```

- <sup>1</sup> *Requires:* `upstream` shall be the address of a valid memory resource. `initial_size`, if specified, shall be greater than zero.
- <sup>2</sup> *Effects:* Sets `upstream_rsrc` to `upstream` and `current_buffer` to `nullptr`. If `initial_size` is specified, sets `next_buffer_size` to at least `initial_size`; otherwise sets `next_buffer_size` to an implementation-defined size.

```
monotonic_buffer_resource(void* buffer, size_t buffer_size, memory_resource* upstream);
```

3 *Requires:* `upstream` shall be the address of a valid memory resource. `buffer_size` shall be no larger than the number of bytes in `buffer`.

4 *Effects:* Sets `upstream_rsrc` to `upstream`, `current_buffer` to `buffer`, and `next_buffer_size` to `buffer_size` (but not less than 1), then increases `next_buffer_size` by an implementation-defined growth factor (which need not be integral).

```
~monotonic_buffer_resource();
```

5 *Effects:* Calls `release()`.

#### 24.12.6.2 `monotonic_buffer_resource` members [mem.res.monotonic.buffer.mem]

```
void release();
```

1 *Effects:* Calls `upstream_rsrc->deallocate()` as necessary to release all allocated memory.

2 [Note: The memory is released back to `upstream_rsrc` even if some blocks that were allocated from this have not been deallocated from this. — end note]

```
memory_resource* upstream_resource() const;
```

3 *Returns:* The value of `upstream_rsrc`.

```
void* do_allocate(size_t bytes, size_t alignment) override;
```

4 *Returns:* A pointer to allocated storage (6.6.4.4.1) with a size of at least `bytes`. The size and alignment of the allocated memory shall meet the requirements for a class derived from `memory_resource` (24.12.2).

5 *Effects:* If the unused space in `current_buffer` can fit a block with the specified `bytes` and `alignment`, then allocate the return block from `current_buffer`; otherwise set `current_buffer` to `upstream_rsrc->allocate(n, m)`, where `n` is not less than `max(bytes, next_buffer_size)` and `m` is not less than `alignment`, and increase `next_buffer_size` by an implementation-defined growth factor (which need not be integral), then allocate the return block from the newly-allocated `current_buffer`.

6 *Throws:* Nothing unless `upstream_rsrc->allocate()` throws.

```
void do_deallocate(void* p, size_t bytes, size_t alignment) override;
```

7 *Effects:* None.

8 *Throws:* Nothing.

9 *Remarks:* Memory used by this resource increases monotonically until its destruction.

```
bool do_is_equal(const memory_resource& other) const noexcept override;
```

10 *Returns:* `this == &other`.

### 24.13 Class template `scoped_allocator_adaptor` [allocator.adaptor]

#### 24.13.1 Header `<scoped_allocator>` synopsis [allocator.adaptor.syn]

```
namespace std {
 // class template scoped allocator adaptor
 template<class OuterAlloc, class... InnerAlloc>
 class scoped_allocator_adaptor;

 // 24.13.5, scoped allocator operators
 template<class OuterA1, class OuterA2, class... InnerAllocs>
 bool operator==(const scoped_allocator_adaptor<OuterA1, InnerAllocs...>& a,
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& b) noexcept;
 template<class OuterA1, class OuterA2, class... InnerAllocs>
 bool operator!=(const scoped_allocator_adaptor<OuterA1, InnerAllocs...>& a,
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& b) noexcept;
}

```

1 The class template `scoped_allocator_adaptor` is an allocator template that specifies the memory resource (the outer allocator) to be used by a container (as any other allocator does) and also specifies an inner allocator resource to be passed to the constructor of every element within the container. This adaptor is instantiated with one outer and zero or more inner allocator types. If instantiated with only one allocator type, the inner

allocator becomes the `scoped_allocator_adaptor` itself, thus using the same allocator resource for the container and every element within the container and, if the elements themselves are containers, each of their elements recursively. If instantiated with more than one allocator, the first allocator is the outer allocator for use by the container, the second allocator is passed to the constructors of the container's elements, and, if the elements themselves are containers, the third allocator is passed to the elements' elements, and so on. If containers are nested to a depth greater than the number of allocators, the last allocator is used repeatedly, as in the single-allocator case, for any remaining recursions. [*Note: The `scoped_allocator_adaptor` is derived from the outer allocator type so it can be substituted for the outer allocator type in most expressions. — end note*]

```
namespace std {
 template<class OuterAlloc, class... InnerAllocs>
 class scoped_allocator_adaptor : public OuterAlloc {
 private:
 using OuterTraits = allocator_traits<OuterAlloc>; // exposition only
 scoped_allocator_adaptor<InnerAllocs...> inner; // exposition only

 public:
 using outer_allocator_type = OuterAlloc;
 using inner_allocator_type = see below;

 using value_type = typename OuterTraits::value_type;
 using size_type = typename OuterTraits::size_type;
 using difference_type = typename OuterTraits::difference_type;
 using pointer = typename OuterTraits::pointer;
 using const_pointer = typename OuterTraits::const_pointer;
 using void_pointer = typename OuterTraits::void_pointer;
 using const_void_pointer = typename OuterTraits::const_void_pointer;

 using propagate_on_container_copy_assignment = see below;
 using propagate_on_container_move_assignment = see below;
 using propagate_on_container_swap = see below;
 using is_always_equal = see below;

 template<class Tp> struct rebind {
 using other = scoped_allocator_adaptor<
 OuterTraits::template rebind_alloc<Tp>, InnerAllocs...>;
 };

 scoped_allocator_adaptor();
 template<class OuterA2>
 scoped_allocator_adaptor(OuterA2&& outerAlloc,
 const InnerAllocs&&... innerAllocs) noexcept;

 scoped_allocator_adaptor(const scoped_allocator_adaptor& other) noexcept;
 scoped_allocator_adaptor(scoped_allocator_adaptor&& other) noexcept;

 template<class OuterA2>
 scoped_allocator_adaptor(
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& other) noexcept;
 template<class OuterA2>
 scoped_allocator_adaptor(
 scoped_allocator_adaptor<OuterA2, InnerAllocs...>&& other) noexcept;

 scoped_allocator_adaptor& operator=(const scoped_allocator_adaptor&) = default;
 scoped_allocator_adaptor& operator=(scoped_allocator_adaptor&&) = default;

 ~scoped_allocator_adaptor();

 inner_allocator_type& inner_allocator() noexcept;
 const inner_allocator_type& inner_allocator() const noexcept;
 outer_allocator_type& outer_allocator() noexcept;
 const outer_allocator_type& outer_allocator() const noexcept;
 };
};
```

```

[[nodiscard]] pointer allocate(size_type n);
[[nodiscard]] pointer allocate(size_type n, const_void_pointer hint);
void deallocate(pointer p, size_type n);
size_type max_size() const;

template<class T, class... Args>
void construct(T* p, Args&&... args);
template<class T1, class T2, class... Args1, class... Args2>
void construct(pair<T1, T2>* p, piecewise_construct_t,
 tuple<Args1...> x, tuple<Args2...> y);
template<class T1, class T2>
void construct(pair<T1, T2>* p);
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, U&& x, V&& y);
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, const pair<U, V>& x);
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, pair<U, V>&& x);

template<class T>
void destroy(T* p);

scoped_allocator_adaptor select_on_container_copy_construction() const;
};

template<class OuterAlloc, class... InnerAllocs>
scoped_allocator_adaptor(OuterAlloc, InnerAllocs...)
-> scoped_allocator_adaptor<OuterAlloc, InnerAllocs...>;
}

```

### 24.13.2 Scoped allocator adaptor member types [allocator.adaptor.types]

using inner\_allocator\_type = *see below*;

- 1 *Type:* `scoped_allocator_adaptor<OuterAlloc>` if `sizeof...(InnerAllocs)` is zero; otherwise, `scoped_allocator_adaptor<InnerAllocs...>`.

using propagate\_on\_container\_copy\_assignment = *see below*;

- 2 *Type:* `true_type` if `allocator_traits<A>::propagate_on_container_copy_assignment::value` is true for any `A` in the set of `OuterAlloc` and `InnerAllocs...`; otherwise, `false_type`.

using propagate\_on\_container\_move\_assignment = *see below*;

- 3 *Type:* `true_type` if `allocator_traits<A>::propagate_on_container_move_assignment::value` is true for any `A` in the set of `OuterAlloc` and `InnerAllocs...`; otherwise, `false_type`.

using propagate\_on\_container\_swap = *see below*;

- 4 *Type:* `true_type` if `allocator_traits<A>::propagate_on_container_swap::value` is true for any `A` in the set of `OuterAlloc` and `InnerAllocs...`; otherwise, `false_type`.

using is\_always\_equal = *see below*;

- 5 *Type:* `true_type` if `allocator_traits<A>::is_always_equal::value` is true for every `A` in the set of `OuterAlloc` and `InnerAllocs...`; otherwise, `false_type`.

### 24.13.3 Scoped allocator adaptor constructors [allocator.adaptor.cnstr]

`scoped_allocator_adaptor()`;

- 1 *Effects:* Value-initializes the `OuterAlloc` base class and the inner allocator object.

`template<class OuterA2>`  
`scoped_allocator_adaptor(OuterA2&& outerAlloc, const InnerAllocs&... innerAllocs) noexcept;`

- 2 *Effects:* Initializes the `OuterAlloc` base class with `std::forward<OuterA2>(outerAlloc)` and `inner` with `innerAllocs...` (hence recursively initializing each allocator within the adaptor with the corresponding allocator from the argument list).

3 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<OuterAlloc, OuterA2>` is true.

```
scoped_allocator_adaptor(const scoped_allocator_adaptor& other) noexcept;
```

4 *Effects:* Initializes each allocator within the adaptor with the corresponding allocator from `other`.

```
scoped_allocator_adaptor(scoped_allocator_adaptor&& other) noexcept;
```

5 *Effects:* Move constructs each allocator within the adaptor with the corresponding allocator from `other`.

```
template<class OuterA2>
scoped_allocator_adaptor(
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& other) noexcept;
```

6 *Effects:* Initializes each allocator within the adaptor with the corresponding allocator from `other`.

7 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<OuterAlloc, const OuterA2&>` is true.

```
template<class OuterA2>
scoped_allocator_adaptor(scoped_allocator_adaptor<OuterA2, InnerAllocs...>&& other) noexcept;
```

8 *Effects:* Initializes each allocator within the adaptor with the corresponding allocator rvalue from `other`.

9 *Remarks:* This constructor shall not participate in overload resolution unless `is_constructible_v<OuterAlloc, OuterA2>` is true.

#### 24.13.4 Scoped allocator adaptor members [allocator.adaptor.members]

1 In the construct member functions, `OUTERMOST(x)` is `x` if `x` does not have an `outer_allocator()` member function and `OUTERMOST(x.outer_allocator())` otherwise; `OUTERMOST_ALLOC_TRAITS(x)` is `allocator_traits<decltype(OUTERMOST(x))>`. [*Note:* `OUTERMOST(x)` and `OUTERMOST_ALLOC_TRAITS(x)` are recursive operations. It is incumbent upon the definition of `outer_allocator()` to ensure that the recursion terminates. It will terminate for all instantiations of `scoped_allocator_adaptor`. — end note]

```
inner_allocator_type& inner_allocator() noexcept;
const inner_allocator_type& inner_allocator() const noexcept;
```

2 *Returns:* `*this` if `sizeof...(InnerAllocs)` is zero; otherwise, `inner`.

```
outer_allocator_type& outer_allocator() noexcept;
```

3 *Returns:* `static_cast<OuterAlloc&>(*this)`.

```
const outer_allocator_type& outer_allocator() const noexcept;
```

4 *Returns:* `static_cast<const OuterAlloc&>(*this)`.

```
[[nodiscard]] pointer allocate(size_type n);
```

5 *Returns:* `allocator_traits<OuterAlloc>::allocate(outer_allocator(), n)`.

```
[[nodiscard]] pointer allocate(size_type n, const_void_pointer hint);
```

6 *Returns:* `allocator_traits<OuterAlloc>::allocate(outer_allocator(), n, hint)`.

```
void deallocate(pointer p, size_type n) noexcept;
```

7 *Effects:* As if by: `allocator_traits<OuterAlloc>::deallocate(outer_allocator(), p, n)`;

```
size_type max_size() const;
```

8 *Returns:* `allocator_traits<OuterAlloc>::max_size(outer_allocator())`.

```
template<class T, class... Args>
void construct(T* p, Args&&... args);
```

9 *Effects:*

(9.1) — If `uses_allocator_v<T, inner_allocator_type>` is false and `is_constructible_v<T, Args...>` is true, calls:

```

 OUTERMOST_ALLOC_TRAITS(*this)::construct(
 OUTERMOST(*this), p, std::forward<Args>(args)...)

```

- (9.2) — Otherwise, if `uses_allocator_v<T, inner_allocator_type>` is true and `is_constructible_v<T, allocator_arg_t, inner_allocator_type&, Args...>` is true, calls:

```

 OUTERMOST_ALLOC_TRAITS(*this)::construct(
 OUTERMOST(*this), p, allocator_arg, inner_allocator(), std::forward<Args>(args)...)

```

- (9.3) — Otherwise, if `uses_allocator_v<T, inner_allocator_type>` is true and `is_constructible_v<T, Args..., inner_allocator_type&>` is true, calls:

```

 OUTERMOST_ALLOC_TRAITS(*this)::construct(
 OUTERMOST(*this), p, std::forward<Args>(args)..., inner_allocator())

```

- (9.4) — Otherwise, the program is ill-formed. [Note: An error will result if `uses_allocator` evaluates to true but the specific constructor does not take an allocator. This definition prevents a silent failure to pass an inner allocator to a contained element. — end note]

10 *Remarks:* This function shall not participate in overload resolution if `T` is a specialization of `pair`.

```

template<class T1, class T2, class... Args1, class... Args2>
void construct(pair<T1, T2>* p, piecewise_construct_t, tuple<Args1...> x, tuple<Args2...> y);

```

11 *Effects:* Constructs a tuple object `xprime` from `x` by the following rules:

- (11.1) — If `uses_allocator_v<T1, inner_allocator_type>` is false and `is_constructible_v<T1, Args1...>` is true, then `xprime` is `tuple<Args1&&...>(std::move(x))`.
- (11.2) — Otherwise, if `uses_allocator_v<T1, inner_allocator_type>` is true and `is_constructible_v<T1, allocator_arg_t, inner_allocator_type&, Args1...>` is true, then `xprime` is:

```

 tuple_cat(
 tuple<allocator_arg_t, inner_allocator_type&>(allocator_arg, inner_allocator()),
 tuple<Args1&&...>(std::move(x)))

```

- (11.3) — Otherwise, if `uses_allocator_v<T1, inner_allocator_type>` is true and `is_constructible_v<T1, Args1..., inner_allocator_type&>` is true, then `xprime` is:

```

 tuple_cat(tuple<Args1&&...>(std::move(x)),
 tuple<inner_allocator_type&>(inner_allocator()))

```

- (11.4) — Otherwise, the program is ill-formed.

and constructs a tuple object `yprime` from `y` by the following rules:

- (11.5) — If `uses_allocator_v<T2, inner_allocator_type>` is false and `is_constructible_v<T2, Args2...>` is true, then `yprime` is `tuple<Args2&&...>(std::move(y))`.
- (11.6) — Otherwise, if `uses_allocator_v<T2, inner_allocator_type>` is true and `is_constructible_v<T2, allocator_arg_t, inner_allocator_type&, Args2...>` is true, then `yprime` is:

```

 tuple_cat(
 tuple<allocator_arg_t, inner_allocator_type&>(allocator_arg, inner_allocator()),
 tuple<Args2&&...>(std::move(y)))

```

- (11.7) — Otherwise, if `uses_allocator_v<T2, inner_allocator_type>` is true and `is_constructible_v<T2, Args2..., inner_allocator_type&>` is true, then `yprime` is:

```

 tuple_cat(tuple<Args2&&...>(std::move(y)),
 tuple<inner_allocator_type&>(inner_allocator()))

```

- (11.8) — Otherwise, the program is ill-formed.

then calls:

```

 OUTERMOST_ALLOC_TRAITS(*this)::construct(
 OUTERMOST(*this), p, piecewise_construct, std::move(xprime), std::move(yprime))

```

```

template<class T1, class T2>
void construct(pair<T1, T2>* p);

```

12 *Effects:* Equivalent to:

```

 construct(p, piecewise_construct, tuple<>(), tuple<>());

```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, U&& x, V&& y);
```

13 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(std::forward<U>(x)),
 forward_as_tuple(std::forward<V>(y)));
```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, const pair<U, V>& x);
```

14 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(x.first),
 forward_as_tuple(x.second));
```

```
template<class T1, class T2, class U, class V>
void construct(pair<T1, T2>* p, pair<U, V>&& x);
```

15 *Effects:* Equivalent to:

```
construct(p, piecewise_construct,
 forward_as_tuple(std::forward<U>(x.first)),
 forward_as_tuple(std::forward<V>(x.second)));
```

```
template<class T>
void destroy(T* p);
```

16 *Effects:* Calls `OUTERMOST_ALLOC_TRAITS(*this)::destroy(OUTERMOST(*this), p)`.

```
scoped_allocator_adaptor select_on_container_copy_construction() const;
```

17 *Returns:* A new `scoped_allocator_adaptor` object where each allocator `A` in the adaptor is initialized from the result of calling `allocator_traits<A>::select_on_container_copy_construction()` on the corresponding allocator in `*this`.

### 24.13.5 Scoped allocator operators

[scoped.adaptor.operators]

```
template<class OuterA1, class OuterA2, class... InnerAllocs>
bool operator==(const scoped_allocator_adaptor<OuterA1, InnerAllocs...>& a,
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& b) noexcept;
```

1 *Returns:* If `sizeof...(InnerAllocs)` is zero,

```
a.outer_allocator() == b.outer_allocator()
```

otherwise

```
a.outer_allocator() == b.outer_allocator() && a.inner_allocator() == b.inner_allocator()
```

```
template<class OuterA1, class OuterA2, class... InnerAllocs>
bool operator!=(const scoped_allocator_adaptor<OuterA1, InnerAllocs...>& a,
 const scoped_allocator_adaptor<OuterA2, InnerAllocs...>& b) noexcept;
```

2 *Returns:* `!(a == b)`.

### 24.14 Function objects

[function.objects]

1 A *function object type* is an object type (6.7) that can be the type of the *postfix-expression* in a function call (8.5.1.2, 16.3.1.1).<sup>225</sup> A *function object* is an object of a function object type. In the places where one would expect to pass a pointer to a function to an algorithmic template (Clause 29), the interface is specified to accept a function object. This not only makes algorithmic templates work with pointers to functions, but also enables them to work with arbitrary function objects.

<sup>225</sup> Such a type is a function pointer or a class type which has a member `operator()` or a class type which has a conversion to a pointer to function.



## 24.14.1 Header &lt;functional&gt; synopsis

[functional.syn]

```

namespace std {
 // 24.14.4, invoke
 template<class F, class... Args>
 invoke_result_t<F, Args...> invoke(F&& f, Args&&... args)
 noexcept(is_nothrow_invocable_v<F, Args...>);

 // 24.14.5, reference_wrapper
 template<class T> class reference_wrapper;

 template<class T> reference_wrapper<T> ref(T&) noexcept;
 template<class T> reference_wrapper<const T> cref(const T&) noexcept;
 template<class T> void ref(const T&&) = delete;
 template<class T> void cref(const T&&) = delete;

 template<class T> reference_wrapper<T> ref(reference_wrapper<T>) noexcept;
 template<class T> reference_wrapper<const T> cref(reference_wrapper<T>) noexcept;

 // 24.14.6, arithmetic operations
 template<class T = void> struct plus;
 template<class T = void> struct minus;
 template<class T = void> struct multiplies;
 template<class T = void> struct divides;
 template<class T = void> struct modulus;
 template<class T = void> struct negate;
 template<> struct plus<void>;
 template<> struct minus<void>;
 template<> struct multiplies<void>;
 template<> struct divides<void>;
 template<> struct modulus<void>;
 template<> struct negate<void>;

 // 24.14.7, comparisons
 template<class T = void> struct equal_to;
 template<class T = void> struct not_equal_to;
 template<class T = void> struct greater;
 template<class T = void> struct less;
 template<class T = void> struct greater_equal;
 template<class T = void> struct less_equal;
 template<> struct equal_to<void>;
 template<> struct not_equal_to<void>;
 template<> struct greater<void>;
 template<> struct less<void>;
 template<> struct greater_equal<void>;
 template<> struct less_equal<void>;

 // 24.14.8, logical operations
 template<class T = void> struct logical_and;
 template<class T = void> struct logical_or;
 template<class T = void> struct logical_not;
 template<> struct logical_and<void>;
 template<> struct logical_or<void>;
 template<> struct logical_not<void>;

 // 24.14.9, bitwise operations
 template<class T = void> struct bit_and;
 template<class T = void> struct bit_or;
 template<class T = void> struct bit_xor;
 template<class T = void> struct bit_not;
 template<> struct bit_and<void>;
 template<> struct bit_or<void>;
 template<> struct bit_xor<void>;
 template<> struct bit_not<void>;

```

```

// 24.14.10, identity
struct identity;

// 24.14.11, function template not_fn
template<class F> unspecified not_fn(F&& f);

// 24.14.12, bind
template<class T> struct is_bind_expression;
template<class T> struct is_placeholder;

template<class F, class... BoundArgs>
 unspecified bind(F&&, BoundArgs&&...);
template<class R, class F, class... BoundArgs>
 unspecified bind(F&&, BoundArgs&&...);

namespace placeholders {
 // M is the implementation-defined number of placeholders
 // see below _1;
 // see below _2;
 .
 .
 .
 // see below _M;
}

// 24.14.13, member function adaptors
template<class R, class T>
 unspecified mem_fn(R T::*) noexcept;

// 24.14.14, polymorphic function wrappers
class bad_function_call;

template<class> class function; // not defined
template<class R, class... ArgTypes> class function<R(ArgTypes...)>;

template<class R, class... ArgTypes>
 void swap(function<R(ArgTypes...)>&, function<R(ArgTypes...)>&) noexcept;

template<class R, class... ArgTypes>
 bool operator==(const function<R(ArgTypes...)>&, nullptr_t) noexcept;
template<class R, class... ArgTypes>
 bool operator==(nullptr_t, const function<R(ArgTypes...)>&) noexcept;
template<class R, class... ArgTypes>
 bool operator!=(const function<R(ArgTypes...)>&, nullptr_t) noexcept;
template<class R, class... ArgTypes>
 bool operator!=(nullptr_t, const function<R(ArgTypes...)>&) noexcept;

// 24.14.15, searchers
template<class ForwardIterator, class BinaryPredicate = equal_to<>>
 class default_searcher;

template<class RandomAccessIterator,
 class Hash = hash<typename iterator_traits<RandomAccessIterator>::value_type>,
 class BinaryPredicate = equal_to<>>
 class boyer_moore_searcher;

template<class RandomAccessIterator,
 class Hash = hash<typename iterator_traits<RandomAccessIterator>::value_type>,
 class BinaryPredicate = equal_to<>>
 class boyer_moore_horspool_searcher;

// 24.14.16, hash function primary template
template<class T>
 struct hash;

```

```
// 24.14.12, function object binders
template<class T>
 inline constexpr bool is_bind_expression_v = is_bind_expression<T>::value;
template<class T>
 inline constexpr int is_placeholder_v = is_placeholder<T>::value;
}
```

- 1 [Example: If a C++ program wants to have a by-element addition of two vectors `a` and `b` containing `double` and put the result into `a`, it can do:

```
transform(a.begin(), a.end(), b.begin(), a.begin(), plus<double>());
```

— end example]

- 2 [Example: To negate every element of `a`:

```
transform(a.begin(), a.end(), a.begin(), negate<double>());
```

— end example]

## 24.14.2 Definitions

[func.def]

- 1 The following definitions apply to this Clause:
- 2 A *call signature* is the name of a return type followed by a parenthesized comma-separated list of zero or more argument types.
- 3 A *callable type* is a function object type (24.14) or a pointer to member.
- 4 A *callable object* is an object of a callable type.
- 5 A *call wrapper type* is a type that holds a callable object and supports a call operation that forwards to that object.
- 6 A *call wrapper* is an object of a call wrapper type.
- 7 A *target object* is the callable object held by a call wrapper.

## 24.14.3 Requirements

[func.require]

- 1 Define *INVOKE*(`f`, `t1`, `t2`, ..., `tN`) as follows:

- (1.1) — `(t1.*f)(t2, ..., tN)` when `f` is a pointer to a member function of a class `T` and `is_base_of_v<T, remove_reference_t<decltype(t1)>>` is true;
- (1.2) — `(t1.get().*f)(t2, ..., tN)` when `f` is a pointer to a member function of a class `T` and `remove_cvref_t<decltype(t1)>` is a specialization of `reference_wrapper`;
- (1.3) — `((*t1).*f)(t2, ..., tN)` when `f` is a pointer to a member function of a class `T` and `t1` does not satisfy the previous two items;
- (1.4) — `t1.*f` when `N == 1` and `f` is a pointer to data member of a class `T` and `is_base_of_v<T, remove_reference_t<decltype(t1)>>` is true;
- (1.5) — `t1.get().*f` when `N == 1` and `f` is a pointer to data member of a class `T` and `remove_cvref_t<decltype(t1)>` is a specialization of `reference_wrapper`;
- (1.6) — `(*t1).*f` when `N == 1` and `f` is a pointer to data member of a class `T` and `t1` does not satisfy the previous two items;
- (1.7) — `f(t1, t2, ..., tN)` in all other cases.

- 2 Define *INVOKE*<`R`>(f, t<sub>1</sub>, t<sub>2</sub>, ..., t<sub>N</sub>) as `static_cast<void>(INVOKE(f, t1, t2, ..., tN))` if `R` is *cv void*, otherwise *INVOKE*(f, t<sub>1</sub>, t<sub>2</sub>, ..., t<sub>N</sub>) implicitly converted to `R`.

- 3 Every call wrapper (24.14.2) shall be *Cpp17MoveConstructible*. A *forwarding call wrapper* is a call wrapper that can be called with an arbitrary argument list and delivers the arguments to the wrapped callable object as references. This forwarding step shall ensure that rvalue arguments are delivered as rvalue references and lvalue arguments are delivered as lvalue references. A *simple call wrapper* is a forwarding call wrapper that is *Cpp17CopyConstructible* and *Cpp17CopyAssignable* and whose copy constructor, move constructor, copy assignment operator, and move assignment operator do not throw exceptions. [Note: In a typical implementation forwarding call wrappers have an overloaded function call operator of the form

```
template<class... UnBoundArgs>
 R operator()(UnBoundArgs&&... unbound_args) cv-qual;
```

— end note]

#### 24.14.4 Function template invoke

[func.invoke]

```
template<class F, class... Args>
invoke_result_t<F, Args...> invoke(F&& f, Args&&... args)
noexcept(is_nothrow_invocable_v<F, Args...>);
```

<sup>1</sup> Returns: *INVOKE*(`std::forward<F>(f)`, `std::forward<Args>(args)...`) (24.14.3).

#### 24.14.5 Class template reference\_wrapper

[refwrap]

```
namespace std {
template<class T> class reference_wrapper {
public:
// types
using type = T;

// construct/copy/destroy
template<class U>
reference_wrapper(U&&) noexcept(see below);
reference_wrapper(const reference_wrapper& x) noexcept;

// assignment
reference_wrapper& operator=(const reference_wrapper& x) noexcept;

// access
operator T& () const noexcept;
T& get() const noexcept;

// invocation
template<class... ArgTypes>
invoke_result_t<T&, ArgTypes...> operator()(ArgTypes&&...) const;
};
template<class T>
reference_wrapper(T&) -> reference_wrapper<T>;
}
```

<sup>1</sup> `reference_wrapper<T>` is a *Cpp17CopyConstructible* and *Cpp17CopyAssignable* wrapper around a reference to an object or function of type T.

<sup>2</sup> `reference_wrapper<T>` is a trivially copyable type (6.7).

##### 24.14.5.1 reference\_wrapper construct/copy/destroy

[refwrap.const]

```
template<class U>
reference_wrapper(U&& u) noexcept(see below);
```

<sup>1</sup> Remarks: Let *FUN* denote the exposition-only functions

```
void FUN(T&) noexcept;
void FUN(T&&) = delete;
```

This constructor shall not participate in overload resolution unless the expression *FUN*(`declval<U>()`) is well-formed and `is_same_v<remove_cvref_t<U>, reference_wrapper>` is false. The expression inside `noexcept` is equivalent to `noexcept(FUN(declval<U>()))`.

<sup>2</sup> Effects: Creates a variable `r` as if by `T& r = std::forward<U>(u)`, then constructs a `reference_wrapper` object that stores a reference to `r`.

```
reference_wrapper(const reference_wrapper& x) noexcept;
```

<sup>3</sup> Effects: Constructs a `reference_wrapper` object that stores a reference to `x.get()`.

##### 24.14.5.2 reference\_wrapper assignment

[refwrap.assign]

```
reference_wrapper& operator=(const reference_wrapper& x) noexcept;
```

<sup>1</sup> Ensures: `*this` stores a reference to `x.get()`.

**24.14.5.3 reference\_wrapper access** [refwrap.access]

```
operator T& () const noexcept;
```

1 *Returns:* The stored reference.

```
T& get() const noexcept;
```

2 *Returns:* The stored reference.

**24.14.5.4 reference\_wrapper invocation** [refwrap.invoke]

```
template<class... ArgTypes>
 invoke_result_t<T&, ArgTypes...>
 operator()(ArgTypes&&... args) const;
```

1 *Returns:* `INVOKE(get(), std::forward<ArgTypes>(args)...) (24.14.3)`

**24.14.5.5 reference\_wrapper helper functions** [refwrap.helpers]

```
template<class T> reference_wrapper<T> ref(T& t) noexcept;
```

1 *Returns:* `reference_wrapper<T>(t)`.

```
template<class T> reference_wrapper<T> ref(reference_wrapper<T> t) noexcept;
```

2 *Returns:* `ref(t.get())`.

```
template<class T> reference_wrapper<const T> cref(const T& t) noexcept;
```

3 *Returns:* `reference_wrapper <const T>(t)`.

```
template<class T> reference_wrapper<const T> cref(reference_wrapper<T> t) noexcept;
```

4 *Returns:* `cref(t.get())`.

**24.14.6 Arithmetic operations** [arithmetic.operations]

1 The library provides basic function object classes for all of the arithmetic operators in the language (8.5.5, 8.5.6).

**24.14.6.1 Class template plus** [arithmetic.operations.plus]

```
template<class T = void> struct plus {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

1 *Returns:* `x + y`.

```
template<> struct plus<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) + std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) + std::forward<U>(u));
```

2 *Returns:* `std::forward<T>(t) + std::forward<U>(u)`.

**24.14.6.2 Class template minus** [arithmetic.operations.minus]

```
template<class T = void> struct minus {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

1 *Returns:* `x - y`.

```
template<> struct minus<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) - std::forward<U>(u));

 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) - std::forward<U>(u));
```

<sup>2</sup> *Returns:* `std::forward<T>(t) - std::forward<U>(u)`.

### 24.14.6.3 Class template multiplies

[arithmetic.operations.multiplies]

```
template<class T = void> struct multiplies {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* `x * y`.

```
template<> struct multiplies<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) * std::forward<U>(u));

 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) * std::forward<U>(u));
```

<sup>2</sup> *Returns:* `std::forward<T>(t) * std::forward<U>(u)`.

### 24.14.6.4 Class template divides

[arithmetic.operations.divides]

```
template<class T = void> struct divides {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* `x / y`.

```
template<> struct divides<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) / std::forward<U>(u));

 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) / std::forward<U>(u));
```

<sup>2</sup> *Returns:* `std::forward<T>(t) / std::forward<U>(u)`.

### 24.14.6.5 Class template modulus

[arithmetic.operations.modulus]

```
template<class T = void> struct modulus {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* `x % y`.

```
template<> struct modulus<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) % std::forward<U>(u));
```

```

 using is_transparent = unspecified;
};

template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) % std::forward<U>(u));

```

2 *Returns:* `std::forward<T>(t) % std::forward<U>(u)`.

#### 24.14.6.6 Class template `negate`

[[arithmetic.operations.negate](#)]

```

template<class T = void> struct negate {
 constexpr T operator()(const T& x) const;
};

```

```
constexpr T operator()(const T& x) const;
```

1 *Returns:* `-x`.

```

template<> struct negate<void> {
 template<class T> constexpr auto operator()(T&& t) const
 -> decltype(-std::forward<T>(t));

```

```

 using is_transparent = unspecified;
};

```

```

template<class T> constexpr auto operator()(T&& t) const
 -> decltype(-std::forward<T>(t));

```

2 *Returns:* `-std::forward<T>(t)`.

#### 24.14.7 Comparisons

[[comparisons](#)]

1 The library provides basic function object classes for all of the comparison operators in the language ([8.5.9](#), [8.5.10](#)).

2 For templates `less`, `greater`, `less_equal`, and `greater_equal`, the specializations for any pointer type yield a strict total order that is consistent among those specializations and is also consistent with the partial order imposed by the built-in operators `<`, `>`, `<=`, `>=`. [*Note:* When `a < b` is well-defined for pointers `a` and `b` of type `P`, this implies `(a < b) == less<P>()(a, b)`, `(a > b) == greater<P>()(a, b)`, and so forth. — *end note*] For template specializations `less<void>`, `greater<void>`, `less_equal<void>`, and `greater_equal<void>`, if the call operator calls a built-in operator comparing pointers, the call operator yields a strict total order that is consistent among those specializations and is also consistent with the partial order imposed by those built-in operators.

##### 24.14.7.1 Class template `equal_to`

[[comparisons.equal\\_to](#)]

```

template<class T = void> struct equal_to {
 constexpr bool operator()(const T& x, const T& y) const;
};

```

```
constexpr bool operator()(const T& x, const T& y) const;
```

1 *Returns:* `x == y`.

```

template<> struct equal_to<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) == std::forward<U>(u));

```

```

 using is_transparent = unspecified;
};

```

```

template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) == std::forward<U>(u));

```

2 *Returns:* `std::forward<T>(t) == std::forward<U>(u)`.

**24.14.7.2 Class template not\_equal\_to**

[comparisons.not\_equal\_to]

```
template<class T = void> struct not_equal_to {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* x != y.

```
template<> struct not_equal_to<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) != std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) != std::forward<U>(u));
```

<sup>2</sup> *Returns:* std::forward<T>(t) != std::forward<U>(u).

**24.14.7.3 Class template greater**

[comparisons.greater]

```
template<class T = void> struct greater {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* x > y.

```
template<> struct greater<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) > std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) > std::forward<U>(u));
```

<sup>2</sup> *Returns:* std::forward<T>(t) > std::forward<U>(u).

**24.14.7.4 Class template less**

[comparisons.less]

```
template<class T = void> struct less {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* x < y.

```
template<> struct less<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) < std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) < std::forward<U>(u));
```

<sup>2</sup> *Returns:* std::forward<T>(t) < std::forward<U>(u).

**24.14.7.5 Class template greater\_equal**

[comparisons.greater\_equal]

```
template<class T = void> struct greater_equal {
 constexpr bool operator()(const T& x, const T& y) const;
```



```
};

constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:*  $x \geq y$ .

```
template<> struct greater_equal<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) >= std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) >= std::forward<U>(u));
```

<sup>2</sup> *Returns:*  $\text{std::forward<T>(t)} \geq \text{std::forward<U>(u)}$ .

#### 24.14.7.6 Class template less\_equal

[comparisons.less\_equal]

```
template<class T = void> struct less_equal {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:*  $x \leq y$ .

```
template<> struct less_equal<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) <= std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) <= std::forward<U>(u));
```

<sup>2</sup> *Returns:*  $\text{std::forward<T>(t)} \leq \text{std::forward<U>(u)}$ .

#### 24.14.8 Logical operations

[logical.operations]

<sup>1</sup> The library provides basic function object classes for all of the logical operators in the language (8.5.14, 8.5.15, 8.5.2.1).

##### 24.14.8.1 Class template logical\_and

[logical.operations.and]

```
template<class T = void> struct logical_and {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:*  $x \ \&\& \ y$ .

```
template<> struct logical_and<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) \&\& std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) \&\& std::forward<U>(u));
```

<sup>2</sup> *Returns:*  $\text{std::forward<T>(t)} \ \&\& \ \text{std::forward<U>(u)}$ .

**24.14.8.2 Class template `logical_or`**

[logical.operations.or]

```
template<class T = void> struct logical_or {
 constexpr bool operator()(const T& x, const T& y) const;
};
```

```
constexpr bool operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* `x || y`.

```
template<> struct logical_or<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) || std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) || std::forward<U>(u));
```

<sup>2</sup> *Returns:* `std::forward<T>(t) || std::forward<U>(u)`.

**24.14.8.3 Class template `logical_not`**

[logical.operations.not]

```
template<class T = void> struct logical_not {
 constexpr bool operator()(const T& x) const;
};
```

```
constexpr bool operator()(const T& x) const;
```

<sup>1</sup> *Returns:* `!x`.

```
template<> struct logical_not<void> {
 template<class T> constexpr auto operator()(T&& t) const
 -> decltype(!std::forward<T>(t));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T> constexpr auto operator()(T&& t) const
 -> decltype(!std::forward<T>(t));
```

<sup>2</sup> *Returns:* `!std::forward<T>(t)`.

**24.14.9 Bitwise operations**

[bitwise.operations]

<sup>1</sup> The library provides basic function object classes for all of the bitwise operators in the language (8.5.11, 8.5.13, 8.5.12, 8.5.2.1).

**24.14.9.1 Class template `bit_and`**

[bitwise.operations.and]

```
template<class T = void> struct bit_and {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

<sup>1</sup> *Returns:* `x & y`.

```
template<> struct bit_and<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) & std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) & std::forward<U>(u));
```

<sup>2</sup> *Returns:* `std::forward<T>(t) & std::forward<U>(u)`.

**24.14.9.2 Class template bit\_or****[bitwise.operations.or]**

```
template<class T = void> struct bit_or {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

1 *Returns:*  $x \mid y$ .

```
template<> struct bit_or<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) | std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) | std::forward<U>(u));
```

2 *Returns:*  $\text{std::forward<T>(t)} \mid \text{std::forward<U>(u)}$ .

**24.14.9.3 Class template bit\_xor****[bitwise.operations.xor]**

```
template<class T = void> struct bit_xor {
 constexpr T operator()(const T& x, const T& y) const;
};
```

```
constexpr T operator()(const T& x, const T& y) const;
```

1 *Returns:*  $x \hat{=} y$ .

```
template<> struct bit_xor<void> {
 template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) ^ std::forward<U>(u));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T, class U> constexpr auto operator()(T&& t, U&& u) const
 -> decltype(std::forward<T>(t) ^ std::forward<U>(u));
```

2 *Returns:*  $\text{std::forward<T>(t)} \hat{=} \text{std::forward<U>(u)}$ .

**24.14.9.4 Class template bit\_not****[bitwise.operations.not]**

```
template<class T = void> struct bit_not {
 constexpr T operator()(const T& x) const;
};
```

```
constexpr T operator()(const T& x) const;
```

1 *Returns:*  $\sim x$ .

```
template<> struct bit_not<void> {
 template<class T> constexpr auto operator()(T&& t) const
 -> decltype(~std::forward<T>(t));
```

```
 using is_transparent = unspecified;
};
```

```
template<class T> constexpr auto operator()(T&&) const
 -> decltype(~std::forward<T>(t));
```

2 *Returns:*  $\sim \text{std::forward<T>(t)}$ .

**24.14.10 Class identity****[func.identity]**

```
struct identity {
 template<class T>
 constexpr T&& operator()(T&& t) const noexcept;
```

```

 using is_transparent = unspecified;
};

template<class T>
constexpr T&& operator()(T&& t) const noexcept;
1 Effects: Equivalent to: return std::forward<T>(t);

```

#### 24.14.11 Function template `not_fn` [func.not\_fn]

```
template<class F> unspecified not_fn(F&& f);
```

1 *Effects*: Equivalent to: return `call_wrapper`(std::forward<F>(f)); where `call_wrapper` is an exposition only class defined as follows:

```

class call_wrapper {
 using FD = decay_t<F>;
 FD fd;

 explicit call_wrapper(F&& f);

public:
 call_wrapper(call_wrapper&&) = default;
 call_wrapper(const call_wrapper&) = default;

 template<class... Args>
 auto operator()(Args&&...) &
 -> decltype(!declval<invoke_result_t<FD&, Args...>>());

 template<class... Args>
 auto operator()(Args&&...) const&
 -> decltype(!declval<invoke_result_t<const FD&, Args...>>());

 template<class... Args>
 auto operator()(Args&&...) &&
 -> decltype(!declval<invoke_result_t<FD, Args...>>());

 template<class... Args>
 auto operator()(Args&&...) const&&
 -> decltype(!declval<invoke_result_t<const FD, Args...>>());
};

```

```
explicit call_wrapper(F&& f);
```

2 *Requires*: FD shall satisfy the *Cpp17MoveConstructible* requirements. `is_constructible_v<FD, F>` shall be true. fd shall be a callable object (24.14.2).

3 *Effects*: Initializes fd from std::forward<F>(f).

4 *Throws*: Any exception thrown by construction of fd.

```

template<class... Args>
 auto operator()(Args&&... args) &
 -> decltype(!declval<invoke_result_t<FD&, Args...>>());
template<class... Args>
 auto operator()(Args&&... args) const&
 -> decltype(!declval<invoke_result_t<const FD&, Args...>>());

```

5 *Effects*: Equivalent to:

```
return !INVOKE(fd, std::forward<Args>(args)...); // see 24.14.3
```

```

template<class... Args>
 auto operator()(Args&&... args) &&
 -> decltype(!declval<invoke_result_t<FD, Args...>>());
template<class... Args>
 auto operator()(Args&&... args) const&&

```

```
-> decltype(!declval<invoke_result_t<const FD, Args...>>());
```

6 *Effects:* Equivalent to:

```
return !INVOKE(std::move(fd), std::forward<Args>(args)...); // see 24.14.3
```

### 24.14.12 Function object binders

[func.bind]

1 This subclause describes a uniform mechanism for binding arguments of callable objects.

#### 24.14.12.1 Class template `is_bind_expression`

[func.bind.isbind]

```
namespace std {
 template<class T> struct is_bind_expression; // see below
}
```

1 The class template `is_bind_expression` can be used to detect function objects generated by `bind`. The function template `bind` uses `is_bind_expression` to detect subexpressions.

2 Instantiations of the `is_bind_expression` template shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1). The implementation shall provide a definition that has a base characteristic of `true_type` if `T` is a type returned from `bind`, otherwise it shall have a base characteristic of `false_type`. A program may specialize this template for a program-defined type `T` to have a base characteristic of `true_type` to indicate that `T` should be treated as a subexpression in a `bind` call.

#### 24.14.12.2 Class template `is_placeholder`

[func.bind.isplace]

```
namespace std {
 template<class T> struct is_placeholder; // see below
}
```

1 The class template `is_placeholder` can be used to detect the standard placeholders `_1`, `_2`, and so on. The function template `bind` uses `is_placeholder` to detect placeholders.

2 Instantiations of the `is_placeholder` template shall satisfy the *Cpp17UnaryTypeTrait* requirements (24.15.1). The implementation shall provide a definition that has the base characteristic of `integral_constant<int, J>` if `T` is the type of `std::placeholders::_J`, otherwise it shall have a base characteristic of `integral_constant<int, 0>`. A program may specialize this template for a program-defined type `T` to have a base characteristic of `integral_constant<int, N>` with `N > 0` to indicate that `T` should be treated as a placeholder type.

#### 24.14.12.3 Function template `bind`

[func.bind.bind]

1 In the text that follows:

- (1.1) — `FD` is the type `decay_t<F>`,
- (1.2) — `fd` is an lvalue of type `FD` constructed from `std::forward<F>(f)`,
- (1.3) — `Ti` is the  $i^{\text{th}}$  type in the template parameter pack `BoundArgs`,
- (1.4) — `TDi` is the type `decay_t<Ti>`,
- (1.5) — `ti` is the  $i^{\text{th}}$  argument in the function parameter pack `bound_args`,
- (1.6) — `tdi` is an lvalue of type `TDi` constructed from `std::forward<Ti>(ti)`,
- (1.7) — `Uj` is the  $j^{\text{th}}$  deduced type of the `UnBoundArgs&&...` parameter of the forwarding call wrapper, and
- (1.8) — `uj` is the  $j^{\text{th}}$  argument associated with `Uj`.

```
template<class F, class... BoundArgs>
 unspecified bind(F&& f, BoundArgs&&... bound_args);
```

2 *Requires:* `is_constructible_v<FD, F>` shall be `true`. For each `Ti` in `BoundArgs`, `is_constructible_v<TDi, Ti>` shall be `true`. `INVOKE(fd, w1, w2, ..., wN)` (24.14.3) shall be a valid expression for some values `w1, w2, ..., wN`, where `N` has the value `sizeof...(bound_args)`. The cv-qualifiers *cv* of the call wrapper `g`, as specified below, shall be neither `volatile` nor `const volatile`.

3 *Returns:* A forwarding call wrapper `g` (24.14.3). The effect of `g(u1, u2, ..., uM)` shall be

```
INVOKE(fd, std::forward<V1>(v1), std::forward<V2>(v2), ..., std::forward<VN>(vN))
```

where the values and types of the bound arguments  $v_1, v_2, \dots, v_N$  are determined as specified below. The copy constructor and move constructor of the forwarding call wrapper shall throw an exception if and only if the corresponding constructor of FD or of any of the types  $TD_i$  throws an exception.

4 *Throws:* Nothing unless the construction of `fd` or of one of the values `tdi` throws an exception.

5 *Remarks:* The return type shall satisfy the *Cpp17MoveConstructible* requirements. If all of FD and  $TD_i$  satisfy the *Cpp17CopyConstructible* requirements, then the return type shall satisfy the *Cpp17CopyConstructible* requirements. [Note: This implies that all of FD and  $TD_i$  are *Cpp17MoveConstructible*. — end note]

```
template<class R, class F, class... BoundArgs>
 unspecified bind(F&& f, BoundArgs&&... bound_args);
```

6 *Requires:* `is_constructible_v<FD, F>` shall be true. For each  $T_i$  in `BoundArgs`, `is_constructible_v<TDi, Ti>` shall be true. `INVOKE(fd, w1, w2, ..., wN)` shall be a valid expression for some values  $w_1, w_2, \dots, w_N$ , where  $N$  has the value `sizeof...(bound_args)`. The cv-qualifiers *cv* of the call wrapper `g`, as specified below, shall be neither `volatile` nor `const volatile`.

7 *Returns:* A forwarding call wrapper `g` (24.14.3). The effect of `g(u1, u2, ..., uM)` shall be

```
INVOKE<R>(fd, std::forward<V1>(v1), std::forward<V2>(v2), ..., std::forward<VN>(vN))
```

where the values and types of the bound arguments  $v_1, v_2, \dots, v_N$  are determined as specified below. The copy constructor and move constructor of the forwarding call wrapper shall throw an exception if and only if the corresponding constructor of FD or of any of the types  $TD_i$  throws an exception.

8 *Throws:* Nothing unless the construction of `fd` or of one of the values `tdi` throws an exception.

9 *Remarks:* The return type shall satisfy the *Cpp17MoveConstructible* requirements. If all of FD and  $TD_i$  satisfy the *Cpp17CopyConstructible* requirements, then the return type shall satisfy the *Cpp17CopyConstructible* requirements. [Note: This implies that all of FD and  $TD_i$  are *Cpp17MoveConstructible*. — end note]

10 The values of the *bound arguments*  $v_1, v_2, \dots, v_N$  and their corresponding types  $V_1, V_2, \dots, V_N$  depend on the types  $TD_i$  derived from the call to `bind` and the cv-qualifiers *cv* of the call wrapper `g` as follows:

- (10.1) — if  $TD_i$  is `reference_wrapper<T>`, the argument is `tdi.get()` and its type  $V_i$  is `T&`;
- (10.2) — if the value of `is_bind_expression_v<TDi>` is true, the argument is `tdi(std::forward<Uj>(uj)...)` and its type  $V_i$  is `invoke_result_t<TDi cv &, Uj...>&&`;
- (10.3) — if the value  $j$  of `is_placeholder_v<TDi>` is not zero, the argument is `std::forward<Uj>(uj)` and its type  $V_i$  is `Uj&&`;
- (10.4) — otherwise, the value is `tdi` and its type  $V_i$  is `TDi cv &`.

#### 24.14.12.4 Placeholders

[func.bind.place]

```
namespace std::placeholders {
 // M is the implementation-defined number of placeholders
 see below _1;
 see below _2;
 .
 .
 .
 see below _M;
}
```

1 All placeholder types shall be *Cpp17DefaultConstructible* and *Cpp17CopyConstructible*, and their default constructors and copy/move constructors shall not throw exceptions. It is implementation-defined whether placeholder types are *Cpp17CopyAssignable*. *Cpp17CopyAssignable* placeholders' copy assignment operators shall not throw exceptions.

2 Placeholders should be defined as:

```
inline constexpr unspecified _1{};
```

If they are not, they shall be declared as:

```
extern unspecified _1;
```

**24.14.13 Function template mem\_fn** [func.memfn]

```
template<class R, class T> unspecified mem_fn(R T::* pm) noexcept;
```

- <sup>1</sup> *Returns:* A simple call wrapper (24.14.2) fn such that the expression fn(t, a<sub>2</sub>, ..., a<sub>N</sub>) is equivalent to INVOKE(pm, t, a<sub>2</sub>, ..., a<sub>N</sub>) (24.14.3).

**24.14.14 Polymorphic function wrappers** [func.wrap]

- <sup>1</sup> This subclause describes a polymorphic wrapper class that encapsulates arbitrary callable objects.

**24.14.14.1 Class bad\_function\_call** [func.wrap.badcall]

- <sup>1</sup> An exception of type bad\_function\_call is thrown by function::operator() (24.14.14.2.4) when the function wrapper object has no target.

```
namespace std {
 class bad_function_call : public exception {
 public:
 // 24.14.14.1.1, constructor
 bad_function_call() noexcept;
 };
}
```

**24.14.14.1.1 bad\_function\_call constructor** [func.wrap.badcall.const]

```
bad_function_call() noexcept;
```

- <sup>1</sup> *Effects:* Constructs a bad\_function\_call object.
- <sup>2</sup> *Ensures:* what() returns an implementation-defined NTBS.

**24.14.14.2 Class template function** [func.wrap.func]

```
namespace std {
 template<class> class function; // not defined

 template<class R, class... ArgTypes>
 class function<R(ArgTypes...)> {
 public:
 using result_type = R;

 // 24.14.14.2.1, construct/copy/destroy
 function() noexcept;
 function(nullptr_t) noexcept;
 function(const function&);
 function(function&&);
 template<class F> function(F);

 function& operator=(const function&);
 function& operator=(function&&);
 function& operator=(nullptr_t) noexcept;
 template<class F> function& operator=(F&&);
 template<class F> function& operator=(reference_wrapper<F>) noexcept;

 ~function();

 // 24.14.14.2.2, function modifiers
 void swap(function&) noexcept;

 // 24.14.14.2.3, function capacity
 explicit operator bool() const noexcept;

 // 24.14.14.2.4, function invocation
 R operator()(ArgTypes...) const;
```

```

// 24.14.14.2.5, function target access
const type_info& target_type() const noexcept;
template<class T> T* target() noexcept;
template<class T> const T* target() const noexcept;
};

template<class R, class... ArgTypes>
function(R*)(ArgTypes...) -> function<R(ArgTypes...)>;

template<class F> function(F) -> function<see below>;

// 24.14.14.2.6, Null pointer comparisons
template<class R, class... ArgTypes>
bool operator==(const function<R(ArgTypes...)>&, nullptr_t) noexcept;

template<class R, class... ArgTypes>
bool operator==(nullptr_t, const function<R(ArgTypes...)>&) noexcept;

template<class R, class... ArgTypes>
bool operator!=(const function<R(ArgTypes...)>&, nullptr_t) noexcept;

template<class R, class... ArgTypes>
bool operator!=(nullptr_t, const function<R(ArgTypes...)>&) noexcept;

// 24.14.14.2.7, specialized algorithms
template<class R, class... ArgTypes>
void swap(function<R(ArgTypes...)>&, function<R(ArgTypes...)>&) noexcept;
}

```

- 1 The `function` class template provides polymorphic wrappers that generalize the notion of a function pointer. Wrappers can store, copy, and call arbitrary callable objects (24.14.2), given a call signature (24.14.2), allowing functions to be first-class objects.
- 2 A callable type (24.14.2) `F` is *Lvalue-Callable* for argument types `ArgTypes` and return type `R` if the expression `INVOKE<R>(declval<F>(), declval<ArgTypes>()...)`, considered as an unevaluated operand (8.2), is well-formed (24.14.3).
- 3 The `function` class template is a call wrapper (24.14.2) whose call signature (24.14.2) is `R(ArgTypes...)`.
- 4 [Note: The types deduced by the deduction guides for `function` may change in future versions of this International Standard. — end note]

#### 24.14.14.2.1 function construct/copy/destroy

[func.wrap.func.con]

```
function() noexcept;
```

- 1 *Ensures:* `!*this`.

```
function(nullptr_t) noexcept;
```

- 2 *Ensures:* `!*this`.

```
function(const function& f);
```

- 3 *Ensures:* `!*this` if `!f`; otherwise, `*this` targets a copy of `f.target()`.

- 4 *Throws:* Shall not throw exceptions if `f`'s target is a specialization of `reference_wrapper` or a function pointer. Otherwise, may throw `bad_alloc` or any exception thrown by the copy constructor of the stored callable object. [Note: Implementations should avoid the use of dynamically allocated memory for small callable objects, for example, where `f`'s target is an object holding only a pointer or reference to an object and a member function pointer. — end note]

```
function(function&& f);
```

- 5 *Ensures:* If `!f`, `*this` has no target; otherwise, the target of `*this` is equivalent to the target of `f` before the construction, and `f` is in a valid state with an unspecified value.

- 6 *Throws:* Shall not throw exceptions if `f`'s target is a specialization of `reference_wrapper` or a function pointer. Otherwise, may throw `bad_alloc` or any exception thrown by the copy or move constructor



of the stored callable object. [*Note: Implementations should avoid the use of dynamically allocated memory for small callable objects, for example, where `f`'s target is an object holding only a pointer or reference to an object and a member function pointer. — end note*]

```
template<class F> function(F f);
```

7 *Requires:* F shall be *Cpp17CopyConstructible*.

8 *Remarks:* This constructor template shall not participate in overload resolution unless F is Lvalue-Callable (24.14.14.2) for argument types `ArgTypes...` and return type R.

9 *Ensures:* `!*this` if any of the following hold:

(9.1) — `f` is a null function pointer value.

(9.2) — `f` is a null member pointer value.

(9.3) — F is an instance of the `function` class template, and `!f`.

10 Otherwise, `*this` targets a copy of `f` initialized with `std::move(f)`. [*Note: Implementations should avoid the use of dynamically allocated memory for small callable objects, for example, where `f` is an object holding only a pointer or reference to an object and a member function pointer. — end note*]

11 *Throws:* Shall not throw exceptions when `f` is a function pointer or a `reference_wrapper<T>` for some T. Otherwise, may throw `bad_alloc` or any exception thrown by F's copy or move constructor.

```
template<class F> function(F) -> function<see below>;
```

12 *Remarks:* This deduction guide participates in overload resolution only if `&F::operator()` is well-formed when treated as an unevaluated operand. In that case, if `decltype(&F::operator())` is of the form `R(G::*)(A...) cv &opt noexceptopt` for a class type G, then the deduced type is `function<R(A...)>`.

13 [*Example:*

```
void f() {
 int i{5};
 function g = [&](double) { return i; }; // deduces function<int(double)>
}
```

— end example]

```
function& operator=(const function& f);
```

14 *Effects:* As if by `function(f).swap(*this)`;

15 *Returns:* `*this`.

```
function& operator=(function&& f);
```

16 *Effects:* Replaces the target of `*this` with the target of `f`.

17 *Returns:* `*this`.

```
function& operator=(nullptr_t) noexcept;
```

18 *Effects:* If `*this != nullptr`, destroys the target of `this`.

19 *Ensures:* `!(*this)`.

20 *Returns:* `*this`.

```
template<class F> function& operator=(F&& f);
```

21 *Effects:* As if by: `function(std::forward<F>(f)).swap(*this)`;

22 *Returns:* `*this`.

23 *Remarks:* This assignment operator shall not participate in overload resolution unless `decay_t<F>` is Lvalue-Callable (24.14.14.2) for argument types `ArgTypes...` and return type R.

```
template<class F> function& operator=(reference_wrapper<F> f) noexcept;
```

24 *Effects:* As if by: `function(f).swap(*this)`;

25 *Returns:* `*this`.

~function();

26 *Effects:* If \*this != nullptr, destroys the target of this.

#### 24.14.14.2.2 function modifiers

[func.wrap.func.mod]

void swap(function& other) noexcept;

1 *Effects:* Interchanges the targets of \*this and other.

#### 24.14.14.2.3 function capacity

[func.wrap.func.cap]

explicit operator bool() const noexcept;

1 *Returns:* true if \*this has a target, otherwise false.

#### 24.14.14.2.4 function invocation

[func.wrap.func.inv]

R operator()(ArgTypes... args) const;

1 *Returns:* `INVOKE<R>(f, std::forward<ArgTypes>(args)...) (24.14.3)`, where `f` is the target object (24.14.2) of \*this.

2 *Throws:* `bad_function_call` if !\*this; otherwise, any exception thrown by the wrapped callable object.

#### 24.14.14.2.5 function target access

[func.wrap.func.targ]

const type\_info& target\_type() const noexcept;

1 *Returns:* If \*this has a target of type T, `typeid(T)`; otherwise, `typeid(void)`.

template<class T> T\* target() noexcept;

template<class T> const T\* target() const noexcept;

2 *Returns:* If `target_type() == typeid(T)` a pointer to the stored function target; otherwise a null pointer.

#### 24.14.14.2.6 null pointer comparison functions

[func.wrap.func.nullptr]

template<class R, class... ArgTypes>

bool operator==(const function<R(ArgTypes...)>& f, nullptr\_t) noexcept;

template<class R, class... ArgTypes>

bool operator==(nullptr\_t, const function<R(ArgTypes...)>& f) noexcept;

1 *Returns:* !f.

template<class R, class... ArgTypes>

bool operator!=(const function<R(ArgTypes...)>& f, nullptr\_t) noexcept;

template<class R, class... ArgTypes>

bool operator!=(nullptr\_t, const function<R(ArgTypes...)>& f) noexcept;

2 *Returns:* (bool)f.

#### 24.14.14.2.7 specialized algorithms

[func.wrap.func.alg]

template<class R, class... ArgTypes>

void swap(function<R(ArgTypes...)>& f1, function<R(ArgTypes...)>& f2) noexcept;

1 *Effects:* As if by: `f1.swap(f2)`;

### 24.14.15 Searchers

[func.search]

1 This subclause provides function object types (24.14) for operations that search for a sequence [pat\_first, pat\_last) in another sequence [first, last) that is provided to the object's function call operator. The first sequence (the pattern to be searched for) is provided to the object's constructor, and the second (the sequence to be searched) is provided to the function call operator.

2 Each specialization of a class template specified in this subclause 24.14.15 shall satisfy the *Cpp17CopyConstructible* and *Cpp17CopyAssignable* requirements. Template parameters named

(2.1) — ForwardIterator,

(2.2) — ForwardIterator1,

- (2.3) — `ForwardIterator2`,
- (2.4) — `RandomAccessIterator`,
- (2.5) — `RandomAccessIterator1`,
- (2.6) — `RandomAccessIterator2`, and
- (2.7) — `BinaryPredicate`

of templates specified in this subclause 24.14.15 shall satisfy the same requirements and semantics as specified in 29.1. Template parameters named `Hash` shall satisfy the *Cpp17Hash* requirements (Table 31).

- 3 The Boyer-Moore searcher implements the Boyer-Moore search algorithm. The Boyer-Moore-Horspool searcher implements the Boyer-Moore-Horspool search algorithm. In general, the Boyer-Moore searcher will use more memory and give better runtime performance than Boyer-Moore-Horspool.

#### 24.14.15.1 Class template `default_searcher` [func.search.default]

```
template<class ForwardIterator1, class BinaryPredicate = equal_to<>>
class default_searcher {
public:
 default_searcher(ForwardIterator1 pat_first, ForwardIterator1 pat_last,
 BinaryPredicate pred = BinaryPredicate());

 template<class ForwardIterator2>
 pair<ForwardIterator2, ForwardIterator2>
 operator()(ForwardIterator2 first, ForwardIterator2 last) const;

private:
 ForwardIterator1 pat_first_; // exposition only
 ForwardIterator1 pat_last_; // exposition only
 BinaryPredicate pred_; // exposition only
};
```

```
default_searcher(ForwardIterator pat_first, ForwardIterator pat_last,
 BinaryPredicate pred = BinaryPredicate());
```

- 1 *Effects:* Constructs a `default_searcher` object, initializing `pat_first_` with `pat_first`, `pat_last_` with `pat_last`, and `pred_` with `pred`.

- 2 *Throws:* Any exception thrown by the copy constructor of `BinaryPredicate` or `ForwardIterator1`.

```
template<class ForwardIterator2>
pair<ForwardIterator2, ForwardIterator2>
operator()(ForwardIterator2 first, ForwardIterator2 last) const;
```

- 3 *Effects:* Returns a pair of iterators `i` and `j` such that

- (3.1) — `i == search(first, last, pat_first_, pat_last_, pred_)`, and

- (3.2) — if `i == last`, then `j == last`, otherwise `j == next(i, distance(pat_first_, pat_last_))`.

#### 24.14.15.2 Class template `boyer_moore_searcher` [func.search.bm]

```
template<class RandomAccessIterator1,
 class Hash = hash<typename iterator_traits<RandomAccessIterator1>::value_type>,
 class BinaryPredicate = equal_to<>>
class boyer_moore_searcher {
public:
 boyer_moore_searcher(RandomAccessIterator1 pat_first,
 RandomAccessIterator1 pat_last,
 Hash hf = Hash(),
 BinaryPredicate pred = BinaryPredicate());

 template<class RandomAccessIterator2>
 pair<RandomAccessIterator2, RandomAccessIterator2>
 operator()(RandomAccessIterator2 first, RandomAccessIterator2 last) const;

private:
 RandomAccessIterator1 pat_first_; // exposition only
```

```

 RandomAccessIterator1 pat_last_; // exposition only
 Hash hash_; // exposition only
 BinaryPredicate pred_; // exposition only
};

```

```

boyer_moore_searcher(RandomAccessIterator1 pat_first,
 RandomAccessIterator1 pat_last,
 Hash hf = Hash(),
 BinaryPredicate pred = BinaryPredicate());

```

1 *Requires:* The value type of `RandomAccessIterator1` shall satisfy the *Cpp17DefaultConstructible* requirements, the *Cpp17CopyConstructible* requirements, and the *Cpp17CopyAssignable* requirements.

2 *Requires:* For any two values A and B of the type `iterator_traits<RandomAccessIterator1>::value_type`, if `pred(A, B) == true`, then `hf(A) == hf(B)` shall be true.

3 *Effects:* Constructs a `boyer_moore_searcher` object, initializing `pat_first_` with `pat_first`, `pat_last_` with `pat_last`, `hash_` with `hf`, and `pred_` with `pred`.

4 *Throws:* Any exception thrown by the copy constructor of `RandomAccessIterator1`, or by the default constructor, copy constructor, or the copy assignment operator of the value type of `RandomAccessIterator1`, or the copy constructor or `operator()` of `BinaryPredicate` or `Hash`. May throw `bad_alloc` if additional memory needed for internal data structures cannot be allocated.

```

template<class RandomAccessIterator2>
pair<RandomAccessIterator2, RandomAccessIterator2>
operator()(RandomAccessIterator2 first, RandomAccessIterator2 last) const;

```

5 *Requires:* `RandomAccessIterator1` and `RandomAccessIterator2` shall have the same value type.

6 *Effects:* Finds a subsequence of equal values in a sequence.

7 *Returns:* A pair of iterators `i` and `j` such that

(7.1) — `i` is the first iterator in the range `[first, last - (pat_last_ - pat_first_))` such that for every non-negative integer `n` less than `pat_last_ - pat_first_` the following condition holds: `pred(*(i + n), *(pat_first_ + n)) != false`, and

(7.2) — `j == next(i, distance(pat_first_, pat_last_))`.

Returns `make_pair(first, first)` if `[pat_first_, pat_last_)` is empty, otherwise returns `make_pair(last, last)` if no such iterator is found.

8 *Complexity:* At most  $(last - first) * (pat\_last\_ - pat\_first\_)$  applications of the predicate.

### 24.14.15.3 Class template `boyer_moore_horspool_searcher` [func.search.bmh]

```

template<class RandomAccessIterator1,
 class Hash = hash<typename iterator_traits<RandomAccessIterator1>::value_type>,
 class BinaryPredicate = equal_to<>>
class boyer_moore_horspool_searcher {
public:
 boyer_moore_horspool_searcher(RandomAccessIterator1 pat_first,
 RandomAccessIterator1 pat_last,
 Hash hf = Hash(),
 BinaryPredicate pred = BinaryPredicate());

```

```

template<class RandomAccessIterator2>
pair<RandomAccessIterator2, RandomAccessIterator2>
operator()(RandomAccessIterator2 first, RandomAccessIterator2 last) const;

```

```

private:
 RandomAccessIterator1 pat_first_; // exposition only
 RandomAccessIterator1 pat_last_; // exposition only
 Hash hash_; // exposition only
 BinaryPredicate pred_; // exposition only
};

```

```

boyer_moore_horspool_searcher(RandomAccessIterator1 pat_first,
 RandomAccessIterator1 pat_last,
 Hash hf = Hash(),
 BinaryPredicate pred = BinaryPredicate());

```

1 *Requires:* The value type of `RandomAccessIterator1` shall satisfy the *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, and *Cpp17CopyAssignable* requirements.

2 *Requires:* For any two values A and B of the type `iterator_traits<RandomAccessIterator1>::value_type`, if `pred(A, B) == true`, then `hf(A) == hf(B)` shall be true.

3 *Effects:* Constructs a `boyer_moore_horspool_searcher` object, initializing `pat_first_` with `pat_first`, `pat_last_` with `pat_last`, `hash_` with `hf`, and `pred_` with `pred`.

4 *Throws:* Any exception thrown by the copy constructor of `RandomAccessIterator1`, or by the default constructor, copy constructor, or the copy assignment operator of the value type of `RandomAccessIterator1` or the copy constructor or operator() of `BinaryPredicate` or `Hash`. May throw `bad_alloc` if additional memory needed for internal data structures cannot be allocated.

```

template<class RandomAccessIterator2>
pair<RandomAccessIterator2, RandomAccessIterator2>
operator()(RandomAccessIterator2 first, RandomAccessIterator2 last) const;

```

5 *Requires:* `RandomAccessIterator1` and `RandomAccessIterator2` shall have the same value type.

6 *Effects:* Finds a subsequence of equal values in a sequence.

7 *Returns:* A pair of iterators `i` and `j` such that

(7.1) — `i` is the first iterator `i` in the range `[first, last - (pat_last_ - pat_first_))` such that for every non-negative integer `n` less than `pat_last_ - pat_first_` the following condition holds: `pred(*(i + n), *(pat_first_ + n)) != false`, and

(7.2) — `j == next(i, distance(pat_first_, pat_last_))`.

Returns `make_pair(first, first)` if `[pat_first_, pat_last_)` is empty, otherwise returns `make_pair(last, last)` if no such iterator is found.

8 *Complexity:* At most `(last - first) * (pat_last_ - pat_first_)` applications of the predicate.

#### 24.14.16 Class template `hash`

[unord.hash]

1 The unordered associative containers defined in 27.5 use specializations of the class template `hash` (24.14.1) as the default hash function.

2 Each specialization of `hash` is either enabled or disabled, as described below. [Note: Enabled specializations meet the *Cpp17Hash* requirements, and disabled specializations do not. — end note] Each header that declares the template `hash` provides enabled specializations of `hash` for `nullptr_t` and all cv-unqualified arithmetic, enumeration, and pointer types. For any type `Key` for which neither the library nor the user provides an explicit or partial specialization of the class template `hash`, `hash<Key>` is disabled.

3 If the library provides an explicit or partial specialization of `hash<Key>`, that specialization is enabled except as noted otherwise, and its member functions are `noexcept` except as noted otherwise.

4 If `H` is a disabled specialization of `hash`, these values are false: `is_default_constructible_v<H>`, `is_copy_constructible_v<H>`, `is_move_constructible_v<H>`, `is_copy_assignable_v<H>`, and `is_move_assignable_v<H>`. Disabled specializations of `hash` are not function object types (24.14). [Note: This means that the specialization of `hash` exists, but any attempts to use it as a *Cpp17Hash* will be ill-formed. — end note]

5 An enabled specialization `hash<Key>` will:

(5.1) — satisfy the *Cpp17Hash* requirements (Table 31), with `Key` as the function call argument type, the *Cpp17DefaultConstructible* requirements (Table 24), the *Cpp17CopyAssignable* requirements (Table 28),

(5.2) — be swappable (20.5.3.2) for lvalues,

(5.3) — satisfy the requirement that if `k1 == k2` is true, `h(k1) == h(k2)` is also true, where `h` is an object of type `hash<Key>` and `k1` and `k2` are objects of type `Key`;

- (5.4) — satisfy the requirement that the expression `h(k)`, where `h` is an object of type `hash<Key>` and `k` is an object of type `Key`, shall not throw an exception unless `hash<Key>` is a program-defined specialization that depends on at least one program-defined type.

## 24.15 Metaprogramming and type traits [meta]

- <sup>1</sup> This subclause describes components used by C++ programs, particularly in templates, to support the widest possible range of types, optimise template code usage, detect type related user errors, and perform type inference and transformation at compile time. It includes type classification traits, type property inspection traits, and type transformations. The type classification traits describe a complete taxonomy of all possible C++ types, and state where in that taxonomy a given type belongs. The type property inspection traits allow important characteristics of types or of combinations of types to be inspected. The type transformations allow certain properties of types to be manipulated.
- <sup>2</sup> All functions specified in this subclause are signal-safe (21.12.4).

### 24.15.1 Requirements [meta.rqmts]

- <sup>1</sup> A *Cpp17UnaryTypeTrait* describes a property of a type. It shall be a class template that takes one template type argument and, optionally, additional arguments that help define the property being described. It shall be *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, and publicly and unambiguously derived, directly or indirectly, from its *base characteristic*, which is a specialization of the template `integral_constant` (24.15.3), with the arguments to the template `integral_constant` determined by the requirements for the particular property being described. The member names of the base characteristic shall not be hidden and shall be unambiguously available in the *Cpp17UnaryTypeTrait*.
- <sup>2</sup> A *Cpp17BinaryTypeTrait* describes a relationship between two types. It shall be a class template that takes two template type arguments and, optionally, additional arguments that help define the relationship being described. It shall be *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, and publicly and unambiguously derived, directly or indirectly, from its *base characteristic*, which is a specialization of the template `integral_constant` (24.15.3), with the arguments to the template `integral_constant` determined by the requirements for the particular relationship being described. The member names of the base characteristic shall not be hidden and shall be unambiguously available in the *Cpp17BinaryTypeTrait*.
- <sup>3</sup> A *Cpp17TransformationTrait* modifies a property of a type. It shall be a class template that takes one template type argument and, optionally, additional arguments that help define the modification. It shall define a publicly accessible nested type named `type`, which shall be a synonym for the modified type.

### 24.15.2 Header `<type_traits>` synopsis [meta.type.synop]

```
namespace std {
 // 24.15.3, helper class
 template<class T, T v> struct integral_constant;

 template<bool B>
 using bool_constant = integral_constant<bool, B>;
 using true_type = bool_constant<true>;
 using false_type = bool_constant<false>;

 // 24.15.4.1, primary type categories
 template<class T> struct is_void;
 template<class T> struct is_null_pointer;
 template<class T> struct is_integral;
 template<class T> struct is_floating_point;
 template<class T> struct is_array;
 template<class T> struct is_pointer;
 template<class T> struct is_lvalue_reference;
 template<class T> struct is_rvalue_reference;
 template<class T> struct is_member_object_pointer;
 template<class T> struct is_member_function_pointer;
 template<class T> struct is_enum;
 template<class T> struct is_union;
 template<class T> struct is_class;
 template<class T> struct is_function;
```

```

// 24.15.4.2, composite type categories
template<class T> struct is_reference;
template<class T> struct is_arithmetic;
template<class T> struct is_fundamental;
template<class T> struct is_object;
template<class T> struct is_scalar;
template<class T> struct is_compound;
template<class T> struct is_member_pointer;

// 24.15.4.3, type properties
template<class T> struct is_const;
template<class T> struct is_volatile;
template<class T> struct is_trivial;
template<class T> struct is_trivially_copyable;
template<class T> struct is_standard_layout;
template<class T> struct is_empty;
template<class T> struct is_polymorphic;
template<class T> struct is_abstract;
template<class T> struct is_final;
template<class T> struct is_aggregate;

template<class T> struct is_signed;
template<class T> struct is_unsigned;

template<class T, class... Args> struct is_constructible;
template<class T> struct is_default_constructible;
template<class T> struct is_copy_constructible;
template<class T> struct is_move_constructible;

template<class T, class U> struct is_assignable;
template<class T> struct is_copy_assignable;
template<class T> struct is_move_assignable;

template<class T, class U> struct is_swappable_with;
template<class T> struct is_swappable;

template<class T> struct is_destructible;

template<class T, class... Args> struct is_trivially_constructible;
template<class T> struct is_trivially_default_constructible;
template<class T> struct is_trivially_copy_constructible;
template<class T> struct is_trivially_move_constructible;

template<class T, class U> struct is_trivially_assignable;
template<class T> struct is_trivially_copy_assignable;
template<class T> struct is_trivially_move_assignable;
template<class T> struct is_trivially_destructible;

template<class T, class... Args> struct is_nothrow_constructible;
template<class T> struct is_nothrow_default_constructible;
template<class T> struct is_nothrow_copy_constructible;
template<class T> struct is_nothrow_move_constructible;

template<class T, class U> struct is_nothrow_assignable;
template<class T> struct is_nothrow_copy_assignable;
template<class T> struct is_nothrow_move_assignable;

template<class T, class U> struct is_nothrow_swappable_with;
template<class T> struct is_nothrow_swappable;

template<class T> struct is_nothrow_destructible;

template<class T> struct has_virtual_destructor;

```

```

template<class T> struct has_unique_object_representations;

// 24.15.5, type property queries
template<class T> struct alignment_of;
template<class T> struct rank;
template<class T, unsigned I = 0> struct extent;

// 24.15.6, type relations
template<class T, class U> struct is_same;
template<class Base, class Derived> struct is_base_of;
template<class From, class To> struct is_convertible;
template<class From, class To> struct is_nothrow_convertible;

template<class Fn, class... ArgTypes> struct is_invocable;
template<class R, class Fn, class... ArgTypes> struct is_invocable_r;

template<class Fn, class... ArgTypes> struct is_nothrow_invocable;
template<class R, class Fn, class... ArgTypes> struct is_nothrow_invocable_r;

// 24.15.7.1, const-volatile modifications
template<class T> struct remove_const;
template<class T> struct remove_volatile;
template<class T> struct remove_cv;
template<class T> struct add_const;
template<class T> struct add_volatile;
template<class T> struct add_cv;

template<class T>
 using remove_const_t = typename remove_const<T>::type;
template<class T>
 using remove_volatile_t = typename remove_volatile<T>::type;
template<class T>
 using remove_cv_t = typename remove_cv<T>::type;
template<class T>
 using add_const_t = typename add_const<T>::type;
template<class T>
 using add_volatile_t = typename add_volatile<T>::type;
template<class T>
 using add_cv_t = typename add_cv<T>::type;

// 24.15.7.2, reference modifications
template<class T> struct remove_reference;
template<class T> struct add_lvalue_reference;
template<class T> struct add_rvalue_reference;

template<class T>
 using remove_reference_t = typename remove_reference<T>::type;
template<class T>
 using add_lvalue_reference_t = typename add_lvalue_reference<T>::type;
template<class T>
 using add_rvalue_reference_t = typename add_rvalue_reference<T>::type;

// 24.15.7.3, sign modifications
template<class T> struct make_signed;
template<class T> struct make_unsigned;

template<class T>
 using make_signed_t = typename make_signed<T>::type;
template<class T>
 using make_unsigned_t = typename make_unsigned<T>::type;

// 24.15.7.4, array modifications
template<class T> struct remove_extent;
template<class T> struct remove_all_extents;

```



```

template<class T>
 using remove_extent_t = typename remove_extent<T>::type;
template<class T>
 using remove_all_extents_t = typename remove_all_extents<T>::type;

// 24.15.7.5, pointer modifications
template<class T> struct remove_pointer;
template<class T> struct add_pointer;

template<class T>
 using remove_pointer_t = typename remove_pointer<T>::type;
template<class T>
 using add_pointer_t = typename add_pointer<T>::type;

// 24.15.7.6, other transformations
template<class T> struct type_identity;
template<size_t Len, size_t Align = default-alignment> // see 24.15.7.6
 struct aligned_storage;
template<size_t Len, class... Types> struct aligned_union;
template<class T> struct remove_cvref;
template<class T> struct decay;
template<bool, class T = void> struct enable_if;
template<bool, class T, class F> struct conditional;
template<class... T> struct common_type;
template<class T, class U, template<class> class TQual, template<class> class UQual>
 struct basic_common_reference { };
template<class... T> struct common_reference;
template<class T> struct underlying_type;
template<class Fn, class... ArgTypes> struct invoke_result;

template<class T>
 using type_identity_t = typename type_identity<T>::type;
template<size_t Len, size_t Align = default-alignment> // see 24.15.7.6
 using aligned_storage_t = typename aligned_storage<Len, Align>::type;
template<size_t Len, class... Types>
 using aligned_union_t = typename aligned_union<Len, Types...>::type;
template<class T>
 using remove_cvref_t = typename remove_cvref<T>::type;
template<class T>
 using decay_t = typename decay<T>::type;
template<bool b, class T = void>
 using enable_if_t = typename enable_if<b, T>::type;
template<bool b, class T, class F>
 using conditional_t = typename conditional<b, T, F>::type;
template<class... T>
 using common_type_t = typename common_type<T...>::type;
template<class... T>
 using common_reference_t = typename common_reference<T...>::type;
template<class T>
 using underlying_type_t = typename underlying_type<T>::type;
template<class Fn, class... ArgTypes>
 using invoke_result_t = typename invoke_result<Fn, ArgTypes...>::type;
template<class...>
 using void_t = void;

// 24.15.8, logical operator traits
template<class... B> struct conjunction;
template<class... B> struct disjunction;
template<class B> struct negation;

// 24.15.9, endian
enum class endian {
 little = see below,
 big = see below,
};

```

```

 native = see below
};

// 24.15.4.1, primary type categories
template<class T>
 inline constexpr bool is_void_v = is_void<T>::value;
template<class T>
 inline constexpr bool is_null_pointer_v = is_null_pointer<T>::value;
template<class T>
 inline constexpr bool is_integral_v = is_integral<T>::value;
template<class T>
 inline constexpr bool is_floating_point_v = is_floating_point<T>::value;
template<class T>
 inline constexpr bool is_array_v = is_array<T>::value;
template<class T>
 inline constexpr bool is_pointer_v = is_pointer<T>::value;
template<class T>
 inline constexpr bool is_lvalue_reference_v = is_lvalue_reference<T>::value;
template<class T>
 inline constexpr bool is_rvalue_reference_v = is_rvalue_reference<T>::value;
template<class T>
 inline constexpr bool is_member_object_pointer_v = is_member_object_pointer<T>::value;
template<class T>
 inline constexpr bool is_member_function_pointer_v = is_member_function_pointer<T>::value;
template<class T>
 inline constexpr bool is_enum_v = is_enum<T>::value;
template<class T>
 inline constexpr bool is_union_v = is_union<T>::value;
template<class T>
 inline constexpr bool is_class_v = is_class<T>::value;
template<class T>
 inline constexpr bool is_function_v = is_function<T>::value;

// 24.15.4.2, composite type categories
template<class T>
 inline constexpr bool is_reference_v = is_reference<T>::value;
template<class T>
 inline constexpr bool is_arithmetic_v = is_arithmetic<T>::value;
template<class T>
 inline constexpr bool is_fundamental_v = is_fundamental<T>::value;
template<class T>
 inline constexpr bool is_object_v = is_object<T>::value;
template<class T>
 inline constexpr bool is_scalar_v = is_scalar<T>::value;
template<class T>
 inline constexpr bool is_compound_v = is_compound<T>::value;
template<class T>
 inline constexpr bool is_member_pointer_v = is_member_pointer<T>::value;

// 24.15.4.3, type properties
template<class T>
 inline constexpr bool is_const_v = is_const<T>::value;
template<class T>
 inline constexpr bool is_volatile_v = is_volatile<T>::value;
template<class T>
 inline constexpr bool is_trivial_v = is_trivial<T>::value;
template<class T>
 inline constexpr bool is_trivially_copyable_v = is_trivially_copyable<T>::value;
template<class T>
 inline constexpr bool is_standard_layout_v = is_standard_layout<T>::value;
template<class T>
 inline constexpr bool is_empty_v = is_empty<T>::value;
template<class T>
 inline constexpr bool is_polymorphic_v = is_polymorphic<T>::value;

```

```

template<class T>
 inline constexpr bool is_abstract_v = is_abstract<T>::value;
template<class T>
 inline constexpr bool is_final_v = is_final<T>::value;
template<class T>
 inline constexpr bool is_aggregate_v = is_aggregate<T>::value;
template<class T>
 inline constexpr bool is_signed_v = is_signed<T>::value;
template<class T>
 inline constexpr bool is_unsigned_v = is_unsigned<T>::value;
template<class T, class... Args>
 inline constexpr bool is_constructible_v = is_constructible<T, Args...>::value;
template<class T>
 inline constexpr bool is_default_constructible_v = is_default_constructible<T>::value;
template<class T>
 inline constexpr bool is_copy_constructible_v = is_copy_constructible<T>::value;
template<class T>
 inline constexpr bool is_move_constructible_v = is_move_constructible<T>::value;
template<class T, class U>
 inline constexpr bool is_assignable_v = is_assignable<T, U>::value;
template<class T>
 inline constexpr bool is_copy_assignable_v = is_copy_assignable<T>::value;
template<class T>
 inline constexpr bool is_move_assignable_v = is_move_assignable<T>::value;
template<class T, class U>
 inline constexpr bool is_swappable_with_v = is_swappable_with<T, U>::value;
template<class T>
 inline constexpr bool is_swappable_v = is_swappable<T>::value;
template<class T>
 inline constexpr bool is_destructible_v = is_destructible<T>::value;
template<class T, class... Args>
 inline constexpr bool is_trivially_constructible_v
 = is_trivially_constructible<T, Args...>::value;
template<class T>
 inline constexpr bool is_trivially_default_constructible_v
 = is_trivially_default_constructible<T>::value;
template<class T>
 inline constexpr bool is_trivially_copy_constructible_v
 = is_trivially_copy_constructible<T>::value;
template<class T>
 inline constexpr bool is_trivially_move_constructible_v
 = is_trivially_move_constructible<T>::value;
template<class T, class U>
 inline constexpr bool is_trivially_assignable_v = is_trivially_assignable<T, U>::value;
template<class T>
 inline constexpr bool is_trivially_copy_assignable_v
 = is_trivially_copy_assignable<T>::value;
template<class T>
 inline constexpr bool is_trivially_move_assignable_v
 = is_trivially_move_assignable<T>::value;
template<class T>
 inline constexpr bool is_trivially_destructible_v = is_trivially_destructible<T>::value;
template<class T, class... Args>
 inline constexpr bool is_nothrow_constructible_v
 = is_nothrow_constructible<T, Args...>::value;
template<class T>
 inline constexpr bool is_nothrow_default_constructible_v
 = is_nothrow_default_constructible<T>::value;
template<class T>
 inline constexpr bool is_nothrow_copy_constructible_v
 = is_nothrow_copy_constructible<T>::value;
template<class T>
 inline constexpr bool is_nothrow_move_constructible_v
 = is_nothrow_move_constructible<T>::value;

```

```

template<class T, class U>
 inline constexpr bool is_nothrow_assignable_v = is_nothrow_assignable<T, U>::value;
template<class T>
 inline constexpr bool is_nothrow_copy_assignable_v = is_nothrow_copy_assignable<T>::value;
template<class T>
 inline constexpr bool is_nothrow_move_assignable_v = is_nothrow_move_assignable<T>::value;
template<class T, class U>
 inline constexpr bool is_nothrow_swappable_with_v = is_nothrow_swappable_with<T, U>::value;
template<class T>
 inline constexpr bool is_nothrow_swappable_v = is_nothrow_swappable<T>::value;
template<class T>
 inline constexpr bool is_nothrow_destructible_v = is_nothrow_destructible<T>::value;
template<class T>
 inline constexpr bool has_virtual_destructor_v = has_virtual_destructor<T>::value;
template<class T>
 inline constexpr bool has_unique_object_representations_v
 = has_unique_object_representations<T>::value;

// 24.15.5, type property queries
template<class T>
 inline constexpr size_t alignment_of_v = alignment_of<T>::value;
template<class T>
 inline constexpr size_t rank_v = rank<T>::value;
template<class T, unsigned I = 0>
 inline constexpr size_t extent_v = extent<T, I>::value;

// 24.15.6, type relations
template<class T, class U>
 inline constexpr bool is_same_v = is_same<T, U>::value;
template<class Base, class Derived>
 inline constexpr bool is_base_of_v = is_base_of<Base, Derived>::value;
template<class From, class To>
 inline constexpr bool is_convertible_v = is_convertible<From, To>::value;
template<class From, class To>
 inline constexpr bool is_nothrow_convertible_v = is_nothrow_convertible<From, To>::value;
template<class Fn, class... ArgTypes>
 inline constexpr bool is_invocable_v = is_invocable<Fn, ArgTypes...>::value;
template<class R, class Fn, class... ArgTypes>
 inline constexpr bool is_invocable_r_v = is_invocable_r<R, Fn, ArgTypes...>::value;
template<class Fn, class... ArgTypes>
 inline constexpr bool is_nothrow_invocable_v = is_nothrow_invocable<Fn, ArgTypes...>::value;
template<class R, class Fn, class... ArgTypes>
 inline constexpr bool is_nothrow_invocable_r_v
 = is_nothrow_invocable_r<R, Fn, ArgTypes...>::value;

// 24.15.8, logical operator traits
template<class... B>
 inline constexpr bool conjunction_v = conjunction<B...>::value;
template<class... B>
 inline constexpr bool disjunction_v = disjunction<B...>::value;
template<class B>
 inline constexpr bool negation_v = negation::value;
}

```

- 1 The behavior of a program that adds specializations for any of the templates defined in this subclause is undefined unless otherwise specified.
- 2 Unless otherwise specified, an incomplete type may be used to instantiate a template in this subclause.

### 24.15.3 Helper classes

[meta.help]

```

namespace std {
 template<class T, T v> struct integral_constant {
 static constexpr T value = v;
 };
}

```

```

using value_type = T;
using type = integral_constant<T, v>;

constexpr operator value_type() const noexcept { return value; }
constexpr value_type operator()() const noexcept { return value; }
};
}

```

- <sup>1</sup> The class template `integral_constant`, alias template `bool_constant`, and its associated *typedef-names* `true_type` and `false_type` are used as base classes to define the interface for various type traits.

#### 24.15.4 Unary type traits [meta.unary]

- <sup>1</sup> This subclause contains templates that may be used to query the properties of a type at compile time.
- <sup>2</sup> Each of these templates shall be a *Cpp17UnaryTypeTrait* (24.15.1) with a base characteristic of `true_type` if the corresponding condition is `true`, otherwise `false_type`.

##### 24.15.4.1 Primary type categories [meta.unary.cat]

- <sup>1</sup> The primary type categories correspond to the descriptions given in subclause 6.7 of the C++ standard.
- <sup>2</sup> For any given type `T`, the result of applying one of these templates to `T` and to `cv T` shall yield the same result.
- <sup>3</sup> [Note: For any given type `T`, exactly one of the primary type categories has a `value` member that evaluates to `true`. — end note]

Table 44 — Primary type category predicates

| Template                                                | Condition                                             | Comments                                                               |
|---------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------|
| template<class T><br>struct is_void;                    | T is void                                             |                                                                        |
| template<class T><br>struct is_null_pointer;            | T is <code>nullptr_t</code> (6.7.1)                   |                                                                        |
| template<class T><br>struct is_integral;                | T is an integral type (6.7.1)                         |                                                                        |
| template<class T><br>struct is_floating_point;          | T is a floating-point type (6.7.1)                    |                                                                        |
| template<class T><br>struct is_array;                   | T is an array type (6.7.2) of known or unknown extent | Class template <code>array</code> (27.3.7) is not an array type.       |
| template<class T><br>struct is_pointer;                 | T is a pointer type (6.7.2)                           | Includes pointers to functions but not pointers to non-static members. |
| template<class T><br>struct is_lvalue_reference;        | T is an lvalue reference type (11.3.2)                |                                                                        |
| template<class T><br>struct is_rvalue_reference;        | T is an rvalue reference type (11.3.2)                |                                                                        |
| template<class T><br>struct is_member_object_pointer;   | T is a pointer to data member                         |                                                                        |
| template<class T><br>struct is_member_function_pointer; | T is a pointer to member function                     |                                                                        |
| template<class T><br>struct is_enum;                    | T is an enumeration type (6.7.2)                      |                                                                        |
| template<class T><br>struct is_union;                   | T is a union type (6.7.2)                             |                                                                        |
| template<class T><br>struct is_class;                   | T is a non-union class type (6.7.2)                   |                                                                        |
| template<class T><br>struct is_function;                | T is a function type (6.7.2)                          |                                                                        |

### 24.15.4.2 Composite type traits [meta.unary.comp]

- <sup>1</sup> These templates provide convenient compositions of the primary type categories, corresponding to the descriptions given in subclause 6.7.
- <sup>2</sup> For any given type T, the result of applying one of these templates to T and to *cv* T shall yield the same result.

Table 45 — Composite type category predicates

| Template                                                           | Condition                                          | Comments |
|--------------------------------------------------------------------|----------------------------------------------------|----------|
| <code>template&lt;class T&gt;<br/>struct is_reference;</code>      | T is an lvalue reference or<br>an rvalue reference |          |
| <code>template&lt;class T&gt;<br/>struct is_arithmetic;</code>     | T is an arithmetic<br>type (6.7.1)                 |          |
| <code>template&lt;class T&gt;<br/>struct is_fundamental;</code>    | T is a fundamental<br>type (6.7.1)                 |          |
| <code>template&lt;class T&gt;<br/>struct is_object;</code>         | T is an object type (6.7)                          |          |
| <code>template&lt;class T&gt;<br/>struct is_scalar;</code>         | T is a scalar type (6.7)                           |          |
| <code>template&lt;class T&gt;<br/>struct is_compound;</code>       | T is a compound<br>type (6.7.2)                    |          |
| <code>template&lt;class T&gt;<br/>struct is_member_pointer;</code> | T is a pointer-to-member<br>type (6.7.2)           |          |

### 24.15.4.3 Type properties [meta.unary.prop]

- <sup>1</sup> These templates provide access to some of the more important properties of types.
- <sup>2</sup> It is unspecified whether the library defines any full or partial specializations of any of these templates.
- <sup>3</sup> For all of the class templates X declared in this subclause, instantiating that template with a template-argument that is a class template specialization may result in the implicit instantiation of the template argument if and only if the semantics of X require that the argument is a complete type.
- <sup>4</sup> For the purpose of defining the templates in this subclause, a function call expression `declval<T>()` for any type T is considered to be a trivial (6.7, Clause 15) function call that is not an odr-use (6.2) of `declval` in the context of the corresponding definition notwithstanding the restrictions of 24.2.6.

Table 46 — Type property predicates

| Template                                                               | Condition                               | Preconditions                                                                                  |
|------------------------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------|
| <code>template&lt;class T&gt;<br/>struct is_const;</code>              | T is const-qualified (6.7.3)            |                                                                                                |
| <code>template&lt;class T&gt;<br/>struct is_volatile;</code>           | T is<br>volatile-qualified (6.7.3)      |                                                                                                |
| <code>template&lt;class T&gt;<br/>struct is_trivial;</code>            | T is a trivial type (6.7)               | <code>remove_all_extents_<br/>t&lt;T&gt;</code> shall be a complete<br>type or <i>cv</i> void. |
| <code>template&lt;class T&gt;<br/>struct is_trivially_copyable;</code> | T is a trivially copyable<br>type (6.7) | <code>remove_all_extents_<br/>t&lt;T&gt;</code> shall be a complete<br>type or <i>cv</i> void. |
| <code>template&lt;class T&gt;<br/>struct is_standard_layout;</code>    | T is a standard-layout<br>type (6.7)    | <code>remove_all_extents_<br/>t&lt;T&gt;</code> shall be a complete<br>type or <i>cv</i> void. |

Table 46 — Type property predicates (continued)

| Template                                                                         | Condition                                                                                                                                                                                                                                   | Preconditions                                                                                                                         |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <code>template&lt;class T&gt;<br/>struct is_empty;</code>                        | T is a class type, but not a union type, with no non-static data members other than subobjects of zero size, no virtual member functions, no virtual base classes, and no base class B for which <code>is_empty_v&lt;B&gt;</code> is false. | If T is a non-union class type, T shall be a complete type.                                                                           |
| <code>template&lt;class T&gt;<br/>struct is_polymorphic;</code>                  | T is a polymorphic class (13.3)                                                                                                                                                                                                             | If T is a non-union class type, T shall be a complete type.                                                                           |
| <code>template&lt;class T&gt;<br/>struct is_abstract;</code>                     | T is an abstract class (13.4)                                                                                                                                                                                                               | If T is a non-union class type, T shall be a complete type.                                                                           |
| <code>template&lt;class T&gt;<br/>struct is_final;</code>                        | T is a class type marked with the <i>class-virt-specifier</i> <code>final</code> (Clause 12). [Note: A union is a class type that can be marked with <code>final</code> . — end note]                                                       | If T is a class type, T shall be a complete type.                                                                                     |
| <code>template&lt;class T&gt;<br/>struct is_aggregate;</code>                    | T is an aggregate type (11.6.1)                                                                                                                                                                                                             | <code>remove_all_extents_t&lt;T&gt;</code> shall be a complete type or <i>cv</i> void.                                                |
| <code>template&lt;class T&gt;<br/>struct is_signed;</code>                       | If <code>is_arithmetic_v&lt;T&gt;</code> is true, the same result as <code>T(-1) &lt; T(0)</code> ; otherwise, false                                                                                                                        |                                                                                                                                       |
| <code>template&lt;class T&gt;<br/>struct is_unsigned;</code>                     | If <code>is_arithmetic_v&lt;T&gt;</code> is true, the same result as <code>T(0) &lt; T(-1)</code> ; otherwise, false                                                                                                                        |                                                                                                                                       |
| <code>template&lt;class T, class... Args&gt;<br/>struct is_constructible;</code> | For a function type T or for a <i>cv</i> void type T, <code>is_constructible_v&lt;T, Args...&gt;</code> is false, otherwise <i>see below</i>                                                                                                | T and all types in the template parameter pack <code>Args</code> shall be complete types, <i>cv</i> void, or arrays of unknown bound. |
| <code>template&lt;class T&gt;<br/>struct is_default_constructible;</code>        | <code>is_constructible_v&lt;T&gt;</code> is true.                                                                                                                                                                                           | T shall be a complete type, <i>cv</i> void, or an array of unknown bound.                                                             |
| <code>template&lt;class T&gt;<br/>struct is_copy_constructible;</code>           | For a referenceable type T (20.3.21), the same result as <code>is_constructible_v&lt;T, const T&amp;&gt;</code> , otherwise false.                                                                                                          | T shall be a complete type, <i>cv</i> void, or an array of unknown bound.                                                             |
| <code>template&lt;class T&gt;<br/>struct is_move_constructible;</code>           | For a referenceable type T, the same result as <code>is_constructible_v&lt;T, T&amp;&amp;&gt;</code> , otherwise false.                                                                                                                     | T shall be a complete type, <i>cv</i> void, or an array of unknown bound.                                                             |

Table 46 — Type property predicates (continued)

| Template                                                          | Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Preconditions                                                                       |
|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <pre>template&lt;class T, class U&gt; struct is_assignable;</pre> | <p>The expression <code>declval&lt;T&gt;() = declval&lt;U&gt;()</code> is well-formed when treated as an unevaluated operand (8.2). Access checking is performed as if in a context unrelated to T and U. Only the validity of the immediate context of the assignment expression is considered. [Note: The compilation of the expression can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — <i>end note</i>]</p> | <p>T and U shall be complete types, <i>cv</i> void, or arrays of unknown bound.</p> |
| <pre>template&lt;class T&gt; struct is_copy_assignable;</pre>     | <p>For a referenceable type T, the same result as <code>is_assignable_v&lt;T&amp;, const T&amp;&gt;</code>, otherwise <code>false</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p>T shall be a complete type, <i>cv</i> void, or an array of unknown bound.</p>    |
| <pre>template&lt;class T&gt; struct is_move_assignable;</pre>     | <p>For a referenceable type T, the same result as <code>is_assignable_v&lt;T&amp;, T&amp;&amp;&gt;</code>, otherwise <code>false</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>T shall be a complete type, <i>cv</i> void, or an array of unknown bound.</p>    |



Table 46 — Type property predicates (continued)

| Template                                                                             | Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Preconditions                                                                                                                          |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T, class U&gt; struct is_swappable_with;</pre>                | <p>The expressions <code>swap(declval&lt;T&gt;()), declval&lt;U&gt;())</code> and <code>swap(declval&lt;U&gt;()), declval&lt;T&gt;())</code> are each well-formed when treated as an unevaluated operand (8.2) in an overload-resolution context for swappable values (20.5.3.2). Access checking is performed as if in a context unrelated to T and U. Only the validity of the immediate context of the <code>swap</code> expressions is considered. [Note: The compilation of the expressions can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — end note]</p> | <p>T and U shall be complete types, <i>cv</i> void, or arrays of unknown bound.</p>                                                    |
| <pre>template&lt;class T&gt; struct is_swappable;</pre>                              | <p>For a referenceable type T, the same result as <code>is_swappable_with_v&lt;T&amp;, T&amp;&gt;</code>, otherwise <b>false</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <p>T shall be a complete type, <i>cv</i> void, or an array of unknown bound.</p>                                                       |
| <pre>template&lt;class T&gt; struct is_destructible;</pre>                           | <p>Either T is a reference type, or T is a complete object type for which the expression <code>declval&lt;U&amp;&gt;().~U()</code> is well-formed when treated as an unevaluated operand (8.2), where U is <code>remove_all_extents_t&lt;T&gt;</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>T shall be a complete type, <i>cv</i> void, or an array of unknown bound.</p>                                                       |
| <pre>template&lt;class T, class... Args&gt; struct is_trivially_constructible;</pre> | <p><code>is_constructible_v&lt;T, Args...&gt;</code> is true and the variable definition for <code>is_constructible</code>, as defined below, is known to call no operation that is not trivial (6.7, Clause 15).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <p>T and all types in the template parameter pack <b>Args</b> shall be complete types, <i>cv</i> void, or arrays of unknown bound.</p> |

Table 46 — Type property predicates (continued)

| Template                                                             | Condition                                                                                                                                                                    | Preconditions                                                                                                                        |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| template<class T><br>struct<br>is_trivially_default_constructible;   | is_trivially_-<br>constructible_v<T> is<br>true.                                                                                                                             | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T><br>struct<br>is_trivially_copy_constructible;      | For a referenceable type T,<br>the same result as<br>is_trivially_-<br>constructible_v<T,<br>const T&>, otherwise<br>false.                                                  | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T><br>struct<br>is_trivially_move_constructible;      | For a referenceable type T,<br>the same result as<br>is_trivially_-<br>constructible_v<T,<br>T&&>, otherwise false.                                                          | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T, class U><br>struct is_trivially_assignable;        | is_assignable_v<T, U><br>is true and the<br>assignment, as defined by<br>is_assignable, is known<br>to call no operation that is<br>not trivial (6.7, Clause<br>15).         | T and U shall be complete<br>types, <i>cv</i> void, or arrays<br>of unknown bound.                                                   |
| template<class T><br>struct<br>is_trivially_copy_assignable;         | For a referenceable type T,<br>the same result as<br>is_trivially_-<br>assignable_v<T&, const<br>T&>, otherwise false.                                                       | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T><br>struct<br>is_trivially_move_assignable;         | For a referenceable type T,<br>the same result as<br>is_trivially_-<br>assignable_v<T&, T&&>,<br>otherwise false.                                                            | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T><br>struct is_trivially_destructible;               | is_destructible_v<T> is<br>true and remove_all_-<br>extents_t<T> is either a<br>non-class type or a class<br>type with a trivial<br>destructor.                              | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T, class... Args><br>struct is_nothrow_constructible; | is_constructible_v<T,<br>Args...> is true and the<br>variable definition for<br>is_constructible, as<br>defined below, is known<br>not to throw any<br>exceptions (8.5.2.7). | T and all types in the<br>template parameter pack<br>Args shall be complete<br>types, <i>cv</i> void, or arrays<br>of unknown bound. |
| template<class T><br>struct<br>is_nothrow_default_constructible;     | is_nothrow_-<br>constructible_v<T> is<br>true.                                                                                                                               | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |
| template<class T><br>struct<br>is_nothrow_copy_constructible;        | For a referenceable type T,<br>the same result as<br>is_nothrow_-<br>constructible_v<T,<br>const T&>, otherwise<br>false.                                                    | T shall be a complete type,<br><i>cv</i> void, or an array of<br>unknown bound.                                                      |

Table 46 — Type property predicates (continued)

| Template                                                          | Condition                                                                                                                                               | Preconditions                                                         |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| template<class T><br>struct<br>is_nothrow_move_constructible;     | For a referenceable type T, the same result as is_nothrow_constructible_v<T, T&&>, otherwise false.                                                     | T shall be a complete type, cv void, or an array of unknown bound.    |
| template<class T, class U><br>struct is_nothrow_assignable;       | is_assignable_v<T, U> is true and the assignment is known not to throw any exceptions (8.5.2.7).                                                        | T and U shall be complete types, cv void, or arrays of unknown bound. |
| template<class T><br>struct is_nothrow_copy_assignable;           | For a referenceable type T, the same result as is_nothrow_assignable_v<T&, const T&>, otherwise false.                                                  | T shall be a complete type, cv void, or an array of unknown bound.    |
| template<class T><br>struct is_nothrow_move_assignable;           | For a referenceable type T, the same result as is_nothrow_assignable_v<T&, T&&>, otherwise false.                                                       | T shall be a complete type, cv void, or an array of unknown bound.    |
| template<class T, class U><br>struct is_nothrow_swappable_with;   | is_swappable_with_v<T, U> is true and each swap expression of the definition of is_swappable_with<T, U> is known not to throw any exceptions (8.5.2.7). | T and U shall be complete types, cv void, or arrays of unknown bound. |
| template<class T><br>struct is_nothrow_swappable;                 | For a referenceable type T, the same result as is_nothrow_swappable_with_v<T&, T&>, otherwise false.                                                    | T shall be a complete type, cv void, or an array of unknown bound.    |
| template<class T><br>struct is_nothrow_destructible;              | is_destructible_v<T> is true and the indicated destructor is known not to throw any exceptions (8.5.2.7).                                               | T shall be a complete type, cv void, or an array of unknown bound.    |
| template<class T><br>struct has_virtual_destructor;               | T has a virtual destructor (15.4)                                                                                                                       | If T is a non-union class type, T shall be a complete type.           |
| template<class T><br>struct<br>has_unique_object_representations; | For an array type T, the same result as has_unique_object_representations_v<remove_all_extents_t<T>>, otherwise see below.                              | T shall be a complete type, cv void, or an array of unknown bound.    |

<sup>5</sup> [Example:

```
is_const_v<const volatile int> // true
is_const_v<const int*> // false
is_const_v<const int&&> // false
is_const_v<int[3]> // false
is_const_v<const int[3]> // true
```

— end example]

<sup>6</sup> [Example:

```

remove_const_t<const volatile int> // volatile int
remove_const_t<const int* const> // const int*
remove_const_t<const int&> // const int&
remove_const_t<const int[3]> // int[3]

```

— end example]

<sup>7</sup> [Example:

```

// Given:
struct P final { };
union U1 { };
union U2 final { };

// the following assertions hold:
static_assert(!is_final_v<int>);
static_assert(is_final_v<P>);
static_assert(!is_final_v<U1>);
static_assert(is_final_v<U2>);

```

— end example]

<sup>8</sup> The predicate condition for a template specialization `is_constructible<T, Args...>` shall be satisfied if and only if the following variable definition would be well-formed for some invented variable `t`:

```
T t(declval<Args>()...);
```

[Note: These tokens are never interpreted as a function declaration. — end note] Access checking is performed as if in a context unrelated to `T` and any of the `Args`. Only the validity of the immediate context of the variable initialization is considered. [Note: The evaluation of the initialization can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — end note]

<sup>9</sup> The predicate condition for a template specialization `has_unique_object_representations<T>` shall be satisfied if and only if:

- (9.1) — `T` is trivially copyable, and
- (9.2) — any two objects of type `T` with the same value have the same object representation, where two objects of array or non-union class type are considered to have the same value if their respective sequences of direct subobjects have the same values, and two objects of union type are considered to have the same value if they have the same active member and the corresponding members have the same value.

The set of scalar types for which this condition holds is implementation-defined. [Note: If a type has padding bits, the condition does not hold; otherwise, the condition holds true for unsigned integral types. — end note]

### 24.15.5 Type property queries [meta.unary.prop.query]

<sup>1</sup> This subclause contains templates that may be used to query properties of types at compile time.

Table 47 — Type property queries

| Template                                               | Value                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| template<class T><br>struct alignment_of;              | <code>alignof(T)</code> .<br><i>Requires:</i> <code>alignof(T)</code> shall be a valid expression (8.5.2.6)                                                                                                                                                                                                                                   |
| template<class T><br>struct rank;                      | If <code>T</code> names an array type, an integer value representing the number of dimensions of <code>T</code> ; otherwise, 0.                                                                                                                                                                                                               |
| template<class T,<br>unsigned I = 0><br>struct extent; | If <code>T</code> is not an array type, or if it has rank less than or equal to <code>I</code> , or if <code>I</code> is 0 and <code>T</code> has type “array of unknown bound of <code>U</code> ”, then 0; otherwise, the bound (11.3.4) of the $I^{\text{th}}$ dimension of <code>T</code> , where indexing of <code>I</code> is zero-based |

<sup>2</sup> Each of these templates shall be a *Cpp17UnaryTypeTrait* (24.15.1) with a base characteristic of `integral_constant<size_t, Value>`.

<sup>3</sup> [Example:

```
// the following assertions hold:
assert(rank_v<int> == 0);
assert(rank_v<int[2]> == 1);
assert(rank_v<int[] [4]> == 2);
```

— end example]

<sup>4</sup> [Example:

```
// the following assertions hold:
assert(extent_v<int> == 0);
assert(extent_v<int[2]> == 2);
assert(extent_v<int[2] [4]> == 2);
assert(extent_v<int[] [4]> == 0);
assert((extent_v<int, 1>) == 0);
assert((extent_v<int[2], 1>) == 0);
assert((extent_v<int[2] [4], 1>) == 4);
assert((extent_v<int[] [4], 1>) == 4);
```

— end example]

## 24.15.6 Relationships between types

[meta.rel]

- <sup>1</sup> This subclause contains templates that may be used to query relationships between types at compile time.
- <sup>2</sup> Each of these templates shall be a *Cpp17BinaryTypeTrait* (24.15.1) with a base characteristic of `true_type` if the corresponding condition is true, otherwise `false_type`.

Table 48 — Type relationship predicates

| Template                                                                               | Condition                                                                                                                                                                   | Comments                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T, class U&gt; struct is_same;</pre>                            | T and U name the same type with the same cv-qualifications                                                                                                                  |                                                                                                                                                                                                                                                        |
| <pre>template&lt;class Base, class Derived&gt; struct is_base_of;</pre>                | Base is a base class of Derived (Clause 13) without regard to cv-qualifiers or Base and Derived are not unions and name the same class type without regard to cv-qualifiers | If Base and Derived are non-union class types and are not possibly cv-qualified versions of the same type, Derived shall be a complete type. [Note: Base classes that are private, protected, or ambiguous are, nonetheless, base classes. — end note] |
| <pre>template&lt;class From, class To&gt; struct is_convertible;</pre>                 | <i>see below</i>                                                                                                                                                            | From and To shall be complete types, arrays of unknown bound, or cv void types.                                                                                                                                                                        |
| <pre>template&lt;class From, class To&gt; struct is_nothrow_convertible;</pre>         | <code>is_convertible_v&lt;From, To&gt;</code> is true and the conversion, as defined by <code>is_convertible</code> , is known not to throw any exceptions (8.5.2.7)        | From and To shall be complete types, arrays of unknown bound, or cv void types.                                                                                                                                                                        |
| <pre>template&lt;class Fn, class... ArgTypes&gt; struct is_invocable;</pre>            | The expression <code>INVOKE(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...)</code> is well-formed when treated as an unevaluated operand                                 | Fn and all types in the template parameter pack ArgTypes shall be complete types, cv void, or arrays of unknown bound.                                                                                                                                 |
| <pre>template&lt;class R, class Fn, class... ArgTypes&gt; struct is_invocable_r;</pre> | The expression <code>INVOKE&lt;R&gt;(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...)</code> is well-formed when treated as an unevaluated operand                        | Fn, R, and all types in the template parameter pack ArgTypes shall be complete types, cv void, or arrays of unknown bound.                                                                                                                             |

Table 48 — Type relationship predicates (continued)

| Template                                                                                       | Condition                                                                                                                                                                                 | Comments                                                                                                                                       |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class Fn, class... ArgTypes&gt; struct is_nothrow_invocable;</pre>            | <pre>is_invocable_v&lt; Fn, ArgTypes...&gt; is true and the expression INVOKE(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...) is known not to throw any exceptions</pre>               | Fn and all types in the template parameter pack <code>ArgTypes</code> shall be complete types, <i>cv</i> void, or arrays of unknown bound.     |
| <pre>template&lt;class R, class Fn, class... ArgTypes&gt; struct is_nothrow_invocable_r;</pre> | <pre>is_invocable_r_v&lt; R, Fn, ArgTypes...&gt; is true and the expression INVOKE&lt;R&gt;(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...) is known not to throw any exceptions</pre> | Fn, R, and all types in the template parameter pack <code>ArgTypes</code> shall be complete types, <i>cv</i> void, or arrays of unknown bound. |

<sup>3</sup> For the purpose of defining the templates in this subclause, a function call expression `declval<T>()` for any type `T` is considered to be a trivial (6.7, Clause 15) function call that is not an odr-use (6.2) of `declval` in the context of the corresponding definition notwithstanding the restrictions of 24.2.6.

<sup>4</sup> [Example:

```
struct B {};
struct B1 : B {};
struct B2 : B {};
struct D : private B1, private B2 {};
```

```
is_base_of_v<B, D> // true
is_base_of_v<const B, D> // true
is_base_of_v<B, const D> // true
is_base_of_v<B, const B> // true
is_base_of_v<D, B> // false
is_base_of_v<B&, D&> // false
is_base_of_v<B[3], D[3]> // false
is_base_of_v<int, int> // false
```

— end example]

<sup>5</sup> The predicate condition for a template specialization `is_convertible<From, To>` shall be satisfied if and only if the return expression in the following code would be well-formed, including any implicit conversions to the return type of the function:

```
To test() {
 return declval<From>();
}
```

[Note: This requirement gives well-defined results for reference types, void types, array types, and function types. — end note] Access checking is performed in a context unrelated to `To` and `From`. Only the validity of the immediate context of the *expression* of the `return` statement (9.6.3) (including initialization of the returned object or reference) is considered. [Note: The initialization can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — end note]

### 24.15.7 Transformations between types

[meta.trans]

<sup>1</sup> This subclause contains templates that may be used to transform one type to another following some predefined rule.

<sup>2</sup> Each of the templates in this subclause shall be a *Cpp17TransformationTrait* (24.15.1).

#### 24.15.7.1 Const-volatile modifications

[meta.trans.cv]

Table 49 — Const-volatile modifications

| Template                                                   | Comments                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct remove_const;</pre>    | The member typedef <code>type</code> names the same type as <code>T</code> except that any top-level const-qualifier has been removed. [ <i>Example</i> : <code>remove_const_t&lt;const volatile int&gt;</code> evaluates to <code>volatile int</code> , whereas <code>remove_const_t&lt;const int*&gt;</code> evaluates to <code>const int*</code> . — <i>end example</i> ]             |
| <pre>template&lt;class T&gt; struct remove_volatile;</pre> | The member typedef <code>type</code> names the same type as <code>T</code> except that any top-level volatile-qualifier has been removed. [ <i>Example</i> : <code>remove_volatile_t&lt;const volatile int&gt;</code> evaluates to <code>const int</code> , whereas <code>remove_volatile_t&lt;volatile int*&gt;</code> evaluates to <code>volatile int*</code> . — <i>end example</i> ] |
| <pre>template&lt;class T&gt; struct remove_cv;</pre>       | The member typedef <code>type</code> shall be the same as <code>T</code> except that any top-level cv-qualifier has been removed. [ <i>Example</i> : <code>remove_cv_t&lt;const volatile int&gt;</code> evaluates to <code>int</code> , whereas <code>remove_cv_t&lt;const volatile int*&gt;</code> evaluates to <code>const volatile int*</code> . — <i>end example</i> ]               |
| <pre>template&lt;class T&gt; struct add_const;</pre>       | If <code>T</code> is a reference, function, or top-level const-qualified type, then <code>type</code> names the same type as <code>T</code> , otherwise <code>T const</code> .                                                                                                                                                                                                           |
| <pre>template&lt;class T&gt; struct add_volatile;</pre>    | If <code>T</code> is a reference, function, or top-level volatile-qualified type, then <code>type</code> names the same type as <code>T</code> , otherwise <code>T volatile</code> .                                                                                                                                                                                                     |
| <pre>template&lt;class T&gt; struct add_cv;</pre>          | The member typedef <code>type</code> names the same type as <code>add_const_t&lt;add_volatile_t&lt;T&gt;&gt;</code> .                                                                                                                                                                                                                                                                    |

## 24.15.7.2 Reference modifications

[meta.trans.ref]

Table 50 — Reference modifications

| Template                                                        | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct remove_reference;</pre>     | If <code>T</code> has type “reference to <code>T1</code> ” then the member typedef <code>type</code> names <code>T1</code> ; otherwise, <code>type</code> names <code>T</code> .                                                                                                                                                                                                                                                                 |
| <pre>template&lt;class T&gt; struct add_lvalue_reference;</pre> | If <code>T</code> names a referenceable type (20.3.21) then the member typedef <code>type</code> names <code>T&amp;</code> ; otherwise, <code>type</code> names <code>T</code> . [ <i>Note</i> : This rule reflects the semantics of reference collapsing (11.3.2). — <i>end note</i> ]                                                                                                                                                          |
| <pre>template&lt;class T&gt; struct add_rvalue_reference;</pre> | If <code>T</code> names a referenceable type then the member typedef <code>type</code> names <code>T&amp;&amp;</code> ; otherwise, <code>type</code> names <code>T</code> . [ <i>Note</i> : This rule reflects the semantics of reference collapsing (11.3.2). For example, when a type <code>T</code> names a type <code>T1&amp;</code> , the type <code>add_rvalue_reference_t&lt;T&gt;</code> is not an rvalue reference. — <i>end note</i> ] |

## 24.15.7.3 Sign modifications

[meta.trans.sign]

Table 51 — Sign modifications

| Template                                               | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct make_signed;</pre> | If <code>T</code> names a (possibly cv-qualified) signed integer type (6.7.1) then the member typedef <code>type</code> names the type <code>T</code> ; otherwise, if <code>T</code> names a (possibly cv-qualified) unsigned integer type then <code>type</code> names the corresponding signed integer type, with the same cv-qualifiers as <code>T</code> ; otherwise, <code>type</code> names the signed integer type with smallest rank (6.7.4) for which <code>sizeof(T) == sizeof(type)</code> , with the same cv-qualifiers as <code>T</code> .<br><i>Requires</i> : <code>T</code> shall be a (possibly cv-qualified) integral type or enumeration but not a <code>bool</code> type. |

Table 51 — Sign modifications (continued)

| Template                                                 | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct make_unsigned;</pre> | <p>If T names a (possibly cv-qualified) unsigned integer type (6.7.1) then the member typedef <code>type</code> names the type T; otherwise, if T names a (possibly cv-qualified) signed integer type then <code>type</code> names the corresponding unsigned integer type, with the same cv-qualifiers as T; otherwise, <code>type</code> names the unsigned integer type with smallest rank (6.7.4) for which <code>sizeof(T) == sizeof(type)</code>, with the same cv-qualifiers as T.</p> <p><i>Requires:</i> T shall be a (possibly cv-qualified) integral type or enumeration but not a <code>bool</code> type.</p> |

## 24.15.7.4 Array modifications

[meta.trans.arr]

Table 52 — Array modifications

| Template                                                      | Comments                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct remove_extent;</pre>      | <p>If T names a type “array of U”, the member typedef <code>type</code> shall be U, otherwise T. [<i>Note:</i> For multidimensional arrays, only the first array dimension is removed. For a type “array of <code>const U</code>”, the resulting type is <code>const U</code>. — <i>end note</i>]</p> |
| <pre>template&lt;class T&gt; struct remove_all_extents;</pre> | <p>If T is “multi-dimensional array of U”, the resulting member typedef <code>type</code> is U, otherwise T.</p>                                                                                                                                                                                      |

## 1 [Example:

```
// the following assertions hold:
assert((is_same_v<remove_extent_t<int>, int>));
assert((is_same_v<remove_extent_t<int[2]>, int>));
assert((is_same_v<remove_extent_t<int[2][3]>, int[3]>));
assert((is_same_v<remove_extent_t<int[][3]>, int[3]>));
```

— *end example*]

## 2 [Example:

```
// the following assertions hold:
assert((is_same_v<remove_all_extents_t<int>, int>));
assert((is_same_v<remove_all_extents_t<int[2]>, int>));
assert((is_same_v<remove_all_extents_t<int[2][3]>, int>));
assert((is_same_v<remove_all_extents_t<int[][3]>, int>));
```

— *end example*]

## 24.15.7.5 Pointer modifications

[meta.trans.ptr]

Table 53 — Pointer modifications

| Template                                                  | Comments                                                                                                                                                                                                             |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class T&gt; struct remove_pointer;</pre> | <p>If T has type “(possibly cv-qualified) pointer to T1” then the member typedef <code>type</code> names T1; otherwise, it names T.</p>                                                                              |
| <pre>template&lt;class T&gt; struct add_pointer;</pre>    | <p>If T names a referenceable type (20.3.21) or a cv void type then the member typedef <code>type</code> names the same type as <code>remove_reference_t&lt;T&gt;*</code>; otherwise, <code>type</code> names T.</p> |

## 24.15.7.6 Other transformations

[meta.trans.other]



Table 54 — Other transformations

| Template                                                                                                        | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| template<class T><br>struct type_identity;                                                                      | The member typedef <code>type</code> names the type T.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| template<size_t Len,<br>size_t Align<br>= <i>default-alignment</i> ><br>struct aligned_storage;                 | The value of <i>default-alignment</i> shall be the most stringent alignment requirement for any C++ object type whose size is no greater than Len (6.7). The member typedef <code>type</code> shall be a trivial standard-layout type suitable for use as uninitialized storage for any object whose size is at most Len and whose alignment is a divisor of Align.<br><i>Requires:</i> Len shall not be zero. Align shall be equal to alignof(T) for some type T or to <i>default-alignment</i> .                                                                                                                                                                                                                                             |
| template<size_t Len,<br>class... Types><br>struct aligned_union;                                                | The member typedef <code>type</code> shall be a trivial standard-layout type suitable for use as uninitialized storage for any object whose type is listed in Types; its size shall be at least Len. The static member <code>alignment_value</code> shall be an integral constant of type <code>size_t</code> whose value is the strictest alignment of all types listed in Types.<br><i>Requires:</i> At least one type is provided. Each type in the template parameter pack Types shall be a complete object type.                                                                                                                                                                                                                          |
| template<class T><br>struct remove_cvref;                                                                       | The member typedef <code>type</code> names the same type as <code>remove_cv_t&lt;remove_reference_t&lt;T&gt;&gt;</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| template<class T><br>struct decay;                                                                              | Let U be <code>remove_reference_t&lt;T&gt;</code> . If <code>is_array_v&lt;U&gt;</code> is true, the member typedef <code>type</code> shall equal <code>remove_extent_t&lt;U&gt;*</code> . If <code>is_function_v&lt;U&gt;</code> is true, the member typedef <code>type</code> shall equal <code>add_pointer_t&lt;U&gt;</code> . Otherwise the member typedef <code>type</code> equals <code>remove_cv_t&lt;U&gt;</code> . [Note: This behavior is similar to the lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) conversions applied when an lvalue is used as an rvalue, but also strips <i>cv</i> -qualifiers from class types in order to more closely model by-value argument passing. — <i>end note</i> ] |
| template<bool B, class T =<br>void> struct enable_if;                                                           | If B is true, the member typedef <code>type</code> shall equal T; otherwise, there shall be no member <code>type</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| template<bool B, class T,<br>class F><br>struct conditional;                                                    | If B is true, the member typedef <code>type</code> shall equal T. If B is false, the member typedef <code>type</code> shall equal F.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| template<class... T><br>struct common_type;                                                                     | Unless this trait is specialized (as specified in Note B, below), the member <code>type</code> shall be defined or omitted as specified in Note A, below. If it is omitted, there shall be no member <code>type</code> . Each type in the template parameter pack T shall be complete, <i>cv</i> void, or an array of unknown bound.                                                                                                                                                                                                                                                                                                                                                                                                           |
| template<class, class,<br>template<class> class,<br>template<class> class><br>struct<br>basic_common_reference; | Unless this trait is specialized (as specified in Note D, below), there shall be no member <code>type</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| template<class... T><br>struct common_reference;                                                                | The member <i>typedef-name</i> <code>type</code> is defined or omitted as specified in Note C, below. Each type in the parameter pack T shall be complete or <i>cv</i> void.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| template<class T><br>struct underlying_type;                                                                    | The member typedef <code>type</code> names the underlying type of T.<br><i>Requires:</i> T shall be a complete enumeration type (10.2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

Table 54 — Other transformations (continued)

| Template                                                                     | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>template&lt;class Fn, class... ArgTypes&gt; struct invoke_result;</pre> | <p>If the expression <code>INVOKE(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...)</code> is well-formed when treated as an unevaluated operand (8.2), the member typedef <code>type</code> names the type <code>decltype(INVOKE(declval&lt;Fn&gt;(), declval&lt;ArgTypes&gt;()...))</code>; otherwise, there shall be no member <code>type</code>. Access checking is performed as if in a context unrelated to <code>Fn</code> and <code>ArgTypes</code>. Only the validity of the immediate context of the expression is considered. [Note: The compilation of the expression can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. — end note]</p> <p><i>Requires:</i> <code>Fn</code> and all types in the template parameter pack <code>ArgTypes</code> shall be complete types, <code>cv void</code>, or arrays of unknown bound.</p> |

<sup>1</sup> [Note: A typical implementation would define `aligned_storage` as:

```
template<size_t Len, size_t Alignment>
struct aligned_storage {
 typedef struct {
 alignas(Alignment) unsigned char __data[Len];
 } type;
};
```

— end note]

<sup>2</sup> It is implementation-defined whether any extended alignment is supported (6.6.5).

<sup>3</sup> Let:

(3.1) — `CREF(A)` be `add_lvalue_reference_t<const remove_reference_t<A>>`,

(3.2) — `XREF(A)` denote a unary class template `T` such that `T<U>` denotes the same type as `U` with the addition of `A`'s cv and reference qualifiers, for a non-reference cv-unqualified type `U`,

(3.3) — `COPYCV(FROM, TO)` be an alias for type `TO` with the addition of `FROM`'s top-level cv-qualifiers. [Example: `COPYCV(const int, volatile short)` is an alias for `const volatile short`. — end example]

(3.4) — `COND_RES(X, Y)` be `decltype(false ? declval<X(&)>() : declval<Y(&)>())`.

Given types `A` and `B`, let `X` be `remove_reference_t<A>`, let `Y` be `remove_reference_t<B>`, and let `COMMON_REF(A, B)` be:

(3.5) — If `A` and `B` are both lvalue reference types, `COMMON_REF(A, B)` is `COND_RES(COPYCV(X, Y) &, COPYCV(Y, X) &)` if that type exists and is a reference type.

(3.6) — Otherwise, let `C` be `remove_reference_t<COMMON_REF(X&, X&&>&&`. If `A` and `B` are both rvalue reference types, `C` is well-formed, and `is_convertible_v<A, C>&&` is `convertible_v<B, C>` is true, then `COMMON_REF(A, B)` is `C`.

(3.7) — Otherwise, let `D` be `COMMON_REF(const X&, Y&)`. If `A` is an rvalue reference and `B` is an lvalue reference and `D` is well-formed and `is_convertible_v<A, D>` is true, then `COMMON_REF(A, B)` is `D`.

(3.8) — Otherwise, if `A` is an lvalue reference and `B` is an rvalue reference, then `COMMON_REF(A, B)` is `COMMON_REF(B, A)`.

(3.9) — Otherwise, `COMMON_REF(A, B)` is ill-formed.

If any of the types computed above is ill-formed, then `COMMON_REF(A, B)` is ill-formed.

<sup>4</sup> Note A: For the `common_type` trait applied to a template parameter pack `T` of types, the member `type` shall be either defined or not present as follows:

(4.1) — If `sizeof...(T)` is zero, there shall be no member `type`.

- (4.2) — If `sizeof... (T)` is one, let `T0` denote the sole type constituting the pack `T`. The member *typedef-name type* shall denote the same type, if any, as `common_type_t<T0, T0>`; otherwise there shall be no member type.
- (4.3) — If `sizeof... (T)` is two, let the first and second types constituting `T` be denoted by `T1` and `T2`, respectively, and let `D1` and `D2` denote the same types as `decay_t<T1>` and `decay_t<T2>`, respectively.
- (4.3.1) — If `is_same_v<T1, D1>` is false or `is_same_v<T2, D2>` is false, let `C` denote the same type, if any, as `common_type_t<D1, D2>`.
- (4.3.2) — [Note: None of the following will apply if there is a specialization `common_type<D1, D2>`. — end note]
- (4.3.3) — Otherwise, if  
`decay_t<decltype(false ? declval<D1>() : declval<D2>())>`  
denotes a valid type, let `C` denote that type.
- (4.3.4) — Otherwise, if `COND_RES(CREF(D1), CREF(D2))` denotes a type, let `C` denote the type `decay_t<COND_RES(CREF(D1), CREF(D2))>`.

In either case, the member *typedef-name type* shall denote the same type, if any, as `C`. Otherwise, there shall be no member type.

- (4.4) — If `sizeof... (T)` is greater than two, let `T1`, `T2`, and `R`, respectively, denote the first, second, and (pack of) remaining types constituting `T`. Let `C` denote the same type, if any, as `common_type_t<T1, T2>`. If there is such a type `C`, the member *typedef-name type* shall denote the same type, if any, as `common_type_t<C, R...>`. Otherwise, there shall be no member type.

<sup>5</sup> Note B: Notwithstanding the provisions of 24.15.2, and pursuant to 20.5.4.2.1, a program may specialize `common_type<T1, T2>` for types `T1` and `T2` such that `is_same_v<T1, decay_t<T1>>` and `is_same_v<T2, decay_t<T2>>` are each true. [Note: Such specializations are needed when only explicit conversions are desired between the template arguments. — end note] Such a specialization need not have a member named *type*, but if it does, that member shall be a *typedef-name* for an accessible and unambiguous cv-unqualified non-reference type `C` to which each of the types `T1` and `T2` is explicitly convertible. Moreover, `common_type_t<T1, T2>` shall denote the same type, if any, as does `common_type_t<T2, T1>`. No diagnostic is required for a violation of this Note's rules.

<sup>6</sup> Note C: For the `common_reference` trait applied to a parameter pack `T` of types, the member *type* shall be either defined or not present as follows:

- (6.1) — If `sizeof... (T)` is zero, there shall be no member *type*.
- (6.2) — Otherwise, if `sizeof... (T)` is one, let `T0` denote the sole type in the pack `T`. The member *typedef type* shall denote the same type as `T0`.
- (6.3) — Otherwise, if `sizeof... (T)` is two, let `T1` and `T2` denote the two types in the pack `T`. Then
- (6.3.1) — If `T1` and `T2` are reference types and `COMMON_REF(T1, T2)` is well-formed, then the member *typedef type* denotes that type.
- (6.3.2) — Otherwise, if `basic_common_reference<remove_cvref_t<T1>, remove_cvref_t<T2>, XREF(T1), XREF(T2)>::type` is well-formed, then the member *typedef type* denotes that type.
- (6.3.3) — Otherwise, if `COND_RES(T1, T2)` is well-formed, then the member *typedef type* denotes that type.
- (6.3.4) — Otherwise, if `common_type_t<T1, T2>` is well-formed, then the member *typedef type* denotes that type.
- (6.3.4) — That type, if `common_type_t<T1, T2>` is well-formed, then the member *typedef type* denotes that type.
- (6.3.5) — Otherwise, there shall be no member *type*.
- (6.3.5) — Otherwise, there shall be no member *type*.
- (6.4) — Otherwise, if `sizeof... (T)` is greater than two, let `T1`, `T2`, and `Rest`, respectively, denote the first, second, and (pack of) remaining types comprising `T`. Let `C` be the type `common_reference_t<T1, T2>`. Then, and (pack of) remaining types comprising `T`. Let `C` be the type `common_reference_t<T1, T2>`. Then
- (6.4.1) — If there is such a type `C`, the member *typedef type* shall denote the same type, if any, as `common_reference_t<C, Rest...>`.
- (6.4.1) — If `common_reference_t<C, Rest...>` is well-formed, then the member *typedef type* shall denote the same type, if any, as `common_reference_t<C, Rest...>`.
- (6.4.2) — Otherwise, there shall be no member *type*.
- (6.4.2) — Otherwise, there shall be no member *type*.

<sup>7</sup> Note D: Notwithstanding the provisions of 24.15.2, and pursuant to 20.5.4.2.1, a program may partially specialize `basic_common_reference<T, U, TQual, UQual>` for types `T` and `U` such that `is_same_v<T, decay_`

7 `<T>` and `is_same_v<U, T>` are each true, and `is_convertible_v<U, T>` is true. [Note: Such specializations can be used to influence the result of `common_reference`, and are needed when only explicit conversions are desired between the template arguments. `<U, T>` Such a specialization need not have a member named `type`, but if it does, that member shall be a `typedef-name` for an accessible and unambiguous type `C` to which each of the types `TQual<T>` and `UQual<U>` is convertible. Moreover, `basic_common_reference<T, U, TQual, UQual>::type` shall denote the same type, if any, as does `basic_common_reference<U, T, UQual, TQual>::type`. No diagnostic is required for a violation of these rules.]

8 [Example: Given these definitions:

```
using PF1 = bool (&)();
using PF2 = short (*)(long);

using PF1 = bool (&)();
struct S {= short (*)(long);
operator PF2() const;
double operator()(char, int&);
void fn(long) const;
char data;
operator()(char, int&);
}; void fn(long) const;
char data;
using PMF = void (S::*)(long) const;
using PMD = char S::*;
```

the following assertions will hold:

```
using PMF = void (S::*)(long) const;
using PMD = char S::*;
static_assert(is_same_v<invoke_result_t<S, int>, short>);
static_assert(is_same_v<invoke_result_t<S&, unsigned char, int&>, double>);
static_assert(is_same_v<invoke_result_t<PF1>, bool>);
static_assert(is_same_v<invoke_result_t<PMF, unique_ptr<S>, int>, void>);
static_assert(is_same_v<invoke_result_t<PMD, S>, char&&>);
static_assert(is_same_v<invoke_result_t<PMD, const S*>, const char&&>);
static_assert(is_same_v<invoke_result_t<PMD, S>, char&&>);
static_assert(is_same_v<invoke_result_t<PMD, const S*>, const char&&>);
```

— end example]

## 24.15.8 Logical operator traits [meta.logical]

1 This subclause describes type traits for applying logical operators to other type traits.

### 24.15.8 Logical operator traits [meta.logical]

1 This subclause describes type traits for applying logical operators to other type traits.

2 The class template `conjunction` forms the logical conjunction of its template type arguments.

```
template<class... B> struct conjunction : see below { };
```

3 For a specialization `conjunction<B1, ..., BN>`, if there is a template type argument `Bi` for which `bool(Bi::value)` is false, then `instantiating conjunction<B1, ..., BN>::value` does not require

the instantiation of `Bi::value` for `<Bi>` *i*. [Note: This is analogous to the short-circuiting behavior of the built-in operator `&&`. — end note]

4 Every template type argument for which `Bi::value` is instantiated shall be usable as a base class and shall have a member value which is convertible to `bool`, is not hidden, and is unambiguously available

in the template type argument for which `Bi::value` is instantiated shall be usable as a base class and shall have a member value which is convertible to `bool`, is not hidden, and is unambiguously available in the type.

(5.1) — the first type `Bi` in the list `true_type`, `B1, ..., BN` for which `bool(Bi::value)` is false, or

(5.2) — if there is no such `Bi`, the last type in the list.

(5.1) — the first type `Bi` in the list `true_type`, `B1, ..., BN` for which `bool(Bi::value)` is false, or

(5.2) — if there is no such `Bi`, the last type in the list.

[Note: This means a specialization of `conjunction` does not necessarily inherit from either `true_type` or `false_type`. — end note]

6 The member names of the base class, other than `conjunction` and `operator=`, shall not be hidden and shall be unambiguously available in `conjunction`.

6 The member names of the base class, other than `conjunction` and `operator=`, shall not be hidden and shall be unambiguously available in `conjunction`.

```
template<class... B> struct disjunction : see below { };
```

7 The class template `disjunction` forms the logical disjunction of its template type arguments.

```
template<class... B> struct disjunction : see below { };
```

8 For a specialization `disjunction<B1, ..., BN>`, if there is a template type argument `Bi` for which `bool(Bi::value)` is true, then `instantiating disjunction<B1, ..., BN>::value` does not require

the instantiation of `Bi::value` for `<Bi>` *i*. [Note: This is analogous to the short-circuiting behavior of the built-in operator `||`. — end note]

9 Every template type argument for which `Bi::value` is instantiated shall be usable as a base class and shall have a member value which is convertible to `bool`, is not hidden, and is unambiguously available in the type.

9 Every template type argument for which `Bi::value` is instantiated shall be usable as a base class and shall have a member value which is convertible to `bool`, is not hidden, and is unambiguously available in the type.

10 The specialization disjunction `<B1, convert, BN>` has a public and unambiguous base that is either

(10.1) the first type `Bi` in the list `false_type, B1, ..., BN` for which `bool(Bi::value)` is true, or

(10.2) if there is no such `Bi`, the last type in the list.

(10.1) [Note: This means a specialization of disjunction does not necessarily inherit from either `true_type` or `false_type`.] *end Note*

(10.2) The member names of the base class, other than disjunction and `operator=`, shall not be hidden and shall be unambiguously available in disjunction.

11 The member names of the base class, other than disjunction and `operator=`, shall not be hidden and shall be unambiguously available in disjunction.

11 `template<class B> struct negation: see below {};`

12 The class template `negation` forms the logical negation of its template type argument. The type `negation<B>` is a `Cpp17UnaryTypeTrait` with a base characteristic of `bool_constant<!bool(B::value)>`.

12 The class template `negation` forms the logical negation of its template type argument. The type `negation<B>` is a `Cpp17UnaryTypeTrait` with a base characteristic of `bool_constant<!bool(B::value)>`.

**24.15.9 Endian** [meta.endian]

1 Two common methods of byte ordering in multibyte scalar types are big-endian and little-endian in the execution environment. Big-endian is a format for storage of binary data in which the most significant byte is placed first, with the rest in descending order. Little-endian is a format for storage of binary data in which the least significant byte is placed first, with the rest in ascending order. This subclause describes the endianness of the scalar types of the execution environment.

1 Two common methods of byte ordering in multibyte scalar types are big-endian and little-endian in the execution environment. Big-endian is a format for storage of binary data in which the most significant byte is placed first, with the rest in descending order. Little-endian is a format for storage of binary data in which the least significant byte is placed first, with the rest in ascending order. This subclause describes the endianness of the scalar types of the execution environment.

```
enum class endian {
 little = see below,
 big = see below,
 native = see below,
};
```

2 If all scalar types have size 1 byte, then all of `endian::little`, `endian::big`, and `endian::native` have the same value. Otherwise, `endian::little` is not equal to `endian::big`. If all scalar types are big-endian, `endian::native` is equal to `endian::big`. If all scalar types are little-endian, `endian::native` is equal to `endian::little`. Otherwise, `endian::native` is not equal to either `endian::big` or `endian::little`.

2 If all scalar types have size 1 byte, then all of `endian::little`, `endian::big`, and `endian::native` have the same value. Otherwise, `endian::little` is not equal to `endian::big`. If all scalar types are big-endian, `endian::native` is equal to `endian::big`. If all scalar types are little-endian, `endian::native` is equal to `endian::little`. Otherwise, `endian::native` is not equal to either `endian::big` or `endian::little`.

## 24.16 Compile-time rational arithmetic [ratio]

### 24.16.1 In general [ratio.general]

1 This subclause describes the ratio library. It provides a class template `ratio` which exactly represents any finite rational number with a numerator and denominator representable by compile-time constants of type `intmax_t`.

1 This subclause describes the ratio library. It provides a class template `ratio` which exactly represents any finite rational number with a numerator and denominator representable by compile-time constants of type `intmax_t`.

2 Throughout this subclause, the names of template parameters are used to express type requirements. If a template parameter is named `R1` or `R2`, and the template argument is not a specialization of the `ratio` template, the program is ill-formed.

2 Throughout this subclause, the names of template parameters are used to express type requirements. If a template parameter is named `R1` or `R2`, and the template argument is not a specialization of the `ratio` template, the program is ill-formed.

### 24.16.2 Header `<ratio>` synopsis [ratio.syn]

```
namespace std {
// 24.16.2 class template ratio [ratio.syn]
template<intmax_t N, intmax_t D = 1> class ratio;
namespace std {
```

```
// 24.16.3 class template ratio
// 24.16.4 ratio arithmetic
template<intmax_t N, intmax_t D = 1> class ratio;
template<class R1, class R2> using ratio_add = see below;
template<class R1, class R2> using ratio_subtract = see below;
// 24.16.4 ratio arithmetic
template<class R1, class R2> using ratio_multiply = see below;
template<class R1, class R2> using ratio_divide = see below;
template<class R1, class R2> using ratio_add = see below;
template<class R1, class R2> using ratio_subtract = see below;
// 24.16.5 ratio comparison
template<class R1, class R2> using ratio_multiply = see below;
template<class R1, class R2> using ratio_divide = see below;
template<class R1, class R2> struct ratio_equal;
template<class R1, class R2> struct ratio_not_equal;
```



### 24.16.4 Arithmetic on ratios [ratio.arithmetic]

- <sup>1</sup> Each of the alias templates `ratio_add`, `ratio_subtract`, `ratio_multiply`, and `ratio_divide` denotes the result of an arithmetic computation on two ratios `R1` and `R2`. With `X` and `Y` computed (in the absence of arithmetic overflow) as specified by Table 55, each alias denotes a `ratio<U, V>` such that `U` is the same as `ratio<X, Y>::num` and `V` is the same as `ratio<X, Y>::den`.
- <sup>2</sup> If it is not possible to represent `U` or `V` with `intmax_t`, the program is ill-formed. Otherwise, an implementation should yield correct values of `U` and `V`. If it is not possible to represent `X` or `Y` with `intmax_t`, the program is ill-formed unless the implementation yields correct values of `U` and `V`.

Table 55 — Expressions used to perform ratio arithmetic

| Type                                      | Value of X                                         | Value of Y                     |
|-------------------------------------------|----------------------------------------------------|--------------------------------|
| <code>ratio_add&lt;R1, R2&gt;</code>      | <code>R1::num * R2::den + R2::num * R1::den</code> | <code>R1::den * R2::den</code> |
| <code>ratio_subtract&lt;R1, R2&gt;</code> | <code>R1::num * R2::den - R2::num * R1::den</code> | <code>R1::den * R2::den</code> |
| <code>ratio_multiply&lt;R1, R2&gt;</code> | <code>R1::num * R2::num</code>                     | <code>R1::den * R2::den</code> |
| <code>ratio_divide&lt;R1, R2&gt;</code>   | <code>R1::num * R2::den</code>                     | <code>R1::den * R2::num</code> |

<sup>3</sup> [Example:

```
static_assert(ratio_add<ratio<1, 3>, ratio<1, 6>>::num == 1, "1/3+1/6 == 1/2");
static_assert(ratio_add<ratio<1, 3>, ratio<1, 6>>::den == 2, "1/3+1/6 == 1/2");
static_assert(ratio_multiply<ratio<1, 3>, ratio<3, 2>>::num == 1, "1/3*3/2 == 1/2");
static_assert(ratio_multiply<ratio<1, 3>, ratio<3, 2>>::den == 2, "1/3*3/2 == 1/2");
```

*// The following cases may cause the program to be ill-formed under some implementations*

```
static_assert(ratio_add<ratio<1, INT_MAX>, ratio<1, INT_MAX>>::num == 2,
 "1/MAX+1/MAX == 2/MAX");
static_assert(ratio_add<ratio<1, INT_MAX>, ratio<1, INT_MAX>>::den == INT_MAX,
 "1/MAX+1/MAX == 2/MAX");
static_assert(ratio_multiply<ratio<1, INT_MAX>, ratio<INT_MAX, 2>>::num == 1,
 "1/MAX * MAX/2 == 1/2");
static_assert(ratio_multiply<ratio<1, INT_MAX>, ratio<INT_MAX, 2>>::den == 2,
 "1/MAX * MAX/2 == 1/2");
```

— end example]

### 24.16.5 Comparison of ratios [ratio.comparison]

```
template<class R1, class R2>
 struct ratio_equal : bool_constant<R1::num == R2::num && R1::den == R2::den> { };
```

```
template<class R1, class R2>
 struct ratio_not_equal : bool_constant<!ratio_equal_v<R1, R2>> { };
```

```
template<class R1, class R2>
 struct ratio_less : bool_constant<see below> { };
```

- <sup>1</sup> If `R1::num × R2::den` is less than `R2::num × R1::den`, `ratio_less<R1, R2>` shall be derived from `bool_constant<>true>`; otherwise it shall be derived from `bool_constant<>false>`. Implementations may use other algorithms to compute this relationship to avoid overflow. If overflow occurs, the program is ill-formed.

```
template<class R1, class R2>
 struct ratio_less_equal : bool_constant<!ratio_less_v<R2, R1>> { };
```

```
template<class R1, class R2>
 struct ratio_greater : bool_constant<ratio_less_v<R2, R1>> { };
```

```
template<class R1, class R2>
 struct ratio_greater_equal : bool_constant<!ratio_less_v<R1, R2>> { };
```

### 24.16.6 SI types for ratio [ratio.si]

- <sup>1</sup> For each of the *typedef-names* `yocto`, `zepto`, `zetta`, and `yotta`, if both of the constants used in its specification are representable by `intmax_t`, the typedef shall be defined; if either of the constants is not representable by `intmax_t`, the typedef shall not be defined.

## 24.17 Time utilities [time]

### 24.17.1 In general [time.general]

- <sup>1</sup> This subclause describes the `chrono` library (24.17.2) and various C functions (24.17.13) that provide generally useful time utilities.

### 24.17.2 Header `<chrono>` synopsis [time.syn]

```
namespace std {
 namespace chrono {
 // 24.17.5, class template duration
 template<class Rep, class Period = ratio<1>> class duration;

 // 24.17.6, class template time_point
 template<class Clock, class Duration = typename Clock::duration> class time_point;
 }

 // 24.17.4.3, common_type specializations
 template<class Rep1, class Period1, class Rep2, class Period2>
 struct common_type<chrono::duration<Rep1, Period1>,
 chrono::duration<Rep2, Period2>>;

 template<class Clock, class Duration1, class Duration2>
 struct common_type<chrono::time_point<Clock, Duration1>,
 chrono::time_point<Clock, Duration2>>;

 namespace chrono {
 // 24.17.4, customization traits
 template<class Rep> struct treat_as_floating_point;
 template<class Rep> struct duration_values;
 template<class Rep>
 inline constexpr bool treat_as_floating_point_v = treat_as_floating_point<Rep>::value;

 template<class T> struct is_clock;
 template<class T> inline constexpr bool is_clock_v = is_clock<T>::value;

 // 24.17.5.5, duration arithmetic
 template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
 operator+(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
 template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
 operator-(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
 template<class Rep1, class Period, class Rep2>
 constexpr duration<common_type_t<Rep1, Rep2>, Period>
 operator*(const duration<Rep1, Period>& d, const Rep2& s);
 template<class Rep1, class Rep2, class Period>
 constexpr duration<common_type_t<Rep1, Rep2>, Period>
 operator*(const Rep1& s, const duration<Rep2, Period>& d);
 template<class Rep1, class Period, class Rep2>
 constexpr duration<common_type_t<Rep1, Rep2>, Period>
 operator/(const duration<Rep1, Period>& d, const Rep2& s);
 template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr common_type_t<Rep1, Rep2>
 operator/(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
 template<class Rep1, class Period, class Rep2>
 constexpr duration<common_type_t<Rep1, Rep2>, Period>
 operator%(const duration<Rep1, Period>& d, const Rep2& s);
 }
}
```



```

template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
 operator%(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);

// 24.17.5.6, duration comparisons
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator==(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator!=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator<(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator>(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator<=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Rep2, class Period2>
 constexpr bool operator>=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);

// 24.17.5.7, duration_cast
template<class ToDuration, class Rep, class Period>
 constexpr ToDuration duration_cast(const duration<Rep, Period>& d);
template<class ToDuration, class Rep, class Period>
 constexpr ToDuration floor(const duration<Rep, Period>& d);
template<class ToDuration, class Rep, class Period>
 constexpr ToDuration ceil(const duration<Rep, Period>& d);
template<class ToDuration, class Rep, class Period>
 constexpr ToDuration round(const duration<Rep, Period>& d);

// 24.17.5.10, duration I/O
template<class charT, class traits, class Rep, class Period>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os,
 const duration<Rep, Period>& d);
template<class charT, class traits, class Rep, class Period>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const duration<Rep, Period>& d);
template<class charT, class traits, class Rep, class Period, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 duration<Rep, Period>& d,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// convenience typedefs
using nanoseconds = duration<signed integer type of at least 64 bits, nano>;
using microseconds = duration<signed integer type of at least 55 bits, micro>;
using milliseconds = duration<signed integer type of at least 45 bits, milli>;
using seconds = duration<signed integer type of at least 35 bits>;
using minutes = duration<signed integer type of at least 29 bits, ratio< 60>>;
using hours = duration<signed integer type of at least 23 bits, ratio<3600>>;
using days = duration<signed integer type of at least 25 bits,
 ratio_multiply<ratio<24>, hours::period>>;
using weeks = duration<signed integer type of at least 22 bits,
 ratio_multiply<ratio<7>, days::period>>;
using years = duration<signed integer type of at least 17 bits,
 ratio_multiply<ratio<146097, 400>, days::period>>;

```

```

using months = duration<signed integer type of at least 20 bits,
 ratio_divide<years::period, ratio<12>>>;

// 24.17.6.5, time_point arithmetic
template<class Clock, class Duration1, class Rep2, class Period2>
 constexpr time_point<Clock, common_type_t<Duration1, duration<Rep2, Period2>>>
 operator+(const time_point<Clock, Duration1>& lhs, const duration<Rep2, Period2>& rhs);
template<class Rep1, class Period1, class Clock, class Duration2>
 constexpr time_point<Clock, common_type_t<duration<Rep1, Period1>, Duration2>>
 operator+(const duration<Rep1, Period1>& lhs, const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Rep2, class Period2>
 constexpr time_point<Clock, common_type_t<Duration1, duration<Rep2, Period2>>>
 operator-(const time_point<Clock, Duration1>& lhs, const duration<Rep2, Period2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr common_type_t<Duration1, Duration2>
 operator-(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);

// 24.17.6.6, time_point comparisons
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator==(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator!=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator<(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator>(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator<=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
template<class Clock, class Duration1, class Duration2>
 constexpr bool operator>=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);

// 24.17.6.7, time_point_cast
template<class ToDuration, class Clock, class Duration>
 constexpr time_point<Clock, ToDuration>
 time_point_cast(const time_point<Clock, Duration>& t);
template<class ToDuration, class Clock, class Duration>
 constexpr time_point<Clock, ToDuration> floor(const time_point<Clock, Duration>& tp);
template<class ToDuration, class Clock, class Duration>
 constexpr time_point<Clock, ToDuration> ceil(const time_point<Clock, Duration>& tp);
template<class ToDuration, class Clock, class Duration>
 constexpr time_point<Clock, ToDuration> round(const time_point<Clock, Duration>& tp);

// 24.17.5.9, specialized algorithms
template<class Rep, class Period>
 constexpr duration<Rep, Period> abs(duration<Rep, Period> d);

// 24.17.7.1, class system_clock
class system_clock;

template<class Duration>
 using sys_time = time_point<system_clock, Duration>;
using sys_seconds = sys_time<seconds>;
using sys_days = sys_time<days>;

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const sys_time<Duration>& tp);

```

```

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const sys_days& dp);

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const sys_time<Duration>& tp);

template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 sys_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.7.2, class utc_clock
class utc_clock;

template<class Duration>
 using utc_time = time_point<utc_clock, Duration>;
using utc_seconds = utc_time<seconds>;

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const utc_time<Duration>& t);
template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const utc_time<Duration>& tp);
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 utc_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.7.3, class tai_clock
class tai_clock;

template<class Duration>
 using tai_time = time_point<tai_clock, Duration>;
using tai_seconds = tai_time<seconds>;

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const tai_time<Duration>& t);
template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const tai_time<Duration>& tp);
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 tai_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.7.4, class gps_clock
class gps_clock;

template<class Duration>
 using gps_time = time_point<gps_clock, Duration>;
using gps_seconds = gps_time<seconds>;

```

```

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const gps_time<Duration>& t);
template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const gps_time<Duration>& tp);
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 gps_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.7.5, class file_clock
class file_clock;

template<class Duration>
 using file_time = time_point<file_clock, Duration>;

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const file_time<Duration>& tp);
template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const file_time<Duration>& tp);
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 file_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.7.6, class steady_clock
class steady_clock;

// 24.17.7.7, class high_resolution_clock
class high_resolution_clock;

// 24.17.7.8, local time
struct local_t {};
template<class Duration>
 using local_time = time_point<local_t, Duration>;
using local_seconds = local_time<seconds>;
using local_days = local_time<days>;

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const local_time<Duration>& tp);
template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const local_time<Duration>& tp,
 const string* abbrev = nullptr, const seconds* offset_sec = nullptr);
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 local_time<Duration>& tp,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

```

```

// 24.17.7.9, time_point conversions
template<class DestClock, class SourceClock>
 struct clock_time_conversion;

template<class DestClock, class SourceClock, class Duration>
 auto clock_cast(const time_point<SourceClock, Duration>& t);

// 24.17.8.2, class last_spec
struct last_spec;

// 24.17.8.3, class day
class day;

constexpr bool operator==(const day& x, const day& y) noexcept;
constexpr bool operator!=(const day& x, const day& y) noexcept;
constexpr bool operator<(const day& x, const day& y) noexcept;
constexpr bool operator>(const day& x, const day& y) noexcept;
constexpr bool operator<=(const day& x, const day& y) noexcept;
constexpr bool operator>=(const day& x, const day& y) noexcept;

constexpr day operator+(const day& x, const days& y) noexcept;
constexpr day operator+(const days& x, const day& y) noexcept;
constexpr day operator-(const day& x, const days& y) noexcept;
constexpr days operator-(const day& x, const day& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const day& d);
template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const day& d);
template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 day& d, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.4, class month
class month;

constexpr bool operator==(const month& x, const month& y) noexcept;
constexpr bool operator!=(const month& x, const month& y) noexcept;
constexpr bool operator<(const month& x, const month& y) noexcept;
constexpr bool operator>(const month& x, const month& y) noexcept;
constexpr bool operator<=(const month& x, const month& y) noexcept;
constexpr bool operator>=(const month& x, const month& y) noexcept;

constexpr month operator+(const month& x, const months& y) noexcept;
constexpr month operator+(const months& x, const month& y) noexcept;
constexpr month operator-(const month& x, const months& y) noexcept;
constexpr months operator-(const month& x, const month& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month& m);
template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const month& m);
template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 month& m, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

```

```

// 24.17.8.5, class year
class year;

constexpr bool operator==(const year& x, const year& y) noexcept;
constexpr bool operator!=(const year& x, const year& y) noexcept;
constexpr bool operator<(const year& x, const year& y) noexcept;
constexpr bool operator>(const year& x, const year& y) noexcept;
constexpr bool operator<=(const year& x, const year& y) noexcept;
constexpr bool operator>=(const year& x, const year& y) noexcept;

constexpr year operator+(const year& x, const years& y) noexcept;
constexpr year operator+(const years& x, const year& y) noexcept;
constexpr year operator-(const year& x, const years& y) noexcept;
constexpr years operator-(const year& x, const year& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year& y);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const year& y);

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 year& y, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.6, class weekday
class weekday;

constexpr bool operator==(const weekday& x, const weekday& y) noexcept;
constexpr bool operator!=(const weekday& x, const weekday& y) noexcept;

constexpr weekday operator+(const weekday& x, const days& y) noexcept;
constexpr weekday operator+(const days& x, const weekday& y) noexcept;
constexpr weekday operator-(const weekday& x, const days& y) noexcept;
constexpr days operator-(const weekday& x, const weekday& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const weekday& wd);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const weekday& wd);

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 weekday& wd, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.7, class weekday_indexed
class weekday_indexed;

constexpr bool operator==(const weekday_indexed& x, const weekday_indexed& y) noexcept;
constexpr bool operator!=(const weekday_indexed& x, const weekday_indexed& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const weekday_indexed& wdi);

```

```

// 24.17.8.8, class weekday_last
class weekday_last;

constexpr bool operator==(const weekday_last& x, const weekday_last& y) noexcept;
constexpr bool operator!=(const weekday_last& x, const weekday_last& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const weekday_last& wdl);

// 24.17.8.9, class month_day
class month_day;

constexpr bool operator==(const month_day& x, const month_day& y) noexcept;
constexpr bool operator!=(const month_day& x, const month_day& y) noexcept;
constexpr bool operator<(const month_day& x, const month_day& y) noexcept;
constexpr bool operator>(const month_day& x, const month_day& y) noexcept;
constexpr bool operator<=(const month_day& x, const month_day& y) noexcept;
constexpr bool operator>=(const month_day& x, const month_day& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_day& md);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const month_day& md);

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 month_day& md, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.10, class month_day_last
class month_day_last;

constexpr bool operator==(const month_day_last& x, const month_day_last& y) noexcept;
constexpr bool operator!=(const month_day_last& x, const month_day_last& y) noexcept;
constexpr bool operator<(const month_day_last& x, const month_day_last& y) noexcept;
constexpr bool operator>(const month_day_last& x, const month_day_last& y) noexcept;
constexpr bool operator<=(const month_day_last& x, const month_day_last& y) noexcept;
constexpr bool operator>=(const month_day_last& x, const month_day_last& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_day_last& mdl);

// 24.17.8.11, class month_weekday
class month_weekday;

constexpr bool operator==(const month_weekday& x, const month_weekday& y) noexcept;
constexpr bool operator!=(const month_weekday& x, const month_weekday& y) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_weekday& mwd);

// 24.17.8.12, class month_weekday_last
class month_weekday_last;

constexpr bool operator==(const month_weekday_last& x, const month_weekday_last& y) noexcept;
constexpr bool operator!=(const month_weekday_last& x, const month_weekday_last& y) noexcept;

```

```

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_weekday_last& mwdl);

// 24.17.8.13, class year_month
class year_month;

constexpr bool operator==(const year_month& x, const year_month& y) noexcept;
constexpr bool operator!=(const year_month& x, const year_month& y) noexcept;
constexpr bool operator<(const year_month& x, const year_month& y) noexcept;
constexpr bool operator>(const year_month& x, const year_month& y) noexcept;
constexpr bool operator<=(const year_month& x, const year_month& y) noexcept;
constexpr bool operator>=(const year_month& x, const year_month& y) noexcept;

constexpr year_month operator+(const year_month& ym, const months& dm) noexcept;
constexpr year_month operator+(const months& dm, const year_month& ym) noexcept;
constexpr year_month operator-(const year_month& ym, const months& dm) noexcept;
constexpr months operator-(const year_month& x, const year_month& y) noexcept;
constexpr year_month operator+(const year_month& ym, const years& dy) noexcept;
constexpr year_month operator+(const years& dy, const year_month& ym) noexcept;
constexpr year_month operator-(const year_month& ym, const years& dy) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month& ym);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const year_month& ym);

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 year_month& ym, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.14, class year_month_day
class year_month_day;

constexpr bool operator==(const year_month_day& x, const year_month_day& y) noexcept;
constexpr bool operator!=(const year_month_day& x, const year_month_day& y) noexcept;
constexpr bool operator<(const year_month_day& x, const year_month_day& y) noexcept;
constexpr bool operator>(const year_month_day& x, const year_month_day& y) noexcept;
constexpr bool operator<=(const year_month_day& x, const year_month_day& y) noexcept;
constexpr bool operator>=(const year_month_day& x, const year_month_day& y) noexcept;

constexpr year_month_day operator+(const year_month_day& ymd, const months& dm) noexcept;
constexpr year_month_day operator+(const months& dm, const year_month_day& ymd) noexcept;
constexpr year_month_day operator+(const year_month_day& ymd, const years& dy) noexcept;
constexpr year_month_day operator+(const years& dy, const year_month_day& ymd) noexcept;
constexpr year_month_day operator-(const year_month_day& ymd, const months& dm) noexcept;
constexpr year_month_day operator-(const year_month_day& ymd, const years& dy) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_day& ymd);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const year_month_day& ymd);

```



```

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 year_month_day& ymd,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

// 24.17.8.15, class year_month_day_last
class year_month_day_last;

constexpr bool operator==(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;
constexpr bool operator!=(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;
constexpr bool operator<(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;
constexpr bool operator>(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;
constexpr bool operator<=(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;
constexpr bool operator>=(const year_month_day_last& x,
 const year_month_day_last& y) noexcept;

constexpr year_month_day_last
 operator+(const year_month_day_last& ymdl, const months& dm) noexcept;
constexpr year_month_day_last
 operator+(const months& dm, const year_month_day_last& ymdl) noexcept;
constexpr year_month_day_last
 operator+(const year_month_day_last& ymdl, const years& dy) noexcept;
constexpr year_month_day_last
 operator+(const years& dy, const year_month_day_last& ymdl) noexcept;
constexpr year_month_day_last
 operator-(const year_month_day_last& ymdl, const months& dm) noexcept;
constexpr year_month_day_last
 operator-(const year_month_day_last& ymdl, const years& dy) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_day_last& ymdl);

// 24.17.8.16, class year_month_weekday
class year_month_weekday;

constexpr bool operator==(const year_month_weekday& x,
 const year_month_weekday& y) noexcept;
constexpr bool operator!=(const year_month_weekday& x,
 const year_month_weekday& y) noexcept;

constexpr year_month_weekday
 operator+(const year_month_weekday& ymwd, const months& dm) noexcept;
constexpr year_month_weekday
 operator+(const months& dm, const year_month_weekday& ymwd) noexcept;
constexpr year_month_weekday
 operator+(const year_month_weekday& ymwd, const years& dy) noexcept;
constexpr year_month_weekday
 operator+(const years& dy, const year_month_weekday& ymwd) noexcept;
constexpr year_month_weekday
 operator-(const year_month_weekday& ymwd, const months& dm) noexcept;
constexpr year_month_weekday
 operator-(const year_month_weekday& ymwd, const years& dy) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_weekday& ymwdi);

```

```

// 24.17.8.17, class year_month_weekday_last
class year_month_weekday_last;

constexpr bool operator==(const year_month_weekday_last& x,
 const year_month_weekday_last& y) noexcept;
constexpr bool operator!=(const year_month_weekday_last& x,
 const year_month_weekday_last& y) noexcept;

constexpr year_month_weekday_last
 operator+(const year_month_weekday_last& ymwdl, const months& dm) noexcept;
constexpr year_month_weekday_last
 operator+(const months& dm, const year_month_weekday_last& ymwdl) noexcept;
constexpr year_month_weekday_last
 operator+(const year_month_weekday_last& ymwdl, const years& dy) noexcept;
constexpr year_month_weekday_last
 operator+(const years& dy, const year_month_weekday_last& ymwdl) noexcept;
constexpr year_month_weekday_last
 operator-(const year_month_weekday_last& ymwdl, const months& dm) noexcept;
constexpr year_month_weekday_last
 operator-(const year_month_weekday_last& ymwdl, const years& dy) noexcept;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_weekday_last& ymwdl);

// 24.17.8.18, civil calendar conventional syntax operators
constexpr year_month
 operator/(const year& y, const month& m) noexcept;
constexpr year_month
 operator/(const year& y, int m) noexcept;
constexpr month_day
 operator/(const month& m, const day& d) noexcept;
constexpr month_day
 operator/(const month& m, int d) noexcept;
constexpr month_day
 operator/(int m, const day& d) noexcept;
constexpr month_day
 operator/(const day& d, const month& m) noexcept;
constexpr month_day
 operator/(const day& d, int m) noexcept;
constexpr month_day_last
 operator/(const month& m, last_spec) noexcept;
constexpr month_day_last
 operator/(int m, last_spec) noexcept;
constexpr month_day_last
 operator/(last_spec, const month& m) noexcept;
constexpr month_day_last
 operator/(last_spec, int m) noexcept;
constexpr month_weekday
 operator/(const month& m, const weekday_indexed& wdi) noexcept;
constexpr month_weekday
 operator/(int m, const weekday_indexed& wdi) noexcept;
constexpr month_weekday
 operator/(const weekday_indexed& wdi, const month& m) noexcept;
constexpr month_weekday
 operator/(const weekday_indexed& wdi, int m) noexcept;
constexpr month_weekday_last
 operator/(const month& m, const weekday_last& wdl) noexcept;
constexpr month_weekday_last
 operator/(int m, const weekday_last& wdl) noexcept;
constexpr month_weekday_last
 operator/(const weekday_last& wdl, const month& m) noexcept;
constexpr month_weekday_last
 operator/(const weekday_last& wdl, int m) noexcept;

```

```

constexpr year_month_day
 operator/(const year_month& ym, const day& d) noexcept;
constexpr year_month_day
 operator/(const year_month& ym, int d) noexcept;
constexpr year_month_day
 operator/(const year& y, const month_day& md) noexcept;
constexpr year_month_day
 operator/(int y, const month_day& md) noexcept;
constexpr year_month_day
 operator/(const month_day& md, const year& y) noexcept;
constexpr year_month_day
 operator/(const month_day& md, int y) noexcept;
constexpr year_month_day_last
 operator/(const year_month& ym, last_spec) noexcept;
constexpr year_month_day_last
 operator/(const year& y, const month_day_last& mdl) noexcept;
constexpr year_month_day_last
 operator/(int y, const month_day_last& mdl) noexcept;
constexpr year_month_day_last
 operator/(const month_day_last& mdl, const year& y) noexcept;
constexpr year_month_day_last
 operator/(const month_day_last& mdl, int y) noexcept;
constexpr year_month_weekday
 operator/(const year_month& ym, const weekday_indexed& wdi) noexcept;
constexpr year_month_weekday
 operator/(const year& y, const month_weekday& mwd) noexcept;
constexpr year_month_weekday
 operator/(int y, const month_weekday& mwd) noexcept;
constexpr year_month_weekday
 operator/(const month_weekday& mwd, const year& y) noexcept;
constexpr year_month_weekday
 operator/(const month_weekday& mwd, int y) noexcept;
constexpr year_month_weekday_last
 operator/(const year_month& ym, const weekday_last& wdl) noexcept;
constexpr year_month_weekday_last
 operator/(const year& y, const month_weekday_last& mwdl) noexcept;
constexpr year_month_weekday_last
 operator/(int y, const month_weekday_last& mwdl) noexcept;
constexpr year_month_weekday_last
 operator/(const month_weekday_last& mwdl, const year& y) noexcept;
constexpr year_month_weekday_last
 operator/(const month_weekday_last& mwdl, int y) noexcept;

// 24.17.9, class template time_of_day
template<class Duration> class time_of_day;
template<> class time_of_day<hours>;
template<> class time_of_day<minutes>;
template<> class time_of_day<seconds>;
template<class Rep, class Period> class time_of_day<duration<Rep, Period>>;

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const time_of_day<hours>& t);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const time_of_day<minutes>& t);

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const time_of_day<seconds>& t);

```

```

template<class charT, class traits, class Rep, class Period>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os,
 const time_of_day<duration<Rep, Period>>& t);

// 24.17.10.2, time zone database
struct tzdb;
class tzdb_list;

// 24.17.10.2.3, time zone database access
const tzdb& get_tzdb();
tzdb_list& get_tzdb_list();
const time_zone* locate_zone(string_view tz_name);
const time_zone* current_zone();

// 24.17.10.2.4, remote time zone database support
const tzdb& reload_tzdb();
string remote_version();

// 24.17.10.3, exception classes
class nonexistent_local_time;
class ambiguous_local_time;

// 24.17.10.4, information classes
struct sys_info;
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const sys_info& si);

struct local_info;
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const local_info& li);

// 24.17.10.5, class time_zone
enum class choose {earliest, latest};
class time_zone;

bool operator==(const time_zone& x, const time_zone& y) noexcept;
bool operator!=(const time_zone& x, const time_zone& y) noexcept;

bool operator<(const time_zone& x, const time_zone& y) noexcept;
bool operator>(const time_zone& x, const time_zone& y) noexcept;
bool operator<=(const time_zone& x, const time_zone& y) noexcept;
bool operator>=(const time_zone& x, const time_zone& y) noexcept;

// 24.17.10.6, class template zoned_traits
template<class T> struct zoned_traits;

// 24.17.10.7, class template zoned_time
template<class Duration, class TimeZonePtr = const time_zone*> class zoned_time;

using zoned_seconds = zoned_time<seconds>;

template<class Duration1, class Duration2, class TimeZonePtr>
 bool operator==(const zoned_time<Duration1, TimeZonePtr>& x,
 const zoned_time<Duration2, TimeZonePtr>& y);

template<class Duration1, class Duration2, class TimeZonePtr>
 bool operator!=(const zoned_time<Duration1, TimeZonePtr>& x,
 const zoned_time<Duration2, TimeZonePtr>& y);

```

```
template<class charT, class traits, class Duration, class TimeZonePtr>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os,
 const zoned_time<Duration, TimeZonePtr>& t);
```

```
template<class charT, class traits, class Duration, class TimeZonePtr>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const zoned_time<Duration, TimeZonePtr>& tp);
```

```
// 24.17.10.8, leap second support
class leap;
```

```
bool operator==(const leap& x, const leap& y);
bool operator!=(const leap& x, const leap& y);
bool operator< (const leap& x, const leap& y);
bool operator> (const leap& x, const leap& y);
bool operator<=(const leap& x, const leap& y);
bool operator>=(const leap& x, const leap& y);
```

```
template<class Duration>
 bool operator==(const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator==(const sys_time<Duration>& x, const leap& y);
template<class Duration>
 bool operator!=(const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator!=(const sys_time<Duration>& x, const leap& y);
template<class Duration>
 bool operator< (const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator< (const sys_time<Duration>& x, const leap& y);
template<class Duration>
 bool operator> (const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator> (const sys_time<Duration>& x, const leap& y);
template<class Duration>
 bool operator<=(const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator<=(const sys_time<Duration>& x, const leap& y);
template<class Duration>
 bool operator>=(const leap& x, const sys_time<Duration>& y);
template<class Duration>
 bool operator>=(const sys_time<Duration>& x, const leap& y);
```

```
// 24.17.10.9, class link
class link;
```

```
bool operator==(const link& x, const link& y);
bool operator!=(const link& x, const link& y);
bool operator< (const link& x, const link& y);
bool operator> (const link& x, const link& y);
bool operator<=(const link& x, const link& y);
bool operator>=(const link& x, const link& y);
```

```
// 24.17.11, formatting
```

```
template<class charT, class Streamable>
 basic_string<charT>
 format(const charT* fmt, const Streamable& s);
template<class charT, class Streamable>
 basic_string<charT>
 format(const locale& loc, const charT* fmt, const Streamable& s);
```

```

template<class charT, class traits, class Alloc, class Streamable>
 basic_string<charT, traits, Alloc>
 format(const basic_string<charT, traits, Alloc>& fmt, const Streamable& s);
template<class charT, class traits, class Alloc, class Streamable>
 basic_string<charT, traits, Alloc>
 format(const locale& loc, const basic_string<charT, traits, Alloc>& fmt,
 const Streamable& s);

// 24.17.12, parsing
template<class charT, class traits, class Alloc, class Parsable>
 unspecified
 parse(const basic_string<charT, traits, Alloc>& format, Parsable& tp);

template<class charT, class traits, class Alloc, class Parsable>
 unspecified
 parse(const basic_string<charT, traits, Alloc>& format, Parsable& tp,
 basic_string<charT, traits, Alloc>& abbrev);

template<class charT, class traits, class Alloc, class Parsable>
 unspecified
 parse(const basic_string<charT, traits, Alloc>& format, Parsable& tp,
 minutes& offset);

template<class charT, class traits, class Alloc, class Parsable>
 unspecified
 parse(const basic_string<charT, traits, Alloc>& format, Parsable& tp,
 basic_string<charT, traits, Alloc>& abbrev, minutes& offset);

// calendrical constants
inline constexpr last_spec last{};

inline constexpr weekday Sunday{0};
inline constexpr weekday Monday{1};
inline constexpr weekday Tuesday{2};
inline constexpr weekday Wednesday{3};
inline constexpr weekday Thursday{4};
inline constexpr weekday Friday{5};
inline constexpr weekday Saturday{6};

inline constexpr month January{1};
inline constexpr month February{2};
inline constexpr month March{3};
inline constexpr month April{4};
inline constexpr month May{5};
inline constexpr month June{6};
inline constexpr month July{7};
inline constexpr month August{8};
inline constexpr month September{9};
inline constexpr month October{10};
inline constexpr month November{11};
inline constexpr month December{12};
}

inline namespace literals {
inline namespace chrono_literals {
 // 24.17.5.8, suffixes for duration literals
 constexpr chrono::hours operator""h(unsigned long long);
 constexpr chrono::duration<unspecified, ratio<3600, 1>> operator""h(long double);

 constexpr chrono::minutes operator""min(unsigned long long);
 constexpr chrono::duration<unspecified, ratio<60, 1>> operator""min(long double);

 constexpr chrono::seconds operator""s(unsigned long long);
 constexpr chrono::duration<unspecified> operator""s(long double);

```

```

constexpr chrono::milliseconds operator"ms(unsigned long long);
constexpr chrono::duration<unspecified, milli> operator"ms(long double);

constexpr chrono::microseconds operator"us(unsigned long long);
constexpr chrono::duration<unspecified, micro> operator"us(long double);

constexpr chrono::nanoseconds operator"ns(unsigned long long);
constexpr chrono::duration<unspecified, nano> operator"ns(long double);

// 24.17.8.3.3, non-member functions
constexpr chrono::day operator"d(unsigned long long d) noexcept;

// 24.17.8.5.3, non-member functions
constexpr chrono::year operator"y(unsigned long long y) noexcept;
}
}

namespace chrono {
 using namespace literals::chrono_literals;
}
}

```

### 24.17.3 Cpp17Clock requirements [time.clock.req]

- <sup>1</sup> A clock is a bundle consisting of a duration, a time\_point, and a function now() to get the current time\_point. The origin of the clock's time\_point is referred to as the clock's epoch. A clock shall satisfy the requirements in Table 56.
- <sup>2</sup> In Table 56 C1 and C2 denote clock types. t1 and t2 are values returned by C1::now() where the call returning t1 happens before (6.8.2) the call returning t2 and both of these calls occur before C1::time\_point::max(). [Note: This means C1 did not wrap around between t1 and t2. — end note]

Table 56 — Cpp17Clock requirements

| Expression     | Return type                                                    | Operational semantics                                                                          |
|----------------|----------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| C1::rep        | An arithmetic type or a class emulating an arithmetic type     | The representation type of C1::duration.                                                       |
| C1::period     | a specialization of ratio                                      | The tick period of the clock in seconds.                                                       |
| C1::duration   | chrono::duration<C1::rep, C1::period>                          | The duration type of the clock.                                                                |
| C1::time_point | chrono::time_point<C1> or chrono::time_point<C2, C1::duration> | The time_point type of the clock. C1 and C2 shall refer to the same epoch.                     |
| C1::is_steady  | const bool                                                     | true if t1 <= t2 is always true and the time between clock ticks is constant, otherwise false. |
| C1::now()      | C1::time_point                                                 | Returns a time_point object representing the current point in time.                            |

- <sup>3</sup> [Note: The relative difference in durations between those reported by a given clock and the SI definition is a measure of the quality of implementation. — end note]
- <sup>4</sup> A type TC meets the Cpp17TrivialClock requirements if:
  - (4.1) — TC satisfies the Cpp17Clock requirements (24.17.3),
  - (4.2) — the types TC::rep, TC::duration, and TC::time\_point satisfy the Cpp17EqualityComparable (Table 22), Cpp17LessThanComparable (Table 23), Cpp17DefaultConstructible (Table 24), Cpp17CopyConstructible (Table 26), Cpp17CopyAssignable (Table 28), and Cpp17Destructible (Table 29) requirements

and the requirements of numeric types (30.3). [Note: This means, in particular, that operations on these types will not throw exceptions. — end note]

- (4.3) — lvalues of the types `TC::rep`, `TC::duration`, and `TC::time_point` are swappable (20.5.3.2),
- (4.4) — the function `TC::now()` does not throw exceptions, and
- (4.5) — the type `TC::time_point::clock` meets the *Cpp17TrivialClock* requirements, recursively.

#### 24.17.4 Time-related traits [time.traits]

##### 24.17.4.1 `treat_as_floating_point` [time.traits.is\_fp]

```
template<class Rep> struct treat_as_floating_point : is_floating_point<Rep> { };
```

- <sup>1</sup> The `duration` template uses the `treat_as_floating_point` trait to help determine if a `duration` object can be converted to another `duration` with a different tick period. If `treat_as_floating_point_v<Rep>` is `true`, then implicit conversions are allowed among `duration`s. Otherwise, the implicit convertibility depends on the tick periods of the `duration`s. [Note: The intention of this trait is to indicate whether a given class behaves like a floating-point type, and thus allows division of one value by another with acceptable loss of precision. If `treat_as_floating_point_v<Rep>` is `false`, `Rep` will be treated as if it behaved like an integral type for the purpose of these conversions. — end note]

##### 24.17.4.2 `duration_values` [time.traits.duration\_values]

```
template<class Rep>
struct duration_values {
public:
 static constexpr Rep zero();
 static constexpr Rep min();
 static constexpr Rep max();
};
```

- <sup>1</sup> The `duration` template uses the `duration_values` trait to construct special values of the `duration`'s representation (`Rep`). This is done because the representation might be a class type with behavior which requires some other implementation to return these special values. In that case, the author of that class type should specialize `duration_values` to return the indicated values.

```
static constexpr Rep zero();
```

- <sup>2</sup> *Returns:* `Rep(0)`. [Note: `Rep(0)` is specified instead of `Rep()` because `Rep()` may have some other meaning, such as an uninitialized value. — end note]

- <sup>3</sup> *Remarks:* The value returned shall be the additive identity.

```
static constexpr Rep min();
```

- <sup>4</sup> *Returns:* `numeric_limits<Rep>::lowest()`.

- <sup>5</sup> *Remarks:* The value returned shall compare less than or equal to `zero()`.

```
static constexpr Rep max();
```

- <sup>6</sup> *Returns:* `numeric_limits<Rep>::max()`.

- <sup>7</sup> *Remarks:* The value returned shall compare greater than `zero()`.

##### 24.17.4.3 Specializations of `common_type` [time.traits.specializations]

```
template<class Rep1, class Period1, class Rep2, class Period2>
struct common_type<chrono::duration<Rep1, Period1>, chrono::duration<Rep2, Period2>> {
 using type = chrono::duration<common_type_t<Rep1, Rep2>, see below>;
};
```

- <sup>1</sup> The period of the `duration` indicated by this specialization of `common_type` shall be the greatest common divisor of `Period1` and `Period2`. [Note: This can be computed by forming a ratio of the greatest common divisor of `Period1::num` and `Period2::num` and the least common multiple of `Period1::den` and `Period2::den`. — end note]

- <sup>2</sup> [Note: The typedef name `type` is a synonym for the `duration` with the largest tick period possible where both `duration` arguments will convert to it without requiring a division operation. The representation of



this type is intended to be able to hold any value resulting from this conversion with no truncation error, although floating-point durations may have round-off errors. — *end note*]

```
template<class Clock, class Duration1, class Duration2>
 struct common_type<chrono::time_point<Clock, Duration1>, chrono::time_point<Clock, Duration2>> {
 using type = chrono::time_point<Clock, common_type_t<Duration1, Duration2>>;
 };
```

- <sup>3</sup> The common type of two `time_point` types is a `time_point` with the same clock as the two types and the common type of their two durations.

#### 24.17.4.4 Class template `is_clock` [`time.traits.is_clock`]

```
template<class T> struct is_clock;
```

- <sup>1</sup> `is_clock` is a *Cpp17UnaryTypeTrait* (24.15.1) with a base characteristic of `true_type` if `T` meets the *Cpp17Clock* requirements (24.17.3), otherwise `false_type`. For the purposes of the specification of this trait, the extent to which an implementation determines that a type cannot meet the *Cpp17Clock* requirements is unspecified, except that as a minimum a type `T` shall not qualify as a *Cpp17Clock* unless it satisfies all of the following conditions:

- (1.1) — the *qualified-ids* `T::rep`, `T::period`, `T::duration`, and `T::time_point` are valid and each denotes a type (17.9.2),
- (1.2) — the expression `T::is_steady` is well-formed when treated as an unevaluated operand,
- (1.3) — the expression `T::now()` is well-formed when treated as an unevaluated operand.

- <sup>2</sup> The behavior of a program that adds specializations for `is_clock` is undefined.

#### 24.17.5 Class template `duration` [`time.duration`]

- <sup>1</sup> A `duration` type measures time between two points in time (`time_points`). A `duration` has a representation which holds a count of ticks and a tick period. The tick period is the amount of time which occurs from one tick to the next, in units of seconds. It is expressed as a rational constant using the template `ratio`.

```
namespace std::chrono {
 template<class Rep, class Period = ratio<1>>
 class duration {
 public:
 using rep = Rep;
 using period = typename Period::type;

 private:
 rep rep_; // exposition only

 public:
 // 24.17.5.1, construct/copy/destroy
 constexpr duration() = default;
 template<class Rep2>
 constexpr explicit duration(const Rep2& r);
 template<class Rep2, class Period2>
 constexpr duration(const duration<Rep2, Period2>& d);
 ~duration() = default;
 duration(const duration&) = default;
 duration& operator=(const duration&) = default;

 // 24.17.5.2, observer
 constexpr rep count() const;

 // 24.17.5.3, arithmetic
 constexpr common_type_t<duration> operator+() const;
 constexpr common_type_t<duration> operator-() const;
 constexpr duration& operator++();
 constexpr duration operator++(int);
 constexpr duration& operator--();
 constexpr duration operator--(int);
```

```

constexpr duration& operator+=(const duration& d);
constexpr duration& operator-=(const duration& d);

constexpr duration& operator*=(const rep& rhs);
constexpr duration& operator/=(const rep& rhs);
constexpr duration& operator%=(const rep& rhs);
constexpr duration& operator%=(const duration& rhs);

// 24.17.5.4, special values
static constexpr duration zero();
static constexpr duration min();
static constexpr duration max();
};
}

```

- 2 Rep shall be an arithmetic type or a class emulating an arithmetic type. If `duration` is instantiated with a `duration` type as the argument for the template parameter Rep, the program is ill-formed.
- 3 If `Period` is not a specialization of `ratio`, the program is ill-formed. If `Period::num` is not positive, the program is ill-formed.
- 4 Members of `duration` shall not throw exceptions other than those thrown by the indicated operations on their representations.
- 5 The defaulted copy constructor of `duration` shall be a `constexpr` function if and only if the required initialization of the member `rep_` for copy and move, respectively, would satisfy the requirements for a `constexpr` function.

6 [Example:

```

duration<long, ratio<60>> d0; // holds a count of minutes using a long
duration<long long, milli> d1; // holds a count of milliseconds using a long long
duration<double, ratio<1, 30>> d2; // holds a count with a tick period of $\frac{1}{30}$ of a second
// (30 Hz) using a double

```

— end example]

#### 24.17.5.1 duration constructors

[time.duration.cons]

```

template<class Rep2>
constexpr explicit duration(const Rep2& r);

```

- 1 *Remarks:* This constructor shall not participate in overload resolution unless Rep2 is implicitly convertible to rep and

(1.1) — `treat_as_floating_point_v<rep>` is true or

(1.2) — `treat_as_floating_point_v<Rep2>` is false.

[Example:

```

duration<int, milli> d(3); // OK
duration<int, milli> d(3.5); // error

```

— end example]

- 2 *Effects:* Constructs an object of type `duration`.

- 3 *Ensures:* `count() == static_cast<rep>(r)`.

```

template<class Rep2, class Period2>
constexpr duration(const duration<Rep2, Period2>& d);

```

- 4 *Remarks:* This constructor shall not participate in overload resolution unless no overflow is induced in the conversion and `treat_as_floating_point_v<rep>` is true or both `ratio_divide<Period2, period>::den` is 1 and `treat_as_floating_point_v<Rep2>` is false. [Note: This requirement prevents implicit truncation error when converting between integral-based `duration` types. Such a construction could easily lead to confusion about the value of the `duration`. — end note] [Example:

```

duration<int, milli> ms(3);
duration<int, micro> us = ms; // OK
duration<int, milli> ms2 = us; // error

```

— end example]

5 *Effects:* Constructs an object of type `duration`, constructing `rep_` from `duration_cast<duration>(d).count()`.

#### 24.17.5.2 `duration` observer

[`time.duration.observer`]

`constexpr rep count() const;`

1 *Returns:* `rep_`.

#### 24.17.5.3 `duration` arithmetic

[`time.duration.arithmetic`]

`constexpr common_type_t<duration> operator+() const;`

1 *Returns:* `common_type_t<duration>>(*this)`.

`constexpr common_type_t<duration> operator-() const;`

2 *Returns:* `common_type_t<duration>(-rep_)`.

`constexpr duration& operator++();`

3 *Effects:* As if by `++rep_`.

4 *Returns:* `*this`.

`constexpr duration operator++(int);`

5 *Returns:* `duration(rep_++)`.

`constexpr duration& operator--();`

6 *Effects:* As if by `--rep_`.

7 *Returns:* `*this`.

`constexpr duration operator--(int);`

8 *Returns:* `duration(rep_--)`.

`constexpr duration& operator+=(const duration& d);`

9 *Effects:* As if by: `rep_ += d.count()`;

10 *Returns:* `*this`.

`constexpr duration& operator-=(const duration& d);`

11 *Effects:* As if by: `rep_ -= d.count()`;

12 *Returns:* `*this`.

`constexpr duration& operator*=(const rep& rhs);`

13 *Effects:* As if by: `rep_ *= rhs`;

14 *Returns:* `*this`.

`constexpr duration& operator/=(const rep& rhs);`

15 *Effects:* As if by: `rep_ /= rhs`;

16 *Returns:* `*this`.

`constexpr duration& operator%=(const rep& rhs);`

17 *Effects:* As if by: `rep_ %= rhs`;

18 *Returns:* `*this`.

`constexpr duration& operator%=(const duration& rhs);`

19 *Effects:* As if by: `rep_ %= rhs.count()`;

20 *Returns:* `*this`.

**24.17.5.4 duration special values****[time.duration.special]**

```
static constexpr duration zero();
```

1 *Returns:* duration(duration\_values<rep>::zero()).

```
static constexpr duration min();
```

2 *Returns:* duration(duration\_values<rep>::min()).

```
static constexpr duration max();
```

3 *Returns:* duration(duration\_values<rep>::max()).

**24.17.5.5 duration non-member arithmetic****[time.duration.nonmember]**

1 In the function descriptions that follow, unless stated otherwise, let **CD** represent the return type of the function.

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
operator+(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
```

2 *Returns:* CD(CD(lhs).count() + CD(rhs).count()).

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
operator-(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
```

3 *Returns:* CD(CD(lhs).count() - CD(rhs).count()).

```
template<class Rep1, class Period, class Rep2>
constexpr duration<common_type_t<Rep1, Rep2>, Period>
operator*(const duration<Rep1, Period>& d, const Rep2& s);
```

4 *Remarks:* This operator shall not participate in overload resolution unless **Rep2** is implicitly convertible to `common_type_t<Rep1, Rep2>`.

5 *Returns:* CD(CD(d).count() \* s).

```
template<class Rep1, class Rep2, class Period>
constexpr duration<common_type_t<Rep1, Rep2>, Period>
operator*(const Rep1& s, const duration<Rep2, Period>& d);
```

6 *Remarks:* This operator shall not participate in overload resolution unless **Rep1** is implicitly convertible to `common_type_t<Rep1, Rep2>`.

7 *Returns:*  $d * s$ .

```
template<class Rep1, class Period, class Rep2>
constexpr duration<common_type_t<Rep1, Rep2>, Period>
operator/(const duration<Rep1, Period>& d, const Rep2& s);
```

8 *Remarks:* This operator shall not participate in overload resolution unless **Rep2** is implicitly convertible to `common_type_t<Rep1, Rep2>` and **Rep2** is not a specialization of `duration`.

9 *Returns:*  $CD(CD(d).count() / s)$ .

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr common_type_t<Rep1, Rep2>
operator/(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
```

10 Let **CD** be `common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>`.

11 *Returns:*  $CD(lhs).count() / CD(rhs).count()$ .

```
template<class Rep1, class Period, class Rep2>
constexpr duration<common_type_t<Rep1, Rep2>, Period>
operator%(const duration<Rep1, Period>& d, const Rep2& s);
```

12 *Remarks:* This operator shall not participate in overload resolution unless **Rep2** is implicitly convertible to `common_type_t<Rep1, Rep2>` and **Rep2** is not a specialization of `duration`.

13 *Returns:*  $CD(CD(d).count() \% s)$ .

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr common_type_t<duration<Rep1, Period1>, duration<Rep2, Period2>>
operator%(const duration<Rep1, Period1>& lhs, const duration<Rep2, Period2>& rhs);
```

14 *Returns:* CD(CD(lhs).count() % CD(rhs).count()).

#### 24.17.5.6 duration comparisons [time.duration.comparisons]

1 In the function descriptions that follow, CT represents `common_type_t<A, B>`, where A and B are the types of the two arguments to the function.

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator==(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

2 *Returns:* CT(lhs).count() == CT(rhs).count().

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator!=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

3 *Returns:* !(lhs == rhs).

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator<(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

4 *Returns:* CT(lhs).count() < CT(rhs).count().

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator>(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

5 *Returns:* rhs < lhs.

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator<=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

6 *Returns:* !(rhs < lhs).

```
template<class Rep1, class Period1, class Rep2, class Period2>
constexpr bool operator>=(const duration<Rep1, Period1>& lhs,
 const duration<Rep2, Period2>& rhs);
```

7 *Returns:* !(lhs < rhs).

#### 24.17.5.7 duration\_cast [time.duration.cast]

```
template<class ToDuration, class Rep, class Period>
constexpr ToDuration duration_cast(const duration<Rep, Period>& d);
```

1 *Remarks:* This function shall not participate in overload resolution unless `ToDuration` is a specialization of `duration`.

2 *Returns:* Let CF be `ratio_divide<Period, typename ToDuration::period>`, and CR be `common_type<typename ToDuration::rep, Rep, intmax_t>::type`.

(2.1) — If `CF::num == 1` and `CF::den == 1`, returns  
`ToDuration(static_cast<typename ToDuration::rep>(d.count()))`

(2.2) — otherwise, if `CF::num != 1` and `CF::den == 1`, returns  
`ToDuration(static_cast<typename ToDuration::rep>(
static_cast<CR>(d.count()) * static_cast<CR>(CF::num)))`

(2.3) — otherwise, if `CF::num == 1` and `CF::den != 1`, returns  
`ToDuration(static_cast<typename ToDuration::rep>(
static_cast<CR>(d.count()) / static_cast<CR>(CF::den)))`

(2.4) — otherwise, returns

```
ToDuration(static_cast<typename ToDuration::rep>(
 static_cast<CR>(d.count()) * static_cast<CR>(CF::num) / static_cast<CR>(CF::den)))
```

- 3 [Note: This function does not use any implicit conversions; all conversions are done with `static_cast`. It avoids multiplications and divisions when it is known at compile time that one or more arguments is 1. Intermediate computations are carried out in the widest representation and only converted to the destination representation at the final step. — end note]

```
template<class ToDuration, class Rep, class Period>
constexpr ToDuration floor(const duration<Rep, Period>& d);
```

- 4 *Remarks:* This function shall not participate in overload resolution unless `ToDuration` is a specialization of `duration`.

- 5 *Returns:* The greatest result `t` representable in `ToDuration` for which `t <= d`.

```
template<class ToDuration, class Rep, class Period>
constexpr ToDuration ceil(const duration<Rep, Period>& d);
```

- 6 *Remarks:* This function shall not participate in overload resolution unless `ToDuration` is a specialization of `duration`.

- 7 *Returns:* The least result `t` representable in `ToDuration` for which `t >= d`.

```
template<class ToDuration, class Rep, class Period>
constexpr ToDuration round(const duration<Rep, Period>& d);
```

- 8 *Remarks:* This function shall not participate in overload resolution unless `ToDuration` is a specialization of `duration`, and `treat_as_floating_point_v<typename ToDuration::rep>` is `false`.

- 9 *Returns:* The value of `ToDuration` that is closest to `d`. If there are two closest values, then return the value `t` for which `t % 2 == 0`.

#### 24.17.5.8 Suffixes for duration literals

[time.duration.literals]

- 1 This subclause describes literal suffixes for constructing duration literals. The suffixes `h`, `min`, `s`, `ms`, `us`, `ns` denote duration values of the corresponding types `hours`, `minutes`, `seconds`, `milliseconds`, `microseconds`, and `nanoseconds` respectively if they are applied to integral literals.

- 2 If any of these suffixes are applied to a floating-point literal the result is a `chrono::duration` literal with an unspecified floating-point representation.

- 3 If any of these suffixes are applied to an integer literal and the resulting `chrono::duration` value cannot be represented in the result type because of overflow, the program is ill-formed.

- 4 [Example: The following code shows some duration literals.

```
using namespace std::chrono_literals;
auto constexpr aday=24h;
auto constexpr lesson=45min;
auto constexpr halfanhour=0.5h;
```

— end example]

```
constexpr chrono::hours operator""h(unsigned long long hours);
constexpr chrono::duration<unspecified, ratio<3600, 1>> operator""h(long double hours);
```

- 5 *Returns:* A duration literal representing hours hours.

```
constexpr chrono::minutes operator""min(unsigned long long minutes);
constexpr chrono::duration<unspecified, ratio<60, 1>> operator""min(long double minutes);
```

- 6 *Returns:* A duration literal representing minutes minutes.

```
constexpr chrono::seconds operator""s(unsigned long long sec);
constexpr chrono::duration<unspecified> operator""s(long double sec);
```

- 7 *Returns:* A duration literal representing sec seconds.

- 8 [Note: The same suffix `s` is used for `basic_string` but there is no conflict, since duration suffixes apply to numbers and string literal suffixes apply to character array literals. — end note]

```
constexpr chrono::milliseconds operator""ms(unsigned long long msec);
constexpr chrono::duration<unspecified, milli> operator""ms(long double msec);
```

9 *Returns:* A duration literal representing msec milliseconds.

```
constexpr chrono::microseconds operator""us(unsigned long long usec);
constexpr chrono::duration<unspecified, micro> operator""us(long double usec);
```

10 *Returns:* A duration literal representing usec microseconds.

```
constexpr chrono::nanoseconds operator""ns(unsigned long long nsec);
constexpr chrono::duration<unspecified, nano> operator""ns(long double nsec);
```

11 *Returns:* A duration literal representing nsec nanoseconds.

### 24.17.5.9 duration algorithms [time.duration.alg]

```
template<class Rep, class Period>
constexpr duration<Rep, Period> abs(duration<Rep, Period> d);
```

1 *Remarks:* This function shall not participate in overload resolution unless `numeric_limits<Rep>::is_signed` is true.

2 *Returns:* If `d >= d.zero()`, return `d`, otherwise return `-d`.

### 24.17.5.10 duration I/O [time.duration.io]

```
template<class charT, class traits, class Rep, class Period>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const duration<Rep, Period>& d);
```

1 *Requires:* `Rep` is an integral type whose integer conversion rank (6.7.4) is greater than or equal to that of `short`, or a floating point type. `charT` is `char` or `wchar_t`.

2 *Effects:* Forms a `basic_string<charT, traits>` from `d.count()` using `to_string` if `charT` is `char`, or `to_wstring` if `charT` is `wchar_t`. Appends the units suffix described below to the `basic_string`. Inserts the resulting `basic_string` into `os`. [*Note:* This specification ensures that the result of this streaming operation will obey the width and alignment properties of the stream. — *end note*]

3 The units suffix depends on the type `Period::type` as follows:

- (3.1) — If `Period::type` is `atto`, the suffix is "as".
- (3.2) — Otherwise, if `Period::type` is `femto`, the suffix is "fs".
- (3.3) — Otherwise, if `Period::type` is `pico`, the suffix is "ps".
- (3.4) — Otherwise, if `Period::type` is `nano`, the suffix is "ns".
- (3.5) — Otherwise, if `Period::type` is `micro`, the suffix is "µs" ("  b5  0073").
- (3.6) — Otherwise, if `Period::type` is `milli`, the suffix is "ms".
- (3.7) — Otherwise, if `Period::type` is `centi`, the suffix is "cs".
- (3.8) — Otherwise, if `Period::type` is `deci`, the suffix is "ds".
- (3.9) — Otherwise, if `Period::type` is `ratio<1>`, the suffix is "s".
- (3.10) — Otherwise, if `Period::type` is `deca`, the suffix is "das".
- (3.11) — Otherwise, if `Period::type` is `hecto`, the suffix is "hs".
- (3.12) — Otherwise, if `Period::type` is `kilo`, the suffix is "ks".
- (3.13) — Otherwise, if `Period::type` is `mega`, the suffix is "Ms".
- (3.14) — Otherwise, if `Period::type` is `giga`, the suffix is "Gs".
- (3.15) — Otherwise, if `Period::type` is `tera`, the suffix is "Ts".
- (3.16) — Otherwise, if `Period::type` is `peta`, the suffix is "Ps".
- (3.17) — Otherwise, if `Period::type` is `exa`, the suffix is "Es".
- (3.18) — Otherwise, if `Period::type` is `ratio<60>`, the suffix is "min".
- (3.19) — Otherwise, if `Period::type` is `ratio<3600>`, the suffix is "h".

(3.20) — Otherwise, if `Period::type::den == 1`, the suffix is "`[num]s`".

(3.21) — Otherwise, the suffix is "`[num/den]s`".

In the list above the use of `num` and `den` refer to the static data members of `Period::type`, which are converted to arrays of `charT` using a decimal conversion with no leading zeroes.

4 If `Period::type` is `micro`, but the character `U+00B5` cannot be represented in the encoding used for `charT`, the unit suffix "`us`" is used instead of "`µs`".

5 *Returns:* `os`.

```
template<class charT, class traits, class Rep, class Period>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const duration<Rep, Period>& d);
```

6 *Effects:* Streams `d` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11.

7 *Returns:* `os`.

```
template<class charT, class traits, class Rep, class Period, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 duration<Rep, Period>& d,
 basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

8 *Effects:* Attempts to parse the input stream `is` into the duration `d` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse parses everything specified by the parsing format flags without error, and yet none of the flags impacts a duration, `d` will be assigned a zero value. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null.

9 *Returns:* `is`.

## 24.17.6 Class template `time_point`

[`time.point`]

```
namespace std::chrono {
 template<class Clock, class Duration = typename Clock::duration>
 class time_point {
 public:
 using clock = Clock;
 using duration = Duration;
 using rep = typename duration::rep;
 using period = typename duration::period;

 private:
 duration d_; // exposition only

 public:
 // 24.17.6.1, construct
 constexpr time_point(); // has value epoch
 constexpr explicit time_point(const duration& d); // same as time_point() + d
 template<class Duration2>
 constexpr time_point(const time_point<clock, Duration2>& t);

 // 24.17.6.2, observer
 constexpr duration time_since_epoch() const;

 // 24.17.6.3, arithmetic
 constexpr time_point& operator++();
 constexpr time_point operator++(int);
 constexpr time_point& operator--();
 constexpr time_point operator--(int);
 constexpr time_point& operator+=(const duration& d);
```



```

constexpr time_point& operator--=(const duration& d);

// 24.17.6.4, special values
static constexpr time_point min();
static constexpr time_point max();
};
}

```

1 Clock shall either satisfy the *Cpp17Clock* requirements (24.17.3) or be the type `local_t`.

2 If `Duration` is not an instance of `duration`, the program is ill-formed.

#### 24.17.6.1 `time_point` constructors [time.point.cons]

```
constexpr time_point();
```

1 *Effects:* Constructs an object of type `time_point`, initializing `d_` with `duration::zero()`. Such a `time_point` object represents the epoch.

```
constexpr explicit time_point(const duration& d);
```

2 *Effects:* Constructs an object of type `time_point`, initializing `d_` with `d`. Such a `time_point` object represents the epoch + `d`.

```
template<class Duration2>
constexpr time_point(const time_point<clock, Duration2>& t);
```

3 *Remarks:* This constructor shall not participate in overload resolution unless `Duration2` is implicitly convertible to `duration`.

4 *Effects:* Constructs an object of type `time_point`, initializing `d_` with `t.time_since_epoch()`.

#### 24.17.6.2 `time_point` observer [time.point.observer]

```
constexpr duration time_since_epoch() const;
```

1 *Returns:* `d_`.

#### 24.17.6.3 `time_point` arithmetic [time.point.arithmetic]

```
constexpr time_point& operator++();
```

1 *Effects:* `++d_`.

2 *Returns:* `*this`.

```
constexpr time_point operator++(int);
```

3 *Returns:* `time_point{d_++}`.

```
constexpr time_point& operator--();
```

4 *Effects:* `--d_`.

5 *Returns:* `*this`.

```
constexpr time_point operator--(int);
```

6 *Returns:* `time_point{d_--}`.

```
constexpr time_point& operator+=(const duration& d);
```

7 *Effects:* As if by: `d_ += d;`

8 *Returns:* `*this`.

```
constexpr time_point& operator-=(const duration& d);
```

9 *Effects:* As if by: `d_ -= d;`

10 *Returns:* `*this`.

**24.17.6.4 time\_point special values****[time.point.special]**

```
static constexpr time_point min();
```

1 *Returns:* time\_point(duration::min()).

```
static constexpr time_point max();
```

2 *Returns:* time\_point(duration::max()).

**24.17.6.5 time\_point non-member arithmetic****[time.point.nonmember]**

```
template<class Clock, class Duration1, class Rep2, class Period2>
constexpr time_point<Clock, common_type_t<Duration1, duration<Rep2, Period2>>>
operator+(const time_point<Clock, Duration1>& lhs, const duration<Rep2, Period2>& rhs);
```

1 *Returns:* CT(lhs.time\_since\_epoch() + rhs), where CT is the type of the return value.

```
template<class Rep1, class Period1, class Clock, class Duration2>
constexpr time_point<Clock, common_type_t<duration<Rep1, Period1>, Duration2>>
operator+(const duration<Rep1, Period1>& lhs, const time_point<Clock, Duration2>& rhs);
```

2 *Returns:* rhs + lhs.

```
template<class Clock, class Duration1, class Rep2, class Period2>
constexpr time_point<Clock, common_type_t<Duration1, duration<Rep2, Period2>>>
operator-(const time_point<Clock, Duration1>& lhs, const duration<Rep2, Period2>& rhs);
```

3 *Returns:* CT(lhs.time\_since\_epoch() - rhs), where CT is the type of the return value.

```
template<class Clock, class Duration1, class Duration2>
constexpr common_type_t<Duration1, Duration2>
operator-(const time_point<Clock, Duration1>& lhs, const time_point<Clock, Duration2>& rhs);
```

4 *Returns:* lhs.time\_since\_epoch() - rhs.time\_since\_epoch().

**24.17.6.6 time\_point comparisons****[time.point.comparisons]**

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator==(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

1 *Returns:* lhs.time\_since\_epoch() == rhs.time\_since\_epoch().

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator!=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

2 *Returns:* !(lhs == rhs).

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator<(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

3 *Returns:* lhs.time\_since\_epoch() < rhs.time\_since\_epoch().

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator>(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

4 *Returns:* rhs < lhs.

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator<=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

5 *Returns:* !(rhs < lhs).

```
template<class Clock, class Duration1, class Duration2>
constexpr bool operator>=(const time_point<Clock, Duration1>& lhs,
 const time_point<Clock, Duration2>& rhs);
```

6 *Returns:* !(lhs < rhs).

**24.17.6.7 time\_point\_cast** [time.point.cast]

```
template<class ToDuration, class Clock, class Duration>
constexpr time_point<Clock, ToDuration> time_point_cast(const time_point<Clock, Duration>& t);
```

1 *Remarks:* This function shall not participate in overload resolution unless ToDuration is a specialization of duration.

2 *Returns:*

```
time_point<Clock, ToDuration>(duration_cast<ToDuration>(t.time_since_epoch()))
```

```
template<class ToDuration, class Clock, class Duration>
constexpr time_point<Clock, ToDuration> floor(const time_point<Clock, Duration>& tp);
```

3 *Remarks:* This function shall not participate in overload resolution unless ToDuration is a specialization of duration.

4 *Returns:* time\_point<Clock, ToDuration>(floor<ToDuration>(tp.time\_since\_epoch())).

```
template<class ToDuration, class Clock, class Duration>
constexpr time_point<Clock, ToDuration> ceil(const time_point<Clock, Duration>& tp);
```

5 *Remarks:* This function shall not participate in overload resolution unless ToDuration is a specialization of duration.

6 *Returns:* time\_point<Clock, ToDuration>(ceil<ToDuration>(tp.time\_since\_epoch())).

```
template<class ToDuration, class Clock, class Duration>
constexpr time_point<Clock, ToDuration> round(const time_point<Clock, Duration>& tp);
```

7 *Remarks:* This function shall not participate in overload resolution unless ToDuration is a specialization of duration, and treat\_as\_floating\_point\_v<typename ToDuration::rep> is false.

8 *Returns:* time\_point<Clock, ToDuration>(round<ToDuration>(tp.time\_since\_epoch())).

**24.17.7 Clocks** [time.clock]

1 The types defined in this subclause shall satisfy the *Cpp17TrivialClock* requirements (24.17.3) unless otherwise specified.

**24.17.7.1 Class system\_clock** [time.clock.system]**24.17.7.1.1 Overview** [time.clock.system.overview]

```
namespace std::chrono {
class system_clock {
public:
using rep = see below;
using period = ratio<unspecified, unspecified>;
using duration = chrono::duration<rep, period>;
using time_point = chrono::time_point<system_clock>;
static constexpr bool is_steady = unspecified;

static time_point now() noexcept;

// mapping to/from C type time_t
static time_t to_time_t (const time_point& t) noexcept;
static time_point from_time_t(time_t t) noexcept;
};
}
```

1 Objects of type system\_clock represent wall clock time from the system-wide realtime clock. Objects of type sys\_time<Duration> measure time since (and before) 1970-01-01 00:00:00 UTC excluding leap seconds. This measure is commonly referred to as *Unix time*. This measure facilitates an efficient mapping between sys\_time and calendar types (24.17.8). [Example:

```
sys_seconds{sys_days{1970y/January/1}}.time_since_epoch() is 0s.
```

```
sys_seconds{sys_days{2000y/January/1}}.time_since_epoch() is 946'684'800s, which is 10'957 * 86'400s.
```

— end example]

## 24.17.7.1.2 Members

[time.clock.system.members]

```
using system_clock::rep = unspecified;
```

- 1 *Requires:* `system_clock::duration::min() < system_clock::duration::zero()` shall be true.  
 [Note: This implies that `rep` is a signed type. — end note]

```
static time_t to_time_t(const time_point& t) noexcept;
```

- 2 *Returns:* A `time_t` object that represents the same point in time as `t` when both values are restricted to the coarser of the precisions of `time_t` and `time_point`. It is implementation-defined whether values are rounded or truncated to the required precision.

```
static time_point from_time_t(time_t t) noexcept;
```

- 3 *Returns:* A `time_point` object that represents the same point in time as `t` when both values are restricted to the coarser of the precisions of `time_t` and `time_point`. It is implementation-defined whether values are rounded or truncated to the required precision.

## 24.17.7.1.3 Non-member functions

[time.clock.system.nonmembers]

```
template<class charT, class traits, class Duration>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const sys_time<Duration>& tp);
```

- 1 *Remarks:* This operator shall not participate in overload resolution if `treat_as_floating_point_v<typename Duration::rep>` is true, or if `Duration{1} >= days{1}`.

- 2 *Effects:*

```
auto const dp = floor<days>(tp);
os << year_month_day{dp} << ' ' << time_of_day{tp-dp};
```

- 3 *Returns:* `os`.

- 4 [Example:

```
cout << sys_seconds{0s} << '\n'; // 1970-01-01 00:00:00
cout << sys_seconds{946'684'800s} << '\n'; // 2000-01-01 00:00:00
cout << sys_seconds{946'688'523s} << '\n'; // 2000-01-01 01:02:03
```

— end example]

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const sys_days& dp);
```

- 5 *Effects:* `os << year_month_day{dp}`.

- 6 *Returns:* `os`.

```
template<class charT, class traits, class Duration>
```

```
basic_ostream<charT, traits>&
```

```
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const sys_time<Duration>& tp);
```

- 7 *Effects:* Streams `tp` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11. If `%Z` is used, it will be replaced with "UTC" widened to `charT`. If `%z` is used (or a modified variant of `%z`), an offset of `Omin` will be formatted.

- 8 *Returns:* `os`.

```
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
```

```
basic_istream<charT, traits>&
```

```
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 sys_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

- 9 *Effects:* Attempts to parse the input stream `is` into the `sys_time` `tp` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid date, `is.setstate(ios_base::failbit)` shall be called and `tp` shall not be modified. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null. Additionally,

the parsed offset will be subtracted from the successfully parsed timestamp prior to assigning that difference to `tp`.

10 *Returns:* is.

### 24.17.7.2 Class `utc_clock` [time.clock.utc]

#### 24.17.7.2.1 Overview [time.clock.utc.overview]

```
namespace std::chrono {
 class utc_clock {
 public:
 using rep = a signed arithmetic type;
 using period = ratio<unspecified, unspecified>;
 using duration = chrono::duration<rep, period>;
 using time_point = chrono::time_point<utc_clock>;
 static constexpr bool is_steady = unspecified;

 static time_point now();

 template<class Duration>
 static sys_time<common_type_t<Duration, seconds>>
 to_sys(const utc_time<Duration>& t);
 template<class Duration>
 static utc_time<common_type_t<Duration, seconds>>
 from_sys(const sys_time<Duration>& t);
 };
}
```

<sup>1</sup> In contrast to `sys_time`, which does not take leap seconds into account, `utc_clock` and its associated `time_point`, `utc_time`, count time, including leap seconds, since 1970-01-01 00:00:00 UTC. [Example: `clock_cast<utc_clock>(sys_seconds{sys_days{1970y/January/1}}).time_since_epoch()` is 0s. `clock_cast<utc_clock>(sys_seconds{sys_days{2000y/January/1}}).time_since_epoch()` is 946'684'822s, which is 10'957 \* 86'400s + 22s. — end example]

<sup>2</sup> `utc_clock` is not a *Cpp17TrivialClock* unless the implementation can guarantee that `utc_clock::now()` does not propagate an exception. [Note: `noexcept(from_sys(system_clock::now()))` is false. — end note]

#### 24.17.7.2.2 Member functions [time.clock.utc.members]

```
static time_point now();
```

<sup>1</sup> *Returns:* `from_sys(system_clock::now())`, or a more accurate value of `utc_time`.

```
template<typename Duration>
 static sys_time<common_type_t<Duration, seconds>>
 to_sys(const utc_time<Duration>& u);
```

<sup>2</sup> *Returns:* A `sys_time` `t`, such that `from_sys(t) == u` if such a mapping exists. Otherwise `u` represents a `time_point` during a leap second insertion and the last representable value of `sys_time` prior to the insertion of the leap second is returned.

```
template<typename Duration>
 static utc_time<common_type_t<Duration, seconds>>
 from_sys(const sys_time<Duration>& t);
```

<sup>3</sup> *Returns:* A `utc_time` `u`, such that `u.time_since_epoch() - t.time_since_epoch()` is equal to the number of leap seconds that were inserted between `t` and 1970-01-01. If `t` is exactly the date of leap second insertion, then the conversion counts that leap second as inserted.

[Example:

```
 auto t = sys_days{July/1/2015} - 2ns;
 auto u = utc_clock::from_sys(t);
 assert(u.time_since_epoch() - t.time_since_epoch() == 25s);
 t += 1ns;
 u = utc_clock::from_sys(t);
```

```

 assert(u.time_since_epoch() - t.time_since_epoch() == 25s);
 t += 1ns;
 u = utc_clock::from_sys(t);
 assert(u.time_since_epoch() - t.time_since_epoch() == 26s);
 t += 1ns;
 u = utc_clock::from_sys(t);
 assert(u.time_since_epoch() - t.time_since_epoch() == 26s);
— end example]

```

### 24.17.7.2.3 Non-member functions

[time.clock.utc.nonmembers]

```

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const utc_time<Duration>& t);

```

1 *Effects:* Calls to\_stream(os, fmt, t), where fmt is a string containing "%F %T" widened to charT.

2 *Returns:* os.

```

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const utc_time<Duration>& tp);

```

3 *Effects:* Streams tp into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11. If %Z is used, it will be replaced with "UTC" widened to charT. If %z is used (or a modified variant of %z), an offset of 0min will be formatted. If tp represents a time during a leap second insertion, and if a seconds field is formatted, the integral portion of that format shall be "60" widened to charT.

4 *Returns:* os.

5 *[Example:*

```

 auto t = sys_days{July/1/2015} - 500ms;
 auto u = clock_cast<utc_clock>(t);
 for (auto i = 0; i < 8; ++i, u += 250ms)
 cout << u << " UTC\n";

```

Produces this output:

```

2015-06-30 23:59:59.500 UTC
2015-06-30 23:59:59.750 UTC
2015-06-30 23:59:60.000 UTC
2015-06-30 23:59:60.250 UTC
2015-06-30 23:59:60.500 UTC
2015-06-30 23:59:60.750 UTC
2015-07-01 00:00:00.000 UTC
2015-07-01 00:00:00.250 UTC

```

— end example]

```

template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 utc_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

```

6 *Effects:* Attempts to parse the input stream is into the utc\_time tp using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid date, is.setstate(ios\_base::failbit) shall be called and tp shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null. Additionally, the parsed offset will be subtracted from the successfully parsed timestamp prior to assigning that difference to tp.

7 *Returns:* is.

**24.17.7.3 Class tai\_clock**

[time.clock.tai]

**24.17.7.3.1 Overview**

[time.clock.tai.overview]

```

namespace std::chrono {
 class tai_clock {
 public:
 using rep = a signed arithmetic type;
 using period = ratio<unspecified, unspecified>;
 using duration = chrono::duration<rep, period>;
 using time_point = chrono::time_point<tai_clock>;
 static constexpr bool is_steady = unspecified;

 static time_point now();

 template<class Duration>
 static utc_time<common_type_t<Duration, seconds>>
 to_utc(const tai_time<Duration>&) noexcept;
 template<class Duration>
 static tai_time<common_type_t<Duration, seconds>>
 from_utc(const utc_time<Duration>&) noexcept;
 };
}

```

<sup>1</sup> The clock `tai_clock` measures seconds since 1958-01-01 00:00:00 and is offset 10s ahead of UTC at this date. That is, 1958-01-01 00:00:00 TAI is equivalent to 1957-12-31 23:59:50 UTC. Leap seconds are not inserted into TAI. Therefore every time a leap second is inserted into UTC, UTC falls another second behind TAI. For example by 2000-01-01 there had been 22 leap seconds inserted so 2000-01-01 00:00:00 UTC is equivalent to 2000-01-01 00:00:32 TAI (22s plus the initial 10s offset).

<sup>2</sup> `tai_clock` is not a *Cpp17TrivialClock* unless the implementation can guarantee that `tai_clock::now()` does not propagate an exception. [Note: `noexcept(from_utc(utc_clock::now()))` is false. — end note]

**24.17.7.3.2 Member functions**

[time.clock.tai.members]

```
static time_point now();
```

<sup>1</sup> *Returns:* `from_utc(utc_clock::now())`, or a more accurate value of `tai_time`.

```

template<class Duration>
 static utc_time<common_type_t<Duration, seconds>>
 to_utc(const tai_time<Duration>& t) noexcept;

```

<sup>2</sup> *Returns:*

```
 utc_time<common_type_t<Duration, seconds>>{t.time_since_epoch()} - 378691210s
```

[Note:

```
 378691210s == sys_days{1970y/January/1} - sys_days{1958y/January/1} + 10s
```

— end note]

```

template<class Duration>
 static tai_time<common_type_t<Duration, seconds>>
 from_utc(const utc_time<Duration>& t) noexcept;

```

<sup>3</sup> *Returns:*

```
 tai_time<common_type_t<Duration, seconds>>{t.time_since_epoch()} + 378691210s
```

[Note:

```
 378691210s == sys_days{1970y/January/1} - sys_days{1958y/January/1} + 10s
```

— end note]

**24.17.7.3.3 Non-member functions**

[time.clock.tai.nonmembers]

```

template<class charT, class traits, class Duration>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const tai_time<Duration>& t);

```

<sup>1</sup> *Effects:* Calls to `_stream(os, fmt, t)`, where `fmt` is a string containing "%F %T" widened to `charT`.

2 *Returns:* os.

```
template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const tai_time<Duration>& tp);
```

3 *Effects:* Streams tp into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11. If %Z is used, it will be replaced with "TAI". If %z is used (or a modified variant of %z), an offset of 0min will be formatted. The date and time formatted shall be equivalent to that formatted by a sys\_time initialized with:

```
sys_time<Duration>{tp.time_since_epoch()} -
(sys_days{1970y/January/1} - sys_days{1958y/January/1})
```

4 *Returns:* os.

5 [Example:

```
auto st = sys_days{2000y/January/1};
auto tt = clock_cast<tai_clock>(st);
cout << format("%F %T %Z == ", st) << format("%F %T %Z\n", tt);
```

Produces this output:

```
2000-01-01 00:00:00 UTC == 2000-01-01 00:00:32 TAI
```

— end example]

```
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
basic_istream<charT, traits>&
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 tai_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

6 *Effects:* Attempts to parse the input stream is into the tai\_time tp using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid date, is.setstate(ios\_base::failbit) shall be called and tp shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null. Additionally, the parsed offset will be subtracted from the successfully parsed timestamp prior to assigning that difference to tp.

7 *Returns:* is.

#### 24.17.7.4 Class gps\_clock

[time.clock.gps]

##### 24.17.7.4.1 Overview

[time.clock.gps.overview]

```
namespace std::chrono {
class gps_clock {
public:
using rep = a signed arithmetic type;
using period = ratio<unspecified, unspecified>;
using duration = chrono::duration<rep, period>;
using time_point = chrono::time_point<gps_clock>;
static constexpr bool is_steady = unspecified;

static time_point now();

template<class Duration>
static utc_time<common_type_t<Duration, seconds>>
to_utc(const gps_time<Duration>&) noexcept;
template<class Duration>
static gps_time<common_type_t<Duration, seconds>>
from_utc(const utc_time<Duration>&) noexcept;
};
}
```

1 The clock gps\_clock measures seconds since the first Sunday of January, 1980 00:00:00 UTC. Leap seconds are not inserted into GPS. Therefore every time a leap second is inserted into UTC, UTC falls another second behind GPS. Aside from the offset from 1958y/January/1 to 1980y/January/Sunday[1], GPS is behind



TAI by 19s due to the 10s offset between 1958 and 1970 and the additional 9 leap seconds inserted between 1970 and 1980.

- <sup>2</sup> `gps_clock` is not a *Cpp17TrivialClock* unless the implementation can guarantee that `gps_clock::now()` does not propagate an exception. [Note: `noexcept(from_utc(utc_clock::now()))` is false. — end note]

#### 24.17.7.4.2 Member functions [time.clock.gps.members]

```
static time_point now();
```

- <sup>1</sup> *Returns:* `from_utc(utc_clock::now())`, or a more accurate value of `gps_time`.

```
template<class Duration>
static utc_time<common_type_t<Duration, seconds>>
to_utc(const gps_time<Duration>& t) noexcept;
```

- <sup>2</sup> *Returns:*

```
gps_time<common_type_t<Duration, seconds>>{t.time_since_epoch()} + 315964809s
```

[Note:

```
315964809s == sys_days{1980y/January/Sunday[1]} - sys_days{1970y/January/1} + 9s
```

— end note]

```
template<class Duration>
static gps_time<common_type_t<Duration, seconds>>
from_utc(const utc_time<Duration>& t) noexcept;
```

- <sup>3</sup> *Returns:*

```
gps_time<common_type_t<Duration, seconds>>{t.time_since_epoch()} - 315964809s
```

[Note:

```
315964809s == sys_days{1980y/January/Sunday[1]} - sys_days{1970y/January/1} + 9s
```

— end note]

#### 24.17.7.4.3 Non-member functions [time.clock.gps.nonmembers]

```
template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const gps_time<Duration>& t);
```

- <sup>1</sup> *Effects:* Calls `to_stream(os, fmt, t)`, where `fmt` is a string containing "%F %T" widened to `charT`.

- <sup>2</sup> *Returns:* `os`.

```
template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const gps_time<Duration>& tp);
```

- <sup>3</sup> *Effects:* Streams `tp` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11. If %Z is used, it will be replaced with "GPS". If %z is used (or a modified variant of %z), an offset of `Omin` will be formatted. The date and time formatted shall be equivalent to that formatted by a `sys_time` initialized with:

```
sys_time<Duration>{tp.time_since_epoch()} +
(sys_days{1980y/January/Sunday[1]} - sys_days{1970y/January/1})
```

- <sup>4</sup> *Returns:* `os`.

- <sup>5</sup> [Example:

```
auto st = sys_days{2000y/January/1};
auto gt = clock_cast<gps_clock>(st);
cout << format("%F %T %Z == ", st) << format("%F %T %Z\n", gt);
```

Produces this output:

```
2000-01-01 00:00:00 UTC == 2000-01-01 00:00:13 GPS
```

— end example]

```
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
basic_istream<charT, traits>&
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 gps_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

- 6 *Effects:* Attempts to parse the input stream `is` into the `gps_time` `tp` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid date, `is.setstate(ios_base::failbit)` shall be called and `tp` shall not be modified. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null. Additionally, the parsed offset will be subtracted from the successfully parsed timestamp prior to assigning that difference to `tp`.

- 7 *Returns:* `is`.

### 24.17.7.5 Class `file_clock`

[time.clock.file]

#### 24.17.7.5.1 Overview

[time.clock.file.overview]

```
namespace std::chrono {
class file_clock {
public:
 using rep = a signed arithmetic type;
 using period = ratio<unspecified, unspecified>;
 using duration = chrono::duration<rep, period>;
 using time_point = chrono::time_point<file_clock>;
 static constexpr bool is_steady = unspecified;

 static time_point now() noexcept;

 // Conversion functions, see below
};
}
```

- 1 The clock `file_clock` is used to create the `time_point` system used for `file_time_type` (31.11). Its epoch is unspecified.

#### 24.17.7.5.2 Member functions

[time.clock.file.members]

```
static time_point now();
```

- 1 *Returns:* A `file_clock::time_point` indicating the current time.
- 2 The class `file_clock` shall provide precisely one of the following two sets of static member functions:

```
template<class Duration>
static sys_time<see below>
to_sys(const file_time<Duration>&);
template<class Duration>
static file_time<see below>
from_sys(const sys_time<Duration>&);
```

OR:

```
template<class Duration>
static utc_time<see below>
to_utc(const file_time<Duration>&);
template<class Duration>
static file_time<see below>
from_utc(const utc_time<Duration>&);
```

These member functions shall provide `time_point` conversions consistent with those specified by `utc_clock`, `tai_clock`, and `gps_clock`. The `Duration` of the resultant `time_point` is computed from the `Duration` of the input `time_point`.

## 24.17.7.5.3 Non-member functions

[time.clock.file.nonmembers]

```
template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const file_time<Duration>& t);
```

1 *Effects:* Calls `to_stream(os, fmt, t)`, where `fmt` is a string containing "%F %T" widened to `charT`.

2 *Returns:* `os`.

```
template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const file_time<Duration>& tp);
```

3 *Effects:* Streams `tp` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11. If %Z is used, it will be replaced with "UTC" widened to `charT`. If %z is used (or a modified variant of %z), an offset of `Omin` will be formatted. The date and time formatted shall be equivalent to that formatted by a `sys_time` initialized with `clock_cast<system_clock>(tp)`, or by a `utc_time` initialized with `clock_cast<utc_clock>(tp)`.

4 *Returns:* `os`.

```
template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
basic_istream<charT, traits>&
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 file_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

5 *Effects:* Attempts to parse the input stream `is` into the `file_time` `tp` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid date, `is.setstate(ios_base::failbit)` shall be called and `tp` shall not be modified. If %Z is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null. Additionally, the parsed offset will be subtracted from the successfully parsed timestamp prior to assigning that difference to `tp`.

6 *Returns:* `is`.

24.17.7.6 Class `steady_clock`

[time.clock.steady]

```
namespace std::chrono {
class steady_clock {
public:
 using rep = unspecified;
 using period = ratio<unspecified, unspecified>;
 using duration = chrono::duration<rep, period>;
 using time_point = chrono::time_point<unspecified, duration>;
 static constexpr bool is_steady = true;

 static time_point now() noexcept;
};
}
```

1 Objects of class `steady_clock` represent clocks for which values of `time_point` never decrease as physical time advances and for which values of `time_point` advance at a steady rate relative to real time. That is, the clock may not be adjusted.

24.17.7.7 Class `high_resolution_clock`

[time.clock.hires]

```
namespace std::chrono {
class high_resolution_clock {
public:
 using rep = unspecified;
 using period = ratio<unspecified, unspecified>;
 using duration = chrono::duration<rep, period>;
 using time_point = chrono::time_point<unspecified, duration>;
 static constexpr bool is_steady = unspecified;
};
}
```

```

 static time_point now() noexcept;
};
}

```

- 1 Objects of class `high_resolution_clock` represent clocks with the shortest tick period. `high_resolution_clock` may be a synonym for `system_clock` or `steady_clock`.

### 24.17.7.8 Local time

[time.clock.local]

- 1 The family of time points denoted by `local_time<Duration>` are based on the pseudo clock `local_t`. `local_t` has no member `now()` and thus does not meet the clock requirements. Nevertheless `local_time<Duration>` serves the vital role of representing local time with respect to a not-yet-specified time zone. Aside from being able to get the current time, the complete `time_point` algebra is available for `local_time<Duration>` (just as for `sys_time<Duration>`).

```

template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const local_time<Duration>& lt);

```

- 2 *Effects:*

```
os << sys_time<Duration>{lt.time_since_epoch()};
```

- 3 *Returns:* `os`.

```

template<class charT, class traits, class Duration>
basic_ostream<charT, traits>&
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const local_time<Duration>& tp,
 const string* abbrev = nullptr, const seconds* offset_sec = nullptr);

```

- 4 *Effects:* Streams `tp` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11. If `%Z` is used, it will be replaced with `*abbrev` if `abbrev` is not equal to `nullptr`. If `abbrev` is equal to `nullptr` (and `%Z` is used), `os.setstate(ios_base::failbit)` shall be called. If `%z` is used (or a modified variant of `%z`), it will be formatted with the value of `*offset_sec` if `offset_sec` is not equal to `nullptr`. If `%z` (or a modified variant of `%z`) is used, and `offset_sec` is equal to `nullptr`, then `os.setstate(ios_base::failbit)` shall be called.

- 5 *Returns:* `os`.

```

template<class charT, class traits, class Duration, class Alloc = allocator<charT>>
basic_istream<charT, traits>&
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 local_time<Duration>& tp, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);

```

- 6 *Effects:* Attempts to parse the input stream `is` into the `local_time` `tp` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid date, `is.setstate(ios_base::failbit)` shall be called and `tp` shall not be modified. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null.

- 7 *Returns:* `is`.

### 24.17.7.9 time\_point conversions

[time.clock.cast]

#### 24.17.7.9.1 Class template `clock_time_conversion`

[time.clock.conv]

```

namespace std::chrono {
 template<class DestClock, class SourceClock>
 struct clock_time_conversion {};
}

```

- 1 `clock_time_conversion` serves as a trait which can be used to specify how to convert a source `time_point` of type `time_point<SourceClock, Duration>` to a destination `time_point` of type `time_point<DestClock, Duration>` via a specialization: `clock_time_conversion<DestClock, SourceClock>`. A specialization of `clock_time_conversion<DestClock, SourceClock>` shall provide a const-qualified operator() that takes a parameter of type `time_point<SourceClock, Duration>` and returns a `time_point<DestClock, OtherDuration>` representing an equivalent point in time. `OtherDuration` is a `chrono::duration` whose

specialization is computed from the input `Duration` in a manner which can vary for each `clock_time_conversion` specialization. A program may specialize `clock_time_conversion` if at least one of the template parameters is a user-defined clock type.

- <sup>2</sup> Several specializations are provided by the implementation, as described in [24.17.7.9.2](#), [24.17.7.9.3](#), [24.17.7.9.4](#), and [24.17.7.9.5](#).

### 24.17.7.9.2 Identity conversions

[time.clock.cast.id]

```
template<typename Clock>
struct clock_time_conversion<Clock, Clock> {
 template<class Duration>
 time_point<Clock, Duration>
 operator()(const time_point<Clock, Duration>& t) const;
};
```

```
template<class Duration>
time_point<Clock, Duration>
operator()(const time_point<Clock, Duration>& t) const;
```

- <sup>1</sup> *Returns:* t.

```
template<>
struct clock_time_conversion<system_clock, system_clock> {
 template<class Duration>
 sys_time<Duration>
 operator()(const sys_time<Duration>& t) const;
};
```

```
template<class Duration>
sys_time<Duration>
operator()(const sys_time<Duration>& t) const;
```

- <sup>2</sup> *Returns:* t.

```
template<>
struct clock_time_conversion<utc_clock, utc_clock> {
 template<class Duration>
 utc_time<Duration>
 operator()(const utc_time<Duration>& t) const;
};
```

```
template<class Duration>
utc_time<Duration>
operator()(const utc_time<Duration>& t) const;
```

- <sup>3</sup> *Returns:* t.

### 24.17.7.9.3 Conversions between `system_clock` and `utc_clock`

[time.clock.cast.sys.utc]

```
template<>
struct clock_time_conversion<utc_clock, system_clock> {
 template<class Duration>
 utc_time<common_type_t<Duration, seconds>>
 operator()(const sys_time<Duration>& t) const;
};
```

```
template<class Duration>
utc_time<common_type_t<Duration, seconds>>
operator()(const sys_time<Duration>& t) const;
```

- <sup>1</sup> *Returns:* `utc_clock::from_sys(t)`.

```
template<>
struct clock_time_conversion<system_clock, utc_clock> {
 template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 operator()(const utc_time<Duration>& t) const;
};
```

```
template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 operator()(const utc_time<Duration>& t) const;
```

2 *Returns:* utc\_clock::to\_sys(t).

#### 24.17.7.9.4 Conversions between system\_clock and other clocks [time.clock.cast.sys]

```
template<class SourceClock>
struct clock_time_conversion<system_clock, SourceClock> {
 template<class Duration>
 auto operator()(const time_point<SourceClock, Duration>& t) const
 -> decltype(SourceClock::to_sys(t));
};
```

```
template<class Duration>
 auto operator()(const time_point<SourceClock, Duration>& t) const
 -> decltype(SourceClock::to_sys(t));
```

1 *Remarks:* This function does not participate in overload resolution unless SourceClock::to\_sys(t) is well-formed. If SourceClock::to\_sys(t) does not return sys\_time<Duration>, where Duration is a valid chrono::duration specialization, the program is ill-formed.

2 *Returns:* SourceClock::to\_sys(t).

```
template<class DestClock>
struct clock_time_conversion<DestClock, system_clock> {
 template<class Duration>
 auto operator()(const sys_time<Duration>& t) const
 -> decltype(DestClock::from_sys(t));
};
```

```
template<class Duration>
 auto operator()(const sys_time<Duration>& t) const
 -> decltype(DestClock::from_sys(t));
```

3 *Remarks:* This function does not participate in overload resolution unless DestClock::from\_sys(t) is well-formed. If DestClock::from\_sys(t) does not return time\_point<DestClock, Duration>, where Duration is a valid chrono::duration specialization, the program is ill-formed.

4 *Returns:* DestClock::from\_sys(t).

#### 24.17.7.9.5 Conversions between utc\_clock and other clocks [time.clock.cast.utc]

```
template<class SourceClock>
struct clock_time_conversion<utc_clock, SourceClock> {
 template<class Duration>
 auto operator()(const time_point<SourceClock, Duration>& t) const
 -> decltype(SourceClock::to_utc(t));
};
```

```
template<class Duration>
 auto operator()(const time_point<SourceClock, Duration>& t) const
 -> decltype(SourceClock::to_utc(t));
```

1 *Remarks:* This function does not participate in overload resolution unless SourceClock::to\_utc(t) is well-formed. If SourceClock::to\_utc(t) does not return utc\_time<Duration>, where Duration is a valid chrono::duration specialization, the program is ill-formed.

2 *Returns:* SourceClock::to\_utc(t).

```
template<class DestClock>
struct clock_time_conversion<DestClock, utc_clock> {
 template<class Duration>
 auto operator()(const utc_time<Duration>& t) const
 -> decltype(DestClock::from_utc(t));
};
```

```
template<class Duration>
 auto operator()(const utc_time<Duration>& t) const
 -> decltype(DestClock::from_utc(t));
```

3 *Remarks:* This function does not participate in overload resolution unless `DestClock::from_utc(t)` is well-formed. If `DestClock::from_utc(t)` does not return `time_point<DestClock, Duration>`, where `Duration` is a valid `chrono::duration` specialization, the program is ill-formed.

4 *Returns:* `DestClock::from_utc(t)`.

#### 24.17.7.9.6 Function template `clock_cast` [time.clock.cast.fn]

```
template<class DestClock, class SourceClock, class Duration>
 auto clock_cast(const time_point<SourceClock, Duration>& t);
```

1 *Remarks:* This function does not participate in overload resolution unless at least one of the following clock time conversion expressions is well-formed:

- (1.1) — `clock_time_conversion<DestClock, SourceClock>{}(t)`
- (1.2) — `clock_time_conversion<DestClock, system_clock>{}(clock_time_conversion<system_clock, SourceClock>{}(t))`
- (1.3) — `clock_time_conversion<DestClock, utc_clock>{}(clock_time_conversion<utc_clock, SourceClock>{}(t))`
- (1.4) — `clock_time_conversion<DestClock, utc_clock>{}(clock_time_conversion<utc_clock, system_clock>{}(clock_time_conversion<system_clock, SourceClock>{}(t)))`
- (1.5) — `clock_time_conversion<DestClock, system_clock>{}(clock_time_conversion<system_clock, utc_clock>{}(clock_time_conversion<utc_clock, SourceClock>{}(t)))`

A clock time conversion expression is considered better than another clock time conversion expression if it involves fewer `operator()` calls on `clock_time_conversion` specializations. If, among the well-formed clock time conversion expressions from the above list, there is not a unique best expression, the `clock_cast` is ambiguous and the program is ill-formed.

2 *Returns:* The best well-formed clock time conversion expression in the above list.

### 24.17.8 The civil calendar [time.cal]

#### 24.17.8.1 In general [time.cal.general]

1 The types in 24.17.8 describe the civil (Gregorian) calendar and its relationship to `sys_days` and `local_days`.

#### 24.17.8.2 Class `last_spec` [time.cal.last]

```
namespace std::chrono {
 struct last_spec {
 explicit last_spec() = default;
 };
}
```

1 The type `last_spec` is used in conjunction with other calendar types to specify the last in a sequence. For example, depending on context, it can represent the last day of a month, or the last day of the week of a month.

#### 24.17.8.3 Class `day` [time.cal.day]

##### 24.17.8.3.1 Overview [time.cal.day.overview]

```
namespace std::chrono {
 class day {
 unsigned char d_; // exposition only
 public:
 day() = default;
 explicit constexpr day(unsigned d) noexcept;
```

```

constexpr day& operator++() noexcept;
constexpr day operator++(int) noexcept;
constexpr day& operator--() noexcept;
constexpr day operator--(int) noexcept;

constexpr day& operator+=(const days& d) noexcept;
constexpr day& operator-=(const days& d) noexcept;

explicit constexpr operator unsigned() const noexcept;
constexpr bool ok() const noexcept;
};
}

```

<sup>1</sup> `day` represents a day of a month. It normally holds values in the range 1 to 31, but may hold non-negative values outside this range. It can be constructed with any `unsigned` value, which will be subsequently truncated to fit into `day`'s unspecified internal storage. `day` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23), and participates in basic arithmetic with `days` objects, which represent a difference between two `day` objects.

<sup>2</sup> `day` is a trivially copyable and standard-layout class type.

### 24.17.8.3.2 Member functions

[time.cal.day.members]

```
explicit constexpr day(unsigned d) noexcept;
```

<sup>1</sup> *Effects:* Constructs an object of type `day` by initializing `d_` with `d`. The value held is unspecified if `d` is not in the range `[0, 255]`.

```
constexpr day& operator++() noexcept;
```

<sup>2</sup> *Effects:* `++d_`.

<sup>3</sup> *Returns:* `*this`.

```
constexpr day operator++(int) noexcept;
```

<sup>4</sup> *Effects:* `++(*this)`.

<sup>5</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr day& operator--() noexcept;
```

<sup>6</sup> *Effects:* `--d_`.

<sup>7</sup> *Returns:* `*this`.

```
constexpr day operator--(int) noexcept;
```

<sup>8</sup> *Effects:* `--(*this)`.

<sup>9</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr day& operator+=(const days& d) noexcept;
```

<sup>10</sup> *Effects:* `*this = *this + d`.

<sup>11</sup> *Returns:* `*this`.

```
constexpr day& operator-=(const days& d) noexcept;
```

<sup>12</sup> *Effects:* `*this = *this - d`.

<sup>13</sup> *Returns:* `*this`.

```
explicit constexpr operator unsigned() const noexcept;
```

<sup>14</sup> *Returns:* `d_`.

```
constexpr bool ok() const noexcept;
```

<sup>15</sup> *Returns:* `1 <= d_ && d_ <= 31`.



**24.17.8.3.3 Non-member functions**

[time.cal.day.nonmembers]

```
constexpr bool operator==(const day& x, const day& y) noexcept;
```

1 *Returns:* unsigned{x} == unsigned{y}.

```
constexpr bool operator<(const day& x, const day& y) noexcept;
```

2 *Returns:* unsigned{x} < unsigned{y}.

```
constexpr day operator+(const day& x, const days& y) noexcept;
```

3 *Returns:* day(unsigned{x} + y.count()).

```
constexpr day operator+(const days& x, const day& y) noexcept;
```

4 *Returns:* y + x.

```
constexpr day operator-(const day& x, const days& y) noexcept;
```

5 *Returns:* x + -y.

```
constexpr days operator-(const day& x, const day& y) noexcept;
```

6 *Returns:* days{int(unsigned{x}) - int(unsigned{y})}.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const day& d);
```

7 *Effects:* Inserts format(fmt, d) where fmt is "%d" widened to charT. If !d.ok(), appends with " is not a valid day".

8 *Returns:* os.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const day& d);
```

9 *Effects:* Streams d into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11.

10 *Returns:* os.

```
template<class charT, class traits, class Alloc = allocator<charT>>
```

```
basic_istream<charT, traits>&
```

```
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
```

```
day& d, basic_string<charT, traits, Alloc>* abbrev = nullptr,
```

```
minutes* offset = nullptr);
```

11 *Effects:* Attempts to parse the input stream is into the day d using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid day, is.setstate(ios\_base::failbit) shall be called and d shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null.

12 *Returns:* is.

```
constexpr day operator""d(unsigned long long d) noexcept;
```

13 *Returns:* day{static\_cast<unsigned>(d)}.

**24.17.8.4 Class month**

[time.cal.month]

**24.17.8.4.1 Overview**

[time.cal.month.overview]

```
namespace std::chrono {
```

```
class month {
```

```
 unsigned char m_; // exposition only
```

```
public:
```

```
 month() = default;
```

```
 explicit constexpr month(unsigned m) noexcept;
```

```

 constexpr month& operator++() noexcept;
 constexpr month operator++(int) noexcept;
 constexpr month& operator--() noexcept;
 constexpr month operator--(int) noexcept;

 constexpr month& operator+=(const months& m) noexcept;
 constexpr month& operator-=(const months& m) noexcept;

 explicit constexpr operator unsigned() const noexcept;
 constexpr bool ok() const noexcept;
};
}

```

<sup>1</sup> `month` represents a month of a year. It normally holds values in the range 1 to 12, but may hold non-negative values outside this range. It can be constructed with any `unsigned` value, which will be subsequently truncated to fit into `month`'s unspecified internal storage. `month` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23), and participates in basic arithmetic with `months` objects, which represent a difference between two `month` objects.

<sup>2</sup> `month` is a trivially copyable and standard-layout class type.

#### 24.17.8.4.2 Member functions

[time.cal.month.members]

```
explicit constexpr month(unsigned m) noexcept;
```

<sup>1</sup> *Effects:* Constructs an object of type `month` by initializing `m_` with `m`. The value held is unspecified if `m` is not in the range `[0, 255]`.

```
constexpr month& month::operator++() noexcept;
```

<sup>2</sup> *Effects:* `*this += months{1}`.

<sup>3</sup> *Returns:* `*this`.

```
constexpr month operator++(int) noexcept;
```

<sup>4</sup> *Effects:* `++(*this)`.

<sup>5</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr month& operator--() noexcept;
```

<sup>6</sup> *Effects:* `*this -= months{1}`.

<sup>7</sup> *Returns:* `*this`.

```
constexpr month operator--(int) noexcept;
```

<sup>8</sup> *Effects:* `--(*this)`.

<sup>9</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr month& operator+=(const months& m) noexcept;
```

<sup>10</sup> *Effects:* `*this = *this + m`.

<sup>11</sup> *Returns:* `*this`.

```
constexpr month& operator-=(const months& m) noexcept;
```

<sup>12</sup> *Effects:* `*this = *this - m`.

<sup>13</sup> *Returns:* `*this`.

```
explicit constexpr month::operator unsigned() const noexcept;
```

<sup>14</sup> *Returns:* `m_`.

```
constexpr bool month::ok() const noexcept;
```

<sup>15</sup> *Returns:* `1 <= m_ && m_ <= 12`.

**24.17.8.4.3 Non-member functions** [time.cal.month.nonmembers]

```
constexpr bool operator==(const month& x, const month& y) noexcept;
```

1 *Returns:* unsigned{x} == unsigned{y}.

```
constexpr bool operator<(const month& x, const month& y) noexcept;
```

2 *Returns:* unsigned{x} < unsigned{y}.

```
constexpr month operator+(const month& x, const months& y) noexcept;
```

3 *Returns:*

```
month{modulo(static_cast<long long>(unsigned{x}) + (y.count() - 1), 12) + 1}
```

where modulo(n, 12) computes the remainder of n divided by 12 using Euclidean division. [Note: Given a divisor of 12, Euclidean division truncates towards negative infinity and always produces a remainder in the range of [0, 11]. Assuming no overflow in the signed summation, this operation results in a month holding a value in the range [1, 12] even if !x.ok(). — end note] [Example: February + months{11} == January. — end example]

```
constexpr month operator+(const months& x, const month& y) noexcept;
```

4 *Returns:* y + x.

```
constexpr month operator-(const month& x, const months& y) noexcept;
```

5 *Returns:* x + -y.

```
constexpr months operator-(const month& x, const month& y) noexcept;
```

6 *Returns:* If x.ok() == true and y.ok() == true, returns a value m in the range [months{0}, months{11}] satisfying y + m == x. Otherwise the value returned is unspecified. [Example: January - February == months{11}. — end example]

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const month& m);
```

7 *Effects:* If m.ok() == true inserts format(os.getloc(), fmt, m) where fmt is "%b" widened to charT. Otherwise inserts unsigned{m} << " is not a valid month".

8 *Returns:* os.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const month& m);
```

9 *Effects:* Streams m into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11.

10 *Returns:* os.

```
template<class charT, class traits, class Alloc = allocator<charT>>
```

```
basic_istream<charT, traits>&
```

```
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 month& m, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

11 *Effects:* Attempts to parse the input stream is into the month m using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid month, is.setstate(ios\_base::failbit) shall be called and m shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null.

12 *Returns:* is.

**24.17.8.5 Class year** [time.cal.year]**24.17.8.5.1 Overview** [time.cal.year.overview]

```
namespace std::chrono {
 class year {
```

```

 short y_; // exposition only
public:
 year() = default;
 explicit constexpr year(int y) noexcept;

 constexpr year& operator++() noexcept;
 constexpr year operator++(int) noexcept;
 constexpr year& operator--() noexcept;
 constexpr year operator--(int) noexcept;

 constexpr year& operator+=(const years& y) noexcept;
 constexpr year& operator-=(const years& y) noexcept;

 constexpr year operator+() const noexcept;
 constexpr year operator-() const noexcept;

 constexpr bool is_leap() const noexcept;

 explicit constexpr operator int() const noexcept;
 constexpr bool ok() const noexcept;

 static constexpr year min() noexcept;
 static constexpr year max() noexcept;
};
}

```

- <sup>1</sup> `year` represents a year in the civil calendar. It can represent values in the range `[min(), max()]`. It can be constructed with any `int` value, which will be subsequently truncated to fit into `year`'s unspecified internal storage. `year` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23), and participates in basic arithmetic with `years` objects, which represent a difference between two `year` objects.
- <sup>2</sup> `year` is a trivially copyable and standard-layout class type.

#### 24.17.8.5.2 Member functions

[`time.cal.year.members`]

```
explicit constexpr year(int y) noexcept;
```

- <sup>1</sup> *Effects:* Constructs an object of type `year` by initializing `y_` with `y`. The value held is unspecified if `y` is not in the range `[-32767, 32767]`.

```
constexpr year& operator++() noexcept;
```

- <sup>2</sup> *Effects:* `++y_`.

- <sup>3</sup> *Returns:* `*this`.

```
constexpr year operator++(int) noexcept;
```

- <sup>4</sup> *Effects:* `++(*this)`.

- <sup>5</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr year& operator--() noexcept;
```

- <sup>6</sup> *Effects:* `--y_`.

- <sup>7</sup> *Returns:* `*this`.

```
constexpr year operator--(int) noexcept;
```

- <sup>8</sup> *Effects:* `--(*this)`.

- <sup>9</sup> *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr year& operator+=(const years& y) noexcept;
```

- <sup>10</sup> *Effects:* `*this = *this + y`.

- <sup>11</sup> *Returns:* `*this`.

```

constexpr year& operator==(const years& y) noexcept;
12 Effects: *this = *this - y.
13 Returns: *this.

constexpr year operator+() const noexcept;
14 Returns: *this.

constexpr year year::operator-() const noexcept;
15 Returns: year{-y_}.

constexpr bool is_leap() const noexcept;
16 Returns: y_ % 4 == 0 && (y_ % 100 != 0 || y_ % 400 == 0).

explicit constexpr operator int() const noexcept;
17 Returns: y_.

constexpr bool ok() const noexcept;
18 Returns: min() <= y_ && y_ <= max().

static constexpr year min() noexcept;
19 Returns: year{-32767}.

static constexpr year max() noexcept;
20 Returns: year{32767}.

```

#### 24.17.8.5.3 Non-member functions

[time.cal.year.nonmembers]

```

constexpr bool operator==(const year& x, const year& y) noexcept;
1 Returns: int{x} == int{y}.

constexpr bool operator<(const year& x, const year& y) noexcept;
2 Returns: int{x} < int{y}.

constexpr year operator+(const year& x, const years& y) noexcept;
3 Returns: year{int{x} + y.count()}.

constexpr year operator+(const years& x, const year& y) noexcept;
4 Returns: y + x.

constexpr year operator-(const year& x, const years& y) noexcept;
5 Returns: x + -y.

constexpr years operator-(const year& x, const year& y) noexcept;
6 Returns: years{int{x} - int{y}}.

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year& y);
7 Effects: Inserts format(fmt, y) where fmt is "%Y" widened to charT. If !y.ok(), appends with " is
 not a valid year".
8 Returns: os.

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const year& y);
9 Effects: Streams y into os using the format specified by the NTCTS fmt. fmt encoding follows the
 rules specified in 24.17.11.
10 Returns: os.

```

```
template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 year& y, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

- 11 *Effects:* Attempts to parse the input stream `is` into the year `y` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid year, `is.setstate(ios_base::failbit)` shall be called and `y` shall not be modified. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null.

- 12 *Returns:* `is`.

```
constexpr year operator"y(unsigned long long y) noexcept;
```

- 13 *Returns:* `year{static_cast<int>(y)}`.

## 24.17.8.6 Class `weekday`

[time.cal.wd]

### 24.17.8.6.1 Overview

[time.cal.wd.overview]

```
namespace std::chrono {
 class weekday {
 unsigned char wd_; // exposition only
 public:
 weekday() = default;
 explicit constexpr weekday(unsigned wd) noexcept;
 constexpr weekday(const sys_days& dp) noexcept;
 explicit constexpr weekday(const local_days& dp) noexcept;

 constexpr weekday& operator++() noexcept;
 constexpr weekday operator++(int) noexcept;
 constexpr weekday& operator--() noexcept;
 constexpr weekday operator--(int) noexcept;

 constexpr weekday& operator+=(const days& d) noexcept;
 constexpr weekday& operator-=(const days& d) noexcept;

 explicit constexpr operator unsigned() const noexcept;
 constexpr bool ok() const noexcept;

 constexpr weekday_indexed operator[](unsigned index) const noexcept;
 constexpr weekday_last operator[](last_spec) const noexcept;
 };
}
```

- 1 `weekday` represents a day of the week in the civil calendar. It normally holds values in the range 0 to 6, corresponding to Sunday through Saturday, but it may hold non-negative values outside this range. It can be constructed with any unsigned value, which will be subsequently truncated to fit into `weekday`'s unspecified internal storage. `weekday` is *Cpp17EqualityComparable* (Table 22). [Note: `weekday` is not *Cpp17LessThanComparable* because there is no universal consensus on which day is the first day of the week. `weekday`'s arithmetic operations treat the days of the week as a circular range, with no beginning and no end. — end note]

- 2 `weekday` is a trivially copyable and standard-layout class type.

### 24.17.8.6.2 Member functions

[time.cal.wd.members]

```
explicit constexpr weekday(unsigned wd) noexcept;
```

- 1 *Effects:* Constructs an object of type `weekday` by initializing `wd_` with `wd`. The value held is unspecified if `wd` is not in the range `[0, 255]`.

```
constexpr weekday(const sys_days& dp) noexcept;
```

- 2 *Effects:* Constructs an object of type `weekday` by computing what day of the week corresponds to the `sys_days` `dp`, and representing that day of the week in `wd_`.

3 *[Example: If dp represents 1970-01-01, the constructed weekday represents Thursday by storing 4 in wd\_. — end example]*

```
explicit constexpr weekday(const local_days& dp) noexcept;
```

4 *Effects:* Constructs an object of type `weekday` by computing what day of the week corresponds to the `local_days dp`, and representing that day of the week in `wd_`.

5 *Remarks:* The value after construction is identical to that constructed from `sys_days{dp.time_ - since_epoch()}`.

```
constexpr weekday& operator++() noexcept;
```

6 *Effects:* `*this += days{1}`.

7 *Returns:* `*this`.

```
constexpr weekday operator++(int) noexcept;
```

8 *Effects:* `++(*this)`.

9 *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr weekday& operator--() noexcept;
```

10 *Effects:* `*this -= days{1}`.

11 *Returns:* `*this`.

```
constexpr weekday operator--(int) noexcept;
```

12 *Effects:* `--(*this)`.

13 *Returns:* A copy of `*this` as it existed on entry to this member function.

```
constexpr weekday& operator+=(const days& d) noexcept;
```

14 *Effects:* `*this = *this + d`.

15 *Returns:* `*this`.

```
constexpr weekday& operator-=(const days& d) noexcept;
```

16 *Effects:* `*this = *this - d`.

17 *Returns:* `*this`.

```
explicit constexpr operator unsigned() const noexcept;
```

18 *Returns:* `wd_`.

```
constexpr bool ok() const noexcept;
```

19 *Returns:* `wd_ <= 6`.

```
constexpr weekday_indexed operator[](unsigned index) const noexcept;
```

20 *Returns:* `{*this, index}`.

```
constexpr weekday_last operator[](last_spec) const noexcept;
```

21 *Returns:* `weekday_last{*this}`.

### 24.17.8.6.3 Non-member functions

[time.cal.wd.nonmembers]

```
constexpr bool operator==(const weekday& x, const weekday& y) noexcept;
```

1 *Returns:* `unsigned{x} == unsigned{y}`.

```
constexpr weekday operator+(const weekday& x, const days& y) noexcept;
```

2 *Returns:*

```
weekday{modulo(static_cast<long long>(unsigned{x}) + y.count(), 7)}
```

where `modulo(n, 7)` computes the remainder of `n` divided by 7 using Euclidean division. [Note: Given a divisor of 7, Euclidean division truncates towards negative infinity and always produces a remainder in the range of [0, 6]. Assuming no overflow in the signed summation, this operation results in a

weekday holding a value in the range [0, 6] even if !x.ok(). — end note] [Example: Monday + days{6} == Sunday. — end example]

```
constexpr weekday operator+(const days& x, const weekday& y) noexcept;
```

3 *Returns:* y + x.

```
constexpr weekday operator-(const weekday& x, const days& y) noexcept;
```

4 *Returns:* x + -y.

```
constexpr days operator-(const weekday& x, const weekday& y) noexcept;
```

5 *Returns:* If x.ok() == true and y.ok() == true, returns a value d in the range [days{0}, days{6}] satisfying y + d == x. Otherwise the value returned is unspecified. [Example: Sunday - Monday == days{6}. — end example]

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const weekday& wd);
```

6 *Effects:* If wd.ok() == true inserts format(os.getloc(), fmt, wd) where fmt is "%a" widened to charT. Otherwise inserts unsigned{wd} << " is not a valid weekday".

7 *Returns:* os.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const weekday& wd);
```

8 *Effects:* Streams wd into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11.

9 *Returns:* os.

```
template<class charT, class traits, class Alloc = allocator<charT>>
```

```
basic_istream<charT, traits>&
```

```
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 weekday& wd, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

10 *Effects:* Attempts to parse the input stream is into the weekday wd using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid weekday, is.setstate(ios\_base::failbit) shall be called and wd shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null.

11 *Returns:* is.

### 24.17.8.7 Class weekday\_indexed

[time.cal.wdidx]

#### 24.17.8.7.1 Overview

[time.cal.wdidx.overview]

```
namespace std::chrono {
```

```
class weekday_indexed {
```

```
 chrono::weekday wd_; // exposition only
```

```
 unsigned char index_; // exposition only
```

```
public:
```

```
 weekday_indexed() = default;
```

```
 constexpr weekday_indexed(const chrono::weekday& wd, unsigned index) noexcept;
```

```
 constexpr chrono::weekday weekday() const noexcept;
```

```
 constexpr unsigned index() const noexcept;
```

```
 constexpr bool ok() const noexcept;
```

```
};
```

```
}
```

1 weekday\_indexed represents a weekday and a small index in the range 1 to 5. This class is used to represent the first, second, third, fourth, or fifth weekday of a month.



<sup>2</sup> [Note: A `weekday_indexed` object can be constructed by indexing a `weekday` with an `unsigned`. — end note] [Example:

```
constexpr auto wdi = Sunday[2]; // wdi is the second Sunday of an as yet unspecified month
static_assert(wdi.weekday() == Sunday);
static_assert(wdi.index() == 2);
```

— end example]

<sup>3</sup> `weekday_indexed` is a trivially copyable and standard-layout class type.

#### 24.17.8.7.2 Member functions

[time.cal.wdidx.members]

```
constexpr weekday_indexed(const chrono::weekday& wd, unsigned index) noexcept;
```

<sup>1</sup> *Effects:* Constructs an object of type `weekday_indexed` by initializing `wd_` with `wd` and `index_` with `index`. The values held are unspecified if `!wd.ok()` or `index` is not in the range `[1, 5]`.

```
constexpr chrono::weekday weekday() const noexcept;
```

<sup>2</sup> *Returns:* `wd_`.

```
constexpr unsigned index() const noexcept;
```

<sup>3</sup> *Returns:* `index_`.

```
constexpr bool ok() const noexcept;
```

<sup>4</sup> *Returns:* `wd_.ok() && 1 <= index_ && index_ <= 5`.

#### 24.17.8.7.3 Non-member functions

[time.cal.wdidx.nonmembers]

```
constexpr bool operator==(const weekday_indexed& x, const weekday_indexed& y) noexcept;
```

<sup>1</sup> *Returns:* `x.weekday() == y.weekday() && x.index() == y.index()`.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const weekday_indexed& wdi);
```

<sup>2</sup> *Effects:* `os << wdi.weekday() << '[' << wdi.index()`. If `wdi.index()` is in the range `[1, 5]`, appends with `']'`, otherwise appends with `" is not a valid index]"`.

<sup>3</sup> *Returns:* `os`.

### 24.17.8.8 Class `weekday_last`

[time.cal.wdlast]

#### 24.17.8.8.1 Overview

[time.cal.wdlast.overview]

```
namespace std::chrono {
```

```
class weekday_last {
```

```
 chrono::weekday wd_; // exposition only
```

```
public:
```

```
 explicit constexpr weekday_last(const chrono::weekday& wd) noexcept;
```

```
 constexpr chrono::weekday weekday() const noexcept;
```

```
 constexpr bool ok() const noexcept;
```

```
};
```

```
}
```

<sup>1</sup> `weekday_last` represents the last weekday of a month.

<sup>2</sup> [Note: A `weekday_last` object can be constructed by indexing a `weekday` with `last`. — end note] [Example:

```
constexpr auto wdl = Sunday[last]; // wdl is the last Sunday of an as yet unspecified month
static_assert(wdl.weekday() == Sunday);
```

— end example]

<sup>3</sup> `weekday_last` is a trivially copyable and standard-layout class type.

**24.17.8.8.2 Member functions** [time.cal.wdlast.members]

```
explicit constexpr weekday_last(const chrono::weekday& wd) noexcept;
```

1 *Effects:* Constructs an object of type `weekday_last` by initializing `wd_` with `wd`.

```
constexpr chrono::weekday weekday() const noexcept;
```

2 *Returns:* `wd_`.

```
constexpr bool ok() const noexcept;
```

3 *Returns:* `wd_.ok()`.

**24.17.8.8.3 Non-member functions** [time.cal.wdlast.nonmembers]

```
constexpr bool operator==(const weekday_last& x, const weekday_last& y) noexcept;
```

1 *Returns:* `x.weekday() == y.weekday()`.

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const weekday_last& wdl);
```

2 *Returns:* `os << wdl.weekday() << "[last]"`.

**24.17.8.9 Class month\_day** [time.cal.md]**24.17.8.9.1 Overview** [time.cal.md.overview]

```
namespace std::chrono {
 class month_day {
 chrono::month m_; // exposition only
 chrono::day d_; // exposition only

 public:
 month_day() = default;
 constexpr month_day(const chrono::month& m, const chrono::day& d) noexcept;

 constexpr chrono::month month() const noexcept;
 constexpr chrono::day day() const noexcept;
 constexpr bool ok() const noexcept;
 };
}
```

1 `month_day` represents a specific day of a specific month, but with an unspecified year. `month_day` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23).

2 `month_day` is a trivially copyable and standard-layout class type.

**24.17.8.9.2 Member functions** [time.cal.md.members]

```
constexpr month_day(const chrono::month& m, const chrono::day& d) noexcept;
```

1 *Effects:* Constructs an object of type `month_day` by initializing `m_` with `m`, and `d_` with `d`.

```
constexpr chrono::month month() const noexcept;
```

2 *Returns:* `m_`.

```
constexpr chrono::day day() const noexcept;
```

3 *Returns:* `d_`.

```
constexpr bool ok() const noexcept;
```

4 *Returns:* `true` if `m_.ok()` is `true`, `1d <= d_`, and `d_` is less than or equal to the number of days in `month m_`; otherwise returns `false`. When `m_ == February`, the number of days is considered to be 29.

**24.17.8.9.3 Non-member functions** [time.cal.md.nonmembers]

```
constexpr bool operator==(const month_day& x, const month_day& y) noexcept;
```

1 *Returns:* `x.month() == y.month() && x.day() == y.day()`.

```
constexpr bool operator<<(const month_day& x, const month_day& y) noexcept;
```

2 *Returns:* If `x.month() < y.month()` returns true. Otherwise, if `x.month() > y.month()` returns false. Otherwise, returns `x.day() < y.day()`.

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_day& md);
```

3 *Returns:* `os << md.month() << '/' << md.day()`.

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const month_day& md);
```

4 *Effects:* Streams `md` into `os` using the format specified by the NTCTS `fmt`. `fmt` encoding follows the rules specified in 24.17.11.

5 *Returns:* `os`.

```
template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 month_day& md, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
```

6 *Effects:* Attempts to parse the input stream `is` into the `month_day` `md` using the format flags given in the NTCTS `fmt` as specified in 24.17.12. If the parse fails to decode a valid `month_day`, `is.setstate(ios_base::failbit)` shall be called and `md` shall not be modified. If `%Z` is used and successfully parsed, that value will be assigned to `*abbrev` if `abbrev` is non-null. If `%z` (or a modified variant) is used and successfully parsed, that value will be assigned to `*offset` if `offset` is non-null.

7 *Returns:* `is`.

#### 24.17.8.10 Class `month_day_last`

[time.cal.mdlast]

```
namespace std::chrono {
 class month_day_last {
 chrono::month m_; // exposition only

 public:
 explicit constexpr month_day_last(const chrono::month& m) noexcept;

 constexpr chrono::month month() const noexcept;
 constexpr bool ok() const noexcept;
 };
}
```

1 `month_day_last` represents the last day of a month.

2 [Note: A `month_day_last` object can be constructed using the expression `m/last` or `last/m`, where `m` is an expression of type `month`. — end note] [Example:

```
constexpr auto mdl = February/last; // mdl is the last day of February of an as yet unspecified year
static_assert(mdl.month() == February);
```

— end example]

3 `month_day_last` is a trivially copyable and standard-layout class type.

```
explicit constexpr month_day_last(const chrono::month& m) noexcept;
```

4 *Effects:* Constructs an object of type `month_day_last` by initializing `m_` with `m`.

```
constexpr chrono::month month() const noexcept;
```

5 *Returns:* `m_`.

```
constexpr bool ok() const noexcept;
```

6 *Returns:* `m_.ok()`.

```
constexpr bool operator==(const month_day_last& x, const month_day_last& y) noexcept;
```

7 *Returns:* x.month() == y.month().

```
constexpr bool operator<(const month_day_last& x, const month_day_last& y) noexcept;
```

8 *Returns:* x.month() < y.month().

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_day_last& mdl);
```

9 *Returns:* os << mdl.month() << "/last".

### 24.17.8.11 Class month\_weekday [time.cal.mwd]

#### 24.17.8.11.1 Overview [time.cal.mwd.overview]

```
namespace std::chrono {
 class month_weekday {
 chrono::month m_; // exposition only
 chrono::weekday_indexed wdi_; // exposition only
 public:
 constexpr month_weekday(const chrono::month& m, const chrono::weekday_indexed& wdi) noexcept;

 constexpr chrono::month month() const noexcept;
 constexpr chrono::weekday_indexed weekday_indexed() const noexcept;
 constexpr bool ok() const noexcept;
 };
}
```

1 month\_weekday represents the  $n^{\text{th}}$  weekday of a month, of an as yet unspecified year. To do this the month\_weekday stores a month and a weekday\_indexed.

2 [Example:

```
constexpr auto mwd
 = February/Tuesday[3]; // mwd is the third Tuesday of February of an as yet unspecified year
static_assert(mwd.month() == February);
static_assert(mwd.weekday_indexed() == Tuesday[3]);
```

— end example]

3 month\_weekday is a trivially copyable and standard-layout class type.

#### 24.17.8.11.2 Member functions [time.cal.mwd.members]

```
constexpr month_weekday(const chrono::month& m, const chrono::weekday_indexed& wdi) noexcept;
```

1 *Effects:* Constructs an object of type month\_weekday by initializing m\_ with m, and wdi\_ with wdi.

```
constexpr chrono::month month() const noexcept;
```

2 *Returns:* m\_.

```
constexpr chrono::weekday_indexed weekday_indexed() const noexcept;
```

3 *Returns:* wdi\_.

```
constexpr bool ok() const noexcept;
```

4 *Returns:* m\_.ok() && wdi\_.ok().

#### 24.17.8.11.3 Non-member functions [time.cal.mwd.nonmembers]

```
constexpr bool operator==(const month_weekday& x, const month_weekday& y) noexcept;
```

1 *Returns:* x.month() == y.month() && x.weekday\_indexed() == y.weekday\_indexed().

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_weekday& mwd);
```

2 *Returns:* os << mwd.month() << '/' << mwd.weekday\_indexed().

**24.17.8.12 Class month\_weekday\_last** [time.cal.mwdlast]**24.17.8.12.1 Overview** [time.cal.mwdlast.overview]

```

namespace std::chrono {
 class month_weekday_last {
 chrono::month m_; // exposition only
 chrono::weekday_last wdl_; // exposition only
 public:
 constexpr month_weekday_last(const chrono::month& m,
 const chrono::weekday_last& wdl) noexcept;

 constexpr chrono::month month() const noexcept;
 constexpr chrono::weekday_last weekday_last() const noexcept;
 constexpr bool ok() const noexcept;
 };
}

```

<sup>1</sup> month\_weekday\_last represents the last weekday of a month, of an as yet unspecified year. To do this the month\_weekday\_last stores a month and a weekday\_last.

<sup>2</sup> [Example:

```

constexpr auto mwd
 = February/Tuesday[last]; // mwd is the last Tuesday of February of an as yet unspecified year
static_assert(mwd.month() == February);
static_assert(mwd.weekday_last() == Tuesday[last]);
— end example]

```

<sup>3</sup> month\_weekday\_last is a trivially copyable and standard-layout class type.

**24.17.8.12.2 Member functions** [time.cal.mwdlast.members]

```

constexpr month_weekday_last(const chrono::month& m,
 const chrono::weekday_last& wdl) noexcept;

```

<sup>1</sup> *Effects:* Constructs an object of type month\_weekday\_last by initializing m\_ with m, and wdl\_ with wdl.

```

constexpr chrono::month month() const noexcept;

```

<sup>2</sup> *Returns:* m\_.

```

constexpr chrono::weekday_last weekday_last() const noexcept;

```

<sup>3</sup> *Returns:* wdl\_.

```

constexpr bool ok() const noexcept;

```

<sup>4</sup> *Returns:* m\_.ok() && wdl\_.ok().

**24.17.8.12.3 Non-member functions** [time.cal.mwdlast.nonmembers]

```

constexpr bool operator==(const month_weekday_last& x, const month_weekday_last& y) noexcept;

```

<sup>1</sup> *Returns:* x.month() == y.month() && x.weekday\_last() == y.weekday\_last().

```

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const month_weekday_last& mwdl);

```

<sup>2</sup> *Returns:* os << mwdl.month() << '/' << mwdl.weekday\_last().

**24.17.8.13 Class year\_month** [time.cal.ym]**24.17.8.13.1 Overview** [time.cal.ym.overview]

```

namespace std::chrono {
 class year_month {
 chrono::year y_; // exposition only
 chrono::month m_; // exposition only
 };
}

```

```

public:
 year_month() = default;
 constexpr year_month(const chrono::year& y, const chrono::month& m) noexcept;

 constexpr chrono::year year() const noexcept;
 constexpr chrono::month month() const noexcept;

 constexpr year_month& operator+=(const months& dm) noexcept;
 constexpr year_month& operator-=(const months& dm) noexcept;
 constexpr year_month& operator+=(const years& dy) noexcept;
 constexpr year_month& operator-=(const years& dy) noexcept;

 constexpr bool ok() const noexcept;
};
}

```

<sup>1</sup> `year_month` represents a specific month of a specific year, but with an unspecified day. `year_month` is a field-based time point with a resolution of months. `year_month` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23).

<sup>2</sup> `year_month` is a trivially copyable and standard-layout class type.

#### 24.17.8.13.2 Member functions

[time.cal.ym.members]

```
constexpr year_month(const chrono::year& y, const chrono::month& m) noexcept;
```

<sup>1</sup> *Effects:* Constructs an object of type `year_month` by initializing `y_` with `y`, and `m_` with `m`.

```
constexpr chrono::year year() const noexcept;
```

<sup>2</sup> *Returns:* `y_`.

```
constexpr chrono::month month() const noexcept;
```

<sup>3</sup> *Returns:* `m_`.

```
constexpr year_month& operator+=(const months& dm) noexcept;
```

<sup>4</sup> *Effects:* `*this = *this + dm`.

<sup>5</sup> *Returns:* `*this`.

```
constexpr year_month& operator-=(const months& dm) noexcept;
```

<sup>6</sup> *Effects:* `*this = *this - dm`.

<sup>7</sup> *Returns:* `*this`.

```
constexpr year_month& operator+=(const years& dy) noexcept;
```

<sup>8</sup> *Effects:* `*this = *this + dy`.

<sup>9</sup> *Returns:* `*this`.

```
constexpr year_month& operator-=(const years& dy) noexcept;
```

<sup>10</sup> *Effects:* `*this = *this - dy`.

<sup>11</sup> *Returns:* `*this`.

```
constexpr bool ok() const noexcept;
```

<sup>12</sup> *Returns:* `y_.ok() && m_.ok()`.

#### 24.17.8.13.3 Non-member functions

[time.cal.ym.nonmembers]

```
constexpr bool operator==(const year_month& x, const year_month& y) noexcept;
```

<sup>1</sup> *Returns:* `x.year() == y.year() && x.month() == y.month()`.

```
constexpr bool operator<(const year_month& x, const year_month& y) noexcept;
```

<sup>2</sup> *Returns:* If `x.year() < y.year()` returns `true`. Otherwise, if `x.year() > y.year()` returns `false`. Otherwise, returns `x.month() < y.month()`.

```
constexpr year_month operator+(const year_month& ym, const months& dm) noexcept;
```

3 *Returns:* A year\_month value z such that z - ym == dm.

*Complexity:*  $\mathcal{O}(1)$  with respect to the value of dm.

```
constexpr year_month operator+(const months& dm, const year_month& ym) noexcept;
```

4 *Returns:* ym + dm.

```
constexpr year_month operator-(const year_month& ym, const months& dm) noexcept;
```

5 *Returns:* ym + -dm.

```
constexpr months operator-(const year_month& x, const year_month& y) noexcept;
```

6 *Returns:*

```
x.year() - y.year() + months{static_cast<int>(unsigned{x.month()}) -
static_cast<int>(unsigned{y.month()})}
```

```
constexpr year_month operator+(const year_month& ym, const years& dy) noexcept;
```

7 *Returns:* (ym.year() + dy) / ym.month().

```
constexpr year_month operator+(const years& dy, const year_month& ym) noexcept;
```

8 *Returns:* ym + dy.

```
constexpr year_month operator-(const year_month& ym, const years& dy) noexcept;
```

9 *Returns:* ym + -dy.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const year_month& ym);
```

10 *Returns:* os << ym.year() << '/' << ym.month().

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const year_month& ym);
```

11 *Effects:* Streams ym into os using the format specified by the NTCTS fmt. fmt encoding follows the rules specified in 24.17.11.

12 *Returns:* os.

```
template<class charT, class traits, class Alloc = allocator<charT>>
```

```
basic_istream<charT, traits>&
```

```
from_stream(basic_istream<charT, traits>& is, const charT* fmt,
year_month& ym, basic_string<charT, traits, Alloc>* abbrev = nullptr,
minutes* offset = nullptr);
```

13 *Effects:* Attempts to parse the input stream is into the year\_month ym using the format flags given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid year\_month, is.setstate(ios\_base::failbit) shall be called and ym shall not be modified. If %Z is used and successfully parsed, that value will be assigned to \*abbrev if abbrev is non-null. If %z (or a modified variant) is used and successfully parsed, that value will be assigned to \*offset if offset is non-null.

14 *Returns:* is.

#### 24.17.8.14 Class year\_month\_day

[time.cal.ymd]

##### 24.17.8.14.1 Overview

[time.cal.ymd.overview]

```
namespace std::chrono {
```

```
class year_month_day {
```

```
 chrono::year y_; // exposition only
```

```
 chrono::month m_; // exposition only
```

```
 chrono::day d_; // exposition only
```

```
public:
```

```
 year_month_day() = default;
```

```

constexpr year_month_day(const chrono::year& y, const chrono::month& m,
 const chrono::day& d) noexcept;
constexpr year_month_day(const year_month_day_last& ymdl) noexcept;
constexpr year_month_day(const sys_days& dp) noexcept;
explicit constexpr year_month_day(const local_days& dp) noexcept;

constexpr year_month_day& operator+=(const months& m) noexcept;
constexpr year_month_day& operator-=(const months& m) noexcept;
constexpr year_month_day& operator+=(const years& y) noexcept;
constexpr year_month_day& operator-=(const years& y) noexcept;

constexpr chrono::year year() const noexcept;
constexpr chrono::month month() const noexcept;
constexpr chrono::day day() const noexcept;

constexpr operator sys_days() const noexcept;
explicit constexpr operator local_days() const noexcept;
constexpr bool ok() const noexcept;
};
}

```

- <sup>1</sup> `year_month_day` represents a specific year, month, and day. `year_month_day` is a field-based time point with a resolution of days. [Note: `year_month_day` supports years- and months-oriented arithmetic, but not days-oriented arithmetic. For the latter, there is a conversion to `sys_days`, which efficiently supports days-oriented arithmetic. — end note] `year_month_day` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23),
- <sup>2</sup> `year_month_day` is a trivially copyable and standard-layout class type.

#### 24.17.8.14.2 Member functions

[time.cal.ymd.members]

```
constexpr year_month_day(const chrono::year& y, const chrono::month& m,
 const chrono::day& d) noexcept;
```

- <sup>1</sup> *Effects:* Constructs an object of type `year_month_day` by initializing `y_` with `y`, `m_` with `m`, and `d_` with `d`.

```
constexpr year_month_day(const year_month_day_last& ymdl) noexcept;
```

- <sup>2</sup> *Effects:* Constructs an object of type `year_month_day` by initializing `y_` with `ymdl.year()`, `m_` with `ymdl.month()`, and `d_` with `ymdl.day()`. [Note: This conversion from `year_month_day_last` to `year_month_day` may be more efficient than converting a `year_month_day_last` to a `sys_days`, and then converting that `sys_days` to a `year_month_day`. — end note]

```
constexpr year_month_day(const sys_days& dp) noexcept;
```

- <sup>3</sup> *Effects:* Constructs an object of type `year_month_day` that corresponds to the date represented by `dp`.
- <sup>4</sup> *Remarks:* For any value `ymd` of type `year_month_day` for which `ymd.ok()` is true, `ymd == year_month_day{sys_days{ymd}}` is true.

```
explicit constexpr year_month_day(const local_days& dp) noexcept;
```

- <sup>5</sup> *Effects:* Constructs an object of type `year_month_day` that corresponds to the date represented by `dp`.
- <sup>6</sup> *Remarks:* Equivalent to constructing with `sys_days{dp.time_since_epoch()}`.

```
constexpr year_month_day& operator+=(const months& m) noexcept;
```

- <sup>7</sup> *Effects:* `*this = *this + m`.
- <sup>8</sup> *Returns:* `*this`.

```
constexpr year_month_day& operator-=(const months& m) noexcept;
```

- <sup>9</sup> *Effects:* `*this = *this - m`.
- <sup>10</sup> *Returns:* `*this`.



```

constexpr year_month_day& year_month_day::operator+=(const years& y) noexcept;
11 Effects: *this = *this + y.
12 Returns: *this.

constexpr year_month_day& year_month_day::operator-=(const years& y) noexcept;
13 Effects: *this = *this - y.
14 Returns: *this.

constexpr chrono::year year() const noexcept;
15 Returns: y_.

constexpr chrono::month month() const noexcept;
16 Returns: m_.

constexpr chrono::day day() const noexcept;
17 Returns: d_.

constexpr operator sys_days() const noexcept;
18 Returns: If ok(), returns a sys_days holding a count of days from the sys_days epoch to *this (a
 negative value if *this represents a date prior to the sys_days epoch). Otherwise, if y_.ok() &&
 m_.ok() is true, returns a sys_days which is offset from sys_days{y_/m_/last} by the number of
 days d_ is offset from sys_days{y_/m_/last}.day(). Otherwise the value returned is unspecified.
19 Remarks: A sys_days in the range [days{-12687428}, days{11248737}] which is converted to a
 year_month_day shall have the same value when converted back to a sys_days.
20 [Example:
 static_assert(year_month_day{sys_days{2017y/January/0}} == 2016y/December/31);
 static_assert(year_month_day{sys_days{2017y/January/31}} == 2017y/January/31);
 static_assert(year_month_day{sys_days{2017y/January/32}} == 2017y/February/1);
 — end example]

explicit constexpr operator local_days() const noexcept;
21 Returns: local_days{sys_days{*this}.time_since_epoch()}.

constexpr bool ok() const noexcept;
22 Returns: If y_.ok() is true, and m_.ok() is true, and d_ is in the range [1d, (y_/m_/last).day()],
 then returns true; otherwise returns false.

```

#### 24.17.8.14.3 Non-member functions

[time.cal.ymd.nonmembers]

```

constexpr bool operator==(const year_month_day& x, const year_month_day& y) noexcept;
1 Returns: x.year() == y.year() && x.month() == y.month() && x.day() == y.day().

constexpr bool operator<(const year_month_day& x, const year_month_day& y) noexcept;
2 Returns: If x.year() < y.year(), returns true. Otherwise, if x.year() > y.year(), returns false.
 Otherwise, if x.month() < y.month(), returns true. Otherwise, if x.month() > y.month(), returns
 false. Otherwise, returns x.day() < y.day().

constexpr year_month_day operator+(const year_month_day& ymd, const months& dm) noexcept;
3 Returns: (ymd.year() / ymd.month() + dm) / ymd.day().
4 [Note: If ymd.day() is in the range [1d, 28d], ok() will return true for the resultant year_month_day.
 — end note]

constexpr year_month_day operator+(const months& dm, const year_month_day& ymd) noexcept;
5 Returns: ymd + dm.

```

```

constexpr year_month_day operator-(const year_month_day& ymd, const months& dm) noexcept;
6 Returns: ymd + (-dm).

constexpr year_month_day operator+(const year_month_day& ymd, const years& dy) noexcept;
7 Returns: (ymd.year() + dy) / ymd.month() / ymd.day().
8 [Note: If ymd.month() is February and ymd.day() is not in the range [1d, 28d], ok() may return
 false for the resultant year_month_day. — end note]

constexpr year_month_day operator+(const years& dy, const year_month_day& ymd) noexcept;
9 Returns: ymd + dy.

constexpr year_month_day operator-(const year_month_day& ymd, const years& dy) noexcept;
10 Returns: ymd + (-dy).

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_day& ymd);
11 Effects: Inserts format(fmt, ymd) where fmt is "%F" widened to charT. If !ymd.ok(), appends with
 " is not a valid date".
12 Returns: os.

template<class charT, class traits>
 basic_ostream<charT, traits>&
 to_stream(basic_ostream<charT, traits>& os, const charT* fmt, const year_month_day& ymd);
13 Effects: Streams ymd into os using the format specified by the NTCTS fmt. fmt encoding follows the
 rules specified in 24.17.11.
14 Returns: os.

template<class charT, class traits, class Alloc = allocator<charT>>
 basic_istream<charT, traits>&
 from_stream(basic_istream<charT, traits>& is, const charT* fmt,
 year_month_day& ymd, basic_string<charT, traits, Alloc>* abbrev = nullptr,
 minutes* offset = nullptr);
15 Effects: Attempts to parse the input stream is into the year_month_day ymd using the format flags
 given in the NTCTS fmt as specified in 24.17.12. If the parse fails to decode a valid year_month_day,
 is.setstate(ios_base::failbit) shall be called and ymd shall not be modified. If %Z is used and
 successfully parsed, that value will be assigned to *abbrev if abbrev is non-null. If %z (or a modified
 variant) is used and successfully parsed, that value will be assigned to *offset if offset is non-null.
16 Returns: is.

```

**24.17.8.15 Class year\_month\_day\_last** [time.cal.ymdlast]

**24.17.8.15.1 Overview** [time.cal.ymdlast.overview]

```

namespace std::chrono {
 class year_month_day_last {
 chrono::year y_; // exposition only
 chrono::month_day_last mdl_; // exposition only

 public:
 constexpr year_month_day_last(const chrono::year& y,
 const chrono::month_day_last& mdl) noexcept;

 constexpr year_month_day_last& operator+=(const months& m) noexcept;
 constexpr year_month_day_last& operator-=(const months& m) noexcept;
 constexpr year_month_day_last& operator+=(const years& y) noexcept;
 constexpr year_month_day_last& operator-=(const years& y) noexcept;

 constexpr chrono::year year() const noexcept;
 constexpr chrono::month month() const noexcept;
 constexpr chrono::month_day_last month_day_last() const noexcept;

```

```

 constexpr chrono::day day() const noexcept;

 constexpr operator sys_days() const noexcept;
 explicit constexpr operator local_days() const noexcept;
 constexpr bool ok() const noexcept;
};
}

```

1 `year_month_day_last` represents the last day of a specific year and month. `year_month_day_last` is a field-based time point with a resolution of `days`, except that it is restricted to pointing to the last day of a year and month. [*Note: `year_month_day_last` supports years- and months-oriented arithmetic, but not days-oriented arithmetic. For the latter, there is a conversion to `sys_days`, which efficiently supports days-oriented arithmetic. — end note*] `year_month_day_last` is *Cpp17EqualityComparable* (Table 22) and *Cpp17LessThanComparable* (Table 23),

2 `year_month_day_last` is a trivially copyable and standard-layout class type.

### 24.17.8.15.2 Member functions

[`time.cal.ymdlast.members`]

```

constexpr year_month_day_last(const chrono::year& y,
 const chrono::month_day_last& mdl) noexcept;

```

1 *Effects:* Constructs an object of type `year_month_day_last` by initializing `y_` with `y` and `mdl_` with `mdl`.

```

constexpr year_month_day_last& operator+=(const months& m) noexcept;

```

2 *Effects:* `*this = *this + m`.

3 *Returns:* `*this`.

```

constexpr year_month_day_last& operator-=(const months& m) noexcept;

```

4 *Effects:* `*this = *this - m`.

5 *Returns:* `*this`.

```

constexpr year_month_day_last& operator+=(const years& y) noexcept;

```

6 *Effects:* `*this = *this + y`.

7 *Returns:* `*this`.

```

constexpr year_month_day_last& operator-=(const years& y) noexcept;

```

8 *Effects:* `*this = *this - y`.

9 *Returns:* `*this`.

```

constexpr chrono::year year() const noexcept;

```

10 *Returns:* `y_`.

```

constexpr chrono::month month() const noexcept;

```

11 *Returns:* `mdl_.month()`.

```

constexpr chrono::month_day_last month_day_last() const noexcept;

```

12 *Returns:* `mdl_`.

```

constexpr chrono::day day() const noexcept;

```

13 *Returns:* A day representing the last day of the (year, month) pair represented by `*this`.

14 [*Note:* This value may be computed on demand. — end note]

```

constexpr operator sys_days() const noexcept;

```

15 *Returns:* `sys_days{year()/month()/day()}`.

```

explicit constexpr operator local_days() const noexcept;

```

16 *Returns:* `local_days{sys_days{*this}.time_since_epoch()}`.

```
constexpr bool ok() const noexcept;
```

17 *Returns:* `y_.ok() && mdl_.ok()`.

### 24.17.8.15.3 Non-member functions

[time.cal.ymdlast.nonmembers]

```
constexpr bool operator==(const year_month_day_last& x, const year_month_day_last& y) noexcept;
```

1 *Returns:* `x.year() == y.year() && x.month_day_last() == y.month_day_last()`.

```
constexpr bool operator<(const year_month_day_last& x, const year_month_day_last& y) noexcept;
```

2 *Returns:* If `x.year() < y.year()`, returns true. Otherwise, if `x.year() > y.year()`, returns false. Otherwise, returns `x.month_day_last() < y.month_day_last()`.

```
constexpr year_month_day_last
operator+(const year_month_day_last& ymdl, const months& dm) noexcept;
```

3 *Returns:* `(ymdl.year() / ymdl.month() + dm) / last`.

```
constexpr year_month_day_last
operator+(const months& dm, const year_month_day_last& ymdl) noexcept;
```

4 *Returns:* `ymdl + dm`.

```
constexpr year_month_day_last
operator-(const year_month_day_last& ymdl, const months& dm) noexcept;
```

5 *Returns:* `ymdl + (-dm)`.

```
constexpr year_month_day_last
operator+(const year_month_day_last& ymdl, const years& dy) noexcept;
```

6 *Returns:* `{ymdl.year()+dy, ymdl.month_day_last()}.`

```
constexpr year_month_day_last
operator+(const years& dy, const year_month_day_last& ymdl) noexcept;
```

7 *Returns:* `ymdl + dy`.

```
constexpr year_month_day_last
operator-(const year_month_day_last& ymdl, const years& dy) noexcept;
```

8 *Returns:* `ymdl + (-dy)`.

```
template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const year_month_day_last& ymdl);
```

9 *Returns:* `os << ymdl.year() << '/' << ymdl.month_day_last()`.

### 24.17.8.16 Class year\_month\_weekday

[time.cal.ymwd]

#### 24.17.8.16.1 Overview

[time.cal.ymwd.overview]

```
namespace std::chrono {
 class year_month_weekday {
 chrono::year y_; // exposition only
 chrono::month m_; // exposition only
 chrono::weekday_indexed wdi_; // exposition only

 public:
 year_month_weekday() = default;
 constexpr year_month_weekday(const chrono::year& y, const chrono::month& m,
 const chrono::weekday_indexed& wdi) noexcept;
 constexpr year_month_weekday(const sys_days& dp) noexcept;
 explicit constexpr year_month_weekday(const local_days& dp) noexcept;

 constexpr year_month_weekday& operator+=(const months& m) noexcept;
 constexpr year_month_weekday& operator-=(const months& m) noexcept;
 constexpr year_month_weekday& operator+=(const years& y) noexcept;
 constexpr year_month_weekday& operator-=(const years& y) noexcept;
```

```

constexpr chrono::year year() const noexcept;
constexpr chrono::month month() const noexcept;
constexpr chrono::weekday weekday() const noexcept;
constexpr unsigned index() const noexcept;
constexpr chrono::weekday_indexed weekday_indexed() const noexcept;

constexpr operator sys_days() const noexcept;
explicit constexpr operator local_days() const noexcept;
constexpr bool ok() const noexcept;
};
}

```

<sup>1</sup> `year_month_weekday` represents a specific year, month, and  $n^{\text{th}}$  weekday of the month. `year_month_weekday` is a field-based time point with a resolution of days. [Note: `year_month_weekday` supports years- and months-oriented arithmetic, but not days-oriented arithmetic. For the latter, there is a conversion to `sys_days`, which efficiently supports days-oriented arithmetic. — end note] `year_month_weekday` is *Cpp17EqualityComparable* (Table 22).

<sup>2</sup> `year_month_weekday` is a trivially copyable and standard-layout class type.

#### 24.17.8.16.2 Member functions

[time.cal.ymwd.members]

```
constexpr year_month_weekday(const chrono::year& y, const chrono::month& m,
 const chrono::weekday_indexed& wdi) noexcept;
```

<sup>1</sup> *Effects:* Constructs an object of type `year_month_weekday` by initializing `y_` with `y`, `m_` with `m`, and `wdi_` with `wdi`.

```
constexpr year_month_weekday(const sys_days& dp) noexcept;
```

<sup>2</sup> *Effects:* Constructs an object of type `year_month_weekday` which corresponds to the date represented by `dp`.

<sup>3</sup> *Remarks:* For any value `ymdl` of type `year_month_weekday` for which `ymdl.ok()` is true, `ymdl == year_month_weekday{sys_days{ymdl}}` is true.

```
explicit constexpr year_month_weekday(const local_days& dp) noexcept;
```

<sup>4</sup> *Effects:* Constructs an object of type `year_month_weekday` that corresponds to the date represented by `dp`.

<sup>5</sup> *Remarks:* Equivalent to constructing with `sys_days{dp.time_since_epoch()}`.

```
constexpr year_month_weekday& operator+=(const months& m) noexcept;
```

<sup>6</sup> *Effects:* `*this = *this + m`.

<sup>7</sup> *Returns:* `*this`.

```
constexpr year_month_weekday& operator-=(const months& m) noexcept;
```

<sup>8</sup> *Effects:* `*this = *this - m`.

<sup>9</sup> *Returns:* `*this`.

```
constexpr year_month_weekday& operator+=(const years& y) noexcept;
```

<sup>10</sup> *Effects:* `*this = *this + y`.

<sup>11</sup> *Returns:* `*this`.

```
constexpr year_month_weekday& operator-=(const years& y) noexcept;
```

<sup>12</sup> *Effects:* `*this = *this - y`.

<sup>13</sup> *Returns:* `*this`.

```
constexpr chrono::year year() const noexcept;
```

<sup>14</sup> *Returns:* `y_`.

```
constexpr chrono::month month() const noexcept;
```

<sup>15</sup> *Returns:* `m_`.

```

constexpr chrono::weekday weekday() const noexcept;
16 Returns: wdi_.weekday().

constexpr unsigned index() const noexcept;
17 Returns: wdi_.index().

constexpr chrono::weekday_indexed weekday_indexed() const noexcept;
18 Returns: wdi_.

constexpr operator sys_days() const noexcept;
19 Returns: If y_.ok() && m_.ok() && wdi_.weekday().ok(), returns a sys_days that represents
the date (index() - 1) * 7 days after the first weekday() of year()/month(). If index() is 0
the returned sys_days represents the date 7 days prior to the first weekday() of year()/month().
Otherwise the returned value is unspecified.

explicit constexpr operator local_days() const noexcept;
20 Returns: local_days{sys_days{*this}.time_since_epoch()}.

constexpr bool ok() const noexcept;
21 Returns: If any of y_.ok(), m_.ok(), or wdi_.ok() is false, returns false. Otherwise, if *this
represents a valid date, returns true. Otherwise, returns false.

```

### 24.17.8.16.3 Non-member functions

[time.cal.ymwd.nonmembers]

```

constexpr bool operator==(const year_month_weekday& x, const year_month_weekday& y) noexcept;
1 Returns:
 x.year() == y.year() && x.month() == y.month() && x.weekday_indexed() == y.weekday_indexed()

constexpr year_month_weekday operator+(const year_month_weekday& ymwd, const months& dm) noexcept;
2 Returns: (ymwd.year() / ymwd.month() + dm) / ymwd.weekday_indexed().

constexpr year_month_weekday operator+(const months& dm, const year_month_weekday& ymwd) noexcept;
3 Returns: ymwd + dm.

constexpr year_month_weekday operator-(const year_month_weekday& ymwd, const months& dm) noexcept;
4 Returns: ymwd + (-dm).

constexpr year_month_weekday operator+(const year_month_weekday& ymwd, const years& dy) noexcept;
5 Returns: {ymwd.year()+dy, ymwd.month(), ymwd.weekday_indexed()}.

constexpr year_month_weekday operator+(const years& dy, const year_month_weekday& ymwd) noexcept;
6 Returns: ymwd + dm.

constexpr year_month_weekday operator-(const year_month_weekday& ymwd, const years& dy) noexcept;
7 Returns: ymwd + (-dm).

template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const year_month_weekday& ymwd);
8 Returns: os << ymwdi.year() << '/' << ymwdi.month() << '/' << ymwdi.weekday_indexed().

```

### 24.17.8.17 Class year\_month\_weekday\_last

[time.cal.ymwdlast]

#### 24.17.8.17.1 Overview

[time.cal.ymwdlast.overview]

```

namespace std::chrono {
 class year_month_weekday_last {
 chrono::year y_; // exposition only
 chrono::month m_; // exposition only
 chrono::weekday_last wdl_; // exposition only
 };
}

```

```

public:
 constexpr year_month_weekday_last(const chrono::year& y, const chrono::month& m,
 const chrono::weekday_last& wdl) noexcept;

 constexpr year_month_weekday_last& operator+=(const months& m) noexcept;
 constexpr year_month_weekday_last& operator-=(const months& m) noexcept;
 constexpr year_month_weekday_last& operator+=(const years& y) noexcept;
 constexpr year_month_weekday_last& operator-=(const years& y) noexcept;

 constexpr chrono::year year() const noexcept;
 constexpr chrono::month month() const noexcept;
 constexpr chrono::weekday weekday() const noexcept;
 constexpr chrono::weekday_last weekday_last() const noexcept;

 constexpr operator sys_days() const noexcept;
 explicit constexpr operator local_days() const noexcept;
 constexpr bool ok() const noexcept;
};
}

```

- <sup>1</sup> `year_month_weekday_last` represents a specific year, month, and last weekday of the month. `year_month_weekday_last` is a field-based time point with a resolution of `days`, except that it is restricted to pointing to the last weekday of a year and month. [*Note: `year_month_weekday_last` supports years- and months-oriented arithmetic, but not days-oriented arithmetic. For the latter, there is a conversion to `sys_days`, which efficiently supports days-oriented arithmetic. — end note*] `year_month_weekday_last` is *Cpp17EqualityComparable* (Table 22).

#### 24.17.8.17.2 Member functions

[`time.cal.ymwdlast.members`]

- <sup>1</sup> `year_month_weekday_last` is a trivially copyable and standard-layout class type.

```

constexpr year_month_weekday_last(const chrono::year& y, const chrono::month& m,
 const chrono::weekday_last& wdl) noexcept;

```

- <sup>2</sup> *Effects:* Constructs an object of type `year_month_weekday_last` by initializing `y_` with `y`, `m_` with `m`, and `wdl_` with `wdl`.

```

constexpr year_month_weekday_last& operator+=(const months& m) noexcept;

```

- <sup>3</sup> *Effects:* `*this = *this + m`.

- <sup>4</sup> *Returns:* `*this`.

```

constexpr year_month_weekday_last& operator-=(const months& m) noexcept;

```

- <sup>5</sup> *Effects:* `*this = *this - m`.

- <sup>6</sup> *Returns:* `*this`.

```

constexpr year_month_weekday_last& operator+=(const years& y) noexcept;

```

- <sup>7</sup> *Effects:* `*this = *this + y`.

- <sup>8</sup> *Returns:* `*this`.

```

constexpr year_month_weekday_last& operator-=(const years& y) noexcept;

```

- <sup>9</sup> *Effects:* `*this = *this - y`.

- <sup>10</sup> *Returns:* `*this`.

```

constexpr chrono::year year() const noexcept;

```

- <sup>11</sup> *Returns:* `y_`.

```

constexpr chrono::month month() const noexcept;

```

- <sup>12</sup> *Returns:* `m_`.

```

constexpr chrono::weekday weekday() const noexcept;

```

- <sup>13</sup> *Returns:* `wdl_.weekday()`.

```
constexpr chrono::weekday_last weekday_last() const noexcept;
```

14 *Returns:* wdl\_.

```
constexpr operator sys_days() const noexcept;
```

15 *Returns:* If ok() == true, returns a sys\_days that represents the last weekday() of year()/month(). Otherwise the returned value is unspecified.

```
explicit constexpr operator local_days() const noexcept;
```

16 *Returns:* local\_days{sys\_days{\*this}.time\_since\_epoch()}.

```
constexpr bool ok() const noexcept;
```

17 *Returns:* y\_.ok() && m\_.ok() && wdl\_.ok().

### 24.17.8.17.3 Non-member functions

[time.cal.ymwdlast.nonmembers]

```
constexpr bool operator==(const year_month_weekday_last& x,
 const year_month_weekday_last& y) noexcept;
```

1 *Returns:*

```
x.year() == y.year() && x.month() == y.month() && x.weekday_last() == y.weekday_last()
```

```
constexpr year_month_weekday_last
```

```
operator+(const year_month_weekday_last& ymwdl, const months& dm) noexcept;
```

2 *Returns:* (ymwdl.year() / ymwdl.month() + dm) / ymwdl.weekday\_last().

```
constexpr year_month_weekday_last
```

```
operator+(const months& dm, const year_month_weekday_last& ymwdl) noexcept;
```

3 *Returns:* ymwdl + dm.

```
constexpr year_month_weekday_last
```

```
operator-(const year_month_weekday_last& ymwdl, const months& dm) noexcept;
```

4 *Returns:* ymwdl + (-dm).

```
constexpr year_month_weekday_last
```

```
operator+(const year_month_weekday_last& ymwdl, const years& dy) noexcept;
```

5 *Returns:* {ymwdl.year()+dy, ymwdl.month(), ymwdl.weekday\_last()}.

```
constexpr year_month_weekday_last
```

```
operator+(const years& dy, const year_month_weekday_last& ymwdl) noexcept;
```

6 *Returns:* ymwdl + dy.

```
constexpr year_month_weekday_last
```

```
operator-(const year_month_weekday_last& ymwdl, const years& dy) noexcept;
```

7 *Returns:* ymwdl + (-dy).

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const year_month_weekday_last& ymwdl);
```

8 *Returns:* os << ymwdl.year() << '/' << ymwdl.month() << '/' << ymwdl.weekday\_last().

### 24.17.8.18 Conventional syntax operators

[time.cal.operators]

1 A set of overloaded operator/ functions provides a conventional syntax for the creation of civil calendar dates.

2 [Note: The year, month, and day are accepted in any of the following 3 orders:

*year/month/day*

*month/day/year*

*day/month/year*

Anywhere a *day* is required, any of the following can also be specified:



```

last
weekday [i]
weekday [last]

```

— end note]

- 3 [Note: Partial-date types such as `year_month` and `month_day` can be created by not applying the second division operator for any of the three orders. For example:

```

year_month ym = 2015y/April;
month_day md1 = April/4;
month_day md2 = 4d/April;

```

— end note]

- 4 [Example:

```

auto a = 2015/4/4; // a == int(125)
auto b = 2015y/4/4; // b == year_month_day{year(2015), month(4), day(4)}
auto c = 2015y/4d/April; // error: no viable operator/ for first /
auto d = 2015/April/4; // error: no viable operator/ for first /

```

— end example]

```

constexpr year_month
operator/(const year& y, const month& m) noexcept;

```

- 5 *Returns:* {y, m}.

```

constexpr year_month
operator/(const year& y, int m) noexcept;

```

- 6 *Returns:* y / month(m).

```

constexpr month_day
operator/(const month& m, const day& d) noexcept;

```

- 7 *Returns:* {m, d}.

```

constexpr month_day
operator/(const month& m, int d) noexcept;

```

- 8 *Returns:* m / day(d).

```

constexpr month_day
operator/(int m, const day& d) noexcept;

```

- 9 *Returns:* month(m) / d.

```

constexpr month_day
operator/(const day& d, const month& m) noexcept;

```

- 10 *Returns:* m / d.

```

constexpr month_day
operator/(const day& d, int m) noexcept;

```

- 11 *Returns:* month(m) / d.

```

constexpr month_day_last
operator/(const month& m, last_spec) noexcept;

```

- 12 *Returns:* month\_day\_last{m}.

```

constexpr month_day_last
operator/(int m, last_spec) noexcept;

```

- 13 *Returns:* month(m) / last.

```

constexpr month_day_last
operator/(last_spec, const month& m) noexcept;

```

- 14 *Returns:* m / last.

```

constexpr month_day_last
 operator/(last_spec, int m) noexcept;
15 Returns: month(m) / last.

constexpr month_weekday
 operator/(const month& m, const weekday_indexed& wdi) noexcept;
16 Returns: {m, wdi}.

constexpr month_weekday
 operator/(int m, const weekday_indexed& wdi) noexcept;
17 Returns: month(m) / wdi.

constexpr month_weekday
 operator/(const weekday_indexed& wdi, const month& m) noexcept;
18 Returns: m / wdi.

constexpr month_weekday
 operator/(const weekday_indexed& wdi, int m) noexcept;
19 Returns: month(m) / wdi.

constexpr month_weekday_last
 operator/(const month& m, const weekday_last& wdl) noexcept;
20 Returns: {m, wdl}.

constexpr month_weekday_last
 operator/(int m, const weekday_last& wdl) noexcept;
21 Returns: month(m) / wdl.

constexpr month_weekday_last
 operator/(const weekday_last& wdl, const month& m) noexcept;
22 Returns: m / wdl.

constexpr month_weekday_last
 operator/(const weekday_last& wdl, int m) noexcept;
23 Returns: month(m) / wdl.

constexpr year_month_day
 operator/(const year_month& ym, const day& d) noexcept;
24 Returns: {ym.year(), ym.month(), d}.

constexpr year_month_day
 operator/(const year_month& ym, int d) noexcept;
25 Returns: ym / day(d).

constexpr year_month_day
 operator/(const year& y, const month_day& md) noexcept;
26 Returns: y / md.month() / md.day().

constexpr year_month_day
 operator/(int y, const month_day& md) noexcept;
27 Returns: year(y) / md.

constexpr year_month_day
 operator/(const month_day& md, const year& y) noexcept;
28 Returns: y / md.

constexpr year_month_day
 operator/(const month_day& md, int y) noexcept;
29 Returns: year(y) / md.

```

```

constexpr year_month_day_last
 operator/(const year_month& ym, last_spec) noexcept;
30 Returns: {ym.year(), month_day_last{ym.month()}}.

constexpr year_month_day_last
 operator/(const year& y, const month_day_last& mdl) noexcept;
31 Returns: {y, mdl}.

constexpr year_month_day_last
 operator/(int y, const month_day_last& mdl) noexcept;
32 Returns: year(y) / mdl.

constexpr year_month_day_last
 operator/(const month_day_last& mdl, const year& y) noexcept;
33 Returns: y / mdl.

constexpr year_month_day_last
 operator/(const month_day_last& mdl, int y) noexcept;
34 Returns: year(y) / mdl.

constexpr year_month_weekday
 operator/(const year_month& ym, const weekday_indexed& wdi) noexcept;
35 Returns: {ym.year(), ym.month(), wdi}.

constexpr year_month_weekday
 operator/(const year& y, const month_weekday& mwd) noexcept;
36 Returns: {y, mwd.month(), mwd.weekday_indexed()}.

constexpr year_month_weekday
 operator/(int y, const month_weekday& mwd) noexcept;
37 Returns: year(y) / mwd.

constexpr year_month_weekday
 operator/(const month_weekday& mwd, const year& y) noexcept;
38 Returns: y / mwd.

constexpr year_month_weekday
 operator/(const month_weekday& mwd, int y) noexcept;
39 Returns: year(y) / mwd.

constexpr year_month_weekday_last
 operator/(const year_month& ym, const weekday_last& wdl) noexcept;
40 Returns: {ym.year(), ym.month(), wdl}.

constexpr year_month_weekday_last
 operator/(const year& y, const month_weekday_last& mwdl) noexcept;
41 Returns: {y, mwdl.month(), mwdl.weekday_last()}.

constexpr year_month_weekday_last
 operator/(int y, const month_weekday_last& mwdl) noexcept;
42 Returns: year(y) / mwdl.

constexpr year_month_weekday_last
 operator/(const month_weekday_last& mwdl, const year& y) noexcept;
43 Returns: y / mwdl.

constexpr year_month_weekday_last
 operator/(const month_weekday_last& mwdl, int y) noexcept;
44 Returns: year(y) / mwdl.

```

**24.17.9 Class template `time_of_day`**

[time.tod]

**24.17.9.1 Overview**

[time.tod.overview]

```

namespace std::chrono {
 template<class Duration> class time_of_day;

 template<> class time_of_day<hours>;
 template<> class time_of_day<minutes>;
 template<> class time_of_day<seconds>;
 template<class Rep, class Period> class time_of_day<duration<Rep, Period>>;
}

```

- <sup>1</sup> The `time_of_day` class template splits a `duration` representing the time elapsed since midnight into a “broken down” time of day such as *hours:minutes:seconds*. The `Duration` template parameter dictates the precision to which the time is broken down. [Note: This can vary from a coarse precision of hours to a very fine precision of nanoseconds. — *end note*] A `time_of_day` object also tracks whether it should be output as a 12-hour time format or a 24-hour time format.
- <sup>2</sup> The primary `time_of_day` template is not defined. Four specializations are provided to handle four different levels of precision.
- <sup>3</sup> Each specialization of `time_of_day` is a trivially copyable and standard-layout class type.

**24.17.9.2 Hours precision**

[time.tod.hours]

```

namespace std::chrono {
 template<>
 class time_of_day<hours> {
 public:
 using precision = chrono::hours;

 time_of_day() = default;
 explicit constexpr time_of_day(chrono::hours since_midnight) noexcept;

 constexpr chrono::hours hours() const noexcept;

 explicit constexpr operator precision() const noexcept;
 constexpr precision to_duration() const noexcept;

 constexpr void make24() noexcept;
 constexpr void make12() noexcept;
 };
}

```

- <sup>1</sup> [Note: This specialization handles hours since midnight. — *end note*]

```

explicit constexpr time_of_day(chrono::hours since_midnight) noexcept;

```
- <sup>2</sup> *Effects:* Constructs an object of type `time_of_day` in 24-hour format corresponding to `since_midnight` hours after 00:00:00.
- <sup>3</sup> *Ensures:* `hours()` returns the integral number of hours `since_midnight` is after 00:00:00.

```

constexpr chrono::hours hours() const noexcept;

```
- <sup>4</sup> *Returns:* The stored hour of `*this`.

```

explicit constexpr operator precision() const noexcept;

```
- <sup>5</sup> *Returns:* The number of hours since midnight.

```

constexpr precision to_duration() const noexcept;

```
- <sup>6</sup> *Returns:* `precision{*this}`.

```

constexpr void make24() noexcept;

```
- <sup>7</sup> *Effects:* If `*this` is a 12-hour time, converts to a 24-hour time. Otherwise, no effects.

```

constexpr void make12() noexcept;

```
- <sup>8</sup> *Effects:* If `*this` is a 24-hour time, converts to a 12-hour time. Otherwise, no effects.

**24.17.9.3 Minutes precision**

[time.tod.minutes]

```

namespace std::chrono {
 template<>
 class time_of_day<minutes> {
 public:
 using precision = chrono::minutes;

 time_of_day() = default;
 explicit constexpr time_of_day(chrono::minutes since_midnight) noexcept;

 constexpr chrono::hours hours() const noexcept;
 constexpr chrono::minutes minutes() const noexcept;

 explicit constexpr operator precision() const noexcept;
 constexpr precision to_duration() const noexcept;

 constexpr void make24() noexcept;
 constexpr void make12() noexcept;
 };
}

```

<sup>1</sup> [Note: This specialization handles hours and minutes since midnight. — end note]

```
explicit constexpr time_of_day(minutes since_midnight) noexcept;
```

<sup>2</sup> *Effects:* Constructs an object of type `time_of_day` in 24-hour format corresponding to `since_midnight` minutes after 00:00:00.

<sup>3</sup> *Ensures:* `hours()` returns the integral number of hours `since_midnight` is after 00:00:00. `minutes()` returns the integral number of minutes `since_midnight` is after (00:00:00 + `hours()`).

```
constexpr chrono::hours hours() const noexcept;
```

<sup>4</sup> *Returns:* The stored hour of `*this`.

```
constexpr chrono::minutes minutes() const noexcept;
```

<sup>5</sup> *Returns:* The stored minute of `*this`.

```
explicit constexpr operator precision() const noexcept;
```

<sup>6</sup> *Returns:* The number of minutes since midnight.

```
constexpr precision to_duration() const noexcept;
```

<sup>7</sup> *Returns:* `precision{*this}`.

```
constexpr void make24() noexcept;
```

<sup>8</sup> *Effects:* If `*this` is a 12-hour time, converts to a 24-hour time. Otherwise, no effects.

```
constexpr void make12() noexcept;
```

<sup>9</sup> *Effects:* If `*this` is a 24-hour time, converts to a 12-hour time. Otherwise, no effects.

**24.17.9.4 Seconds precision**

[time.tod.seconds]

```

namespace std::chrono {
 template<>
 class time_of_day<seconds> {
 public:
 using precision = chrono::seconds;

 time_of_day() = default;
 explicit constexpr time_of_day(chrono::seconds since_midnight) noexcept;

 constexpr chrono::hours hours() const noexcept;
 constexpr chrono::minutes minutes() const noexcept;
 constexpr chrono::seconds seconds() const noexcept;
 };
}

```

```

 explicit constexpr operator precision() const noexcept;
 constexpr precision to_duration() const noexcept;

 constexpr void make24() noexcept;
 constexpr void make12() noexcept;
};
}

```

1 [Note: This specialization handles hours, minutes, and seconds since midnight. — *end note*]

```
explicit constexpr time_of_day(seconds since_midnight) noexcept;
```

2 *Effects:* Constructs an object of type `time_of_day` in 24-hour format corresponding to `since_midnight` seconds after 00:00:00.

3 *Ensures:* `hours()` returns the integral number of hours `since_midnight` is after 00:00:00. `minutes()` returns the integral number of minutes `since_midnight` is after (00:00:00 + `hours()`). `seconds()` returns the integral number of seconds `since_midnight` is after (00:00:00 + `hours()` + `minutes()`).

```
constexpr chrono::hours hours() const noexcept;
```

4 *Returns:* The stored hour of `*this`.

```
constexpr chrono::minutes minutes() const noexcept;
```

5 *Returns:* The stored minute of `*this`.

```
constexpr chrono::seconds seconds() const noexcept;
```

6 *Returns:* The stored second of `*this`.

```
explicit constexpr operator precision() const noexcept;
```

7 *Returns:* The number of seconds since midnight.

```
constexpr precision to_duration() const noexcept;
```

8 *Returns:* `precision{*this}`.

```
constexpr void make24() noexcept;
```

9 *Effects:* If `*this` is a 12-hour time, converts to a 24-hour time. Otherwise, no effects.

```
constexpr void make12() noexcept;
```

10 *Effects:* If `*this` is a 24-hour time, converts to a 12-hour time. Otherwise, no effects.

#### 24.17.9.5 Sub-second precision

[`time.tod.subsecond`]

```

namespace std::chrono {
 template<class Rep, class Period>
 class time_of_day<duration<Rep, Period>> {
 public:
 using precision = duration<Rep, Period>;

 time_of_day() = default;
 explicit constexpr time_of_day(precision since_midnight) noexcept;

 constexpr chrono::hours hours() const noexcept;
 constexpr chrono::minutes minutes() const noexcept;
 constexpr chrono::seconds seconds() const noexcept;
 constexpr precision subseconds() const noexcept;

 explicit constexpr operator precision() const noexcept;
 constexpr precision to_duration() const noexcept;

 constexpr void make24() noexcept;
 constexpr void make12() noexcept;
 };
}

```

- <sup>1</sup> This specialization shall not exist unless `treat_as_floating_point_v<Rep>` is false and `duration<Rep, Period>` is not convertible to `seconds`. [*Note:* This specialization handles hours, minutes, seconds, and fractional seconds since midnight. Typical uses are with milliseconds, microseconds and nanoseconds. — *end note*]

```
explicit constexpr time_of_day(precision since_midnight) noexcept;
```

- <sup>2</sup> *Effects:* Constructs an object of type `time_of_day` in 24-hour format corresponding to `since_midnight` fractional seconds after 00:00:00.

- <sup>3</sup> *Ensures:* `hours()` returns the integral number of hours `since_midnight` is after 00:00:00. `minutes()` returns the integral number of minutes `since_midnight` is after (00:00:00 + `hours()`). `seconds()` returns the integral number of seconds `since_midnight` is after (00:00:00 + `hours()` + `minutes()`). `subseconds()` returns the integral number of fractional seconds `since_midnight` is after (00:00:00 + `hours()` + `minutes()` + `seconds()`).

```
constexpr chrono::hours hours() const noexcept;
```

- <sup>4</sup> *Returns:* The stored hour of `*this`.

```
constexpr chrono::minutes minutes() const noexcept;
```

- <sup>5</sup> *Returns:* The stored minute of `*this`.

```
constexpr chrono::seconds seconds() const noexcept;
```

- <sup>6</sup> *Returns:* The stored second of `*this`.

```
constexpr duration<Rep, Period> subseconds() const noexcept;
```

- <sup>7</sup> *Returns:* The stored subsecond of `*this`.

```
explicit constexpr operator precision() const noexcept;
```

- <sup>8</sup> *Returns:* The number of subseconds since midnight.

```
constexpr precision to_duration() const noexcept;
```

- <sup>9</sup> *Returns:* `precision{*this}`.

```
constexpr void make24() noexcept;
```

- <sup>10</sup> *Effects:* If `*this` is a 12-hour time, converts to a 24-hour time. Otherwise, no effects.

```
constexpr void make12() noexcept;
```

- <sup>11</sup> *Effects:* If `*this` is a 24-hour time, converts to a 12-hour time. Otherwise, no effects.

### 24.17.9.6 Formatted output

[[time.tod.io](#)]

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>&
```

```
operator<<(basic_ostream<charT, traits>& os, const time_of_day<hours>& t);
```

- <sup>1</sup> *Effects:* If `t` is a 24-hour time, outputs to `os` according to the format `"%H00"` (24.17.11). Otherwise outputs to `os` according to the format `"%I%p"` (24.17.11).

- <sup>2</sup> *Returns:* `os`.

- <sup>3</sup> [*Example:*

```
for (hours h : {1h, 18h}) {
 time_of_day<hours> tod(h);
 os << tod << '\n';
 tod.make12();
 os << tod << '\n';
}
```

Produces the output:

```
0100
1am
1800
6pm
```

— end example]

```
template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const time_of_day<minutes>& t);
```

4 *Effects:* If *t* is a 24-hour time, outputs to *os* according to the format "%H:%M" (24.17.11). Otherwise outputs to *os* according to the format "%I:%M%p" (24.17.11).

5 *Returns:* *os*.

[*Example:*

```
for (minutes m : {68min, 1095min}) {
 time_of_day<minutes> tod(m);
 os << tod << '\n';
 tod.make12();
 os << tod << '\n';
}
```

Produces the output:

```
01:08
1:08am
18:15
6:15pm
```

— end example]

```
template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const time_of_day<seconds>& t);
```

6 *Effects:* If *t* is a 24-hour time, outputs to *os* according to the format "%T" (24.17.11). Otherwise outputs to *os* according to the format "%I:%M:%S%p" (24.17.11).

7 *Returns:* *os*.

[*Example:*

```
for (seconds s : {4083s, 65745s}) {
 time_of_day<seconds> tod(s);
 os << tod << '\n';
 tod.make12();
 os << tod << '\n';
}
```

Produces the output:

```
01:08:03
1:08:03am
18:15:45
6:15:45pm
```

— end example]

```
template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const time_of_day<duration<Rep, Period>>& t);
```

8 *Effects:* If *t* is a 24-hour time, outputs to *os* according to the format "%T" (24.17.11). Otherwise outputs to *os* according to the format "%I:%M:%S%p" (24.17.11).

9 *Returns:* *os*.

[*Example:*

```
for (milliseconds ms : {4083007ms, 65745123ms}) {
 time_of_day<seconds> tod(ms);
 os << tod << '\n';
 tod.make12();
 os << tod << '\n';
}
```



Produces the output:

```
01:08:03.007
1:08:03.007am
18:15:45.123
6:15:45.123pm
```

— *end example*]

## 24.17.10 Time zones [time.zone]

### 24.17.10.1 In general [time.zone.general]

- <sup>1</sup> 24.17.10 describes an interface for accessing the IANA Time Zone database described in RFC 6557, that interoperates with `sys_time` and `local_time`. This interface provides time zone support to both the civil calendar types (24.17.8) and to user-defined calendars.

### 24.17.10.2 Time zone database [time.zone.db]

#### 24.17.10.2.1 Class `tzdb` [time.zone.db.tzdb]

```
namespace std::chrono {
 struct tzdb {
 string version;
 vector<time_zone> zones;
 vector<link> links;
 vector<leap> leaps;

 const time_zone* locate_zone(string_view tz_name) const;
 const time_zone* current_zone() const;
 };
}
```

- <sup>1</sup> Each vector in a `tzdb` object is sorted to enable fast lookup.

```
const time_zone* locate_zone(string_view tz_name) const;
```

- <sup>2</sup> *Returns:* If a `time_zone` is found for which `name() == tz_name`, returns a pointer to that `time_zone`. Otherwise if a `link` is found for which `tz_name == link.name()`, then a pointer is returned to the `time_zone` for which `zone.name() == link.target()`. [*Note:* A `link` specifies an alternative name for a `time_zone`. — *end note*]

*Throws:* If a `const time_zone*` cannot be found as described in the *Returns:* clause, throws a `runtime_error`. [*Note:* On non-exceptional return, the return value is always a pointer to a valid `time_zone`. — *end note*]

```
const time_zone* current_zone() const;
```

- <sup>3</sup> *Returns:* A pointer to the time zone which the computer has set as its local time zone.

#### 24.17.10.2.2 Class `tzdb_list` [time.zone.db.list]

```
namespace std::chrono {
 class tzdb_list {
 public:
 tzdb_list(const tzdb_list&) = delete;
 tzdb_list& operator=(const tzdb_list&) = delete;

 // unspecified additional constructors

 class const_iterator;

 const tzdb& front() const noexcept;

 const_iterator erase_after(const_iterator p);

 const_iterator begin() const noexcept;
 const_iterator end() const noexcept;
 };
}
```

```

 const_iterator cbegin() const noexcept;
 const_iterator cend() const noexcept;
};
}

```

1 The `tzdb_list` database is a singleton; the unique object of type `tzdb_list` can be accessed via the `get_tzdb_list()` function. [Note: This access is only needed for those applications that need to have long uptimes and have a need to update the time zone database while running. Other applications can implicitly access the `front()` of this list via the read-only namespace scope functions `get_tzdb()`, `locate_zone()`, and `current_zone()`. — end note] The `tzdb_list` object contains a list of `tzdb` objects.

2 `tzdb_list::const_iterator` is a constant iterator which meets the *Cpp17ForwardIterator* requirements and has a value type of `tzdb`.

```
const tzdb& front() const noexcept;
```

3 *Returns:* A reference to the first `tzdb` in the container.

4 *Remarks:* This operation is thread-safe with respect to `reload_tzdb()`. [Note: `reload_tzdb()` pushes a new `tzdb` onto the front of this container. — end note]

```
const_iterator erase_after(const_iterator p);
```

5 *Requires:* The iterator following `p` is dereferenceable.

6 *Effects:* Erases the `tzdb` referred to by the iterator following `p`.

7 *Returns:* An iterator pointing to the element following the one that was erased, or `end()` if no such element exists.

8 *Remarks:* No pointers, references, or iterators are invalidated except those referring to the erased `tzdb`. [Note: It is not possible to erase the `tzdb` referred to by `begin()`. — end note]

9 *Throws:* Nothing.

```
const_iterator begin() const noexcept;
```

10 *Returns:* An iterator referring to the first `tzdb` in the container.

```
const_iterator end() const noexcept;
```

11 *Returns:* An iterator referring to the position one past the last `tzdb` in the container.

```
const_iterator cbegin() const noexcept;
```

12 *Returns:* `begin()`.

```
const_iterator cend() const noexcept;
```

13 *Returns:* `end()`.

### 24.17.10.2.3 Time zone database access

[time.zone.db.access]

```
tzdb_list& get_tzdb_list();
```

1 *Effects:* If this is the first access to the time zone database, initializes the database. If this call initializes the database, the resulting database will be a `tzdb_list` holding a single initialized `tzdb`.

2 *Returns:* A reference to the database.

3 *Remarks:* It is safe to call this function from multiple threads at one time.

4 *Throws:* `runtime_error` if for any reason a reference cannot be returned to a valid `tzdb_list` containing one or more valid `tzdb`s.

```
const tzdb& get_tzdb();
```

5 *Returns:* `get_tzdb_list().front()`.

```
const time_zone* locate_zone(string_view tz_name);
```

6 *Returns:* `get_tzdb().locate_zone(tz_name)`.

7 [Note: The time zone database will be initialized if this is the first reference to the database. — end note]

```
const time_zone* current_zone();
```

8 *Returns:* `get_tzdb().current_zone()`.

#### 24.17.10.2.4 Remote time zone database support [time.zone.db.remote]

1 The local time zone database is that supplied by the implementation when the program first accesses the database, for example via `current_zone()`. While the program is running, the implementation may choose to update the time zone database. This update shall not impact the program in any way unless the program calls the functions in this subclause. This potentially updated time zone database is referred to as the *remote time zone database*.

```
const tzdb& reload_tzdb();
```

2 *Effects:* This function first checks the version of the remote time zone database. If the versions of the local and remote databases are the same, there are no effects. Otherwise the remote database is pushed to the front of the `tzdb_list` accessed by `get_tzdb_list()`.

3 *Returns:* `get_tzdb_list().front()`.

4 *Remarks:* No pointers, references, or iterators are invalidated.

5 *Remarks:* This function is thread-safe with respect to `get_tzdb_list().front()` and `get_tzdb_list().erase_after()`.

6 *Throws:* `runtime_error` if for any reason a reference cannot be returned to a valid `tzdb`.

```
string remote_version();
```

7 *Returns:* The latest remote database version.

[*Note:* This can be compared with `get_tzdb().version` to discover if the local and remote databases are equivalent. — *end note*]

#### 24.17.10.3 Exception classes [time.zone.exception]

##### 24.17.10.3.1 Class `nonexistent_local_time` [time.zone.exception.nonexist]

```
namespace std::chrono {
 class nonexistent_local_time : public runtime_error {
 public:
 template<class Duration>
 nonexistent_local_time(const local_time<Duration>& tp, const local_info& i);
 };
}
```

1 `nonexistent_local_time` is thrown when an attempt is made to convert a non-existent `local_time` to a `sys_time` without specifying `choose::earliest` or `choose::latest`.

```
template<class Duration>
 nonexistent_local_time(const local_time<Duration>& tp, const local_info& i);
```

2 *Requires:* `i.result == local_info::nonexistent`.

3 *Effects:* Constructs a `nonexistent_local_time` by initializing the base class with a sequence of `char` equivalent to that produced by `os.str()` initialized as shown below:

```
ostringstream os;
os << tp << " is in a gap between\n"
 << local_seconds{i.first.end.time_since_epoch()} + i.first.offset << ' '
 << i.first.abbrev << " and\n"
 << local_seconds{i.second.begin.time_since_epoch()} + i.second.offset << ' '
 << i.second.abbrev
 << " which are both equivalent to\n"
 << i.first.end << " UTC";
```

4 [*Example:*

```
#include <chrono>
#include <iostream>

int main() {
 using namespace std::chrono;
```

```

try {
 auto zt = zoned_time{"America/New_York",
 local_days{Sunday[2]/March/2016} + 2h + 30min};
} catch (const nonexistent_local_time& e) {
 std::cout << e.what() << '\n';
}
}

```

Produces the output:

```

2016-03-13 02:30:00 is in a gap between
2016-03-13 02:00:00 EST and
2016-03-13 03:00:00 EDT which are both equivalent to
2016-03-13 07:00:00 UTC

```

— *end example*]

### 24.17.10.3.2 Class `ambiguous_local_time` [time.zone.exception.ambig]

```

namespace std::chrono {
 class ambiguous_local_time : public runtime_error {
 public:
 template<class Duration>
 ambiguous_local_time(const local_time<Duration>& tp, const local_info& i);
 };
}

```

- <sup>1</sup> `ambiguous_local_time` is thrown when an attempt is made to convert an `ambiguous_local_time` to a `sys_time` without specifying `choose::earliest` or `choose::latest`.

```

template<class Duration>
ambiguous_local_time(const local_time<Duration>& tp, const local_info& i);

```

- <sup>2</sup> *Requires:* `i.result == local_info::ambiguous`.

- <sup>3</sup> *Effects:* Constructs an `ambiguous_local_time` by initializing the base class with a sequence of `char` equivalent to that produced by `os.str()` initialized as shown below:

```

ostringstream os;
os << tp << " is ambiguous. It could be\n"
 << tp << ' ' << i.first.abbrev << " == "
 << tp - i.first.offset << " UTC or\n"
 << tp << ' ' << i.second.abbrev << " == "
 << tp - i.second.offset << " UTC";

```

- <sup>4</sup> [*Example:*

```

#include <chrono>
#include <iostream>

int main() {
 using namespace std::chrono;
 try {
 auto zt = zoned_time{"America/New_York",
 local_days{Sunday[1]/November/2016} + 1h + 30min};
 } catch (const ambiguous_local_time& e) {
 std::cout << e.what() << '\n';
 }
}

```

Produces the output:

```

2016-11-06 01:30:00 is ambiguous. It could be
2016-11-06 01:30:00 EDT == 2016-11-06 05:30:00 UTC or
2016-11-06 01:30:00 EST == 2016-11-06 06:30:00 UTC

```

— *end example*]

### 24.17.10.4 Information classes [time.zone.info]

#### 24.17.10.4.1 Class `sys_info` [time.zone.info.sys]

```

namespace std::chrono {

```

```

struct sys_info {
 sys_seconds begin;
 sys_seconds end;
 seconds offset;
 minutes save;
 string abbrev;
};
}

```

- <sup>1</sup> A `sys_info` structure can be obtained from the combination of a `time_zone` and either a `sys_time` or `local_time`. It can also be obtained from a `zoned_time`, which is effectively a pair of a `time_zone` and `sys_time`.
- <sup>2</sup> [*Note*: This type provides a low-level interface to time zone information. Typical conversions from `sys_time` to `local_time` will use this structure implicitly, not explicitly. — *end note*]
- <sup>3</sup> The `begin` and `end` data members indicate that, for the associated `time_zone` and `time_point`, the `offset` and `abbrev` are in effect in the range `[begin, end)`. This information can be used to efficiently iterate the transitions of a `time_zone`.
- <sup>4</sup> The `offset` data member indicates the UTC offset in effect for the associated `time_zone` and `time_point`. The relationship between `local_time` and `sys_time` is:

```
offset = local_time - sys_time
```

- <sup>5</sup> The `save` data member is extra information not normally needed for conversion between `local_time` and `sys_time`. If `save != 0min`, this `sys_info` is said to be on “daylight saving” time, and `offset - save` suggests what offset this `time_zone` might use if it were off daylight saving time. However, this information should not be taken as authoritative. The only sure way to get such information is to query the `time_zone` with a `time_point` that returns a `sys_info` where `save == 0min`. There is no guarantee what `time_point` might return such a `sys_info` except that it is guaranteed not to be in the range `[begin, end)` (if `save != 0min` for this `sys_info`).
- <sup>6</sup> The `abbrev` data member indicates the current abbreviation used for the associated `time_zone` and `time_point`. Abbreviations are not unique among the `time_zones`, and so one cannot reliably map abbreviations back to a `time_zone` and UTC offset.

```

template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const sys_info& r);

```

- <sup>7</sup> *Effects*: Streams out the `sys_info` object `r` in an unspecified format.

#### 24.17.10.4.2 Class `local_info`

[`time.zone.info.local`]

```

namespace std::chrono {
struct local_info {
 static constexpr int unique = 0;
 static constexpr int nonexistent = 1;
 static constexpr int ambiguous = 2;

 int result;
 sys_info first;
 sys_info second;
};
}

```

- <sup>1</sup> [*Note*: This type provides a low-level interface to time zone information. Typical conversions from `local_time` to `sys_time` will use this structure implicitly, not explicitly. — *end note*]
- <sup>2</sup> Describes the result of converting a `local_time` to a `sys_time` as follows:
- (2.1) — When a `local_time` to `sys_time` conversion is unique, `result == unique`, `first` will be filled out with the correct `sys_info`, and `second` will be zero-initialized.
- (2.2) — If the conversion stems from a nonexistent `local_time` then `result == nonexistent`, `first` will be filled out with the `sys_info` that ends just prior to the `local_time`, and `second` will be filled out with the `sys_info` that begins just after the `local_time`.

- (2.3) — If the conversion stems from an ambiguous `local_time`, then `result == ambiguous`, `first` will be filled out with the `sys_info` that ends just after the `local_time`, and `second` will be filled out with the `sys_info` that starts just before the `local_time`.

```
template<class charT, class traits>
 basic_ostream<charT, traits>&
 operator<<(basic_ostream<charT, traits>& os, const local_info& r);
```

- 3 Streams out the `local_info` object `r` in an unspecified format.

### 24.17.10.5 Class `time_zone`

[time.zone.timezone]

#### 24.17.10.5.1 Overview

[time.zone.overview]

```
namespace std::chrono {
 class time_zone {
 public:
 time_zone(time_zone&&) = default;
 time_zone& operator=(time_zone&&) = default;

 // unspecified additional constructors

 string_view name() const noexcept;

 template<class Duration> sys_info get_info(const sys_time<Duration>& st) const;
 template<class Duration> local_info get_info(const local_time<Duration>& tp) const;

 template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 to_sys(const local_time<Duration>& tp) const;

 template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 to_sys(const local_time<Duration>& tp, choose z) const;

 template<class Duration>
 local_time<common_type_t<Duration, seconds>>
 to_local(const sys_time<Duration>& tp) const;
 };
}
```

- <sup>1</sup> A `time_zone` represents all time zone transitions for a specific geographic area. `time_zone` construction is unspecified, and performed as part of database initialization. [Note: `const time_zone` objects can be accessed via functions such as `locate_zone`. — end note]

#### 24.17.10.5.2 Member functions

[time.zone.members]

```
string_view name() const noexcept;
```

- <sup>1</sup> *Returns:* The name of the `time_zone`.

- <sup>2</sup> [Example: "America/New\_York". — end example]

```
template<class Duration>
 sys_info get_info(const sys_time<Duration>& st) const;
```

- <sup>3</sup> *Returns:* A `sys_info` `i` for which `st` is in the range `[i.begin, i.end)`.

```
template<class Duration>
 local_info get_info(const local_time<Duration>& tp) const;
```

- <sup>4</sup> *Returns:* A `local_info` for `tp`.

```
template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 to_sys(const local_time<Duration>& tp) const;
```

- <sup>5</sup> *Returns:* A `sys_time` that is at least as fine as `seconds`, and will be finer if the argument `tp` has finer precision. This `sys_time` is the UTC equivalent of `tp` according to the rules of this `time_zone`.

- 6 *Throws:* If the conversion from `tp` to a `sys_time` is ambiguous, throws `ambiguous_local_time`. If the `tp` represents a non-existent time between two UTC `time_points`, throws `nonexistent_local_time`.

```
template<class Duration>
 sys_time<common_type_t<Duration, seconds>>
 to_sys(const local_time<Duration>& tp, choose z) const;
```

- 7 *Returns:* A `sys_time` that is at least as fine as `seconds`, and will be finer if the argument `tp` has finer precision. This `sys_time` is the UTC equivalent of `tp` according to the rules of this `time_zone`. If the conversion from `tp` to a `sys_time` is ambiguous, returns the earlier `sys_time` if `z == choose::earliest`, and returns the later `sys_time` if `z == choose::latest`. If the `tp` represents a non-existent time between two UTC `time_points`, then the two UTC `time_points` will be the same, and that UTC `time_point` will be returned.

```
template<class Duration>
 local_time<common_type_t<Duration, seconds>>
 to_local(const sys_time<Duration>& tp) const;
```

- 8 *Returns:* The `local_time` associated with `tp` and this `time_zone`.

### 24.17.10.5.3 Non-member functions

[time.zone.nonmembers]

```
bool operator==(const time_zone& x, const time_zone& y) noexcept;
```

- 1 *Returns:* `x.name() == y.name()`.

```
bool operator<(const time_zone& x, const time_zone& y) noexcept;
```

- 2 *Returns:* `x.name() < y.name()`.

### 24.17.10.6 Class template `zoned_traits`

[time.zone.zonedtraits]

```
namespace std::chrono {
 template<class T> struct zoned_traits {};
}
```

- 1 `zoned_traits` provides a means for customizing the behavior of `zoned_time<Duration, TimeZonePtr>` for the `zoned_time` default constructor, and constructors taking `string_view`. A specialization for `const time_zone*` is provided by the implementation:

```
namespace std::chrono {
 template<> struct zoned_traits<const time_zone*> {
 static const time_zone* default_zone();
 static const time_zone* locate_zone(string_view name);
 };
}
```

```
static const time_zone* default_zone();
```

- 2 *Returns:* `std::chrono::locate_zone("UTC")`.

```
static const time_zone* locate_zone(string_view name);
```

- 3 *Returns:* `std::chrono::locate_zone(name)`.

### 24.17.10.7 Class template `zoned_time`

[time.zone.zonedtime]

#### 24.17.10.7.1 Overview

[time.zone.zonedtime.overview]

```
namespace std::chrono {
 template<class Duration, class TimeZonePtr = const time_zone*>
 class zoned_time {
 public:
 using duration = common_type_t<Duration, seconds>;

 private:
 TimeZonePtr zone_; // exposition only
 sys_time<duration> tp_; // exposition only

 using traits = zoned_traits<TimeZonePtr>; // exposition only
```

```

public:
 zoned_time();
 zoned_time(const zoned_time&) = default;
 zoned_time& operator=(const zoned_time&) = default;

 zoned_time(const sys_time<Duration>& st);
 explicit zoned_time(TimeZonePtr z);
 explicit zoned_time(string_view name);

 template<class Duration2>
 zoned_time(const zoned_time<Duration2, TimeZonePtr>& zt) noexcept;

 zoned_time(TimeZonePtr z, const sys_time<Duration>& st);
 zoned_time(string_view name, const sys_time<Duration>& st);

 zoned_time(TimeZonePtr z, const local_time<Duration>& tp);
 zoned_time(string_view name, const local_time<Duration>& tp);
 zoned_time(TimeZonePtr z, const local_time<Duration>& tp, choose c);
 zoned_time(string_view name, const local_time<Duration>& tp, choose c);

 template<class Duration2, class TimeZonePtr2>
 zoned_time(TimeZonePtr z, const zoned_time<Duration2, TimeZonePtr2>& zt);
 template<class Duration2, class TimeZonePtr2>
 zoned_time(TimeZonePtr z, const zoned_time<Duration2, TimeZonePtr2>& zt, choose);

 zoned_time(string_view name, const zoned_time<Duration>& zt);
 zoned_time(string_view name, const zoned_time<Duration>& zt, choose);

 zoned_time& operator=(const sys_time<Duration>& st);
 zoned_time& operator=(const local_time<Duration>& ut);

 operator sys_time<duration>() const;
 explicit operator local_time<duration>() const;

 TimeZonePtr get_time_zone() const;
 local_time<duration> get_local_time() const;
 sys_time<duration> get_sys_time() const;
 sys_info get_info() const;
};

zoned_time() -> zoned_time<seconds>;

template<class Duration>
 zoned_time(sys_time<Duration>)
 -> zoned_time<common_type_t<Duration, seconds>>;

template<class TimeZonePtr, class Duration>
 zoned_time(TimeZonePtr, sys_time<Duration>)
 -> zoned_time<common_type_t<Duration, seconds>, TimeZonePtr>;

template<class TimeZonePtr, class Duration>
 zoned_time(TimeZonePtr, local_time<Duration>, choose = choose::earliest)
 -> zoned_time<common_type_t<Duration, seconds>, TimeZonePtr>;

template<class TimeZonePtr, class Duration>
 zoned_time(TimeZonePtr, zoned_time<Duration>, choose = choose::earliest)
 -> zoned_time<common_type_t<Duration, seconds>, TimeZonePtr>;

zoned_time(string_view) -> zoned_time<seconds>;

template<class Duration>
 zoned_time(string_view, sys_time<Duration>)
 -> zoned_time<common_type_t<Duration, seconds>>;

```



```

template<class Duration>
 zoned_time(string_view, local_time<Duration>, choose = choose::earliest)
 -> zoned_time<common_type_t<Duration, seconds>>;

template<class Duration, class TimeZonePtr, class TimeZonePtr2>
 zoned_time(TimeZonePtr, zoned_time<Duration, TimeZonePtr2>, choose = choose::earliest)
 -> zoned_time<Duration, TimeZonePtr>;
}

```

<sup>1</sup> `zoned_time` represents a logical pairing of a `time_zone` and a `time_point` with precision `Duration`. `zoned_time<Duration>` maintains the invariant that it always refers to a valid time zone and represents a point in time that exists and is not ambiguous in that time zone.

<sup>2</sup> If `Duration` is not a specialization of `chrono::duration`, the program is ill-formed.

#### 24.17.10.7.2 Constructors [time.zone.zonedtime.ctor]

```
zoned_time();
```

<sup>1</sup> *Remarks:* This constructor does not participate in overload resolution unless `traits::default_zone()` is a well-formed expression.

<sup>2</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `traits::default_zone()` and default constructing `tp_`.

```
zoned_time(const sys_time<Duration>& st);
```

<sup>3</sup> *Remarks:* This constructor does not participate in overload resolution unless `traits::default_zone()` is a well-formed expression.

<sup>4</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `traits::default_zone()` and `tp_` with `st`.

```
explicit zoned_time(TimeZonePtr z);
```

<sup>5</sup> *Requires:* `z` refers to a time zone.

<sup>6</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `std::move(z)`.

```
explicit zoned_time(string_view name);
```

<sup>7</sup> *Remarks:* This constructor does not participate in overload resolution unless `traits::locate_zone(string_view{})` is a well-formed expression and `zoned_time` is constructible from the return type of `traits::locate_zone(string_view{})`.

<sup>8</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `traits::locate_zone(name)` and default constructing `tp_`.

```
template<class Duration2>
 zoned_time(const zoned_time<Duration2, TimeZonePtr>& y) noexcept;
```

<sup>9</sup> *Remarks:* Does not participate in overload resolution unless `sys_time<Duration2>` is implicitly convertible to `sys_time<Duration>`.

<sup>10</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `y.zone_` and `tp_` with `y.tp_`.

```
zoned_time(TimeZonePtr z, const sys_time<Duration>& st);
```

<sup>11</sup> *Requires:* `z` refers to a time zone.

<sup>12</sup> *Effects:* Constructs a `zoned_time` by initializing `zone_` with `std::move(z)` and `tp_` with `st`.

```
zoned_time(string_view name, const sys_time<Duration>& st);
```

<sup>13</sup> *Remarks:* This constructor does not participate in overload resolution unless `zoned_time` is constructible from the return type of `traits::locate_zone(name)` and `st`.

<sup>14</sup> *Effects:* Equivalent to construction with `{traits::locate_zone(name), st}`.

```
zoned_time(TimeZonePtr z, const local_time<Duration>& tp);
```

<sup>15</sup> *Requires:* `z` refers to a time zone.

<sup>16</sup> *Remarks:* This constructor does not participate in overload resolution unless

```
decltype(declval<TimeZonePtr>()->to_sys(local_time<Duration>{}))
```

is convertible to `sys_time<duration>`.

17 *Effects:* Constructs a `zoned_time` by initializing `zone_` with `std::move(z)` and `tp_` with `zone_->to_sys(tp)`.

```
zoned_time(string_view name, const local_time<Duration>& tp);
```

18 *Remarks:* This constructor does not participate in overload resolution unless `zoned_time` is constructible from the return type of `traits::locate_zone(name)` and `tp`.

19 *Effects:* Equivalent to construction with `{traits::locate_zone(name), tp}`.

```
zoned_time(TimeZonePtr z, const local_time<Duration>& tp, choose c);
```

20 *Requires:* `z` refers to a time zone.

21 *Remarks:* This constructor does not participate in overload resolution unless

```
decltype(declval<TimeZonePtr>()->to_sys(local_time<Duration>{}, choose::earliest))
```

is convertible to `sys_time<duration>`.

22 *Effects:* Constructs a `zoned_time` by initializing `zone_` with `std::move(z)` and `tp_` with `zone_->to_sys(tp, c)`.

```
zoned_time(string_view name, const local_time<Duration>& tp, choose c);
```

23 *Remarks:* This constructor does not participate in overload resolution unless `zoned_time` is constructible from the return type of `traits::locate_zone(name)`, `local_time<Duration>`, and `choose`.

24 *Effects:* Equivalent to construction with `{traits::locate_zone(name), tp, c}`.

```
template<class Duration2, class TimeZonePtr2>
```

```
zoned_time(TimeZonePtr z, const zoned_time<Duration2, TimeZonePtr2>& y);
```

25 *Remarks:* Does not participate in overload resolution unless `sys_time<Duration2>` is implicitly convertible to `sys_time<Duration>`.

26 *Requires:* `z` refers to a valid time zone.

27 *Effects:* Constructs a `zoned_time` by initializing `zone_` with `std::move(z)` and `tp_` with `y.tp_`.

```
template<class Duration2, class TimeZonePtr2>
```

```
zoned_time(TimeZonePtr z, const zoned_time<Duration2, TimeZonePtr2>& y, choose);
```

28 *Remarks:* Does not participate in overload resolution unless `sys_time<Duration2>` is implicitly convertible to `sys_time<Duration>`.

29 *Requires:* `z` refers to a valid time zone.

30 *Effects:* Equivalent to construction with `{z, y}`.

31 [Note: The `choose` parameter has no effect. — end note]

```
zoned_time(string_view name, const zoned_time<Duration>& y);
```

32 *Remarks:* This constructor does not participate in overload resolution unless `zoned_time` is constructible from the return type of `traits::locate_zone(name)` and `zoned_time`.

33 *Effects:* Equivalent to construction with `{traits::locate_zone(name), y}`.

```
zoned_time(string_view name, const zoned_time<Duration>& y, choose c);
```

34 *Remarks:* This constructor does not participate in overload resolution unless `zoned_time` is constructible from the return type of `traits::locate_zone(name)`, `zoned_time`, and `choose`.

35 *Effects:* Equivalent to construction with `{traits::locate_zone(name), y, c}`.

36 [Note: The `choose` parameter has no effect. — end note]

### 24.17.10.7.3 Member functions

[time.zone.zonedtime.members]

```
zoned_time& operator=(const sys_time<Duration>& st);
```

1 *Effects:* After assignment, `get_sys_time() == st`. This assignment has no effect on the return value

of `get_time_zone()`.

2 *Returns:* `*this`.

`zoned_time& operator=(const local_time<Duration>& lt);`

3 *Effects:* After assignment, `get_local_time() == lt`. This assignment has no effect on the return value of `get_time_zone()`.

4 *Returns:* `*this`.

`operator sys_time<duration>() const;`

5 *Returns:* `get_sys_time()`.

`explicit operator local_time<duration>() const;`

6 *Returns:* `get_local_time()`.

`TimeZonePtr get_time_zone() const;`

7 *Returns:* `zone_`.

`local_time<duration> get_local_time() const;`

8 *Returns:* `zone_->to_local(tp_)`.

`sys_time<duration> get_sys_time() const;`

9 *Returns:* `tp_`.

`sys_info get_info() const;`

10 *Returns:* `zone_->get_info(tp_)`.

#### 24.17.10.7.4 Non-member functions

[time.zone.zonedtime.nonmembers]

```
template<class Duration1, class Duration2, class TimeZonePtr>
bool operator==(const zoned_time<Duration1, TimeZonePtr>& x,
 const zoned_time<Duration2, TimeZonePtr>& y);
```

1 *Returns:* `x.zone_ == y.zone_ && x.tp_ == y.tp_`.

```
template<class Duration1, class Duration2, class TimeZonePtr>
bool operator!=(const zoned_time<Duration1, TimeZonePtr>& x,
 const zoned_time<Duration2, TimeZonePtr>& y);
```

2 *Returns:* `!(x == y)`.

```
template<class charT, class traits, class Duration, class TimeZonePtr>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os,
 const zoned_time<Duration, TimeZonePtr>& t);
```

3 *Effects:* Streams the value returned from `t.get_local_time()` to `os` using the format `"%F %T %Z"`.

4 *Returns:* `os`.

```
template<class charT, class traits, class Duration, class TimeZonePtr>
basic_ostream<charT, traits>&
to_stream(basic_ostream<charT, traits>& os, const charT* fmt,
 const zoned_time<Duration, TimeZonePtr>& tp);
```

5 *Effects:* First obtains a `sys_info` via `tp.get_info()` which for exposition purposes will be referred to as `info`. Then calls `to_stream(os, fmt, tp.get_local_time(), &info.abbrev, &info.offset)`.

6 *Returns:* `os`.

#### 24.17.10.8 Class leap

[time.zone.leap]

##### 24.17.10.8.1 Overview

[time.zone.leap.overview]

```
namespace std::chrono {
class leap {
public:
 leap(const leap&) = default;
```

```

 leap& operator=(const leap&) = default;

 // unspecified additional constructors

 constexpr sys_seconds date() const noexcept;
};
}

```

<sup>1</sup> Objects of type `leap` representing the date of the leap second insertions are constructed and stored in the time zone database when initialized.

<sup>2</sup> [Example:

```

for (auto& l : get_tzdb().leaps)
 if (l <= 2018y/March/17d)
 cout << l.date() << '\n';

```

Produces the output:

```

1972-07-01 00:00:00
1973-01-01 00:00:00
1974-01-01 00:00:00
1975-01-01 00:00:00
1976-01-01 00:00:00
1977-01-01 00:00:00
1978-01-01 00:00:00
1979-01-01 00:00:00
1980-01-01 00:00:00
1981-07-01 00:00:00
1982-07-01 00:00:00
1983-07-01 00:00:00
1985-07-01 00:00:00
1988-01-01 00:00:00
1990-01-01 00:00:00
1991-01-01 00:00:00
1992-07-01 00:00:00
1993-07-01 00:00:00
1994-07-01 00:00:00
1996-01-01 00:00:00
1997-07-01 00:00:00
1999-01-01 00:00:00
2006-01-01 00:00:00
2009-01-01 00:00:00
2012-07-01 00:00:00
2015-07-01 00:00:00
2017-01-01 00:00:00

```

— end example]

#### 24.17.10.8.2 Member functions

[time.zone.leap.members]

```
constexpr sys_seconds date() const noexcept;
```

<sup>1</sup> *Returns:* The date and time at which the leap second was inserted.

#### 24.17.10.8.3 Non-member functions

[time.zone.leap.nonmembers]

```
constexpr bool operator==(const leap& x, const leap& y) noexcept;
```

<sup>1</sup> *Returns:* `x.date() == y.date()`.

```
constexpr bool operator<(const leap& x, const leap& y) noexcept;
```

<sup>2</sup> *Returns:* `x.date() < y.date()`.

```
template<class Duration>
```

```
 constexpr bool operator==(const leap& x, const sys_time<Duration>& y) noexcept;
```

<sup>3</sup> *Returns:* `x.date() == y`.

```

template<class Duration>
 constexpr bool operator==(const sys_time<Duration>& x, const leap& y) noexcept;
4 Returns: y == x.

template<class Duration>
 constexpr bool operator!=(const leap& x, const sys_time<Duration>& y) noexcept;
5 Returns: !(x == y).

template<class Duration>
 constexpr bool operator!=(const sys_time<Duration>& x, const leap& y) noexcept;
6 Returns: !(x == y).

template<class Duration>
 constexpr bool operator<(const leap& x, const sys_time<Duration>& y) noexcept;
7 Returns: x.date() < y.

template<class Duration>
 constexpr bool operator<(const sys_time<Duration>& x, const leap& y) noexcept;
8 Returns: x < y.date().

template<class Duration>
 constexpr bool operator>(const leap& x, const sys_time<Duration>& y) noexcept;
9 Returns: y < x.

template<class Duration>
 constexpr bool operator>(const sys_time<Duration>& x, const leap& y) noexcept;
10 Returns: y < x.

template<class Duration>
 constexpr bool operator<=(const leap& x, const sys_time<Duration>& y) noexcept;
11 Returns: !(y < x).

template<class Duration>
 constexpr bool operator<=(const sys_time<Duration>& x, const leap& y) noexcept;
12 Returns: !(y < x).

template<class Duration>
 constexpr bool operator>=(const leap& x, const sys_time<Duration>& y) noexcept;
13 Returns: !(x < y).

template<class Duration>
 constexpr bool operator>=(const sys_time<Duration>& x, const leap& y) noexcept;
14 Returns: !(x < y).

```

### 24.17.10.9 Class link

[time.zone.link]

#### 24.17.10.9.1 Overview

[time.zone.link.overview]

```

namespace std::chrono {
 class link {
 public:
 link(link&&) = default;
 link& operator=(link&&) = default;

 // unspecified additional constructors

 string_view name() const noexcept;
 string_view target() const noexcept;
 };
}

```

<sup>1</sup> A `link` specifies an alternative name for a `time_zone`. `links` are constructed when the time zone database is initialized.

**24.17.10.9.2 Member functions**

[time.zone.link.members]

```
string_view name() const noexcept;
```

1 *Returns:* The alternative name for the time zone.

```
string_view target() const noexcept;
```

2 *Returns:* The name of the `time_zone` for which this link provides an alternative name.

**24.17.10.9.3 Non-member functions**

[time.zone.link.nonmembers]

```
bool operator==(const link& x, const link& y) noexcept;
```

1 *Returns:* `x.name() == y.name()`.

```
bool operator<(const link& x, const link& y) noexcept;
```

2 *Returns:* `x.name() < y.name()`.

**24.17.11 Formatting**

[time.format]

1 Each format overload specified in this subclause calls `to_stream` unqualified, so as to enable argument dependent lookup (6.4.2).

```
template<class charT, class Streamable>
basic_string<charT>
format(const charT* fmt, const Streamable& s);
```

2 *Remarks:* This function shall not participate in overload resolution unless

```
to_stream(declval<basic_ostream<charT>&>(), fmt, s)
```

is a valid expression.

3 *Effects:* Constructs a local variable of type `basic_ostringstream<charT>` (named `os` for exposition purposes). Executes `os.exceptions(ios::failbit | ios::badbit)`. Then calls `to_stream(os, fmt, s)`.

4 *Returns:* `os.str()`.

```
template<class charT, class Streamable>
basic_string<charT>
format(const locale& loc, const charT* fmt, const Streamable& s);
```

5 *Remarks:* This function shall not participate in overload resolution unless

```
to_stream(declval<basic_ostream<charT>&>(), fmt, s)
```

is a valid expression.

6 *Effects:* Constructs a local variable of type `basic_ostringstream<charT>` (named `os` for exposition purposes). Executes `os.exceptions(ios::failbit | ios::badbit)`. Then calls `os.imbue(loc)`. Then calls `to_stream(os, fmt, s)`.

7 *Returns:* `os.str()`.

```
template<class charT, class traits, class Alloc, class Streamable>
basic_string<charT, traits, Alloc>
format(const basic_string<charT, traits, Alloc>& fmt, const Streamable& s);
```

8 *Remarks:* This function shall not participate in overload resolution unless

```
to_stream(declval<basic_ostringstream<charT, traits, Alloc>&>(), fmt.c_str(), s)
```

is a valid expression.

9 *Effects:* Constructs a local variable of type `basic_ostringstream<charT, traits, Alloc>` (named `os` for exposition purposes). Executes `os.exceptions(ios::failbit | ios::badbit)`. Then calls `to_stream(os, fmt.c_str(), s)`.

10 *Returns:* `os.str()`.

```
template<class charT, class traits, class Alloc, class Streamable>
basic_string<charT, traits, Alloc>
format(const locale& loc, const basic_string<charT, traits, Alloc>& fmt, const Streamable& s);
```

- 11 *Remarks:* This function shall not participate in overload resolution unless
- ```
to_stream(declval<basic_ostream<charT, traits, Alloc>&>(), fmt.c_str(), s)
```
- is a valid expression.
- 12 *Effects:* Constructs a local variable of type `basic_ostream<charT, traits, Alloc>` (named `os` for exposition purposes). Then calls `os.imbue(loc)`. Executes `os.exceptions(ios::failbit | ios::badbit)`. Then calls `to_stream(os, fmt.c_str(), s)`.
- 13 *Returns:* `os.str()`.
- 14 The `format` functions call a `to_stream` function with a `basic_ostream`, a formatting string specifier, and a `Streamable` argument. Each `to_stream` overload is customized for each `Streamable` type. However all `to_stream` overloads treat the formatting string specifier according to the following specification:
- 15 The `fmt` string consists of zero or more conversion specifiers and ordinary multibyte characters. A conversion specifier consists of a `%` character, possibly followed by an `E` or `O` modifier character (described below), followed by a character that determines the behavior of the conversion specifier. All ordinary multibyte characters (excluding the terminating null character) are streamed unchanged into the `basic_ostream`.
- 16 Each conversion specifier is replaced by appropriate characters as described in Table 57. Some of the conversion specifiers depend on the locale which is imbued to the `basic_ostream`. If the `Streamable` object does not contain the information the conversion specifier refers to, the value streamed to the `basic_ostream` is unspecified.
- 17 Unless explicitly specified, `Streamable` types will not contain time zone abbreviation and time zone offset information. If available, the conversion specifiers `%Z` and `%z` will format this information (respectively). If the information is not available, and `%Z` or `%z` are contained in `fmt`, `os.setstate(ios_base::failbit)` shall be called.

Table 57 — Meaning of format conversion specifiers

Specifier	Replacement
<code>%a</code>	The locale's abbreviated weekday name. If the value does not contain a valid weekday, <code>setstate(ios::failbit)</code> is called.
<code>%A</code>	The locale's full weekday name. If the value does not contain a valid weekday, <code>setstate(ios::failbit)</code> is called.
<code>%b</code>	The locale's abbreviated month name. If the value does not contain a valid month, <code>setstate(ios::failbit)</code> is called.
<code>%B</code>	The locale's full month name. If the value does not contain a valid month, <code>setstate(ios::failbit)</code> is called.
<code>%c</code>	The locale's date and time representation. The modified command <code>%Ec</code> produces the locale's alternate date and time representation.
<code>%C</code>	The year divided by 100 using floored division. If the result is a single decimal digit, it is prefixed with 0. The modified command <code>%EC</code> produces the locale's alternative representation of the century.
<code>%d</code>	The day of month as a decimal number. If the result is a single decimal digit, it is prefixed with 0. The modified command <code>%Od</code> produces the locale's alternative representation.
<code>%D</code>	Equivalent to <code>%m/%d/%y</code> .
<code>%e</code>	The day of month as a decimal number. If the result is a single decimal digit, it is prefixed with a space. The modified command <code>%Oe</code> produces the locale's alternative representation.
<code>%F</code>	Equivalent to <code>%Y-%m-%d</code> .
<code>%g</code>	The last two decimal digits of the ISO week-based year. If the result is a single digit it is prefixed by 0.
<code>%G</code>	The ISO week-based year as a decimal number. If the result is less than four digits it is left-padded with 0 to four digits.
<code>%h</code>	Equivalent to <code>%b</code> .

Table 57 — Meaning of format conversion specifiers (continued)

Specifier	Replacement
%H	The hour (24-hour clock) as a decimal number. If the result is a single digit, it is prefixed with 0. The modified command %OH produces the locale's alternative representation.
%I	The hour (12-hour clock) as a decimal number. If the result is a single digit, it is prefixed with 0. The modified command %OI produces the locale's alternative representation.
%j	The day of the year as a decimal number. Jan 1 is 001. If the result is less than three digits, it is left-padded with 0 to three digits.
%m	The month as a decimal number. Jan is 01. If the result is a single digit, it is prefixed with 0. The modified command %Om produces the locale's alternative representation.
%M	The minute as a decimal number. If the result is a single digit, it is prefixed with 0. The modified command %OM produces the locale's alternative representation.
%n	A new-line character.
%p	The locale's equivalent of the AM/PM designations associated with a 12-hour clock.
%r	The locale's 12-hour clock time.
%R	Equivalent to %H:%M.
%S	Seconds as a decimal number. If the number of seconds is less than 10, the result is prefixed with 0. If the precision of the input cannot be exactly represented with seconds, then the format is a decimal floating point number with a fixed format and a precision matching that of the precision of the input (or to a microseconds precision if the conversion to floating point decimal seconds cannot be made within 18 fractional digits). The character for the decimal point is localized according to the locale. The modified command %OS produces the locale's alternative representation.
%t	A horizontal-tab character.
%T	Equivalent to %H:%M:%S.
%u	The ISO weekday as a decimal number (1-7), where Monday is 1. The modified command %Ou produces the locale's alternative representation.
%U	The week number of the year as a decimal number. The first Sunday of the year is the first day of week 01. Days of the same year prior to that are in week 00. If the result is a single digit, it is prefixed with 0. The modified command %OU produces the locale's alternative representation.
%V	The ISO week-based week number as a decimal number. If the result is a single digit, it is prefixed with 0. The modified command %OV produces the locale's alternative representation.
%w	The weekday as a decimal number (0-6), where Sunday is 0. The modified command %Ow produces the locale's alternative representation.
%W	The week number of the year as a decimal number. The first Monday of the year is the first day of week 01. Days of the same year prior to that are in week 00. If the result is a single digit, it is prefixed with 0. The modified command %OW produces the locale's alternative representation.
%x	The locale's date representation. The modified command %Ex produces the locale's alternate date representation.
%X	The locale's time representation. The modified command %EX produces the locale's alternate time representation.
%y	The last two decimal digits of the year. If the result is a single digit it is prefixed by 0.
%Y	The year as a decimal number. If the result is less than four digits it is left-padded with 0 to four digits.
%z	The offset from UTC in the ISO 8601 format. For example -0430 refers to 4 hours 30 minutes behind UTC. If the offset is zero, +0000 is used. The modified commands %Ez and %Oz insert a : between the hours and minutes: -04:30. If the offset information is not available, <code>setstate(ios_base::failbit)</code> shall be called.
%Z	The time zone abbreviation. If the time zone abbreviation is not available, <code>setstate(ios_base::failbit)</code> shall be called.
%%	A % character.

24.17.12 Parsing

[time.parse]

- 1 Each `parse` overload specified in this subclause calls `from_stream` unqualified, so as to enable argument dependent lookup (6.4.2).

```
template<class charT, class traits, class Alloc, class Parsable>
    unspecified
    parse(const basic_string<charT, traits, Alloc>& fmt, Parsable& tp);
```

- 2 *Remarks:* This function shall not participate in overload resolution unless `from_stream(declval<basic_istream<charT, traits>&>(), fmt.c_str(), tp)` is a valid expression.

- 3 *Returns:* A manipulator that, when extracted from a `basic_istream<charT, traits>` is, calls `from_stream(is, fmt.c_str(), tp)`.

```
template<class charT, class traits, class Alloc, class Parsable>
    unspecified
    parse(const basic_string<charT, traits, Alloc>& fmt, Parsable& tp,
          basic_string<charT, traits, Alloc>& abbrev);
```

- 4 *Remarks:* This function shall not participate in overload resolution unless `from_stream(declval<basic_istream<charT, traits>&>(), fmt.c_str(), tp, &abbrev)` is a valid expression.

- 5 *Returns:* A manipulator that, when extracted from a `basic_istream<charT, traits>` is, calls `from_stream(is, fmt.c_str(), tp, &abbrev)`.

```
template<class charT, class traits, class Alloc, class Parsable>
    unspecified
    parse(const basic_string<charT, traits, Alloc>& fmt, Parsable& tp,
          minutes& offset);
```

- 6 *Remarks:* This function shall not participate in overload resolution unless `from_stream(declval<basic_istream<charT, traits>&>(), fmt.c_str(), tp, nullptr, &offset)` is a valid expression.

- 7 *Returns:* A manipulator that, when extracted from a `basic_istream<charT, traits>` is, calls `from_stream(is, fmt.c_str(), tp, nullptr, &offset)`.

```
template<class charT, class traits, class Alloc, class Parsable>
    unspecified
    parse(const basic_string<charT, traits, Alloc>& fmt, Parsable& tp,
          basic_string<charT, traits, Alloc>& abbrev, minutes& offset);
```

- 8 *Remarks:* This function shall not participate in overload resolution unless `from_stream(declval<basic_istream<charT, traits>&>(), fmt.c_str(), tp, &abbrev, &offset)` is a valid expression.

- 9 *Returns:* A manipulator that, when extracted from a `basic_istream<charT, traits>` is, calls `from_stream(is, fmt.c_str(), tp, &abbrev, &offset)`.

- 10 All `from_stream` overloads behave as unformatted input functions, except that they have an unspecified effect on the value returned by subsequent calls to `basic_istream<>::gcount()`. Each overload takes a format string containing ordinary characters and flags which have special meaning. Each flag begins with a `%`. Some flags can be modified by `E` or `O`. During parsing each flag interprets characters as parts of date and time types according to the table below. Some flags can be modified by a width parameter given as a positive decimal integer called out as *N* below which governs how many characters are parsed from the stream in interpreting the flag. All characters in the format string that are not represented in the table below, except for white space, are parsed unchanged from the stream. A white space character matches zero or more white space characters in the input stream.

- 11 If the `from_stream` overload fails to parse everything specified by the format string, or if insufficient information is parsed to specify a complete duration, time point, or calendrical data structure, `setstate(ios_base::failbit)` is called on the `basic_istream`.

Table 58 — Meaning of parse flags

Flag	Parsed value
%a	The locale's full or abbreviated case-insensitive weekday name.
%A	Equivalent to %a.
%b	The locale's full or abbreviated case-insensitive month name.
%B	Equivalent to %b.
%c	The locale's date and time representation. The modified command %Ec interprets the locale's alternate date and time representation.
%C	The century as a decimal number. The modified command %NC specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified commands %EC and %OC interpret the locale's alternative representation of the century.
%d	The day of the month as a decimal number. The modified command %Nd specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified command %Ed interprets the locale's alternative representation of the day of the month.
%D	Equivalent to %m/%d/%y.
%e	Equivalent to %d and can be modified like %d.
%F	Equivalent to %Y-%m-%d. If modified with a width <i>N</i> , the width is applied to only %Y.
%g	The last two decimal digits of the ISO week-based year. The modified command %Ng specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required.
%G	The ISO week-based year as a decimal number. The modified command %NG specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 4. Leading zeroes are permitted but not required.
%h	Equivalent to %b.
%H	The hour (24-hour clock) as a decimal number. The modified command %NH specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified command %OH interprets the locale's alternative representation.
%I	The hour (12-hour clock) as a decimal number. The modified command %NI specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required.
%j	The day of the year as a decimal number. Jan 1 is 1. The modified command %Nj specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 3. Leading zeroes are permitted but not required.
%m	The month as a decimal number. Jan is 1. The modified command %Nm specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified command %Om interprets the locale's alternative representation.
%M	The minutes as a decimal number. The modified command %NM specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified command %OM interprets the locale's alternative representation.
%n	Matches one white space character. [Note: %n, %t, and a space can be combined to match a wide range of white-space patterns. For example, "%n " matches one or more white space characters, and "%n%t%t" matches one to three white space characters. — end note]
%p	The locale's equivalent of the AM/PM designations associated with a 12-hour clock. The command %I must precede %p in the format string.
%r	The locale's 12-hour clock time.
%R	Equivalent to %H:%M.

Table 58 — Meaning of parse flags (continued)

Flag	Parsed value
%S	The seconds as a decimal number. The modified command %NS specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2 if the input time has a precision convertible to seconds. Otherwise the default width is determined by the decimal precision of the input and the field is interpreted as a long double in a fixed format. If encountered, the locale determines the decimal point character. Leading zeroes are permitted but not required. The modified command %OS interprets the locale's alternative representation.
%t	Matches zero or one white space characters.
%T	Equivalent to %H:%M:%S.
%u	The ISO weekday as a decimal number (1-7), where Monday is 1. The modified command %Nu specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 1. Leading zeroes are permitted but not required. The modified command %Ou interprets the locale's alternative representation.
%U	The week number of the year as a decimal number. The first Sunday of the year is the first day of week 01. Days of the same year prior to that are in week 00. The modified command %NU specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required.
%V	The ISO week-based week number as a decimal number. The modified command %NV specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required.
%w	The weekday as a decimal number (0-6), where Sunday is 0. The modified command %Nw specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 1. Leading zeroes are permitted but not required. The modified command %Ow interprets the locale's alternative representation.
%W	The week number of the year as a decimal number. The first Monday of the year is the first day of week 01. Days of the same year prior to that are in week 00. The modified command %NW specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required.
%x	The locale's date representation. The modified command %Ex produces the locale's alternate date representation.
%X	The locale's time representation. The modified command %EX produces the locale's alternate time representation.
%y	The last two decimal digits of the year. If the century is not otherwise specified (e.g. with %C), values in the range [69, 99] are presumed to refer to the years 1969 to 1999, and values in the range [00, 68] are presumed to refer to the years 2000 to 2068. The modified command %Ny specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 2. Leading zeroes are permitted but not required. The modified commands %Ey and %Oy interpret the locale's alternative representation.
%Y	The year as a decimal number. The modified command %NY specifies the maximum number of characters to read. If <i>N</i> is not specified, the default is 4. Leading zeroes are permitted but not required. The modified command %EY interprets the locale's alternative representation.
%z	The offset from UTC in the format [+ -]hh[mm]. For example -0430 refers to 4 hours 30 minutes behind UTC, and 04 refers to 4 hours ahead of UTC. The modified commands %Ez and %Oz parse a : between the hours and minutes and render leading zeroes on the hour field optional: [+ -]h[h][:mm]. For example -04:30 refers to 4 hours 30 minutes behind UTC, and 4 refers to 4 hours ahead of UTC.
%Z	The time zone abbreviation or name. A single word is parsed. This word can only contain characters from the basic source character set (5.3) that are alphanumeric, or one of ' _ ', ' / ', ' - ', or ' + '.
%%	A % character is extracted.

24.17.13 Header <ctime> synopsis

[ctime.syn]

```

#define NULL see 21.2.3
#define CLOCKS_PER_SEC see below
#define TIME_UTC see below

namespace std {
    using size_t = see 21.2.4;
    using clock_t = see below;
    using time_t = see below;

    struct timespec;
    struct tm;

    clock_t clock();
    double difftime(time_t time1, time_t time0);
    time_t mktime(struct tm* timeptr);
    time_t time(time_t* timer);
    int timespec_get(timespec* ts, int base);
    char* asctime(const struct tm* timeptr);
    char* ctime(const time_t* timer);
    struct tm* gmtime(const time_t* timer);
    struct tm* localtime(const time_t* timer);
    size_t strftime(char* s, size_t maxsize, const char* format, const struct tm* timeptr);
}

```

- ¹ The contents of the header <ctime> are the same as the C standard library header <time.h>. ²²⁶
- ² The functions asctime, ctime, gmtime, and localtime are not required to avoid data races (20.5.5.9).

SEE ALSO: ISO C 7.27

24.18 Class type_index

[type.index]

24.18.1 Header <typeindex> synopsis

[type.index.synopsis]

```

namespace std {
    class type_index;
    template<class T> struct hash;
    template<> struct hash<type_index>;
}

```

24.18.2 type_index overview

[type.index.overview]

```

namespace std {
    class type_index {
    public:
        type_index(const type_info& rhs) noexcept;
        bool operator==(const type_index& rhs) const noexcept;
        bool operator!=(const type_index& rhs) const noexcept;
        bool operator< (const type_index& rhs) const noexcept;
        bool operator> (const type_index& rhs) const noexcept;
        bool operator<= (const type_index& rhs) const noexcept;
        bool operator>= (const type_index& rhs) const noexcept;
        size_t hash_code() const noexcept;
        const char* name() const noexcept;

    private:
        const type_info* target; // exposition only
        // Note that the use of a pointer here, rather than a reference,
        // means that the default copy/move constructor and assignment
        // operators will be provided and work as expected.
    };
}

```

- ¹ The class type_index provides a simple wrapper for type_info which can be used as an index type in associative containers (27.4) and in unordered associative containers (27.5).

226) strftime supports the C conversion specifiers C, D, e, F, g, G, h, r, R, t, T, u, V, and z, and the modifiers E and O.

24.18.3 type_index members

[type.index.members]

```
type_index(const type_info& rhs) noexcept;
```

1 *Effects:* Constructs a `type_index` object, the equivalent of `target = &rhs`.

```
bool operator==(const type_index& rhs) const noexcept;
```

2 *Returns:* `*target == *rhs.target`.

```
bool operator!=(const type_index& rhs) const noexcept;
```

3 *Returns:* `*target != *rhs.target`.

```
bool operator<(const type_index& rhs) const noexcept;
```

4 *Returns:* `target->before(*rhs.target)`.

```
bool operator>(const type_index& rhs) const noexcept;
```

5 *Returns:* `rhs.target->before(*target)`.

```
bool operator<=(const type_index& rhs) const noexcept;
```

6 *Returns:* `!rhs.target->before(*target)`.

```
bool operator>=(const type_index& rhs) const noexcept;
```

7 *Returns:* `!target->before(*rhs.target)`.

```
size_t hash_code() const noexcept;
```

8 *Returns:* `target->hash_code()`.

```
const char* name() const noexcept;
```

9 *Returns:* `target->name()`.

24.18.4 Hash support

[type.index.hash]

```
template<> struct hash<type_index>;
```

1 For an object `index` of type `type_index`, `hash<type_index>()(index)` shall evaluate to the same result as `index.hash_code()`.

24.19 Execution policies

[execpol]

24.19.1 In general

[execpol.general]

1 This subclause describes classes that are *execution policy* types. An object of an execution policy type indicates the kinds of parallelism allowed in the execution of an algorithm and expresses the consequent requirements on the element access functions. [Example:

```
using namespace std;
vector<int> v = /* ... */;

// standard sequential sort
sort(v.begin(), v.end());

// explicitly sequential sort
sort(execution::seq, v.begin(), v.end());

// permitting parallel execution
sort(execution::par, v.begin(), v.end());

// permitting vectorization as well
sort(execution::par_unseq, v.begin(), v.end());
```

— end example] [Note: Because different parallel architectures may require idiosyncratic parameters for efficient execution, implementations may provide additional execution policies to those described in this standard as extensions. — end note]

24.19.2 Header <execution> synopsis

[execution.syn]

```

namespace std {
    // 24.19.3, execution policy type trait
    template<class T> struct is_execution_policy;
    template<class T> inline constexpr bool is_execution_policy_v = is_execution_policy<T>::value;
}

namespace std::execution {
    // 24.19.4, sequenced execution policy
    class sequenced_policy;

    // 24.19.5, parallel execution policy
    class parallel_policy;

    // 24.19.6, parallel and unsequenced execution policy
    class parallel_unsequenced_policy;

    // 24.19.7, execution policy objects
    inline constexpr sequenced_policy          seq{ unspecified };
    inline constexpr parallel_policy           par{ unspecified };
    inline constexpr parallel_unsequenced_policy par_unseq{ unspecified };
}

```

24.19.3 Execution policy type trait

[execpol.type]

```
template<class T> struct is_execution_policy { see below };
```

- 1 `is_execution_policy` can be used to detect execution policies for the purpose of excluding function signatures from otherwise ambiguous overload resolution participation.
- 2 `is_execution_policy<T>` shall be a *Cpp17UnaryTypeTrait* with a base characteristic of `true_type` if `T` is the type of a standard or implementation-defined execution policy, otherwise `false_type`.
[Note: This provision reserves the privilege of creating non-standard execution policies to the library implementation. — end note]
- 3 The behavior of a program that adds specializations for `is_execution_policy` is undefined.

24.19.4 Sequenced execution policy

[execpol.seq]

```
class execution::sequenced_policy { unspecified };
```

- 1 The class `execution::sequenced_policy` is an execution policy type used as a unique type to disambiguate parallel algorithm overloading and require that a parallel algorithm's execution may not be parallelized.
- 2 During the execution of a parallel algorithm with the `execution::sequenced_policy` policy, if the invocation of an element access function exits via an uncaught exception, `terminate()` shall be called.

24.19.5 Parallel execution policy

[execpol.par]

```
class execution::parallel_policy { unspecified };
```

- 1 The class `execution::parallel_policy` is an execution policy type used as a unique type to disambiguate parallel algorithm overloading and indicate that a parallel algorithm's execution may be parallelized.
- 2 During the execution of a parallel algorithm with the `execution::parallel_policy` policy, if the invocation of an element access function exits via an uncaught exception, `terminate()` shall be called.

24.19.6 Parallel and unsequenced execution policy

[execpol.parunseq]

```
class execution::parallel_unsequenced_policy { unspecified };
```

- 1 The class `execution::parallel_unsequenced_policy` is an execution policy type used as a unique type to disambiguate parallel algorithm overloading and indicate that a parallel algorithm's execution may be parallelized and vectorized.

- ² During the execution of a parallel algorithm with the `execution::parallel_unsequenced_policy` policy, if the invocation of an element access function exits via an uncaught exception, `terminate()` shall be called.

24.19.7 Execution policy objects [execpol.objects]

```
inline constexpr execution::sequenced_policy      execution::seq{ unspecified };
inline constexpr execution::parallel_policy      execution::par{ unspecified };
inline constexpr execution::parallel_unsequenced_policy execution::par_unseq{ unspecified };
```

- ¹ The header `<execution>` declares global objects associated with each type of execution policy.

24.20 Primitive numeric conversions [charconv]

24.20.1 Header `<charconv>` synopsis [charconv.syn]

```
namespace std {
    // floating-point format for primitive numerical conversion
    enum class chars_format {
        scientific = unspecified,
        fixed = unspecified,
        hex = unspecified,
        general = fixed | scientific
    };

    // 24.20.2, primitive numerical output conversion
    struct to_chars_result {
        char* ptr;
        errc ec;
    };

    to_chars_result to_chars(char* first, char* last, see below value, int base = 10);

    to_chars_result to_chars(char* first, char* last, float value);
    to_chars_result to_chars(char* first, char* last, double value);
    to_chars_result to_chars(char* first, char* last, long double value);

    to_chars_result to_chars(char* first, char* last, float value, chars_format fmt);
    to_chars_result to_chars(char* first, char* last, double value, chars_format fmt);
    to_chars_result to_chars(char* first, char* last, long double value, chars_format fmt);

    to_chars_result to_chars(char* first, char* last, float value,
                             chars_format fmt, int precision);
    to_chars_result to_chars(char* first, char* last, double value,
                             chars_format fmt, int precision);
    to_chars_result to_chars(char* first, char* last, long double value,
                             chars_format fmt, int precision);

    // 24.20.3, primitive numerical input conversion
    struct from_chars_result {
        const char* ptr;
        errc ec;
    };

    from_chars_result from_chars(const char* first, const char* last,
                                see below& value, int base = 10);

    from_chars_result from_chars(const char* first, const char* last, float& value,
                                chars_format fmt = chars_format::general);
    from_chars_result from_chars(const char* first, const char* last, double& value,
                                chars_format fmt = chars_format::general);
    from_chars_result from_chars(const char* first, const char* last, long double& value,
                                chars_format fmt = chars_format::general);
}
```

- ¹ The type `chars_format` is a bitmask type (20.4.2.1.4) with elements `scientific`, `fixed`, and `hex`.

24.20.2 Primitive numeric output conversion**[charconv.to.chars]**

- ¹ All functions named `to_chars` convert `value` into a character string by successively filling the range `[first, last)`, where `[first, last)` is required to be a valid range. If the member `ec` of the return value is such that the value is equal to the value of a value-initialized `errc`, the conversion was successful and the member `ptr` is the one-past-the-end pointer of the characters written. Otherwise, the member `ec` has the value `errc::value_too_large`, the member `ptr` has the value `last`, and the contents of the range `[first, last)` are unspecified.
- ² The functions that take a floating-point `value` but not a `precision` parameter ensure that the string representation consists of the smallest number of characters such that there is at least one digit before the radix point (if present) and parsing the representation using the corresponding `from_chars` function recovers `value` exactly. [*Note*: This guarantee applies only if `to_chars` and `from_chars` are executed on the same implementation. — *end note*] If there are several such representations, the representation with the smallest difference from the floating-point argument value is chosen, resolving any remaining ties using rounding according to `round_to_nearest` (21.3.3.1).
- ³ The functions taking a `chars_format` parameter determine the conversion specifier for `printf` as follows: The conversion specifier is `f` if `fmt` is `chars_format::fixed`, `e` if `fmt` is `chars_format::scientific`, `a` (without leading "0x" in the result) if `fmt` is `chars_format::hex`, and `g` if `fmt` is `chars_format::general`.

```
to_chars_result to_chars(char* first, char* last, see below value, int base = 10);
```

- ⁴ *Requires*: `base` has a value between 2 and 36 (inclusive).

- ⁵ *Effects*: The value of `value` is converted to a string of digits in the given base (with no redundant leading zeroes). Digits in the range 10..35 (inclusive) are represented as lowercase characters `a..z`. If `value` is less than zero, the representation starts with `'-'`.

- ⁶ *Throws*: Nothing.

- ⁷ *Remarks*: The implementation shall provide overloads for all signed and unsigned integer types and `char` as the type of the parameter `value`.

```
to_chars_result to_chars(char* first, char* last, float value);
to_chars_result to_chars(char* first, char* last, double value);
to_chars_result to_chars(char* first, char* last, long double value);
```

- ⁸ *Effects*: `value` is converted to a string in the style of `printf` in the "C" locale. The conversion specifier is `f` or `e`, chosen according to the requirement for a shortest representation (see above); a tie is resolved in favor of `f`.

- ⁹ *Throws*: Nothing.

```
to_chars_result to_chars(char* first, char* last, float value, chars_format fmt);
to_chars_result to_chars(char* first, char* last, double value, chars_format fmt);
to_chars_result to_chars(char* first, char* last, long double value, chars_format fmt);
```

- ¹⁰ *Requires*: `fmt` has the value of one of the enumerators of `chars_format`.

- ¹¹ *Effects*: `value` is converted to a string in the style of `printf` in the "C" locale.

- ¹² *Throws*: Nothing.

```
to_chars_result to_chars(char* first, char* last, float value,
                        chars_format fmt, int precision);
to_chars_result to_chars(char* first, char* last, double value,
                        chars_format fmt, int precision);
to_chars_result to_chars(char* first, char* last, long double value,
                        chars_format fmt, int precision);
```

- ¹³ *Requires*: `fmt` has the value of one of the enumerators of `chars_format`.

- ¹⁴ *Effects*: `value` is converted to a string in the style of `printf` in the "C" locale with the given precision.

- ¹⁵ *Throws*: Nothing.

SEE ALSO: ISO C 7.21.6.1

24.20.3 Primitive numeric input conversion [charconv.from.chars]

- 1 All functions named `from_chars` analyze the string `[first, last)` for a pattern, where `[first, last)` is required to be a valid range. If no characters match the pattern, `value` is unmodified, the member `ptr` of the return value is `first` and the member `ec` is equal to `errc::invalid_argument`. [*Note*: If the pattern allows for an optional sign, but the string has no digit characters following the sign, no characters match the pattern. — *end note*] Otherwise, the characters matching the pattern are interpreted as a representation of a value of the type of `value`. The member `ptr` of the return value points to the first character not matching the pattern, or has the value `last` if all characters match. If the parsed value is not in the range representable by the type of `value`, `value` is unmodified and the member `ec` of the return value is equal to `errc::result_out_of_range`. Otherwise, `value` is set to the parsed value, after rounding according to `round_to_nearest` (21.3.3.1), and the member `ec` is value-initialized.

```
from_chars_result from_chars(const char* first, const char* last,
                             see below& value, int base = 10);
```

- 2 *Requires*: `base` has a value between 2 and 36 (inclusive).
- 3 *Effects*: The pattern is the expected form of the subject sequence in the "C" locale for the given nonzero base, as described for `strtoul`, except that no "0x" or "0X" prefix shall appear if the value of `base` is 16, and except that '-' is the only sign that may appear, and only if `value` has a signed type.
- 4 *Throws*: Nothing.
- 5 *Remarks*: The implementation shall provide overloads for all signed and unsigned integer types and `char` as the referenced type of the parameter `value`.

```
from_chars_result from_chars(const char* first, const char* last, float& value,
                             chars_format fmt = chars_format::general);
from_chars_result from_chars(const char* first, const char* last, double& value,
                             chars_format fmt = chars_format::general);
from_chars_result from_chars(const char* first, const char* last, long double& value,
                             chars_format fmt = chars_format::general);
```

- 6 *Requires*: `fmt` has the value of one of the enumerators of `chars_format`.
- 7 *Effects*: The pattern is the expected form of the subject sequence in the "C" locale, as described for `strtod`, except that
- (7.1) — the sign '+' may only appear in the exponent part;
- (7.2) — if `fmt` has `chars_format::scientific` set but not `chars_format::fixed`, the otherwise optional exponent part shall appear;
- (7.3) — if `fmt` has `chars_format::fixed` set but not `chars_format::scientific`, the optional exponent part shall not appear; and
- (7.4) — if `fmt` is `chars_format::hex`, the prefix "0x" or "0X" is assumed. [*Example*: The string 0x123 is parsed to have the value 0 with remaining characters x123. — *end example*]

In any case, the resulting `value` is one of at most two floating-point values closest to the value of the string matching the pattern.

- 8 *Throws*: Nothing.

SEE ALSO: ISO C 7.22.1.3, 7.22.1.4

25 Strings library

[strings]

25.1 General

[strings.general]

- ¹ This Clause describes components for manipulating sequences of any non-array trivial standard-layout (6.7) type. Such types are called *char-like types*, and objects of char-like types are called *char-like objects* or simply *characters*.
- ² The following subclauses describe a character traits class, string classes, and null-terminated sequence utilities, as summarized in Table 59.

Table 59 — Strings library summary

Subclause	Header(s)
25.2 Character traits	<string>
25.3 String classes	<string>
25.4 String view classes	<string_view>
25.5 Null-terminated sequence utilities	<cctype>
	<cwctype>
	<cstring>
	<wchar>
	<cstdlib>
	<cuchar>

25.2 Character traits

[char.traits]

- ¹ This subclause defines requirements on classes representing *character traits*, and defines a class template `char_traits<CharT>`, along with four specializations, `char_traits<char>`, `char_traits<char16_t>`, `char_traits<char32_t>`, and `char_traits<wchar_t>`, that satisfy those requirements.
- ² Most classes specified in 25.3 and Clause 31 need a set of related types and functions to complete the definition of their semantics. These types and functions are provided as a set of member *typedef-names* and functions in the template parameter `traits` used by each such template. This subclause defines the semantics of these members.
- ³ To specialize those templates to generate a string or iostream class to handle a particular character container type `CharT`, that and its related character traits class `Traits` are passed as a pair of parameters to the string or iostream template as parameters `charT` and `traits`. `Traits::char_type` shall be the same as `CharT`.
- ⁴ This subclause specifies a class template, `char_traits<CharT>`, and four explicit specializations of it, `char_traits<char>`, `char_traits<char16_t>`, `char_traits<char32_t>`, and `char_traits<wchar_t>`, all of which appear in the header `<string>` and satisfy the requirements below.

25.2.1 Character traits requirements

[char.traits.require]

- ¹ In Table 60, `X` denotes a Traits class defining types and functions for the character container type `CharT`; `c` and `d` denote values of type `CharT`; `p` and `q` denote values of type `const CharT*`; `s` denotes a value of type `CharT*`; `n`, `i` and `j` denote values of type `size_t`; `e` and `f` denote values of type `X::int_type`; `pos` denotes a value of type `X::pos_type`; `state` denotes a value of type `X::state_type`; and `r` denotes an lvalue of type `CharT`. Operations on Traits shall not throw exceptions.

Table 60 — Character traits requirements

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X::char_type</code>	<code>charT</code>	(described in 25.2.2)	compile-time
<code>X::int_type</code>		(described in 25.2.2)	compile-time
<code>X::off_type</code>		(described in 25.2.2)	compile-time

Table 60 — Character traits requirements (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X::pos_type</code>		(described in 25.2.2)	compile-time
<code>X::state_type</code>		(described in 25.2.2)	compile-time
<code>X::eq(c,d)</code>	<code>bool</code>	Returns: whether <code>c</code> is to be treated as equal to <code>d</code> .	constant
<code>X::lt(c,d)</code>	<code>bool</code>	Returns: whether <code>c</code> is to be treated as less than <code>d</code> .	constant
<code>X::compare(p,q,n)</code>	<code>int</code>	Returns: 0 if for each <code>i</code> in $[0,n)$, <code>X::eq(p[i],q[i])</code> is true; else, a negative value if, for some <code>j</code> in $[0,n)$, <code>X::lt(p[j],q[j])</code> is true and for each <code>i</code> in $[0,j)$ <code>X::eq(p[i],q[i])</code> is true; else a positive value.	linear
<code>X::length(p)</code>	<code>size_t</code>	Returns: the smallest <code>i</code> such that <code>X::eq(p[i],charT())</code> is true.	linear
<code>X::find(p,n,c)</code>	<code>const X::char_type*</code>	Returns: the smallest <code>q</code> in $[p,p+n)$ such that <code>X::eq(*q,c)</code> is true, zero otherwise.	linear
<code>X::move(s,p,n)</code>	<code>X::char_type*</code>	for each <code>i</code> in $[0,n)$, performs <code>X::assign(s[i],p[i])</code> . Copies correctly even where the ranges $[p,p+n)$ and $[s,s+n)$ overlap. Returns: <code>s</code> .	linear
<code>X::copy(s,p,n)</code>	<code>X::char_type*</code>	Requires: <code>p</code> not in $[s,s+n)$. Returns: <code>s</code> . for each <code>i</code> in $[0,n)$, performs <code>X::assign(s[i],p[i])</code> .	linear
<code>X::assign(r,d)</code>	(not used)	assigns <code>r=d</code> .	constant
<code>X::assign(s,n,c)</code>	<code>X::char_type*</code>	for each <code>i</code> in $[0,n)$, performs <code>X::assign(s[i],c)</code> . Returns: <code>s</code> .	linear
<code>X::not_eof(e)</code>	<code>int_type</code>	Returns: <code>e</code> if <code>X::eq_int_type(e,X::eof())</code> is false, otherwise a value <code>f</code> such that <code>X::eq_int_type(f,X::eof())</code> is false.	constant
<code>X::to_char_type(e)</code>	<code>X::char_type</code>	Returns: if for some <code>c</code> , <code>X::eq_int_type(e,X::to_int_type(c))</code> is true, <code>c</code> ; else some unspecified value.	constant
<code>X::to_int_type(c)</code>	<code>X::int_type</code>	Returns: some value <code>e</code> , constrained by the definitions of <code>to_char_type</code> and <code>eq_int_type</code> .	constant

Table 60 — Character traits requirements (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X::eq_int_type(e,f)</code>	<code>bool</code>	<i>Returns:</i> for all <code>c</code> and <code>d</code> , <code>X::eq(c,d)</code> is equal to <code>X::eq_ - int_type(X::to_int_type(c), X::to_int_type(d))</code> ; otherwise, yields <code>true</code> if <code>e</code> and <code>f</code> are both copies of <code>X::eof()</code> ; otherwise, yields <code>false</code> if one of <code>e</code> and <code>f</code> is a copy of <code>X::eof()</code> and the other is not; otherwise the value is unspecified.	constant
<code>X::eof()</code>	<code>X::int_type</code>	<i>Returns:</i> a value <code>e</code> such that <code>X::eq_int_type(e,X::to_ - int_type(c))</code> is <code>false</code> for all values <code>c</code> .	constant

² The class template

```
template<class charT> struct char_traits;
```

shall be provided in the header `<string>` as a basis for explicit specializations.

25.2.2 Traits typedefs

[char.traits.typedefs]

```
using char_type = CHAR_T;
```

¹ The type `char_type` is used to refer to the character container type in the implementation of the library classes defined in 25.3 and Clause 31.

```
using int_type = INT_T;
```

² *Requires:* For a certain character container type `char_type`, a related container type `INT_T` shall be a type or class which can represent all of the valid characters converted from the corresponding `char_type` values, as well as an end-of-file value, `eof()`. The type `int_type` represents a character container type which can hold end-of-file to be used as a return type of the `istream` class member functions.²²⁷

```
using off_type = implementation-defined;
```

```
using pos_type = implementation-defined;
```

³ *Requires:* Requirements for `off_type` and `pos_type` are described in 31.2.2 and 31.3.

```
using state_type = STATE_T;
```

⁴ *Requires:* `state_type` shall satisfy the *Cpp17CopyAssignable* (Table 28), *Cpp17CopyConstructible* (Table 26), and *Cpp17DefaultConstructible* (Table 24) requirements.

25.2.3 char_traits specializations

[char.traits.specializations]

```
namespace std {
    template<> struct char_traits<char>;
    template<> struct char_traits<char16_t>;
    template<> struct char_traits<char32_t>;
    template<> struct char_traits<wchar_t>;
}
```

¹ The header `<string>` shall define four specializations of the class template `char_traits`: `char_traits<char>`, `char_traits<char16_t>`, `char_traits<char32_t>`, and `char_traits<wchar_t>`.

² The requirements for the members of these specializations are given in 25.2.1.

²²⁷ If `eof()` can be held in `char_type` then some `istream` operations may give surprising results.

25.2.3.1 struct char_traits<char> [char.traits.specializations.char]

```

namespace std {
    template<> struct char_traits<char> {
        using char_type = char;
        using int_type = int;
        using off_type = streamoff;
        using pos_type = streampos;
        using state_type = mbstate_t;

        static constexpr void assign(char_type& c1, const char_type& c2) noexcept;
        static constexpr bool eq(char_type c1, char_type c2) noexcept;
        static constexpr bool lt(char_type c1, char_type c2) noexcept;

        static constexpr int compare(const char_type* s1, const char_type* s2, size_t n);
        static constexpr size_t length(const char_type* s);
        static constexpr const char_type* find(const char_type* s, size_t n,
                                               const char_type& a);
        static char_type* move(char_type* s1, const char_type* s2, size_t n);
        static char_type* copy(char_type* s1, const char_type* s2, size_t n);
        static char_type* assign(char_type* s, size_t n, char_type a);

        static constexpr int_type not_eof(int_type c) noexcept;
        static constexpr char_type to_char_type(int_type c) noexcept;
        static constexpr int_type to_int_type(char_type c) noexcept;
        static constexpr bool eq_int_type(int_type c1, int_type c2) noexcept;
        static constexpr int_type eof() noexcept;
    };
}

```

- ¹ The defined types for `int_type`, `pos_type`, `off_type`, and `state_type` shall be `int`, `streampos`, `streamoff`, and `mbstate_t` respectively.
- ² The type `streampos` shall be an implementation-defined type that satisfies the requirements for `pos_type` in 31.2.2 and 31.3.
- ³ The type `streamoff` shall be an implementation-defined type that satisfies the requirements for `off_type` in 31.2.2 and 31.3.
- ⁴ The type `mbstate_t` is defined in `<cwchar>` and can represent any of the conversion states that can occur in an implementation-defined set of supported multibyte character encoding rules.
- ⁵ The two-argument member `assign` shall be defined identically to the built-in operator `=`. The two-argument members `eq` and `lt` shall be defined identically to the built-in operators `==` and `<` for type `unsigned char`.
- ⁶ The member `eof()` shall return `EOF`.

25.2.3.2 struct char_traits<char16_t> [char.traits.specializations.char16_t]

```

namespace std {
    template<> struct char_traits<char16_t> {
        using char_type = char16_t;
        using int_type = uint_least16_t;
        using off_type = streamoff;
        using pos_type = u16streampos;
        using state_type = mbstate_t;

        static constexpr void assign(char_type& c1, const char_type& c2) noexcept;
        static constexpr bool eq(char_type c1, char_type c2) noexcept;
        static constexpr bool lt(char_type c1, char_type c2) noexcept;

        static constexpr int compare(const char_type* s1, const char_type* s2, size_t n);
        static constexpr size_t length(const char_type* s);
        static constexpr const char_type* find(const char_type* s, size_t n,
                                               const char_type& a);
        static char_type* move(char_type* s1, const char_type* s2, size_t n);
        static char_type* copy(char_type* s1, const char_type* s2, size_t n);
        static char_type* assign(char_type* s, size_t n, char_type a);
    };
}

```

```

    static constexpr int_type not_eof(int_type c) noexcept;
    static constexpr char_type to_char_type(int_type c) noexcept;
    static constexpr int_type to_int_type(char_type c) noexcept;
    static constexpr bool eq_int_type(int_type c1, int_type c2) noexcept;
    static constexpr int_type eof() noexcept;
};
}

```

- 1 The type `u16streampos` shall be an implementation-defined type that satisfies the requirements for `pos_type` in 31.2.2 and 31.3.
- 2 The two-argument members `assign`, `eq`, and `lt` shall be defined identically to the built-in operators `=`, `==`, and `<` respectively.
- 3 The member `eof()` shall return an implementation-defined constant that cannot appear as a valid UTF-16 code unit.

25.2.3.3 struct `char_traits<char32_t>` [`char.traits.specializations.char32_t`]

```

namespace std {
    template<> struct char_traits<char32_t> {
        using char_type = char32_t;
        using int_type = uint_least32_t;
        using off_type = streamoff;
        using pos_type = u32streampos;
        using state_type = mbstate_t;

        static constexpr void assign(char_type& c1, const char_type& c2) noexcept;
        static constexpr bool eq(char_type c1, char_type c2) noexcept;
        static constexpr bool lt(char_type c1, char_type c2) noexcept;

        static constexpr int compare(const char_type* s1, const char_type* s2, size_t n);
        static constexpr size_t length(const char_type* s);
        static constexpr const char_type* find(const char_type* s, size_t n,
                                               const char_type& a);
        static char_type* move(char_type* s1, const char_type* s2, size_t n);
        static char_type* copy(char_type* s1, const char_type* s2, size_t n);
        static char_type* assign(char_type* s, size_t n, char_type a);

        static constexpr int_type not_eof(int_type c) noexcept;
        static constexpr char_type to_char_type(int_type c) noexcept;
        static constexpr int_type to_int_type(char_type c) noexcept;
        static constexpr bool eq_int_type(int_type c1, int_type c2) noexcept;
        static constexpr int_type eof() noexcept;
    };
}

```

- 1 The type `u32streampos` shall be an implementation-defined type that satisfies the requirements for `pos_type` in 31.2.2 and 31.3.
- 2 The two-argument members `assign`, `eq`, and `lt` shall be defined identically to the built-in operators `=`, `==`, and `<` respectively.
- 3 The member `eof()` shall return an implementation-defined constant that cannot appear as a Unicode code point.

25.2.3.4 struct `char_traits<wchar_t>` [`char.traits.specializations.wchar.t`]

```

namespace std {
    template<> struct char_traits<wchar_t> {
        using char_type = wchar_t;
        using int_type = wint_t;
        using off_type = streamoff;
        using pos_type = wstreampos;
        using state_type = mbstate_t;

```

```

static constexpr void assign(char_type& c1, const char_type& c2) noexcept;
static constexpr bool eq(char_type c1, char_type c2) noexcept;
static constexpr bool lt(char_type c1, char_type c2) noexcept;

static constexpr int compare(const char_type* s1, const char_type* s2, size_t n);
static constexpr size_t length(const char_type* s);
static constexpr const char_type* find(const char_type* s, size_t n,
                                       const char_type& a);
static char_type* move(char_type* s1, const char_type* s2, size_t n);
static char_type* copy(char_type* s1, const char_type* s2, size_t n);
static char_type* assign(char_type* s, size_t n, char_type a);

static constexpr int_type not_eof(int_type c) noexcept;
static constexpr char_type to_char_type(int_type c) noexcept;
static constexpr int_type to_int_type(char_type c) noexcept;
static constexpr bool eq_int_type(int_type c1, int_type c2) noexcept;
static constexpr int_type eof() noexcept;
};
}

```

- 1 The defined types for `int_type`, `pos_type`, and `state_type` shall be `wint_t`, `wstreampos`, and `mbstate_t` respectively.
- 2 The type `wstreampos` shall be an implementation-defined type that satisfies the requirements for `pos_type` in 31.2.2 and 31.3.
- 3 The type `mbstate_t` is defined in `<cwchar>` and can represent any of the conversion states that can occur in an implementation-defined set of supported multibyte character encoding rules.
- 4 The two-argument members `assign`, `eq`, and `lt` shall be defined identically to the built-in operators `=`, `==`, and `<` respectively.
- 5 The member `eof()` shall return `WEOF`.

25.3 String classes

[string.classes]

- 1 The header `<string>` defines the `basic_string` class template for manipulating varying-length sequences of char-like objects and four *typedef-names*, `string`, `u16string`, `u32string`, and `wstring`, that name the specializations `basic_string<char>`, `basic_string<char16_t>`, `basic_string<char32_t>`, and `basic_string<wchar_t>`, respectively.

25.3.1 Header `<string>` synopsis

[string.syn]

```

#include <initializer_list>

namespace std {
    // 25.2, character traits
    template<class charT> struct char_traits;
    template<> struct char_traits<char>;
    template<> struct char_traits<char16_t>;
    template<> struct char_traits<char32_t>;
    template<> struct char_traits<wchar_t>;

    // 25.3.2, basic_string
    template<class charT, class traits = char_traits<charT>, class Allocator = allocator<charT>>
        class basic_string;

    template<class charT, class traits, class Allocator>
        basic_string<charT, traits, Allocator>
            operator+(const basic_string<charT, traits, Allocator>& lhs,
                    const basic_string<charT, traits, Allocator>& rhs);
    template<class charT, class traits, class Allocator>
        basic_string<charT, traits, Allocator>
            operator+(basic_string<charT, traits, Allocator>&& lhs,
                    const basic_string<charT, traits, Allocator>& rhs);
}

```



```

template<class charT, class traits, class Allocator>
    bool operator< (const basic_string<charT, traits, Allocator>& lhs,
                   const charT* rhs);
template<class charT, class traits, class Allocator>
    bool operator< (const charT* lhs,
                   const basic_string<charT, traits, Allocator>& rhs);
template<class charT, class traits, class Allocator>
    bool operator> (const basic_string<charT, traits, Allocator>& lhs,
                   const basic_string<charT, traits, Allocator>& rhs) noexcept;
template<class charT, class traits, class Allocator>
    bool operator> (const basic_string<charT, traits, Allocator>& lhs,
                   const charT* rhs);
template<class charT, class traits, class Allocator>
    bool operator> (const charT* lhs,
                   const basic_string<charT, traits, Allocator>& rhs);

template<class charT, class traits, class Allocator>
    bool operator<=(const basic_string<charT, traits, Allocator>& lhs,
                   const basic_string<charT, traits, Allocator>& rhs) noexcept;
template<class charT, class traits, class Allocator>
    bool operator<=(const basic_string<charT, traits, Allocator>& lhs,
                   const charT* rhs);
template<class charT, class traits, class Allocator>
    bool operator<=(const charT* lhs,
                   const basic_string<charT, traits, Allocator>& rhs);
template<class charT, class traits, class Allocator>
    bool operator>=(const basic_string<charT, traits, Allocator>& lhs,
                   const basic_string<charT, traits, Allocator>& rhs) noexcept;
template<class charT, class traits, class Allocator>
    bool operator>=(const basic_string<charT, traits, Allocator>& lhs,
                   const charT* rhs);
template<class charT, class traits, class Allocator>
    bool operator>=(const charT* lhs,
                   const basic_string<charT, traits, Allocator>& rhs);

// 25.3.3.8, swap
template<class charT, class traits, class Allocator>
    void swap(basic_string<charT, traits, Allocator>& lhs,
              basic_string<charT, traits, Allocator>& rhs)
        noexcept(noexcept(lhs.swap(rhs)));

// 25.3.3.9, inserters and extractors
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        operator>>(basic_istream<charT, traits>& is,
                  basic_string<charT, traits, Allocator>& str);
template<class charT, class traits, class Allocator>
    basic_ostream<charT, traits>&
        operator<<(basic_ostream<charT, traits>& os,
                  const basic_string<charT, traits, Allocator>& str);
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>& is,
                basic_string<charT, traits, Allocator>& str,
                charT delim);
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>&& is,
                basic_string<charT, traits, Allocator>& str,
                charT delim);
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>& is,
                basic_string<charT, traits, Allocator>& str);

```

```

template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>&& is,
                basic_string<charT, traits, Allocator>& str);

// basic_string typedef names
using string      = basic_string<char>;
using u16string  = basic_string<char16_t>;
using u32string  = basic_string<char32_t>;
using wstring    = basic_string<wchar_t>;

// 25.3.4, numeric conversions
int stoi(const string& str, size_t* idx = nullptr, int base = 10);
long stol(const string& str, size_t* idx = nullptr, int base = 10);
unsigned long stoul(const string& str, size_t* idx = nullptr, int base = 10);
long long stoll(const string& str, size_t* idx = nullptr, int base = 10);
unsigned long long stoull(const string& str, size_t* idx = nullptr, int base = 10);
float stof(const string& str, size_t* idx = nullptr);
double stod(const string& str, size_t* idx = nullptr);
long double stold(const string& str, size_t* idx = nullptr);
string to_string(int val);
string to_string(unsigned val);
string to_string(long val);
string to_string(unsigned long val);
string to_string(long long val);
string to_string(unsigned long long val);
string to_string(float val);
string to_string(double val);
string to_string(long double val);

int stoi(const wstring& str, size_t* idx = nullptr, int base = 10);
long stol(const wstring& str, size_t* idx = nullptr, int base = 10);
unsigned long stoul(const wstring& str, size_t* idx = nullptr, int base = 10);
long long stoll(const wstring& str, size_t* idx = nullptr, int base = 10);
unsigned long long stoull(const wstring& str, size_t* idx = nullptr, int base = 10);
float stof(const wstring& str, size_t* idx = nullptr);
double stod(const wstring& str, size_t* idx = nullptr);
long double stold(const wstring& str, size_t* idx = nullptr);
wstring to_wstring(int val);
wstring to_wstring(unsigned val);
wstring to_wstring(long val);
wstring to_wstring(unsigned long val);
wstring to_wstring(long long val);
wstring to_wstring(unsigned long long val);
wstring to_wstring(float val);
wstring to_wstring(double val);
wstring to_wstring(long double val);

namespace pmr {
    template<class charT, class traits = char_traits<charT>>
        using basic_string = std::basic_string<charT, traits, polymorphic_allocator<charT>>;

    using string      = basic_string<char>;
    using u16string  = basic_string<char16_t>;
    using u32string  = basic_string<char32_t>;
    using wstring    = basic_string<wchar_t>;
}

// 25.3.5, hash support
template<class T> struct hash;
template<> struct hash<string>;
template<> struct hash<u16string>;
template<> struct hash<u32string>;
template<> struct hash<wstring>;

```

```

template<> struct hash<pmr::string>;
template<> struct hash<pmr::u16string>;
template<> struct hash<pmr::u32string>;
template<> struct hash<pmr::wstring>;

inline namespace literals {
inline namespace string_literals {
    // 25.3.6, suffix for basic_string literals
    string operator""s(const char* str, size_t len);
    u16string operator""s(const char16_t* str, size_t len);
    u32string operator""s(const char32_t* str, size_t len);
    wstring operator""s(const wchar_t* str, size_t len);
}
}
}

```

25.3.2 Class template `basic_string`

[basic.string]

- 1 The class template `basic_string` describes objects that can store a sequence consisting of a varying number of arbitrary char-like objects with the first element of the sequence at position zero. Such a sequence is also called a “string” if the type of the char-like objects that it holds is clear from context. In the rest of this Clause, the type of the char-like objects held in a `basic_string` object is designated by `charT`.
- 2 The member functions of `basic_string` use an object of the `Allocator` class passed as a template parameter to allocate and free storage for the contained char-like objects.²²⁸
- 3 A `basic_string` is a contiguous container (27.2.1).
- 4 In all cases, `[data(), data() + size()]` is a valid range, `data() + size()` points at an object with value `charT()` (a “null terminator”), and `size() <= capacity()` is true.
- 5 The functions described in this Clause can report two kinds of errors, each associated with an exception type:
 - (5.1) — a *length* error is associated with exceptions of type `length_error` (23.2.5);
 - (5.2) — an *out-of-range* error is associated with exceptions of type `out_of_range` (23.2.6).

```

namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
    class basic_string {
    public:
        // types
        using traits_type           = traits;
        using value_type           = charT;
        using allocator_type       = Allocator;
        using size_type            = typename allocator_traits<Allocator>::size_type;
        using difference_type      = typename allocator_traits<Allocator>::difference_type;
        using pointer              = typename allocator_traits<Allocator>::pointer;
        using const_pointer        = typename allocator_traits<Allocator>::const_pointer;
        using reference            = value_type&;
        using const_reference      = const value_type&;

        using iterator             = implementation-defined; // see 27.2
        using const_iterator       = implementation-defined; // see 27.2
        using reverse_iterator     = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;
        static const size_type npos = -1;

        // 25.3.2.2, construct/copy/destroy
        basic_string() noexcept(noexcept(Allocator())) : basic_string(Allocator()) { }
        explicit basic_string(const Allocator& a) noexcept;
        basic_string(const basic_string& str);
        basic_string(basic_string&& str) noexcept;
        basic_string(const basic_string& str, size_type pos, const Allocator& a = Allocator());
    };
}

```

²²⁸) `Allocator::value_type` must name the same type as `charT` (25.3.2.1).

```

basic_string(const basic_string& str, size_type pos, size_type n,
             const Allocator& a = Allocator());
template<class T>
    basic_string(const T& t, size_type pos, size_type n, const Allocator& a = Allocator());
template<class T>
    explicit basic_string(const T& t, const Allocator& a = Allocator());
basic_string(const charT* s, size_type n, const Allocator& a = Allocator());
basic_string(const charT* s, const Allocator& a = Allocator());
basic_string(size_type n, charT c, const Allocator& a = Allocator());
template<class InputIterator>
    basic_string(InputIterator begin, InputIterator end, const Allocator& a = Allocator());
basic_string(initializer_list<charT>, const Allocator& = Allocator());
basic_string(const basic_string&, const Allocator&);
basic_string(basic_string&&, const Allocator&);

~basic_string();
basic_string& operator=(const basic_string& str);
basic_string& operator=(basic_string&& str)
    noexcept(allocator_traits<Allocator>::propagate_on_container_move_assignment::value ||
             allocator_traits<Allocator>::is_always_equal::value);
template<class T>
    basic_string& operator=(const T& t);
basic_string& operator=(const charT* s);
basic_string& operator=(charT c);
basic_string& operator=(initializer_list<charT>);

// 25.3.2.3, iterators
iterator      begin() noexcept;
const_iterator begin() const noexcept;
iterator      end() noexcept;
const_iterator end() const noexcept;

reverse_iterator      rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator      rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator      cbegin() const noexcept;
const_iterator      cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// 25.3.2.4, capacity
size_type size() const noexcept;
size_type length() const noexcept;
size_type max_size() const noexcept;
void resize(size_type n, charT c);
void resize(size_type n);
size_type capacity() const noexcept;
void reserve(size_type res_arg);
void shrink_to_fit();
void clear() noexcept;
[[nodiscard]] bool empty() const noexcept;

// 25.3.2.5, element access
const_reference operator[](size_type pos) const;
reference      operator[](size_type pos);
const_reference at(size_type n) const;
reference      at(size_type n);

const charT& front() const;
charT&      front();
const charT& back() const;
charT&      back();

```

```

// 25.3.2.6, modifiers
basic_string& operator+=(const basic_string& str);
template<class T>
    basic_string& operator+=(const T& t);
basic_string& operator+=(const charT* s);
basic_string& operator+=(charT c);
basic_string& operator+=(initializer_list<charT>);
basic_string& append(const basic_string& str);
basic_string& append(const basic_string& str, size_type pos, size_type n = npos);
template<class T>
    basic_string& append(const T& t);
template<class T>
    basic_string& append(const T& t, size_type pos, size_type n = npos);
basic_string& append(const charT* s, size_type n);
basic_string& append(const charT* s);
basic_string& append(size_type n, charT c);
template<class InputIterator>
    basic_string& append(InputIterator first, InputIterator last);
basic_string& append(initializer_list<charT>);

void push_back(charT c);

basic_string& assign(const basic_string& str);
basic_string& assign(basic_string&& str)
    noexcept(allocator_traits<Allocator>::propagate_on_container_move_assignment::value ||
             allocator_traits<Allocator>::is_always_equal::value);
basic_string& assign(const basic_string& str, size_type pos, size_type n = npos);
template<class T>
    basic_string& assign(const T& t);
template<class T>
    basic_string& assign(const T& t, size_type pos, size_type n = npos);
basic_string& assign(const charT* s, size_type n);
basic_string& assign(const charT* s);
basic_string& assign(size_type n, charT c);
template<class InputIterator>
    basic_string& assign(InputIterator first, InputIterator last);
basic_string& assign(initializer_list<charT>);

basic_string& insert(size_type pos, const basic_string& str);
basic_string& insert(size_type pos1, const basic_string& str,
                    size_type pos2, size_type n = npos);
template<class T>
    basic_string& insert(size_type pos, const T& t);
template<class T>
    basic_string& insert(size_type pos1, const T& t, size_type pos2, size_type n = npos);
basic_string& insert(size_type pos, const charT* s, size_type n);
basic_string& insert(size_type pos, const charT* s);
basic_string& insert(size_type pos, size_type n, charT c);
iterator insert(const_iterator p, charT c);
iterator insert(const_iterator p, size_type n, charT c);
template<class InputIterator>
    iterator insert(const_iterator p, InputIterator first, InputIterator last);
iterator insert(const_iterator p, initializer_list<charT>);

basic_string& erase(size_type pos = 0, size_type n = npos);
iterator erase(const_iterator p);
iterator erase(const_iterator first, const_iterator last);

void pop_back();

basic_string& replace(size_type pos1, size_type n1, const basic_string& str);
basic_string& replace(size_type pos1, size_type n1, const basic_string& str,
                    size_type pos2, size_type n2 = npos);

```

```

template<class T>
    basic_string& replace(size_type pos1, size_type n1, const T& t);
template<class T>
    basic_string& replace(size_type pos1, size_type n1, const T& t,
        size_type pos2, size_type n2 = npos);
basic_string& replace(size_type pos, size_type n1, const charT* s, size_type n2);
basic_string& replace(size_type pos, size_type n1, const charT* s);
basic_string& replace(size_type pos, size_type n1, size_type n2, charT c);

basic_string& replace(const_iterator i1, const_iterator i2, const basic_string& str);
template<class T>
    basic_string& replace(const_iterator i1, const_iterator i2, const T& t);
basic_string& replace(const_iterator i1, const_iterator i2, const charT* s, size_type n);
basic_string& replace(const_iterator i1, const_iterator i2, const charT* s);
basic_string& replace(const_iterator i1, const_iterator i2, size_type n, charT c);
template<class InputIterator>
    basic_string& replace(const_iterator i1, const_iterator i2,
        InputIterator j1, InputIterator j2);
basic_string& replace(const_iterator, const_iterator, initializer_list<charT>);

size_type copy(charT* s, size_type n, size_type pos = 0) const;

void swap(basic_string& str)
    noexcept(allocator_traits<Allocator>::propagate_on_container_swap::value ||
        allocator_traits<Allocator>::is_always_equal::value);

// 25.3.2.7, string operations
const charT* c_str() const noexcept;
const charT* data() const noexcept;
charT* data() noexcept;
operator basic_string_view<charT, traits>() const noexcept;
allocator_type get_allocator() const noexcept;

template<class T>
    size_type find (const T& t, size_type pos = 0) const;
size_type find (const basic_string& str, size_type pos = 0) const noexcept;
size_type find (const charT* s, size_type pos, size_type n) const;
size_type find (const charT* s, size_type pos = 0) const;
size_type find (charT c, size_type pos = 0) const;
template<class T>
    size_type rfind(const T& t, size_type pos = npos) const;
size_type rfind(const basic_string& str, size_type pos = npos) const noexcept;
size_type rfind(const charT* s, size_type pos, size_type n) const;
size_type rfind(const charT* s, size_type pos = npos) const;
size_type rfind(charT c, size_type pos = npos) const;

template<class T>
    size_type find_first_of(const T& t, size_type pos = 0) const;
size_type find_first_of(const basic_string& str, size_type pos = 0) const noexcept;
size_type find_first_of(const charT* s, size_type pos, size_type n) const;
size_type find_first_of(const charT* s, size_type pos = 0) const;
size_type find_first_of(charT c, size_type pos = 0) const;
template<class T>
    size_type find_last_of (const T& t, size_type pos = npos) const;
size_type find_last_of (const basic_string& str, size_type pos = npos) const noexcept;
size_type find_last_of (const charT* s, size_type pos, size_type n) const;
size_type find_last_of (const charT* s, size_type pos = npos) const;
size_type find_last_of (charT c, size_type pos = npos) const;

template<class T>
    size_type find_first_not_of(const T& t, size_type pos = 0) const;
size_type find_first_not_of(const basic_string& str, size_type pos = 0) const noexcept;
size_type find_first_not_of(const charT* s, size_type pos, size_type n) const;
size_type find_first_not_of(const charT* s, size_type pos = 0) const;

```

```

size_type find_first_not_of(charT c, size_type pos = 0) const;
template<class T>
    size_type find_last_not_of (const T& t, size_type pos = npos) const;
size_type find_last_not_of (const basic_string& str, size_type pos = npos) const noexcept;
size_type find_last_not_of (const charT* s, size_type pos, size_type n) const;
size_type find_last_not_of (const charT* s, size_type pos = npos) const;
size_type find_last_not_of (charT c, size_type pos = npos) const;

basic_string substr(size_type pos = 0, size_type n = npos) const;
template<class T>
    int compare(const T& t) const;
template<class T>
    int compare(size_type pos1, size_type n1, const T& t) const;
template<class T>
    int compare(size_type pos1, size_type n1, const T& t,
                size_type pos2, size_type n2 = npos) const;
int compare(const basic_string& str) const noexcept;
int compare(size_type pos1, size_type n1, const basic_string& str) const;
int compare(size_type pos1, size_type n1, const basic_string& str,
            size_type pos2, size_type n2 = npos) const;
int compare(const charT* s) const;
int compare(size_type pos1, size_type n1, const charT* s) const;
int compare(size_type pos1, size_type n1, const charT* s, size_type n2) const;

bool starts_with(basic_string_view<charT, traits> x) const noexcept;
bool starts_with(charT x) const noexcept;
bool starts_with(const charT* x) const;
bool ends_with(basic_string_view<charT, traits> x) const noexcept;
bool ends_with(charT x) const noexcept;
bool ends_with(const charT* x) const;
};

template<class InputIterator,
        class Allocator = allocator<typename iterator_traits<InputIterator>::value_type>>
basic_string(InputIterator, InputIterator, Allocator = Allocator())
    -> basic_string<typename iterator_traits<InputIterator>::value_type,
            char_traits<typename iterator_traits<InputIterator>::value_type>,
            Allocator>;

template<class charT,
        class traits,
        class Allocator = allocator<charT>>
explicit basic_string(basic_string_view<charT, traits>, const Allocator& = Allocator())
    -> basic_string<charT, traits, Allocator>;

template<class charT,
        class traits,
        class Allocator = allocator<charT>>
basic_string(basic_string_view<charT, traits>,
            typename see below::size_type, typename see below::size_type,
            const Allocator& = Allocator())
    -> basic_string<charT, traits, Allocator>;
}

```

⁶ A `size_type` parameter type in a `basic_string` deduction guide refers to the `size_type` member type of the type deduced by the deduction guide.

25.3.2.1 General requirements

[string.require]

- ¹ If any operation would cause `size()` to exceed `max_size()`, that operation shall throw an exception object of type `length_error`.
- ² If any member function or operator of `basic_string` throws an exception, that function or operator shall have no other effect.

- 3 In every specialization `basic_string<charT, traits, Allocator>`, the type `allocator_traits<Allocator>::value_type` shall name the same type as `charT`. Every object of type `basic_string<charT, traits, Allocator>` shall use an object of type `Allocator` to allocate and free storage for the contained `charT` objects as needed. The `Allocator` object used shall be obtained as described in 27.2.1. In every specialization `basic_string<charT, traits, Allocator>`, the type `traits` shall satisfy the character traits requirements (25.2), and the type `traits::char_type` shall name the same type as `charT`.
- 4 References, pointers, and iterators referring to the elements of a `basic_string` sequence may be invalidated by the following uses of that `basic_string` object:
- (4.1) — as an argument to any standard library function taking a reference to non-const `basic_string` as an argument.²²⁹
- (4.2) — Calling non-const member functions, except `operator[]`, `at`, `data`, `front`, `back`, `begin`, `rbegin`, `end`, and `rend`.

25.3.2.2 Constructors and assignment operators

[string.cons]

```
explicit basic_string(const Allocator& a) noexcept;
```

1 *Effects:* Constructs an object of class `basic_string`.

2 *Ensures:* `size()` is 0 and `capacity()` is an unspecified value.

```
basic_string(const basic_string& str);
basic_string(basic_string&& str) noexcept;
```

3 *Effects:* Constructs an object of class `basic_string`.

4 *Ensures:* `data()` points at the first element of an allocated copy of the array whose first element is pointed at by the original value `str.data()`, `size()` is equal to the original value of `str.size()`, and `capacity()` is a value at least as large as `size()`. In the second form, `str` is left in a valid state with an unspecified value.

```
basic_string(const basic_string& str, size_type pos,
             const Allocator& a = Allocator());
basic_string(const basic_string& str, size_type pos, size_type n,
             const Allocator& a = Allocator());
```

5 *Throws:* `out_of_range` if `pos > str.size()`.

6 *Effects:* Constructs an object of class `basic_string` and determines the effective length `rlen` of the initial string value as `str.size() - pos` in the first form and as the smaller of `str.size() - pos` and `n` in the second form.

7 *Ensures:* `data()` points at the first element of an allocated copy of `rlen` consecutive elements of the string controlled by `str` beginning at position `pos`, `size()` is equal to `rlen`, and `capacity()` is a value at least as large as `size()`.

```
template<class T>
basic_string(const T& t, size_type pos, size_type n, const Allocator& a = Allocator());
```

8 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then behaves the same as:

```
basic_string(sv.substr(pos, n), a);
```

9 *Remarks:* This constructor shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true.

```
template<class T>
explicit basic_string(const T& t, const Allocator& a = Allocator());
```

10 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then behaves the same as `basic_string(sv.data(), sv.size(), a)`.

11 *Remarks:* This constructor shall not participate in overload resolution unless

(11.1) — `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and

²²⁹ For example, as an argument to non-member functions `swap()` (25.3.3.8), `operator>>()` (25.3.3.9), and `getline()` (25.3.3.9), or as an argument to `basic_string::swap()`.

(11.2) — `is_convertible_v<const T&, const charT*>` is false.

```
basic_string(const charT* s, size_type n, const Allocator& a = Allocator());
```

12 *Requires:* `s` points to an array of at least `n` elements of `charT`.

13 *Effects:* Constructs an object of class `basic_string` and determines its initial string value from the array of `charT` of length `n` whose first element is designated by `s`.

14 *Ensures:* `data()` points at the first element of an allocated copy of the array whose first element is pointed at by `s`, `size()` is equal to `n`, and `capacity()` is a value at least as large as `size()`.

```
basic_string(const charT* s, const Allocator& a = Allocator());
```

15 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

16 *Effects:* Constructs an object of class `basic_string` and determines its initial string value from the array of `charT` of length `traits::length(s)` whose first element is designated by `s`.

17 *Ensures:* `data()` points at the first element of an allocated copy of the array whose first element is pointed at by `s`, `size()` is equal to `traits::length(s)`, and `capacity()` is a value at least as large as `size()`.

18 *Remarks:* Shall not participate in overload resolution if `Allocator` is a type that does not qualify as an allocator (27.2.1). [*Note:* This affects class template argument deduction. — *end note*]

```
basic_string(size_type n, charT c, const Allocator& a = Allocator());
```

19 *Requires:* `n < npos`.

20 *Effects:* Constructs an object of class `basic_string` and determines its initial string value by repeating the char-like object `c` for all `n` elements.

21 *Ensures:* `data()` points at the first element of an allocated array of `n` elements, each storing the initial value `c`, `size()` is equal to `n`, and `capacity()` is a value at least as large as `size()`.

22 *Remarks:* Shall not participate in overload resolution if `Allocator` is a type that does not qualify as an allocator (27.2.1). [*Note:* This affects class template argument deduction. — *end note*]

```
template<class InputIterator>
```

```
basic_string(InputIterator begin, InputIterator end, const Allocator& a = Allocator());
```

23 *Effects:* If `InputIterator` is an integral type, equivalent to:

```
basic_string(static_cast<size_type>(begin), static_cast<value_type>(end), a);
```

Otherwise constructs a string from the values in the range `[begin, end)`, as indicated in the Sequence Requirements table (see 27.2.3).

```
basic_string(initializer_list<charT> il, const Allocator& a = Allocator());
```

24 *Effects:* Same as `basic_string(il.begin(), il.end(), a)`.

```
basic_string(const basic_string& str, const Allocator& alloc);
```

```
basic_string(basic_string&& str, const Allocator& alloc);
```

25 *Effects:* Constructs an object of class `basic_string`. The stored allocator is constructed from `alloc`.

26 *Ensures:* `data()` points at the first element of an allocated copy of the array whose first element is pointed at by the original value of `str.data()`, `size()` is equal to the original value of `str.size()`, `capacity()` is a value at least as large as `size()`, and `get_allocator()` is equal to `alloc`. In the second form, `str` is left in a valid state with an unspecified value.

27 *Throws:* The second form throws nothing if `alloc == str.get_allocator()`.

```
template<class InputIterator,
```

```
class Allocator = allocator<typename iterator_traits<InputIterator>::value_type>>
```

```
basic_string(InputIterator, InputIterator, Allocator = Allocator())
```

```
-> basic_string<typename iterator_traits<InputIterator>::value_type,  
char_traits<typename iterator_traits<InputIterator>::value_type>,  
Allocator>;
```

28 *Remarks:* Shall not participate in overload resolution if `InputIterator` is a type that does not qualify as an input iterator, or if `Allocator` is a type that does not qualify as an allocator (27.2.1).

```

template<class charT,
        class traits,
        class Allocator = allocator<charT>>
explicit basic_string(basic_string_view<charT, traits>, const Allocator& = Allocator())
-> basic_string<charT, traits, Allocator>;

```

```

template<class charT,
        class traits,
        class Allocator = allocator<charT>>
basic_string(basic_string_view<charT, traits>,
            typename see below::size_type, typename see below::size_type,
            const Allocator& = Allocator())
-> basic_string<charT, traits, Allocator>;

```

29 *Remarks:* Shall not participate in overload resolution if Allocator is a type that does not qualify as an allocator (27.2.1).

```
basic_string& operator=(const basic_string& str);
```

30 *Returns:* *this.

31 *Ensures:* If *this and str are the same object, the member has no effect. Otherwise, data() points at the first element of an allocated copy of the array whose first element is pointed at by str.data(), size() is equal to str.size(), and capacity() is a value at least as large as size().

```
basic_string& operator=(basic_string&& str)
noexcept(allocator_traits<Allocator>::propagate_on_container_move_assignment::value ||
         allocator_traits<Allocator>::is_always_equal::value);
```

32 *Effects:* Move assigns as a sequence container (27.2), except that iterators, pointers and references may be invalidated.

33 *Returns:* *this.

```
template<class T>
basic_string& operator=(const T& t);
```

34 *Effects:* Equivalent to:

```

{
    basic_string_view<charT, traits> sv = t;
    return assign(sv);
}

```

35 *Remarks:* This function shall not participate in overload resolution unless is_convertible_v<const T&, basic_string_view<charT, traits>> is true and is_convertible_v<const T&, const charT*> is false.

```
basic_string& operator=(const charT* s);
```

36 *Returns:* *this = basic_string(s).

37 *Remarks:* Uses traits::length().

```
basic_string& operator=(charT c);
```

38 *Returns:* *this = basic_string(1, c).

```
basic_string& operator=(initializer_list<charT> il);
```

39 *Effects:* As if by: *this = basic_string(il);

40 *Returns:* *this.

25.3.2.3 Iterator support

[string.iterators]

```

iterator      begin() noexcept;
const_iterator begin() const noexcept;
const_iterator cbegin() const noexcept;

```

1 *Returns:* An iterator referring to the first character in the string.

```

iterator      end() noexcept;
const_iterator end() const noexcept;
const_iterator cend() const noexcept;

```

2 *Returns:* An iterator which is the past-the-end value.

```

reverse_iterator      rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
const_reverse_iterator crbegin() const noexcept;

```

3 *Returns:* An iterator which is semantically equivalent to `reverse_iterator(end())`.

```

reverse_iterator      rend() noexcept;
const_reverse_iterator rend() const noexcept;
const_reverse_iterator crend() const noexcept;

```

4 *Returns:* An iterator which is semantically equivalent to `reverse_iterator(begin())`.

25.3.2.4 Capacity

[string.capacity]

```

size_type size() const noexcept;

```

1 *Returns:* A count of the number of char-like objects currently in the string.

2 *Complexity:* Constant time.

```

size_type length() const noexcept;

```

3 *Returns:* `size()`.

```

size_type max_size() const noexcept;

```

4 *Returns:* The largest possible number of char-like objects that can be stored in a `basic_string`.

5 *Complexity:* Constant time.

```

void resize(size_type n, charT c);

```

6 *Throws:* `length_error` if `n > max_size()`.

7 *Effects:* Alters the length of the string designated by `*this` as follows:

- (7.1) — If `n <= size()`, the function replaces the string designated by `*this` with a string of length `n` whose elements are a copy of the initial elements of the original string designated by `*this`.
- (7.2) — If `n > size()`, the function replaces the string designated by `*this` with a string of length `n` whose first `size()` elements are a copy of the original string designated by `*this`, and whose remaining elements are all initialized to `c`.

```

void resize(size_type n);

```

8 *Effects:* As if by `resize(n, charT())`.

```

size_type capacity() const noexcept;

```

9 *Returns:* The size of the allocated storage in the string.

10 *Complexity:* Constant time.

```

void reserve(size_type res_arg);

```

11 *Effects:* A directive that informs a `basic_string` of a planned change in size, so that the storage allocation can be managed accordingly. After `reserve()`, `capacity()` is greater or equal to the argument of `reserve` if reallocation happens; and equal to the previous value of `capacity()` otherwise. Reallocation happens at this point if and only if the current capacity is less than the argument of `reserve()`.

12 *Throws:* `length_error` if `res_arg > max_size()`.²³⁰

230) `reserve()` uses `allocator_traits<Allocator>::allocate()` which may throw an appropriate exception.

```
void shrink_to_fit();
```

13 *Effects:* `shrink_to_fit` is a non-binding request to reduce `capacity()` to `size()`. [Note: The request is non-binding to allow latitude for implementation-specific optimizations. — *end note*] It does not increase `capacity()`, but may reduce `capacity()` by causing reallocation.

14 *Complexity:* Linear in the size of the sequence.

15 *Remarks:* Reallocation invalidates all the references, pointers, and iterators referring to the elements in the sequence as well as the past-the-end iterator. If no reallocation happens, they remain valid.

```
void clear() noexcept;
```

16 *Effects:* Behaves as if the function calls:

```
erase(begin(), end());
```

```
[[nodiscard]] bool empty() const noexcept;
```

17 *Returns:* `size() == 0`.

25.3.2.5 Element access

[string.access]

```
const_reference operator[](size_type pos) const;
reference operator[](size_type pos);
```

1 *Requires:* `pos <= size()`.

2 *Returns:* `*(begin() + pos)` if `pos < size()`. Otherwise, returns a reference to an object of type `charT` with value `charT()`, where modifying the object to any value other than `charT()` leads to undefined behavior.

3 *Throws:* Nothing.

4 *Complexity:* Constant time.

```
const_reference at(size_type pos) const;
reference at(size_type pos);
```

5 *Throws:* `out_of_range` if `pos >= size()`.

6 *Returns:* `operator[] (pos)`.

```
const charT& front() const;
charT& front();
```

7 *Requires:* `!empty()`.

8 *Effects:* Equivalent to: `return operator[] (0);`

```
const charT& back() const;
charT& back();
```

9 *Requires:* `!empty()`.

10 *Effects:* Equivalent to: `return operator[] (size() - 1);`

25.3.2.6 Modifiers

[string.modifiers]

25.3.2.6.1 `basic_string::operator+=`

[string.op+=]

```
basic_string& operator+=(const basic_string& str);
```

1 *Effects:* Calls `append(str)`.

2 *Returns:* `*this`.

```
template<class T>
basic_string& operator+=(const T& t);
```

3 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t;` and then calls `append(sv)`.

4 *Returns:* `*this`.

5 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
basic_string& operator+=(const charT* s);
```

6 *Effects:* Calls `append(s)`.

7 *Returns:* `*this`.

```
basic_string& operator+=(charT c);
```

8 *Effects:* Calls `push_back(c)`;

9 *Returns:* `*this`.

```
basic_string& operator+=(initializer_list<charT> il);
```

10 *Effects:* Calls `append(il)`.

11 *Returns:* `*this`.

25.3.2.6.2 `basic_string::append` [string.append]

```
basic_string& append(const basic_string& str);
```

1 *Effects:* Calls `append(str.data(), str.size())`.

2 *Returns:* `*this`.

```
basic_string& append(const basic_string& str, size_type pos, size_type n = npos);
```

3 *Throws:* `out_of_range` if `pos > str.size()`.

4 *Effects:* Determines the effective length `rlen` of the string to append as the smaller of `n` and `str.size() - pos` and calls `append(str.data() + pos, rlen)`.

5 *Returns:* `*this`.

```
template<class T>
basic_string& append(const T& t);
```

6 *Effects:* Equivalent to:

```
{
    basic_string_view<charT, traits> sv = t;
    return append(sv.data(), sv.size());
}
```

7 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
template<class T>
basic_string& append(const T& t, size_type pos, size_type n = npos);
```

8 *Throws:* `out_of_range` if `pos > sv.size()`.

9 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`. Determines the effective length `rlen` of the string to append as the smaller of `n` and `sv.size() - pos` and calls `append(sv.data() + pos, rlen)`.

10 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

11 *Returns:* `*this`.

```
basic_string& append(const charT* s, size_type n);
```

12 *Requires:* `s` points to an array of at least `n` elements of `charT`.

13 *Throws:* `length_error` if `size() + n > max_size()`.

14 *Effects:* The function replaces the string controlled by **this* with a string of length `size() + n` whose first `size()` elements are a copy of the original string controlled by **this* and whose remaining elements are a copy of the initial `n` elements of `s`.

15 *Returns:* **this*.

```
basic_string& append(const charT* s);
```

16 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

17 *Effects:* Calls `append(s, traits::length(s))`.

18 *Returns:* **this*.

```
basic_string& append(size_type n, charT c);
```

19 *Effects:* Equivalent to: `return append(basic_string(n, c));`

```
template<class InputIterator>
```

```
basic_string& append(InputIterator first, InputIterator last);
```

20 *Requires:* `[first, last)` is a valid range.

21 *Effects:* Equivalent to: `return append(basic_string(first, last, get_allocator()));`

```
basic_string& append(initializer_list<charT> il);
```

22 *Effects:* Calls `append(il.begin(), il.size())`.

23 *Returns:* **this*.

```
void push_back(charT c);
```

24 *Effects:* Equivalent to `append(static_cast<size_type>(1), c)`.

25.3.2.6.3 `basic_string::assign`

[string.assign]

```
basic_string& assign(const basic_string& str);
```

1 *Effects:* Equivalent to: `return *this = str;`

```
basic_string& assign(basic_string&& str)
```

```
noexcept(allocator_traits<Allocator>::propagate_on_container_move_assignment::value ||
allocator_traits<Allocator>::is_always_equal::value);
```

2 *Effects:* Equivalent to: `return *this = std::move(str);`

```
basic_string& assign(const basic_string& str, size_type pos, size_type n = npos);
```

3 *Throws:* `out_of_range` if `pos > str.size()`.

4 *Effects:* Determines the effective length `rlen` of the string to assign as the smaller of `n` and `str.size() - pos` and calls `assign(str.data() + pos, rlen)`.

5 *Returns:* **this*.

```
template<class T>
```

```
basic_string& assign(const T& t);
```

6 *Effects:* Equivalent to:

```
{
    basic_string_view<charT, traits> sv = t;
    return assign(sv.data(), sv.size());
}
```

7 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
template<class T>
```

```
basic_string& assign(const T& t, size_type pos, size_type n = npos);
```

8 *Throws:* `out_of_range` if `pos > sv.size()`.

9 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`. Determines the effective length `rlen` of the string to assign as the smaller of `n` and `sv.size() - pos` and calls `assign(sv.data() + pos, rlen)`.

10 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

11 *Returns:* `*this`.

```
basic_string& assign(const charT* s, size_type n);
```

12 *Requires:* `s` points to an array of at least `n` elements of `charT`.

13 *Throws:* `length_error` if `n > max_size()`.

14 *Effects:* Replaces the string controlled by `*this` with a string of length `n` whose elements are a copy of those pointed to by `s`.

15 *Returns:* `*this`.

```
basic_string& assign(const charT* s);
```

16 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

17 *Effects:* Calls `assign(s, traits::length(s))`.

18 *Returns:* `*this`.

```
basic_string& assign(initializer_list<charT> il);
```

19 *Effects:* Calls `assign(il.begin(), il.size())`.

20 *Returns:* `*this`.

```
basic_string& assign(size_type n, charT c);
```

21 *Effects:* Equivalent to: `return assign(basic_string(n, c));`

```
template<class InputIterator>
```

```
basic_string& assign(InputIterator first, InputIterator last);
```

22 *Effects:* Equivalent to: `return assign(basic_string(first, last, get_allocator()));`

25.3.2.6.4 `basic_string::insert` [string.insert]

```
basic_string& insert(size_type pos, const basic_string& str);
```

1 *Effects:* Equivalent to: `return insert(pos, str.data(), str.size());`

```
basic_string& insert(size_type pos1, const basic_string& str, size_type pos2, size_type n = npos);
```

2 *Throws:* `out_of_range` if `pos1 > size()` or `pos2 > str.size()`.

3 *Effects:* Determines the effective length `rlen` of the string to insert as the smaller of `n` and `str.size() - pos2` and calls `insert(pos1, str.data() + pos2, rlen)`.

4 *Returns:* `*this`.

```
template<class T>
```

```
basic_string& insert(size_type pos, const T& t);
```

5 *Effects:* Equivalent to:

```
{
    basic_string_view<charT, traits> sv = t;
    return insert(pos, sv.data(), sv.size());
}
```

6 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```

template<class T>
  basic_string& insert(size_type pos1, const T& t, size_type pos2, size_type n = npos);
7     Throws: out_of_range if pos1 > size() or pos2 > sv.size().
8     Effects: Creates a variable, sv, as if by basic_string_view<charT, traits> sv = t. Determines
    the effective length rlen of the string to assign as the smaller of n and sv.size() - pos2 and calls
    insert(pos1, sv.data() + pos2, rlen).
9     Remarks: This function shall not participate in overload resolution unless is_convertible_v<const T&,
    basic_string_view<charT, traits>> is true and is_convertible_v<const T&, const charT*>
    is false.
10    Returns: *this.

basic_string& insert(size_type pos, const charT* s, size_type n);
11    Requires: s points to an array of at least n elements of charT.
12    Throws: out_of_range if pos > size() or length_error if size() + n > max_size().
13    Effects: Replaces the string controlled by *this with a string of length size() + n whose first pos
    elements are a copy of the initial elements of the original string controlled by *this and whose next n
    elements are a copy of the elements in s and whose remaining elements are a copy of the remaining
    elements of the original string controlled by *this.
14    Returns: *this.

basic_string& insert(size_type pos, const charT* s);
15    Requires: s points to an array of at least traits::length(s) + 1 elements of charT.
16    Effects: Equivalent to: return insert(pos, s, traits::length(s));

basic_string& insert(size_type pos, size_type n, charT c);
17    Effects: Equivalent to: return insert(pos, basic_string(n, c));

iterator insert(const_iterator p, charT c);
18    Requires: p is a valid iterator on *this.
19    Effects: Inserts a copy of c before the character referred to by p.
20    Returns: An iterator which refers to the copy of the inserted character.

iterator insert(const_iterator p, size_type n, charT c);
21    Requires: p is a valid iterator on *this.
22    Effects: Inserts n copies of c before the character referred to by p.
23    Returns: An iterator which refers to the copy of the first inserted character, or p if n == 0.

template<class InputIterator>
  iterator insert(const_iterator p, InputIterator first, InputIterator last);
24    Requires: p is a valid iterator on *this. [first, last) is a valid range.
25    Effects: Equivalent to insert(p - begin(), basic_string(first, last, get_allocator())).
26    Returns: An iterator which refers to the copy of the first inserted character, or p if first == last.

iterator insert(const_iterator p, initializer_list<charT> il);
27    Effects: As if by insert(p, il.begin(), il.end()).
28    Returns: An iterator which refers to the copy of the first inserted character, or p if il is empty.

```

25.3.2.6.5 basic_string::erase [string.erase]

```

basic_string& erase(size_type pos = 0, size_type n = npos);
1     Throws: out_of_range if pos > size().
2     Effects: Determines the effective length xlen of the string to be removed as the smaller of n and size()
    - pos.

```


3 The function then replaces the string controlled by **this* with a string of length `size() - xlen` whose first `pos` elements are a copy of the initial elements of the original string controlled by **this*, and whose remaining elements are a copy of the elements of the original string controlled by **this* beginning at position `pos + xlen`.

4 *Returns:* **this*.

```
iterator erase(const_iterator p);
```

5 *Throws:* Nothing.

6 *Effects:* Removes the character referred to by `p`.

7 *Returns:* An iterator which points to the element immediately following `p` prior to the element being erased. If no such element exists, `end()` is returned.

```
iterator erase(const_iterator first, const_iterator last);
```

8 *Requires:* `first` and `last` are valid iterators on **this*, defining a range `[first, last)`.

9 *Throws:* Nothing.

10 *Effects:* Removes the characters in the range `[first, last)`.

11 *Returns:* An iterator which points to the element pointed to by `last` prior to the other elements being erased. If no such element exists, `end()` is returned.

```
void pop_back();
```

12 *Requires:* `!empty()`.

13 *Throws:* Nothing.

14 *Effects:* Equivalent to `erase(size() - 1, 1)`.

25.3.2.6.6 `basic_string::replace` [string.replace]

```
basic_string& replace(size_type pos1, size_type n1, const basic_string& str);
```

1 *Effects:* Equivalent to: `return replace(pos1, n1, str.data(), str.size());`

```
basic_string& replace(size_type pos1, size_type n1, const basic_string& str,
                    size_type pos2, size_type n2 = npos);
```

2 *Throws:* `out_of_range` if `pos1 > size()` or `pos2 > str.size()`.

3 *Effects:* Determines the effective length `rlen` of the string to be inserted as the smaller of `n2` and `str.size() - pos2` and calls `replace(pos1, n1, str.data() + pos2, rlen)`.

4 *Returns:* **this*.

```
template<class T>
```

```
basic_string& replace(size_type pos1, size_type n1, const T& t);
```

5 *Effects:* Equivalent to:

```
{
    basic_string_view<charT, traits> sv = t;
    return replace(pos1, n1, sv.data(), sv.size());
}
```

6 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
template<class T>
```

```
basic_string& replace(size_type pos1, size_type n1, const T& t,
                    size_type pos2, size_type n2 = npos);
```

7 *Throws:* `out_of_range` if `pos1 > size()` or `pos2 > sv.size()`.

8 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`. Determines the effective length `rlen` of the string to be inserted as the smaller of `n2` and `sv.size() - pos2` and calls `replace(pos1, n1, sv.data() + pos2, rlen)`.

9 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

10 *Returns:* `*this`.

```
basic_string& replace(size_type pos1, size_type n1, const charT* s, size_type n2);
```

11 *Requires:* `s` points to an array of at least `n2` elements of `charT`.

12 *Throws:* `out_of_range` if `pos1 > size()` or `length_error` if the length of the resulting string would exceed `max_size()` (see below).

13 *Effects:* Determines the effective length `xlen` of the string to be removed as the smaller of `n1` and `size() - pos1`. If `size() - xlen >= max_size() - n2` throws `length_error`. Otherwise, the function replaces the string controlled by `*this` with a string of length `size() - xlen + n2` whose first `pos1` elements are a copy of the initial elements of the original string controlled by `*this`, whose next `n2` elements are a copy of the initial `n2` elements of `s`, and whose remaining elements are a copy of the elements of the original string controlled by `*this` beginning at position `pos + xlen`.

14 *Returns:* `*this`.

```
basic_string& replace(size_type pos, size_type n, const charT* s);
```

15 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

16 *Effects:* Equivalent to: `return replace(pos, n, s, traits::length(s));`

```
basic_string& replace(size_type pos1, size_type n1, size_type n2, charT c);
```

17 *Effects:* Equivalent to: `return replace(pos1, n1, basic_string(n2, c));`

```
basic_string& replace(const_iterator i1, const_iterator i2, const basic_string& str);
```

18 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges.

19 *Effects:* Calls `replace(i1 - begin(), i2 - i1, str)`.

20 *Returns:* `*this`.

```
template<class T>
```

```
basic_string& replace(const_iterator i1, const_iterator i2, const T& t);
```

21 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges.

22 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t;` and then calls `replace(i1 - begin(), i2 - i1, sv)`.

23 *Returns:* `*this`.

24 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
basic_string& replace(const_iterator i1, const_iterator i2, const charT* s, size_type n);
```

25 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges and `s` points to an array of at least `n` elements of `charT`.

26 *Effects:* Calls `replace(i1 - begin(), i2 - i1, s, n)`.

27 *Returns:* `*this`.

```
basic_string& replace(const_iterator i1, const_iterator i2, const charT* s);
```

28 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges and `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

29 *Effects:* Calls `replace(i1 - begin(), i2 - i1, s, traits::length(s))`.

30 *Returns:* `*this`.

```
basic_string& replace(const_iterator i1, const_iterator i2, size_type n, charT c);
```

31 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges.

32 *Effects:* Calls `replace(i1 - begin(), i2 - i1, basic_string(n, c))`.

33 *Returns:* `*this`.

```
template<class InputIterator>
```

```
basic_string& replace(const_iterator i1, const_iterator i2, InputIterator j1, InputIterator j2);
```

34 *Requires:* `[begin(), i1)`, `[i1, i2)` and `[j1, j2)` are valid ranges.

35 *Effects:* Calls `replace(i1 - begin(), i2 - i1, basic_string(j1, j2, get_allocator()))`.

36 *Returns:* `*this`.

```
basic_string& replace(const_iterator i1, const_iterator i2, initializer_list<charT> il);
```

37 *Requires:* `[begin(), i1)` and `[i1, i2)` are valid ranges.

38 *Effects:* Calls `replace(i1 - begin(), i2 - i1, il.begin(), il.size())`.

39 *Returns:* `*this`.

25.3.2.6.7 `basic_string::copy` [string.copy]

```
size_type copy(charT* s, size_type n, size_type pos = 0) const;
```

1 Let `rlen` be the smaller of `n` and `size() - pos`.

2 *Throws:* `out_of_range` if `pos > size()`.

3 *Requires:* `[s, s + rlen)` is a valid range.

4 *Effects:* Equivalent to `traits::copy(s, data() + pos, rlen)`. [Note: This does not terminate `s` with a null object. — end note]

5 *Returns:* `rlen`.

25.3.2.6.8 `basic_string::swap` [string.swap]

```
void swap(basic_string& s)
```

```
noexcept(allocator_traits<Allocator>::propagate_on_container_swap::value ||
         allocator_traits<Allocator>::is_always_equal::value);
```

1 *Ensures:* `*this` contains the same sequence of characters that was in `s`, `s` contains the same sequence of characters that was in `*this`.

2 *Throws:* Nothing.

3 *Complexity:* Constant time.

25.3.2.7 String operations [string.ops]

25.3.2.7.1 Accessors [string.accessors]

```
const charT* c_str() const noexcept;
```

```
const charT* data() const noexcept;
```

1 *Returns:* A pointer `p` such that `p + i == &operator[](i)` for each `i` in `[0, size())`.

2 *Complexity:* Constant time.

3 *Requires:* The program shall not alter any of the values stored in the character array.

```
charT* data() noexcept;
```

4 *Returns:* A pointer `p` such that `p + i == &operator[](i)` for each `i` in `[0, size())`.

5 *Complexity:* Constant time.

6 *Requires:* The program shall not alter the value stored at `p + size()`.

```
operator basic_string_view<charT, traits>() const noexcept;
```

7 *Effects:* Equivalent to: `return basic_string_view<charT, traits>(data(), size());`

```
allocator_type get_allocator() const noexcept;
```

8 *Returns:* A copy of the `Allocator` object used to construct the string or, if that allocator has been replaced, a copy of the most recent replacement.

25.3.2.7.2 basic_string::find**[string.find]**

```
template<class T>
```

```
    size_type find(const T& t, size_type pos = 0) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the lowest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `pos <= xpos` and `xpos + sv.size() <= size()`;

(1.2) — `traits::eq(at(xpos + I), sv.at(I))` for all elements `I` of the data referenced by `sv`.

2 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

3 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

4 *Throws:* Nothing unless the initialization of `sv` throws an exception.

```
size_type find(const basic_string& str, size_type pos = 0) const noexcept;
```

5 *Effects:* Equivalent to: `return find(basic_string_view<charT, traits>(str), pos)`;

```
size_type find(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `find(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type find(const charT* s, size_type pos = 0) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `find(basic_string_view<charT, traits>(s), pos)`.

```
size_type find(charT c, size_type pos = 0) const;
```

9 *Returns:* `find(basic_string(1, c), pos)`.

25.3.2.7.3 basic_string::rfind**[string.rfind]**

```
template<class T>
```

```
    size_type rfind(const T& t, size_type pos = npos) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the highest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `xpos <= pos` and `xpos + sv.size() <= size()`;

(1.2) — `traits::eq(at(xpos + I), sv.at(I))` for all elements `I` of the data referenced by `sv`.

2 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

3 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

4 *Throws:* Nothing unless the initialization of `sv` throws an exception.

```
size_type rfind(const basic_string& str, size_type pos = npos) const noexcept;
```

5 *Effects:* Equivalent to: `return rfind(basic_string_view<charT, traits>(str), pos)`;

```
size_type rfind(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `rfind(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type rfind(const charT* s, size_type pos = npos) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `rfind(basic_string_view<charT, traits>(s), pos)`.

```
size_type rfind(charT c, size_type pos = npos) const;
```

9 *Returns:* `rfind(basic_string(1, c), pos)`.

25.3.2.7.4 basic_string::find_first_of [string.find.first.of]

```
template<class T>
```

```
size_type find_first_of(const T& t, size_type pos = 0) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the lowest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `pos <= xpos` and `xpos < size()`;

(1.2) — `traits::eq(at(xpos), sv.at(I))` for some element `I` of the data referenced by `sv`.

2 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

3 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

4 *Throws:* Nothing unless the initialization of `sv` throws an exception.

```
size_type find_first_of(const basic_string& str, size_type pos = 0) const noexcept;
```

5 *Effects:* Equivalent to: `return find_first_of(basic_string_view<charT, traits>(str), pos)`;

```
size_type find_first_of(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `find_first_of(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type find_first_of(const charT* s, size_type pos = 0) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `find_first_of(basic_string_view<charT, traits>(s), pos)`.

```
size_type find_first_of(charT c, size_type pos = 0) const;
```

9 *Returns:* `find_first_of(basic_string(1, c), pos)`.

25.3.2.7.5 basic_string::find_last_of [string.find.last.of]

```
template<class T>
```

```
size_type find_last_of(const T& t, size_type pos = npos) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the highest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `xpos <= pos` and `xpos < size()`;

(1.2) — `traits::eq(at(xpos), sv.at(I))` for some element `I` of the data referenced by `sv`.

2 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

3 *Throws:* Nothing unless the initialization of `sv` throws an exception.

4 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
size_type find_last_of(const basic_string& str, size_type pos = npos) const noexcept;
```

5 *Effects:* Equivalent to: `return find_last_of(basic_string_view<charT, traits>(str), pos)`;

```
size_type find_last_of(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `find_last_of(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type find_last_of(const charT* s, size_type pos = npos) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `find_last_of(basic_string_view<charT, traits>(s), pos)`.

```
size_type find_last_of(charT c, size_type pos = npos) const;
```

9 *Returns:* `find_last_of(basic_string(1, c), pos)`.

25.3.2.7.6 basic_string::find_first_not_of [string.find.first.not.of]

```
template<class T>
```

```
size_type find_first_not_of(const T& t, size_type pos = 0) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the lowest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `pos <= xpos` and `xpos < size()`;

(1.2) — `traits::eq(at(xpos), sv.at(I))` for no element `I` of the data referenced by `sv`.

2 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

3 *Throws:* Nothing unless the initialization of `sv` throws an exception.

4 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
size_type find_first_not_of(const basic_string& str, size_type pos = 0) const noexcept;
```

5 *Effects:* Equivalent to:

```
return find_first_not_of(basic_string_view<charT, traits>(str), pos);
```

```
size_type find_first_not_of(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `find_first_not_of(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type find_first_not_of(const charT* s, size_type pos = 0) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `find_first_not_of(basic_string_view<charT, traits>(s), pos)`.

```
size_type find_first_not_of(charT c, size_type pos = 0) const;
```

9 *Returns:* `find_first_not_of(basic_string(1, c), pos)`.

25.3.2.7.7 basic_string::find_last_not_of [string.find.last.not.of]

```
template<class T>
```

```
size_type find_last_not_of(const T& t, size_type pos = npos) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the highest position `xpos`, if possible, such that both of the following conditions hold:

(1.1) — `xpos <= pos` and `xpos < size()`;

(1.2) — `traits::eq(at(xpos), sv.at(I))` for no element `I` of the data referenced by `sv`.

2 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

3 *Throws:* Nothing unless the initialization of `sv` throws an exception.

4 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
size_type find_last_not_of(const basic_string& str, size_type pos = npos) const noexcept;
```

5 *Effects:* Equivalent to:

```
return find_last_not_of(basic_string_view<charT, traits>(str), pos);
```

```
size_type find_last_not_of(const charT* s, size_type pos, size_type n) const;
```

6 *Returns:* `find_last_not_of(basic_string_view<charT, traits>(s, n), pos)`.

```
size_type find_last_not_of(const charT* s, size_type pos = npos) const;
```

7 *Requires:* `s` points to an array of at least `traits::length(s) + 1` elements of `charT`.

8 *Returns:* `find_last_not_of(basic_string_view<charT, traits>(s), pos)`.

```
size_type find_last_not_of(charT c, size_type pos = npos) const;
```

9 *Returns:* `find_last_not_of(basic_string(1, c), pos)`.

25.3.2.7.8 `basic_string::substr` [string.substr]

```
basic_string substr(size_type pos = 0, size_type n = npos) const;
```

1 *Throws:* `out_of_range` if `pos > size()`.

2 *Effects:* Determines the effective length `rlen` of the string to copy as the smaller of `n` and `size() - pos`.

3 *Returns:* `basic_string(data()+pos, rlen)`.

25.3.2.7.9 `basic_string::compare` [string.compare]

```
template<class T>
int compare(const T& t) const;
```

1 *Effects:* Creates a variable, `sv`, as if by `basic_string_view<charT, traits> sv = t`; and then determines the effective length `rlen` of the strings to compare as the smaller of `size()` and `sv.size()`. The function then compares the two strings by calling `traits::compare(data(), sv.data(), rlen)`.

2 *Returns:* The nonzero result if the result of the comparison is nonzero. Otherwise, returns a value as indicated in Table 61.

Table 61 — `compare()` results

Condition	Return Value
<code>size() < sv.size()</code>	<code>< 0</code>
<code>size() == sv.size()</code>	<code>0</code>
<code>size() > sv.size()</code>	<code>> 0</code>

3 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

4 *Throws:* Nothing unless the initialization of `sv` throws an exception.

```
template<class T>
int compare(size_type pos1, size_type n1, const T& t) const;
```

5 *Effects:* Equivalent to:

```
{
    basic_string_view<charT, traits> sv = t;
    return basic_string_view<charT, traits>(data(), size()).substr(pos1, n1).compare(sv);
}
```

6 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
template<class T>
int compare(size_type pos1, size_type n1, const T& t, size_type pos2, size_type n2 = npos) const;
```

7 *Effects:* Equivalent to:

```
basic_string_view<charT, traits> sv = t;
return basic_string_view<charT, traits>(
    data(), size()).substr(pos1, n1).compare(sv.substr(pos2, n2));
```

8 *Remarks:* This function shall not participate in overload resolution unless `is_convertible_v<const T&, basic_string_view<charT, traits>>` is true and `is_convertible_v<const T&, const charT*>` is false.

```
int compare(const basic_string& str) const noexcept;
```

9 *Effects:* Equivalent to: `return compare(basic_string_view<charT, traits>(str));`

```
int compare(size_type pos1, size_type n1, const basic_string& str) const;
```

10 *Effects:* Equivalent to: `return compare(pos1, n1, basic_string_view<charT, traits>(str));`

```
int compare(size_type pos1, size_type n1, const basic_string& str,
            size_type pos2, size_type n2 = npos) const;
```

11 *Effects:* Equivalent to:

```
return compare(pos1, n1, basic_string_view<charT, traits>(str), pos2, n2);
```

```
int compare(const charT* s) const;
```

12 *Returns:* `compare(basic_string(s))`.

```
int compare(size_type pos, size_type n1, const charT* s) const;
```

13 *Returns:* `basic_string(*this, pos, n1).compare(basic_string(s))`.

```
int compare(size_type pos, size_type n1, const charT* s, size_type n2) const;
```

14 *Returns:* `basic_string(*this, pos, n1).compare(basic_string(s, n2))`.

25.3.2.7.10 `basic_string::starts_with` [string.starts.with]

```
bool starts_with(basic_string_view<charT, traits> x) const noexcept;
```

```
bool starts_with(charT x) const noexcept;
```

```
bool starts_with(const charT* x) const;
```

1 *Effects:* Equivalent to:

```
return basic_string_view<charT, traits>(data(), size()).starts_with(x);
```

25.3.2.7.11 `basic_string::ends_with` [string.ends.with]

```
bool ends_with(basic_string_view<charT, traits> x) const noexcept;
```

```
bool ends_with(charT x) const noexcept;
```

```
bool ends_with(const charT* x) const;
```

1 *Effects:* Equivalent to:

```
return basic_string_view<charT, traits>(data(), size()).ends_with(x);
```

25.3.3 Non-member functions [string.nonmembers]

25.3.3.1 `operator+` [string.op+]

```
template<class charT, class traits, class Allocator>
```

```
basic_string<charT, traits, Allocator>
```

```
operator+(const basic_string<charT, traits, Allocator>& lhs,
          const basic_string<charT, traits, Allocator>& rhs);
```

1 *Returns:* `basic_string<charT, traits, Allocator>(lhs).append(rhs)`.

```
template<class charT, class traits, class Allocator>
```

```
basic_string<charT, traits, Allocator>
```

```
operator+(basic_string<charT, traits, Allocator>&& lhs,
          const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* `std::move(lhs.append(rhs))`.

```
template<class charT, class traits, class Allocator>
```

```
basic_string<charT, traits, Allocator>
```

```
operator+(const basic_string<charT, traits, Allocator>& lhs,
          basic_string<charT, traits, Allocator>&& rhs);
```

3 *Returns:* `std::move(rhs.insert(0, lhs))`.

```
template<class charT, class traits, class Allocator>
```

```
basic_string<charT, traits, Allocator>
```

```
operator+(basic_string<charT, traits, Allocator>&& lhs,
          basic_string<charT, traits, Allocator>&& rhs);
```

4 *Returns:* `std::move(lhs.append(rhs))`. [Note: Or equivalently, `std::move(rhs.insert(0, lhs))`. — end note]


```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);

```

5 *Returns:* basic_string<charT, traits, Allocator>(lhs) + rhs.

6 *Remarks:* Uses traits::length().

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(const charT* lhs, basic_string<charT, traits, Allocator>&& rhs);

```

7 *Returns:* std::move(rhs.insert(0, lhs)).

8 *Remarks:* Uses traits::length().

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(charT lhs, const basic_string<charT, traits, Allocator>& rhs);

```

9 *Returns:* basic_string<charT, traits, Allocator>(1, lhs) + rhs.

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(charT lhs, basic_string<charT, traits, Allocator>&& rhs);

```

10 *Returns:* std::move(rhs.insert(0, 1, lhs)).

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);

```

11 *Returns:* lhs + basic_string<charT, traits, Allocator>(rhs).

12 *Remarks:* Uses traits::length().

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(basic_string<charT, traits, Allocator>&& lhs, const charT* rhs);

```

13 *Returns:* std::move(lhs.append(rhs)).

14 *Remarks:* Uses traits::length().

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(const basic_string<charT, traits, Allocator>& lhs, charT rhs);

```

15 *Returns:* lhs + basic_string<charT, traits, Allocator>(1, rhs).

```

template<class charT, class traits, class Allocator>
  basic_string<charT, traits, Allocator>
  operator+(basic_string<charT, traits, Allocator>&& lhs, charT rhs);

```

16 *Returns:* std::move(lhs.append(1, rhs)).

25.3.3.2 operator==

[string.operator==]

```

template<class charT, class traits, class Allocator>
  bool operator==(const basic_string<charT, traits, Allocator>& lhs,
                 const basic_string<charT, traits, Allocator>& rhs) noexcept;

```

1 *Returns:* lhs.compare(rhs) == 0.

```

template<class charT, class traits, class Allocator>
  bool operator==(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);

```

2 *Returns:* rhs == lhs.

```

template<class charT, class traits, class Allocator>
  bool operator==(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);

```

3 *Requires:* rhs points to an array of at least traits::length(rhs) + 1 elements of charT.

4 *Returns:* lhs.compare(rhs) == 0.

25.3.3.3 operator!= [string.op!=]

```
template<class charT, class traits, class Allocator>
    bool operator!=(const basic_string<charT, traits, Allocator>& lhs,
                    const basic_string<charT, traits, Allocator>& rhs) noexcept;
```

1 *Returns:* !(lhs == rhs).

```
template<class charT, class traits, class Allocator>
    bool operator!=(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* rhs != lhs.

```
template<class charT, class traits, class Allocator>
    bool operator!=(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);
```

3 *Requires:* rhs points to an array of at least traits::length(rhs) + 1 elements of charT.

4 *Returns:* lhs.compare(rhs) != 0.

25.3.3.4 operator< [string.op<]

```
template<class charT, class traits, class Allocator>
    bool operator<(const basic_string<charT, traits, Allocator>& lhs,
                  const basic_string<charT, traits, Allocator>& rhs) noexcept;
```

1 *Returns:* lhs.compare(rhs) < 0.

```
template<class charT, class traits, class Allocator>
    bool operator<(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* rhs.compare(lhs) > 0.

```
template<class charT, class traits, class Allocator>
    bool operator<(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);
```

3 *Returns:* lhs.compare(rhs) < 0.

25.3.3.5 operator> [string.op>]

```
template<class charT, class traits, class Allocator>
    bool operator>(const basic_string<charT, traits, Allocator>& lhs,
                  const basic_string<charT, traits, Allocator>& rhs) noexcept;
```

1 *Returns:* lhs.compare(rhs) > 0.

```
template<class charT, class traits, class Allocator>
    bool operator>(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* rhs.compare(lhs) < 0.

```
template<class charT, class traits, class Allocator>
    bool operator>(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);
```

3 *Returns:* lhs.compare(rhs) > 0.

25.3.3.6 operator<= [string.op<=]

```
template<class charT, class traits, class Allocator>
    bool operator<=(const basic_string<charT, traits, Allocator>& lhs,
                   const basic_string<charT, traits, Allocator>& rhs) noexcept;
```

1 *Returns:* lhs.compare(rhs) <= 0.

```
template<class charT, class traits, class Allocator>
    bool operator<=(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* rhs.compare(lhs) >= 0.

```
template<class charT, class traits, class Allocator>
    bool operator<=(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);
```

3 *Returns:* lhs.compare(rhs) <= 0.

25.3.3.7 operator>= [string.op>=]

```
template<class charT, class traits, class Allocator>
    bool operator>=(const basic_string<charT, traits, Allocator>& lhs,
                   const basic_string<charT, traits, Allocator>& rhs) noexcept;
```

1 *Returns:* lhs.compare(rhs) >= 0.

```
template<class charT, class traits, class Allocator>
    bool operator>=(const charT* lhs, const basic_string<charT, traits, Allocator>& rhs);
```

2 *Returns:* rhs.compare(lhs) <= 0.

```
template<class charT, class traits, class Allocator>
    bool operator>=(const basic_string<charT, traits, Allocator>& lhs, const charT* rhs);
```

3 *Returns:* lhs.compare(rhs) >= 0.

25.3.3.8 swap [string.special]

```
template<class charT, class traits, class Allocator>
    void swap(basic_string<charT, traits, Allocator>& lhs,
              basic_string<charT, traits, Allocator>& rhs)
    noexcept(noexcept(lhs.swap(rhs)));
```

1 *Effects:* Equivalent to lhs.swap(rhs).

25.3.3.9 Inserters and extractors [string.io]

```
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
    operator>>(basic_istream<charT, traits>& is, basic_string<charT, traits, Allocator>& str);
```

1 *Effects:* Behaves as a formatted input function (31.7.4.2.1). After constructing a `sentry` object, if the `sentry` converts to `true`, calls `str.erase()` and then extracts characters from `is` and appends them to `str` as if by calling `str.append(1, c)`. If `is.width()` is greater than zero, the maximum number `n` of characters appended is `is.width()`; otherwise `n` is `str.max_size()`. Characters are extracted and appended until any of the following occurs:

(1.1) — `n` characters are stored;

(1.2) — end-of-file occurs on the input sequence;

(1.3) — `isspace(c, is.getloc())` is true for the next available input character `c`.

2 After the last character (if any) is extracted, `is.width(0)` is called and the `sentry` object is destroyed.

3 If the function extracts no characters, it calls `is.setstate(ios::failbit)`, which may throw `ios_base::failure` (31.5.5.4).

4 *Returns:* `is`.

```
template<class charT, class traits, class Allocator>
    basic_ostream<charT, traits>&
    operator<<(basic_ostream<charT, traits>& os,
              const basic_string<charT, traits, Allocator>& str);
```

5 *Effects:* Equivalent to: `return os << basic_string_view<charT, traits>(str);`

```
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
    getline(basic_istream<charT, traits>& is,
            basic_string<charT, traits, Allocator>& str,
            charT delim);
```

```
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
    getline(basic_istream<charT, traits>&& is,
            basic_string<charT, traits, Allocator>& str,
            charT delim);
```

6 *Effects:* Behaves as an unformatted input function (31.7.4.3), except that it does not affect the value returned by subsequent calls to `basic_istream<>::gcount()`. After constructing a `sentry` object,

if the sentry converts to `true`, calls `str.erase()` and then extracts characters from `is` and appends them to `str` as if by calling `str.append(1, c)` until any of the following occurs:

- (6.1) — end-of-file occurs on the input sequence (in which case, the `getline` function calls `is.setstate(ios_base::eofbit)`).
- (6.2) — `traits::eq(c, delim)` for the next available input character `c` (in which case, `c` is extracted but not appended) (31.5.5.4)
- (6.3) — `str.max_size()` characters are stored (in which case, the function calls `is.setstate(ios_base::failbit)`) (31.5.5.4)

7 The conditions are tested in the order shown. In any case, after the last character is extracted, the sentry object is destroyed.

8 If the function extracts no characters, it calls `is.setstate(ios_base::failbit)` which may throw `ios_base::failure` (31.5.5.4).

9 *Returns:* `is`.

```
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>& is,
                basic_string<charT, traits, Allocator>& str);
template<class charT, class traits, class Allocator>
    basic_istream<charT, traits>&
        getline(basic_istream<charT, traits>&& is,
                basic_string<charT, traits, Allocator>& str);
```

10 *Returns:* `getline(is, str, is.widen('\n'))`.

25.3.4 Numeric conversions

[string.conversions]

```
int stoi(const string& str, size_t* idx = nullptr, int base = 10);
long stol(const string& str, size_t* idx = nullptr, int base = 10);
unsigned long stoul(const string& str, size_t* idx = nullptr, int base = 10);
long long stoll(const string& str, size_t* idx = nullptr, int base = 10);
unsigned long long stoull(const string& str, size_t* idx = nullptr, int base = 10);
```

1 *Effects:* The first two functions call `strtol(str.c_str(), ptr, base)`, and the last three functions call `strtoul(str.c_str(), ptr, base)`, `strtoll(str.c_str(), ptr, base)`, and `strtoull(str.c_str(), ptr, base)`, respectively. Each function returns the converted result, if any. The argument `ptr` designates a pointer to an object internal to the function that is used to determine what to store at `*idx`. If the function does not throw an exception and `idx != 0`, the function stores in `*idx` the index of the first unconverted element of `str`.

2 *Returns:* The converted result.

3 *Throws:* `invalid_argument` if `strtol`, `strtoul`, `strtoll`, or `strtoull` reports that no conversion could be performed. Throws `out_of_range` if `strtol`, `strtoul`, `strtoll` or `strtoull` sets `errno` to `ERANGE`, or if the converted value is outside the range of representable values for the return type.

```
float stof(const string& str, size_t* idx = nullptr);
double stod(const string& str, size_t* idx = nullptr);
long double stold(const string& str, size_t* idx = nullptr);
```

4 *Effects:* These functions call `strtof(str.c_str(), ptr)`, `strtod(str.c_str(), ptr)`, and `strtold(str.c_str(), ptr)`, respectively. Each function returns the converted result, if any. The argument `ptr` designates a pointer to an object internal to the function that is used to determine what to store at `*idx`. If the function does not throw an exception and `idx != 0`, the function stores in `*idx` the index of the first unconverted element of `str`.

5 *Returns:* The converted result.

6 *Throws:* `invalid_argument` if `strtof`, `strtod`, or `strtold` reports that no conversion could be performed. Throws `out_of_range` if `strtof`, `strtod`, or `strtold` sets `errno` to `ERANGE` or if the converted value is outside the range of representable values for the return type.

```

string to_string(int val);
string to_string(unsigned val);
string to_string(long val);
string to_string(unsigned long val);
string to_string(long long val);
string to_string(unsigned long long val);
string to_string(float val);
string to_string(double val);
string to_string(long double val);

```

- 7 *Returns:* Each function returns a `string` object holding the character representation of the value of its argument that would be generated by calling `sprintf(buf, fmt, val)` with a format specifier of `"%d"`, `"%u"`, `"%ld"`, `"%lu"`, `"%lld"`, `"%llu"`, `"%f"`, `"%F"`, or `"%Lf"`, respectively, where `buf` designates an internal character buffer of sufficient size.

```

int stoi(const wstring& str, size_t* idx = nullptr, int base = 10);
long stol(const wstring& str, size_t* idx = nullptr, int base = 10);
unsigned long stoul(const wstring& str, size_t* idx = nullptr, int base = 10);
long long stoll(const wstring& str, size_t* idx = nullptr, int base = 10);
unsigned long long stoull(const wstring& str, size_t* idx = nullptr, int base = 10);

```

- 8 *Effects:* The first two functions call `wcstol(str.c_str(), ptr, base)`, and the last three functions call `wcstoul(str.c_str(), ptr, base)`, `wcstoll(str.c_str(), ptr, base)`, and `wcstoull(str.c_str(), ptr, base)`, respectively. Each function returns the converted result, if any. The argument `ptr` designates a pointer to an object internal to the function that is used to determine what to store at `*idx`. If the function does not throw an exception and `idx != 0`, the function stores in `*idx` the index of the first unconverted element of `str`.

- 9 *Returns:* The converted result.

- 10 *Throws:* `invalid_argument` if `wcstol`, `wcstoul`, `wcstoll`, or `wcstoull` reports that no conversion could be performed. Throws `out_of_range` if the converted value is outside the range of representable values for the return type.

```

float stof(const wstring& str, size_t* idx = nullptr);
double stod(const wstring& str, size_t* idx = nullptr);
long double stold(const wstring& str, size_t* idx = nullptr);

```

- 11 *Effects:* These functions call `wcstof(str.c_str(), ptr)`, `wcstod(str.c_str(), ptr)`, and `wcstold(str.c_str(), ptr)`, respectively. Each function returns the converted result, if any. The argument `ptr` designates a pointer to an object internal to the function that is used to determine what to store at `*idx`. If the function does not throw an exception and `idx != 0`, the function stores in `*idx` the index of the first unconverted element of `str`.

- 12 *Returns:* The converted result.

- 13 *Throws:* `invalid_argument` if `wcstof`, `wcstod`, or `wcstold` reports that no conversion could be performed. Throws `out_of_range` if `wcstof`, `wcstod`, or `wcstold` sets `errno` to `ERANGE`.

```

wstring to_wstring(int val);
wstring to_wstring(unsigned val);
wstring to_wstring(long val);
wstring to_wstring(unsigned long val);
wstring to_wstring(long long val);
wstring to_wstring(unsigned long long val);
wstring to_wstring(float val);
wstring to_wstring(double val);
wstring to_wstring(long double val);

```

- 14 *Returns:* Each function returns a `wstring` object holding the character representation of the value of its argument that would be generated by calling `swprintf(buf, buffsz, fmt, val)` with a format specifier of `L"%d"`, `L"%u"`, `L"%ld"`, `L"%lu"`, `L"%lld"`, `L"%llu"`, `L"%f"`, `L"%F"`, or `L"%Lf"`, respectively, where `buf` designates an internal character buffer of sufficient size `buffsz`.

25.3.5 Hash support

[basic.string.hash]

```
template<> struct hash<string>;
```

```

template<> struct hash<u16string>;
template<> struct hash<u32string>;
template<> struct hash<wstring>;
template<> struct hash<pmr::string>;
template<> struct hash<pmr::u16string>;
template<> struct hash<pmr::u32string>;
template<> struct hash<pmr::wstring>;

```

- 1 If *S* is one of these string types, *SV* is the corresponding string view type, and *s* is an object of type *S*, then `hash<S>()(s) == hash<SV>()(SV(s))`.

25.3.6 Suffix for basic_string literals

[basic.string.literals]

```
string operator""s(const char* str, size_t len);
```

- 1 *Returns:* `string{str, len}`.

```
u16string operator""s(const char16_t* str, size_t len);
```

- 2 *Returns:* `u16string{str, len}`.

```
u32string operator""s(const char32_t* str, size_t len);
```

- 3 *Returns:* `u32string{str, len}`.

```
wstring operator""s(const wchar_t* str, size_t len);
```

- 4 *Returns:* `wstring{str, len}`.

- 5 [Note: The same suffix *s* is used for `chrono::duration` literals denoting seconds but there is no conflict, since duration suffixes apply to numbers and string literal suffixes apply to character array literals. — *end note*]

25.4 String view classes

[string.view]

- 1 The class template `basic_string_view` describes an object that can refer to a constant contiguous sequence of char-like (25.1) objects with the first element of the sequence at position zero. In the rest of this subclause, the type of the char-like objects held in a `basic_string_view` object is designated by `charT`.

- 2 [Note: The library provides implicit conversions from `const charT*` and `std::basic_string<charT, ...>` to `std::basic_string_view<charT, ...>` so that user code can accept just `std::basic_string_view<charT>` as a non-templated parameter wherever a sequence of characters is expected. User-defined types should define their own implicit conversions to `std::basic_string_view` in order to interoperate with these functions. — *end note*]

- 3 The complexity of `basic_string_view` member functions is $\mathcal{O}(1)$ unless otherwise specified.

25.4.1 Header <string_view> synopsis

[string.view.synop]

```

namespace std {
    // 25.4.2, class template basic_string_view
    template<class charT, class traits = char_traits<charT>>
    class basic_string_view;

    // 25.4.3, non-member comparison functions
    template<class charT, class traits>
    constexpr bool operator==(basic_string_view<charT, traits> x,
                             basic_string_view<charT, traits> y) noexcept;
    template<class charT, class traits>
    constexpr bool operator!=(basic_string_view<charT, traits> x,
                             basic_string_view<charT, traits> y) noexcept;
    template<class charT, class traits>
    constexpr bool operator<(basic_string_view<charT, traits> x,
                             basic_string_view<charT, traits> y) noexcept;
    template<class charT, class traits>
    constexpr bool operator>(basic_string_view<charT, traits> x,
                             basic_string_view<charT, traits> y) noexcept;
    template<class charT, class traits>
    constexpr bool operator<=(basic_string_view<charT, traits> x,
                              basic_string_view<charT, traits> y) noexcept;

```

```

template<class charT, class traits>
    constexpr bool operator==(basic_string_view<charT, traits> x,
                             basic_string_view<charT, traits> y) noexcept;
// see 25.4.3, sufficient additional overloads of comparison functions

// 25.4.4, inserters and extractors
template<class charT, class traits>
    basic_ostream<charT, traits>&
        operator<<(basic_ostream<charT, traits>& os,
                  basic_string_view<charT, traits> str);

// basic_string_view typedef names
using string_view    = basic_string_view<char>;
using u16string_view = basic_string_view<char16_t>;
using u32string_view = basic_string_view<char32_t>;
using wstring_view   = basic_string_view<wchar_t>;

// 25.4.5, hash support
template<class T> struct hash;
template<> struct hash<string_view>;
template<> struct hash<u16string_view>;
template<> struct hash<u32string_view>;
template<> struct hash<wstring_view>;

inline namespace literals {
inline namespace string_view_literals {
    // 25.4.6, suffix for basic_string_view literals
    constexpr string_view  operator""sv(const char* str, size_t len) noexcept;
    constexpr u16string_view operator""sv(const char16_t* str, size_t len) noexcept;
    constexpr u32string_view operator""sv(const char32_t* str, size_t len) noexcept;
    constexpr wstring_view  operator""sv(const wchar_t* str, size_t len) noexcept;
}
}
}

```

- ¹ The function templates defined in 24.2.2 and 28.7 are available when `<string_view>` is included.

25.4.2 Class template `basic_string_view`

[string.view.template]

```

template<class charT, class traits = char_traits<charT>>
class basic_string_view {
public:
    // types
    using traits_type      = traits;
    using value_type       = charT;
    using pointer          = value_type*;
    using const_pointer    = const value_type*;
    using reference        = value_type&;
    using const_reference  = const value_type&;
    using const_iterator   = implementation-defined; // see 25.4.2.2
    using iterator         = const_iterator;231
    using const_reverse_iterator = reverse_iterator<const_iterator>;
    using reverse_iterator  = const_reverse_iterator;
    using size_type         = size_t;
    using difference_type   = ptrdiff_t;
    static constexpr size_type npos = size_type(-1);

    // 25.4.2.1, construction and assignment
    constexpr basic_string_view() noexcept;
    constexpr basic_string_view(const basic_string_view&) noexcept = default;
    constexpr basic_string_view& operator=(const basic_string_view&) noexcept = default;
    constexpr basic_string_view(const charT* str);
    constexpr basic_string_view(const charT* str, size_type len);

```

²³¹) Because `basic_string_view` refers to a constant sequence, `iterator` and `const_iterator` are the same type.

```

// 25.4.2.2, iterator support
constexpr const_iterator begin() const noexcept;
constexpr const_iterator end() const noexcept;
constexpr const_iterator cbegin() const noexcept;
constexpr const_iterator cend() const noexcept;
constexpr const_reverse_iterator rbegin() const noexcept;
constexpr const_reverse_iterator rend() const noexcept;
constexpr const_reverse_iterator crbegin() const noexcept;
constexpr const_reverse_iterator crend() const noexcept;

// 25.4.2.3, capacity
constexpr size_type size() const noexcept;
constexpr size_type length() const noexcept;
constexpr size_type max_size() const noexcept;
[[nodiscard]] constexpr bool empty() const noexcept;

// 25.4.2.4, element access
constexpr const_reference operator[](size_type pos) const;
constexpr const_reference at(size_type pos) const;
constexpr const_reference front() const;
constexpr const_reference back() const;
constexpr const_pointer data() const noexcept;

// 25.4.2.5, modifiers
constexpr void remove_prefix(size_type n);
constexpr void remove_suffix(size_type n);
constexpr void swap(basic_string_view& s) noexcept;

// 25.4.2.6, string operations
size_type copy(charT* s, size_type n, size_type pos = 0) const;

constexpr basic_string_view substr(size_type pos = 0, size_type n = npos) const;

constexpr int compare(basic_string_view s) const noexcept;
constexpr int compare(size_type pos1, size_type n1, basic_string_view s) const;
constexpr int compare(size_type pos1, size_type n1, basic_string_view s,
                      size_type pos2, size_type n2) const;
constexpr int compare(const charT* s) const;
constexpr int compare(size_type pos1, size_type n1, const charT* s) const;
constexpr int compare(size_type pos1, size_type n1, const charT* s, size_type n2) const;

constexpr bool starts_with(basic_string_view x) const noexcept;
constexpr bool starts_with(charT x) const noexcept;
constexpr bool starts_with(const charT* x) const;
constexpr bool ends_with(basic_string_view x) const noexcept;
constexpr bool ends_with(charT x) const noexcept;
constexpr bool ends_with(const charT* x) const;

// 25.4.2.7, searching
constexpr size_type find(basic_string_view s, size_type pos = 0) const noexcept;
constexpr size_type find(charT c, size_type pos = 0) const noexcept;
constexpr size_type find(const charT* s, size_type pos, size_type n) const;
constexpr size_type find(const charT* s, size_type pos = 0) const;
constexpr size_type rfind(basic_string_view s, size_type pos = npos) const noexcept;
constexpr size_type rfind(charT c, size_type pos = npos) const noexcept;
constexpr size_type rfind(const charT* s, size_type pos, size_type n) const;
constexpr size_type rfind(const charT* s, size_type pos = npos) const;

constexpr size_type find_first_of(basic_string_view s, size_type pos = 0) const noexcept;
constexpr size_type find_first_of(charT c, size_type pos = 0) const noexcept;
constexpr size_type find_first_of(const charT* s, size_type pos, size_type n) const;
constexpr size_type find_first_of(const charT* s, size_type pos = 0) const;
constexpr size_type find_last_of(basic_string_view s, size_type pos = npos) const noexcept;
constexpr size_type find_last_of(charT c, size_type pos = npos) const noexcept;

```



```

constexpr size_type find_last_of(const charT* s, size_type pos, size_type n) const;
constexpr size_type find_last_of(const charT* s, size_type pos = npos) const;
constexpr size_type find_first_not_of(basic_string_view s, size_type pos = 0) const noexcept;
constexpr size_type find_first_not_of(charT c, size_type pos = 0) const noexcept;
constexpr size_type find_first_not_of(const charT* s, size_type pos,
                                     size_type n) const;
constexpr size_type find_first_not_of(const charT* s, size_type pos = 0) const;
constexpr size_type find_last_not_of(basic_string_view s,
                                     size_type pos = npos) const noexcept;
constexpr size_type find_last_not_of(charT c, size_type pos = npos) const noexcept;
constexpr size_type find_last_not_of(const charT* s, size_type pos,
                                     size_type n) const;
constexpr size_type find_last_not_of(const charT* s, size_type pos = npos) const;

private:
    const_pointer data_; // exposition only
    size_type size_;    // exposition only
};

```

- ¹ In every specialization `basic_string_view<charT, traits>`, the type `traits` shall satisfy the character traits requirements (25.2), and the type `traits::char_type` shall name the same type as `charT`.
- ² The type `iterator` satisfies the `constexpr` iterator requirements (28.2.1).

25.4.2.1 Construction and assignment

[string.view.cons]

```
constexpr basic_string_view() noexcept;
```

- ¹ *Effects:* Constructs an empty `basic_string_view`.
- ² *Ensures:* `size_ == 0` and `data_ == nullptr`.

```
constexpr basic_string_view(const charT* str);
```

- ³ *Requires:* `[str, str + traits::length(str))` is a valid range.
- ⁴ *Effects:* Constructs a `basic_string_view`, with the postconditions in Table 62.

Table 62 — `basic_string_view(const charT*)` effects

Element	Value
<code>data_</code>	<code>str</code>
<code>size_</code>	<code>traits::length(str)</code>

- ⁵ *Complexity:* $\mathcal{O}(\text{traits::length}(\text{str}))$.

```
constexpr basic_string_view(const charT* str, size_type len);
```

- ⁶ *Requires:* `[str, str + len)` is a valid range.
- ⁷ *Effects:* Constructs a `basic_string_view`, with the postconditions in Table 63.

Table 63 — `basic_string_view(const charT*, size_type)` effects

Element	Value
<code>data_</code>	<code>str</code>
<code>size_</code>	<code>len</code>

25.4.2.2 Iterator support

[string.view.iterators]

```
using const_iterator = implementation-defined;
```

- ¹ A type that meets the requirements of a constant random access iterator (28.2.7) and of a contiguous iterator (28.2.1) whose `value_type` is the template parameter `charT`.

2 For a `basic_string_view` `str`, any operation that invalidates a pointer in the range `[str.data(), str.data() + str.size())` invalidates pointers, iterators, and references returned from `str`'s member functions.

3 All requirements on container iterators (27.2) apply to `basic_string_view::const_iterator` as well.

```
constexpr const_iterator begin() const noexcept;
constexpr const_iterator cbegin() const noexcept;
```

4 *Returns:* An iterator such that

(4.1) — if `!empty()`, `&*begin() == data_`,

(4.2) — otherwise, an unspecified value such that `[begin(), end())` is a valid range.

```
constexpr const_iterator end() const noexcept;
constexpr const_iterator cend() const noexcept;
```

5 *Returns:* `begin() + size()`.

```
constexpr const_reverse_iterator rbegin() const noexcept;
constexpr const_reverse_iterator crbegin() const noexcept;
```

6 *Returns:* `const_reverse_iterator(end())`.

```
constexpr const_reverse_iterator rend() const noexcept;
constexpr const_reverse_iterator crend() const noexcept;
```

7 *Returns:* `const_reverse_iterator(begin())`.

25.4.2.3 Capacity

[string.view.capacity]

```
constexpr size_type size() const noexcept;
```

1 *Returns:* `size_`.

```
constexpr size_type length() const noexcept;
```

2 *Returns:* `size_`.

```
constexpr size_type max_size() const noexcept;
```

3 *Returns:* The largest possible number of char-like objects that can be referred to by a `basic_string_view`.

```
[[nodiscard]] constexpr bool empty() const noexcept;
```

4 *Returns:* `size_ == 0`.

25.4.2.4 Element access

[string.view.access]

```
constexpr const_reference operator[](size_type pos) const;
```

1 *Requires:* `pos < size()`.

2 *Returns:* `data_[pos]`.

3 *Throws:* Nothing.

4 [Note: Unlike `basic_string::operator[]`, `basic_string_view::operator[]`(`size()`) has undefined behavior instead of returning `charT()`. — end note]

```
constexpr const_reference at(size_type pos) const;
```

5 *Throws:* `out_of_range` if `pos >= size()`.

6 *Returns:* `data_[pos]`.

```
constexpr const_reference front() const;
```

7 *Requires:* `!empty()`.

8 *Returns:* `data_[0]`.

9 *Throws:* Nothing.

```
constexpr const_reference back() const;
10     Requires: !empty().
11     Returns: data_[size() - 1].
12     Throws: Nothing.

constexpr const_pointer data() const noexcept;
13     Returns: data_.
14     [Note: Unlike basic_string::data() and string literals, data() may return a pointer to a buffer that
is not null-terminated. Therefore it is typically a mistake to pass data() to a function that takes just a
const charT* and expects a null-terminated string. — end note]
```

25.4.2.5 Modifiers

[string.view.modifiers]

```
constexpr void remove_prefix(size_type n);
1     Requires: n <= size().
2     Effects: Equivalent to: data_ += n; size_ -= n;

constexpr void remove_suffix(size_type n);
3     Requires: n <= size().
4     Effects: Equivalent to: size_ -= n;

constexpr void swap(basic_string_view& s) noexcept;
5     Effects: Exchanges the values of *this and s.
```

25.4.2.6 String operations

[string.view.ops]

```
size_type copy(charT* s, size_type n, size_type pos = 0) const;
1     Let rlen be the smaller of n and size() - pos.
2     Throws: out_of_range if pos > size().
3     Requires: [s, s + rlen) is a valid range.
4     Effects: Equivalent to traits::copy(s, data() + pos, rlen).
5     Returns: rlen.
6     Complexity:  $\mathcal{O}(\text{rlen})$ .

constexpr basic_string_view substr(size_type pos = 0, size_type n = npos) const;
7     Let rlen be the smaller of n and size() - pos.
8     Throws: out_of_range if pos > size().
9     Effects: Determines rlen, the effective length of the string to reference.
10    Returns: basic_string_view(data() + pos, rlen).

constexpr int compare(basic_string_view str) const noexcept;
11    Let rlen be the smaller of size() and str.size().
12    Effects: Determines rlen, the effective length of the strings to compare. The function then compares
the two strings by calling traits::compare(data(), str.data(), rlen).
13    Complexity:  $\mathcal{O}(\text{rlen})$ .
14    Returns: The nonzero result if the result of the comparison is nonzero. Otherwise, returns a value as
indicated in Table 64.

constexpr int compare(size_type pos1, size_type n1, basic_string_view str) const;
15    Effects: Equivalent to: return substr(pos1, n1).compare(str);
```

Table 64 — compare() results

Condition	Return Value
size() < str.size()	< 0
size() == str.size()	0
size() > str.size()	> 0

```
constexpr int compare(size_type pos1, size_type n1, basic_string_view str,
                      size_type pos2, size_type n2) const;
```

16 *Effects:* Equivalent to: return substr(pos1, n1).compare(str.substr(pos2, n2));

```
constexpr int compare(const charT* s) const;
```

17 *Effects:* Equivalent to: return compare(basic_string_view(s));

```
constexpr int compare(size_type pos1, size_type n1, const charT* s) const;
```

18 *Effects:* Equivalent to: return substr(pos1, n1).compare(basic_string_view(s));

```
constexpr int compare(size_type pos1, size_type n1, const charT* s, size_type n2) const;
```

19 *Effects:* Equivalent to: return substr(pos1, n1).compare(basic_string_view(s, n2));

```
constexpr bool starts_with(basic_string_view x) const noexcept;
```

20 *Effects:* Equivalent to: return compare(0, npos, x) == 0;

```
constexpr bool starts_with(charT x) const noexcept;
```

21 *Effects:* Equivalent to: return starts_with(basic_string_view(&x, 1));

```
constexpr bool starts_with(const charT* x) const;
```

22 *Effects:* Equivalent to: return starts_with(basic_string_view(x));

```
constexpr bool ends_with(basic_string_view x) const noexcept;
```

23 *Effects:* Equivalent to:

```
return size() >= x.size() && compare(size() - x.size(), npos, x) == 0;
```

```
constexpr bool ends_with(charT x) const noexcept;
```

24 *Effects:* Equivalent to: return ends_with(basic_string_view(&x, 1));

```
constexpr bool ends_with(const charT* x) const;
```

25 *Effects:* Equivalent to: return ends_with(basic_string_view(x));

25.4.2.7 Searching

[string.view.find]

1 This subclause specifies the `basic_string_view` member functions named `find`, `rfind`, `find_first_of`, `find_last_of`, `find_first_not_of`, and `find_last_not_of`.

2 Member functions in this subclause have complexity $\mathcal{O}(\text{size()} * \text{str.size}())$ at worst, although implementations should do better.

3 Each member function of the form

```
constexpr return-type F(const charT* s, size_type pos);
```

is equivalent to return `F(basic_string_view(s), pos)`;

4 Each member function of the form

```
constexpr return-type F(const charT* s, size_type pos, size_type n);
```

is equivalent to return `F(basic_string_view(s, n), pos)`;

5 Each member function of the form

```
constexpr return-type F(charT c, size_type pos);
```

is equivalent to return `F(basic_string_view(&c, 1), pos)`;

```
constexpr size_type find(basic_string_view str, size_type pos = 0) const noexcept;
```

6 Let `xpos` be the lowest position, if possible, such that the following conditions hold:

(6.1) — `pos <= xpos`

(6.2) — `xpos + str.size() <= size()`

(6.3) — `traits::eq(at(xpos + I), str.at(I))` for all elements `I` of the string referenced by `str`.

7 *Effects:* Determines `xpos`.

8 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
constexpr size_type rfind(basic_string_view str, size_type pos = npos) const noexcept;
```

9 Let `xpos` be the highest position, if possible, such that the following conditions hold:

(9.1) — `xpos <= pos`

(9.2) — `xpos + str.size() <= size()`

(9.3) — `traits::eq(at(xpos + I), str.at(I))` for all elements `I` of the string referenced by `str`.

10 *Effects:* Determines `xpos`.

11 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
constexpr size_type find_first_of(basic_string_view str, size_type pos = 0) const noexcept;
```

12 Let `xpos` be the lowest position, if possible, such that the following conditions hold:

(12.1) — `pos <= xpos`

(12.2) — `xpos < size()`

(12.3) — `traits::eq(at(xpos), str.at(I))` for some element `I` of the string referenced by `str`.

13 *Effects:* Determines `xpos`.

14 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
constexpr size_type find_last_of(basic_string_view str, size_type pos = npos) const noexcept;
```

15 Let `xpos` be the highest position, if possible, such that the following conditions hold:

(15.1) — `xpos <= pos`

(15.2) — `xpos < size()`

(15.3) — `traits::eq(at(xpos), str.at(I))` for some element `I` of the string referenced by `str`.

16 *Effects:* Determines `xpos`.

17 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
constexpr size_type find_first_not_of(basic_string_view str, size_type pos = 0) const noexcept;
```

18 Let `xpos` be the lowest position, if possible, such that the following conditions hold:

(18.1) — `pos <= xpos`

(18.2) — `xpos < size()`

(18.3) — `traits::eq(at(xpos), str.at(I))` for no element `I` of the string referenced by `str`.

19 *Effects:* Determines `xpos`.

20 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
constexpr size_type find_last_not_of(basic_string_view str, size_type pos = npos) const noexcept;
```

21 Let `xpos` be the highest position, if possible, such that the following conditions hold:

(21.1) — `xpos <= pos`

(21.2) — `xpos < size()`

(21.3) — `traits::eq(at(xpos), str.at(I))` for no element `I` of the string referenced by `str`.

22 *Effects:* Determines `xpos`.

23 *Returns:* `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

25.4.3 Non-member comparison functions

[string.view.comparison]

- ¹ Let *S* be `basic_string_view<charT, traits>`, and *sv* be an instance of *S*. Implementations shall provide sufficient additional overloads marked `constexpr` and `noexcept` so that an object *t* with an implicit conversion to *S* can be compared according to Table 65.

Table 65 — Additional `basic_string_view` comparison overloads

Expression	Equivalent to
<code>t == sv</code>	<code>S(t) == sv</code>
<code>sv == t</code>	<code>sv == S(t)</code>
<code>t != sv</code>	<code>S(t) != sv</code>
<code>sv != t</code>	<code>sv != S(t)</code>
<code>t < sv</code>	<code>S(t) < sv</code>
<code>sv < t</code>	<code>sv < S(t)</code>
<code>t > sv</code>	<code>S(t) > sv</code>
<code>sv > t</code>	<code>sv > S(t)</code>
<code>t <= sv</code>	<code>S(t) <= sv</code>
<code>sv <= t</code>	<code>sv <= S(t)</code>
<code>t >= sv</code>	<code>S(t) >= sv</code>
<code>sv >= t</code>	<code>sv >= S(t)</code>

[*Example*: A sample conforming implementation for `operator==` would be:

```
template<class T> using __identity = decay_t<T>;
template<class charT, class traits>
constexpr bool operator==(basic_string_view<charT, traits> lhs,
                          basic_string_view<charT, traits> rhs) noexcept {
    return lhs.compare(rhs) == 0;
}
template<class charT, class traits>
constexpr bool operator==(basic_string_view<charT, traits> lhs,
                          __identity<basic_string_view<charT, traits>> rhs) noexcept {
    return lhs.compare(rhs) == 0;
}
template<class charT, class traits>
constexpr bool operator==( __identity<basic_string_view<charT, traits>> lhs,
                          basic_string_view<charT, traits> rhs) noexcept {
    return lhs.compare(rhs) == 0;
}

```

— *end example*]

```
template<class charT, class traits>
constexpr bool operator<(basic_string_view<charT, traits> lhs,
                        basic_string_view<charT, traits> rhs) noexcept;

```

- ² *Returns*: `lhs.compare(rhs) == 0`.

```
template<class charT, class traits>
constexpr bool operator!=(basic_string_view<charT, traits> lhs,
                          basic_string_view<charT, traits> rhs) noexcept;

```

- ³ *Returns*: `lhs.compare(rhs) != 0`.

```
template<class charT, class traits>
constexpr bool operator<(basic_string_view<charT, traits> lhs,
                        basic_string_view<charT, traits> rhs) noexcept;

```

- ⁴ *Returns*: `lhs.compare(rhs) < 0`.

```
template<class charT, class traits>
constexpr bool operator>(basic_string_view<charT, traits> lhs,
                        basic_string_view<charT, traits> rhs) noexcept;

```

- ⁵ *Returns*: `lhs.compare(rhs) > 0`.

```
template<class charT, class traits>
constexpr bool operator<=(basic_string_view<charT, traits> lhs,
                          basic_string_view<charT, traits> rhs) noexcept;
```

6 *Returns:* lhs.compare(rhs) <= 0.

```
template<class charT, class traits>
constexpr bool operator>=(basic_string_view<charT, traits> lhs,
                          basic_string_view<charT, traits> rhs) noexcept;
```

7 *Returns:* lhs.compare(rhs) >= 0.

25.4.4 Inserters and extractors

[string.view.io]

```
template<class charT, class traits>
basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, basic_string_view<charT, traits> str);
```

1 *Effects:* Behaves as a formatted output function (31.7.5.2.1) of os. Forms a character sequence seq, initially consisting of the elements defined by the range [str.begin(), str.end()). Determines padding for seq as described in 31.7.5.2.1. Then inserts seq as if by calling os.rdbuf()->sputn(seq, n), where n is the larger of os.width() and str.size(); then calls os.width(0).

2 *Returns:* os

25.4.5 Hash support

[string.view.hash]

```
template<> struct hash<string_view>;
template<> struct hash<u16string_view>;
template<> struct hash<u32string_view>;
template<> struct hash<wstring_view>;
```

1 The specialization is enabled (24.14.16). [Note: The hash value of a string view object is equal to the hash value of the corresponding string object (25.3.5). — end note]

25.4.6 Suffix for basic_string_view literals

[string.view.literals]

```
constexpr string_view operator""sv(const char* str, size_t len) noexcept;
```

1 *Returns:* string_view{str, len}.

```
constexpr u16string_view operator""sv(const char16_t* str, size_t len) noexcept;
```

2 *Returns:* u16string_view{str, len}.

```
constexpr u32string_view operator""sv(const char32_t* str, size_t len) noexcept;
```

3 *Returns:* u32string_view{str, len}.

```
constexpr wstring_view operator""sv(const wchar_t* str, size_t len) noexcept;
```

4 *Returns:* wstring_view{str, len}.

25.5 Null-terminated sequence utilities

[c.strings]

25.5.1 Header <cctype> synopsis

[cctype.syn]

```
namespace std {
    int isalnum(int c);
    int isalpha(int c);
    int isblank(int c);
    int iscntrl(int c);
    int isdigit(int c);
    int isgraph(int c);
    int islower(int c);
    int isprint(int c);
    int ispunct(int c);
    int isspace(int c);
    int isupper(int c);
    int isxdigit(int c);
    int tolower(int c);
```

```

    int toupper(int c);
}

```

- ¹ The contents and meaning of the header <cctype> are the same as the C standard library header <ctype.h>.

SEE ALSO: ISO C 7.4

25.5.2 Header <cwctype> synopsis

[cwctype.syn]

```

namespace std {
    using wint_t = see below;
    using wctrans_t = see below;
    using wctype_t = see below;

    int iswalnum(wint_t wc);
    int iswalpha(wint_t wc);
    int iswblank(wint_t wc);
    int iswcntrl(wint_t wc);
    int iswdigit(wint_t wc);
    int iswgraph(wint_t wc);
    int iswlower(wint_t wc);
    int iswprint(wint_t wc);
    int iswpunct(wint_t wc);
    int iswspace(wint_t wc);
    int iswupper(wint_t wc);
    int iswxdigit(wint_t wc);
    int iswctype(wint_t wc, wctype_t desc);
    wctype_t wctype(const char* property);
    wint_t tolower(wint_t wc);
    wint_t toupper(wint_t wc);
    wint_t towctrans(wint_t wc, wctrans_t desc);
    wctrans_t wctrans(const char* property);
}

#define WEOF see below

```

- ¹ The contents and meaning of the header <cwctype> are the same as the C standard library header <wctype.h>.

SEE ALSO: ISO C 7.30

25.5.3 Header <cstring> synopsis

[cstring.syn]

```

namespace std {
    using size_t = see 21.2.4;

    void* memcpy(void* s1, const void* s2, size_t n);
    void* memmove(void* s1, const void* s2, size_t n);
    char* strcpy(char* s1, const char* s2);
    char* strncpy(char* s1, const char* s2, size_t n);
    char* strcat(char* s1, const char* s2);
    char* strncat(char* s1, const char* s2, size_t n);
    int memcmp(const void* s1, const void* s2, size_t n);
    int strcmp(const char* s1, const char* s2);
    int strcoll(const char* s1, const char* s2);
    int strncmp(const char* s1, const char* s2, size_t n);
    size_t strxfrm(char* s1, const char* s2, size_t n);
    const void* memchr(const void* s, int c, size_t n); // see 20.2
    void* memchr(void* s, int c, size_t n); // see 20.2
    const char* strchr(const char* s, int c); // see 20.2
    char* strchr(char* s, int c); // see 20.2
    size_t strcspn(const char* s1, const char* s2);
    const char* strpbrk(const char* s1, const char* s2); // see 20.2
    char* strpbrk(char* s1, const char* s2); // see 20.2
    const char* strrchr(const char* s, int c); // see 20.2
    char* strrchr(char* s, int c); // see 20.2
    size_t strspn(const char* s1, const char* s2);
    const char* strstr(const char* s1, const char* s2); // see 20.2

```



```

char* strstr(char* s1, const char* s2); // see 20.2
char* strtok(char* s1, const char* s2);
void* memset(void* s, int c, size_t n);
char* strerror(int errnum);
size_t strlen(const char* s);
}

```

```
#define NULL see 21.2.3
```

- ¹ The contents and meaning of the header `<cstring>` are the same as the C standard library header `<string.h>`.
- ² The functions `strerror` and `strtok` are not required to avoid data races (20.5.5.9).
- ³ The functions `memcpy` and `memmove` are signal-safe (21.12.4).
- ⁴ [Note: The functions `strchr`, `strpbrk`, `strrchr`, `strstr`, and `memchr`, have different signatures in this document, but they have the same behavior as in the C standard library (20.2). — end note]

SEE ALSO: ISO C 7.24

25.5.4 Header `<wchar>` synopsis

[`wchar.syn`]

```

namespace std {
    using size_t = see 21.2.4;
    using mbstate_t = see below;
    using wint_t = see below;

    struct tm;

    int fwprintf(FILE* stream, const wchar_t* format, ...);
    int fwscanf(FILE* stream, const wchar_t* format, ...);
    int swprintf(wchar_t* s, size_t n, const wchar_t* format, ...);
    int swscanf(const wchar_t* s, const wchar_t* format, ...);
    int vfwprintf(FILE* stream, const wchar_t* format, va_list arg);
    int vfwscanf(FILE* stream, const wchar_t* format, va_list arg);
    int vswprintf(wchar_t* s, size_t n, const wchar_t* format, va_list arg);
    int vswscanf(const wchar_t* s, const wchar_t* format, va_list arg);
    int vwprintf(const wchar_t* format, va_list arg);
    int vwscanf(const wchar_t* format, va_list arg);
    int wprintf(const wchar_t* format, ...);
    int wscanf(const wchar_t* format, ...);
    wint_t fgetwc(FILE* stream);
    wchar_t* fgetws(wchar_t* s, int n, FILE* stream);
    wint_t fputwc(wchar_t c, FILE* stream);
    int fputws(const wchar_t* s, FILE* stream);
    int fwide(FILE* stream, int mode);
    wint_t getwc(FILE* stream);
    wint_t getwchar();
    wint_t putwc(wchar_t c, FILE* stream);
    wint_t putwchar(wchar_t c);
    wint_t ungetwc(wint_t c, FILE* stream);
    double wcstod(const wchar_t* nptr, wchar_t** endptr);
    float wcstof(const wchar_t* nptr, wchar_t** endptr);
    long double wcstold(const wchar_t* nptr, wchar_t** endptr);
    long int wcstol(const wchar_t* nptr, wchar_t** endptr, int base);
    long long int wcstoll(const wchar_t* nptr, wchar_t** endptr, int base);
    unsigned long int wcstoul(const wchar_t* nptr, wchar_t** endptr, int base);
    unsigned long long int wcstoull(const wchar_t* nptr, wchar_t** endptr, int base);
    wchar_t* wcsncpy(wchar_t* s1, const wchar_t* s2);
    wchar_t* wcsncpy(wchar_t* s1, const wchar_t* s2, size_t n);
    wchar_t* wmemcpy(wchar_t* s1, const wchar_t* s2, size_t n);
    wchar_t* wmemmove(wchar_t* s1, const wchar_t* s2, size_t n);
    wchar_t* wscat(wchar_t* s1, const wchar_t* s2);
    wchar_t* wcsncat(wchar_t* s1, const wchar_t* s2, size_t n);
    int wcscmp(const wchar_t* s1, const wchar_t* s2);
    int wcscoll(const wchar_t* s1, const wchar_t* s2);
    int wcsncmp(const wchar_t* s1, const wchar_t* s2, size_t n);
}

```

```

size_t wcsxfrm(wchar_t* s1, const wchar_t* s2, size_t n);
int wmemcmp(const wchar_t* s1, const wchar_t* s2, size_t n);
const wchar_t* wcschr(const wchar_t* s, wchar_t c); // see 20.2
wchar_t* wcschr(wchar_t* s, wchar_t c); // see 20.2
size_t wcsnspn(const wchar_t* s1, const wchar_t* s2);
const wchar_t* wcsprbk(const wchar_t* s1, const wchar_t* s2); // see 20.2
wchar_t* wcsprbk(wchar_t* s1, const wchar_t* s2); // see 20.2
const wchar_t* wcsrchr(const wchar_t* s, wchar_t c); // see 20.2
wchar_t* wcsrchr(wchar_t* s, wchar_t c); // see 20.2
size_t wcsnspn(const wchar_t* s1, const wchar_t* s2);
const wchar_t* wcsstr(const wchar_t* s1, const wchar_t* s2); // see 20.2
wchar_t* wcsstr(wchar_t* s1, const wchar_t* s2); // see 20.2
wchar_t* wcstok(wchar_t* s1, const wchar_t* s2, wchar_t** ptr);
const wchar_t* wmemchr(const wchar_t* s, wchar_t c, size_t n); // see 20.2
wchar_t* wmemchr(wchar_t* s, wchar_t c, size_t n); // see 20.2
size_t wcslen(const wchar_t* s);
wchar_t* wmemset(wchar_t* s, wchar_t c, size_t n);
size_t wcsftime(wchar_t* s, size_t maxsize, const wchar_t* format, const struct tm* timeptr);
wint_t btowc(int c);
int wctob(wint_t c);

// 25.5.6, multibyte / wide string and character conversion functions
int mbsinit(const mbstate_t* ps);
size_t mbrlen(const char* s, size_t n, mbstate_t* ps);
size_t mbrtowc(wchar_t* pwc, const char* s, size_t n, mbstate_t* ps);
size_t wctomb(char* s, wchar_t wc, mbstate_t* ps);
size_t mbsrtowcs(wchar_t* dst, const char** src, size_t len, mbstate_t* ps);
size_t wcsrtombs(char* dst, const wchar_t** src, size_t len, mbstate_t* ps);
}

#define NULL see 21.2.3
#define WCHAR_MAX see below
#define WCHAR_MIN see below
#define WEOF see below

```

- ¹ The contents and meaning of the header `<wchar>` are the same as the C standard library header `<wchar.h>`, except that it does not declare a type `wchar_t`.
- ² [Note: The functions `wcschr`, `wcspbrk`, `wcsrchr`, `wcsstr`, and `wmemchr` have different signatures in this document, but they have the same behavior as in the C standard library (20.2). — end note]

SEE ALSO: ISO C 7.29

25.5.5 Header `<cuchar>` synopsis

[`cuchar.syn`]

```

namespace std {
    using mbstate_t = see below;
    using size_t = see 21.2.4;

    size_t mbrtoc16(char16_t* pc16, const char* s, size_t n, mbstate_t* ps);
    size_t c16rtomb(char* s, char16_t c16, mbstate_t* ps);
    size_t mbrtoc32(char32_t* pc32, const char* s, size_t n, mbstate_t* ps);
    size_t c32rtomb(char* s, char32_t c32, mbstate_t* ps);
}

```

- ¹ The contents and meaning of the header `<cuchar>` are the same as the C standard library header `<uchar.h>`, except that it does not declare types `char16_t` nor `char32_t`.

SEE ALSO: ISO C 7.28

25.5.6 Multibyte / wide string and character conversion functions

[`c.mb.wcs`]

- ¹ [Note: The headers `<cstdlib>` (21.2.2) and `<wchar>` (25.5.4) declare the functions described in this subclause. — end note]

```

int mbsinit(const mbstate_t* ps);
int mblen(const char* s, size_t n);
size_t mbstowcs(wchar_t* pwcs, const char* s, size_t n);

```

```
size_t wcstombs(char* s, const wchar_t* pwcs, size_t n);
```

2 *Effects:* These functions have the semantics specified in the C standard library.

SEE ALSO: ISO C 7.22.7.1, 7.22.8, 7.29.6.2.1

```
int mbtowc(wchar_t* pwc, const char* s, size_t n);  
int wctomb(char* s, wchar_t wchar);
```

3 *Effects:* These functions have the semantics specified in the C standard library.

4 *Remarks:* Calls to these functions may introduce a data race (20.5.5.9) with other calls to the same function.

SEE ALSO: ISO C 7.22.7

```
size_t mbrlen(const char* s, size_t n, mbstate_t* ps);  
size_t mbrtowc(wchar_t* pwc, const char* s, size_t n, mbstate_t* ps);  
size_t wcrctomb(char* s, wchar_t wc, mbstate_t* ps);  
size_t mbsrtowcs(wchar_t* dst, const char** src, size_t len, mbstate_t* ps);  
size_t wcsrtombs(char* dst, const wchar_t** src, size_t len, mbstate_t* ps);
```

5 *Effects:* These functions have the semantics specified in the C standard library.

6 *Remarks:* Calling these functions with an `mbstate_t*` argument that is a null pointer value may introduce a data race (20.5.5.9) with other calls to the same function with an `mbstate_t*` argument that is a null pointer value.

SEE ALSO: ISO C 7.29.6.3

26 Localization library

[localization]

26.1 General

[localization.general]

- ¹ This Clause describes components that C++ programs may use to encapsulate (and therefore be more portable when confronting) cultural differences. The locale facility includes internationalization support for character classification and string collation, numeric, monetary, and date/time formatting and parsing, and message retrieval.
- ² The following subclauses describe components for locales themselves, the standard facets, and facilities from the ISO C library, as summarized in Table 66.

Table 66 — Localization library summary

Subclause	Header(s)	
26.3	Locales	<locale>
26.4	Standard locale Categories	
26.5	C library locales	<clocale>

26.2 Header <locale> synopsis

[locale.syn]

```

namespace std {
    // 26.3.1, locale
    class locale;
    template<class Facet> const Facet& use_facet(const locale&);
    template<class Facet> bool has_facet(const locale&) noexcept;

    // 26.3.3, convenience interfaces
    template<class charT> bool isspace (charT c, const locale& loc);
    template<class charT> bool isprint (charT c, const locale& loc);
    template<class charT> bool iscntrl (charT c, const locale& loc);
    template<class charT> bool isupper (charT c, const locale& loc);
    template<class charT> bool islower (charT c, const locale& loc);
    template<class charT> bool isalpha (charT c, const locale& loc);
    template<class charT> bool isdigit (charT c, const locale& loc);
    template<class charT> bool ispunct (charT c, const locale& loc);
    template<class charT> bool isxdigit(charT c, const locale& loc);
    template<class charT> bool isalnum (charT c, const locale& loc);
    template<class charT> bool isgraph (charT c, const locale& loc);
    template<class charT> bool isblank (charT c, const locale& loc);
    template<class charT> charT toupper(charT c, const locale& loc);
    template<class charT> charT tolower(charT c, const locale& loc);

    // 26.4.1, ctype
    class ctype_base;
    template<class charT> class ctype;
    template<> class ctype<char>; // specialization
    template<class charT> class ctype_byname;
    class codecvt_base;
    template<class internT, class externT, class stateT> class codecvt;
    template<class internT, class externT, class stateT> class codecvt_byname;

    // 26.4.2, numeric
    template<class charT, class InputIterator = istreambuf_iterator<charT>>
        class num_get;
    template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
        class num_put;
    template<class charT>
        class numpunct;

```

```

template<class charT>
    class numpunct_byname;

// 26.4.4, collation
template<class charT> class collate;
template<class charT> class collate_byname;

// 26.4.5, date and time
class time_base;
template<class charT, class InputIterator = istreambuf_iterator<charT>>
    class time_get;
template<class charT, class InputIterator = istreambuf_iterator<charT>>
    class time_get_byname;
template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
    class time_put;
template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
    class time_put_byname;

// 26.4.6, money
class money_base;
template<class charT, class InputIterator = istreambuf_iterator<charT>>
    class money_get;
template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
    class money_put;
template<class charT, bool Intl = false>
    class moneypunct;
template<class charT, bool Intl = false>
    class moneypunct_byname;

// 26.4.7, message retrieval
class messages_base;
template<class charT> class messages;
template<class charT> class messages_byname;
}

```

- ¹ The header `<locale>` defines classes and declares functions that encapsulate and manipulate the information peculiar to a locale.²³²

26.3 Locales

[locales]

26.3.1 Class locale

[locale]

```

namespace std {
    class locale {
    public:
        // types
        class facet;
        class id;
        using category = int;
        static const category // values assigned here are for exposition only
            none = 0,
            collate = 0x010, ctype = 0x020,
            monetary = 0x040, numeric = 0x080,
            time = 0x100, messages = 0x200,
            all = collate | ctype | monetary | numeric | time | messages;

        // construct/copy/destroy
        locale() noexcept;
        locale(const locale& other) noexcept;
        explicit locale(const char* std_name);
        explicit locale(const string& std_name);
        locale(const locale& other, const char* std_name, category);
        locale(const locale& other, const string& std_name, category);
        template<class Facet> locale(const locale& other, Facet* f);
    };
}

```

²³²) In this subclause, the type name `struct tm` is an incomplete type that is defined in `<ctime>`.

```

    locale(const locale& other, const locale& one, category);
    ~locale(); // not virtual
    const locale& operator=(const locale& other) noexcept;
    template<class Facet> locale combine(const locale& other) const;

    // locale operations
    basic_string<char> name() const;

    bool operator==(const locale& other) const;
    bool operator!=(const locale& other) const;

    template<class charT, class traits, class Allocator>
        bool operator()(const basic_string<charT, traits, Allocator>& s1,
                        const basic_string<charT, traits, Allocator>& s2) const;

    // global locale objects
    static locale global(const locale&);
    static const locale& classic();
};
}

```

- ¹ Class `locale` implements a type-safe polymorphic set of facets, indexed by facet *type*. In other words, a facet has a dual role: in one sense, it's just a class interface; at the same time, it's an index into a locale's set of facets.
- ² Access to the facets of a `locale` is via two function templates, `use_facet<>` and `has_facet<>`.
- ³ [Example: An `iostream` operator<< might be implemented as:²³³

```

    template<class charT, class traits>
    basic_ostream<charT, traits>&
    operator<< (basic_ostream<charT, traits>& s, Date d) {
        typename basic_ostream<charT, traits>::sentry cerberos(s);
        if (cerberos) {
            ios_base::iostate err = ios_base::iostate::goodbit;
            tm tmbuf; d.extract(tmbuf);
            use_facet<time_put<charT, ostreambuf_iterator<charT, traits>>>(
                s.getloc()).put(s, s, s.fill(), err, &tmbuf, 'x');
            s.setstate(err); // might throw
        }
        return s;
    }
}

```

— end example]

- ⁴ In the call to `use_facet<Facet>(loc)`, the type argument chooses a facet, making available all members of the named type. If `Facet` is not present in a locale, it throws the standard exception `bad_cast`. A C++ program can check if a locale implements a particular facet with the function template `has_facet<Facet>()`. User-defined facets may be installed in a locale, and used identically as may standard facets.
- ⁵ [Note: All locale semantics are accessed via `use_facet<>` and `has_facet<>`, except that:
- (5.1) — A member operator template `operator()(const basic_string<C, T, A>&, const basic_string<C, T, A>&)` is provided so that a locale may be used as a predicate argument to the standard collections, to collate strings.
- (5.2) — Convenient global interfaces are provided for traditional `ctype` functions such as `isdigit()` and `isspace()`, so that given a locale object `loc` a C++ program can call `isspace(c, loc)`. (This eases upgrading existing extractors (31.7.4.2).)

— end note]

- ⁶ Once a facet reference is obtained from a locale object by calling `use_facet<>`, that reference remains usable, and the results from member functions of it may be cached and re-used, as long as some locale object refers to that facet.

²³³) Note that in the call to `put` the stream is implicitly converted to an `ostreambuf_iterator<charT, traits>`.

- 7 In successive calls to a locale facet member function on a facet object installed in the same locale, the returned result shall be identical.
- 8 A `locale` constructed from a name string (such as "POSIX"), or from parts of two named locales, has a name; all others do not. Named locales may be compared for equality; an unnamed locale is equal only to (copies of) itself. For an unnamed locale, `locale::name()` returns the string "*".
- 9 Whether there is one global locale object for the entire program or one global locale object per thread is implementation-defined. Implementations should provide one global locale object per thread. If there is a single global locale object for the entire program, implementations are not required to avoid data races on it (20.5.5.9).

26.3.1.1 Types [locale.types]

26.3.1.1.1 Type `locale::category` [locale.category]

```
using category = int;
```

- 1 *Valid* `category` values include the `locale` member bitmask elements `collate`, `ctype`, `monetary`, `numeric`, `time`, and `messages`, each of which represents a single locale category. In addition, `locale` member bitmask constant `none` is defined as zero and represents no category. And `locale` member bitmask constant `all` is defined such that the expression
- ```
(collate | ctype | monetary | numeric | time | messages | all) == all
```
- is `true`, and represents the union of all categories. Further, the expression `(X | Y)`, where X and Y each represent a single category, represents the union of the two categories.
- 2 `locale` member functions expecting a `category` argument require one of the `category` values defined above, or the union of two or more such values. Such a `category` value identifies a set of locale categories. Each locale category, in turn, identifies a set of locale facets, including at least those shown in Table 67.

Table 67 — Locale category facets

| Category              | Includes facets                                                                                                                                                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>collate</code>  | <code>collate&lt;char&gt;</code> , <code>collate&lt;wchar_t&gt;</code>                                                                                                                                                                                                                                                               |
| <code>ctype</code>    | <code>ctype&lt;char&gt;</code> , <code>ctype&lt;wchar_t&gt;</code><br><code>codecvt&lt;char, char, mbstate_t&gt;</code><br><code>codecvt&lt;char16_t, char, mbstate_t&gt;</code><br><code>codecvt&lt;char32_t, char, mbstate_t&gt;</code><br><code>codecvt&lt;wchar_t, char, mbstate_t&gt;</code>                                    |
| <code>monetary</code> | <code>moneypunct&lt;char&gt;</code> , <code>moneypunct&lt;wchar_t&gt;</code><br><code>moneypunct&lt;char, true&gt;</code> , <code>moneypunct&lt;wchar_t, true&gt;</code><br><code>money_get&lt;char&gt;</code> , <code>money_get&lt;wchar_t&gt;</code><br><code>money_put&lt;char&gt;</code> , <code>money_put&lt;wchar_t&gt;</code> |
| <code>numeric</code>  | <code>numput&lt;char&gt;</code> , <code>numput&lt;wchar_t&gt;</code><br><code>num_get&lt;char&gt;</code> , <code>num_get&lt;wchar_t&gt;</code><br><code>num_put&lt;char&gt;</code> , <code>num_put&lt;wchar_t&gt;</code>                                                                                                             |
| <code>time</code>     | <code>time_get&lt;char&gt;</code> , <code>time_get&lt;wchar_t&gt;</code><br><code>time_put&lt;char&gt;</code> , <code>time_put&lt;wchar_t&gt;</code>                                                                                                                                                                                 |
| <code>messages</code> | <code>messages&lt;char&gt;</code> , <code>messages&lt;wchar_t&gt;</code>                                                                                                                                                                                                                                                             |

- 3 For any locale `loc` either constructed, or returned by `locale::classic()`, and any facet `Facet` shown in Table 67, `has_facet<Facet>(loc)` is `true`. Each locale member function which takes a `locale::category` argument operates on the corresponding set of facets.
- 4 An implementation is required to provide those specializations for facet templates identified as members of a category, and for those shown in Table 68.
- 5 The provided implementation of members of facets `num_get<charT>` and `num_put<charT>` calls `use_facet<F>(l)` only for facet F of types `numput<charT>` and `ctype<charT>`, and for locale l the value obtained by calling member `getloc()` on the `ios_base&` argument to these functions.
- 6 In declarations of facets, a template parameter with name `InputIterator` or `OutputIterator` indicates the set of all possible specializations on parameters that satisfy the *Cpp17InputIterator* requirements or

Table 68 — Required specializations

| Category | Includes facets                                                                                                                                                                                                                                                                                                  |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| collate  | collate_byname<char>, collate_byname<wchar_t>                                                                                                                                                                                                                                                                    |
| ctype    | ctype_byname<char>, ctype_byname<wchar_t><br>codecvt_byname<char, char, mbstate_t><br>codecvt_byname<char16_t, char, mbstate_t><br>codecvt_byname<char32_t, char, mbstate_t><br>codecvt_byname<wchar_t, char, mbstate_t>                                                                                         |
| monetary | money_punct_byname<char, International><br>money_punct_byname<wchar_t, International><br>money_get<C, InputIterator><br>money_put<C, OutputIterator>                                                                                                                                                             |
| numeric  | num_punct_byname<char>, num_punct_byname<wchar_t><br>num_get<C, InputIterator>, num_put<C, OutputIterator>                                                                                                                                                                                                       |
| time     | time_get<char, InputIterator><br>time_get_byname<char, InputIterator><br>time_get<wchar_t, InputIterator><br>time_get_byname<wchar_t, InputIterator><br>time_put<char, OutputIterator><br>time_put_byname<char, OutputIterator><br>time_put<wchar_t, OutputIterator><br>time_put_byname<wchar_t, OutputIterator> |
| messages | messages_byname<char>, messages_byname<wchar_t>                                                                                                                                                                                                                                                                  |

*Cpp17OutputIterator* requirements, respectively (28.2). A template parameter with name *C* represents the set of types containing `char`, `wchar_t`, and any other implementation-defined character types that satisfy the requirements for a character on which any of the *iostream* components can be instantiated. A template parameter with name *International* represents the set of all possible specializations on a *bool* parameter.

### 26.3.1.1.2 Class `locale::facet`

[`locale.facet`]

```
namespace std {
 class locale::facet {
 protected:
 explicit facet(size_t refs = 0);
 virtual ~facet();
 facet(const facet&) = delete;
 void operator=(const facet&) = delete;
 };
}
```

- 1 Class `facet` is the base class for locale feature sets. A class is a *facet* if it is publicly derived from another *facet*, or if it is a class derived from `locale::facet` and contains a publicly accessible declaration as follows:<sup>234</sup>

```
static ::std::locale::id id;
```

- 2 Template parameters in this Clause which are required to be facets are those named `Facet` in declarations. A program that passes a type that is *not* a facet, or a type that refers to a volatile-qualified facet, as an (explicit or deduced) template parameter to a locale function expecting a facet, is ill-formed. A const-qualified facet is a valid template argument to any locale function that expects a `Facet` template parameter.
- 3 The `refs` argument to the constructor is used for lifetime management. For `refs == 0`, the implementation performs `delete static_cast<locale::facet*>(f)` (where `f` is a pointer to the facet) when the last `locale` object containing the facet is destroyed; for `refs == 1`, the implementation never destroys the facet.
- 4 Constructors of all facets defined in this Clause take such an argument and pass it along to their `facet` base class constructor. All one-argument constructors defined in this Clause are *explicit*, preventing their participation in automatic conversions.

<sup>234</sup>) This is a complete list of requirements; there are no other requirements. Thus, a facet class need not have a public copy constructor, assignment, default constructor, destructor, etc.



- 5 For some standard facets a standard “...\_byname” class, derived from it, implements the virtual function semantics equivalent to that facet of the locale constructed by `locale(const char*)` with the same name. Each such facet provides a constructor that takes a `const char*` argument, which names the locale, and a `refs` argument, which is passed to the base class constructor. Each such facet also provides a constructor that takes a `string` argument `str` and a `refs` argument, which has the same effect as calling the first constructor with the two arguments `str.c_str()` and `refs`. If there is no “...\_byname” version of a facet, the base class implements named locale semantics itself by reference to other facets.

### 26.3.1.1.3 Class `locale::id`

[locale.id]

```
namespace std {
 class locale::id {
 public:
 id();
 void operator=(const id&) = delete;
 id(const id&) = delete;
 };
}
```

- 1 The class `locale::id` provides identification of a locale facet interface, used as an index for lookup and to encapsulate initialization.
- 2 [Note: Because facets are used by iostreams, potentially while static constructors are running, their initialization cannot depend on programmed static initialization. One initialization strategy is for `locale` to initialize each facet’s `id` member the first time an instance of the facet is installed into a locale. This depends only on static storage being zero before constructors run (6.8.3.2). — end note]

### 26.3.1.2 Constructors and destructor

[locale.cons]

```
locale() noexcept;
```

- 1 Default constructor: a snapshot of the current global locale.
- 2 *Effects:* Constructs a copy of the argument last passed to `locale::global(locale&)`, if it has been called; else, the resulting facets have virtual function semantics identical to those of `locale::classic()`. [Note: This constructor is commonly used as the default value for arguments of functions that take a `const locale&` argument. — end note]

```
locale(const locale& other) noexcept;
```

- 3 *Effects:* Constructs a locale which is a copy of `other`.

```
explicit locale(const char* std_name);
```

- 4 *Effects:* Constructs a locale using standard C locale names, e.g., "POSIX". The resulting locale implements semantics defined to be associated with that name.
- 5 *Throws:* `runtime_error` if the argument is not valid, or is null.
- 6 *Remarks:* The set of valid string argument values is "C", "", and any implementation-defined values.

```
explicit locale(const string& std_name);
```

- 7 *Effects:* The same as `locale(std_name.c_str())`.

```
locale(const locale& other, const char* std_name, category);
```

- 8 *Effects:* Constructs a locale as a copy of `other` except for the facets identified by the `category` argument, which instead implement the same semantics as `locale(std_name)`.
- 9 *Throws:* `runtime_error` if the argument is not valid, or is null.
- 10 *Remarks:* The locale has a name if and only if `other` has a name.

```
locale(const locale& other, const string& std_name, category cat);
```

- 11 *Effects:* The same as `locale(other, std_name.c_str(), cat)`.

```
template<class Facet> locale(const locale& other, Facet* f);
```

12 *Effects:* Constructs a locale incorporating all facets from the first argument except that of type `Facet`, and installs the second argument as the remaining facet. If `f` is null, the resulting object is a copy of `other`.

13 *Remarks:* The resulting locale has no name.

```
locale(const locale& other, const locale& one, category cats);
```

14 *Effects:* Constructs a locale incorporating all facets from the first argument except those that implement `cats`, which are instead incorporated from the second argument.

15 *Remarks:* The resulting locale has a name if and only if the first two arguments have names.

```
const locale& operator=(const locale& other) noexcept;
```

16 *Effects:* Creates a copy of `other`, replacing the current value.

17 *Returns:* `*this`.

```
~locale();
```

18 A non-virtual destructor that throws no exceptions.

### 26.3.1.3 Members

[[locale.members](#)]

```
template<class Facet> locale combine(const locale& other) const;
```

1 *Effects:* Constructs a locale incorporating all facets from `*this` except for that one facet of `other` that is identified by `Facet`.

2 *Returns:* The newly created locale.

3 *Throws:* `runtime_error` if `has_facet<Facet>(other)` is `false`.

4 *Remarks:* The resulting locale has no name.

```
basic_string<char> name() const;
```

5 *Returns:* The name of `*this`, if it has one; otherwise, the string `"*"`.

### 26.3.1.4 Operators

[[locale.operators](#)]

```
bool operator==(const locale& other) const;
```

1 *Returns:* `true` if both arguments are the same locale, or one is a copy of the other, or each has a name and the names are identical; `false` otherwise.

```
bool operator!=(const locale& other) const;
```

2 *Returns:* `!(*this == other)`.

```
template<class charT, class traits, class Allocator>
bool operator()(const basic_string<charT, traits, Allocator>& s1,
 const basic_string<charT, traits, Allocator>& s2) const;
```

3 *Effects:* Compares two strings according to the `collate<charT>` facet.

4 *Remarks:* This member operator template (and therefore `locale` itself) satisfies requirements for a comparator predicate template argument ([Clause 29](#)) applied to strings.

5 *Returns:*

```
use_facet<collate<charT>>(*this).compare(s1.data(), s1.data() + s1.size(),
 s2.data(), s2.data() + s2.size()) < 0
```

6 [*Example:* A vector of strings `v` can be collated according to collation rules in locale `loc` simply by ([29.7.1](#), [27.3.11](#)):

```
std::sort(v.begin(), v.end(), loc);
```

— *end example*]

**26.3.1.5 Static members**

[locale.statics]

```
static locale global(const locale& loc);
```

1 Sets the global locale to its argument.

2 *Effects:* Causes future calls to the constructor `locale()` to return a copy of the argument. If the argument has a name, does

```
 setlocale(LC_ALL, loc.name().c_str());
```

otherwise, the effect on the C locale, if any, is implementation-defined. No library function other than `locale::global()` shall affect the value returned by `locale()`. [*Note:* See 26.5 for data race considerations when `setlocale` is invoked. — *end note*]

3 *Returns:* The previous value of `locale()`.

```
static const locale& classic();
```

4 The "C" locale.

5 *Returns:* A locale that implements the classic "C" locale semantics, equivalent to the value `locale("C")`.

6 *Remarks:* This locale, its facets, and their member functions, do not change with time.

**26.3.2 locale globals**

[locale.global.templates]

```
template<class Facet> const Facet& use_facet(const locale& loc);
```

1 *Requires:* `Facet` is a facet class whose definition contains the public static member `id` as defined in 26.3.1.1.2.

2 *Returns:* A reference to the corresponding facet of `loc`, if present.

3 *Throws:* `bad_cast` if `has_facet<Facet>(loc)` is false.

4 *Remarks:* The reference returned remains valid at least as long as any copy of `loc` exists.

```
template<class Facet> bool has_facet(const locale& loc) noexcept;
```

5 *Returns:* `true` if the facet requested is present in `loc`; otherwise `false`.

**26.3.3 Convenience interfaces**

[locale.convenience]

**26.3.3.1 Character classification**

[classification]

```
template<class charT> bool isspace (charT c, const locale& loc);
template<class charT> bool isprint (charT c, const locale& loc);
template<class charT> bool iscntrl (charT c, const locale& loc);
template<class charT> bool isupper (charT c, const locale& loc);
template<class charT> bool islower (charT c, const locale& loc);
template<class charT> bool isalpha (charT c, const locale& loc);
template<class charT> bool isdigit (charT c, const locale& loc);
template<class charT> bool ispunct (charT c, const locale& loc);
template<class charT> bool isxdigit(charT c, const locale& loc);
template<class charT> bool isalnum (charT c, const locale& loc);
template<class charT> bool isgraph (charT c, const locale& loc);
template<class charT> bool isblank (charT c, const locale& loc);
```

1 Each of these functions `isF` returns the result of the expression:

```
 use_facet<ctype<charT>>(loc).is(ctype_base::F, c)
```

where `F` is the `ctype_base::mask` value corresponding to that function (26.4.1).<sup>235</sup>

**26.3.3.2 Conversions**

[conversions]

**26.3.3.2.1 Character conversions**

[conversions.character]

```
template<class charT> charT toupper(charT c, const locale& loc);
```

1 *Returns:* `use_facet<ctype<charT>>(loc).toupper(c)`.

<sup>235</sup>) When used in a loop, it is faster to cache the `ctype<>` facet and use it directly, or use the vector form of `ctype<>::is`.

```
template<class charT> charT tolower(charT c, const locale& loc);
```

<sup>2</sup> Returns: use\_facet<ctype<charT>>(loc).tolower(c).

## 26.4 Standard locale categories

[locale.categories]

- <sup>1</sup> Each of the standard categories includes a family of facets. Some of these implement formatting or parsing of a datum, for use by standard or users' iostream operators << and >>, as members put() and get(), respectively. Each such member function takes an ios\_base& argument whose members flags(), precision(), and width(), specify the format of the corresponding datum (31.5.3). Those functions which need to use other facets call its member getloc() to retrieve the locale imbued there. Formatting facets use the character argument fill to fill out the specified width where necessary.
- <sup>2</sup> The put() members make no provision for error reporting. (Any failures of the OutputIterator argument can be extracted from the returned iterator.) The get() members take an ios\_base::iostate& argument whose value they ignore, but set to ios\_base::failbit in case of a parse error.
- <sup>3</sup> Within this clause it is unspecified whether one virtual function calls another virtual function.

### 26.4.1 The ctype category

[category.ctype]

```
namespace std {
 class ctype_base {
 public:
 using mask = see below;

 // numeric values are for exposition only.
 static const mask space = 1 << 0;
 static const mask print = 1 << 1;
 static const mask cntrl = 1 << 2;
 static const mask upper = 1 << 3;
 static const mask lower = 1 << 4;
 static const mask alpha = 1 << 5;
 static const mask digit = 1 << 6;
 static const mask punct = 1 << 7;
 static const mask xdigit = 1 << 8;
 static const mask blank = 1 << 9;
 static const mask alnum = alpha | digit;
 static const mask graph = alnum | punct;
 };
}
```

- <sup>1</sup> The type mask is a bitmask type (20.4.2.1.4).

#### 26.4.1.1 Class template ctype

[locale.ctype]

```
namespace std {
 template<class charT>
 class ctype : public locale::facet, public ctype_base {
 public:
 using char_type = charT;

 explicit ctype(size_t refs = 0);

 bool is(mask m, charT c) const;
 const charT* is(const charT* low, const charT* high, mask* vec) const;
 const charT* scan_is(mask m, const charT* low, const charT* high) const;
 const charT* scan_not(mask m, const charT* low, const charT* high) const;
 charT toupper(charT c) const;
 const charT* toupper(charT* low, const charT* high) const;
 charT tolower(charT c) const;
 const charT* tolower(charT* low, const charT* high) const;

 charT widen(char c) const;
 const char* widen(const char* low, const char* high, charT* to) const;
 char narrow(charT c, char dfault) const;
 const charT* narrow(const charT* low, const charT* high, char dfault, char* to) const;
 };
}
```

```

 static locale::id id;

protected:
 ~ctype();
 virtual bool do_is(mask m, charT c) const;
 virtual const charT* do_is(const charT* low, const charT* high, mask* vec) const;
 virtual const charT* do_scan_is(mask m, const charT* low, const charT* high) const;
 virtual const charT* do_scan_not(mask m, const charT* low, const charT* high) const;
 virtual charT do_toupper(charT) const;
 virtual const charT* do_toupper(charT* low, const charT* high) const;
 virtual charT do_tolower(charT) const;
 virtual const charT* do_tolower(charT* low, const charT* high) const;
 virtual charT do_widen(char) const;
 virtual const char* do_widen(const char* low, const char* high, charT* dest) const;
 virtual char do_narrow(charT, char default) const;
 virtual const charT* do_narrow(const charT* low, const charT* high,
 char default, char* dest) const;
};
}

```

<sup>1</sup> Class `ctype` encapsulates the C library `<cctype>` features. `istream` members are required to use `ctype<>` for character classing during input parsing.

<sup>2</sup> The specializations required in Table 67 (26.3.1.1.1), namely `ctype<char>` and `ctype<wchar_t>`, implement character classing appropriate to the implementation's native character set.

#### 26.4.1.1.1 `ctype` members

[`locale.ctype.members`]

```

bool is(mask m, charT c) const;
const charT* is(const charT* low, const charT* high, mask* vec) const;

```

<sup>1</sup> *Returns:* `do_is(m, c)` or `do_is(low, high, vec)`.

```

const charT* scan_is(mask m, const charT* low, const charT* high) const;

```

<sup>2</sup> *Returns:* `do_scan_is(m, low, high)`.

```

const charT* scan_not(mask m, const charT* low, const charT* high) const;

```

<sup>3</sup> *Returns:* `do_scan_not(m, low, high)`.

```

charT toupper(charT) const;
const charT* toupper(charT* low, const charT* high) const;

```

<sup>4</sup> *Returns:* `do_toupper(c)` or `do_toupper(low, high)`.

```

charT tolower(charT c) const;
const charT* tolower(charT* low, const charT* high) const;

```

<sup>5</sup> *Returns:* `do_tolower(c)` or `do_tolower(low, high)`.

```

charT widen(char c) const;
const char* widen(const char* low, const char* high, charT* to) const;

```

<sup>6</sup> *Returns:* `do_widen(c)` or `do_widen(low, high, to)`.

```

char narrow(charT c, char default) const;
const charT* narrow(const charT* low, const charT* high, char default, char* to) const;

```

<sup>7</sup> *Returns:* `do_narrow(c, default)` or `do_narrow(low, high, default, to)`.

#### 26.4.1.1.2 `ctype` virtual functions

[`locale.ctype.virtuals`]

```

bool do_is(mask m, charT c) const;
const charT* do_is(const charT* low, const charT* high, mask* vec) const;

```

<sup>1</sup> *Effects:* Classifies a character or sequence of characters. For each argument character, identifies a value `M` of type `ctype_base::mask`. The second form identifies a value `M` of type `ctype_base::mask` for each `*p` where `(low <= p && p < high)`, and places it into `vec[p - low]`.

2 *Returns:* The first form returns the result of the expression  $(M \& m) \neq 0$ ; i.e., true if the character has the characteristics specified. The second form returns `high`.

```
const charT* do_scan_is(mask m, const charT* low, const charT* high) const;
```

3 *Effects:* Locates a character in a buffer that conforms to a classification `m`.

4 *Returns:* The smallest pointer `p` in the range  $[low, high)$  such that `is(m, *p)` would return true; otherwise, returns `high`.

```
const charT* do_scan_not(mask m, const charT* low, const charT* high) const;
```

5 *Effects:* Locates a character in a buffer that fails to conform to a classification `m`.

6 *Returns:* The smallest pointer `p`, if any, in the range  $[low, high)$  such that `is(m, *p)` would return false; otherwise, returns `high`.

```
charT do_toupper(charT c) const;
const charT* do_toupper(charT* low, const charT* high) const;
```

7 *Effects:* Converts a character or characters to upper case. The second form replaces each character `*p` in the range  $[low, high)$  for which a corresponding upper-case character exists, with that character.

8 *Returns:* The first form returns the corresponding upper-case character if it is known to exist, or its argument if not. The second form returns `high`.

```
charT do_tolower(charT c) const;
const charT* do_tolower(charT* low, const charT* high) const;
```

9 *Effects:* Converts a character or characters to lower case. The second form replaces each character `*p` in the range  $[low, high)$  and for which a corresponding lower-case character exists, with that character.

10 *Returns:* The first form returns the corresponding lower-case character if it is known to exist, or its argument if not. The second form returns `high`.

```
charT do_widen(char c) const;
const char* do_widen(const char* low, const char* high, charT* dest) const;
```

11 *Effects:* Applies the simplest reasonable transformation from a `char` value or sequence of `char` values to the corresponding `charT` value or values.<sup>236</sup> The only characters for which unique transformations are required are those in the basic source character set (5.3).

For any named `ctype` category with a `ctype`  $\langle charT \rangle$  facet `ctc` and valid `ctype_base::mask` value `M`,  $(ctc.is(M, c) \parallel !is(M, do\_widen(c)))$  is true.<sup>237</sup>

The second form transforms each character `*p` in the range  $[low, high)$ , placing the result in `dest[p - low]`.

12 *Returns:* The first form returns the transformed value. The second form returns `high`.

```
char do_narrow(charT c, char dfault) const;
const charT* do_narrow(const charT* low, const charT* high, char dfault, char* dest) const;
```

13 *Effects:* Applies the simplest reasonable transformation from a `charT` value or sequence of `charT` values to the corresponding `char` value or values.

For any character `c` in the basic source character set (5.3) the transformation is such that

$$do\_widen(do\_narrow(c, 0)) == c$$

For any named `ctype` category with a `ctype`  $\langle char \rangle$  facet `ctc` however, and `ctype_base::mask` value `M`,

$$(is(M, c) \parallel !ctc.is(M, do\_narrow(c, dfault)))$$

is true (unless `do_narrow` returns `dfault`). In addition, for any digit character `c`, the expression  $(do\_narrow(c, dfault) - '0')$  evaluates to the digit value of the character. The second form transforms each character `*p` in the range  $[low, high)$ , placing the result (or `dfault` if no simple transformation is readily available) in `dest[p - low]`.

236) The `char` argument of `do_widen` is intended to accept values derived from character literals for conversion to the locale's encoding.

237) In other words, the transformed character is not a member of any character classification that `c` is not also a member of.

- 14 *Returns:* The first form returns the transformed value; or `default` if no mapping is readily available. The second form returns `high`.

#### 26.4.1.2 Class template `ctype_byname` [locale.ctype.byname]

```
namespace std {
 template<class charT>
 class ctype_byname : public ctype<charT> {
 public:
 using mask = typename ctype<charT>::mask;
 explicit ctype_byname(const char*, size_t refs = 0);
 explicit ctype_byname(const string&, size_t refs = 0);

 protected:
 ~ctype_byname();
 };
}
```

#### 26.4.1.3 `ctype` specializations [facet.ctype.special]

```
namespace std {
 template<>
 class ctype<char> : public locale::facet, public ctype_base {
 public:
 using char_type = char;

 explicit ctype(const mask* tab = nullptr, bool del = false, size_t refs = 0);

 bool is(mask m, char c) const;
 const char* is(const char* low, const char* high, mask* vec) const;
 const char* scan_is (mask m, const char* low, const char* high) const;
 const char* scan_not(mask m, const char* low, const char* high) const;

 char toupper(char c) const;
 const char* toupper(char* low, const char* high) const;
 char tolower(char c) const;
 const char* tolower(char* low, const char* high) const;

 char widen(char c) const;
 const char* widen(const char* low, const char* high, char* to) const;
 char narrow(char c, char default) const;
 const char* narrow(const char* low, const char* high, char default, char* to) const;

 static locale::id id;
 static const size_t table_size = implementation-defined;

 const mask* table() const noexcept;
 static const mask* classic_table() noexcept;

 protected:
 ~ctype();
 virtual char do_toupper(char c) const;
 virtual const char* do_toupper(char* low, const char* high) const;
 virtual char do_tolower(char c) const;
 virtual const char* do_tolower(char* low, const char* high) const;

 virtual char do_widen(char c) const;
 virtual const char* do_widen(const char* low, const char* high, char* to) const;
 virtual char do_narrow(char c, char default) const;
 virtual const char* do_narrow(const char* low, const char* high,
 char default, char* to) const;
 };
}
```

- <sup>1</sup> A specialization `ctype<char>` is provided so that the member functions on type `char` can be implemented inline.<sup>238</sup> The implementation-defined value of member `table_size` is at least 256.

#### 26.4.1.3.1 `ctype<char>` destructor [facet.ctype.char.dtor]

```
~ctype();
```

- <sup>1</sup> *Effects:* If the constructor's first argument was nonzero, and its second argument was `true`, does `delete [] table()`.

#### 26.4.1.3.2 `ctype<char>` members [facet.ctype.char.members]

- <sup>1</sup> In the following member descriptions, for `unsigned char` values `v` where `v >= table_size`, `table()[v]` is assumed to have an implementation-specific value (possibly different for each such value `v`) without performing the array lookup.

```
explicit ctype(const mask* tbl = nullptr, bool del = false, size_t refs = 0);
```

- <sup>2</sup> *Requires:* `tbl` either 0 or an array of at least `table_size` elements.

- <sup>3</sup> *Effects:* Passes its `refs` argument to its base class constructor.

```
bool is(mask m, char c) const;
const char* is(const char* low, const char* high, mask* vec) const;
```

- <sup>4</sup> *Effects:* The second form, for all `*p` in the range `[low, high)`, assigns into `vec[p - low]` the value `table()[ (unsigned char)*p ]`.

- <sup>5</sup> *Returns:* The first form returns `table()[ (unsigned char)c ] & m`; the second form returns `high`.

```
const char* scan_is(mask m, const char* low, const char* high) const;
```

- <sup>6</sup> *Returns:* The smallest `p` in the range `[low, high)` such that

```
table()[(unsigned char) *p] & m
is true.
```

```
const char* scan_not(mask m, const char* low, const char* high) const;
```

- <sup>7</sup> *Returns:* The smallest `p` in the range `[low, high)` such that

```
table()[(unsigned char) *p] & m
is false.
```

```
char toupper(char c) const;
const char* toupper(char* low, const char* high) const;
```

- <sup>8</sup> *Returns:* `do_toupper(c)` or `do_toupper(low, high)`, respectively.

```
char tolower(char c) const;
const char* tolower(char* low, const char* high) const;
```

- <sup>9</sup> *Returns:* `do_tolower(c)` or `do_tolower(low, high)`, respectively.

```
char widen(char c) const;
const char* widen(const char* low, const char* high, char* to) const;
```

- <sup>10</sup> *Returns:* `do_widen(c)` or `do_widen(low, high, to)`, respectively.

```
char narrow(char c, char default) const;
const char* narrow(const char* low, const char* high, char default, char* to) const;
```

- <sup>11</sup> *Returns:* `do_narrow(c, default)` or `do_narrow(low, high, default, to)`, respectively.

```
const mask* table() const noexcept;
```

- <sup>12</sup> *Returns:* The first constructor argument, if it was nonzero, otherwise `classic_table()`.

---

238) Only the `char` (not `unsigned char` and `signed char`) form is provided. The specialization is specified in the standard, and not left as an implementation detail, because it affects the derivation interface for `ctype<char>`.



### 26.4.1.3.3 `ctype<char>` static members [facet.ctype.char.statics]

```
static const mask* classic_table() noexcept;
```

- <sup>1</sup> *Returns:* A pointer to the initial element of an array of size `table_size` which represents the classifications of characters in the "C" locale.

### 26.4.1.3.4 `ctype<char>` virtual functions [facet.ctype.char.virtuals]

```
char do_toupper(char) const;
const char* do_toupper(char* low, const char* high) const;
char do_tolower(char) const;
const char* do_tolower(char* low, const char* high) const;

virtual char do_widen(char c) const;
virtual const char* do_widen(const char* low, const char* high, char* to) const;
virtual char do_narrow(char c, char dfaul) const;
virtual const char* do_narrow(const char* low, const char* high,
 char dfaul, char* to) const;
```

- <sup>1</sup> These functions are described identically as those members of the same name in the `ctype` class template (26.4.1.1.1).

### 26.4.1.4 Class template `codecvt` [locale.codecvt]

```
namespace std {
 class codecvt_base {
 public:
 enum result { ok, partial, error, noconv };
 };

 template<class internT, class externT, class stateT>
 class codecvt : public locale::facet, public codecvt_base {
 public:
 using intern_type = internT;
 using extern_type = externT;
 using state_type = stateT;

 explicit codecvt(size_t refs = 0);

 result out(
 stateT& state,
 const internT* from, const internT* from_end, const internT*& from_next,
 externT* to, externT* to_end, externT*& to_next) const;

 result unshift(
 stateT& state,
 externT* to, externT* to_end, externT*& to_next) const;

 result in(
 stateT& state,
 const externT* from, const externT* from_end, const externT*& from_next,
 internT* to, internT* to_end, internT*& to_next) const;

 int encoding() const noexcept;
 bool always_noconv() const noexcept;
 int length(stateT&, const externT* from, const externT* end, size_t max) const;
 int max_length() const noexcept;

 static locale::id id;

 protected:
 ~codecvt();
 virtual result do_out(
 stateT& state,
 const internT* from, const internT* from_end, const internT*& from_next,
 externT* to, externT* to_end, externT*& to_next) const;
```

```

 virtual result do_in(
 stateT& state,
 const externT* from, const externT* from_end, const externT*& from_next,
 internT* to, internT* to_end, internT*& to_next) const;
 virtual result do_unshift(
 stateT& state,
 externT* to, externT* to_end, externT*& to_next) const;

 virtual int do_encoding() const noexcept;
 virtual bool do_always_noconv() const noexcept;
 virtual int do_length(stateT&, const externT* from, const externT* end, size_t max) const;
 virtual int do_max_length() const noexcept;
};
}

```

<sup>1</sup> The class `codecvt<internT, externT, stateT>` is for use when converting from one character encoding to another, such as from wide characters to multibyte characters or between wide character encodings such as Unicode and EUC.

<sup>2</sup> The `stateT` argument selects the pair of character encodings being mapped between.

<sup>3</sup> The specializations required in Table 67 (26.3.1.1.1) convert the implementation-defined native character set. `codecvt<char, char, mbstate_t>` implements a degenerate conversion; it does not convert at all. The specialization `codecvt<char16_t, char, mbstate_t>` converts between the UTF-16 and UTF-8 encoding forms, and the specialization `codecvt<char32_t, char, mbstate_t>` converts between the UTF-32 and UTF-8 encoding forms. `codecvt<wchar_t, char, mbstate_t>` converts between the native character sets for narrow and wide characters. Specializations on `mbstate_t` perform conversion between encodings known to the library implementer. Other encodings can be converted by specializing on a program-defined `stateT` type. Objects of type `stateT` can contain any state that is useful to communicate to or from the specialized `do_in` or `do_out` members.

#### 26.4.1.4.1 `codecvt` members

[`locale.codecvt.members`]

```

result out(
 stateT& state,
 const internT* from, const internT* from_end, const internT*& from_next,
 externT* to, externT* to_end, externT*& to_next) const;

```

<sup>1</sup> *Returns:* `do_out(state, from, from_end, from_next, to, to_end, to_next)`.

```

result unshift(stateT& state, externT* to, externT* to_end, externT*& to_next) const;

```

<sup>2</sup> *Returns:* `do_unshift(state, to, to_end, to_next)`.

```

result in(
 stateT& state,
 const externT* from, const externT* from_end, const externT*& from_next,
 internT* to, internT* to_end, internT*& to_next) const;

```

<sup>3</sup> *Returns:* `do_in(state, from, from_end, from_next, to, to_end, to_next)`.

```

int encoding() const noexcept;

```

<sup>4</sup> *Returns:* `do_encoding()`.

```

bool always_noconv() const noexcept;

```

<sup>5</sup> *Returns:* `do_always_noconv()`.

```

int length(stateT& state, const externT* from, const externT* from_end, size_t max) const;

```

<sup>6</sup> *Returns:* `do_length(state, from, from_end, max)`.

```

int max_length() const noexcept;

```

<sup>7</sup> *Returns:* `do_max_length()`.

26.4.1.4.2 `codecvt` virtual functions[`locale.codecvt.virtuals`]

```
result do_out(
 stateT& state,
 const internT* from, const internT* from_end, const internT*& from_next,
 externT* to, externT* to_end, externT*& to_next) const;
```

```
result do_in(
 stateT& state,
 const externT* from, const externT* from_end, const externT*& from_next,
 internT* to, internT* to_end, internT*& to_next) const;
```

1 *Requires:* (`from <= from_end` && `to <= to_end`) well-defined and true; `state` initialized, if at the beginning of a sequence, or else equal to the result of converting the preceding characters in the sequence.

2 *Effects:* Translates characters in the source range [`from`, `from_end`), placing the results in sequential positions starting at destination `to`. Converts no more than (`from_end - from`) source elements, and stores no more than (`to_end - to`) destination elements.

Stops if it encounters a character it cannot convert. It always leaves the `from_next` and `to_next` pointers pointing one beyond the last element successfully converted. If returns `noconv`, `internT` and `externT` are the same type and the converted sequence is identical to the input sequence [`from`, `from_next`). `to_next` is set equal to `to`, the value of `state` is unchanged, and there are no changes to the values in [`to`, `to_end`).

3 A `codecvt` facet that is used by `basic_filebuf` (31.9) shall have the property that if

```
do_out(state, from, from_end, from_next, to, to_end, to_next)
```

would return `ok`, where `from != from_end`, then

```
do_out(state, from, from + 1, from_next, to, to_end, to_next)
```

shall also return `ok`, and that if

```
do_in(state, from, from_end, from_next, to, to_end, to_next)
```

would return `ok`, where `to != to_end`, then

```
do_in(state, from, from_end, from_next, to, to + 1, to_next)
```

shall also return `ok`.<sup>239</sup> [*Note:* As a result of operations on `state`, it can return `ok` or `partial` and set `from_next == from` and `to_next != to`. — *end note*]

4 *Remarks:* Its operations on `state` are unspecified. [*Note:* This argument can be used, for example, to maintain shift state, to specify conversion options (such as count only), or to identify a cache of seek offsets. — *end note*]

5 *Returns:* An enumeration value, as summarized in Table 69.

Table 69 — `do_in/do_out` result values

| Value                | Meaning                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------|
| <code>ok</code>      | completed the conversion                                                                                               |
| <code>partial</code> | not all source characters converted                                                                                    |
| <code>error</code>   | encountered a character in [ <code>from</code> , <code>from_end</code> ) that it could not convert                     |
| <code>noconv</code>  | <code>internT</code> and <code>externT</code> are the same type, and input sequence is identical to converted sequence |

A return value of `partial`, if (`from_next == from_end`), indicates that either the destination sequence has not absorbed all the available destination elements, or that additional source elements are needed before another destination element can be produced.

<sup>239</sup>) Informally, this means that `basic_filebuf` assumes that the mappings from internal to external characters is 1 to N: a `codecvt` facet that is used by `basic_filebuf` must be able to translate characters one internal character at a time.

```
result do_unshift(stateT& state, externT* to, externT* to_end, externT*& to_next) const;
```

6 *Requires:* (`to <= to_end`) well-defined and `true`; `state` initialized, if at the beginning of a sequence, or else equal to the result of converting the preceding characters in the sequence.

7 *Effects:* Places characters starting at `to` that should be appended to terminate a sequence when the current `stateT` is given by `state`.<sup>240</sup> Stores no more than `(to_end - to)` destination elements, and leaves the `to_next` pointer pointing one beyond the last element successfully stored.

8 *Returns:* An enumeration value, as summarized in Table 70.

Table 70 — `do_unshift` result values

| Value                | Meaning                                                                                                                                    |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <code>ok</code>      | completed the sequence                                                                                                                     |
| <code>partial</code> | space for more than <code>to_end - to</code> destination elements was needed to terminate a sequence given the value of <code>state</code> |
| <code>error</code>   | an unspecified error has occurred                                                                                                          |
| <code>noconv</code>  | no termination is needed for this <code>state_type</code>                                                                                  |

```
int do_encoding() const noexcept;
```

9 *Returns:* `-1` if the encoding of the `externT` sequence is state-dependent; else the constant number of `externT` characters needed to produce an internal character; or `0` if this number is not a constant.<sup>241</sup>

```
bool do_always_noconv() const noexcept;
```

10 *Returns:* `true` if `do_in()` and `do_out()` return `noconv` for all valid argument values. `codecvt<char, char, mbstate_t>` returns `true`.

```
int do_length(stateT& state, const externT* from, const externT* from_end, size_t max) const;
```

11 *Requires:* (`from <= from_end`) well-defined and `true`; `state` initialized, if at the beginning of a sequence, or else equal to the result of converting the preceding characters in the sequence.

12 *Effects:* The effect on the `state` argument is “as if” it called `do_in(state, from, from_end, from, to, to+max, to)` for `to` pointing to a buffer of at least `max` elements.

13 *Returns:* `(from_next-from)` where `from_next` is the largest value in the range `[from, from_end]` such that the sequence of values in the range `[from, from_next)` represents `max` or fewer valid complete characters of type `internT`. The specialization `codecvt<char, char, mbstate_t>`, returns the lesser of `max` and `(from_end-from)`.

```
int do_max_length() const noexcept;
```

14 *Returns:* The maximum value that `do_length(state, from, from_end, 1)` can return for any valid range `[from, from_end)` and `stateT` value `state`. The specialization `codecvt<char, char, mbstate_t>::do_max_length()` returns `1`.

#### 26.4.1.5 Class template `codecvt_byname`

[`locale.codecvt.byname`]

```
namespace std {
 template<class internT, class externT, class stateT>
 class codecvt_byname : public codecvt<internT, externT, stateT> {
 public:
 explicit codecvt_byname(const char*, size_t refs = 0);
 explicit codecvt_byname(const string&, size_t refs = 0);

 protected:
 ~codecvt_byname();
 };
}
```

<sup>240</sup>) Typically these will be characters to return the state to `stateT()`.

<sup>241</sup>) If `encoding()` yields `-1`, then more than `max_length()` `externT` elements may be consumed when producing a single `internT` character, and additional `externT` elements may appear at the end of a sequence after those that yield the final `internT` character.

## 26.4.2 The numeric category [category.numeric]

- <sup>1</sup> The classes `num_get<>` and `num_put<>` handle numeric formatting and parsing. Virtual functions are provided for several numeric types. Implementations may (but are not required to) delegate extraction of smaller types to extractors for larger types.<sup>242</sup>
- <sup>2</sup> All specifications of member functions for `num_put` and `num_get` in the subclauses of 26.4.2 only apply to the specializations required in Tables 67 and 68 (26.3.1.1.1), namely `num_get<char>`, `num_get<wchar_t>`, `num_get<C, InputIterator>`, `num_put<char>`, `num_put<wchar_t>`, and `num_put<C, OutputIterator>`. These specializations refer to the `ios_base&` argument for formatting specifications (26.4), and to its imbued locale for the `num_punct<>` facet to identify all numeric punctuation preferences, and also for the `ctype<>` facet to perform character classification.
- <sup>3</sup> Extractor and inserter members of the standard iostreams use `num_get<>` and `num_put<>` member functions for formatting and parsing numeric values (31.7.4.2.1, 31.7.5.2.1).

### 26.4.2.1 Class template `num_get` [locale.num.get]

```

namespace std {
 template<class charT, class InputIterator = istreambuf_iterator<charT>>
 class num_get : public locale::facet {
 public:
 using char_type = charT;
 using iter_type = InputIterator;

 explicit num_get(size_t refs = 0);

 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, bool& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, long& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, long long& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, unsigned short& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, unsigned int& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, unsigned long& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, unsigned long long& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, float& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, double& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, long double& v) const;
 iter_type get(iter_type in, iter_type end, ios_base&,
 ios_base::iostate& err, void*& v) const;

 static locale::id id;

 protected:
 ~num_get();
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, bool& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, long& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, long long& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, unsigned short& v) const;
 };
}

```

---

<sup>242</sup> Parsing "-1" correctly into, e.g., an `unsigned short` requires that the corresponding member `get()` at least extract the sign before delegating.

```

 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, unsigned int& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, unsigned long& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, unsigned long long& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, float& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, double& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, long double& v) const;
 virtual iter_type do_get(iter_type, iter_type, ios_base&,
 ios_base::iostate& err, void*& v) const;
};
}

```

<sup>1</sup> The facet `num_get` is used to parse numeric values from an input sequence such as an istream.

#### 26.4.2.1.1 `num_get` members

[facet.num.get.members]

```

iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, bool& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long long& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned short& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned int& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned long& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned long long& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, float& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, double& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long double& val) const;
iter_type get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, void*& val) const;

```

<sup>1</sup> *Returns:* `do_get(in, end, str, err, val)`.

#### 26.4.2.1.2 `num_get` virtual functions

[facet.num.get.virtuals]

```

iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long long& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned short& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned int& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned long& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, unsigned long long& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, float& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, double& val) const;
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, long double& val) const;

```

```
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, void*& val) const;
```

1 *Effects:* Reads characters from `in`, interpreting them according to `str.flags()`, `use_facet<ctype<charT>>(loc)`, and `use_facet<numunct<charT>>(loc)`, where `loc` is `str.getloc()`.

2 The details of this operation occur in three stages

(2.1) — Stage 1: Determine a conversion specifier

(2.2) — Stage 2: Extract characters from `in` and determine a corresponding `char` value for the format expected by the conversion specification determined in stage 1.

(2.3) — Stage 3: Store results

3 The details of the stages are presented below.

**Stage 1:** The function initializes local variables via

```
fmtflags flags = str.flags();
fmtflags basefield = (flags & ios_base::basefield);
fmtflags uppercase = (flags & ios_base::uppercase);
fmtflags boolalpha = (flags & ios_base::boolalpha);
```

For conversion to an integral type, the function determines the integral conversion specifier as indicated in Table 71. The table is ordered. That is, the first line whose condition is true applies.

Table 71 — Integer conversions

| State                         | stdio equivalent |
|-------------------------------|------------------|
| <code>basefield == oct</code> | <code>%o</code>  |
| <code>basefield == hex</code> | <code>%X</code>  |
| <code>basefield == 0</code>   | <code>%i</code>  |
| signed integral type          | <code>%d</code>  |
| unsigned integral type        | <code>%u</code>  |

For conversions to a floating-point type the specifier is `%g`.

For conversions to `void*` the specifier is `%p`.

A length modifier is added to the conversion specification, if needed, as indicated in Table 72.

Table 72 — Length modifier

| Type               | Length modifier |
|--------------------|-----------------|
| short              | <code>h</code>  |
| unsigned short     | <code>h</code>  |
| long               | <code>l</code>  |
| unsigned long      | <code>l</code>  |
| long long          | <code>ll</code> |
| unsigned long long | <code>ll</code> |
| double             | <code>l</code>  |
| long double        | <code>L</code>  |

**Stage 2:** If `in == end` then stage 2 terminates. Otherwise a `charT` is taken from `in` and local variables are initialized as if by

```
char_type ct = *in;
char c = src[find(atoms, atoms + sizeof(src) - 1, ct) - atoms];
if (ct == use_facet<numunct<charT>>(loc).decimal_point())
 c = '.';
bool discard =
 ct == use_facet<numunct<charT>>(loc).thousands_sep()
 && use_facet<numunct<charT>>(loc).grouping().length() != 0;
```

where the values `src` and `atoms` are defined as if by:

```
static const char src[] = "0123456789abcdefxABCDEFX+-";
char_type atoms[sizeof(src)];
use_facet<ctype<charT>>(loc).widen(src, src + sizeof(src), atoms);
```

for this value of `loc`.

If `discard` is `true`, then if `'.'` has not yet been accumulated, then the position of the character is remembered, but the character is otherwise ignored. Otherwise, if `'.'` has already been accumulated, the character is discarded and Stage 2 terminates. If it is not discarded, then a check is made to determine if `c` is allowed as the next character of an input field of the conversion specifier returned by Stage 1. If so, it is accumulated.

If the character is either discarded or accumulated then `in` is advanced by `++in` and processing returns to the beginning of stage 2.

**Stage 3:** The sequence of `chars` accumulated in stage 2 (the field) is converted to a numeric value by the rules of one of the functions declared in the header `<cstdlib>`:

- (3.1) — For a signed integer value, the function `strtoll`.
- (3.2) — For an unsigned integer value, the function `strtoull`.
- (3.3) — For a float value, the function `strtof`.
- (3.4) — For a double value, the function `strtod`.
- (3.5) — For a long double value, the function `strtold`.

The numeric value to be stored can be one of:

- (3.6) — zero, if the conversion function does not convert the entire field.
- (3.7) — the most positive (or negative) representable value, if the field to be converted to a signed integer type represents a value too large positive (or negative) to be represented in `val`.
- (3.8) — the most positive representable value, if the field to be converted to an unsigned integer type represents a value that cannot be represented in `val`.
- (3.9) — the converted value, otherwise.

The resultant numeric value is stored in `val`. If the conversion function does not convert the entire field, or if the field represents a value outside the range of representable values, `ios_base::failbit` is assigned to `err`.

4 Digit grouping is checked. That is, the positions of discarded separators is examined for consistency with `use_facet<num_punct<charT>>(loc).grouping()`. If they are not consistent then `ios_base::failbit` is assigned to `err`.

5 In any case, if stage 2 processing was terminated by the test for `in == end` then `err |= ios_base::eofbit` is performed.

```
iter_type do_get(iter_type in, iter_type end, ios_base& str,
 ios_base::iostate& err, bool& val) const;
```

6 *Effects:* If `(str.flags() & ios_base::boolalpha) == 0` then input proceeds as it would for a `long` except that if a value is being stored into `val`, the value is determined according to the following: If the value to be stored is 0 then `false` is stored. If the value is 1 then `true` is stored. Otherwise `true` is stored and `ios_base::failbit` is assigned to `err`.

7 Otherwise target sequences are determined “as if” by calling the members `false_name()` and `true_name()` of the facet obtained by `use_facet<num_punct<charT>>(str.getloc())`. Successive characters in the range `[in, end)` (see 27.2.3) are obtained and matched against corresponding positions in the target sequences only as necessary to identify a unique match. The input iterator `in` is compared to `end` only when necessary to obtain a character. If a target sequence is uniquely matched, `val` is set to the corresponding value. Otherwise `false` is stored and `ios_base::failbit` is assigned to `err`.

8 The `in` iterator is always left pointing one position beyond the last character successfully matched. If `val` is set, then `err` is set to `str.goodbit`; or to `str.eofbit` if, when seeking another character to match, it is found that `(in == end)`. If `val` is not set, then `err` is set to `str.failbit`; or to `(str.failbit | str.eofbit)` if the reason for the failure was that `(in == end)`. [*Example:* For targets `true: "a"` and `false: "abb"`, the input sequence `"a"` yields `val == true` and `err == str.eofbit`; the input sequence `"abc"` yields `err = str.failbit`, with `in` ending at the `'c'` element. For targets `true: "1"` and `false: "0"`, the input sequence `"1"` yields `val == true` and `err == str.goodbit`. For empty targets `("`), any input sequence yields `err == str.failbit`. — *end example*]

9 *Returns:* `in`.



## 26.4.2.2 Class template num\_put

[locale.num.put]

```

namespace std {
 template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
 class num_put : public locale::facet {
 public:
 using char_type = charT;
 using iter_type = OutputIterator;

 explicit num_put(size_t refs = 0);

 iter_type put(iter_type s, ios_base& f, char_type fill, bool v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, long v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, long long v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, unsigned long v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, unsigned long long v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, double v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, long double v) const;
 iter_type put(iter_type s, ios_base& f, char_type fill, const void* v) const;

 static locale::id id;

 protected:
 ~num_put();
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, bool v) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, long v) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, long long v) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, unsigned long) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, unsigned long long) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, double v) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, long double v) const;
 virtual iter_type do_put(iter_type, ios_base&, char_type fill, const void* v) const;
 };
 }

```

- <sup>1</sup> The facet num\_put is used to format numeric values to a character sequence such as an ostream.

## 26.4.2.2.1 num\_put members

[facet.num.put.members]

```

iter_type put(iter_type out, ios_base& str, char_type fill, bool val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, long val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, long long val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, unsigned long val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, unsigned long long val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, double val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, long double val) const;
iter_type put(iter_type out, ios_base& str, char_type fill, const void* val) const;

```

- <sup>1</sup> *Returns:* do\_put(out, str, fill, val).

## 26.4.2.2.2 num\_put virtual functions

[facet.num.put.virtuals]

```

iter_type do_put(iter_type out, ios_base& str, char_type fill, long val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, long long val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, unsigned long val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, unsigned long long val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, double val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, long double val) const;
iter_type do_put(iter_type out, ios_base& str, char_type fill, const void* val) const;

```

- <sup>1</sup> *Effects:* Writes characters to the sequence out, formatting val as desired. In the following description, loc names a local variable initialized as

```
locale loc = str.getloc();
```

- <sup>2</sup> The details of this operation occur in several stages:

- (2.1) — Stage 1: Determine a printf conversion specifier spec and determine the characters that would be printed by printf (31.12) given this conversion specifier for

```
printf(spec, val)
```

assuming that the current locale is the "C" locale.

- (2.2) — Stage 2: Adjust the representation by converting each `char` determined by stage 1 to a `charT` using a conversion and values returned by members of `use_facet<num_punct<charT>>(loc)`
- (2.3) — Stage 3: Determine where padding is required.
- (2.4) — Stage 4: Insert the sequence into the `out`.

3 Detailed descriptions of each stage follow.

4 *Returns:* `out`.

5

**Stage 1:** The first action of stage 1 is to determine a conversion specifier. The tables that describe this determination use the following local variables

```
fmtflags flags = str.flags();
fmtflags basefield = (flags & (ios_base::basefield));
fmtflags uppercase = (flags & (ios_base::uppercase));
fmtflags floatfield = (flags & (ios_base::floatfield));
fmtflags showpos = (flags & (ios_base::showpos));
fmtflags showbase = (flags & (ios_base::showbase));
fmtflags showpoint = (flags & (ios_base::showpoint));
```

All tables used in describing stage 1 are ordered. That is, the first line whose condition is true applies. A line without a condition is the default behavior when none of the earlier lines apply.

For conversion from an integral type other than a character type, the function determines the integral conversion specifier as indicated in Table 73.

Table 73 — Integer conversions

| State                                                           | stdio equivalent |
|-----------------------------------------------------------------|------------------|
| <code>basefield == ios_base::oct</code>                         | <code>%o</code>  |
| <code>(basefield == ios_base::hex) &amp;&amp; !uppercase</code> | <code>%x</code>  |
| <code>(basefield == ios_base::hex)</code>                       | <code>%X</code>  |
| for a signed integral type                                      | <code>%d</code>  |
| for an unsigned integral type                                   | <code>%u</code>  |

For conversion from a floating-point type, the function determines the floating-point conversion specifier as indicated in Table 74.

Table 74 — Floating-point conversions

| State                                                                                     | stdio equivalent |
|-------------------------------------------------------------------------------------------|------------------|
| <code>floatfield == ios_base::fixed</code>                                                | <code>%f</code>  |
| <code>floatfield == ios_base::scientific &amp;&amp; !uppercase</code>                     | <code>%e</code>  |
| <code>floatfield == ios_base::scientific</code>                                           | <code>%E</code>  |
| <code>floatfield == (ios_base::fixed   ios_base::scientific) &amp;&amp; !uppercase</code> | <code>%a</code>  |
| <code>floatfield == (ios_base::fixed   ios_base::scientific)</code>                       | <code>%A</code>  |
| <code>!uppercase</code>                                                                   | <code>%g</code>  |
| <i>otherwise</i>                                                                          | <code>%G</code>  |

For conversions from an integral or floating-point type a length modifier is added to the conversion specifier as indicated in Table 75.

The conversion specifier has the following optional additional qualifiers prepended as indicated in Table 76.

For conversion from a floating-point type, if `floatfield != (ios_base::fixed | ios_base::scientific)`, `str.precision()` is specified as precision in the conversion specification. Otherwise, no precision is specified.

For conversion from `void*` the specifier is `%p`.

Table 75 — Length modifier

| Type               | Length modifier |
|--------------------|-----------------|
| long               | l               |
| long long          | ll              |
| unsigned long      | l               |
| unsigned long long | ll              |
| long double        | L               |
| <i>otherwise</i>   | <i>none</i>     |

Table 76 — Numeric conversions

| Type(s)               | State     | stdio equivalent |
|-----------------------|-----------|------------------|
| an integral type      | showpos   | +                |
|                       | showbase  | #                |
| a floating-point type | showpos   | +                |
|                       | showpoint | #                |

The representations at the end of stage 1 consists of the `char`'s that would be printed by a call of `printf(s, val)` where `s` is the conversion specifier determined above.

**Stage 2:** Any character `c` other than a decimal point (`.`) is converted to a `charT` via `use_facet<ctype<charT>>(loc).widen(c)`

A local variable `punct` is initialized via

```
const numpunct<charT>& punct = use_facet<numpunct<charT>>(loc);
```

For arithmetic types, `punct.thousands_sep()` characters are inserted into the sequence as determined by the value returned by `punct.do_grouping()` using the method described in 26.4.3.1.2

Decimal point characters (`.`) are replaced by `punct.decimal_point()`

**Stage 3:** A local variable is initialized as

```
fmtflags adjustfield = (flags & (ios_base::adjustfield));
```

The location of any padding<sup>243</sup> is determined according to Table 77.

Table 77 — Fill padding

| State                                                                                                               | Location                                   |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| <code>adjustfield == ios_base::left</code>                                                                          | pad after                                  |
| <code>adjustfield == ios_base::right</code>                                                                         | pad before                                 |
| <code>adjustfield == internal</code> and a sign occurs in the representation                                        | pad after the sign                         |
| <code>adjustfield == internal</code> and representation after stage 1 began with <code>0x</code> or <code>0X</code> | pad after <code>x</code> or <code>X</code> |
| <i>otherwise</i>                                                                                                    | pad before                                 |

If `str.width()` is nonzero and the number of `charT`'s in the sequence after stage 2 is less than `str.width()`, then enough fill characters are added to the sequence at the position indicated for padding to bring the length of the sequence to `str.width()`.

`str.width(0)` is called.

**Stage 4:** The sequence of `charT`'s at the end of stage 3 are output via

```
*out++ = c
```

```
iter_type do_put(iter_type out, ios_base& str, char_type fill, bool val) const;
```

<sup>6</sup> *Returns:* If `(str.flags() & ios_base::boolalpha) == 0` returns `do_put(out, str, fill, (int)val)`, otherwise obtains a string `s` as if by

<sup>243</sup> The conversion specification `#o` generates a leading 0 which is *not* a padding character.

```

string_type s =
 val ? use_facet<numpunct<charT>>(loc).truename()
 : use_facet<numpunct<charT>>(loc).falsename();

```

and then inserts each character *c* of *s* into *out* via *\*out++ = c* and returns *out*.

### 26.4.3 The numeric punctuation facet

[facet.numpunct]

#### 26.4.3.1 Class template numpunct

[locale.numpunct]

```

namespace std {
template<class charT>
class numpunct : public locale::facet {
public:
 using char_type = charT;
 using string_type = basic_string<charT>;

 explicit numpunct(size_t refs = 0);

 char_type decimal_point() const;
 char_type thousands_sep() const;
 string grouping() const;
 string_type truename() const;
 string_type falsename() const;

 static locale::id id;

protected:
 ~numpunct(); // virtual
 virtual char_type do_decimal_point() const;
 virtual char_type do_thousands_sep() const;
 virtual string do_grouping() const;
 virtual string_type do_truename() const; // for bool
 virtual string_type do_falsename() const; // for bool
};
}

```

- <sup>1</sup> `numpunct<>` specifies numeric punctuation. The specializations required in Table 67 (26.3.1.1.1), namely `numpunct<wchar_t>` and `numpunct<char>`, provide classic "C" numeric formats, i.e., they contain information equivalent to that contained in the "C" locale or their wide character counterparts as if obtained by a call to `widen`.
- <sup>2</sup> The syntax for number formats is as follows, where `digit` represents the radix set specified by the `fmtflags` argument value, and `thousands-sep` and `decimal-point` are the results of corresponding `numpunct<charT>` members. Integer values have the format:

```

integer ::= [sign] units
sign ::= plusminus
plusminus ::= '+' | '-'
units ::= digits [thousands-sep units]
digits ::= digit [digits]

```

and floating-point values have:

```

floatval ::= [sign] units [decimal-point [digits]] [e [sign] digits] |
 [sign] decimal-point digits [e [sign] digits]
e ::= 'e' | 'E'

```

where the number of digits between `thousands-seps` is as specified by `do_grouping()`. For parsing, if the `digits` portion contains no thousands-separators, no grouping constraint is applied.

#### 26.4.3.1.1 numpunct members

[facet.numpunct.members]

```
char_type decimal_point() const;
```

- <sup>1</sup> *Returns:* `do_decimal_point()`.

```
char_type thousands_sep() const;
```

- <sup>2</sup> *Returns:* `do_thousands_sep()`.

```
string grouping() const;
```

3 *Returns:* do\_grouping().

```
string_type truename() const;
string_type falsename() const;
```

4 *Returns:* do\_truename() or do\_falsename(), respectively.

#### 26.4.3.1.2 numpunct virtual functions [facet.numpunct.virtuals]

```
char_type do_decimal_point() const;
```

1 *Returns:* A character for use as the decimal radix separator. The required specializations return '.', or L'.'. .

```
char_type do_thousands_sep() const;
```

2 *Returns:* A character for use as the digit group separator. The required specializations return ',', or L',', .

```
string do_grouping() const;
```

3 *Returns:* A basic\_string<char> vec used as a vector of integer values, in which each element vec[i] represents the number of digits<sup>244</sup> in the group at position i, starting with position 0 as the rightmost group. If vec.size() <= i, the number is the same as group (i - 1); if (i < 0 || vec[i] <= 0 || vec[i] == CHAR\_MAX), the size of the digit group is unlimited.

4 The required specializations return the empty string, indicating no grouping.

```
string_type do_truename() const;
string_type do_falsename() const;
```

5 *Returns:* A string representing the name of the boolean value true or false, respectively.

6 In the base class implementation these names are "true" and "false", or L"true" and L"false".

#### 26.4.3.2 Class template numpunct\_byname [locale.numpunct.byname]

```
namespace std {
 template<class charT>
 class numpunct_byname : public numpunct<charT> {
 // this class is specialized for char and wchar_t.
 public:
 using char_type = charT;
 using string_type = basic_string<charT>;

 explicit numpunct_byname(const char*, size_t refs = 0);
 explicit numpunct_byname(const string&, size_t refs = 0);

 protected:
 ~numpunct_byname();
 };
}
```

### 26.4.4 The collate category [category.collate]

#### 26.4.4.1 Class template collate [locale.collate]

```
namespace std {
 template<class charT>
 class collate : public locale::facet {
 public:
 using char_type = charT;
 using string_type = basic_string<charT>;

 explicit collate(size_t refs = 0);
 };
}
```

244) Thus, the string "\003" specifies groups of 3 digits each, and "3" probably indicates groups of 51 (!) digits each, because 51 is the ASCII value of "3".

```

int compare(const charT* low1, const charT* high1,
 const charT* low2, const charT* high2) const;
string_type transform(const charT* low, const charT* high) const;
long hash(const charT* low, const charT* high) const;

static locale::id id;

protected:
 ~collate();
 virtual int do_compare(const charT* low1, const charT* high1,
 const charT* low2, const charT* high2) const;
 virtual string_type do_transform(const charT* low, const charT* high) const;
 virtual long do_hash (const charT* low, const charT* high) const;
};
}

```

- <sup>1</sup> The class `collate<charT>` provides features for use in the collation (comparison) and hashing of strings. A locale member function template, `operator()`, uses the collate facet to allow a locale to act directly as the predicate argument for standard algorithms (Clause 29) and containers operating on strings. The specializations required in Table 67 (26.3.1.1.1), namely `collate<char>` and `collate<wchar_t>`, apply lexicographic ordering (29.7.10).
- <sup>2</sup> Each function compares a string of characters `*p` in the range `[low, high)`.

#### 26.4.4.1.1 collate members

[locale.collate.members]

```
int compare(const charT* low1, const charT* high1,
 const charT* low2, const charT* high2) const;
```

- <sup>1</sup> *Returns:* `do_compare(low1, high1, low2, high2)`.

```
string_type transform(const charT* low, const charT* high) const;
```

- <sup>2</sup> *Returns:* `do_transform(low, high)`.

```
long hash(const charT* low, const charT* high) const;
```

- <sup>3</sup> *Returns:* `do_hash(low, high)`.

#### 26.4.4.1.2 collate virtual functions

[locale.collate.virtuals]

```
int do_compare(const charT* low1, const charT* high1,
 const charT* low2, const charT* high2) const;
```

- <sup>1</sup> *Returns:* 1 if the first string is greater than the second, -1 if less, zero otherwise. The specializations required in Table 67 (26.3.1.1.1), namely `collate<char>` and `collate<wchar_t>`, implement a lexicographical comparison (29.7.10).

```
string_type do_transform(const charT* low, const charT* high) const;
```

- <sup>2</sup> *Returns:* A `basic_string<charT>` value that, compared lexicographically with the result of calling `transform()` on another string, yields the same result as calling `do_compare()` on the same two strings.<sup>245</sup>

```
long do_hash(const charT* low, const charT* high) const;
```

- <sup>3</sup> *Returns:* An integer value equal to the result of calling `hash()` on any other string for which `do_compare()` returns 0 (equal) when passed the two strings. [Note: The probability that the result equals that for another string which does not compare equal should be very small, approaching  $(1.0/\text{numeric\_limits}<\text{unsigned long}>::\text{max}())$ . — end note]

#### 26.4.4.2 Class template collate\_byname

[locale.collate.byname]

```
namespace std {
 template<class charT>
 class collate_byname : public collate<charT> {
 public:
 using string_type = basic_string<charT>;

```

<sup>245</sup>) This function is useful when one string is being compared to many other strings.

```

 explicit collate_byname(const char*, size_t refs = 0);
 explicit collate_byname(const string&, size_t refs = 0);

protected:
 ~collate_byname();
};
}

```

### 26.4.5 The time category

[category.time]

- <sup>1</sup> Templates `time_get<charT, InputIterator>` and `time_put<charT, OutputIterator>` provide date and time formatting and parsing. All specifications of member functions for `time_put` and `time_get` in the subclasses of 26.4.5 only apply to the specializations required in Tables 67 and 68 (26.3.1.1.1). Their members use their `ios_base&`, `ios_base::iostate&`, and fill arguments as described in 26.4, and the `ctype<>` facet, to determine formatting details.

#### 26.4.5.1 Class template `time_get`

[locale.time.get]

```

namespace std {
 class time_base {
 public:
 enum dateorder { no_order, dmy, mdy, ymd, ydm };
 };

 template<class charT, class InputIterator = istreambuf_iterator<charT>>
 class time_get : public locale::facet, public time_base {
 public:
 using char_type = charT;
 using iter_type = InputIterator;

 explicit time_get(size_t refs = 0);

 dateorder date_order() const { return do_date_order(); }
 iter_type get_time(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t) const;
 iter_type get_date(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t) const;
 iter_type get_weekday(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t) const;
 iter_type get_monthname(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t) const;
 iter_type get_year(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t) const;
 iter_type get(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t, char format, char modifier = 0) const;
 iter_type get(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t, const char_type* fmt,
 const char_type* fmtend) const;

 static locale::id id;

 protected:
 ~time_get();
 virtual dateorder do_date_order() const;
 virtual iter_type do_get_time(iter_type s, iter_type end, ios_base&,
 ios_base::iostate& err, tm* t) const;
 virtual iter_type do_get_date(iter_type s, iter_type end, ios_base&,
 ios_base::iostate& err, tm* t) const;
 virtual iter_type do_get_weekday(iter_type s, iter_type end, ios_base&,
 ios_base::iostate& err, tm* t) const;
 virtual iter_type do_get_monthname(iter_type s, iter_type end, ios_base&,
 ios_base::iostate& err, tm* t) const;
 virtual iter_type do_get_year(iter_type s, iter_type end, ios_base&,
 ios_base::iostate& err, tm* t) const;
 };
}

```

```

 virtual iter_type do_get(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t, char format, char modifier) const;
 };
}

```

- <sup>1</sup> `time_get` is used to parse a character sequence, extracting components of a time or date into a `struct tm` object. Each `get` member parses a format as produced by a corresponding format specifier to `time_put<>::put`. If the sequence being parsed matches the correct format, the corresponding members of the `struct tm` argument are set to the values used to produce the sequence; otherwise either an error is reported or unspecified values are assigned.<sup>246</sup>
- <sup>2</sup> If the end iterator is reached during parsing by any of the `get()` member functions, the member sets `ios_base::eofbit` in `err`.

#### 26.4.5.1.1 `time_get` members

[`locale.time.get.members`]

```
dateorder date_order() const;
```

- <sup>1</sup> *Returns:* `do_date_order()`.

```
iter_type get_time(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

- <sup>2</sup> *Returns:* `do_get_time(s, end, str, err, t)`.

```
iter_type get_date(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

- <sup>3</sup> *Returns:* `do_get_date(s, end, str, err, t)`.

```
iter_type get_weekday(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

```
iter_type get_monthname(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

- <sup>4</sup> *Returns:* `do_get_weekday(s, end, str, err, t)` or `do_get_monthname(s, end, str, err, t)`.

```
iter_type get_year(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

- <sup>5</sup> *Returns:* `do_get_year(s, end, str, err, t)`.

```
iter_type get(iter_type s, iter_type end, ios_base& f, ios_base::iostate& err,
 tm* t, char format, char modifier = 0) const;
```

- <sup>6</sup> *Returns:* `do_get(s, end, f, err, t, format, modifier)`.

```
iter_type get(iter_type s, iter_type end, ios_base& f, ios_base::iostate& err,
 tm* t, const char_type* fmt, const char_type* fmtend) const;
```

- <sup>7</sup> *Requires:* [`fmt`, `fmtend`) shall be a valid range.

- <sup>8</sup> *Effects:* The function starts by evaluating `err = ios_base::goodbit`. It then enters a loop, reading zero or more characters from `s` at each iteration. Unless otherwise specified below, the loop terminates when the first of the following conditions holds:

- (8.1) — The expression `fmt == fmtend` evaluates to `true`.
- (8.2) — The expression `err == ios_base::goodbit` evaluates to `false`.
- (8.3) — The expression `s == end` evaluates to `true`, in which case the function evaluates `err = ios_base::eofbit | ios_base::failbit`.
- (8.4) — The next element of `fmt` is equal to `'%'`, optionally followed by a modifier character, followed by a conversion specifier character, `format`, together forming a conversion specification valid for the ISO/IEC 9945 function `strptime`. If the number of elements in the range [`fmt`, `fmtend`) is not sufficient to unambiguously determine whether the conversion specification is complete and valid, the function evaluates `err = ios_base::failbit`. Otherwise, the function evaluates `s = do_get(s, end, f, err, t, format, modifier)`, where the value of `modifier` is `'\0'` when

<sup>246</sup> In other words, user confirmation is required for reliable parsing of user-entered dates and times, but machine-generated formats can be parsed reliably. This allows parsers to be aggressive about interpreting user variations on standard formats.



the optional modifier is absent from the conversion specification. If `err == ios_base::goodbit` holds after the evaluation of the expression, the function increments `fmt` to point just past the end of the conversion specification and continues looping.

(8.5) — The expression `isspace(*fmt, f.getloc())` evaluates to `true`, in which case the function first increments `fmt` until `fmt == fmtend || !isspace(*fmt, f.getloc())` evaluates to `true`, then advances `s` until `s == end || !isspace(*s, f.getloc())` is `true`, and finally resumes looping.

(8.6) — The next character read from `s` matches the element pointed to by `fmt` in a case-insensitive comparison, in which case the function evaluates `++fmt`, `++s` and continues looping. Otherwise, the function evaluates `err = ios_base::failbit`.

9 [Note: The function uses the `ctype<charT>` facet installed in `f`'s locale to determine valid whitespace characters. It is unspecified by what means the function performs case-insensitive comparison or whether multi-character sequences are considered while doing so. — end note]

10 *Returns:* `s`.

### 26.4.5.1.2 time\_get virtual functions

[`locale.time.get.virtuals`]

```
dateorder do_date_order() const;
```

1 *Returns:* An enumeration value indicating the preferred order of components for those date formats that are composed of day, month, and year.<sup>247</sup> Returns `no_order` if the date format specified by '`x`' contains other variable components (e.g., Julian day, week number, week day).

```
iter_type do_get_time(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

2 *Effects:* Reads characters starting at `s` until it has extracted those `struct tm` members, and remaining format characters, used by `time_put<>::put` to produce the format specified by `"%H:%M:%S"`, or until it encounters an error or end of sequence.

3 *Returns:* An iterator pointing immediately beyond the last character recognized as possibly part of a valid time.

```
iter_type do_get_date(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

4 *Effects:* Reads characters starting at `s` until it has extracted those `struct tm` members and remaining format characters used by `time_put<>::put` to produce one of the following formats, or until it encounters an error. The format depends on the value returned by `date_order()` as shown in Table 78.

Table 78 — `do_get_date` effects

| <code>date_order()</code> | Format                |
|---------------------------|-----------------------|
| <code>no_order</code>     | <code>"%m%d%y"</code> |
| <code>dmy</code>          | <code>"%d%m%y"</code> |
| <code>mdy</code>          | <code>"%m%d%y"</code> |
| <code>ymd</code>          | <code>"%y%m%d"</code> |
| <code>ydm</code>          | <code>"%y%d%m"</code> |

5 An implementation may also accept additional implementation-defined formats.

6 *Returns:* An iterator pointing immediately beyond the last character recognized as possibly part of a valid date.

```
iter_type do_get_weekday(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
iter_type do_get_monthname(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

7 *Effects:* Reads characters starting at `s` until it has extracted the (perhaps abbreviated) name of a weekday or month. If it finds an abbreviation that is followed by characters that could match a full

<sup>247</sup>) This function is intended as a convenience only, for common formats, and may return `no_order` in valid locales.

name, it continues reading until it matches the full name or fails. It sets the appropriate `struct tm` member accordingly.

8 *Returns:* An iterator pointing immediately beyond the last character recognized as part of a valid name.

```
iter_type do_get_year(iter_type s, iter_type end, ios_base& str,
 ios_base::iostate& err, tm* t) const;
```

9 *Effects:* Reads characters starting at `s` until it has extracted an unambiguous year identifier. It is implementation-defined whether two-digit year numbers are accepted, and (if so) what century they are assumed to lie in. Sets the `t->tm_year` member accordingly.

10 *Returns:* An iterator pointing immediately beyond the last character recognized as part of a valid year identifier.

```
iter_type do_get(iter_type s, iter_type end, ios_base& f,
 ios_base::iostate& err, tm* t, char format, char modifier) const;
```

11 *Requires:* `t` shall point to an object.

12 *Effects:* The function starts by evaluating `err = ios_base::goodbit`. It then reads characters starting at `s` until it encounters an error, or until it has extracted and assigned those `struct tm` members, and any remaining format characters, corresponding to a conversion directive appropriate for the ISO/IEC 9945 function `strptime`, formed by concatenating `'%'`, the `modifier` character, when non-NUL, and the `format` character. When the concatenation fails to yield a complete valid directive the function leaves the object pointed to by `t` unchanged and evaluates `err |= ios_base::failbit`. When `s == end` evaluates to `true` after reading a character the function evaluates `err |= ios_base::eofbit`.

13 For complex conversion directives such as `%c`, `%x`, or `%X`, or directives that involve the optional modifiers `E` or `O`, when the function is unable to unambiguously determine some or all `struct tm` members from the input sequence `[s, end)`, it evaluates `err |= ios_base::eofbit`. In such cases the values of those `struct tm` members are unspecified and may be outside their valid range.

14 *Remarks:* It is unspecified whether multiple calls to `do_get()` with the address of the same `struct tm` object will update the current contents of the object or simply overwrite its members. Portable programs should zero out the object before invoking the function.

15 *Returns:* An iterator pointing immediately beyond the last character recognized as possibly part of a valid input sequence for the given `format` and `modifier`.

#### 26.4.5.2 Class template `time_get_byname`

[`locale.time.get.byname`]

```
namespace std {
 template<class charT, class InputIterator = istreambuf_iterator<charT>>
 class time_get_byname : public time_get<charT, InputIterator> {
 public:
 using dateorder = time_base::dateorder;
 using iter_type = InputIterator;

 explicit time_get_byname(const char*, size_t refs = 0);
 explicit time_get_byname(const string&, size_t refs = 0);

 protected:
 ~time_get_byname();
 };
}
```

#### 26.4.5.3 Class template `time_put`

[`locale.time.put`]

```
namespace std {
 template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
 class time_put : public locale::facet {
 public:
 using char_type = charT;
 using iter_type = OutputIterator;

 explicit time_put(size_t refs = 0);
 };
}
```

```

// the following is implemented in terms of other member functions.
iter_type put(iter_type s, ios_base& f, char_type fill, const tm* tmb,
 const charT* pattern, const charT* pat_end) const;
iter_type put(iter_type s, ios_base& f, char_type fill,
 const tm* tmb, char format, char modifier = 0) const;

static locale::id id;

protected:
 ~time_put();
 virtual iter_type do_put(iter_type s, ios_base&, char_type, const tm* t,
 char format, char modifier) const;
};
}

```

#### 26.4.5.3.1 time\_put members

[locale.time.put.members]

```

iter_type put(iter_type s, ios_base& str, char_type fill, const tm* t,
 const charT* pattern, const charT* pat_end) const;
iter_type put(iter_type s, ios_base& str, char_type fill, const tm* t,
 char format, char modifier = 0) const;

```

- 1 *Effects:* The first form steps through the sequence from `pattern` to `pat_end`, identifying characters that are part of a format sequence. Each character that is not part of a format sequence is written to `s` immediately, and each format sequence, as it is identified, results in a call to `do_put`; thus, format elements and other characters are interleaved in the output in the order in which they appear in the pattern. Format sequences are identified by converting each character `c` to a `char` value as if by `ct.narrow(c, 0)`, where `ct` is a reference to `ctype<charT>` obtained from `str.getloc()`. The first character of each sequence is equal to `'%'`, followed by an optional modifier character `mod`<sup>248</sup> and a format specifier character `spec` as defined for the function `strftime`. If no modifier character is present, `mod` is zero. For each valid format sequence identified, calls `do_put(s, str, fill, t, spec, mod)`.
- 2 The second form calls `do_put(s, str, fill, t, format, modifier)`.
- 3 [Note: The `fill` argument may be used in the implementation-defined formats or by derivations. A space character is a reasonable default for this argument. — end note]
- 4 *Returns:* An iterator pointing immediately after the last character produced.

#### 26.4.5.3.2 time\_put virtual functions

[locale.time.put.virtuals]

```

iter_type do_put(iter_type s, ios_base&, char_type fill, const tm* t,
 char format, char modifier) const;

```

- 1 *Effects:* Formats the contents of the parameter `t` into characters placed on the output sequence `s`. Formatting is controlled by the parameters `format` and `modifier`, interpreted identically as the format specifiers in the string argument to the standard library function `strftime()`<sup>249</sup>, except that the sequence of characters produced for those specifiers that are described as depending on the C locale are instead implementation-defined.<sup>250</sup>
- 2 *Returns:* An iterator pointing immediately after the last character produced. [Note: The `fill` argument may be used in the implementation-defined formats or by derivations. A space character is a reasonable default for this argument. — end note]

#### 26.4.5.4 Class template time\_put\_byname

[locale.time.put.byname]

```

namespace std {
 template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
 class time_put_byname : public time_put<charT, OutputIterator> {
 public:
 using char_type = charT;
 using iter_type = OutputIterator;

```

248) Although the C programming language defines no modifiers, most vendors do.

249) Interpretation of the `modifier` argument is implementation-defined, but should follow POSIX conventions.

250) Implementations should refer to other standards such as POSIX for these definitions.

```

 explicit time_put_byname(const char*, size_t refs = 0);
 explicit time_put_byname(const string&, size_t refs = 0);

protected:
 ~time_put_byname();
};
}

```

### 26.4.6 The monetary category [category.monetary]

- <sup>1</sup> These templates handle monetary formats. A template parameter indicates whether local or international monetary formats are to be used.
- <sup>2</sup> All specifications of member functions for `money_put` and `money_get` in the subclauses of 26.4.6 only apply to the specializations required in Tables 67 and 68 (26.3.1.1.1). Their members use their `ios_base&`, `ios_base::iostate&`, and fill arguments as described in 26.4, and the `money_punct<>` and `ctype<>` facets, to determine formatting details.

#### 26.4.6.1 Class template `money_get` [locale.money.get]

```

namespace std {
 template<class charT, class InputIterator = istreambuf_iterator<charT>>
 class money_get : public locale::facet {
 public:
 using char_type = charT;
 using iter_type = InputIterator;
 using string_type = basic_string<charT>;

 explicit money_get(size_t refs = 0);

 iter_type get(iter_type s, iter_type end, bool intl,
 ios_base& f, ios_base::iostate& err,
 long double& units) const;
 iter_type get(iter_type s, iter_type end, bool intl,
 ios_base& f, ios_base::iostate& err,
 string_type& digits) const;

 static locale::id id;

protected:
 ~money_get();
 virtual iter_type do_get(iter_type, iter_type, bool, ios_base&,
 ios_base::iostate& err, long double& units) const;
 virtual iter_type do_get(iter_type, iter_type, bool, ios_base&,
 ios_base::iostate& err, string_type& digits) const;
};
}

```

##### 26.4.6.1.1 `money_get` members [locale.money.get.members]

```

iter_type get(iter_type s, iter_type end, bool intl, ios_base& f,
 ios_base::iostate& err, long double& quant) const;
iter_type get(iter_type s, iter_type end, bool intl, ios_base& f,
 ios_base::iostate& err, string_type& quant) const;

```

- <sup>1</sup> *Returns:* `do_get(s, end, intl, f, err, quant)`.

##### 26.4.6.1.2 `money_get` virtual functions [locale.money.get.virtuals]

```

iter_type do_get(iter_type s, iter_type end, bool intl, ios_base& str,
 ios_base::iostate& err, long double& units) const;
iter_type do_get(iter_type s, iter_type end, bool intl, ios_base& str,
 ios_base::iostate& err, string_type& digits) const;

```

- <sup>1</sup> *Effects:* Reads characters from `s` to parse and construct a monetary value according to the format specified by a `money_punct<charT, Intl>` facet reference `mp` and the character mapping specified by a `ctype<charT>` facet reference `ct` obtained from the locale returned by `str.getloc()`, and `str.flags()`.

If a valid sequence is recognized, does not change `err`; otherwise, sets `err` to `(err|str.failbit)`, or `(err|str.failbit|str.eofbit)` if no more characters are available, and does not change `units` or `digits`. Uses the pattern returned by `mp.neg_format()` to parse all values. The result is returned as an integral value stored in `units` or as a sequence of digits possibly preceded by a minus sign (as produced by `ct.widen(c)` where `c` is '-' or in the range from '0' through '9', inclusive) stored in `digits`. [Example: The sequence \$1,056.23 in a common United States locale would yield, for `units`, 105623, or, for `digits`, "105623". — end example] If `mp.grouping()` indicates that no thousands separators are permitted, any such characters are not read, and parsing is terminated at the point where they first appear. Otherwise, thousands separators are optional; if present, they are checked for correct placement only after all format components have been read.

2 Where `money_base::space` or `money_base::none` appears as the last element in the format pattern, no white space is consumed. Otherwise, where `money_base::space` appears in any of the initial elements of the format pattern, at least one white space character is required. Where `money_base::none` appears in any of the initial elements of the format pattern, white space is allowed but not required. If `(str.flags() & str.showbase)` is false, the currency symbol is optional and is consumed only if other characters are needed to complete the format; otherwise, the currency symbol is required.

3 If the first character (if any) in the string `pos` returned by `mp.positive_sign()` or the string `neg` returned by `mp.negative_sign()` is recognized in the position indicated by `sign` in the format pattern, it is consumed and any remaining characters in the string are required after all the other format components. [Example: If `showbase` is off, then for a `neg` value of "(" and a currency symbol of "L", in "(100 L)" the "L" is consumed; but if `neg` is "-", the "L" in "-100 L" is not consumed. — end example] If `pos` or `neg` is empty, the sign component is optional, and if no sign is detected, the result is given the sign that corresponds to the source of the empty string. Otherwise, the character in the indicated position must match the first character of `pos` or `neg`, and the result is given the corresponding sign. If the first character of `pos` is equal to the first character of `neg`, or if both strings are empty, the result is given a positive sign.

4 Digits in the numeric monetary component are extracted and placed in `digits`, or into a character buffer `buf1` for conversion to produce a value for `units`, in the order in which they appear, preceded by a minus sign if and only if the result is negative. The value `units` is produced as if by<sup>251</sup>

```
for (int i = 0; i < n; ++i)
 buf2[i] = src[find(atoms, atoms+sizeof(src), buf1[i]) - atoms];
buf2[n] = 0;
sscanf(buf2, "%Lf", &units);
```

where `n` is the number of characters placed in `buf1`, `buf2` is a character buffer, and the values `src` and `atoms` are defined as if by

```
static const char src[] = "0123456789-";
charT atoms[sizeof(src)];
ct.widen(src, src + sizeof(src) - 1, atoms);
```

5 *Returns:* An iterator pointing immediately beyond the last character recognized as part of a valid monetary quantity.

#### 26.4.6.2 Class template `money_put`

[`locale.money.put`]

```
namespace std {
template<class charT, class OutputIterator = ostreambuf_iterator<charT>>
class money_put : public locale::facet {
public:
 using char_type = charT;
 using iter_type = OutputIterator;
 using string_type = basic_string<charT>;

 explicit money_put(size_t refs = 0);

 iter_type put(iter_type s, bool intl, ios_base& f,
 char_type fill, long double units) const;
 iter_type put(iter_type s, bool intl, ios_base& f,
 char_type fill, const string_type& digits) const;
```

<sup>251</sup>) The semantics here are different from `ct.narrow`.

```

 static locale::id id;

protected:
 ~money_put();
 virtual iter_type do_put(iter_type, bool, ios_base&, char_type fill,
 long double units) const;
 virtual iter_type do_put(iter_type, bool, ios_base&, char_type fill,
 const string_type& digits) const;
};
}

```

#### 26.4.6.2.1 money\_put members [locale.money.put.members]

```

iter_type put(iter_type s, bool intl, ios_base& f, char_type fill, long double quant) const;
iter_type put(iter_type s, bool intl, ios_base& f, char_type fill, const string_type& quant) const;

```

<sup>1</sup> *Returns:* do\_put(s, intl, f, loc, quant).

#### 26.4.6.2.2 money\_put virtual functions [locale.money.put.virtuals]

```

iter_type do_put(iter_type s, bool intl, ios_base& str,
 char_type fill, long double units) const;
iter_type do_put(iter_type s, bool intl, ios_base& str,
 char_type fill, const string_type& digits) const;

```

<sup>1</sup> *Effects:* Writes characters to **s** according to the format specified by a `money_punct<charT, Intl>` facet reference **mp** and the character mapping specified by a `ctype<charT>` facet reference **ct** obtained from the locale returned by `str.getloc()`, and `str.flags()`. The argument **units** is transformed into a sequence of wide characters as if by

```
ct.widen(buf1, buf1 + sprintf(buf1, "%.0Lf", units), buf2)
```

for character buffers **buf1** and **buf2**. If the first character in **digits** or **buf2** is equal to `ct.widen('')`, then the pattern used for formatting is the result of `mp.neg_format()`; otherwise the pattern is the result of `mp.pos_format()`. Digit characters are written, interspersed with any thousands separators and decimal point specified by the format, in the order they appear (after the optional leading minus sign) in **digits** or **buf2**. In **digits**, only the optional leading minus sign and the immediately subsequent digit characters (as classified according to **ct**) are used; any trailing characters (including digits appearing after a non-digit character) are ignored. Calls `str.width(0)`.

<sup>2</sup> *Remarks:* The currency symbol is generated if and only if `(str.flags() & str.showbase)` is nonzero. If the number of characters generated for the specified format is less than the value returned by `str.width(0)` on entry to the function, then copies of **fill** are inserted as necessary to pad to the specified width. For the value **af** equal to `(str.flags() & str.adjustfield)`, if `(af == str.internal)` is true, the fill characters are placed where **none** or **space** appears in the formatting pattern; otherwise if `(af == str.left)` is true, they are placed after the other characters; otherwise, they are placed before the other characters. [*Note:* It is possible, with some combinations of format patterns and flag values, to produce output that cannot be parsed using `num_get<>::get`. — end note]

<sup>3</sup> *Returns:* An iterator pointing immediately after the last character produced.

#### 26.4.6.3 Class template money\_punct [locale.money\_punct]

```

namespace std {
 class money_base {
 public:
 enum part { none, space, symbol, sign, value };
 struct pattern { char field[4]; };
 };

 template<class charT, bool International = false>
 class money_punct : public locale::facet, public money_base {
 public:
 using char_type = charT;
 using string_type = basic_string<charT>;

 explicit money_punct(size_t refs = 0);
 };
}

```

```

charT decimal_point() const;
charT thousands_sep() const;
string grouping() const;
string_type curr_symbol() const;
string_type positive_sign() const;
string_type negative_sign() const;
int frac_digits() const;
pattern pos_format() const;
pattern neg_format() const;

```

```

static locale::id id;
static const bool intl = International;

```

```

protected:
 ~moneypunct();
 virtual charT do_decimal_point() const;
 virtual charT do_thousands_sep() const;
 virtual string do_grouping() const;
 virtual string_type do_curr_symbol() const;
 virtual string_type do_positive_sign() const;
 virtual string_type do_negative_sign() const;
 virtual int do_frac_digits() const;
 virtual pattern do_pos_format() const;
 virtual pattern do_neg_format() const;
};
}

```

- <sup>1</sup> The `moneypunct<>` facet defines monetary formatting parameters used by `money_get<>` and `money_put<>`. A monetary format is a sequence of four components, specified by a `pattern` value `p`, such that the `part` value `static_cast<part>(p.field[i])` determines the  $i^{\text{th}}$  component of the format<sup>252</sup>. In the `field` member of a `pattern` object, each value `symbol`, `sign`, `value`, and either `space` or `none` appears exactly once. The value `none`, if present, is not first; the value `space`, if present, is neither first nor last.
- <sup>2</sup> Where `none` or `space` appears, white space is permitted in the format, except where `none` appears at the end, in which case no white space is permitted. The value `space` indicates that at least one space is required at that position. Where `symbol` appears, the sequence of characters returned by `curr_symbol()` is permitted, and can be required. Where `sign` appears, the first (if any) of the sequence of characters returned by `positive_sign()` or `negative_sign()` (respectively as the monetary value is non-negative or negative) is required. Any remaining characters of the sign sequence are required after all other format components. Where `value` appears, the absolute numeric monetary value is required.
- <sup>3</sup> The format of the numeric monetary value is a decimal number:

```

value ::= units [decimal-point [digits]] |
 decimal-point digits

```

if `frac_digits()` returns a positive value, or

```

value ::= units

```

otherwise. The symbol `decimal-point` indicates the character returned by `decimal_point()`. The other symbols are defined as follows:

```

units ::= digits [thousands-sep units]
digits ::= adigit [digits]

```

In the syntax specification, the symbol `adigit` is any of the values `ct.widen(c)` for `c` in the range `'0'` through `'9'`, inclusive, and `ct` is a reference of type `const ctype<charT>&` obtained as described in the definitions of `money_get<>` and `money_put<>`. The symbol `thousands-sep` is the character returned by `thousands_sep()`. The space character used is the value `ct.widen(' ')`. White space characters are those characters `c` for which `ci.is(space, c)` returns `true`. The number of digits required after the decimal point (if any) is exactly the value returned by `frac_digits()`.

- <sup>4</sup> The placement of thousands-separator characters (if any) is determined by the value returned by `grouping()`, defined identically as the member `numpunct<>::do_grouping()`.

---

<sup>252</sup>) An array of `char`, rather than an array of `part`, is specified for `pattern::field` purely for efficiency.

**26.4.6.3.1 moneypunct members** [locale.moneypunct.members]

```

charT decimal_point() const;
charT thousands_sep() const;
string grouping() const;
string_type curr_symbol() const;
string_type positive_sign() const;
string_type negative_sign() const;
int frac_digits() const;
pattern pos_format() const;
pattern neg_format() const;

```

<sup>1</sup> Each of these functions *F* returns the result of calling the corresponding virtual member function `do_`*F*`()`.

**26.4.6.3.2 moneypunct virtual functions** [locale.moneypunct.virtuals]

```
charT do_decimal_point() const;
```

<sup>1</sup> *Returns:* The radix separator to use in case `do_frac_digits()` is greater than zero.<sup>253</sup>

```
charT do_thousands_sep() const;
```

<sup>2</sup> *Returns:* The digit group separator to use in case `do_grouping()` specifies a digit grouping pattern.<sup>254</sup>

```
string do_grouping() const;
```

<sup>3</sup> *Returns:* A pattern defined identically as, but not necessarily equal to, the result of `num_punct<charT>::do_grouping()`.<sup>255</sup>

```
string_type do_curr_symbol() const;
```

<sup>4</sup> *Returns:* A string to use as the currency identifier symbol. [Note: For specializations where the second template parameter is `true`, this is typically four characters long: a three-letter code as specified by ISO 4217 followed by a space. — end note]

```
string_type do_positive_sign() const;
string_type do_negative_sign() const;
```

<sup>5</sup> *Returns:* `do_positive_sign()` returns the string to use to indicate a positive monetary value;<sup>256</sup> `do_negative_sign()` returns the string to use to indicate a negative value.

```
int do_frac_digits() const;
```

<sup>6</sup> *Returns:* The number of digits after the decimal radix separator, if any.<sup>257</sup>

```
pattern do_pos_format() const;
pattern do_neg_format() const;
```

<sup>7</sup> *Returns:* The specializations required in Table 68 (26.3.1.1.1), namely `moneypunct<char>`, `moneypunct<wchar_t>`, `moneypunct<char, true>`, and `moneypunct<wchar_t, true>`, return an object of type `pattern` initialized to { `symbol`, `sign`, `none`, `value` }.<sup>258</sup>

**26.4.6.4 Class template moneypunct\_byname** [locale.moneypunct.byname]

```

namespace std {
 template<class charT, bool Intl = false>
 class moneypunct_byname : public moneypunct<charT, Intl> {
 public:
 using pattern = money_base::pattern;
 using string_type = basic_string<charT>;

 explicit moneypunct_byname(const char*, size_t refs = 0);
 explicit moneypunct_byname(const string&, size_t refs = 0);
 };
}

```

<sup>253</sup>) In common U.S. locales this is `'.'`.

<sup>254</sup>) In common U.S. locales this is `' '`.

<sup>255</sup>) To specify grouping by 3s, the value is `"\003"` not `"3"`.

<sup>256</sup>) This is usually the empty string.

<sup>257</sup>) In common U.S. locales, this is 2.

<sup>258</sup>) Note that the international symbol returned by `do_curr_symbol()` usually contains a space, itself; for example, `"USD "`.



```

 protected:
 ~moneypunct_byname();
 };
}

```

## 26.4.7 The message retrieval category

[category.messages]

<sup>1</sup> Class `messages<charT>` implements retrieval of strings from message catalogs.

### 26.4.7.1 Class template messages

[locale.messages]

```

namespace std {
 class messages_base {
 public:
 using catalog = unspecified signed integer type;
 };

 template<class charT>
 class messages : public locale::facet, public messages_base {
 public:
 using char_type = charT;
 using string_type = basic_string<charT>;

 explicit messages(size_t refs = 0);

 catalog open(const basic_string<char>& fn, const locale&) const;
 string_type get(catalog c, int set, int msgid,
 const string_type& default) const;
 void close(catalog c) const;

 static locale::id id;

 protected:
 ~messages();
 virtual catalog do_open(const basic_string<char>&, const locale&) const;
 virtual string_type do_get(catalog, int set, int msgid,
 const string_type& default) const;
 virtual void do_close(catalog) const;
 };
}

```

<sup>1</sup> Values of type `messages_base::catalog` usable as arguments to members `get` and `close` can be obtained only by calling member `open`.

#### 26.4.7.1.1 messages members

[locale.messages.members]

```
catalog open(const basic_string<char>& name, const locale& loc) const;
```

<sup>1</sup> *Returns:* `do_open(name, loc)`.

```
string_type get(catalog cat, int set, int msgid, const string_type& default) const;
```

<sup>2</sup> *Returns:* `do_get(cat, set, msgid, default)`.

```
void close(catalog cat) const;
```

<sup>3</sup> *Effects:* Calls `do_close(cat)`.

#### 26.4.7.1.2 messages virtual functions

[locale.messages.virtuals]

```
catalog do_open(const basic_string<char>& name, const locale& loc) const;
```

<sup>1</sup> *Returns:* A value that may be passed to `get()` to retrieve a message from the message catalog identified by the string `name` according to an implementation-defined mapping. The result can be used until it is passed to `close()`.

<sup>2</sup> Returns a value less than 0 if no such catalog can be opened.

<sup>3</sup> *Remarks:* The locale argument `loc` is used for character set code conversion when retrieving messages, if needed.

```
string_type do_get(catalog cat, int set, int msgid, const string_type& default) const;
```

4 *Requires:* `cat` shall be a catalog obtained from `open()` and not yet closed.

5 *Returns:* A message identified by arguments `set`, `msgid`, and `default`, according to an implementation-defined mapping. If no such message can be found, returns `default`.

```
void do_close(catalog cat) const;
```

6 *Requires:* `cat` shall be a catalog obtained from `open()` and not yet closed.

7 *Effects:* Releases unspecified resources associated with `cat`.

8 *Remarks:* The limit on such resources, if any, is implementation-defined.

### 26.4.7.2 Class template `messages_byname`

[`locale.messages.byname`]

```
namespace std {
 template<class charT>
 class messages_byname : public messages<charT> {
 public:
 using catalog = messages_base::catalog;
 using string_type = basic_string<charT>;

 explicit messages_byname(const char*, size_t refs = 0);
 explicit messages_byname(const string&, size_t refs = 0);

 protected:
 ~messages_byname();
 };
}
```

## 26.5 C library locales

[`c.locales`]

### 26.5.1 Header `<locale>` synopsis

[`locale.syn`]

```
namespace std {
 struct lconv;

 char* setlocale(int category, const char* locale);
 lconv* localeconv();
}

#define NULL see 21.2.3
#define LC_ALL see below
#define LC_COLLATE see below
#define LC_CTYPE see below
#define LC_MONETARY see below
#define LC_NUMERIC see below
#define LC_TIME see below
```

<sup>1</sup> The contents and meaning of the header `<locale>` are the same as the C standard library header `<locale.h>`.

<sup>2</sup> Calls to the function `setlocale` may introduce a data race (20.5.5.9) with other calls to `setlocale` or with calls to the functions listed in Table 79.

SEE ALSO: ISO C 7.11

Table 79 — Potential setlocale data races

|         |          |           |            |         |
|---------|----------|-----------|------------|---------|
| fprintf | isprint  | iswdigit  | localeconv | tolower |
| fscanf  | ispunct  | iswgraph  | mblen      | toupper |
| isalnum | isspace  | iswlower  | mbstowcs   | tolower |
| isalpha | isupper  | iswprint  | mbtowc     | toupper |
| isblank | iswalnum | iswpunct  | setlocale  | wscoll  |
| isctrl  | iswalpha | iswspace  | strcoll    | wctod   |
| isdigit | iswblank | iswupper  | strerror   | wctombs |
| isgraph | iswctrl  | iswxdigit | strtod     | wcsxfrm |
| islower | iswctype | isxdigit  | strxfrm    | wctomb  |

## 27 Containers library [containers]

### 27.1 General [containers.general]

- <sup>1</sup> This Clause describes components that C++ programs may use to organize collections of information.
- <sup>2</sup> The following subclauses describe container requirements, and components for sequence containers and associative containers, as summarized in Table 80.

Table 80 — Containers library summary

| Subclause                             | Header(s)                                                  |
|---------------------------------------|------------------------------------------------------------|
| 27.2 Requirements                     |                                                            |
| 27.3 Sequence containers              | <array><br><deque><br><forward_list><br><list><br><vector> |
| 27.4 Associative containers           | <map><br><set>                                             |
| 27.5 Unordered associative containers | <unordered_map><br><unordered_set>                         |
| 27.6 Container adaptors               | <queue><br><stack>                                         |
| 27.7 Views                            | <span>                                                     |

### 27.2 Container requirements [container.requirements]

#### 27.2.1 General container requirements [container.requirements.general]

- <sup>1</sup> Containers are objects that store other objects. They control allocation and deallocation of these objects through constructors, destructors, insert and erase operations.
- <sup>2</sup> All of the complexity requirements in this Clause are stated solely in terms of the number of operations on the contained objects. [*Example*: The copy constructor of type `vector<vector<int>>` has linear complexity, even though the complexity of copying each contained `vector<int>` is itself linear. — *end example*]
- <sup>3</sup> For the components affected by this subclause that declare an `allocator_type`, objects stored in these components shall be constructed using the function `allocator_traits<allocator_type>::rebind_traits<U>::construct` and destroyed using the function `allocator_traits<allocator_type>::rebind_traits<U>::destroy` (24.10.9.2), where `U` is either `allocator_type::value_type` or an internal type used by the container. These functions are called only for the container's element type, not for internal types used by the container. [*Note*: This means, for example, that a node-based container might need to construct nodes containing aligned buffers and call `construct` to place the element into the buffer. — *end note*]
- <sup>4</sup> In Tables 81, 82, and 83 `X` denotes a container class containing objects of type `T`, `a` and `b` denote values of type `X`, `u` denotes an identifier, `r` denotes a non-const value of type `X`, and `rv` denotes a non-const rvalue of type `X`.

Table 81 — Container requirements

| Expression                 | Return type         | Operational semantics | Assertion/note pre-/post-condition                                                               | Complexity   |
|----------------------------|---------------------|-----------------------|--------------------------------------------------------------------------------------------------|--------------|
| <code>X::value_type</code> | <code>T</code>      |                       | <i>Requires</i> : <code>T</code> is <i>Cpp17Erasable</i> from <code>X</code> (see 27.2.1, below) | compile time |
| <code>X::reference</code>  | <code>T&amp;</code> |                       |                                                                                                  | compile time |

Table 81 — Container requirements (continued)

| Expression                                      | Return type                                                          | Operational semantics                                                            | Assertion/note pre-/post-condition                                                                                  | Complexity   |
|-------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------|
| <code>X::const_reference</code>                 | <code>const T&amp;</code>                                            |                                                                                  |                                                                                                                     | compile time |
| <code>X::iterator</code>                        | iterator type whose value type is T                                  |                                                                                  | any iterator category that meets the forward iterator requirements. convertible to <code>X::const_iterator</code> . | compile time |
| <code>X::const_iterator</code>                  | constant iterator type whose value type is T                         |                                                                                  | any iterator category that meets the forward iterator requirements.                                                 | compile time |
| <code>X::difference_type</code>                 | signed integer type                                                  |                                                                                  | is identical to the difference type of <code>X::iterator</code> and <code>X::const_iterator</code>                  | compile time |
| <code>X::size_type</code>                       | unsigned integer type                                                |                                                                                  | <code>size_type</code> can represent any non-negative value of <code>difference_type</code>                         | compile time |
| <code>X u;</code>                               |                                                                      |                                                                                  | <i>Ensures:</i> <code>u.empty()</code>                                                                              | constant     |
| <code>X()</code>                                |                                                                      |                                                                                  | <i>Ensures:</i> <code>X().empty()</code>                                                                            | constant     |
| <code>X(a)</code>                               |                                                                      |                                                                                  | <i>Requires:</i> T is <i>Cpp17CopyInsertable</i> into X (see below).<br><i>Ensures:</i> <code>a == X(a)</code> .    | linear       |
| <code>X u(a);</code><br><code>X u = a;</code>   |                                                                      |                                                                                  | <i>Requires:</i> T is <i>Cpp17CopyInsertable</i> into X (see below).<br><i>Ensures:</i> <code>u == a</code>         | linear       |
| <code>X u(rv);</code><br><code>X u = rv;</code> |                                                                      |                                                                                  | <i>Ensures:</i> u shall be equal to the value that <code>rv</code> had before this construction                     | (Note B)     |
| <code>a = rv</code>                             | <code>X&amp;</code>                                                  | All existing elements of <code>a</code> are either move assigned to or destroyed | a shall be equal to the value that <code>rv</code> had before this assignment                                       | linear       |
| <code>(&amp;a)-&gt;~X()</code>                  | <code>void</code>                                                    |                                                                                  | the destructor is applied to every element of <code>a</code> ; any memory obtained is deallocated.                  | linear       |
| <code>a.begin()</code>                          | iterator;<br><code>const_iterator</code> for constant <code>a</code> |                                                                                  |                                                                                                                     | constant     |
| <code>a.end()</code>                            | iterator;<br><code>const_iterator</code> for constant <code>a</code> |                                                                                  |                                                                                                                     | constant     |

Table 81 — Container requirements (continued)

| Expression                | Return type                      | Operational semantics                                                                                     | Assertion/note pre-/post-condition                    | Complexity                                                       |
|---------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------|
| <code>a.cbegin()</code>   | <code>const_iterator</code>      | <code>const_cast&lt;X const&amp;&gt;(a).begin();</code>                                                   |                                                       | constant                                                         |
| <code>a.cend()</code>     | <code>const_iterator</code>      | <code>const_cast&lt;X const&amp;&gt;(a).end();</code>                                                     |                                                       | constant                                                         |
| <code>a == b</code>       | convertible to <code>bool</code> | <code>==</code> is an equivalence relation.<br><code>equal(a.begin(), a.end(), b.begin(), b.end())</code> | <i>Requires:</i> T is <i>Cpp17-EqualityComparable</i> | Constant if <code>a.size() != b.size()</code> , linear otherwise |
| <code>a != b</code>       | convertible to <code>bool</code> | Equivalent to <code>!(a == b)</code>                                                                      |                                                       | linear                                                           |
| <code>a.swap(b)</code>    | <code>void</code>                |                                                                                                           | exchanges the contents of a and b                     | (Note A)                                                         |
| <code>swap(a, b)</code>   | <code>void</code>                | Equivalent to <code>a.swap(b)</code>                                                                      |                                                       | (Note A)                                                         |
| <code>r = a</code>        | <code>X&amp;</code>              |                                                                                                           | <i>Ensures:</i> <code>r == a</code> .                 | linear                                                           |
| <code>a.size()</code>     | <code>size_type</code>           | <code>distance(a.begin(), a.end())</code>                                                                 |                                                       | constant                                                         |
| <code>a.max_size()</code> | <code>size_type</code>           | <code>distance(begin(), end())</code> for the largest possible container                                  |                                                       | constant                                                         |
| <code>a.empty()</code>    | convertible to <code>bool</code> | <code>a.begin() == a.end()</code>                                                                         |                                                       | constant                                                         |

Those entries marked “(Note A)” or “(Note B)” have linear complexity for `array` and have constant complexity for all other standard containers. [Note: The algorithm `equal()` is defined in [Clause 29](#). — end note]

- <sup>5</sup> The member function `size()` returns the number of elements in the container. The number of elements is defined by the rules of constructors, inserts, and erases.
- <sup>6</sup> `begin()` returns an iterator referring to the first element in the container. `end()` returns an iterator which is the past-the-end value for the container. If the container is empty, then `begin() == end()`.
- <sup>7</sup> In the expressions

```

i == j
i != j
i < j
i <= j
i >= j
i > j
i - j

```

where `i` and `j` denote objects of a container’s `iterator` type, either or both may be replaced by an object of the container’s `const_iterator` type referring to the same element with no change in semantics.

- <sup>8</sup> Unless otherwise specified, all containers defined in this clause obtain memory using an allocator (see [20.5.3.5](#)). [Note: In particular, containers and iterators do not store references to allocated elements other than through the allocator’s pointer type, i.e., as objects of type P or `pointer_traits<P>::template rebind<unspecified>`, where P is `allocator_traits<allocator_type>::pointer`. — end note] Copy constructors for these container types obtain an allocator by calling `allocator_traits<allocator_type>::select_on_container_copy_construction` on the allocator belonging to the container being copied. Move constructors obtain an allocator by move construction from the allocator belonging to the container being moved. Such move construction of the allocator shall not exit via an exception. All other constructors for these container types take a `const allocator_type&` argument. [Note: If an invocation of a

constructor uses the default value of an optional allocator argument, then the allocator type must support value-initialization. — *end note*] A copy of this allocator is used for any memory allocation and element construction performed, by these constructors and by all member functions, during the lifetime of each container object or until the allocator is replaced. The allocator may be replaced only via assignment or `swap()`. Allocator replacement is performed by copy assignment, move assignment, or swapping of the allocator only if `allocator_traits<allocator_type>::propagate_on_container_copy_assignment::value`, `allocator_traits<allocator_type>::propagate_on_container_move_assignment::value`, or `allocator_traits<allocator_type>::propagate_on_container_swap::value` is true within the implementation of the corresponding container operation. In all container types defined in this Clause, the member `get_allocator()` returns a copy of the allocator used to construct the container or, if that allocator has been replaced, a copy of the most recent replacement.

- 9 The expression `a.swap(b)`, for containers `a` and `b` of a standard container type other than `array`, shall exchange the values of `a` and `b` without invoking any move, copy, or swap operations on the individual container elements. Lvalues of any `Compare`, `Pred`, or `Hash` types belonging to `a` and `b` shall be swappable and shall be exchanged by calling `swap` as described in 20.5.3.2. If `allocator_traits<allocator_type>::propagate_on_container_swap::value` is true, then lvalues of type `allocator_type` shall be swappable and the allocators of `a` and `b` shall also be exchanged by calling `swap` as described in 20.5.3.2. Otherwise, the allocators shall not be swapped, and the behavior is undefined unless `a.get_allocator() == b.get_allocator()`. Every iterator referring to an element in one container before the swap shall refer to the same element in the other container after the swap. It is unspecified whether an iterator with value `a.end()` before the swap will have value `b.end()` after the swap.
- 10 If the iterator type of a container belongs to the bidirectional or random access iterator categories (28.2), the container is called *reversible* and satisfies the additional requirements in Table 82.

Table 82 — Reversible container requirements

| Expression                             | Return type                                                                                        | Assertion/note<br>pre-/post-condition                   | Complexity   |
|----------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------|
| <code>X::reverse_iterator</code>       | iterator type whose value type is T                                                                | <code>reverse_iterator&lt;iterator&gt;</code>           | compile time |
| <code>X::const_reverse_iterator</code> | constant iterator type whose value type is T                                                       | <code>reverse_iterator&lt;const_iterator&gt;</code>     | compile time |
| <code>a.rbegin()</code>                | <code>reverse_iterator</code> ;<br><code>const_reverse_iterator</code> for constant <code>a</code> | <code>reverse_iterator(end())</code>                    | constant     |
| <code>a.rend()</code>                  | <code>reverse_iterator</code> ;<br><code>const_reverse_iterator</code> for constant <code>a</code> | <code>reverse_iterator(begin())</code>                  | constant     |
| <code>a.crbegin()</code>               | <code>const_reverse_iterator</code>                                                                | <code>const_cast&lt;X const&amp;&gt;(a).rbegin()</code> | constant     |
| <code>a.crend()</code>                 | <code>const_reverse_iterator</code>                                                                | <code>const_cast&lt;X const&amp;&gt;(a).rend()</code>   | constant     |

- 11 Unless otherwise specified (see 27.2.6.1, 27.2.7.1, 27.3.8.4, and 27.3.11.5) all container types defined in this Clause meet the following additional requirements:
- (11.1) — if an exception is thrown by an `insert()` or `emplace()` function while inserting a single element, that function has no effects.
  - (11.2) — if an exception is thrown by a `push_back()`, `push_front()`, `emplace_back()`, or `emplace_front()` function, that function has no effects.
  - (11.3) — no `erase()`, `clear()`, `pop_back()` or `pop_front()` function throws an exception.
  - (11.4) — no copy constructor or assignment operator of a returned iterator throws an exception.
  - (11.5) — no `swap()` function throws an exception.

- (11.6) — no `swap()` function invalidates any references, pointers, or iterators referring to the elements of the containers being swapped. [Note: The `end()` iterator does not refer to any element, so it may be invalidated. — end note]
- 12 Unless otherwise specified (either explicitly or by defining a function in terms of other functions), invoking a container member function or passing a container as an argument to a library function shall not invalidate iterators to, or change the values of, objects within that container.
- 13 A *contiguous container* is a container that supports random access iterators (28.2.7) and whose member types `iterator` and `const_iterator` are contiguous iterators (28.2.1).
- 14 Table 83 lists operations that are provided for some types of containers but not others. Those containers for which the listed operations are provided shall implement the semantics described in Table 83 unless otherwise stated.

Table 83 — Optional container operations

| Expression             | Return type                      | Operational semantics                                                        | Assertion/note pre-/post-condition                                                                                 | Complexity |
|------------------------|----------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|------------|
| <code>a &lt; b</code>  | convertible to <code>bool</code> | <code>lexicographical_compare(a.begin(), a.end(), b.begin(), b.end())</code> | <i>Requires:</i> <code>&lt;</code> is defined for values of T. <code>&lt;</code> is a total ordering relationship. | linear     |
| <code>a &gt; b</code>  | convertible to <code>bool</code> | <code>b &lt; a</code>                                                        |                                                                                                                    | linear     |
| <code>a &lt;= b</code> | convertible to <code>bool</code> | <code>!(a &gt; b)</code>                                                     |                                                                                                                    | linear     |
| <code>a &gt;= b</code> | convertible to <code>bool</code> | <code>!(a &lt; b)</code>                                                     |                                                                                                                    | linear     |

[Note: The algorithm `lexicographical_compare()` is defined in Clause 29. — end note]

- 15 All of the containers defined in this Clause and in 25.3.2 except `array` meet the additional requirements of an allocator-aware container, as described in Table 84.

Given an allocator type `A` and given a container type `X` having a `value_type` identical to `T` and an `allocator_type` identical to `allocator_traits<A>::rebind_alloc<T>` and given an lvalue `m` of type `A`, a pointer `p` of type `T*`, an expression `v` of type (possibly `const`) `T`, and an rvalue `rv` of type `T`, the following terms are defined. If `X` is not allocator-aware, the terms below are defined as if `A` were `allocator<T>` — no allocator object needs to be created and user specializations of `allocator<T>` are not instantiated:

- (15.1) — `T` is *Cpp17DefaultInsertable into X* means that the following expression is well-formed:
- ```
allocator_traits<A>::construct(m, p)
```
- (15.2) — An element of `X` is *default-inserted* if it is initialized by evaluation of the expression

```
allocator_traits<A>::construct(m, p)
```

where `p` is the address of the uninitialized storage for the element allocated within `X`.

(15.3) — `T` is *Cpp17MoveInsertable into X* means that the following expression is well-formed:

```
allocator_traits<A>::construct(m, p, rv)
```

and its evaluation causes the following postcondition to hold: The value of `*p` is equivalent to the value of `rv` before the evaluation. [Note: `rv` remains a valid object. Its state is unspecified — end note]

(15.4) — `T` is *Cpp17CopyInsertable into X* means that, in addition to `T` being *Cpp17MoveInsertable into X*, the following expression is well-formed:

```
allocator_traits<A>::construct(m, p, v)
```

and its evaluation causes the following postcondition to hold: The value of `v` is unchanged and is equivalent to `*p`.

- (15.5) — T is *Cpp17EmplaceConstructible into X from args*, for zero or more arguments *args*, means that the following expression is well-formed:

```
allocator_traits<A>::construct(m, p, args)
```

- (15.6) — T is *Cpp17Erasable from X* means that the following expression is well-formed:

```
allocator_traits<A>::destroy(m, p)
```

[Note: A container calls `allocator_traits<A>::construct(m, p, args)` to construct an element at *p* using *args*, with `m == get_allocator()`. The default `construct` in `allocator` will call `::new((void*)p) T(args)`, but specialized allocators may choose a different definition. — end note]

- ¹⁶ In Table 84, *X* denotes an allocator-aware container class with a `value_type` of *T* using allocator of type *A*, *u* denotes a variable, *a* and *b* denote non-const lvalues of type *X*, *t* denotes an lvalue or a const rvalue of type *X*, *rv* denotes a non-const rvalue of type *X*, and *m* is a value of type *A*.

Table 84 — Allocator-aware container requirements

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>allocator_</code> type	<i>A</i>	<i>Requires:</i> <code>allocator_type::value_type</code> is the same as <code>X::value_type</code> .	compile time
<code>get_</code> <code>allocator()</code>	<i>A</i>		constant
<code>X()</code> <code>X u;</code>		<i>Requires:</i> <i>A</i> is <i>Cpp17DefaultConstructible</i> . <i>Ensures:</i> <code>u.empty()</code> returns <code>true</code> , <code>u.get_allocator() ==</code> <code>A()</code>	constant
<code>X(m)</code> <code>X u(m);</code>		<i>Ensures:</i> <code>u.empty()</code> returns <code>true</code> , <code>u.get_allocator() == m</code>	constant
<code>X(t, m)</code> <code>X u(t, m);</code>		<i>Requires:</i> <i>T</i> is <i>Cpp17CopyInsertable</i> into <i>X</i> . <i>Ensures:</i> <code>u == t</code> , <code>u.get_allocator() == m</code>	linear
<code>X(rv)</code> <code>X u(rv);</code>		<i>Ensures:</i> <i>u</i> shall have the same elements as <i>rv</i> had before this construction; the value of <code>u.get_allocator()</code> shall be the same as the value of <code>rv.get_allocator()</code> before this construction.	constant
<code>X(rv, m)</code> <code>X u(rv, m);</code>		<i>Requires:</i> <i>T</i> is <i>Cpp17MoveInsertable</i> into <i>X</i> . <i>Ensures:</i> <i>u</i> shall have the same elements, or copies of the elements, that <i>rv</i> had before this construction, <code>u.get_allocator() == m</code>	constant if <code>m</code> <code>== rv.get_</code> <code>allocator()</code> , otherwise linear
<code>a = t</code>	<i>X&</i>	<i>Requires:</i> <i>T</i> is <i>Cpp17CopyInsertable</i> into <i>X</i> and <i>Cpp17CopyAssignable</i> . <i>Ensures:</i> <code>a == t</code>	linear

Table 84 — Allocator-aware container requirements (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a = rv</code>	<code>X&</code>	<i>Requires:</i> If <code>allocator_traits<allocator_type>::propagate_on_container_move_assignment::value</code> is <code>false</code> , <code>T</code> is <i>Cpp17MoveInsertable</i> into <code>X</code> and <i>Cpp17MoveAssignable</i> . All existing elements of <code>a</code> are either move assigned to or destroyed. <i>Ensures:</i> <code>a</code> shall be equal to the value that <code>rv</code> had before this assignment.	linear
<code>a.swap(b)</code>	<code>void</code>	exchanges the contents of <code>a</code> and <code>b</code>	constant

17 The behavior of certain container member functions and deduction guides depends on whether types qualify as input iterators or allocators. The extent to which an implementation determines that a type cannot be an input iterator is unspecified, except that as a minimum integral types shall not qualify as input iterators. Likewise, the extent to which an implementation determines that a type cannot be an allocator is unspecified, except that as a minimum a type `A` shall not qualify as an allocator unless it satisfies both of the following conditions:

- (17.1) — The *qualified-id* `A::value_type` is valid and denotes a type (17.9.2).
- (17.2) — The expression `declval<A&>().allocate(size_t{})` is well-formed when treated as an unevaluated operand.

27.2.2 Container data races [container.requirements.dataraces]

- 1 For purposes of avoiding data races (20.5.5.9), implementations shall consider the following functions to be `const`: `begin`, `end`, `rbegin`, `rend`, `front`, `back`, `data`, `find`, `lower_bound`, `upper_bound`, `equal_range`, `at` and, except in associative or unordered associative containers, `operator[]`.
- 2 Notwithstanding 20.5.5.9, implementations are required to avoid data races when the contents of the contained object in different elements in the same container, excepting `vector<bool>`, are modified concurrently.
- 3 [Note: For a `vector<int>` `x` with a size greater than one, `x[1] = 5` and `*x.begin() = 10` can be executed concurrently without a data race, but `x[0] = 5` and `*x.begin() = 10` executed concurrently may result in a data race. As an exception to the general rule, for a `vector<bool>` `y`, `y[0] = true` may race with `y[1] = true`. — end note]

27.2.3 Sequence containers [sequence.reqmts]

- 1 A sequence container organizes a finite set of objects, all of the same type, into a strictly linear arrangement. The library provides four basic kinds of sequence containers: `vector`, `forward_list`, `list`, and `deque`. In addition, `array` is provided as a sequence container which provides limited sequence operations because it has a fixed number of elements. The library also provides container adaptors that make it easy to construct abstract data types, such as `stacks` or `queues`, out of the basic sequence container kinds (or out of other kinds of sequence containers that the user might define).
- 2 [Note: The sequence containers offer the programmer different complexity trade-offs and should be used accordingly. `vector` is the type of sequence container that should be used by default. `array` should be used when the container has a fixed size known during translation. `list` or `forward_list` should be used when there are frequent insertions and deletions from the middle of the sequence. `deque` is the data structure of choice when most insertions and deletions take place at the beginning or at the end of the sequence. When choosing a container, remember `vector` is best; leave a comment to explain if you choose from the rest! — end note]
- 3 In Tables 85 and 86, `X` denotes a sequence container class, `a` denotes a value of type `X` containing elements of type `T`, `u` denotes the name of a variable being declared, `A` denotes `X::allocator_type` if the *qualified-id*

`X::allocator_type` is valid and denotes a type (17.9.2) and `allocator<T>` if it doesn't, `i` and `j` denote iterators satisfying input iterator requirements and refer to elements implicitly convertible to `value_type`, `[i, j)` denotes a valid range, `il` designates an object of type `initializer_list<value_type>`, `n` denotes a value of type `X::size_type`, `p` denotes a valid constant iterator to `a`, `q` denotes a valid dereferenceable constant iterator to `a`, `[q1, q2)` denotes a valid range of constant iterators in `a`, `t` denotes an lvalue or a const rvalue of `X::value_type`, and `rv` denotes a non-const rvalue of `X::value_type`. `Args` denotes a template parameter pack; `args` denotes a function parameter pack with the pattern `Args&&`.

⁴ The complexities of the expressions are sequence dependent.

Table 85 — Sequence container requirements (in addition to container)

Expression	Return type	Assertion/note pre-/post-condition
<code>X(n, t)</code> <code>X u(n, t);</code>		<i>Requires:</i> <code>T</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> . <i>Ensures:</i> <code>distance(begin(), end()) == n</code> Constructs a sequence container with <code>n</code> copies of <code>t</code>
<code>X(i, j)</code> <code>X u(i, j);</code>		<i>Requires:</i> <code>T</code> shall be <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>*i</code> . For <code>vector</code> , if the iterator does not meet the <i>Cpp17ForwardIterator</i> requirements (28.2.5), <code>T</code> shall also be <i>Cpp17MoveInsertable</i> into <code>X</code> . Each iterator in the range <code>[i, j)</code> shall be dereferenced exactly once. <i>Ensures:</i> <code>distance(begin(), end()) == distance(i, j)</code> Constructs a sequence container equal to the range <code>[i, j)</code>
<code>X(il)</code>		Equivalent to <code>X(il.begin(), il.end())</code>
<code>a = il</code>	<code>X&</code>	<i>Requires:</i> <code>T</code> is <i>Cpp17CopyInsertable</i> into <code>X</code> and <i>Cpp17CopyAssignable</i> . Assigns the range <code>[il.begin(), il.end())</code> into <code>a</code> . All existing elements of <code>a</code> are either assigned to or destroyed. <i>Returns:</i> <code>*this</code> .
<code>a.emplace(p, args)</code>	iterator	<i>Requires:</i> <code>T</code> is <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>args</code> . For <code>vector</code> and <code>deque</code> , <code>T</code> is also <i>Cpp17MoveInsertable</i> into <code>X</code> and <i>Cpp17MoveAssignable</i> . <i>Effects:</i> Inserts an object of type <code>T</code> constructed with <code>std::forward<Args>(args)...</code> before <code>p</code> . [<i>Note:</i> <code>args</code> may directly or indirectly refer to a value in <code>a</code> . — end note]
<code>a.insert(p,t)</code>	iterator	<i>Requires:</i> <code>T</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> . For <code>vector</code> and <code>deque</code> , <code>T</code> shall also be <i>Cpp17CopyAssignable</i> . <i>Effects:</i> Inserts a copy of <code>t</code> before <code>p</code> .
<code>a.insert(p,rv)</code>	iterator	<i>Requires:</i> <code>T</code> shall be <i>Cpp17MoveInsertable</i> into <code>X</code> . For <code>vector</code> and <code>deque</code> , <code>T</code> shall also be <i>Cpp17MoveAssignable</i> . <i>Effects:</i> Inserts a copy of <code>rv</code> before <code>p</code> .
<code>a.insert(p,n,t)</code>	iterator	<i>Requires:</i> <code>T</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> and <i>Cpp17CopyAssignable</i> . Inserts <code>n</code> copies of <code>t</code> before <code>p</code> .

Table 85 — Sequence container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition
<code>a.insert(p, i, j)</code>	iterator	<i>Requires:</i> T shall be <i>Cpp17EmplaceConstructible</i> into X from *i. For vector and deque , T shall also be <i>Cpp17MoveInsertable</i> into X, <i>Cpp17MoveConstructible</i> , <i>Cpp17MoveAssignable</i> , and swappable (20.5.3.2). Each iterator in the range [i, j) shall be dereferenced exactly once. <i>Requires:</i> i and j are not iterators into a. Inserts copies of elements in [i, j) before p
<code>a.insert(p, il)</code>	iterator	<code>a.insert(p, il.begin(), il.end())</code> .
<code>a.erase(q)</code>	iterator	<i>Requires:</i> For vector and deque , T shall be <i>Cpp17MoveAssignable</i> . <i>Effects:</i> Erases the element pointed to by q.
<code>a.erase(q1, q2)</code>	iterator	<i>Requires:</i> For vector and deque , T shall be <i>Cpp17MoveAssignable</i> . <i>Effects:</i> Erases the elements in the range [q1, q2).
<code>a.clear()</code>	void	Destroys all elements in a. Invalidates all references, pointers, and iterators referring to the elements of a and may invalidate the past-the-end iterator. <i>Ensures:</i> <code>a.empty()</code> returns true. <i>Complexity:</i> Linear.
<code>a.assign(i, j)</code>	void	<i>Requires:</i> T shall be <i>Cpp17EmplaceConstructible</i> into X from *i and assignable from *i. For vector , if the iterator does not meet the forward iterator requirements (28.2.5), T shall also be <i>Cpp17MoveInsertable</i> into X. Each iterator in the range [i, j) shall be dereferenced exactly once. <i>Requires:</i> i, j are not iterators into a. Replaces elements in a with a copy of [i, j). Invalidates all references, pointers and iterators referring to the elements of a. For vector and deque , also invalidates the past-the-end iterator.
<code>a.assign(il)</code>	void	<code>a.assign(il.begin(), il.end())</code> .
<code>a.assign(n, t)</code>	void	<i>Requires:</i> T shall be <i>Cpp17CopyInsertable</i> into X and <i>Cpp17CopyAssignable</i> . <i>Requires:</i> t is not a reference into a. Replaces elements in a with n copies of t. Invalidates all references, pointers and iterators referring to the elements of a. For vector and deque , also invalidates the past-the-end iterator.

⁵ The iterator returned from `a.insert(p, t)` points to the copy of t inserted into a.

⁶ The iterator returned from `a.insert(p, rv)` points to the copy of rv inserted into a.

- 7 The iterator returned from `a.insert(p, n, t)` points to the copy of the first element inserted into `a`, or `p` if `n == 0`.
- 8 The iterator returned from `a.insert(p, i, j)` points to the copy of the first element inserted into `a`, or `p` if `i == j`.
- 9 The iterator returned from `a.insert(p, il)` points to the copy of the first element inserted into `a`, or `p` if `il` is empty.
- 10 The iterator returned from `a.emplace(p, args)` points to the new element constructed from `args` into `a`.
- 11 The iterator returned from `a.erase(q)` points to the element immediately following `q` prior to the element being erased. If no such element exists, `a.end()` is returned.
- 12 The iterator returned by `a.erase(q1, q2)` points to the element pointed to by `q2` prior to any elements being erased. If no such element exists, `a.end()` is returned.
- 13 For every sequence container defined in this Clause and in [Clause 25](#):
- (13.1) — If the constructor
- ```
template<class InputIterator>
 X(InputIterator first, InputIterator last,
 const allocator_type& alloc = allocator_type());
```
- is called with a type `InputIterator` that does not qualify as an input iterator, then the constructor shall not participate in overload resolution.
- (13.2) — If the member functions of the forms:
- ```
template<class InputIterator>
  return-type F(const_iterator p,
                InputIterator first, InputIterator last);           // such as insert

template<class InputIterator>
  return-type F(InputIterator first, InputIterator last);           /// such as append, assign

template<class InputIterator>
  return-type F(const_iterator i1, const_iterator i2,
                InputIterator first, InputIterator last);           // such as replace
```
- are called with a type `InputIterator` that does not qualify as an input iterator, then these functions shall not participate in overload resolution.
- (13.3) — A deduction guide for a sequence container shall not participate in overload resolution if it has an `InputIterator` template parameter and a type that does not qualify as an input iterator is deduced for that parameter, or if it has an `Allocator` template parameter and a type that does not qualify as an allocator is deduced for that parameter.
- 14 Table 86 lists operations that are provided for some types of sequence containers but not others. An implementation shall provide these operations for all container types shown in the “container” column, and shall implement them so as to take amortized constant time.

Table 86 — Optional sequence container operations

Expression	Return type	Operational semantics	Container
<code>a.front()</code>	reference; <code>const_reference</code> for constant <code>a</code>	<code>*a.begin()</code>	<code>basic_string</code> , <code>array</code> , <code>deque</code> , <code>forward_list</code> , <code>list</code> , <code>vector</code>
<code>a.back()</code>	reference; <code>const_reference</code> for constant <code>a</code>	{ <code>auto tmp = a.end();</code> <code>--tmp;</code> <code>return *tmp; }</code>	<code>basic_string</code> , <code>array</code> , <code>deque</code> , <code>list</code> , <code>vector</code>

Table 86 — Optional sequence container operations (continued)

Expression	Return type	Operational semantics	Container
<code>a.emplace_front(args)</code>	reference	Prepends an object of type <code>T</code> constructed with <code>std::forward<Args>(args)...</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>args</code> . <i>Returns:</i> <code>a.front()</code> .	deque, forward_list, list
<code>a.emplace_back(args)</code>	reference	Appends an object of type <code>T</code> constructed with <code>std::forward<Args>(args)...</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>args</code> . For vector, <code>T</code> shall also be <i>Cpp17MoveInsertable</i> into <code>X</code> . <i>Returns:</i> <code>a.back()</code> .	deque, list, vector
<code>a.push_front(t)</code>	void	Prepends a copy of <code>t</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> .	deque, forward_list, list
<code>a.push_front(rv)</code>	void	Prepends a copy of <code>rv</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17MoveInsertable</i> into <code>X</code> .	deque, forward_list, list
<code>a.push_back(t)</code>	void	Appends a copy of <code>t</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> .	basic_string, deque, list, vector
<code>a.push_back(rv)</code>	void	Appends a copy of <code>rv</code> . <i>Requires:</i> <code>T</code> shall be <i>Cpp17MoveInsertable</i> into <code>X</code> .	basic_string, deque, list, vector
<code>a.pop_front()</code>	void	Destroys the first element. <i>Requires:</i> <code>a.empty()</code> shall be <code>false</code> .	deque, forward_list, list
<code>a.pop_back()</code>	void	Destroys the last element. <i>Requires:</i> <code>a.empty()</code> shall be <code>false</code> .	basic_string, deque, list, vector
<code>a[n]</code>	reference; const_reference for constant <code>a</code>	<code>*(a.begin() + n)</code>	basic_string, array, deque, vector
<code>a.at(n)</code>	reference; const_reference for constant <code>a</code>	<code>*(a.begin() + n)</code>	basic_string, array, deque, vector

¹⁵ The member function `at()` provides bounds-checked access to container elements. `at()` throws `out_of_range` if `n >= a.size()`.

27.2.4 Node handles

[container.node]

27.2.4.1 Overview

[container.node.overview]

- ¹ A *node handle* is an object that accepts ownership of a single element from an associative container (27.2.6) or an unordered associative container (27.2.7). It may be used to transfer that ownership to another container with compatible nodes. Containers with compatible nodes have the same node handle type. Elements may be transferred in either direction between container types in the same row of Table 87.
- ² If a node handle is not empty, then it contains an allocator that is equal to the allocator of the container when the element was extracted. If a node handle is empty, it contains no allocator.

Table 87 — Container types with compatible nodes

map<K, T, C1, A>	map<K, T, C2, A>
map<K, T, C1, A>	multimap<K, T, C2, A>
set<K, C1, A>	set<K, C2, A>
set<K, C1, A>	multiset<K, C2, A>
unordered_map<K, T, H1, E1, A>	unordered_map<K, T, H2, E2, A>
unordered_map<K, T, H1, E1, A>	unordered_multimap<K, T, H2, E2, A>
unordered_set<K, H1, E1, A>	unordered_set<K, H2, E2, A>
unordered_set<K, H1, E1, A>	unordered_multiset<K, H2, E2, A>

- 3 Class *node_handle* is for exposition only. An implementation is permitted to provide equivalent functionality without providing a class with this name.
- 4 If a user-defined specialization of *pair* exists for *pair*<const Key, T> or *pair*<Key, T>, where Key is the container's *key_type* and T is the container's *mapped_type*, the behavior of operations involving node handles is undefined.

```

template<unspecified>
class node_handle {
public:
    // These type declarations are described in Tables 88 and 89.
    using value_type      = see below;      // not present for map containers
    using key_type        = see below;      // not present for set containers
    using mapped_type     = see below;      // not present for set containers
    using allocator_type  = see below;

private:
    using container_node_type = unspecified;
    using ator_traits = allocator_traits<allocator_type>;

    typename ator_traits::rebind_traits<container_node_type>::pointer ptr_;
    optional<allocator_type> alloc_;

public:
    // 27.2.4.2, constructors, copy, and assignment
    constexpr node_handle() noexcept : ptr_(), alloc_() {}
    node_handle(node_handle&&) noexcept;
    node_handle& operator=(node_handle&&);

    // 27.2.4.3, destructor
    ~node_handle();

    // 27.2.4.4, observers
    value_type& value() const;           // not present for map containers
    key_type& key() const;              // not present for set containers
    mapped_type& mapped() const;        // not present for set containers

    allocator_type get_allocator() const;
    explicit operator bool() const noexcept;
    [[nodiscard]] bool empty() const noexcept;

    // 27.2.4.5, modifiers
    void swap(node_handle&)
        noexcept(ator_traits::propagate_on_container_swap::value ||
                 ator_traits::is_always_equal::value);

    friend void swap(node_handle& x, node_handle& y) noexcept(noexcept(x.swap(y))) {
        x.swap(y);
    }
};

```

27.2.4.2 Constructors, copy, and assignment

[container.node.cons]

```
node_handle(node_handle&& nh) noexcept;
```

1 *Effects:* Constructs a *node_handle* object initializing *ptr_* with *nh.ptr_*. Move constructs *alloc_* with *nh.alloc_*. Assigns *nullptr* to *nh.ptr_* and assigns *nullopt* to *nh.alloc_*.

```
node_handle& operator=(node_handle&& nh);
```

2 *Requires:* Either *!alloc_*, or *ator_traits::propagate_on_container_move_assignment* is true, or *alloc_ == nh.alloc_*.

3 *Effects:*

(3.1) — If *ptr_ != nullptr*, destroys the *value_type* subobject in the *container_node_type* object pointed to by *ptr_* by calling *ator_traits::destroy*, then deallocates *ptr_* by calling *ator_traits::rebind_traits<container_node_type>::deallocate*.

(3.2) — Assigns *nh.ptr_* to *ptr_*.

(3.3) — If *!alloc_* or *ator_traits::propagate_on_container_move_assignment* is true, move assigns *nh.alloc_* to *alloc_*.

(3.4) — Assigns *nullptr* to *nh.ptr_* and assigns *nullopt* to *nh.alloc_*.

4 *Returns:* **this*.

5 *Throws:* Nothing.

27.2.4.3 Destructor

[container.node.dtor]

```
~node_handle();
```

1 *Effects:* If *ptr_ != nullptr*, destroys the *value_type* subobject in the *container_node_type* object pointed to by *ptr_* by calling *ator_traits::destroy*, then deallocates *ptr_* by calling *ator_traits::rebind_traits<container_node_type>::deallocate*.

27.2.4.4 Observers

[container.node.observers]

```
value_type& value() const;
```

1 *Requires:* *empty() == false*.

2 *Returns:* A reference to the *value_type* subobject in the *container_node_type* object pointed to by *ptr_*.

3 *Throws:* Nothing.

```
key_type& key() const;
```

4 *Requires:* *empty() == false*.

5 *Returns:* A non-const reference to the *key_type* member of the *value_type* subobject in the *container_node_type* object pointed to by *ptr_*.

6 *Throws:* Nothing.

7 *Remarks:* Modifying the key through the returned reference is permitted.

```
mapped_type& mapped() const;
```

8 *Requires:* *empty() == false*.

9 *Returns:* A reference to the *mapped_type* member of the *value_type* subobject in the *container_node_type* object pointed to by *ptr_*.

10 *Throws:* Nothing.

```
allocator_type get_allocator() const;
```

11 *Requires:* *empty() == false*.

12 *Returns:* **alloc_*.

13 *Throws:* Nothing.

explicit operator bool() const noexcept;

14 Returns: ptr_ != nullptr.

[[nodiscard]] bool empty() const noexcept;

15 Returns: ptr_ == nullptr.

27.2.4.5 Modifiers

[container.node.modifiers]

```
void swap(node_handle& nh)
    noexcept(ator_traits::propagate_on_container_swap::value ||
             ator_traits::is_always_equal::value);
```

1 Requires: !alloc_, or !nh.alloc_, or ator_traits::propagate_on_container_swap is true, or alloc_ == nh.alloc_.

2 Effects: Calls swap(ptr_, nh.ptr_). If !alloc_, or !nh.alloc_, or ator_traits::propagate_on_container_swap is true calls swap(alloc_, nh.alloc_).

27.2.5 Insert return type

[container.insert.return]

1 The associative containers with unique keys and the unordered containers with unique keys have a member function `insert` that returns a nested type `insert_return_type`. That return type is a specialization of the type specified in this subclass.

```
template<class Iterator, class NodeType>
struct INSERT_RETURN_TYPE
{
    Iterator position;
    bool inserted;
    NodeType node;
};
```

2 The name `INSERT_RETURN_TYPE` is exposition only. `NSINSERT_RETURN_TYPE` has the template parameters, data members, and special members specified above. It has no base classes or members other than those specified.

27.2.6 Associative containers

[associative.reqmts]

27.2.6 Associative containers

[associative.reqmts]

1 Associative containers provide fast retrieval of data based on keys. The library provides four basic kinds of associative containers: `set`, `multiset`, `map` and `multimap`.

2 Each associative container is parameterized on `Key` and an ordering relation `Compare` that induces a strict

2 Each associative container is parameterized on `Key` and an ordering relation `Compare` that induces a strict weak ordering (29.7) on elements of `Key`. In addition, `map` and `multimap` associate an arbitrary *mapped type* `T` with the `Key`. The object of type `Compare` is called the *comparison object* of a container.

3 The phrase “equivalence of keys” means the equivalence relation imposed by the comparison object. That

3 The phrase “equivalence of keys” means the equivalence relation imposed by the comparison object. That is, two keys `k1` and `k2` are considered to be equivalent if for the comparison object `comp`, `comp(k1, k2) == false` && `comp(k2, k1) == false`. [Notes: This is not necessarily the same as the result of `k1 == k2`. — end note].

4 For any two keys `k1` and `k2` in the same container, calling `comp(k1, k2)` shall always return the same value.

4 An associative container supports *unique keys* if it may contain at most one element for each key. Otherwise, it supports *equivalent keys*. The `set` and `map` classes support unique keys; the `multiset` and `multimap` classes support equivalent keys.

5 For `set` and `multiset` the value type is the same as the key type. For `map` and `multimap` it is equal to

5 For `set` and `multiset` the value type is the same as the key type. For `map` and `multimap` it is equal to `pair<const Key, T>`.

6 iterator of an associative container is of the bidirectional iterator category. For associative containers

6 iterator of an associative container is of the bidirectional iterator category. For associative containers where the value type is the same as the key type, both `iterator` and `const_iterator` are constant iterators.

It is unspecified whether or not `iterator` and `const_iterator` are the same type. [Note: `iterator` and `const_iterator` have identical semantics in this case, and `iterator` is convertible to `const_iterator`.

Users can avoid violating the one-definition rule by always using `const_iterator` in their function parameter lists. — end note]

7 The associative containers meet all the requirements of Allocator-aware containers (27.2.1), except that

7 The associative containers meet all the requirements of Allocator-aware containers (27.2.1), except that for `map` and `multimap`, the requirements placed on value type in Table 8 apply instead to key type

and `mapped_type` [Note: For example, in some cases, `key_type` and `mapped_type` are required to be `Cpp17CopyAssignable` even though the associated `value_type`, `pair<const key_type, mapped_type>`, is not `Cpp17CopyAssignable`. — end note]

8 In Table 88, `X` denotes an associative container class, `a1` denotes a value of type `X`, `a2` denotes a value of a type with nodes compatible with type `X` (Table 87), `cb` denotes a possibly `const` value of type `X`, `key` denotes the name of a variable being declared, `pair` denotes a value of type `X` when `X` supports unique keys, `pair_eq` denotes a value of type `X` when `X` supports multiple keys, `ia`, `itrans` denotes a possibly `const` value of type `X` when the qualified-id `X::is_transparent` is valid and denotes a type (17.9.2), `i` and `j` satisfy input iterator requirements and refer to elements implicitly convertible to `value_type`, `[int j)` denotes a valid range, `p` denotes a valid constant iterator to `a`, `q` denotes a valid dereferenceable constant iterator to `a`, `r` denotes a valid dereferenceable iterator to `a`, `[q1, q2)` denotes a valid range of constant iterators in `a`, `il` designates an object of type `initializer_list<value_type>`, `c` denotes a value of type `X::value_type`, `k` denotes a value of type `X::key_type` and `c` denotes a possibly `const` value of type `X::key_compare`; `k1` is a value such that `a` is partitioned (29.7) with respect to `c(c(r, k1), k)`, with `r` the key value of `e` and `e` in `a`; `k2` is a value such that `a` is partitioned with respect to `c(c(k2, X(r)), k)` implying `!(c(k2, r) < k)` and `!(c(k2, r) > k)` and `al` denotes the storage allocator used by `X`, if any, or `allocator<X::value_type>` otherwise, `m` denotes an allocator of a type convertible to `A`, and `nh` denotes a non-const rvalue of type `X::node_type`.

Table 88 — Associative container requirements (in addition to Table 88) — Associative container requirements (in addition to container)

Expression	Return type	Assertion/note	Complexity
Expression	Return type	Assertion/note	Complexity
<code>X::key_type</code>	Key	pre-/post-condition	compile time
<code>X::key_type</code>	Key		compile time
<code>X::mapped_type</code> and <code>typename map</code> and <code>multimap</code>	T		compile time
<code>only_value_</code>	Key	<i>Requires: value_type is</i>	compile time
<code>X::value_</code> <code>typename set</code> and <code>multiset</code>	Key	<i>Requires: value_type is</i> <i>Cpp17Erasable</i> from <code>X</code>	compile time
<code>only_value_</code>	<code>pair<const</code>	<i>Requires: value_type is</i>	compile time
<code>X::value_</code> <code>typename map</code> and <code>multimap</code>	<code>pair<const</code> Key, T>	<i>Requires: value_type is</i> <i>Cpp17Erasable</i> from <code>X</code>	compile time
<code>only_key_</code>	Compare	<i>Requires: key_compare is</i>	compile time
<code>key_</code>	Compare	<i>Requires: key_compare is</i>	compile time
<code>compare_</code>	a binary	<i>Cpp17CopyConstructible</i> for	compile time
<code>X::value_</code> compare	arbitrary type predicate type	is the same as <code>key_compare</code> for <code>set</code> and <code>multiset</code> ; is an ordering relation on pairson (induced by the first component (i.e., <code>Key</code>)) for <code>map</code> and <code>multimap</code> .	compile time
<code>X::node_</code>	a specialization	see 27.2.4	compile time
<code>X::node_</code> type	a specialization of <code>node_handle</code> , <code>node_handle</code> , class template, such that the public nested types are the same types as the responding corresponding		
<code>X(c)</code>	types in <code>X</code> .	<i>Effects: Constructs an empty</i>	constant
<code>X u(c);</code>		container. Uses a copy of <code>c</code> as a comparison object.	

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X(c)</code> <code>X u(c);</code>		<i>Effects:</i> Constructs an empty container. Uses a copy of <code>c</code> as a comparison object.	constant
<code>X()</code> <code>X u;</code>		<i>Requires:</i> <code>key_compare</code> is as <code>Cpp17DefaultConstructible</code> .	constant
<code>X(i, j, c)</code> <code>X u(i, j, c);</code>		<i>Effects:</i> Constructs an empty container. Uses <code>Compare()</code> as a comparison object.	$N \log N$ in general, where N has the value <code>distance(i, j)</code> ; linear if $[i, j)$ is sorted
<code>X(i, j, c)</code> <code>X u(i, j, c);</code>		<i>Requires:</i> <code>value_type</code> is empty <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*i</code> . $[i, j)$ into it; <i>Effects:</i> Constructs an empty container and inserts elements from the range $[i, j)$ into it; uses <code>c</code> as a comparison object.	$N \log N$ in general, where N has the value <code>distance(i, j)</code> ; linear if $[i, j)$ is sorted with <code>value_comp()</code>
<code>X(i, j)</code> <code>X u(i, j);</code>		<i>Requires:</i> <code>key_compare</code> is as above, but <code>value_type</code> is as above, but <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*i</code> .	same as above
<code>X(il)</code>		<i>Effects:</i> Same as above, but uses <code>Compare()</code> as a comparison object.	same as <code>X(il.begin(), il.end())</code>
<code>X(il, c)</code>		same as <code>X(il.begin(), il.end(), c)</code> .	same as <code>X(il.begin(), il.end(), c)</code>
<code>X(il)</code> <code>a = il</code>	<code>X&</code>	<i>Requires:</i> <code>value_type</code> is <code>Cpp17CopyAssignable</code> .	same as <code>X(il.begin(), il.end())</code> in general, where N has the value <code>il.size()</code>
<code>X(il, c)</code> <code>a = il</code>	<code>X&</code>	<i>Requires:</i> <code>value_type</code> is <code>Cpp17CopyInsertable</code> into <code>X</code> and <code>Cpp17CopyAssignable</code> . <i>Effects:</i> Assigns the range $[il.begin(), il.end())$ into <code>a</code> .	$N \log N$ in general, where N has the value <code>il.size() + a.size()</code> ; linear if $[il.begin(), il.end())$ is sorted with <code>value_comp()</code>
<code>b.key_comp()</code>	<code>X::key_compare</code>	All existing elements of <code>a</code> are either assigned to or destroyed.	constant
<code>b.value_comp()</code>	<code>X::value_compare</code>	returns the comparison object out of which <code>b</code> was constructed.	constant
<code>b.key_comp()</code> <code>b.value_comp()</code>	<code>X::key_compare</code> <code>X::value_compare</code>	returns an object of type shall be <code>value_compare</code> constructed out of the comparison object	constant
		<i>Effects:</i> Inserts a <code>value_type</code> object <code>t</code> constructed with <code>std::forward<Args>(args)...</code> if and only if there is no element in the container with key equivalent to the key of <code>t</code> . The <code>bool</code> component of the returned pair is <code>true</code> if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>t</code> .	

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a_uniq. emplace(args)</code>	<code>pair<T, iterator, bool></code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17EmplaceConstructible</i> into X from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object <code>t</code> constructed with <code>std::forward<Args>(args)...</code> if and only if there is no element in the container with key equivalent to the key of <code>t</code> . The <code>bool</code> component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>t</code> ...	logarithmic
<code>a.emplace_ hint(p, args)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17EmplaceConstructible</i> into X from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object <code>t</code> constructed with <code>std::forward<Args>(args)...</code> and returns the iterator pointing to the newly inserted element. If a range containing elements equivalent to <code>t</code> exists in <code>a</code> , <code>t</code> is inserted at the end of that range if no element in the range is equivalent to <code>t</code> .	logarithmic in general, but amortized constant if the element is inserted right
<code>a_eq. emplace(args)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17EmplaceConstructible</i> into X from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object <code>t</code> constructed with <code>std::forward<Args>(args)...</code> and returns the iterator pointing to the newly inserted element. If a range containing elements equivalent to <code>t</code> exists in <code>a</code> , <code>t</code> is inserted at the end of that range if no element in the range is equivalent to <code>t</code> .	logarithmic
<code>a_uniq. insert(t)</code>	<code>pair< iterator, bool></code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into X. If a range containing elements equivalent to <code>t</code> exists in <code>a</code> , <code>t</code> is inserted at the end of that range if no element in the range is equivalent to <code>t</code> .	logarithmic
<code>a.emplace_ hint(p, args)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into X. Return value is an iterator pointing to the element with the key equivalent to the newly inserted element. The element is inserted as close as possible to the position just before <code>p</code> .	logarithmic in general, but amortized constant if the element is inserted right before <code>p</code>
<code>a_eq. insert(t)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into X. Return value is an iterator pointing to the element with the key equivalent to the newly inserted element. The element is inserted as close as possible to the position just before <code>p</code> .	logarithmic
<code>a_uniq. insert(t)</code>	<code>pair< iterator, bool></code>	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17MoveInsertable</i> into X; be otherwise <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into X. <i>Effects:</i> Inserts <code>t</code> if and only if there is no element in the container with key equivalent to the key of <code>t</code> . The <code>bool_eq</code> component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>t</code> .	logarithmic

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a_eqsert(p, insert(t))</code>	iterator	<i>Requires:</i> If <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <i>Cpp17MoveInsertable</i> into <code>X</code> ; otherwise, <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> and returns the iterator pointing to the newly inserted element. If a range containing elements equivalent to <code>t</code> exists in <code>a_eq</code> , <code>t</code> is inserted at the end of that range; the iterator pointing to	logarithmic in general, but amortized constant if <code>t</code> is inserted right before <code>p</code> .
<code>a.insert(p, t)</code>	iterator	<i>Requires:</i> If <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <i>Cpp17MoveInsertable</i> into <code>X</code> ; otherwise, <code>value_type</code> shall be <i>Cpp17CopyInsertable</i> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> if and only if there is no element with key equivalent to the key of <code>t</code> in <code>a</code> ; always inserts <code>t</code> in containers with equivalent keys; Always returns the iterator pointing to the element with key equivalent to the key of <code>t</code> ; <code>t</code> is inserted as close as possible to the position just prior to <code>p</code> .	logarithmic in general, but amortized constant if <code>t</code> is inserted right before <code>p</code> .
<code>a.insert(i, j)</code>	void	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>*i</code> . <i>Effects:</i> Inserts <code>t</code> if and only if there is no element with key equivalent to the key of <code>t</code> in <code>a</code> ; always inserts that element in containers with equivalent keys <code>sh.key()</code> .	$N \log(a.size() + N)$, where N has the value <code>distance(i, j)</code>
<code>a.insert(i, j)</code>	void	<i>Requires:</i> <code>value_type</code> shall be <i>Cpp17EmplaceConstructible</i> into <code>X</code> from <code>*i</code> . <i>Effects:</i> Inserts <code>t</code> if and only if there is no element with key equivalent to the key of <code>t</code> in <code>a</code> ; always inserts that element in containers with equivalent keys <code>sh.key()</code> .	$N \log(a.size() + N)$, where N has the value <code>distance(i, j)</code>
<code>a_uniq.insert(nh)</code>	insert_return_type	<i>Requires:</i> <code>nh</code> is not iterators into <code>a</code> ; inserts each element from the range <code>[i, j)</code> if and only if there is no element with key equivalent to the key of that element in containers with unique keys; always inserts that element in containers with equivalent keys <code>sh.key()</code> .	logarithmic
<code>a.insert(il)</code>	void	Equivalent to <code>h</code> is empty, <code>insert(il, begin(), position, il.end())</code> and <code>node</code> is empty. Otherwise if the insertion took place, <code>inserted</code> is true, <code>position</code> points to the inserted element, and <code>node</code> is empty; if the insertion failed, <code>inserted</code> is false, <code>node</code> has the previous value of <code>nh</code> , and <code>position</code> points to an element with a key equivalent to <code>nh.key()</code> .	

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a_uniq.insert(nh)</code>	<code>insertor</code> <code>return_type</code>	<i>Requires:</i> <code>nh</code> is empty or <code>a_uniq.get_allocator() == nh.get_allocator()</code> . <i>Effects:</i> If <code>nh</code> is empty, has no effect. Otherwise, inserts <code>nh</code> . Element owned by <code>nh</code> if and only if there is no element in the container with a key newly equivalent to <code>nh.key()</code> . <i>Ensures:</i> If <code>nh</code> is empty, <code>inserted</code> is <code>false</code> , <code>position</code> is <code>end()</code> , and <code>node</code> is empty. Otherwise if the insertion took place, <code>inserted</code> is <code>true</code> , <code>position</code> points to the inserted element, and <code>node</code> is not empty; if the insertion failed, <code>inserted</code> is <code>false</code> , <code>node</code> has no value, and <code>position</code> points to an element with a key equivalent to <code>nh.key()</code> .	logarithmic
<code>a.insert(p, nh)</code>	<code>iterator</code>	<i>Requires:</i> <code>nh</code> is empty or <code>a.get_allocator() == nh.get_allocator()</code> . <i>Effects:</i> If <code>nh</code> is empty, has no effect and returns <code>a.end()</code> . Otherwise, inserts the element owned by <code>nh</code> and returns an iterator pointing to the newly inserted element. If a range to containing elements with keys equivalent to <code>nh.key()</code> exists in <code>a</code> , the element is inserted at the end of that range.	logarithmic in general, but amortized constant if the element is inserted right before <code>p</code> .
<code>a_eq.insert(nh)</code>	<code>iterator</code>	<i>Requires:</i> <code>nh</code> is empty or <code>a_eq.get_allocator() == nh.get_allocator()</code> . <i>Effects:</i> If <code>nh</code> is empty, has no effect and returns <code>a_eq.end()</code> . Otherwise, inserts the element owned by <code>nh</code> and returns an iterator pointing to the newly inserted element. If a range to containing elements with keys equivalent to <code>nh.key()</code> exists in <code>a_eq</code> , the element is inserted at the end of that range.	logarithmic
<code>a.extract(k)</code>	<code>node_type</code>	<i>Ensures:</i> <code>nh</code> is empty. Removes the element in the container with key equivalent to <code>k</code> . Returns a <code>node_type</code> owning the element if found, otherwise an empty <code>node_type</code> .	<code>log(a.size())</code>
<code>a.extract(q)</code>	<code>node_type</code>	removes the element pointed to by <code>q</code> . Returns a <code>node_type</code> owning that element.	amortized constant

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.insert(p, nh)</code>	iterator	<i>Requires:</i> <code>nh</code> is empty or <code>a.get_allocator() == nh.get_allocator()</code> . <i>Effects:</i> If <code>a</code> is empty, has no effect and returns <code>a.end()</code> . Otherwise, inserts the element owned by <code>nh</code> if and only if in <code>a</code> there is no element with key equivalent to <code>nh.key()</code> (in containers with unique keys; always inserts the element owned by <code>nh</code> in containers with equivalent keys). Always returns the iterator pointing to the element with key equivalent to <code>nh.key()</code> . The element is inserted as close as possible to the position just prior to <code>p</code> . <i>Ensures:</i> <code>nh</code> is empty if insertion succeeds, unchanged if insertion fails unless the	logarithmic in general, but amortized constant if the element is inserted right before <code>p</code> .
<code>a.extract(k)</code>	node_type	removes the first element in the container with key equivalent to <code>k</code> . Returns a node_type owning the element if found, otherwise an empty	$\log(a.size())$
<code>k.erase(k)</code>	size_type	Removes the element with key equivalent to <code>k</code> . Returns a node_type owning the element if found, otherwise an empty	$\log(a.size()) + a.count(k)$
<code>a.erase(q)</code>	iterator	node_type element pointed to by <code>q</code> . Returns a node_type owning that element if <code>q</code> prior	amortized constant
<code>a.extract(q)</code>	node_type	removes the element pointed to by <code>q</code> . Returns a node_type owning that element if <code>q</code> prior	amortized constant
<code>a.merge(a2)</code>	void	<i>Requires:</i> <code>a.get_allocator() == a2.get_allocator()</code> . Attempts to extract each element in <code>a2</code> and insert it into <code>a</code> using the comparison object of <code>a</code> . In containers with unique keys, if there is an element in <code>a</code> with key equivalent to the key of an element from <code>a2</code> , then that element is not extracted	$N \log(a.size() + N)$, where N has the value <code>a2.size()</code> .
<code>a.erase(r)</code>	iterator	from <code>a2</code> all the elements in <code>a</code> . <i>Ensures:</i> Pointers and references to the transferred elements of <code>a2</code> refer to those same elements, but as members of <code>a</code> . Iterators referring to the transferred elements will continue to refer to their elements, but they now behave as iterators into <code>a</code> , (not into <code>a2</code>). <i>Throws:</i> Nothing unless the comparison object throws.	amortized constant
<code>a.erase(q1, q2)</code>	iterator	from <code>a2</code> all the elements in <code>a</code> . <i>Ensures:</i> Pointers and references to the transferred elements of <code>a2</code> refer to those same elements, but as members of <code>a</code> . Iterators referring to the transferred elements will continue to refer to their elements, but they now behave as iterators into <code>a</code> , (not into <code>a2</code>). <i>Throws:</i> Nothing unless the comparison object throws.	$\log(a.size()) + N$, where N has the value <code>distance(q1, q2)</code> .
<code>a.clear()</code>	void	continues to refer to their elements, but they now behave as iterators into <code>a</code> , (not into <code>a2</code>). <i>Throws:</i> Nothing unless the comparison object throws.	linear in <code>a.size()</code> .

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.erase(k)</code>	<code>size_type</code> <code>const_</code> <code>iterator</code> for constant <code>b</code> .	erases all elements in the container with key equivalent to <code>k</code> ; returns the number of erased elements. is not found	$\log(a.size()) + a.count(k)$
<code>a.erase(q)</code> <code>find(ke)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>a_tran</code> .	erases the element pointed to by <code>q</code> ; Returns an iterator pointing to the element (<code>ke</code> , immediately following <code>q</code> , prior to the element being erased. If	amortized constant
<code>b.count(k)</code>	<code>size_type</code>	no such element exists, returns <code>a.end()</code> . equivalent to <code>k</code>	$\log(b.size()) + b.count(k)$
<code>a.erase(r)</code> <code>count(ke)</code>	<code>iterator</code> <code>size_type</code>	erases the element pointed to by <code>r</code> ; Returns an iterator, pointing to the element immediately following <code>r</code> prior to the element being erased. If	amortized constant) + <code>a_tran.count(ke)</code>
<code>b.contains(k)</code>	<code>bool</code>	no such element exists, returns <code>a.end()</code>	logarithmic
<code>a_tran.con-</code>	<code>bool</code>	no such element exists, returns <code>a.end()</code>	logarithmic
<code>a.erase(q1, q2)</code>	<code>iterator</code>	erases all the elements in the range <code>[q1, q2)</code> ; Returns an iterator pointing to the element pointed to by <code>q2</code> prior to any elements being erased. If no	$\log(a.size()) + N$, where N has the value <code>distance(q1, q2)</code> .
<code>a_tran.lower_</code> <code>bound(k)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	such element exists, <code>a.end()</code> is returned	logarithmic
<code>a.clear()</code>	<code>void</code>	<code>a.erase(a.begin(), a.end())</code> if such an <code>Ensures: a.empty()</code> returns	linear in <code>a.size()</code> .
<code>b.upper_</code> <code>bound(k)</code>	<code>iterator</code> ; <code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	returns an iterator pointing to the first element with key greater than <code>k</code> , or <code>b.end()</code> if such an element is not found	logarithmic
<code>a_tran.find(k)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	returns an iterator pointing to an element with the key equivalent to <code>k</code> , or <code>b.end()</code> if such an element is not found	logarithmic
<code>a_tran.lower_</code> <code>find(ke)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>a_tran</code> .	returns an iterator pointing to an element with key <code>r</code> such that <code>!c(r, ke) && !c(ke, r)</code> or <code>a_tran.end()</code> if such an element is not found	logarithmic
<code>b.equal_</code> <code>bound(k)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	returns the number of elements with key equivalent to <code>k</code>	logarithmic
<code>a_tran.count(ke)</code>	<code>size_type</code> <code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	returns the number of elements with key <code>r</code> such that <code>!c(r, ke) && !c(ke, r)</code>	$\log(a_tran.size()) + a_tran.count(ke)$
<code>b.contains(k)</code>	<code>bool</code>	equivalent to <code>b.find(k) != b.end()</code>	logarithmic
<code>a_tran.con-</code> <code>tains(ke)</code>	<code>bool</code>	equivalent to <code>a_tran.find(ke) != a_tran.end()</code>	logarithmic
<code>b.lower_</code> <code>bound(k)</code>	<code>iterator</code> ; <code>const_</code> <code>iterator</code> for constant <code>b</code> .	returns an iterator pointing to the first element with key not less than <code>k</code> , or <code>b.end()</code> if such an element is not found.	logarithmic

Table 88 — Associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a_tran.lower_bound(k)</code>	<code>iterator;</code> <code>const_iterator;</code> <code>iterator></code> for <code>const_iterator;</code> <code>const_iterator;</code> <code>const_iterator;</code> <code>constant b.</code>	returns an iterator pointing to the first element with key <code>r</code> such that <code>!c(r, b.k)</code> (or <code>a_tran.end()</code> if such an element is not found).	logarithmic
<code>b.upper_bound(k)</code>	<code>iterator;</code> <code>const_iterator></code> for <code>iterator</code> for <code>constant b.</code>	returns an iterator pointing to the first element with key greater than <code>k</code> , or <code>b.end()</code> if such an element is not found.	logarithmic
<code>a_tran.upper_bound(k)</code>	<code>iterator;</code> <code>const_iterator;</code> <code>iterator</code> for <code>constant</code>	returns an iterator pointing to the first element with key <code>r</code> such that <code>c(k, r)</code> , or <code>a_tran.end()</code> if such an element is not found.	logarithmic
<code>b.equal_range(k)</code>	<code>pair<iterator, iterator></code> <code>pair<const_iterator, const_iterator></code> <code>pair<iterator, iterator></code> <code>pair<const_iterator, const_iterator></code> <code>constant b.</code>	equivalent to <code>make_pair(b.lower_bound(k), b.upper_bound(k))</code> .	logarithmic
<code>a_tran.equal_range(k)</code>	<code>pair<const_iterator, const_iterator></code> <code>pair<const_iterator, const_iterator></code> <code>constant b.</code>	equivalent to <code>make_pair(a_tran.lower_bound(k), a_tran.upper_bound(k))</code> .	logarithmic

9 The `insert` and `emplace` members shall not affect the validity of iterators and references to the container, and the `erase` members shall invalidate only iterators and references to the erased elements.

10 The `extract` members invalidate only the removed element; pointers and references to the removed element remain valid. However, accessing the element through such pointers and references while the element is owned by a `node_type` is undefined behavior. References and pointers to an element obtained while it is owned by a `node_type` are invalidated if the element is successfully inserted.

11 The fundamental property of iterators of associative containers is that they iterate through the containers in the non-descending order of keys where non-descending is defined by the comparison that was used to construct them. For any two dereferenceable iterators `i` and `j` such that distance from `i` to `j` is positive, the following condition holds:

<code>value_comp(*j, *i) == false</code>	<code>pair<iterator, iterator></code> <code>pair<const_iterator, const_iterator></code> <code>constant b.</code>	equivalent to <code>make_pair(a_tran.lower_bound(ke), a_tran.upper_bound(ke))</code> .	logarithmic
--	--	--	-------------

12 For associative containers with unique keys, the stronger condition holds:

<code>value_comp(*i, *j) == false</code>	<code>pair<const_iterator, const_iterator></code> <code>pair<const_iterator, const_iterator></code> <code>constant b.</code> <code>a_tran.</code>		
--	--	--	--

13 When an associative container is constructed by passing a comparison object the container shall not store a pointer or reference to the passed object, even if that object is passed by reference. When an associative container is copied, either through a copy constructor or an assignment operator, the target container shall then use the comparison object from the container being copied, as if that comparison object had been passed to the target container in its constructor.

14 The member function templates `find`, `count`, `contains`, `lower_bound`, `upper_bound`, and `equal_range` shall not participate in overload resolution unless the `qualified-id Compare::is_transparent` is valid and denotes a type (17.3.2).

9 The `insert` and `emplace` members shall not affect the validity of iterators and references to the container, and the `erase` members shall invalidate only iterators and references to the erased elements.

15 A deduction guide for an associative container shall not participate in overload resolution if any of the following are true:

(15.1) It has an `InputIterator` template parameter and a type that does not qualify as an input iterator is deduced for that parameter.

(15.2) It has an `Allocator` template parameter and a type that does not qualify as an allocator is deduced for that parameter.

(15.3) It has a `Compare` template parameter that qualifies as an allocator is deduced for that parameter.

12 For associative containers with unique keys the stronger condition holds:
`value_comp(*i, *j) != false` by the container's `Compare` object (if any).

13 When an associative container is constructed by passing a comparison object the container shall not store a pointer or reference to the passed object, even if that object is passed by reference. When an associative container is copied, either through a copy constructor or an assignment operator, the target container shall then use the comparison object from the container being copied, as if that comparison object had been passed to the target container in its constructor.

14 ~~The member function `find` of `unordered_map` shall not participate in overload resolution unless the `qualified-id` `Compare` is transparent and denotes a type (17.9.2).~~
 1 unordered associative containers provide an ability for fast retrieval of data based on keys. The worst-case complexity for most operations is linear, but the average case is much faster. The library provides four

15 ~~An deduction guide for an associative container shall not participate in overload resolution if any of the following are true:~~

(15.1) ~~Unordered associative containers shall not participate in overload resolution if any of the following are true:~~
 (15.1.1) ~~It has an `InputIterator` template parameter and a type that does not qualify as an input iterator is a `==` deduced for that parameter semantics than for the other container types.~~

(15.2) ~~Each unordered associative container shall have an `Allocator` template parameter and a type that does not qualify as an allocator is deduced for that parameter (20.5.3.4) and acts as a hash function for argument values of type `Key`, and by a binary predicate `Pred` that induces an equivalence relation on values of type `Key`. Additionally, `unordered_map`~~

(15.3) ~~It has a `Compare` template parameter and a type that qualifies as an allocator is deduced for that parameter. `unordered_multimap` associate an arbitrary `mapped type T` with the `Key`.~~

4 The container's object of type `Hash` — denoted by `hash` — is called the *hash function* of the container. The **27.2.6.1. Exception safety guarantees** [associative reqmts, except]

1 For associative containers, no `clear()` function throws an exception. `erase(k)` does not throw an exception unless that exception is thrown by the container's `Compare` object (if any).

2 For associative containers; if an exception is thrown by any operation from within an `insert` or `emplace` function inserting a single element, the insertion has no effect. — *end note* For any two keys `k1`

3 and `k2` in the same container, calling `pred(k1, k2)` shall always return the same value. For any key `k` in a container, calling `hash(k)` shall always return the same value.

6 An unordered associative container supports *unique keys* if it may contain at most one element for each **27.2.7. Unordered associative containers** [unord req]

1 unordered associative containers provide an ability for fast retrieval of data based on keys. The worst-case complexity for most operations is linear, but the average case is much faster. The library provides four

2 unordered associative containers: `unordered_set`, `unordered_map`, `unordered_multiset`, and `unordered_multimap`.

3 Unordered associative containers conform to the requirements for Containers (27.2), except that the expressions `a == b` and `a != b` have different semantics than for the other container types.

7 For `unordered_set` and `unordered_multiset` the value type is the same as the key type. For `unordered_map`

3 and `unordered_multimap` it is `pair<const Key, T>`. Each unordered associative container is parameterized by `Key`, by a function object type `Hash` that meets the *Cpp11Hash* requirements (20.5.3.4) and acts as a hash function for argument values of type `Key`, and by a

8 binary predicate `Pred` that induces an equivalence relation on values of type `Key`. Additionally, `unordered_map` and `unordered_multimap` associate an arbitrary *mapped type T* with the `Key`. `const_iterator` are the same

4 type. [Note: `iterator` and `const_iterator` have identical semantics in this case, and `iterator` is convertible to `const_iterator`. Users can avoid violating the one-definition rule by always using `const_iterator` in their function parameter lists. — *end note*]

5 Two values `k1` and `k2` of type `Key` are considered equivalent if the container's key equality predicate returns

9 true when passed those values. If `k1` and `k2` are equivalent, the container's hash function shall return the same value for both. [Note: Thus, when an unordered associative container is instantiated with a non-default

10 `Pred` parameter it usually needs a non-default `Hash` parameter as well. — *end note*] For any two keys `k1` and `k2` in the same container, calling `pred(k1, k2)` shall always return the same value. For any key `k` in a container, calling `hash(k)` shall always return the same value.

6 An unordered associative container supports *unique keys* if it may contain at most one element for each

10 key. Otherwise, it supports *equivalent keys*. `unordered_set` and `unordered_map` support unique keys. `unordered_multiset` and `unordered_multimap` support equivalent keys. In containers that support equivalent

11 keys, elements with equivalent keys are adjacent to each other in the iteration order of the container. Thus, although the absolute order of elements in an unordered container is not specified, its elements are

grouped into *equivalent-key groups* such that all elements of each group have equivalent keys. Mutating operations on unordered containers shall preserve the relative order of elements within each equivalent-key

7 group unless otherwise specified. [Note: For example, `key_type` and `mapped_type` are sometimes required to be *Cpp11CopyAssignable* even though the associated value type `pair<const key_type, mapped_type>` is not *Cpp11CopyAssignable*. — *end note*]

8 For `unordered_set` and `unordered_multiset` the value type is the same as the key type. For `unordered_map`

7 and `unordered_multimap` it is `pair<const Key, T>`. Each unordered associative container is parameterized by `Key`, by a function object type `Hash` that meets the *Cpp11Hash* requirements (20.5.3.4) and acts as a hash function for argument values of type `Key`, and by a

8 binary predicate `Pred` that induces an equivalence relation on values of type `Key`. Additionally, `unordered_map` and `unordered_multimap` associate an arbitrary *mapped type T* with the `Key`. `const_iterator` are the same

Expression	Return type	Assertion/note pre- /post-condition	Complexity
<code>X::key_type</code>	Key		compile time
<code>X::local_iterator</code>	An iterator type whose category, value type, difference type, and pointer and reference types are the same as <code>X::iterator</code> 's.	A <code>local_iterator</code> object may be used to iterate through a single bucket, but may not be used to iterate across buckets.	compile time
<code>X::mapped_type</code> (<code>unordered_map</code> and <code>unordered_multimap</code> only)	T		compile time
<code>X::value_type</code> (<code>unordered_set</code> and <code>unordered_multiset</code> only)	Key	<i>Requires:</i> <code>value_type</code> is <code>Cpp17Erasable</code> from X	compile time
<code>X::const_local_iterator</code>	An iterator type whose category, value type, difference type, and pointer and reference types are the same as <code>X::const_iterator</code> 's.	A <code>const_local_iterator</code> object may be used to iterate through a single bucket, but may not be used to iterate across buckets.	compile time
<code>X::value_type</code> (<code>unordered_map</code> and <code>unordered_multimap</code> only)	<code>pair<const Key, T></code>	<i>Requires:</i> <code>value_type</code> is <code>Cpp17Erasable</code> from X	compile time
<code>X::node_type</code>	a specialization of a <code>node_handle</code> class template, such that the public nested types are the same types as the corresponding types in X.	see 27.2.4	compile time
<code>X::hasher</code>	<code>Hash</code>	<code>Hash</code> shall be a unary function object type such that the expression <code>hf(k)</code> has type <code>size_t</code> .	compile time
<code>X::key_equal</code>	<code>Pred</code>	<i>Requires:</i> <code>Pred</code> is <code>Cpp17CopyConstructible</code> . <code>Pred</code> shall be a binary predicate that takes two arguments of type <code>Key</code> . <code>Pred</code> is an equivalence relation.	compile time
<code>X(n, hf, eq)</code> <code>X a(n, hf, eq);</code>	X	<i>Effects:</i> Constructs an empty container with at least n buckets, using <code>hf</code> as the hash function and <code>eq</code> as the key equality predicate.	$O(n)$
<code>X::local_iterator</code>	An iterator type whose category, value type, difference type, and pointer and reference types are the same as <code>X::iterator</code> 's.	A <code>local_iterator</code> object may be used to iterate through a single bucket, but may not be used to iterate across buckets.	compile time

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X(n, const_local_iterator, hf);</code>	An iterator type whose category, value type, difference type, and pointer and reference types are the same as <code>X::const_iterator</code> 's.	A <code>const_local_iterator</code> object may be used to iterate through a single bucket, but may not be used to iterate across buckets. <code>hf</code> as the hash function and <code>key_equal()</code> as the key equality predicate.	compile time
<code>X::node_type</code>	a specialization of a <code>node_handle</code> class	see 27.2.4	compile time
<code>X(n)</code> <code>X a(n);</code>	template, such that the public nested types are the same types as the corresponding types in <code>X</code> .	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> .	$\mathcal{O}(n)$
<code>X(n, hf, eq)</code> <code>X a(n, hf, eq);</code>	<code>X</code>	<i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hasher()</code> as the hash function and <code>eq</code> as the key equality predicate.	$\mathcal{O}(n)$
<code>X()</code> <code>X a;</code>	<code>X</code>	<i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hf</code> as the hash function and <code>eq</code> as the key equality predicate.	constant
<code>X(n, hf)</code> <code>X a(n, hf);</code>	<code>X</code>	<i>Requires:</i> <code>key_equal</code> is empty <code>Cpp17DefaultConstructible</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hf</code> as the hash function and <code>key_equal()</code> as the key equality predicate.	$\mathcal{O}(n)$
<code>X(i, j, n, hf, eq)</code>	<code>X</code>	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> .	Average case
<code>X(n, i, j, n, hf, eq)</code> <code>X a(n);</code>	<code>X</code>	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> hash buckets, using <code>hasher()</code> as the hash function and <code>key_equal()</code> as the key equality predicate.	$\mathcal{O}(n)$ (N is distance(<code>i</code> , <code>j</code>)), worst case $\mathcal{O}(N^2)$
<code>X(), j, n, hf)</code> <code>X a(i, j, n, hf);</code>	<code>X</code>	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hasher()</code> as the hash function, and <code>key_equal()</code> as the key equality predicate.	constant $\mathcal{O}(N)$ (N is distance(<code>i</code> , <code>j</code>)), worst case $\mathcal{O}(N^2)$
<code>X(i, j, n, hf, eq)</code> <code>X a(i, j, n, hf, eq);</code>	<code>X</code>	<i>Requires:</i> <code>value_type</code> is <code>Cpp17EmplaceConstructible</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hf</code> as the hash function and <code>eq</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is distance(<code>i</code> , <code>j</code>)), worst case $\mathcal{O}(N^2)$

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X(i, j, n, hf)</code> <code>X a(i, j, n, hf);</code>	X	<i>Requires:</i> <code>key_equal</code> is <code>Cpp16DefaultConstructible</code> . <i>value_type</i> is <code>Cpp16EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hf</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts <code>n</code> elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is <code>distance(i, j)</code>), worst case $\mathcal{O}(N^2)$
<code>X(i, j, n)</code> <code>X a(i, j, n);</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is <code>distance(i, j)</code>), worst case $\mathcal{O}(N^2)$
<code>X(i, j)</code> <code>X a(i, j);</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is <code>distance(i, j)</code>), worst case $\mathcal{O}(N^2)$
<code>X(i, j)</code> <code>X a(i, j);</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with at least <code>n</code> buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is <code>distance(i, j)</code>), worst case $\mathcal{O}(N^2)$
<code>X(il)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Average case $\mathcal{O}(N)$ (N is <code>distance(i, j)</code>), worst case $\mathcal{O}(N^2)$
<code>X(il, n)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as <code>X(il.begin(), il.end(), n)</code> .
<code>X(il, n, hf)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hf</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as <code>X(il.begin(), il.end(), n, hf)</code> .
<code>X(il, n, hf, eq)</code> <code>X(il)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hf</code> as the hash function and <code>eq</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as <code>X(il.begin(), il.end(), n, hf, eq)</code> .
<code>X(il, n)</code> <code>X a(b);</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hasher</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as case <code>X(il.begin(), il.end(), n)</code> .
<code>X(il, n, hf)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hf</code> as the hash function and <code>key_equal</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as case <code>X(il.begin(), il.end(), n, hf)</code> .
<code>a = b</code>	X&	Copy assignment operator. In addition to the requirements of <code>key_equal</code> .	Same as <code>a</code> .
<code>X(il, n, hf, eq)</code>	X	<i>Requires:</i> <code>hasher</code> and <code>key_equal</code> are <code>Cpp17DefaultConstructible</code> . <i>value_type</i> is <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>*T</code> . <i>Effects:</i> Constructs an empty container with an unspecified number of buckets, using <code>hf</code> as the hash function and <code>eq</code> as the key equality predicate, and inserts elements from <code>[i, j)</code> into it.	Same as <code>X(il.begin(), il.end(), n, hf, eq)</code> .

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>X(b) il</code> <code>X a(b);</code>	<code>X&</code>	Copy constructor. In addition to the requirements of Table 81 and Table 81b copies the hash function, predicate, and maximum load factor <code>begin(), il.end()</code> into <code>a</code> .	Average case linear in <code>b.size()</code> , worst case quadratic.
<code>a = b</code>	<code>X&</code>	Assignment operator. In addition to the requirements of Table 81b copies the hash function, predicate, and maximum load factor.	Average case linear in <code>b.size()</code> , worst case quadratic.
<code>b.hash_function()</code>	<code>hasher</code>	Returns <code>b</code> 's hash function.	constant
<code>b.key_eq()</code>	<code>key_equal</code>	Returns <code>b</code> 's key equality predicate.	constant
<code>a.emplace(args)</code>	<code>X&ir<iterator, bool></code>	<i>Requires:</i> <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> and <code>Cpp17CopyAssignable</code> . <i>Effects:</i> Assigns the range <code>[il.begin(), il.end())</code> into <code>a</code> . All existing elements of <code>a</code> are either assigned to or destroyed.	Same as <code>a.emplace(il)</code> . worst case $\mathcal{O}(a_uniq.size())$.
<code>b.hash_function()</code>	<code>hasher</code>	Returns <code>b</code> 's hash function.	constant
<code>b.key_eq()</code>	<code>key_equal</code>	Returns <code>b</code> 's key equality predicate.	constant
<code>a.emplace(args)</code>	<code>pair<iterator, bool></code>	<i>Requires:</i> <code>value_type</code> shall be <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object into <code>a</code> constructed with <code>args</code> .	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_uniq.size())$.
<code>a.emplace(args)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object into <code>a</code> constructed with <code>args</code> . If there is no element in the container with key equivalent to the key of <code>args</code> , the <code>bool</code> component of the returned pair is true and the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>args</code> . Otherwise, the <code>bool</code> component of the returned pair is false and the insertion does not take place.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
<code>a.emplace_hint(p, args)</code>	<code>iterator</code>	Points to the element with key equivalent to the key of <code>args</code> . If there is no element in the container with key equivalent to the key of <code>args</code> , the <code>bool</code> component of the returned pair is true and the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>args</code> . Otherwise, the <code>bool</code> component of the returned pair is false and the insertion does not take place.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
<code>a.emplace(args)</code>	<code>iterator</code>	<i>Requires:</i> <code>value_type</code> shall be <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>args</code> . <i>Effects:</i> Inserts a <code>value_type</code> object into <code>a</code> constructed with <code>args</code> . If there is no element in the container with key equivalent to the key of <code>args</code> , the <code>bool</code> component of the returned pair is true and the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of <code>args</code> . Otherwise, the <code>bool</code> component of the returned pair is false and the insertion does not take place.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
		pointing to where the search should start. Implementations are permitted to ignore the hint.	

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.emplace_hint(p, args)</code>	<code>iterator</code> , <code>bool</code> >	<i>Requires:</i> <code>value_type</code> shall be <code>Cpp17EmplaceConstructible</code> into <code>X</code> from <code>Args</code> ; <code>Insertable</code> into <code>X</code> ; <i>Effects:</i> Equivalent to <code>emplace(const&forward<Args>(args), rts...)</code> . If <code>return</code> value is an iterator pointing to the element with the key equivalent to the newly inserted element. The <code>const_iterator</code> <code>p</code> is a hint pointing to where the search should start. Implementations are permitted to ignore the hint.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size() + q.size())$.
<code>a_uniq.insert(t)</code>	<code>pair<iterator, bool></code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> ; <i>Effects:</i> Inserts <code>t</code> if and only if there is no element in the container with key equivalent to the key of <code>t</code> . The <code>bool</code> component of the returned pair indicates whether the insertion takes place, and the <code>iterator</code> component points to the element with key equivalent to the key of <code>Cpp17CopyInsertable</code> into <code>X</code> .	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.uniq.size())$.
<code>a_eq.insert(t)</code>	<code>iterator</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> , and returns an iterator pointing to the newly inserted element. Implementations are permitted	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
<code>a.insert(p, t)</code>	<code>iterator</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> , and returns an iterator pointing to the newly inserted element. Implementations are permitted	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a_eq.insert(t)</code>	<code>iterator</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> , and returns an iterator pointing to the newly inserted element. Implementations are permitted	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
<code>a.insert(p, t)</code>	<code>iterator</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Inserts <code>t</code> , and returns an iterator pointing to the newly inserted element. Implementations are permitted	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.insert(i, j)</code>	<code>void</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Equivalent to <code>a.insert(t)</code> . Return value is an iterator pointing to the element with the key equivalent to that of <code>t</code> . The iterator <code>p</code> is a hint pointing to where the search should start. Implementations are permitted to ignore the hint.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size() + N)$ is <code>distance(i, j)</code> . Worst case $\mathcal{O}(N(a.size() + 1))$.
<code>a.insert(il)</code>	<code>void</code>	<i>Requires:</i> <code>Eq</code> if <code>t</code> is a non-const rvalue, <code>value_type</code> shall be <code>Cpp17MoveInsertable</code> into <code>X</code> ; otherwise, <code>value_type</code> shall be <code>Cpp17CopyInsertable</code> into <code>X</code> . <i>Effects:</i> Equivalent to <code>a.insert(t)</code> . Return value is an iterator pointing to the element with the key equivalent to that of <code>t</code> . The iterator <code>p</code> is a hint pointing to where the search should start. Implementations are permitted to ignore the hint.	Same as <code>a.insert(il.begin(), il.end())</code> .

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.insert(i, j)</code> <code>insert(nh)</code>	<code>void</code> <code>return_type</code>	<i>Requires:</i> <code>value_type</code> shall be <code>Copyable</code> , <code>EmplaceConstructible</code> into <code>X</code> from <code>*allocator()</code> . <i>Requires:</i> If <code>i</code> and <code>j</code> are not iterators, inserts the element <code>t</code> for each element in <code>[i, j)</code> with a key equivalent to <code>nh.key()</code> . <i>Effects:</i> Equivalent to <code>a.insert(t)</code> for each element in <code>[i, j)</code> .	Average case $\mathcal{O}(N)$, where N is <code>distance(i, j)</code> . Worst case $\mathcal{O}(N(a.size() + 1))$.
<code>a.insert(il)</code>	<code>void</code>	Same as <code>a.insert(il.begin(), il.end())</code> . If <code>nh</code> is empty, <code>inserted</code> is false, <code>position</code> is <code>end()</code> , and <code>node</code> is empty.	Same as <code>a.insert(il.begin(), il.end())</code> .
<code>a_uniq.insert(nh)</code>	<code>insert_return_type</code>	<i>Requires:</i> <code>nh</code> is empty or took <code>a_uniq.get_allocator() == nh.get_allocator()</code> . The inserted element, if any, is owned by <code>nh</code> if and only if there is no element in the container with a key equivalent to <code>nh.key()</code> . <i>Effects:</i> If <code>nh</code> is empty, has no effect. Otherwise, inserts the element owned by <code>nh</code> if and only if there is no element in the container with a key equivalent to <code>nh.key()</code> .	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_uniq.size())$.
<code>a_eq.insert(nh)</code>	<code>iterator</code>	<i>Ensures:</i> If <code>nh</code> is empty, <code>inserted</code> is false, <code>position</code> is <code>end()</code> , and <code>node</code> is empty. Otherwise, if the insertion took place, <code>inserted</code> is true, <code>end()</code> points to the inserted element, and <code>node</code> is empty; if the insertion failed, <code>inserted</code> is false, <code>node</code> has the previous value of <code>nh</code> , and <code>position</code> points to an element with a key equivalent to <code>nh.key()</code> .	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.
<code>a_eq.insert(nh)</code>	<code>iterator</code>	<i>Requires:</i> <code>nh</code> is empty or <code>a_eq.get_allocator() == nh.get_allocator()</code> . <i>Effects:</i> If <code>nh</code> is empty, has no effect and returns <code>a_eq.end()</code> . Otherwise, inserts the element owned by <code>nh</code> and returns an iterator pointing to the newly inserted element. <i>Ensures:</i> <code>nh</code> is empty.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a_eq.size())$.

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.insert(q, nh)</code>	iterator	<p><i>Requires:</i> <code>nh</code> is empty or <code>a.get_allocator() == nh.get_allocator()</code>.</p> <p><i>Effects:</i> If <code>nh</code> is empty, has no effect and returns <code>a.end()</code>. Otherwise, inserts the element owned by <code>nh</code> if and only if there is no element with key equivalent to <code>nh.key()</code> in containers with unique keys; always inserts the element owned by <code>nh</code> in containers with equivalent keys. Always returns the iterator pointing to the element with key equivalent to <code>nh.key()</code>. The iterator <code>q</code> is a hint pointing to where the search should start.</p> <p>Implementations are permitted to ignore the hint.</p> <p><i>Ensures:</i> <code>nh</code> is empty if insertion succeeds, unchanged if insertion fails.</p>	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.extract(k)</code>	node_type	Removes an element in the container with key equivalent to <code>k</code> . Returns a <code>node_type</code> owning the element if found, otherwise an empty <code>node_type</code> .	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.extract(q)</code>	node_type	Removes the element pointed to by <code>q</code> . Returns a <code>node_type</code> owning that element.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.merge(a2)</code>	void	<p><i>Requires:</i> <code>a.get_allocator() == a2.get_allocator()</code>.</p> <p>Attempts to extract each element in <code>a2</code> and insert it into <code>a</code> using the hash function and key equality predicate of <code>a</code>. In containers with unique keys, if there is an element in <code>a</code> with key equivalent to the key of an element from <code>a2</code>, then that element is not extracted from <code>a2</code>.</p> <p><i>Ensures:</i> Pointers and references to the transferred elements of <code>a2</code> refer to those same elements but as members of <code>a</code>. Iterators referring to the transferred elements and all iterators referring to <code>a</code> will be invalidated, but iterators to elements remaining in <code>a2</code> will remain valid.</p>	Average case $\mathcal{O}(N)$, where N is <code>a2.size()</code> . Worst case $\mathcal{O}(N*a.size() + N)$.

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>a.erase(k)</code>	<code>size_type</code>	Erases all elements with key equivalent to <code>k</code> . Returns the number of elements erased.	Average case $\mathcal{O}(a.count(k))$. Worst case $\mathcal{O}(a.size())$.
<code>a.erase(q)</code>	<code>iterator</code>	Erases the element pointed to by <code>q</code> . Returns the iterator immediately following <code>q</code> prior to the erasure.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.erase(r)</code>	<code>iterator</code>	Erases the element pointed to by <code>r</code> . Returns the iterator immediately following <code>r</code> prior to the erasure.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(a.size())$.
<code>a.erase(q1, q2)</code>	<code>iterator</code>	Erases all elements in the range <code>[q1, q2)</code> . Returns the iterator immediately following the erased elements prior to the erasure.	Average case linear in <code>distance(q1, q2)</code> , worst case $\mathcal{O}(a.size())$.
<code>a.clear()</code>	<code>void</code>	Erases all elements in the container. <i>Ensures</i> : <code>a.empty()</code> returns <code>true</code>	Linear in <code>a.size()</code> .
<code>b.find(k)</code>	<code>iterator</code> ; <code>const_iterator</code> for <code>const b</code> .	Returns an iterator pointing to an element with key equivalent to <code>k</code> , or <code>b.end()</code> if no such element exists.	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(b.size())$.
<code>b.count(k)</code>	<code>size_type</code>	Returns the number of elements with key equivalent to <code>k</code> .	Average case $\mathcal{O}(b.count(k))$, worst case $\mathcal{O}(b.size())$.
<code>b.contains(k)</code>	<code>bool</code>	Equivalent to <code>b.find(k) != b.end()</code>	Average case $\mathcal{O}(1)$, worst case $\mathcal{O}(b.size())$.
<code>b.equal_range(k)</code>	<code>pair<iterator, iterator></code> ; <code>pair<const_iterator, const_iterator></code> for <code>const b</code> .	Returns a range containing all elements with keys equivalent to <code>k</code> . Returns <code>make_pair(b.end(), b.end())</code> if no such elements exist.	Average case $\mathcal{O}(b.count(k))$. Worst case $\mathcal{O}(b.size())$.
<code>b.bucket_count()</code>	<code>size_type</code>	Returns the number of buckets that <code>b</code> contains.	Constant
<code>b.max_bucket_count()</code>	<code>size_type</code>	Returns an upper bound on the number of buckets that <code>b</code> might ever contain.	Constant
<code>b.bucket(k)</code>	<code>size_type</code>	<i>Requires</i> : <code>b.bucket_count() > 0</code> . Returns the index of the bucket in which elements with keys equivalent to <code>k</code> would be found, if any such element existed. <i>Ensures</i> : the return value shall be in the range <code>[0, b.bucket_count())</code> .	Constant

Table 89 — Unordered associative container requirements (in addition to container) (continued)

Expression	Return type	Assertion/note pre-/post-condition	Complexity
<code>b.bucket_size(n)</code>	<code>size_type</code>	<i>Requires:</i> <code>n</code> shall be in the range $[0, b.bucket_count())$. Returns the number of elements in the n^{th} bucket.	$\mathcal{O}(b.bucket_size(n))$
<code>b.begin(n)</code>	<code>local_iterator;</code> <code>const_local_iterator</code> for <code>const b.</code>	<i>Requires:</i> <code>n</code> shall be in the range $[0, b.bucket_count())$. <code>b.begin(n)</code> returns an iterator referring to the first element in the bucket. If the bucket is empty, then <code>b.begin(n) == b.end(n)</code> .	Constant
<code>b.end(n)</code>	<code>local_iterator;</code> <code>const_local_iterator</code> for <code>const b.</code>	<i>Requires:</i> <code>n</code> shall be in the range $[0, b.bucket_count())$. <code>b.end(n)</code> returns an iterator which is the past-the-end value for the bucket.	Constant
<code>b.cbegin(n)</code>	<code>const_local_iterator</code>	<i>Requires:</i> <code>n</code> shall be in the range $[0, b.bucket_count())$. <code>b.cbegin(n)</code> returns an iterator referring to the first element in the bucket. If the bucket is empty, then <code>b.cbegin(n) == b.cend(n)</code> .	Constant
<code>b.cend(n)</code>	<code>const_local_iterator</code>	<i>Requires:</i> <code>n</code> shall be in the range $[0, b.bucket_count())$. <code>b.cend(n)</code> returns an iterator which is the past-the-end value for the bucket.	Constant
<code>b.load_factor()</code>	<code>float</code>	Returns the average number of elements per bucket.	Constant
<code>b.max_load_factor()</code>	<code>float</code>	Returns a positive number that the container attempts to keep the load factor less than or equal to. The container automatically increases the number of buckets as necessary to keep the load factor below this number.	Constant
<code>a.max_load_factor(z)</code>	<code>void</code>	<i>Requires:</i> <code>z</code> shall be positive. May change the container's maximum load factor, using <code>z</code> as a hint.	Constant
<code>a.rehash(n)</code>	<code>void</code>	<i>Ensures:</i> <code>a.bucket_count() >= a.size() / a.max_load_factor()</code> and <code>a.bucket_count() >= n</code> .	Average case linear in <code>a.size()</code> , worst case quadratic.
<code>a.reserve(n)</code>	<code>void</code>	Same as <code>a.rehash(ceil(n / a.max_load_factor()))</code> .	Average case linear in <code>a.size()</code> , worst case quadratic.

- 12 Two unordered containers `a` and `b` compare equal if `a.size() == b.size()` and, for every equivalent-key group `[Ea1, Ea2)` obtained from `a.equal_range(Ea1)`, there exists an equivalent-key group `[Eb1, Eb2)` obtained from `b.equal_range(Ea1)`, such that `is_permutation(Ea1, Ea2, Eb1, Eb2)` returns `true`. For `unordered_set` and `unordered_map`, the complexity of `operator==` (i.e., the number of calls to the `==` operator of the `value_type`, to the predicate returned by `key_eq()`, and to the hasher returned by `hash_function()`) is proportional to N in the average case and to N^2 in the worst case, where N is `a.size()`. For `unordered_multiset` and `unordered_multimap`, the complexity of `operator==` is proportional to $\sum E_i^2$ in the average case and to N^2 in the worst case, where N is `a.size()`, and E_i is the size of the i^{th} equivalent-key group in `a`. However, if the respective elements of each corresponding pair of equivalent-key groups Ea_i and Eb_i are arranged in the same order (as is commonly the case, e.g., if `a` and `b` are unmodified copies of the same container), then the average-case complexity for `unordered_multiset` and `unordered_multimap` becomes proportional to N (but worst-case complexity remains $\mathcal{O}(N^2)$, e.g., for a pathologically bad hash function). The behavior of a program that uses `operator==` or `operator!=` on unordered containers is undefined unless the `Pred` function object has the same behavior for both containers and the equality comparison function for `Key` is a refinement²⁵⁹ of the partition into equivalent-key groups produced by `Pred`.
- 13 The iterator types `iterator` and `const_iterator` of an unordered associative container are of at least the forward iterator category. For unordered associative containers where the key type and value type are the same, both `iterator` and `const_iterator` are constant iterators.
- 14 The `insert` and `emplace` members shall not affect the validity of references to container elements, but may invalidate all iterators to the container. The `erase` members shall invalidate only iterators and references to the erased elements, and preserve the relative order of the elements that are not erased.
- 15 The `insert` and `emplace` members shall not affect the validity of iterators if $(N+n) \leq z * B$, where N is the number of elements in the container prior to the insert operation, n is the number of elements inserted, B is the container's bucket count, and z is the container's maximum load factor.
- 16 The `extract` members invalidate only iterators to the removed element, and preserve the relative order of the elements that are not erased; pointers and references to the removed element remain valid. However, accessing the element through such pointers and references while the element is owned by a `node_type` is undefined behavior. References and pointers to an element obtained while it is owned by a `node_type` are invalidated if the element is successfully inserted.
- 17 A deduction guide for an unordered associative container shall not participate in overload resolution if any of the following are true:
- (17.1) — It has an `InputIterator` template parameter and a type that does not qualify as an input iterator is deduced for that parameter.
 - (17.2) — It has an `Allocator` template parameter and a type that does not qualify as an allocator is deduced for that parameter.
 - (17.3) — It has a `Hash` template parameter and an integral type or a type that qualifies as an allocator is deduced for that parameter.
 - (17.4) — It has a `Pred` template parameter and a type that qualifies as an allocator is deduced for that parameter.

27.2.7.1 Exception safety guarantees

[unord.req.except]

- 1 For unordered associative containers, no `clear()` function throws an exception. `erase(k)` does not throw an exception unless that exception is thrown by the container's `Hash` or `Pred` object (if any).
- 2 For unordered associative containers, if an exception is thrown by any operation other than the container's hash function from within an `insert` or `emplace` function inserting a single element, the insertion has no effect.
- 3 For unordered associative containers, no `swap` function throws an exception unless that exception is thrown by the swap of the container's `Hash` or `Pred` object (if any).
- 4 For unordered associative containers, if an exception is thrown from within a `rehash()` function other than by the container's hash function or comparison function, the `rehash()` function has no effect.

²⁵⁹) Equality comparison is a refinement of partitioning if no two objects that compare equal fall into different partitions.

27.3 Sequence containers

[sequences]

27.3.1 In general

[sequences.general]

- ¹ The headers `<array>`, `<deque>`, `<forward_list>`, `<list>`, and `<vector>` define class templates that meet the requirements for sequence containers.
- ² The following exposition-only alias template may appear in deduction guides for sequence containers:

```
template<class InputIterator>
    using iter-value-type = typename iterator_traits<InputIterator>::value_type; // exposition only
```

27.3.2 Header `<array>` synopsis

[array.syn]

```
#include <initializer_list>

namespace std {
    // 27.3.7, class template array
    template<class T, size_t N> struct array;

    template<class T, size_t N>
        constexpr bool operator==(const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        constexpr bool operator!=(const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        constexpr bool operator< (const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        constexpr bool operator> (const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        constexpr bool operator<=(const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        constexpr bool operator>=(const array<T, N>& x, const array<T, N>& y);
    template<class T, size_t N>
        void swap(array<T, N>& x, array<T, N>& y) noexcept(noexcept(x.swap(y)));

    template<class T> class tuple_size;
    template<size_t I, class T> class tuple_element;
    template<class T, size_t N>
        struct tuple_size<array<T, N>>;
    template<size_t I, class T, size_t N>
        struct tuple_element<I, array<T, N>>;
    template<size_t I, class T, size_t N>
        constexpr T& get(array<T, N>&) noexcept;
    template<size_t I, class T, size_t N>
        constexpr T&& get(array<T, N>&&) noexcept;
    template<size_t I, class T, size_t N>
        constexpr const T& get(const array<T, N>&) noexcept;
    template<size_t I, class T, size_t N>
        constexpr const T&& get(const array<T, N>&&) noexcept;
}

```

27.3.3 Header `<deque>` synopsis

[deque.syn]

```
#include <initializer_list>

namespace std {
    // 27.3.8, class template deque
    template<class T, class Allocator = allocator<T>> class deque;

    template<class T, class Allocator>
        bool operator==(const deque<T, Allocator>& x, const deque<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator!=(const deque<T, Allocator>& x, const deque<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator< (const deque<T, Allocator>& x, const deque<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator> (const deque<T, Allocator>& x, const deque<T, Allocator>& y);
}

```

```

template<class T, class Allocator>
    bool operator<=(const deque<T, Allocator>& x, const deque<T, Allocator>& y);
template<class T, class Allocator>
    bool operator>=(const deque<T, Allocator>& x, const deque<T, Allocator>& y);

template<class T, class Allocator>
    void swap(deque<T, Allocator>& x, deque<T, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class T>
        using deque = std::deque<T, polymorphic_allocator<T>>;
}
}

```

27.3.4 Header <forward_list> synopsis

[forward_list.syn]

```

#include <initializer_list>

namespace std {
    // 27.3.9, class template forward_list
    template<class T, class Allocator = allocator<T>> class forward_list;

    template<class T, class Allocator>
        bool operator==(const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator!=(const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator< (const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator> (const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator<=(const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator>=(const forward_list<T, Allocator>& x, const forward_list<T, Allocator>& y);

    template<class T, class Allocator>
        void swap(forward_list<T, Allocator>& x, forward_list<T, Allocator>& y)
            noexcept(noexcept(x.swap(y)));

    namespace pmr {
        template<class T>
            using forward_list = std::forward_list<T, polymorphic_allocator<T>>;
    }
}

```

27.3.5 Header <list> synopsis

[list.syn]

```

#include <initializer_list>

namespace std {
    // 27.3.10, class template list
    template<class T, class Allocator = allocator<T>> class list;

    template<class T, class Allocator>
        bool operator==(const list<T, Allocator>& x, const list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator!=(const list<T, Allocator>& x, const list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator< (const list<T, Allocator>& x, const list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator> (const list<T, Allocator>& x, const list<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator<=(const list<T, Allocator>& x, const list<T, Allocator>& y);

```

```

template<class T, class Allocator>
    bool operator==(const list<T, Allocator>& x, const list<T, Allocator>& y);

template<class T, class Allocator>
    void swap(list<T, Allocator>& x, list<T, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class T>
        using list = std::list<T, polymorphic_allocator<T>>;
}
}

```

27.3.6 Header <vector> synopsis

[vector.syn]

```

#include <initializer_list>

namespace std {
    // 27.3.11, class template vector
    template<class T, class Allocator = allocator<T>> class vector;

    template<class T, class Allocator>
        bool operator==(const vector<T, Allocator>& x, const vector<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator!=(const vector<T, Allocator>& x, const vector<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator< (const vector<T, Allocator>& x, const vector<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator> (const vector<T, Allocator>& x, const vector<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator<=(const vector<T, Allocator>& x, const vector<T, Allocator>& y);
    template<class T, class Allocator>
        bool operator>=(const vector<T, Allocator>& x, const vector<T, Allocator>& y);

    template<class T, class Allocator>
        void swap(vector<T, Allocator>& x, vector<T, Allocator>& y)
            noexcept(noexcept(x.swap(y)));

    // 27.3.12, class vector<bool>
    template<class Allocator> class vector<bool, Allocator>;

    // hash support
    template<class T> struct hash;
    template<class Allocator> struct hash<vector<bool, Allocator>>;

    namespace pmr {
        template<class T>
            using vector = std::vector<T, polymorphic_allocator<T>>;
    }
}

```

27.3.7 Class template array

[array]

27.3.7.1 Overview

[array.overview]

- ¹ The header <array> defines a class template for storing fixed-size sequences of objects. An **array** is a contiguous container (27.2.1). An instance of `array<T, N>` stores `N` elements of type `T`, so that `size() == N` is an invariant.
- ² An **array** is an aggregate (11.6.1) that can be list-initialized with up to `N` elements whose types are convertible to `T`.
- ³ An **array** satisfies all of the requirements of a container and of a reversible container (27.2), except that a default constructed **array** object is not empty and that `swap` does not have constant complexity. An **array** satisfies some of the requirements of a sequence container (27.2.3). Descriptions are provided here only for

operations on array that are not described in one of these tables and for operations where there is additional semantic information.

- 4 The types `iterator` and `const_iterator` satisfy the `constexpr` iterator requirements (28.2.1).

```
namespace std {
    template<class T, size_t N>
    struct array {
        // types
        using value_type           = T;
        using pointer              = T*;
        using const_pointer        = const T*;
        using reference            = T&;
        using const_reference      = const T&;
        using size_type            = size_t;
        using difference_type      = ptrdiff_t;
        using iterator             = implementation-defined; // see 27.2
        using const_iterator       = implementation-defined; // see 27.2
        using reverse_iterator     = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;

        // no explicit construct/copy/destroy for aggregate type

        void fill(const T& u);
        void swap(array&) noexcept(is_nothrow_swappable_v<T>);

        // iterators
        constexpr iterator         begin() noexcept;
        constexpr const_iterator   begin() const noexcept;
        constexpr iterator         end() noexcept;
        constexpr const_iterator   end() const noexcept;

        constexpr reverse_iterator rbegin() noexcept;
        constexpr const_reverse_iterator rbegin() const noexcept;
        constexpr reverse_iterator rend() noexcept;
        constexpr const_reverse_iterator rend() const noexcept;

        constexpr const_iterator  cbegin() const noexcept;
        constexpr const_iterator  cend() const noexcept;
        constexpr const_reverse_iterator crbegin() const noexcept;
        constexpr const_reverse_iterator crend() const noexcept;

        // capacity
        [[nodiscard]] constexpr bool empty() const noexcept;
        constexpr size_type size() const noexcept;
        constexpr size_type max_size() const noexcept;

        // element access
        constexpr reference       operator[](size_type n);
        constexpr const_reference operator[](size_type n) const;
        constexpr reference       at(size_type n);
        constexpr const_reference at(size_type n) const;
        constexpr reference       front();
        constexpr const_reference front() const;
        constexpr reference       back();
        constexpr const_reference back() const;

        constexpr T * data() noexcept;
        constexpr const T * data() const noexcept;
    };

    template<class T, class... U>
    array(T, U...) -> array<T, 1 + sizeof...(U)>;
}
```


27.3.7.2 Constructors, copy, and assignment [array.cons]

- 1 The conditions for an aggregate (11.6.1) shall be met. Class `array` relies on the implicitly-declared special member functions (15.1, 15.4, and 15.8) to conform to the container requirements table in 27.2. In addition to the requirements specified in the container requirements table, the implicit move constructor and move assignment operator for `array` require that `T` be *Cpp17MoveConstructible* or *Cpp17MoveAssignable*, respectively.

```
template<class T, class... U>
array(T, U...) -> array<T, 1 + sizeof...(U)>;
```

- 2 *Requires:* (`is_same_v<T, U> && ...`) is true. Otherwise the program is ill-formed.

27.3.7.3 Member functions [array.members]

```
constexpr size_type size() const noexcept;
```

- 1 *Returns:* `N`.

```
constexpr T* data() noexcept;
constexpr const T* data() const noexcept;
```

- 2 *Returns:* A pointer such that `[data(), data() + size())` is a valid range. For a non-empty array, `data() == addressof(front())`.

```
void fill(const T& u);
```

- 3 *Effects:* As if by `fill_n(begin(), N, u)`.

```
void swap(array& y) noexcept(is_nothrow_swappable_v<T>);
```

- 4 *Effects:* Equivalent to `swap_ranges(begin(), end(), y.begin())`.

- 5 [Note: Unlike the `swap` function for other containers, `array::swap` takes linear time, may exit via an exception, and does not cause iterators to become associated with the other container. — end note]

27.3.7.4 Specialized algorithms [array.special]

```
template<class T, size_t N>
void swap(array<T, N>& x, array<T, N>& y) noexcept(noexcept(x.swap(y)));
```

- 1 *Remarks:* This function shall not participate in overload resolution unless `N == 0` or `is_swappable_v<T>` is true.

- 2 *Effects:* As if by `x.swap(y)`.

- 3 *Complexity:* Linear in `N`.

27.3.7.5 Zero-sized arrays [array.zero]

- 1 `array` shall provide support for the special case `N == 0`.

- 2 In the case that `N == 0`, `begin() == end() == unique value`. The return value of `data()` is unspecified.

- 3 The effect of calling `front()` or `back()` for a zero-sized array is undefined.

- 4 Member function `swap()` shall have a non-throwing exception specification.

27.3.7.6 Tuple interface [array.tuple]

```
template<class T, size_t N>
struct tuple_size<array<T, N>> : integral_constant<size_t, N> { };
```

```
tuple_element<I, array<T, N>>::type
```

- 1 *Requires:* `I < N`. The program is ill-formed if `I` is out of bounds.

- 2 *Value:* The type `T`.

```
template<size_t I, class T, size_t N>
constexpr T& get(array<T, N>& a) noexcept;
template<size_t I, class T, size_t N>
constexpr T&& get(array<T, N>&& a) noexcept;
```

```
template<size_t I, class T, size_t N>
constexpr const T& get(const array<T, N>& a) noexcept;
template<size_t I, class T, size_t N>
constexpr const T&& get(const array<T, N>&& a) noexcept;
```

3 *Requires:* $I < N$. The program is ill-formed if I is out of bounds.

4 *Returns:* A reference to the I^{th} element of a , where indexing is zero-based.

27.3.8 Class template deque

[deque]

27.3.8.1 Overview

[deque.overview]

- 1 A `deque` is a sequence container that supports random access iterators (28.2.7). In addition, it supports constant time insert and erase operations at the beginning or the end; insert and erase in the middle take linear time. That is, a `deque` is especially optimized for pushing and popping elements at the beginning and end. Storage management is handled automatically.
- 2 A `deque` satisfies all of the requirements of a container, of a reversible container (given in tables in 27.2), of a sequence container, including the optional sequence container requirements (27.2.3), and of an allocator-aware container (Table 84). Descriptions are provided here only for operations on `deque` that are not described in one of these tables or for operations where there is additional semantic information.

```
namespace std {
template<class T, class Allocator = allocator<T>>
class deque {
public:
    // types
    using value_type           = T;
    using allocator_type       = Allocator;
    using pointer              = typename allocator_traits<Allocator>::pointer;
    using const_pointer        = typename allocator_traits<Allocator>::const_pointer;
    using reference            = value_type&;
    using const_reference      = const value_type&;
    using size_type            = implementation-defined; // see 27.2
    using difference_type      = implementation-defined; // see 27.2
    using iterator             = implementation-defined; // see 27.2
    using const_iterator       = implementation-defined; // see 27.2
    using reverse_iterator     = std::reverse_iterator<iterator>;
    using const_reverse_iterator = std::reverse_iterator<const_iterator>;

    // 27.3.8.2, construct/copy/destroy
    deque() : deque(Allocator()) { }
    explicit deque(const Allocator&);
    explicit deque(size_type n, const Allocator& = Allocator());
    deque(size_type n, const T& value, const Allocator& = Allocator());
    template<class InputIterator>
        deque(InputIterator first, InputIterator last, const Allocator& = Allocator());
    deque(const deque& x);
    deque(deque&&);
    deque(const deque&, const Allocator&);
    deque(deque&&, const Allocator&);
    deque(initializer_list<T>, const Allocator& = Allocator());

    ~deque();
    deque& operator=(const deque& x);
    deque& operator=(deque&& x)
        noexcept(allocator_traits<Allocator>::is_always_equal::value);
    deque& operator=(initializer_list<T>);
    template<class InputIterator>
        void assign(InputIterator first, InputIterator last);
    void assign(size_type n, const T& t);
    void assign(initializer_list<T>);
    allocator_type get_allocator() const noexcept;

    // iterators
    iterator          begin() noexcept;
```

```

const_iterator      begin() const noexcept;
iterator           end() noexcept;
const_iterator      end() const noexcept;
reverse_iterator    rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator    rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator      cbegin() const noexcept;
const_iterator      cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// 27.3.8.3, capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;
void      resize(size_type sz);
void      resize(size_type sz, const T& c);
void      shrink_to_fit();

// element access
reference    operator[](size_type n);
const_reference operator[](size_type n) const;
reference    at(size_type n);
const_reference at(size_type n) const;
reference    front();
const_reference front() const;
reference    back();
const_reference back() const;

// 27.3.8.4, modifiers
template<class... Args> reference emplace_front(Args&&... args);
template<class... Args> reference emplace_back(Args&&... args);
template<class... Args> iterator emplace(const_iterator position, Args&&... args);

void push_front(const T& x);
void push_front(T&& x);
void push_back(const T& x);
void push_back(T&& x);

iterator insert(const_iterator position, const T& x);
iterator insert(const_iterator position, T&& x);
iterator insert(const_iterator position, size_type n, const T& x);
template<class InputIterator>
    iterator insert(const_iterator position, InputIterator first, InputIterator last);
iterator insert(const_iterator position, initializer_list<T>);

void pop_front();
void pop_back();

iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
void      swap(deque&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value);
void      clear() noexcept;
};

template<class InputIterator, class Allocator = allocator<iter-value-type<InputIterator>>>
    deque(InputIterator, InputIterator, Allocator = Allocator())
    -> deque<iter-value-type<InputIterator>, Allocator>;

```

```

// swap
template<class T, class Allocator>
void swap(deque<T, Allocator>& x, deque<T, Allocator>& y)
    noexcept(noexcept(x.swap(y)));
}

```

27.3.8.2 Constructors, copy, and assignment

[deque.cons]

```
explicit deque(const Allocator&);
```

1 *Effects:* Constructs an empty deque, using the specified allocator.

2 *Complexity:* Constant.

```
explicit deque(size_type n, const Allocator& = Allocator());
```

3 *Effects:* Constructs a deque with n default-inserted elements using the specified allocator.

4 *Requires:* T shall be *Cpp17DefaultInsertable* into *this.

5 *Complexity:* Linear in n.

```
deque(size_type n, const T& value, const Allocator& = Allocator());
```

6 *Effects:* Constructs a deque with n copies of value, using the specified allocator.

7 *Requires:* T shall be *Cpp17CopyInsertable* into *this.

8 *Complexity:* Linear in n.

```
template<class InputIterator>
deque(InputIterator first, InputIterator last, const Allocator& = Allocator());
```

9 *Effects:* Constructs a deque equal to the range [first, last), using the specified allocator.

10 *Complexity:* Linear in distance(first, last).

27.3.8.3 Capacity

[deque.capacity]

```
void resize(size_type sz);
```

1 *Effects:* If $sz < size()$, erases the last $size() - sz$ elements from the sequence. Otherwise, appends $sz - size()$ default-inserted elements to the sequence.

2 *Requires:* T shall be *Cpp17MoveInsertable* and *Cpp17DefaultInsertable* into *this.

```
void resize(size_type sz, const T& c);
```

3 *Effects:* If $sz < size()$, erases the last $size() - sz$ elements from the sequence. Otherwise, appends $sz - size()$ copies of c to the sequence.

4 *Requires:* T shall be *Cpp17CopyInsertable* into *this.

```
void shrink_to_fit();
```

5 *Requires:* T shall be *Cpp17MoveInsertable* into *this.

6 *Effects:* `shrink_to_fit` is a non-binding request to reduce memory use but does not change the size of the sequence. [*Note:* The request is non-binding to allow latitude for implementation-specific optimizations. — *end note*] If an exception is thrown other than by the move constructor of a non-*Cpp17CopyInsertable* T there are no effects.

7 *Complexity:* Linear in the size of the sequence.

8 *Remarks:* `shrink_to_fit` invalidates all the references, pointers, and iterators referring to the elements in the sequence as well as the past-the-end iterator.

27.3.8.4 Modifiers

[deque.modifiers]

```
iterator insert(const_iterator position, const T& x);
iterator insert(const_iterator position, T&& x);
iterator insert(const_iterator position, size_type n, const T& x);
template<class InputIterator>
iterator insert(const_iterator position,
                InputIterator first, InputIterator last);
```

```

iterator insert(const_iterator position, initializer_list<T>);

template<class... Args> reference emplace_front(Args&&... args);
template<class... Args> reference emplace_back(Args&&... args);
template<class... Args> iterator emplace(const_iterator position, Args&&... args);
void push_front(const T& x);
void push_front(T&& x);
void push_back(const T& x);
void push_back(T&& x);

```

1 *Effects:* An insertion in the middle of the deque invalidates all the iterators and references to elements of the deque. An insertion at either end of the deque invalidates all the iterators to the deque, but has no effect on the validity of references to elements of the deque.

2 *Remarks:* If an exception is thrown other than by the copy constructor, move constructor, assignment operator, or move assignment operator of T there are no effects. If an exception is thrown while inserting a single element at either end, there are no effects. Otherwise, if an exception is thrown by the move constructor of a non-*Cpp17CopyInsertable* T, the effects are unspecified.

3 *Complexity:* The complexity is linear in the number of elements inserted plus the lesser of the distances to the beginning and end of the deque. Inserting a single element either at the beginning or end of a deque always takes constant time and causes a single call to a constructor of T.

```

iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
void pop_front();
void pop_back();

```

4 *Effects:* An erase operation that erases the last element of a deque invalidates only the past-the-end iterator and all iterators and references to the erased elements. An erase operation that erases the first element of a deque but not the last element invalidates only iterators and references to the erased elements. An erase operation that erases neither the first element nor the last element of a deque invalidates the past-the-end iterator and all iterators and references to all the elements of the deque. [*Note:* `pop_front` and `pop_back` are erase operations. — *end note*]

5 *Complexity:* The number of calls to the destructor of T is the same as the number of elements erased, but the number of calls to the assignment operator of T is no more than the lesser of the number of elements before the erased elements and the number of elements after the erased elements.

6 *Throws:* Nothing unless an exception is thrown by the assignment operator of T.

27.3.9 Class template `forward_list`

[`forwardlist`]

27.3.9.1 Overview

[`forwardlist.overview`]

1 A `forward_list` is a container that supports forward iterators and allows constant time insert and erase operations anywhere within the sequence, with storage management handled automatically. Fast random access to list elements is not supported. [*Note:* It is intended that `forward_list` have zero space or time overhead relative to a hand-written C-style singly linked list. Features that would conflict with that goal have been omitted. — *end note*]

2 A `forward_list` satisfies all of the requirements of a container (Table 81), except that the `size()` member function is not provided and `operator==` has linear complexity. A `forward_list` also satisfies all of the requirements for an allocator-aware container (Table 84). In addition, a `forward_list` provides the `assign` member functions (Table 85) and several of the optional container requirements (Table 86). Descriptions are provided here only for operations on `forward_list` that are not described in that table or for operations where there is additional semantic information.

3 [*Note:* Modifying any list requires access to the element preceding the first element of interest, but in a `forward_list` there is no constant-time way to access a preceding element. For this reason, ranges that are modified, such as those supplied to `erase` and `splice`, must be open at the beginning. — *end note*]

```

namespace std {
    template<class T, class Allocator = allocator<T>>
    class forward_list {
    public:
        // types
        using value_type      = T;

```

```

using allocator_type = Allocator;
using pointer        = typename allocator_traits<Allocator>::pointer;
using const_pointer  = typename allocator_traits<Allocator>::const_pointer;
using reference      = value_type&;
using const_reference = const value_type&;
using size_type      = implementation-defined; // see 27.2
using difference_type = implementation-defined; // see 27.2
using iterator       = implementation-defined; // see 27.2
using const_iterator = implementation-defined; // see 27.2

// 27.3.9.2, construct/copy/destroy
forward_list() : forward_list(Allocator()) { }
explicit forward_list(const Allocator&);
explicit forward_list(size_type n, const Allocator& = Allocator());
forward_list(size_type n, const T& value, const Allocator& = Allocator());
template<class InputIterator>
    forward_list(InputIterator first, InputIterator last, const Allocator& = Allocator());
forward_list(const forward_list& x);
forward_list(forward_list&& x);
forward_list(const forward_list& x, const Allocator&);
forward_list(forward_list&& x, const Allocator&);
forward_list(initializer_list<T>, const Allocator& = Allocator());
~forward_list();
forward_list& operator=(const forward_list& x);
forward_list& operator=(forward_list&& x)
    noexcept(allocator_traits<Allocator>::is_always_equal::value);
forward_list& operator=(initializer_list<T>);
template<class InputIterator>
    void assign(InputIterator first, InputIterator last);
void assign(size_type n, const T& t);
void assign(initializer_list<T>);
allocator_type get_allocator() const noexcept;

// 27.3.9.3, iterators
iterator before_begin() noexcept;
const_iterator before_begin() const noexcept;
iterator begin() noexcept;
const_iterator begin() const noexcept;
iterator end() noexcept;
const_iterator end() const noexcept;

const_iterator cbegin() const noexcept;
const_iterator cbefore_begin() const noexcept;
const_iterator cend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type max_size() const noexcept;

// 27.3.9.4, element access
reference front();
const_reference front() const;

// 27.3.9.5, modifiers
template<class... Args> reference emplace_front(Args&&... args);
void push_front(const T& x);
void push_front(T&& x);
void pop_front();

template<class... Args> iterator emplace_after(const_iterator position, Args&&... args);
iterator insert_after(const_iterator position, const T& x);
iterator insert_after(const_iterator position, T&& x);

```

```

iterator insert_after(const_iterator position, size_type n, const T& x);
template<class InputIterator>
    iterator insert_after(const_iterator position, InputIterator first, InputIterator last);
iterator insert_after(const_iterator position, initializer_list<T> il);

iterator erase_after(const_iterator position);
iterator erase_after(const_iterator position, const_iterator last);
void swap(forward_list&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value);

void resize(size_type sz);
void resize(size_type sz, const value_type& c);
void clear() noexcept;

// 27.3.9.6, forward_list operations
void splice_after(const_iterator position, forward_list& x);
void splice_after(const_iterator position, forward_list&& x);
void splice_after(const_iterator position, forward_list& x, const_iterator i);
void splice_after(const_iterator position, forward_list&& x, const_iterator i);
void splice_after(const_iterator position, forward_list& x,
                 const_iterator first, const_iterator last);
void splice_after(const_iterator position, forward_list&& x,
                 const_iterator first, const_iterator last);

size_type remove(const T& value);
template<class Predicate> size_type remove_if(Predicate pred);

size_type unique();
template<class BinaryPredicate> size_type unique(BinaryPredicate binary_pred);

void merge(forward_list& x);
void merge(forward_list&& x);
template<class Compare> void merge(forward_list& x, Compare comp);
template<class Compare> void merge(forward_list&& x, Compare comp);

void sort();
template<class Compare> void sort(Compare comp);

void reverse() noexcept;
};

template<class InputIterator, class Allocator = allocator<iter-value-type<InputIterator>>>
    forward_list(InputIterator, InputIterator, Allocator = Allocator())
        -> forward_list<iter-value-type<InputIterator>, Allocator>;

// swap
template<class T, class Allocator>
    void swap(forward_list<T, Allocator>& x, forward_list<T, Allocator>& y)
        noexcept(noexcept(x.swap(y)));
}

```

- ⁴ An incomplete type T may be used when instantiating `forward_list` if the allocator satisfies the allocator completeness requirements (20.5.3.5.1). T shall be complete before any member of the resulting specialization of `forward_list` is referenced.

27.3.9.2 Constructors, copy, and assignment

[forwardlist.cons]

```
explicit forward_list(const Allocator&);
```

- ¹ *Effects:* Constructs an empty `forward_list` object using the specified allocator.

- ² *Complexity:* Constant.

```
explicit forward_list(size_type n, const Allocator& = Allocator());
```

- ³ *Effects:* Constructs a `forward_list` object with n default-inserted elements using the specified allocator.

4 *Requires:* T shall be *Cpp17DefaultInsertable* into **this*.

5 *Complexity:* Linear in n.

```
forward_list(size_type n, const T& value, const Allocator& = Allocator());
```

6 *Effects:* Constructs a `forward_list` object with n copies of `value` using the specified allocator.

7 *Requires:* T shall be *Cpp17CopyInsertable* into **this*.

8 *Complexity:* Linear in n.

```
template<class InputIterator>
```

```
forward_list(InputIterator first, InputIterator last, const Allocator& = Allocator());
```

9 *Effects:* Constructs a `forward_list` object equal to the range `[first, last)`.

10 *Complexity:* Linear in `distance(first, last)`.

27.3.9.3 Iterators

[forwardlist.iter]

```
iterator before_begin() noexcept;
```

```
const_iterator before_begin() const noexcept;
```

```
const_iterator cbefore_begin() const noexcept;
```

1 *Returns:* A non-dereferenceable iterator that, when incremented, is equal to the iterator returned by `begin()`.

2 *Effects:* `cbefore_begin()` is equivalent to `const_cast<forward_list const&>(*this).before_begin()`.

3 *Remarks:* `before_begin() == end()` shall equal `false`.

27.3.9.4 Element access

[forwardlist.access]

```
reference front();
```

```
const_reference front() const;
```

1 *Returns:* `*begin()`

27.3.9.5 Modifiers

[forwardlist.modifiers]

1 None of the overloads of `insert_after` shall affect the validity of iterators and references, and `erase_after` shall invalidate only iterators and references to the erased elements. If an exception is thrown during `insert_after` there shall be no effect. Inserting n elements into a `forward_list` is linear in n, and the number of calls to the copy or move constructor of T is exactly equal to n. Erasing n elements from a `forward_list` is linear in n and the number of calls to the destructor of type T is exactly equal to n.

```
template<class... Args> reference emplace_front(Args&&... args);
```

2 *Effects:* Inserts an object of type `value_type` constructed with `value_type(std::forward<Args>(args)...) at the beginning of the list.`

```
void push_front(const T& x);
```

```
void push_front(T&& x);
```

3 *Effects:* Inserts a copy of `x` at the beginning of the list.

```
void pop_front();
```

4 *Effects:* As if by `erase_after(before_begin())`.

```
iterator insert_after(const_iterator position, const T& x);
```

```
iterator insert_after(const_iterator position, T&& x);
```

5 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.

6 *Effects:* Inserts a copy of `x` after `position`.

7 *Returns:* An iterator pointing to the copy of `x`.

```
iterator insert_after(const_iterator position, size_type n, const T& x);
```

8 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.

9 *Effects:* Inserts n copies of `x` after `position`.

10 *Returns:* An iterator pointing to the last inserted copy of `x` or `position` if `n == 0`.

```
template<class InputIterator>
iterator insert_after(const_iterator position, InputIterator first, InputIterator last);
```

11 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.
`first` and `last` are not iterators in `*this`.

12 *Effects:* Inserts copies of elements in `[first, last)` after `position`.

13 *Returns:* An iterator pointing to the last inserted element or `position` if `first == last`.

```
iterator insert_after(const_iterator position, initializer_list<T> il);
```

14 *Effects:* `insert_after(p, il.begin(), il.end())`.

15 *Returns:* An iterator pointing to the last inserted element or `position` if `il` is empty.

```
template<class... Args>
iterator emplace_after(const_iterator position, Args&&... args);
```

16 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.

17 *Effects:* Inserts an object of type `value_type` constructed with `value_type(std::forward<Args>(args)...) after position`.

18 *Returns:* An iterator pointing to the new object.

```
iterator erase_after(const_iterator position);
```

19 *Requires:* The iterator following `position` is dereferenceable.

20 *Effects:* Erases the element pointed to by the iterator following `position`.

21 *Returns:* An iterator pointing to the element following the one that was erased, or `end()` if no such element exists.

22 *Throws:* Nothing.

```
iterator erase_after(const_iterator position, const_iterator last);
```

23 *Requires:* All iterators in the range `(position, last)` are dereferenceable.

24 *Effects:* Erases the elements in the range `(position, last)`.

25 *Returns:* `last`.

26 *Throws:* Nothing.

```
void resize(size_type sz);
```

27 *Effects:* If `sz < distance(begin(), end())`, erases the last `distance(begin(), end()) - sz` elements from the list. Otherwise, inserts `sz - distance(begin(), end())` default-inserted elements at the end of the list.

28 *Requires:* `T` shall be *Cpp17DefaultInsertable* into `*this`.

```
void resize(size_type sz, const value_type& c);
```

29 *Effects:* If `sz < distance(begin(), end())`, erases the last `distance(begin(), end()) - sz` elements from the list. Otherwise, inserts `sz - distance(begin(), end())` copies of `c` at the end of the list.

30 *Requires:* `T` shall be *Cpp17CopyInsertable* into `*this`.

```
void clear() noexcept;
```

31 *Effects:* Erases all elements in the range `[begin(), end())`.

32 *Remarks:* Does not invalidate past-the-end iterators.

27.3.9.6 Operations

[forwardlist.ops]

1 In this subclause, arguments for a template parameter named `Predicate` or `BinaryPredicate` shall satisfy the corresponding requirements in 29.3. For `merge` and `sort`, the definitions and requirements in 29.7 apply.

```
void splice_after(const_iterator position, forward_list& x);
```

```
void splice_after(const_iterator position, forward_list&& x);
```

2 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.
`get_allocator() == x.get_allocator(). addressof(x) != this`.

3 *Effects:* Inserts the contents of `x` after `position`, and `x` becomes empty. Pointers and references to the
moved elements of `x` now refer to those same elements but as members of `*this`. Iterators referring
to the moved elements will continue to refer to their elements, but they now behave as iterators into
`*this`, not into `x`.

4 *Throws:* Nothing.

5 *Complexity:* $\mathcal{O}(\text{distance}(x.begin(), x.end()))$

```
void splice_after(const_iterator position, forward_list& x, const_iterator i);
```

```
void splice_after(const_iterator position, forward_list&& x, const_iterator i);
```

6 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.
The iterator following `i` is a dereferenceable iterator in `x`. `get_allocator() == x.get_allocator()`.

7 *Effects:* Inserts the element following `i` into `*this`, following `position`, and removes it from `x`. The
result is unchanged if `position == i` or `position == ++i`. Pointers and references to `*++i` continue
to refer to the same element but as a member of `*this`. Iterators to `*++i` continue to refer to the same
element, but now behave as iterators into `*this`, not into `x`.

8 *Throws:* Nothing.

9 *Complexity:* $\mathcal{O}(1)$

```
void splice_after(const_iterator position, forward_list& x,  
                 const_iterator first, const_iterator last);
```

```
void splice_after(const_iterator position, forward_list&& x,  
                 const_iterator first, const_iterator last);
```

10 *Requires:* `position` is `before_begin()` or is a dereferenceable iterator in the range `[begin(), end())`.
`(first, last)` is a valid range in `x`, and all iterators in the range `(first, last)` are dereferenceable.
`position` is not an iterator in the range `(first, last)`. `get_allocator() == x.get_allocator()`.

11 *Effects:* Inserts elements in the range `(first, last)` after `position` and removes the elements from `x`.
Pointers and references to the moved elements of `x` now refer to those same elements but as members
of `*this`. Iterators referring to the moved elements will continue to refer to their elements, but they
now behave as iterators into `*this`, not into `x`.

12 *Complexity:* $\mathcal{O}(\text{distance}(first, last))$

```
size_type remove(const T& value);
```

```
template<class Predicate> size_type remove_if(Predicate pred);
```

13 *Effects:* Erases all the elements in the list referred to by a list iterator `i` for which the following
conditions hold: `*i == value` (for `remove()`), `pred(*i)` is true (for `remove_if()`). Invalidates only
the iterators and references to the erased elements.

14 *Returns:* The number of elements erased.

15 *Throws:* Nothing unless an exception is thrown by the equality comparison or the predicate.

16 *Remarks:* Stable (20.5.5.7).

17 *Complexity:* Exactly `distance(begin(), end())` applications of the corresponding predicate.

```
size_type unique();
```

```
template<class BinaryPredicate> size_type unique(BinaryPredicate pred);
```

18 *Effects:* Erases all but the first element from every consecutive group of equal elements referred to
by the iterator `i` in the range `[first + 1, last)` for which `*i == *(i-1)` (for the version with no
arguments) or `pred(*i, *(i - 1))` (for the version with a predicate argument) holds. Invalidates
only the iterators and references to the erased elements.

19 *Returns:* The number of elements erased.

20 *Throws:* Nothing unless an exception is thrown by the equality comparison or the predicate.

21 *Complexity:* If the range `[first, last)` is not empty, exactly $(last - first) - 1$ applications of the corresponding predicate, otherwise no applications of the predicate.

```
void merge(forward_list& x);
void merge(forward_list&& x);
template<class Compare> void merge(forward_list& x, Compare comp);
template<class Compare> void merge(forward_list&& x, Compare comp);
```

22 *Requires:* `*this` and `x` are both sorted with respect to the comparator `operator<` (for the first two overloads) or `comp` (for the last two overloads), and `get_allocator() == x.get_allocator()` is true.

23 *Effects:* Merges the two sorted ranges `[begin(), end())` and `[x.begin(), x.end())`. `x` is empty after the merge. If an exception is thrown other than by a comparison there are no effects. Pointers and references to the moved elements of `x` now refer to those same elements but as members of `*this`. Iterators referring to the moved elements will continue to refer to their elements, but they now behave as iterators into `*this`, not into `x`.

24 *Remarks:* Stable (20.5.5.7). The behavior is undefined if `get_allocator() != x.get_allocator()`.

25 *Complexity:* At most $distance(begin(), end()) + distance(x.begin(), x.end()) - 1$ comparisons.

```
void sort();
template<class Compare> void sort(Compare comp);
```

26 *Effects:* Sorts the list according to the `operator<` or the `comp` function object. If an exception is thrown, the order of the elements in `*this` is unspecified. Does not affect the validity of iterators and references.

27 *Remarks:* Stable (20.5.5.7).

28 *Complexity:* Approximately $N \log N$ comparisons, where N is $distance(begin(), end())$.

```
void reverse() noexcept;
```

29 *Effects:* Reverses the order of the elements in the list. Does not affect the validity of iterators and references.

30 *Complexity:* Linear time.

27.3.10 Class template list

[list]

27.3.10.1 Overview

[list.overview]

- 1 A `list` is a sequence container that supports bidirectional iterators and allows constant time insert and erase operations anywhere within the sequence, with storage management handled automatically. Unlike vectors (27.3.11) and deques (27.3.8), fast random access to list elements is not supported, but many algorithms only need sequential access anyway.
- 2 A `list` satisfies all of the requirements of a container, of a reversible container (given in two tables in 27.2), of a sequence container, including most of the optional sequence container requirements (27.2.3), and of an allocator-aware container (Table 84). The exceptions are the `operator[]` and `at` member functions, which are not provided.²⁶⁰ Descriptions are provided here only for operations on `list` that are not described in one of these tables or for operations where there is additional semantic information.

```
namespace std {
    template<class T, class Allocator = allocator<T>>
    class list {
    public:
        // types
        using value_type           = T;
        using allocator_type       = Allocator;
        using pointer               = typename allocator_traits<Allocator>::pointer;
        using const_pointer        = typename allocator_traits<Allocator>::const_pointer;
        using reference             = value_type&;
        using const_reference      = const value_type&;
        using size_type             = implementation-defined; // see 27.2
        using difference_type      = implementation-defined; // see 27.2
    };
};
```

²⁶⁰) These member functions are only provided by containers whose iterators are random access iterators.

```

using iterator          = implementation-defined; // see 27.2
using const_iterator    = implementation-defined; // see 27.2
using reverse_iterator  = std::reverse_iterator<iterator>;
using const_reverse_iterator = std::reverse_iterator<const_iterator>;

// 27.3.10.2, construct/copy/destroy
list() : list(Allocator()) { }
explicit list(const Allocator&);
explicit list(size_type n, const Allocator& = Allocator());
list(size_type n, const T& value, const Allocator& = Allocator());
template<class InputIterator>
    list(InputIterator first, InputIterator last, const Allocator& = Allocator());
list(const list& x);
list(list&& x);
list(const list&, const Allocator&);
list(list&&, const Allocator&);
list(initializer_list<T>, const Allocator& = Allocator());
~list();
list& operator=(const list& x);
list& operator=(list&& x)
    noexcept(allocator_traits<Allocator>::is_always_equal::value);
list& operator=(initializer_list<T>);
template<class InputIterator>
    void assign(InputIterator first, InputIterator last);
void assign(size_type n, const T& t);
void assign(initializer_list<T>);
allocator_type get_allocator() const noexcept;

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;
reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// 27.3.10.3, capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;
void        resize(size_type sz);
void        resize(size_type sz, const T& c);

// element access
reference        front();
const_reference  front() const;
reference        back();
const_reference  back() const;

// 27.3.10.4, modifiers
template<class... Args> reference emplace_front(Args&&... args);
template<class... Args> reference emplace_back(Args&&... args);
void push_front(const T& x);
void push_front(T&& x);
void pop_front();
void push_back(const T& x);
void push_back(T&& x);

```

```

void pop_back();

template<class... Args> iterator emplace(const_iterator position, Args&&... args);
iterator insert(const_iterator position, const T& x);
iterator insert(const_iterator position, T&& x);
iterator insert(const_iterator position, size_type n, const T& x);
template<class InputIterator>
    iterator insert(const_iterator position, InputIterator first, InputIterator last);
iterator insert(const_iterator position, initializer_list<T> il);

iterator erase(const_iterator position);
iterator erase(const_iterator position, const_iterator last);
void swap(list&) noexcept(allocator_traits<Allocator>::is_always_equal::value);
void clear() noexcept;

// 27.3.10.5, list operations
void splice(const_iterator position, list& x);
void splice(const_iterator position, list&& x);
void splice(const_iterator position, list& x, const_iterator i);
void splice(const_iterator position, list&& x, const_iterator i);
void splice(const_iterator position, list& x, const_iterator first, const_iterator last);
void splice(const_iterator position, list&& x, const_iterator first, const_iterator last);

size_type remove(const T& value);
template<class Predicate> size_type remove_if(Predicate pred);

size_type unique();
template<class BinaryPredicate>
    size_type unique(BinaryPredicate binary_pred);

void merge(list& x);
void merge(list&& x);
template<class Compare> void merge(list& x, Compare comp);
template<class Compare> void merge(list&& x, Compare comp);

void sort();
template<class Compare> void sort(Compare comp);

void reverse() noexcept;
};

template<class InputIterator, class Allocator = allocator<iter-value-type<InputIterator>>>
    list(InputIterator, InputIterator, Allocator = Allocator())
        -> list<iter-value-type<InputIterator>, Allocator>;

// swap
template<class T, class Allocator>
    void swap(list<T, Allocator>& x, list<T, Allocator>& y)
        noexcept(noexcept(x.swap(y)));
}

```

- ³ An incomplete type T may be used when instantiating `list` if the allocator satisfies the allocator completeness requirements (20.5.3.5.1). T shall be complete before any member of the resulting specialization of `list` is referenced.

27.3.10.2 Constructors, copy, and assignment

[list.cons]

```
explicit list(const Allocator&);
```

- ¹ *Effects:* Constructs an empty list, using the specified allocator.

- ² *Complexity:* Constant.

```
explicit list(size_type n, const Allocator& = Allocator());
```

- ³ *Effects:* Constructs a list with n default-inserted elements using the specified allocator.

4 *Requires:* T shall be *Cpp17DefaultInsertable* into *this.

5 *Complexity:* Linear in n.

```
list(size_type n, const T& value, const Allocator& = Allocator());
```

6 *Effects:* Constructs a list with n copies of value, using the specified allocator.

7 *Requires:* T shall be *Cpp17CopyInsertable* into *this.

8 *Complexity:* Linear in n.

```
template<class InputIterator>
```

```
list(InputIterator first, InputIterator last, const Allocator& = Allocator());
```

9 *Effects:* Constructs a list equal to the range [first, last).

10 *Complexity:* Linear in distance(first, last).

27.3.10.3 Capacity

[list.capacity]

```
void resize(size_type sz);
```

1 *Effects:* If size() < sz, appends sz - size() default-inserted elements to the sequence. If sz <= size(), equivalent to:

```
list<T>::iterator it = begin();
advance(it, sz);
erase(it, end());
```

2 *Requires:* T shall be *Cpp17DefaultInsertable* into *this.

```
void resize(size_type sz, const T& c);
```

3 *Effects:* As if by:

```
if (sz > size())
    insert(end(), sz-size(), c);
else if (sz < size()) {
    iterator i = begin();
    advance(i, sz);
    erase(i, end());
}
else
    ; // do nothing
```

4 *Requires:* T shall be *Cpp17CopyInsertable* into *this.

27.3.10.4 Modifiers

[list.modifiers]

```
iterator insert(const_iterator position, const T& x);
```

```
iterator insert(const_iterator position, T&& x);
```

```
iterator insert(const_iterator position, size_type n, const T& x);
```

```
template<class InputIterator>
```

```
iterator insert(const_iterator position, InputIterator first,
                InputIterator last);
```

```
iterator insert(const_iterator position, initializer_list<T>);
```

```
template<class... Args> reference emplace_front(Args&&... args);
```

```
template<class... Args> reference emplace_back(Args&&... args);
```

```
template<class... Args> iterator emplace(const_iterator position, Args&&... args);
```

```
void push_front(const T& x);
```

```
void push_front(T&& x);
```

```
void push_back(const T& x);
```

```
void push_back(T&& x);
```

1 *Remarks:* Does not affect the validity of iterators and references. If an exception is thrown there are no effects.

2 *Complexity:* Insertion of a single element into a list takes constant time and exactly one call to a constructor of T. Insertion of multiple elements into a list is linear in the number of elements inserted,

and the number of calls to the copy constructor or move constructor of T is exactly equal to the number of elements inserted.

```
iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
```

```
void pop_front();
void pop_back();
void clear() noexcept;
```

3 *Effects:* Invalidates only the iterators and references to the erased elements.

4 *Throws:* Nothing.

5 *Complexity:* Erasing a single element is a constant time operation with a single call to the destructor of T. Erasing a range in a list is linear time in the size of the range and the number of calls to the destructor of type T is exactly equal to the size of the range.

27.3.10.5 Operations

[list.ops]

1 Since lists allow fast insertion and erasing from the middle of a list, certain operations are provided specifically for them.²⁶¹ In this subclause, arguments for a template parameter named `Predicate` or `BinaryPredicate` shall satisfy the corresponding requirements in 29.3. For `merge` and `sort`, the definitions and requirements in 29.7 apply.

2 `list` provides three splice operations that destructively move elements from one list to another. The behavior of splice operations is undefined if `get_allocator() != x.get_allocator()`.

```
void splice(const_iterator position, list& x);
void splice(const_iterator position, list&& x);
```

3 *Requires:* `addressof(x) != this`.

4 *Effects:* Inserts the contents of `x` before `position` and `x` becomes empty. Pointers and references to the moved elements of `x` now refer to those same elements but as members of `*this`. Iterators referring to the moved elements will continue to refer to their elements, but they now behave as iterators into `*this`, not into `x`.

5 *Throws:* Nothing.

6 *Complexity:* Constant time.

```
void splice(const_iterator position, list& x, const_iterator i);
void splice(const_iterator position, list&& x, const_iterator i);
```

7 *Requires:* `i` is a valid dereferenceable iterator of `x`.

8 *Effects:* Inserts an element pointed to by `i` from list `x` before `position` and removes the element from `x`. The result is unchanged if `position == i` or `position == ++i`. Pointers and references to `*i` continue to refer to this same element but as a member of `*this`. Iterators to `*i` (including `i` itself) continue to refer to the same element, but now behave as iterators into `*this`, not into `x`.

9 *Throws:* Nothing.

10 *Complexity:* Constant time.

```
void splice(const_iterator position, list& x, const_iterator first,
           const_iterator last);
void splice(const_iterator position, list&& x, const_iterator first,
           const_iterator last);
```

11 *Requires:* `[first, last)` is a valid range in `x`. The program has undefined behavior if `position` is an iterator in the range `[first, last)`.

12 *Effects:* Inserts elements in the range `[first, last)` before `position` and removes the elements from `x`. Pointers and references to the moved elements of `x` now refer to those same elements but as members of `*this`. Iterators referring to the moved elements will continue to refer to their elements, but they now behave as iterators into `*this`, not into `x`.

13 *Throws:* Nothing.

261) As specified in 20.5.3.5, the requirements in this Clause apply only to lists whose allocators compare equal.

14 *Complexity:* Constant time if `&x == this`; otherwise, linear time.

```
size_type remove(const T& value);
template<class Predicate> size_type remove_if(Predicate pred);
```

15 *Effects:* Erases all the elements in the list referred to by a list iterator `i` for which the following conditions hold: `*i == value`, `pred(*i) != false`. Invalidates only the iterators and references to the erased elements.

16 *Returns:* The number of elements erased.

17 *Throws:* Nothing unless an exception is thrown by `*i == value` or `pred(*i) != false`.

18 *Remarks:* Stable (20.5.5.7).

19 *Complexity:* Exactly `size()` applications of the corresponding predicate.

```
size_type unique();
template<class BinaryPredicate> size_type unique(BinaryPredicate binary_pred);
```

20 *Effects:* Erases all but the first element from every consecutive group of equal elements referred to by the iterator `i` in the range `[first + 1, last)` for which `*i == *(i-1)` (for the version of `unique` with no arguments) or `pred(*i, *(i - 1))` (for the version of `unique` with a predicate argument) holds. Invalidates only the iterators and references to the erased elements.

21 *Returns:* The number of elements erased.

22 *Throws:* Nothing unless an exception is thrown by `*i == *(i-1)` or `pred(*i, *(i - 1))`

23 *Complexity:* If the range `[first, last)` is not empty, exactly `(last - first) - 1` applications of the corresponding predicate, otherwise no applications of the predicate.

```
void merge(list& x);
void merge(list&& x);
template<class Compare> void merge(list& x, Compare comp);
template<class Compare> void merge(list&& x, Compare comp);
```

24 *Requires:* Both the list and the argument list shall be sorted with respect to the comparator `operator<` (for the first two overloads) or `comp` (for the last two overloads).

25 *Effects:* If `addressof(x) == this`, does nothing; otherwise, merges the two sorted ranges `[begin(), end())` and `[x.begin(), x.end())`. The result is a range in which the elements will be sorted in non-decreasing order according to the ordering defined by `comp`; that is, for every iterator `i`, in the range other than the first, the condition `comp(*i, *(i - 1))` will be `false`. Pointers and references to the moved elements of `x` now refer to those same elements but as members of `*this`. Iterators referring to the moved elements will continue to refer to their elements, but they now behave as iterators into `*this`, not into `x`.

26 *Remarks:* Stable (20.5.5.7). If `addressof(x) != this`, the range `[x.begin(), x.end())` is empty after the merge. No elements are copied by this operation. The behavior is undefined if `get_allocator() != x.get_allocator()`.

27 *Complexity:* At most `size() + x.size() - 1` applications of `comp` if `addressof(x) != this`; otherwise, no applications of `comp` are performed. If an exception is thrown other than by a comparison there are no effects.

```
void reverse() noexcept;
```

28 *Effects:* Reverses the order of the elements in the list. Does not affect the validity of iterators and references.

29 *Complexity:* Linear time.

```
void sort();
template<class Compare> void sort(Compare comp);
```

30 *Effects:* Sorts the list according to the `operator<` or a `Compare` function object. If an exception is thrown, the order of the elements in `*this` is unspecified. Does not affect the validity of iterators and references.

31 *Remarks:* Stable (20.5.5.7).

32 *Complexity:* Approximately $N \log N$ comparisons, where $N == \text{size}()$.

27.3.11 Class template vector [vector]

27.3.11.1 Overview [vector.overview]

- ¹ A **vector** is a sequence container that supports (amortized) constant time insert and erase operations at the end; insert and erase in the middle take linear time. Storage management is handled automatically, though hints can be given to improve efficiency.
- ² A **vector** satisfies all of the requirements of a container and of a reversible container (given in two tables in 27.2), of a sequence container, including most of the optional sequence container requirements (27.2.3), of an allocator-aware container (Table 84), and, for an element type other than `bool`, of a contiguous container (27.2.1). The exceptions are the `push_front`, `pop_front`, and `emplace_front` member functions, which are not provided. Descriptions are provided here only for operations on **vector** that are not described in one of these tables or for operations where there is additional semantic information.

```
namespace std {
    template<class T, class Allocator = allocator<T>>
    class vector {
    public:
        // types
        using value_type           = T;
        using allocator_type       = Allocator;
        using pointer              = typename allocator_traits<Allocator>::pointer;
        using const_pointer       = typename allocator_traits<Allocator>::const_pointer;
        using reference            = value_type&;
        using const_reference      = const value_type&;
        using size_type            = implementation-defined; // see 27.2
        using difference_type      = implementation-defined; // see 27.2
        using iterator             = implementation-defined; // see 27.2
        using const_iterator       = implementation-defined; // see 27.2
        using reverse_iterator     = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;

        // 27.3.11.2, construct/copy/destroy
        vector() noexcept(noexcept(Allocator())) : vector(Allocator()) { }
        explicit vector(const Allocator&) noexcept;
        explicit vector(size_type n, const Allocator& = Allocator());
        vector(size_type n, const T& value, const Allocator& = Allocator());
        template<class InputIterator>
            vector(InputIterator first, InputIterator last, const Allocator& = Allocator());
        vector(const vector& x);
        vector(vector&&) noexcept;
        vector(const vector&, const Allocator&);
        vector(vector&&, const Allocator&);
        vector(initializer_list<T>, const Allocator& = Allocator());
        ~vector();
        vector& operator=(const vector& x);
        vector& operator=(vector&& x)
            noexcept(allocator_traits<Allocator>::propagate_on_container_move_assignment::value ||
                allocator_traits<Allocator>::is_always_equal::value);
        vector& operator=(initializer_list<T>);
        template<class InputIterator>
            void assign(InputIterator first, InputIterator last);
        void assign(size_type n, const T& u);
        void assign(initializer_list<T>);
        allocator_type get_allocator() const noexcept;

        // iterators
        iterator      begin() noexcept;
        const_iterator begin() const noexcept;
        iterator      end() noexcept;
        const_iterator end() const noexcept;
        reverse_iterator rbegin() noexcept;
```

```

const_reverse_iterator rbegin() const noexcept;
reverse_iterator      rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator        cbegin() const noexcept;
const_iterator        cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// 27.3.11.3, capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;
size_type capacity() const noexcept;
void      resize(size_type sz);
void      resize(size_type sz, const T& c);
void      reserve(size_type n);
void      shrink_to_fit();

// element access
reference      operator[](size_type n);
const_reference operator[](size_type n) const;
const_reference at(size_type n) const;
reference      at(size_type n);
reference      front();
const_reference front() const;
reference      back();
const_reference back() const;

// 27.3.11.4, data access
T*      data() noexcept;
const T* data() const noexcept;

// 27.3.11.5, modifiers
template<class... Args> reference emplace_back(Args&&... args);
void push_back(const T& x);
void push_back(T&& x);
void pop_back();

template<class... Args> iterator emplace(const_iterator position, Args&&... args);
iterator insert(const_iterator position, const T& x);
iterator insert(const_iterator position, T&& x);
iterator insert(const_iterator position, size_type n, const T& x);
template<class InputIterator>
    iterator insert(const_iterator position, InputIterator first, InputIterator last);
iterator insert(const_iterator position, initializer_list<T> il);
iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
void      swap(vector&)
    noexcept(allocator_traits<Allocator>::propagate_on_container_swap::value ||
             allocator_traits<Allocator>::is_always_equal::value);
void      clear() noexcept;
};

template<class InputIterator, class Allocator = allocator<iter-value-type<InputIterator>>>
    vector(InputIterator, InputIterator, Allocator = Allocator())
        -> vector<iter-value-type<InputIterator>, Allocator>;

// swap
template<class T, class Allocator>
    void swap(vector<T, Allocator>& x, vector<T, Allocator>& y)
        noexcept(noexcept(x.swap(y)));
}

```

- 3 An incomplete type `T` may be used when instantiating `vector` if the allocator satisfies the allocator completeness requirements (20.5.3.5.1). `T` shall be complete before any member of the resulting specialization of `vector` is referenced.

27.3.11.2 Constructors, copy, and assignment

[vector.cons]

```
explicit vector(const Allocator&) noexcept;
```

- 1 *Effects:* Constructs an empty `vector`, using the specified allocator.

- 2 *Complexity:* Constant.

```
explicit vector(size_type n, const Allocator& = Allocator());
```

- 3 *Effects:* Constructs a `vector` with `n` default-inserted elements using the specified allocator.

- 4 *Requires:* `T` shall be *Cpp17DefaultInsertable* into `*this`.

- 5 *Complexity:* Linear in `n`.

```
vector(size_type n, const T& value,
       const Allocator& = Allocator());
```

- 6 *Effects:* Constructs a `vector` with `n` copies of `value`, using the specified allocator.

- 7 *Requires:* `T` shall be *Cpp17CopyInsertable* into `*this`.

- 8 *Complexity:* Linear in `n`.

```
template<class InputIterator>
vector(InputIterator first, InputIterator last,
       const Allocator& = Allocator());
```

- 9 *Effects:* Constructs a `vector` equal to the range `[first, last)`, using the specified allocator.

- 10 *Complexity:* Makes only N calls to the copy constructor of `T` (where N is the distance between `first` and `last`) and no reallocations if iterators `first` and `last` are of forward, bidirectional, or random access categories. It makes order N calls to the copy constructor of `T` and order $\log N$ reallocations if they are just input iterators.

27.3.11.3 Capacity

[vector.capacity]

```
size_type capacity() const noexcept;
```

- 1 *Returns:* The total number of elements that the `vector` can hold without requiring reallocation.

- 2 *Complexity:* Constant time.

```
void reserve(size_type n);
```

- 3 *Requires:* `T` shall be *Cpp17MoveInsertable* into `*this`.

- 4 *Effects:* A directive that informs a `vector` of a planned change in size, so that it can manage the storage allocation accordingly. After `reserve()`, `capacity()` is greater or equal to the argument of `reserve` if reallocation happens; and equal to the previous value of `capacity()` otherwise. Reallocation happens at this point if and only if the current capacity is less than the argument of `reserve()`. If an exception is thrown other than by the move constructor of a non-*Cpp17CopyInsertable* type, there are no effects.

- 5 *Complexity:* It does not change the size of the sequence and takes at most linear time in the size of the sequence.

- 6 *Throws:* `length_error` if `n > max_size()`.²⁶²

- 7 *Remarks:* Reallocation invalidates all the references, pointers, and iterators referring to the elements in the sequence. No reallocation shall take place during insertions that happen after a call to `reserve()` until the time when an insertion would make the size of the `vector` greater than the value of `capacity()`.

```
void shrink_to_fit();
```

- 8 *Requires:* `T` shall be *Cpp17MoveInsertable* into `*this`.

- 9 *Effects:* `shrink_to_fit` is a non-binding request to reduce `capacity()` to `size()`. [Note: The request is non-binding to allow latitude for implementation-specific optimizations. — end note] It does not

²⁶² `reserve()` uses `Allocator::allocate()` which may throw an appropriate exception.

increase `capacity()`, but may reduce `capacity()` by causing reallocation. If an exception is thrown other than by the move constructor of a non-*Cpp17CopyInsertable* T there are no effects.

10 *Complexity:* Linear in the size of the sequence.

11 *Remarks:* Reallocation invalidates all the references, pointers, and iterators referring to the elements in the sequence as well as the past-the-end iterator. If no reallocation happens, they remain valid.

```
void swap(vector& x)
    noexcept(allocator_traits<Allocator>::propagate_on_container_swap::value ||
             allocator_traits<Allocator>::is_always_equal::value);
```

12 *Effects:* Exchanges the contents and `capacity()` of `*this` with that of `x`.

13 *Complexity:* Constant time.

```
void resize(size_type sz);
```

14 *Effects:* If `sz < size()`, erases the last `size() - sz` elements from the sequence. Otherwise, appends `sz - size()` default-inserted elements to the sequence.

15 *Requires:* T shall be *Cpp17MoveInsertable* and *Cpp17DefaultInsertable* into `*this`.

16 *Remarks:* If an exception is thrown other than by the move constructor of a non-*Cpp17CopyInsertable* T there are no effects.

```
void resize(size_type sz, const T& c);
```

17 *Effects:* If `sz < size()`, erases the last `size() - sz` elements from the sequence. Otherwise, appends `sz - size()` copies of `c` to the sequence.

18 *Requires:* T shall be *Cpp17CopyInsertable* into `*this`.

19 *Remarks:* If an exception is thrown there are no effects.

27.3.11.4 Data

[vector.data]

```
T*      data() noexcept;
const T* data() const noexcept;
```

1 *Returns:* A pointer such that `[data(), data() + size())` is a valid range. For a non-empty vector, `data() == addressof(front())`.

2 *Complexity:* Constant time.

27.3.11.5 Modifiers

[vector.modifiers]

```
iterator insert(const_iterator position, const T& x);
iterator insert(const_iterator position, T&& x);
iterator insert(const_iterator position, size_type n, const T& x);
template<class InputIterator>
    iterator insert(const_iterator position, InputIterator first, InputIterator last);
iterator insert(const_iterator position, initializer_list<T>);
```

```
template<class... Args> reference emplace_back(Args&&... args);
template<class... Args> iterator emplace(const_iterator position, Args&&... args);
void push_back(const T& x);
void push_back(T&& x);
```

1 *Remarks:* Causes reallocation if the new size is greater than the old capacity. Reallocation invalidates all the references, pointers, and iterators referring to the elements in the sequence. If no reallocation happens, all the iterators and references before the insertion point remain valid. If an exception is thrown other than by the copy constructor, move constructor, assignment operator, or move assignment operator of T or by any *InputIterator* operation there are no effects. If an exception is thrown while inserting a single element at the end and T is *Cpp17CopyInsertable* or `is_nothrow_move_constructible_v<T>` is `true`, there are no effects. Otherwise, if an exception is thrown by the move constructor of a non-*Cpp17CopyInsertable* T, the effects are unspecified.

2 *Complexity:* The complexity is linear in the number of elements inserted plus the distance to the end of the vector.

```

iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
void pop_back();

```

3 *Effects:* Invalidates iterators and references at or after the point of the erase.

4 *Complexity:* The destructor of T is called the number of times equal to the number of the elements erased, but the assignment operator of T is called the number of times equal to the number of elements in the vector after the erased elements.

5 *Throws:* Nothing unless an exception is thrown by the assignment operator or move assignment operator of T.

27.3.12 Class `vector<bool>`

[vector.bool]

1 To optimize space allocation, a specialization of vector for bool elements is provided:

```

namespace std {
    template<class Allocator>
    class vector<bool, Allocator> {
    public:
        // types
        using value_type           = bool;
        using allocator_type       = Allocator;
        using pointer              = implementation-defined;
        using const_pointer        = implementation-defined;
        using const_reference      = bool;
        using size_type            = implementation-defined; // see 27.2
        using difference_type      = implementation-defined; // see 27.2
        using iterator             = implementation-defined; // see 27.2
        using const_iterator       = implementation-defined; // see 27.2
        using reverse_iterator     = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;

        // bit reference
        class reference {
            friend class vector;
            reference() noexcept;
        public:
            reference(const reference&) = default;
            ~reference();
            operator bool() const noexcept;
            reference& operator=(const bool x) noexcept;
            reference& operator=(const reference& x) noexcept;
            void flip() noexcept; // flips the bit
        };

        // construct/copy/destroy
        vector() : vector(Allocator()) { }
        explicit vector(const Allocator&);
        explicit vector(size_type n, const Allocator& = Allocator());
        vector(size_type n, const bool& value, const Allocator& = Allocator());
        template<class InputIterator>
            vector(InputIterator first, InputIterator last, const Allocator& = Allocator());
        vector(const vector& x);
        vector(vector&& x);
        vector(const vector&, const Allocator&);
        vector(vector&&, const Allocator&);
        vector(initializer_list<bool>, const Allocator& = Allocator());
        ~vector();
        vector& operator=(const vector& x);
        vector& operator=(vector&& x);
        vector& operator=(initializer_list<bool>);
        template<class InputIterator>
            void assign(InputIterator first, InputIterator last);
        void assign(size_type n, const bool& t);
    };
}

```

```

void assign(initializer_list<bool>);
allocator_type get_allocator() const noexcept;

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;
reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;
size_type capacity() const noexcept;
void      resize(size_type sz, bool c = false);
void      reserve(size_type n);
void      shrink_to_fit();

// element access
reference   operator[](size_type n);
const_reference operator[](size_type n) const;
const_reference at(size_type n) const;
reference    at(size_type n);
reference    front();
const_reference front() const;
reference    back();
const_reference back() const;

// modifiers
template<class... Args> reference emplace_back(Args&&... args);
void push_back(const bool& x);
void pop_back();
template<class... Args> iterator emplace(const_iterator position, Args&&... args);
iterator insert(const_iterator position, const bool& x);
iterator insert(const_iterator position, size_type n, const bool& x);
template<class InputIterator>
    iterator insert(const_iterator position, InputIterator first, InputIterator last);
iterator insert(const_iterator position, initializer_list<bool> il);

iterator erase(const_iterator position);
iterator erase(const_iterator first, const_iterator last);
void swap(vector&);
static void swap(reference x, reference y) noexcept;
void flip() noexcept;           // flips all bits
void clear() noexcept;
};
}

```

² Unless described below, all operations have the same requirements and semantics as the primary `vector` template, except that operations dealing with the `bool` value type map to bit values in the container storage and `allocator_traits::construct` (24.10.9.2) is not used to construct these values.

³ There is no requirement that the data be stored as a contiguous allocation of `bool` values. A space-optimized representation of bits is recommended instead.

- 4 **reference** is a class that simulates the behavior of references of a single bit in `vector<bool>`. The conversion function returns `true` when the bit is set, and `false` otherwise. The assignment operator sets the bit when the argument is (convertible to) `true` and clears it otherwise. `flip` reverses the state of the bit.

```
void flip() noexcept;
```

- 5 *Effects:* Replaces each element in the container with its complement.

```
static void swap(reference x, reference y) noexcept;
```

- 6 *Effects:* Exchanges the contents of `x` and `y` as if by:

```
bool b = x;
x = y;
y = b;
```

```
template<class Allocator> struct hash<vector<bool, Allocator>>;
```

- 7 The specialization is enabled (24.14.16).

27.4 Associative containers [associative]

27.4.1 In general [associative.general]

- 1 The header `<map>` defines the class templates `map` and `multimap`; the header `<set>` defines the class templates `set` and `multiset`.
- 2 The following exposition-only alias templates may appear in deduction guides for associative containers:

```
template<class InputIterator>
using iter-value-type =
    typename iterator_traits<InputIterator>::value_type; // exposition only
template<class InputIterator>
using iter-key-type = remove_const_t<
    typename iterator_traits<InputIterator>::value_type::first_type>; // exposition only
template<class InputIterator>
using iter-mapped-type =
    typename iterator_traits<InputIterator>::value_type::second_type; // exposition only
template<class InputIterator>
using iter-to-alloc-type = pair<
    add_const_t<typename iterator_traits<InputIterator>::value_type::first_type>,
    typename iterator_traits<InputIterator>::value_type::second_type>; // exposition only
```

27.4.2 Header `<map>` synopsis [associative.map.syn]

```
#include <initializer_list>

namespace std {
// 27.4.4, class template map
template<class Key, class T, class Compare = less<Key>,
         class Allocator = allocator<pair<const Key, T>>>
class map;

template<class Key, class T, class Compare, class Allocator>
bool operator==(const map<Key, T, Compare, Allocator>& x,
               const map<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
bool operator!=(const map<Key, T, Compare, Allocator>& x,
               const map<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
bool operator<(const map<Key, T, Compare, Allocator>& x,
              const map<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
bool operator>(const map<Key, T, Compare, Allocator>& x,
              const map<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
bool operator<=(const map<Key, T, Compare, Allocator>& x,
               const map<Key, T, Compare, Allocator>& y);
```

```

template<class Key, class T, class Compare, class Allocator>
    bool operator==(const map<Key, T, Compare, Allocator>& x,
                    const map<Key, T, Compare, Allocator>& y);

template<class Key, class T, class Compare, class Allocator>
    void swap(map<Key, T, Compare, Allocator>& x,
              map<Key, T, Compare, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

// 27.4.5, class template multimap
template<class Key, class T, class Compare = less<Key>,
         class Allocator = allocator<pair<const Key, T>>>
    class multimap;

template<class Key, class T, class Compare, class Allocator>
    bool operator==(const multimap<Key, T, Compare, Allocator>& x,
                    const multimap<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
    bool operator!=(const multimap<Key, T, Compare, Allocator>& x,
                    const multimap<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
    bool operator< (const multimap<Key, T, Compare, Allocator>& x,
                   const multimap<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
    bool operator> (const multimap<Key, T, Compare, Allocator>& x,
                   const multimap<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
    bool operator<= (const multimap<Key, T, Compare, Allocator>& x,
                    const multimap<Key, T, Compare, Allocator>& y);
template<class Key, class T, class Compare, class Allocator>
    bool operator>= (const multimap<Key, T, Compare, Allocator>& x,
                    const multimap<Key, T, Compare, Allocator>& y);

template<class Key, class T, class Compare, class Allocator>
    void swap(multimap<Key, T, Compare, Allocator>& x,
              multimap<Key, T, Compare, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class Key, class T, class Compare = less<Key>>
        using map = std::map<Key, T, Compare,
                            polymorphic_allocator<pair<const Key, T>>>;

    template<class Key, class T, class Compare = less<Key>>
        using multimap = std::multimap<Key, T, Compare,
                                       polymorphic_allocator<pair<const Key, T>>>;
}
}

```

27.4.3 Header <set> synopsis

[associative.set.syn]

```

#include <initializer_list>

namespace std {
    // 27.4.6, class template set
    template<class Key, class Compare = less<Key>, class Allocator = allocator<Key>>
        class set;

    template<class Key, class Compare, class Allocator>
        bool operator==(const set<Key, Compare, Allocator>& x,
                        const set<Key, Compare, Allocator>& y);
    template<class Key, class Compare, class Allocator>
        bool operator!=(const set<Key, Compare, Allocator>& x,
                        const set<Key, Compare, Allocator>& y);

```



```

template<class Key, class Compare, class Allocator>
    bool operator< (const set<Key, Compare, Allocator>& x,
                   const set<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator> (const set<Key, Compare, Allocator>& x,
                   const set<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator<=(const set<Key, Compare, Allocator>& x,
                    const set<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator>=(const set<Key, Compare, Allocator>& x,
                    const set<Key, Compare, Allocator>& y);

template<class Key, class Compare, class Allocator>
    void swap(set<Key, Compare, Allocator>& x,
              set<Key, Compare, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

// 27.4.7, class template multiset
template<class Key, class Compare = less<Key>, class Allocator = allocator<Key>>
    class multiset;

template<class Key, class Compare, class Allocator>
    bool operator==(const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator!=(const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator< (const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator> (const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator<=(const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);
template<class Key, class Compare, class Allocator>
    bool operator>=(const multiset<Key, Compare, Allocator>& x,
                    const multiset<Key, Compare, Allocator>& y);

template<class Key, class Compare, class Allocator>
    void swap(multiset<Key, Compare, Allocator>& x,
              multiset<Key, Compare, Allocator>& y)
        noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class Key, class Compare = less<Key>>
        using set = std::set<Key, Compare, polymorphic_allocator<Key>>;

    template<class Key, class Compare = less<Key>>
        using multiset = std::multiset<Key, Compare, polymorphic_allocator<Key>>;
}
}

```

27.4.4 Class template map

[map]

27.4.4.1 Overview

[map.overview]

- ¹ A **map** is an associative container that supports unique keys (contains at most one of each key value) and provides for fast retrieval of values of another type T based on the keys. The **map** class supports bidirectional iterators.
- ² A **map** satisfies all of the requirements of a container, of a reversible container (27.2), of an associative container (27.2.6), and of an allocator-aware container (Table 84). A **map** also provides most operations

described in 27.2.6 for unique keys. This means that a `map` supports the `a_uniq` operations in 27.2.6 but not the `a_eq` operations. For a `map<Key,T>` the `key_type` is `Key` and the `value_type` is `pair<const Key,T>`. Descriptions are provided here only for operations on `map` that are not described in one of those tables or for operations where there is additional semantic information.

```

namespace std {
    template<class Key, class T, class Compare = less<Key>,
            class Allocator = allocator<pair<const Key, T>>>
    class map {
    public:
        // types
        using key_type           = Key;
        using mapped_type       = T;
        using value_type        = pair<const Key, T>;
        using key_compare       = Compare;
        using allocator_type    = Allocator;
        using pointer           = typename allocator_traits<Allocator>::pointer;
        using const_pointer     = typename allocator_traits<Allocator>::const_pointer;
        using reference         = value_type&;
        using const_reference   = const value_type&;
        using size_type        = implementation-defined; // see 27.2
        using difference_type   = implementation-defined; // see 27.2
        using iterator         = implementation-defined; // see 27.2
        using const_iterator    = implementation-defined; // see 27.2
        using reverse_iterator  = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;
        using node_type        = unspecified;
        using insert_return_type = INSERT_RETURN_TYPE<iterator, node_type>;

        class value_compare {
            friend class map;
        protected:
            Compare comp;
            value_compare(Compare c) : comp(c) {}
        public:
            bool operator()(const value_type& x, const value_type& y) const {
                return comp(x.first, y.first);
            }
        };

        // 27.4.4.2, construct/copy/destroy
        map() : map(Compare()) {}
        explicit map(const Compare& comp, const Allocator& = Allocator());
        template<class InputIterator>
            map(InputIterator first, InputIterator last,
                const Compare& comp = Compare(), const Allocator& = Allocator());
        map(const map& x);
        map(map&& x);
        explicit map(const Allocator&);
        map(const map&, const Allocator&);
        map(map&&, const Allocator&);
        map(initializer_list<value_type>,
            const Compare& = Compare(),
            const Allocator& = Allocator());
        template<class InputIterator>
            map(InputIterator first, InputIterator last, const Allocator& a)
                : map(first, last, Compare(), a) {}
        map(initializer_list<value_type> il, const Allocator& a)
            : map(il, Compare(), a) {}
        ~map();
        map& operator=(const map& x);
        map& operator=(map&& x)
            noexcept(allocator_traits<Allocator>::is_always_equal::value &&
                is_nothrow_move_assignable_v<Compare>);
    };
}

```

```

map& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;

reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// 27.4.4.3, element access
T& operator[] (const key_type& x);
T& operator[] (key_type&& x);
T&          at(const key_type& x);
const T&    at(const key_type& x) const;

// 27.4.4.4, modifiers
template<class... Args> pair<iterator, bool> emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
pair<iterator, bool> insert(const value_type& x);
pair<iterator, bool> insert(value_type&& x);
template<class P> pair<iterator, bool> insert(P&& x);
iterator insert(const_iterator position, const value_type& x);
iterator insert(const_iterator position, value_type&& x);
template<class P>
    iterator insert(const_iterator position, P&&);
template<class InputIterator>
    void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
insert_return_type insert(node_type&& nh);
iterator          insert(const_iterator hint, node_type&& nh);

template<class... Args>
    pair<iterator, bool> try_emplace(const key_type& k, Args&&... args);
template<class... Args>
    pair<iterator, bool> try_emplace(key_type&& k, Args&&... args);
template<class... Args>
    iterator try_emplace(const_iterator hint, const key_type& k, Args&&... args);
template<class... Args>
    iterator try_emplace(const_iterator hint, key_type&& k, Args&&... args);
template<class M>
    pair<iterator, bool> insert_or_assign(const key_type& k, M&& obj);
template<class M>
    pair<iterator, bool> insert_or_assign(key_type&& k, M&& obj);
template<class M>
    iterator insert_or_assign(const_iterator hint, const key_type& k, M&& obj);

```

```

template<class M>
    iterator insert_or_assign(const_iterator hint, key_type&& k, M&& obj);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& x);
iterator erase(const_iterator first, const_iterator last);
void swap(map&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_swappable_v<Compare>);
void clear() noexcept;

template<class C2>
    void merge(map<Key, T, C2, Allocator>& source);
template<class C2>
    void merge(map<Key, T, C2, Allocator>&& source);
template<class C2>
    void merge(multimap<Key, T, C2, Allocator>& source);
template<class C2>
    void merge(multimap<Key, T, C2, Allocator>&& source);

// observers
key_compare key_comp() const;
value_compare value_comp() const;

// map operations
iterator find(const key_type& x);
const_iterator find(const key_type& x) const;
template<class K> iterator find(const K& x);
template<class K> const_iterator find(const K& x) const;

size_type count(const key_type& x) const;
template<class K> size_type count(const K& x) const;

bool contains(const key_type& x) const;
template<class K> bool contains(const K& x) const;

iterator lower_bound(const key_type& x);
const_iterator lower_bound(const key_type& x) const;
template<class K> iterator lower_bound(const K& x);
template<class K> const_iterator lower_bound(const K& x) const;

iterator upper_bound(const key_type& x);
const_iterator upper_bound(const key_type& x) const;
template<class K> iterator upper_bound(const K& x);
template<class K> const_iterator upper_bound(const K& x) const;

pair<iterator, iterator> equal_range(const key_type& x);
pair<const_iterator, const_iterator> equal_range(const key_type& x) const;
template<class K>
    pair<iterator, iterator> equal_range(const K& x);
template<class K>
    pair<const_iterator, const_iterator> equal_range(const K& x) const;
};

template<class InputIterator, class Compare = less<iter-key-type<InputIterator>>,
        class Allocator = allocator<iter-to-alloc-type<InputIterator>>>
    map(InputIterator, InputIterator, Compare = Compare(), Allocator = Allocator())
    -> map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>, Compare, Allocator>;

template<class Key, class T, class Compare = less<Key>,
        class Allocator = allocator<pair<const Key, T>>>
    map(initializer_list<pair<const Key, T>>, Compare = Compare(), Allocator = Allocator())
    -> map<Key, T, Compare, Allocator>;

```

```

template<class InputIterator, class Allocator>
map(InputIterator, InputIterator, Allocator)
  -> map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
    less<iter-key-type<InputIterator>>, Allocator>;

template<class Key, class T, class Allocator>
map(initializer_list<pair<const Key, T>>, Allocator) -> map<Key, T, less<Key>, Allocator>;

// swap
template<class Key, class T, class Compare, class Allocator>
void swap(map<Key, T, Compare, Allocator>& x,
          map<Key, T, Compare, Allocator>& y)
  noexcept(noexcept(x.swap(y)));
}

```

27.4.4.2 Constructors, copy, and assignment [map.cons]

```
explicit map(const Compare& comp, const Allocator& = Allocator());
```

1 *Effects:* Constructs an empty map using the specified comparison object and allocator.

2 *Complexity:* Constant.

```

template<class InputIterator>
map(InputIterator first, InputIterator last,
    const Compare& comp = Compare(), const Allocator& = Allocator());

```

3 *Effects:* Constructs an empty map using the specified comparison object and allocator, and inserts elements from the range [first, last).

4 *Complexity:* Linear in N if the range [first, last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

27.4.4.3 Element access [map.access]

```
T& operator[] (const key_type& x);
```

1 *Effects:* Equivalent to: return try_emplace(x).first->second;

```
T& operator[] (key_type&& x);
```

2 *Effects:* Equivalent to: return try_emplace(move(x)).first->second;

```
T& at(const key_type& x);
const T& at(const key_type& x) const;
```

3 *Returns:* A reference to the mapped_type corresponding to x in *this.

4 *Throws:* An exception object of type out_of_range if no such element is present.

5 *Complexity:* Logarithmic.

27.4.4.4 Modifiers [map.modifiers]

```

template<class P>
pair<iterator, bool> insert(P&& x);
template<class P>
iterator insert(const_iterator position, P&& x);

```

1 *Effects:* The first form is equivalent to return emplace(std::forward<P>(x)). The second form is equivalent to return emplace_hint(position, std::forward<P>(x)).

2 *Remarks:* These signatures shall not participate in overload resolution unless is_constructible_v<value_type, P&&> is true.

```

template<class... Args>
pair<iterator, bool> try_emplace(const key_type& k, Args&&... args);
template<class... Args>
iterator try_emplace(const_iterator hint, const key_type& k, Args&&... args);

```

3 *Requires:* value_type shall be Cpp17EmplaceConstructible into map from piecewise_construct, forward_as_tuple(k), forward_as_tuple(std::forward<Args>(args)...).

4 *Effects:* If the map already contains an element whose key is equivalent to `k`, there is no effect. Otherwise inserts an object of type `value_type` constructed with `piecewise_construct`, `forward_as_tuple(k)`, `forward_as_tuple(std::forward<Args>(args)...) .`

5 *Returns:* In the first overload, the `bool` component of the returned pair is `true` if and only if the insertion took place. The returned iterator points to the map element whose key is equivalent to `k`.

6 *Complexity:* The same as `emplace` and `emplace_hint`, respectively.

```
template<class... Args>
  pair<iterator, bool> try_emplace(key_type&& k, Args&&... args);
template<class... Args>
  iterator try_emplace(const_iterator hint, key_type&& k, Args&&... args);
```

7 *Requires:* `value_type` shall be *Cpp17EmplaceConstructible* into map from `piecewise_construct`, `forward_as_tuple(std::move(k))`, `forward_as_tuple(std::forward<Args>(args)...) .`

8 *Effects:* If the map already contains an element whose key is equivalent to `k`, there is no effect. Otherwise inserts an object of type `value_type` constructed with `piecewise_construct`, `forward_as_tuple(std::move(k))`, `forward_as_tuple(std::forward<Args>(args)...) .`

9 *Returns:* In the first overload, the `bool` component of the returned pair is `true` if and only if the insertion took place. The returned iterator points to the map element whose key is equivalent to `k`.

10 *Complexity:* The same as `emplace` and `emplace_hint`, respectively.

```
template<class M>
  pair<iterator, bool> insert_or_assign(const key_type& k, M&& obj);
template<class M>
  iterator insert_or_assign(const_iterator hint, const key_type& k, M&& obj);
```

11 *Requires:* `is_assignable_v<mapped_type&, M&&>` shall be `true`. `value_type` shall be *Cpp17EmplaceConstructible* into map from `k`, `forward<M>(obj)`.

12 *Effects:* If the map already contains an element `e` whose key is equivalent to `k`, assigns `std::forward<M>(obj)` to `e.second`. Otherwise inserts an object of type `value_type` constructed with `k`, `std::forward<M>(obj)`.

13 *Returns:* In the first overload, the `bool` component of the returned pair is `true` if and only if the insertion took place. The returned iterator points to the map element whose key is equivalent to `k`.

14 *Complexity:* The same as `emplace` and `emplace_hint`, respectively.

```
template<class M>
  pair<iterator, bool> insert_or_assign(key_type&& k, M&& obj);
template<class M>
  iterator insert_or_assign(const_iterator hint, key_type&& k, M&& obj);
```

15 *Requires:* `is_assignable_v<mapped_type&, M&&>` shall be `true`. `value_type` shall be *Cpp17EmplaceConstructible* into map from `move(k)`, `forward<M>(obj)`.

16 *Effects:* If the map already contains an element `e` whose key is equivalent to `k`, assigns `std::forward<M>(obj)` to `e.second`. Otherwise inserts an object of type `value_type` constructed with `std::move(k)`, `std::forward<M>(obj)`.

17 *Returns:* In the first overload, the `bool` component of the returned pair is `true` if and only if the insertion took place. The returned iterator points to the map element whose key is equivalent to `k`.

18 *Complexity:* The same as `emplace` and `emplace_hint`, respectively.

27.4.5 Class template `multimap`

[[multimap](#)]

27.4.5.1 Overview

[[multimap.overview](#)]

1 A `multimap` is an associative container that supports equivalent keys (possibly containing multiple copies of the same key value) and provides for fast retrieval of values of another type `T` based on the keys. The `multimap` class supports bidirectional iterators.

2 A `multimap` satisfies all of the requirements of a container and of a reversible container (27.2), of an associative container (27.2.6), and of an allocator-aware container (Table 84). A `multimap` also provides most operations described in 27.2.6 for equal keys. This means that a `multimap` supports the `a_eq` operations in 27.2.6 but not the `a_uniq` operations. For a `multimap<Key, T>` the `key_type` is `Key` and the `value_type` is `pair<const`

Key,T>. Descriptions are provided here only for operations on `multimap` that are not described in one of those tables or for operations where there is additional semantic information.

```

namespace std {
    template<class Key, class T, class Compare = less<Key>,
            class Allocator = allocator<pair<const Key, T>>>
    class multimap {
    public:
        // types
        using key_type           = Key;
        using mapped_type       = T;
        using value_type        = pair<const Key, T>;
        using key_compare       = Compare;
        using allocator_type    = Allocator;
        using pointer           = typename allocator_traits<Allocator>::pointer;
        using const_pointer     = typename allocator_traits<Allocator>::const_pointer;
        using reference         = value_type&;
        using const_reference   = const value_type&;
        using size_type         = implementation-defined; // see 27.2
        using difference_type   = implementation-defined; // see 27.2
        using iterator          = implementation-defined; // see 27.2
        using const_iterator    = implementation-defined; // see 27.2
        using reverse_iterator  = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;
        using node_type         = unspecified;

        class value_compare {
            friend class multimap;
        protected:
            Compare comp;
            value_compare(Compare c) : comp(c) { }
        public:
            bool operator()(const value_type& x, const value_type& y) const {
                return comp(x.first, y.first);
            }
        };

        // 27.4.5.2, construct/copy/destroy
        multimap() : multimap(Compare()) { }
        explicit multimap(const Compare& comp, const Allocator& = Allocator());
        template<class InputIterator>
            multimap(InputIterator first, InputIterator last,
                    const Compare& comp = Compare(),
                    const Allocator& = Allocator());
        multimap(const multimap& x);
        multimap(multimap&& x);
        explicit multimap(const Allocator&);
        multimap(const multimap&, const Allocator&);
        multimap(multimap&&, const Allocator&);
        multimap(initializer_list<value_type>,
                const Compare& = Compare(),
                const Allocator& = Allocator());
        template<class InputIterator>
            multimap(InputIterator first, InputIterator last, const Allocator& a)
                : multimap(first, last, Compare(), a) { }
        multimap(initializer_list<value_type> il, const Allocator& a)
            : multimap(il, Compare(), a) { }
        ~multimap();
        multimap& operator=(const multimap& x);
        multimap& operator=(multimap&& x)
            noexcept(allocator_traits<Allocator>::is_always_equal::value &&
                    is_nothrow_move_assignable_v<Compare>);
        multimap& operator=(initializer_list<value_type>);
        allocator_type get_allocator() const noexcept;
    };
}

```

```

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;

reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// 27.4.5.3, modifiers
template<class... Args> iterator emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
iterator insert(const value_type& x);
iterator insert(value_type&& x);
template<class P> iterator insert(P&& x);
iterator insert(const_iterator position, const value_type& x);
iterator insert(const_iterator position, value_type&& x);
template<class P> iterator insert(const_iterator position, P&& x);
template<class InputIterator>
    void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
iterator insert(node_type&& nh);
iterator insert(const_iterator hint, node_type&& nh);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& x);
iterator erase(const_iterator first, const_iterator last);
void swap(multimap&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_swappable_v<Compare>);
void clear() noexcept;

template<class C2>
    void merge(multimap<Key, T, C2, Allocator>& source);
template<class C2>
    void merge(multimap<Key, T, C2, Allocator>&& source);
template<class C2>
    void merge(map<Key, T, C2, Allocator>& source);
template<class C2>
    void merge(map<Key, T, C2, Allocator>&& source);

// observers
key_compare key_comp() const;
value_compare value_comp() const;

// map operations
iterator find(const key_type& x);
const_iterator find(const key_type& x) const;

```



```

template<class K> iterator      find(const K& x);
template<class K> const_iterator find(const K& x) const;

size_type      count(const key_type& x) const;
template<class K> size_type count(const K& x) const;

bool          contains(const key_type& x) const;
template<class K> bool contains(const K& x) const;

iterator      lower_bound(const key_type& x);
const_iterator lower_bound(const key_type& x) const;
template<class K> iterator      lower_bound(const K& x);
template<class K> const_iterator lower_bound(const K& x) const;

iterator      upper_bound(const key_type& x);
const_iterator upper_bound(const key_type& x) const;
template<class K> iterator      upper_bound(const K& x);
template<class K> const_iterator upper_bound(const K& x) const;

pair<iterator, iterator>          equal_range(const key_type& x);
pair<const_iterator, const_iterator> equal_range(const key_type& x) const;
template<class K>
  pair<iterator, iterator>          equal_range(const K& x);
template<class K>
  pair<const_iterator, const_iterator> equal_range(const K& x) const;
};

template<class InputIterator, class Compare = less<iter-key-type<InputIterator>>,
        class Allocator = allocator<iter-to-alloc-type<InputIterator>>>
  multimap(InputIterator, InputIterator, Compare = Compare(), Allocator = Allocator())
    -> multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
        Compare, Allocator>;

template<class Key, class T, class Compare = less<Key>,
        class Allocator = allocator<pair<const Key, T>>>
  multimap(initializer_list<pair<const Key, T>>, Compare = Compare(), Allocator = Allocator())
    -> multimap<Key, T, Compare, Allocator>;

template<class InputIterator, class Allocator>
  multimap(InputIterator, InputIterator, Allocator)
    -> multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
        less<iter-key-type<InputIterator>>, Allocator>;

template<class Key, class T, class Allocator>
  multimap(initializer_list<pair<const Key, T>>, Allocator)
    -> multimap<Key, T, less<Key>, Allocator>;

// swap
template<class Key, class T, class Compare, class Allocator>
  void swap(multimap<Key, T, Compare, Allocator>& x,
            multimap<Key, T, Compare, Allocator>& y)
    noexcept(noexcept(x.swap(y)));
}

```

27.4.5.2 Constructors

[multimap.cons]

```
explicit multimap(const Compare& comp, const Allocator& = Allocator());
```

¹ *Effects:* Constructs an empty multimap using the specified comparison object and allocator.

² *Complexity:* Constant.

```
template<class InputIterator>
  multimap(InputIterator first, InputIterator last,
           const Compare& comp = Compare(),
```

```
const Allocator& = Allocator());
```

3 *Effects:* Constructs an empty multimap using the specified comparison object and allocator, and inserts elements from the range [first, last).

4 *Complexity:* Linear in N if the range [first, last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

27.4.5.3 Modifiers

[multimap.modifiers]

```
template<class P> iterator insert(P&& x);
template<class P> iterator insert(const_iterator position, P&& x);
```

1 *Effects:* The first form is equivalent to return `emplace(std::forward<P>(x))`. The second form is equivalent to return `emplace_hint(position, std::forward<P>(x))`.

2 *Remarks:* These signatures shall not participate in overload resolution unless `is_constructible_v<value_type, P&&>` is true.

27.4.6 Class template set

[set]

27.4.6.1 Overview

[set.overview]

1 A `set` is an associative container that supports unique keys (contains at most one of each key value) and provides for fast retrieval of the keys themselves. The `set` class supports bidirectional iterators.

2 A `set` satisfies all of the requirements of a container, of a reversible container (27.2), of an associative container (27.2.6), and of an allocator-aware container (Table 84). A `set` also provides most operations described in 27.2.6 for unique keys. This means that a `set` supports the `a_uniq` operations in 27.2.6 but not the `a_eq` operations. For a `set<Key>` both the `key_type` and `value_type` are `Key`. Descriptions are provided here only for operations on `set` that are not described in one of these tables and for operations where there is additional semantic information.

```
namespace std {
    template<class Key, class Compare = less<Key>,
             class Allocator = allocator<Key>>
    class set {
    public:
        // types
        using key_type           = Key;
        using key_compare        = Compare;
        using value_type         = Key;
        using value_compare      = Compare;
        using allocator_type     = Allocator;
        using pointer            = typename allocator_traits<Allocator>::pointer;
        using const_pointer      = typename allocator_traits<Allocator>::const_pointer;
        using reference          = value_type&;
        using const_reference    = const value_type&;
        using size_type          = implementation-defined; // see 27.2
        using difference_type    = implementation-defined; // see 27.2
        using iterator           = implementation-defined; // see 27.2
        using const_iterator     = implementation-defined; // see 27.2
        using reverse_iterator    = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;
        using node_type          = unspecified;
        using insert_return_type = INSERT_RETURN_TYPE<iterator, node_type>;

        // 27.4.6.2, construct/copy/destroy
        set() : set(Compare()) { }
        explicit set(const Compare& comp, const Allocator& = Allocator());
        template<class InputIterator>
            set(InputIterator first, InputIterator last,
                const Compare& comp = Compare(), const Allocator& = Allocator());
        set(const set& x);
        set(set&& x);
        explicit set(const Allocator&);
        set(const set&, const Allocator&);
        set(set&&, const Allocator&);
    };
};
```

```

set(initializer_list<value_type>, const Compare& = Compare(),
    const Allocator& = Allocator());
template<class InputIterator>
    set(InputIterator first, InputIterator last, const Allocator& a)
        : set(first, last, Compare(), a) { }
set(initializer_list<value_type> il, const Allocator& a)
    : set(il, Compare(), a) { }
~set();
set& operator=(const set& x);
set& operator=(set&& x)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
        is_nothrow_move_assignable_v<Compare>);
set& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;

reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// modifiers
template<class... Args> pair<iterator, bool> emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
pair<iterator, bool> insert(const value_type& x);
pair<iterator, bool> insert(value_type&& x);
iterator insert(const_iterator position, const value_type& x);
iterator insert(const_iterator position, value_type&& x);
template<class InputIterator>
    void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
insert_return_type insert(node_type&& nh);
iterator          insert(const_iterator hint, node_type&& nh);

iterator          erase(iterator position);
iterator          erase(const_iterator position);
size_type erase(const key_type& x);
iterator          erase(const_iterator first, const_iterator last);
void swap(set&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
        is_nothrow_swappable_v<Compare>);
void clear() noexcept;

template<class C2>
    void merge(set<Key, C2, Allocator>& source);

```

```

template<class C2>
    void merge(set<Key, C2, Allocator>&& source);
template<class C2>
    void merge(multiset<Key, C2, Allocator>& source);
template<class C2>
    void merge(multiset<Key, C2, Allocator>&& source);

// observers
key_compare key_comp() const;
value_compare value_comp() const;

// set operations
iterator      find(const key_type& x);
const_iterator find(const key_type& x) const;
template<class K> iterator      find(const K& x);
template<class K> const_iterator find(const K& x) const;

size_type      count(const key_type& x) const;
template<class K> size_type count(const K& x) const;

bool           contains(const key_type& x) const;
template<class K> bool contains(const K& x) const;

iterator      lower_bound(const key_type& x);
const_iterator lower_bound(const key_type& x) const;
template<class K> iterator      lower_bound(const K& x);
template<class K> const_iterator lower_bound(const K& x) const;

iterator      upper_bound(const key_type& x);
const_iterator upper_bound(const key_type& x) const;
template<class K> iterator      upper_bound(const K& x);
template<class K> const_iterator upper_bound(const K& x) const;

pair<iterator, iterator>      equal_range(const key_type& x);
pair<const_iterator, const_iterator> equal_range(const key_type& x) const;
template<class K>
    pair<iterator, iterator>      equal_range(const K& x);
template<class K>
    pair<const_iterator, const_iterator> equal_range(const K& x) const;
};

template<class InputIterator,
        class Compare = less<iter-value-type<InputIterator>>,
        class Allocator = allocator<iter-value-type<InputIterator>>>
set(InputIterator, InputIterator,
    Compare = Compare(), Allocator = Allocator())
-> set<iter-value-type<InputIterator>, Compare, Allocator>;

template<class Key, class Compare = less<Key>, class Allocator = allocator<Key>>
set(initializer_list<Key>, Compare = Compare(), Allocator = Allocator())
-> set<Key, Compare, Allocator>;

template<class InputIterator, class Allocator>
set(InputIterator, InputIterator, Allocator)
-> set<iter-value-type<InputIterator>,
    less<iter-value-type<InputIterator>>, Allocator>;

template<class Key, class Allocator>
set(initializer_list<Key>, Allocator) -> set<Key, less<Key>, Allocator>;

// swap
template<class Key, class Compare, class Allocator>
void swap(set<Key, Compare, Allocator>& x,
    set<Key, Compare, Allocator>& y)

```

```

        noexcept(noexcept(x.swap(y)));
    }

```

27.4.6.2 Constructors, copy, and assignment

[set.cons]

```
explicit set(const Compare& comp, const Allocator& = Allocator());
```

1 *Effects:* Constructs an empty set using the specified comparison objects and allocator.

2 *Complexity:* Constant.

```

template<class InputIterator>
set(InputIterator first, InputIterator last,
    const Compare& comp = Compare(), const Allocator& = Allocator());

```

3 *Effects:* Constructs an empty set using the specified comparison object and allocator, and inserts elements from the range [first, last).

4 *Complexity:* Linear in N if the range [first, last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

27.4.7 Class template multiset

[multiset]

27.4.7.1 Overview

[multiset.overview]

1 A multiset is an associative container that supports equivalent keys (possibly contains multiple copies of the same key value) and provides for fast retrieval of the keys themselves. The multiset class supports bidirectional iterators.

2 A multiset satisfies all of the requirements of a container, of a reversible container (27.2), of an associative container (27.2.6), and of an allocator-aware container (Table 84). multiset also provides most operations described in 27.2.6 for duplicate keys. This means that a multiset supports the a_eq operations in 27.2.6 but not the a_uniq operations. For a multiset<Key> both the key_type and value_type are Key. Descriptions are provided here only for operations on multiset that are not described in one of these tables and for operations where there is additional semantic information.

```

namespace std {
    template<class Key, class Compare = less<Key>,
            class Allocator = allocator<Key>>
    class multiset {
    public:
        // types
        using key_type           = Key;
        using key_compare        = Compare;
        using value_type         = Key;
        using value_compare      = Compare;
        using allocator_type     = Allocator;
        using pointer            = typename allocator_traits<Allocator>::pointer;
        using const_pointer      = typename allocator_traits<Allocator>::const_pointer;
        using reference          = value_type&;
        using const_reference     = const value_type&;
        using size_type          = implementation-defined; // see 27.2
        using difference_type    = implementation-defined; // see 27.2
        using iterator           = implementation-defined; // see 27.2
        using const_iterator     = implementation-defined; // see 27.2
        using reverse_iterator   = std::reverse_iterator<iterator>;
        using const_reverse_iterator = std::reverse_iterator<const_iterator>;
        using node_type          = unspecified;

        // 27.4.7.2, construct/copy/destroy
        multiset() : multiset(Compare()) { }
        explicit multiset(const Compare& comp, const Allocator& = Allocator());
        template<class InputIterator>
            multiset(InputIterator first, InputIterator last,
                    const Compare& comp = Compare(), const Allocator& = Allocator());
        multiset(const multiset& x);
        multiset(multiset&& x);
        explicit multiset(const Allocator&);

```

```

multiset(const multiset&, const Allocator&);
multiset(multiset&&, const Allocator&);
multiset(initializer_list<value_type>, const Compare& = Compare(),
          const Allocator& = Allocator());
template<class InputIterator>
    multiset(InputIterator first, InputIterator last, const Allocator& a)
        : multiset(first, last, Compare(), a) { }
multiset(initializer_list<value_type> il, const Allocator& a)
    : multiset(il, Compare(), a) { }
~multiset();
multiset& operator=(const multiset& x);
multiset& operator=(multiset&& x)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_move_assignable_v<Compare>);
multiset& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator          begin() noexcept;
const_iterator    begin() const noexcept;
iterator          end() noexcept;
const_iterator    end() const noexcept;

reverse_iterator  rbegin() noexcept;
const_reverse_iterator rbegin() const noexcept;
reverse_iterator  rend() noexcept;
const_reverse_iterator rend() const noexcept;

const_iterator    cbegin() const noexcept;
const_iterator    cend() const noexcept;
const_reverse_iterator crbegin() const noexcept;
const_reverse_iterator crend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// modifiers
template<class... Args> iterator emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
iterator insert(const value_type& x);
iterator insert(value_type&& x);
iterator insert(const_iterator position, const value_type& x);
iterator insert(const_iterator position, value_type&& x);
template<class InputIterator>
    void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
iterator insert(node_type&& nh);
iterator insert(const_iterator hint, node_type&& nh);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& x);
iterator erase(const_iterator first, const_iterator last);
void swap(multiset&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_swappable_v<Compare>);
void clear() noexcept;

```

```

template<class C2>
    void merge(multiset<Key, C2, Allocator>& source);
template<class C2>
    void merge(multiset<Key, C2, Allocator>&& source);
template<class C2>
    void merge(set<Key, C2, Allocator>& source);
template<class C2>
    void merge(set<Key, C2, Allocator>&& source);

// observers
key_compare key_comp() const;
value_compare value_comp() const;

// set operations
iterator      find(const key_type& x);
const_iterator find(const key_type& x) const;
template<class K> iterator      find(const K& x);
template<class K> const_iterator find(const K& x) const;

size_type      count(const key_type& x) const;
template<class K> size_type count(const K& x) const;

bool           contains(const key_type& x) const;
template<class K> bool contains(const K& x) const;

iterator      lower_bound(const key_type& x);
const_iterator lower_bound(const key_type& x) const;
template<class K> iterator      lower_bound(const K& x);
template<class K> const_iterator lower_bound(const K& x) const;

iterator      upper_bound(const key_type& x);
const_iterator upper_bound(const key_type& x) const;
template<class K> iterator      upper_bound(const K& x);
template<class K> const_iterator upper_bound(const K& x) const;

pair<iterator, iterator>      equal_range(const key_type& x);
pair<const_iterator, const_iterator> equal_range(const key_type& x) const;
template<class K>
    pair<iterator, iterator>      equal_range(const K& x);
template<class K>
    pair<const_iterator, const_iterator> equal_range(const K& x) const;
};

template<class InputIterator,
        class Compare = less<iter-value-type<InputIterator>>,
        class Allocator = allocator<iter-value-type<InputIterator>>>
    multiset(InputIterator, InputIterator,
            Compare = Compare(), Allocator = Allocator())
    -> multiset<iter-value-type<InputIterator>, Compare, Allocator>;

template<class Key, class Compare = less<Key>, class Allocator = allocator<Key>>
    multiset(initializer_list<Key>, Compare = Compare(), Allocator = Allocator())
    -> multiset<Key, Compare, Allocator>;

template<class InputIterator, class Allocator>
    multiset(InputIterator, InputIterator, Allocator)
    -> multiset<iter-value-type<InputIterator>,
        less<iter-value-type<InputIterator>>, Allocator>;

template<class Key, class Allocator>
    multiset(initializer_list<Key>, Allocator) -> multiset<Key, less<Key>, Allocator>;

```

```

// swap
template<class Key, class Compare, class Allocator>
void swap(multiset<Key, Compare, Allocator>& x,
          multiset<Key, Compare, Allocator>& y)
    noexcept(noexcept(x.swap(y)));
}

```

27.4.7.2 Constructors [multiset.cons]

```
explicit multiset(const Compare& comp, const Allocator& = Allocator());
```

1 *Effects:* Constructs an empty multiset using the specified comparison object and allocator.

2 *Complexity:* Constant.

```
template<class InputIterator>
multiset(InputIterator first, InputIterator last,
         const Compare& comp = Compare(), const Allocator& = Allocator());
```

3 *Effects:* Constructs an empty multiset using the specified comparison object and allocator, and inserts elements from the range [first, last).

4 *Complexity:* Linear in N if the range [first, last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

27.5 Unordered associative containers [unord]

27.5.1 In general [unord.general]

1 The header `<unordered_map>` defines the class templates `unordered_map` and `unordered_multimap`; the header `<unordered_set>` defines the class templates `unordered_set` and `unordered_multiset`.

2 The exposition-only alias templates *iter-value-type*, *iter-key-type*, *iter-mapped-type*, and *iter-to-alloc-type* defined in 27.4.1 may appear in deduction guides for unordered containers.

27.5.2 Header `<unordered_map>` synopsis [unord.map.syn]

```
#include <initializer_list>
```

```
namespace std {
// 27.5.4, class template unordered_map
template<class Key,
         class T,
         class Hash = hash<Key>,
         class Pred = equal_to<Key>,
         class Alloc = allocator<pair<const Key, T>>>
class unordered_map;

// 27.5.5, class template unordered_multimap
template<class Key,
         class T,
         class Hash = hash<Key>,
         class Pred = equal_to<Key>,
         class Alloc = allocator<pair<const Key, T>>>
class unordered_multimap;

template<class Key, class T, class Hash, class Pred, class Alloc>
bool operator==(const unordered_map<Key, T, Hash, Pred, Alloc>& a,
                const unordered_map<Key, T, Hash, Pred, Alloc>& b);
template<class Key, class T, class Hash, class Pred, class Alloc>
bool operator!=(const unordered_map<Key, T, Hash, Pred, Alloc>& a,
                const unordered_map<Key, T, Hash, Pred, Alloc>& b);

template<class Key, class T, class Hash, class Pred, class Alloc>
bool operator==(const unordered_multimap<Key, T, Hash, Pred, Alloc>& a,
                const unordered_multimap<Key, T, Hash, Pred, Alloc>& b);
template<class Key, class T, class Hash, class Pred, class Alloc>
bool operator!=(const unordered_multimap<Key, T, Hash, Pred, Alloc>& a,
                const unordered_multimap<Key, T, Hash, Pred, Alloc>& b);
}

```



```

template<class Key, class T, class Hash, class Pred, class Alloc>
void swap(unordered_map<Key, T, Hash, Pred, Alloc>& x,
          unordered_map<Key, T, Hash, Pred, Alloc>& y)
    noexcept(noexcept(x.swap(y)));

template<class Key, class T, class Hash, class Pred, class Alloc>
void swap(unordered_multimap<Key, T, Hash, Pred, Alloc>& x,
          unordered_multimap<Key, T, Hash, Pred, Alloc>& y)
    noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class Key,
             class T,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>>
    using unordered_map =
        std::unordered_map<Key, T, Hash, Pred,
                          polymorphic_allocator<pair<const Key, T>>>;
    template<class Key,
             class T,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>>
    using unordered_multimap =
        std::unordered_multimap<Key, T, Hash, Pred,
                                polymorphic_allocator<pair<const Key, T>>>;
}
}

```

27.5.3 Header <unordered_set> synopsis

[unord.set.syn]

```

#include <initializer_list>

namespace std {
    // 27.5.6, class template unordered_set
    template<class Key,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>,
             class Alloc = allocator<Key>>
    class unordered_set;

    // 27.5.7, class template unordered_multiset
    template<class Key,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>,
             class Alloc = allocator<Key>>
    class unordered_multiset;

    template<class Key, class Hash, class Pred, class Alloc>
    bool operator==(const unordered_set<Key, Hash, Pred, Alloc>& a,
                   const unordered_set<Key, Hash, Pred, Alloc>& b);
    template<class Key, class Hash, class Pred, class Alloc>
    bool operator!=(const unordered_set<Key, Hash, Pred, Alloc>& a,
                   const unordered_set<Key, Hash, Pred, Alloc>& b);

    template<class Key, class Hash, class Pred, class Alloc>
    bool operator==(const unordered_multiset<Key, Hash, Pred, Alloc>& a,
                   const unordered_multiset<Key, Hash, Pred, Alloc>& b);
    template<class Key, class Hash, class Pred, class Alloc>
    bool operator!=(const unordered_multiset<Key, Hash, Pred, Alloc>& a,
                   const unordered_multiset<Key, Hash, Pred, Alloc>& b);
}

```

```

template<class Key, class Hash, class Pred, class Alloc>
void swap(unordered_set<Key, Hash, Pred, Alloc>& x,
          unordered_set<Key, Hash, Pred, Alloc>& y)
    noexcept(noexcept(x.swap(y)));

template<class Key, class Hash, class Pred, class Alloc>
void swap(unordered_multiset<Key, Hash, Pred, Alloc>& x,
          unordered_multiset<Key, Hash, Pred, Alloc>& y)
    noexcept(noexcept(x.swap(y)));

namespace pmr {
    template<class Key,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>>
        using unordered_set = std::unordered_set<Key, Hash, Pred,
                                                polymorphic_allocator<Key>>;

    template<class Key,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>>
        using unordered_multiset = std::unordered_multiset<Key, Hash, Pred,
                                                            polymorphic_allocator<Key>>;
}
}

```

27.5.4 Class template unordered_map

[unord.map]

27.5.4.1 Overview

[unord.map.overview]

- ¹ An `unordered_map` is an unordered associative container that supports unique keys (an `unordered_map` contains at most one of each key value) and that associates values of another type `mapped_type` with the keys. The `unordered_map` class supports forward iterators.
- ² An `unordered_map` satisfies all of the requirements of a container, of an unordered associative container, and of an allocator-aware container (Table 84). It provides the operations described in the preceding requirements table for unique keys; that is, an `unordered_map` supports the `a_uniq` operations in that table, not the `a_eq` operations. For an `unordered_map<Key, T>` the key type is `Key`, the mapped type is `T`, and the value type is `pair<const Key, T>`.
- ³ This subclause only describes operations on `unordered_map` that are not described in one of the requirement tables, or for which there is additional semantic information.

```

namespace std {
    template<class Key,
             class T,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>,
             class Allocator = allocator<pair<const Key, T>>>
        class unordered_map {
        public:
            // types
            using key_type           = Key;
            using mapped_type        = T;
            using value_type         = pair<const Key, T>;
            using hasher             = Hash;
            using key_equal          = Pred;
            using allocator_type     = Allocator;
            using pointer            = typename allocator_traits<Allocator>::pointer;
            using const_pointer      = typename allocator_traits<Allocator>::const_pointer;
            using reference          = value_type&;
            using const_reference    = const value_type&;
            using size_type          = implementation-defined; // see 27.2
            using difference_type    = implementation-defined; // see 27.2

            using iterator           = implementation-defined; // see 27.2
            using const_iterator     = implementation-defined; // see 27.2

```

```

using local_iterator      = implementation-defined; // see 27.2
using const_local_iterator = implementation-defined; // see 27.2
using node_type           = unspecified;
using insert_return_type  = INSERT_RETURN_TYPE<iterator, node_type>;

// 27.5.4.2, construct/copy/destroy
unordered_map();
explicit unordered_map(size_type n,
                      const hasher& hf = hasher(),
                      const key_equal& eql = key_equal(),
                      const allocator_type& a = allocator_type());
template<class InputIterator>
  unordered_map(InputIterator f, InputIterator l,
               size_type n = see below,
               const hasher& hf = hasher(),
               const key_equal& eql = key_equal(),
               const allocator_type& a = allocator_type());
unordered_map(const unordered_map&);
unordered_map(unordered_map&&);
explicit unordered_map(const Allocator&);
unordered_map(const unordered_map&, const Allocator&);
unordered_map(unordered_map&&, const Allocator&);
unordered_map(initializer_list<value_type> il,
              size_type n = see below,
              const hasher& hf = hasher(),
              const key_equal& eql = key_equal(),
              const allocator_type& a = allocator_type());
unordered_map(size_type n, const allocator_type& a)
  : unordered_map(n, hasher(), key_equal(), a) { }
unordered_map(size_type n, const hasher& hf, const allocator_type& a)
  : unordered_map(n, hf, key_equal(), a) { }
template<class InputIterator>
  unordered_map(InputIterator f, InputIterator l, size_type n, const allocator_type& a)
    : unordered_map(f, l, n, hasher(), key_equal(), a) { }
template<class InputIterator>
  unordered_map(InputIterator f, InputIterator l, size_type n, const hasher& hf,
               const allocator_type& a)
    : unordered_map(f, l, n, hf, key_equal(), a) { }
unordered_map(initializer_list<value_type> il, size_type n, const allocator_type& a)
  : unordered_map(il, n, hasher(), key_equal(), a) { }
unordered_map(initializer_list<value_type> il, size_type n, const hasher& hf,
              const allocator_type& a)
  : unordered_map(il, n, hf, key_equal(), a) { }
~unordered_map();
unordered_map& operator=(const unordered_map&);
unordered_map& operator=(unordered_map&&)
  noexcept(allocator_traits<Allocator>::is_always_equal::value &&
           is_nothrow_move_assignable_v<Hash> &&
           is_nothrow_move_assignable_v<Pred>);
unordered_map& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator      begin() noexcept;
const_iterator begin() const noexcept;
iterator      end() noexcept;
const_iterator end() const noexcept;
const_iterator cbegin() const noexcept;
const_iterator cend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

```

```

// 27.5.4.4, modifiers
template<class... Args> pair<iterator, bool> emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
pair<iterator, bool> insert(const value_type& obj);
pair<iterator, bool> insert(value_type&& obj);
template<class P> pair<iterator, bool> insert(P&& obj);
iterator      insert(const_iterator hint, const value_type& obj);
iterator      insert(const_iterator hint, value_type&& obj);
template<class P> iterator insert(const_iterator hint, P&& obj);
template<class InputIterator> void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
insert_return_type insert(node_type&& nh);
iterator      insert(const_iterator hint, node_type&& nh);

template<class... Args>
  pair<iterator, bool> try_emplace(const key_type& k, Args&&... args);
template<class... Args>
  pair<iterator, bool> try_emplace(key_type&& k, Args&&... args);
template<class... Args>
  iterator try_emplace(const_iterator hint, const key_type& k, Args&&... args);
template<class... Args>
  iterator try_emplace(const_iterator hint, key_type&& k, Args&&... args);
template<class M>
  pair<iterator, bool> insert_or_assign(const key_type& k, M&& obj);
template<class M>
  pair<iterator, bool> insert_or_assign(key_type&& k, M&& obj);
template<class M>
  iterator insert_or_assign(const_iterator hint, const key_type& k, M&& obj);
template<class M>
  iterator insert_or_assign(const_iterator hint, key_type&& k, M&& obj);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& k);
iterator erase(const_iterator first, const_iterator last);
void      swap(unordered_map&)
  noexcept(allocator_traits<Allocator>::is_always_equal::value &&
           is_nothrow_swappable_v<Hash> &&
           is_nothrow_swappable_v<Pred>);
void      clear() noexcept;

template<class H2, class P2>
  void merge(unordered_map<Key, T, H2, P2, Allocator>& source);
template<class H2, class P2>
  void merge(unordered_map<Key, T, H2, P2, Allocator>&& source);
template<class H2, class P2>
  void merge(unordered_multimap<Key, T, H2, P2, Allocator>& source);
template<class H2, class P2>
  void merge(unordered_multimap<Key, T, H2, P2, Allocator>&& source);

// observers
hasher hash_function() const;
key_equal key_eq() const;

// map operations
iterator      find(const key_type& k);
const_iterator find(const key_type& k) const;
size_type     count(const key_type& k) const;
bool         contains(const key_type& k) const;
pair<iterator, iterator> equal_range(const key_type& k);
pair<const_iterator, const_iterator> equal_range(const key_type& k) const;

```

```

// 27.5.4.3, element access
mapped_type& operator[](const key_type& k);
mapped_type& operator[](key_type&& k);
mapped_type& at(const key_type& k);
const mapped_type& at(const key_type& k) const;

// bucket interface
size_type bucket_count() const noexcept;
size_type max_bucket_count() const noexcept;
size_type bucket_size(size_type n) const;
size_type bucket(const key_type& k) const;
local_iterator begin(size_type n);
const_local_iterator begin(size_type n) const;
local_iterator end(size_type n);
const_local_iterator end(size_type n) const;
const_local_iterator cbegin(size_type n) const;
const_local_iterator cend(size_type n) const;

// hash policy
float load_factor() const noexcept;
float max_load_factor() const noexcept;
void max_load_factor(float z);
void rehash(size_type n);
void reserve(size_type n);
};

template<class InputIterator,
        class Hash = hash<iter-key-type<InputIterator>>,
        class Pred = equal_to<iter-key-type<InputIterator>>,
        class Allocator = allocator<iter-to-alloc-type<InputIterator>>>
unordered_map(InputIterator, InputIterator, typename see below::size_type = see below,
             Hash = Hash(), Pred = Pred(), Allocator = Allocator())
-> unordered_map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>, Hash, Pred,
                Allocator>;

template<class Key, class T, class Hash = hash<Key>,
        class Pred = equal_to<Key>, class Allocator = allocator<pair<const Key, T>>>
unordered_map(initializer_list<pair<const Key, T>>,
             typename see below::size_type = see below, Hash = Hash(),
             Pred = Pred(), Allocator = Allocator())
-> unordered_map<Key, T, Hash, Pred, Allocator>;

template<class InputIterator, class Allocator>
unordered_map(InputIterator, InputIterator, typename see below::size_type, Allocator)
-> unordered_map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
                hash<iter-key-type<InputIterator>>,
                equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class InputIterator, class Allocator>
unordered_map(InputIterator, InputIterator, Allocator)
-> unordered_map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
                hash<iter-key-type<InputIterator>>,
                equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class InputIterator, class Hash, class Allocator>
unordered_map(InputIterator, InputIterator, typename see below::size_type, Hash, Allocator)
-> unordered_map<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>, Hash,
                equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class Key, class T, class Allocator>
unordered_map(initializer_list<pair<const Key, T>>, typename see below::size_type,
             Allocator)
-> unordered_map<Key, T, hash<Key>, equal_to<Key>, Allocator>;

```

```

template<class Key, class T, class Allocator>
    unordered_map(initializer_list<pair<const Key, T>>, Allocator)
        -> unordered_map<Key, T, hash<Key>, equal_to<Key>, Allocator>;

template<class Key, class T, class Hash, class Allocator>
    unordered_map(initializer_list<pair<const Key, T>>, typename see below::size_type, Hash,
        Allocator)
        -> unordered_map<Key, T, Hash, equal_to<Key>, Allocator>;

// swap
template<class Key, class T, class Hash, class Pred, class Alloc>
    void swap(unordered_map<Key, T, Hash, Pred, Alloc>& x,
        unordered_map<Key, T, Hash, Pred, Alloc>& y)
        noexcept(noexcept(x.swap(y)));
}

```

- ⁴ A `size_type` parameter type in an `unordered_map` deduction guide refers to the `size_type` member type of the type deduced by the deduction guide.

27.5.4.2 Constructors

[unord.map.cnstr]

```

unordered_map() : unordered_map(size_type(see below)) { }
explicit unordered_map(size_type n,
    const hasher& hf = hasher(),
    const key_equal& eql = key_equal(),
    const allocator_type& a = allocator_type());

```

- ¹ *Effects:* Constructs an empty `unordered_map` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. For the default constructor, the number of buckets is implementation-defined. `max_load_factor()` returns 1.0.
- ² *Complexity:* Constant.

```

template<class InputIterator>
    unordered_map(InputIterator f, InputIterator l,
        size_type n = see below,
        const hasher& hf = hasher(),
        const key_equal& eql = key_equal(),
        const allocator_type& a = allocator_type());
unordered_map(initializer_list<value_type> il,
    size_type n = see below,
    const hasher& hf = hasher(),
    const key_equal& eql = key_equal(),
    const allocator_type& a = allocator_type());

```

- ³ *Effects:* Constructs an empty `unordered_map` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. If `n` is not provided, the number of buckets is implementation-defined. Then inserts elements from the range `[f, l)` for the first form, or from the range `[il.begin(), il.end())` for the second form. `max_load_factor()` returns 1.0.
- ⁴ *Complexity:* Average case linear, worst case quadratic.

27.5.4.3 Element access

[unord.map.elem]

```
mapped_type& operator[](const key_type& k);
```

- ¹ *Effects:* Equivalent to: `return try_emplace(k).first->second;`

```
mapped_type& operator[](key_type&& k);
```

- ² *Effects:* Equivalent to: `return try_emplace(move(k)).first->second;`

```
mapped_type& at(const key_type& k);
const mapped_type& at(const key_type& k) const;
```

- ³ *Returns:* A reference to `x.second`, where `x` is the (unique) element whose key is equivalent to `k`.
- ⁴ *Throws:* An exception object of type `out_of_range` if no such element is present.

27.5.4.4 Modifiers

[unord.map.modifiers]

```

template<class P>
  pair<iterator, bool> insert(P&& obj);
1   Effects: Equivalent to: return emplace(std::forward<P>(obj));
2   Remarks: This signature shall not participate in overload resolution unless is_constructible_
    v<value_type, P&&> is true.

template<class P>
  iterator insert(const_iterator hint, P&& obj);
3   Effects: Equivalent to: return emplace_hint(hint, std::forward<P>(obj));
4   Remarks: This signature shall not participate in overload resolution unless is_constructible_
    v<value_type, P&&> is true.

template<class... Args>
  pair<iterator, bool> try_emplace(const key_type& k, Args&&... args);
template<class... Args>
  iterator try_emplace(const_iterator hint, const key_type& k, Args&&... args);
5   Requires: value_type shall be Cpp17EmplaceConstructible into unordered_map from piecewise_con-
    struct, forward_as_tuple(k), forward_as_tuple(std::forward<Args>(args)...).
6   Effects: If the map already contains an element whose key is equivalent to k, there is no effect. Otherwise
    inserts an object of type value_type constructed with piecewise_construct, forward_as_tuple(k),
    forward_as_tuple(std::forward<Args>(args)...).
7   Returns: In the first overload, the bool component of the returned pair is true if and only if the
    insertion took place. The returned iterator points to the map element whose key is equivalent to k.
8   Complexity: The same as emplace and emplace_hint, respectively.

template<class... Args>
  pair<iterator, bool> try_emplace(key_type&& k, Args&&... args);
template<class... Args>
  iterator try_emplace(const_iterator hint, key_type&& k, Args&&... args);
9   Requires: value_type shall be Cpp17EmplaceConstructible into unordered_map from piecewise_con-
    struct, forward_as_tuple(std::move(k)), forward_as_tuple(std::forward<Args>(args)...).
10  Effects: If the map already contains an element whose key is equivalent to k, there is no effect.
    Otherwise inserts an object of type value_type constructed with piecewise_construct, forward_
    as_tuple(std::move(k)), forward_as_tuple(std::forward<Args>(args)...).
11  Returns: In the first overload, the bool component of the returned pair is true if and only if the
    insertion took place. The returned iterator points to the map element whose key is equivalent to k.
12  Complexity: The same as emplace and emplace_hint, respectively.

template<class M>
  pair<iterator, bool> insert_or_assign(const key_type& k, M&& obj);
template<class M>
  iterator insert_or_assign(const_iterator hint, const key_type& k, M&& obj);
13  Requires: is_assignable_v<mapped_type&, M&&> shall be true. value_type shall be Cpp17Emplace-
    Constructible into unordered_map from k, std::forward<M>(obj).
14  Effects: If the map already contains an element e whose key is equivalent to k, assigns std::for-
    ward<M>(obj) to e.second. Otherwise inserts an object of type value_type constructed with k,
    std::forward<M>(obj).
15  Returns: In the first overload, the bool component of the returned pair is true if and only if the
    insertion took place. The returned iterator points to the map element whose key is equivalent to k.
16  Complexity: The same as emplace and emplace_hint, respectively.

template<class M>
  pair<iterator, bool> insert_or_assign(key_type&& k, M&& obj);

```

```
template<class M>
    iterator insert_or_assign(const_iterator hint, key_type&& k, M&& obj);
```

17 *Requires:* `is_assignable_v<mapped_type&, M&&>` shall be true. `value_type` shall be *Cpp17EmplaceConstructible* into `unordered_map` from `std::move(k)`, `std::forward<M>(obj)`.

18 *Effects:* If the map already contains an element `e` whose key is equivalent to `k`, assigns `std::forward<M>(obj)` to `e.second`. Otherwise inserts an object of type `value_type` constructed with `std::move(k)`, `std::forward<M>(obj)`.

19 *Returns:* In the first overload, the `bool` component of the returned pair is `true` if and only if the insertion took place. The returned iterator points to the map element whose key is equivalent to `k`.

20 *Complexity:* The same as `emplace` and `emplace_hint`, respectively.

27.5.5 Class template `unordered_multimap` [unord.multimap]

27.5.5.1 Overview [unord.multimap.overview]

- 1 An `unordered_multimap` is an unordered associative container that supports equivalent keys (an instance of `unordered_multimap` may contain multiple copies of each key value) and that associates values of another type `mapped_type` with the keys. The `unordered_multimap` class supports forward iterators.
- 2 An `unordered_multimap` satisfies all of the requirements of a container, of an unordered associative container, and of an allocator-aware container (Table 84). It provides the operations described in the preceding requirements table for equivalent keys; that is, an `unordered_multimap` supports the `a_eq` operations in that table, not the `a_uniq` operations. For an `unordered_multimap<Key, T>` the `key_type` is `Key`, the `mapped_type` is `T`, and the `value_type` is `pair<const Key, T>`.
- 3 This subclause only describes operations on `unordered_multimap` that are not described in one of the requirement tables, or for which there is additional semantic information.

```
namespace std {
    template<class Key,
             class T,
             class Hash = hash<Key>,
             class Pred = equal_to<Key>,
             class Allocator = allocator<pair<const Key, T>>>
    class unordered_multimap {
    public:
        // types
        using key_type           = Key;
        using mapped_type       = T;
        using value_type        = pair<const Key, T>;
        using hasher            = Hash;
        using key_equal         = Pred;
        using allocator_type    = Allocator;
        using pointer           = typename allocator_traits<Allocator>::pointer;
        using const_pointer     = typename allocator_traits<Allocator>::const_pointer;
        using reference         = value_type&;
        using const_reference   = const value_type&;
        using size_type         = implementation-defined; // see 27.2
        using difference_type   = implementation-defined; // see 27.2

        using iterator          = implementation-defined; // see 27.2
        using const_iterator    = implementation-defined; // see 27.2
        using local_iterator    = implementation-defined; // see 27.2
        using const_local_iterator = implementation-defined; // see 27.2
        using node_type         = unspecified;

        // 27.5.5.2, construct/copy/destroy
        unordered_multimap();
        explicit unordered_multimap(size_type n,
                                   const hasher& hf = hasher(),
                                   const key_equal& eql = key_equal(),
                                   const allocator_type& a = allocator_type());
```



```

template<class InputIterator>
    unordered_multimap(InputIterator f, InputIterator l,
                      size_type n = see below,
                      const hasher& hf = hasher(),
                      const key_equal& eql = key_equal(),
                      const allocator_type& a = allocator_type());
unordered_multimap(const unordered_multimap&);
unordered_multimap(unordered_multimap&&);
explicit unordered_multimap(const Allocator&);
unordered_multimap(const unordered_multimap&, const Allocator&);
unordered_multimap(unordered_multimap&&, const Allocator&);
unordered_multimap(initializer_list<value_type> il,
                  size_type n = see below,
                  const hasher& hf = hasher(),
                  const key_equal& eql = key_equal(),
                  const allocator_type& a = allocator_type());
unordered_multimap(size_type n, const allocator_type& a)
    : unordered_multimap(n, hasher(), key_equal(), a) { }
unordered_multimap(size_type n, const hasher& hf, const allocator_type& a)
    : unordered_multimap(n, hf, key_equal(), a) { }
template<class InputIterator>
    unordered_multimap(InputIterator f, InputIterator l, size_type n, const allocator_type& a)
        : unordered_multimap(f, l, n, hasher(), key_equal(), a) { }
template<class InputIterator>
    unordered_multimap(InputIterator f, InputIterator l, size_type n, const hasher& hf,
                      const allocator_type& a)
        : unordered_multimap(f, l, n, hf, key_equal(), a) { }
unordered_multimap(initializer_list<value_type> il, size_type n, const allocator_type& a)
    : unordered_multimap(il, n, hasher(), key_equal(), a) { }
unordered_multimap(initializer_list<value_type> il, size_type n, const hasher& hf,
                  const allocator_type& a)
    : unordered_multimap(il, n, hf, key_equal(), a) { }
~unordered_multimap();
unordered_multimap& operator=(const unordered_multimap&);
unordered_multimap& operator=(unordered_multimap&&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_move_assignable_v<Hash> &&
             is_nothrow_move_assignable_v<Pred>);
unordered_multimap& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator      begin() noexcept;
const_iterator begin() const noexcept;
iterator      end() noexcept;
const_iterator end() const noexcept;
const_iterator cbegin() const noexcept;
const_iterator cend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// 27.5.5.3, modifiers
template<class... Args> iterator emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
iterator insert(const value_type& obj);
iterator insert(value_type&& obj);
template<class P> iterator insert(P&& obj);
iterator insert(const_iterator hint, const value_type& obj);
iterator insert(const_iterator hint, value_type&& obj);
template<class P> iterator insert(const_iterator hint, P&& obj);
template<class InputIterator> void insert(InputIterator first, InputIterator last);

```

```

void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
iterator insert(node_type&& nh);
iterator insert(const_iterator hint, node_type&& nh);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& k);
iterator erase(const_iterator first, const_iterator last);
void swap(unordered_multimap&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
              is_nothrow_swappable_v<Hash> &&
              is_nothrow_swappable_v<Pred>);
void clear() noexcept;

template<class H2, class P2>
    void merge(unordered_multimap<Key, T, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_multimap<Key, T, H2, P2, Allocator>&& source);
template<class H2, class P2>
    void merge(unordered_map<Key, T, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_map<Key, T, H2, P2, Allocator>&& source);

// observers
hasher hash_function() const;
key_equal key_eq() const;

// map operations
iterator find(const key_type& k);
const_iterator find(const key_type& k) const;
size_type count(const key_type& k) const;
bool contains(const key_type& k) const;
pair<iterator, iterator> equal_range(const key_type& k);
pair<const_iterator, const_iterator> equal_range(const key_type& k) const;

// bucket interface
size_type bucket_count() const noexcept;
size_type max_bucket_count() const noexcept;
size_type bucket_size(size_type n) const;
size_type bucket(const key_type& k) const;
local_iterator begin(size_type n);
const_local_iterator begin(size_type n) const;
local_iterator end(size_type n);
const_local_iterator end(size_type n) const;
const_local_iterator cbegin(size_type n) const;
const_local_iterator cend(size_type n) const;

// hash policy
float load_factor() const noexcept;
float max_load_factor() const noexcept;
void max_load_factor(float z);
void rehash(size_type n);
void reserve(size_type n);
};

template<class InputIterator,
        class Hash = hash<iter-key-type<InputIterator>>,
        class Pred = equal_to<iter-key-type<InputIterator>>,
        class Allocator = allocator<iter-to-alloc-type<InputIterator>>>>
    unordered_multimap(InputIterator, InputIterator,
                      typename see below::size_type = see below,

```

```

        Hash = Hash(), Pred = Pred(), Allocator = Allocator()
    -> unordered_multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
        Hash, Pred, Allocator>;

template<class Key, class T, class Hash = hash<Key>,
        class Pred = equal_to<Key>, class Allocator = allocator<pair<const Key, T>>>
    unordered_multimap(initializer_list<pair<const Key, T>>,
        typename see below::size_type = see below,
        Hash = Hash(), Pred = Pred(), Allocator = Allocator())
    -> unordered_multimap<Key, T, Hash, Pred, Allocator>;

template<class InputIterator, class Allocator>
    unordered_multimap(InputIterator, InputIterator, typename see below::size_type, Allocator)
    -> unordered_multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
        hash<iter-key-type<InputIterator>>,
        equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class InputIterator, class Allocator>
    unordered_multimap(InputIterator, InputIterator, Allocator)
    -> unordered_multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>,
        hash<iter-key-type<InputIterator>>,
        equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class InputIterator, class Hash, class Allocator>
    unordered_multimap(InputIterator, InputIterator, typename see below::size_type, Hash,
        Allocator)
    -> unordered_multimap<iter-key-type<InputIterator>, iter-mapped-type<InputIterator>, Hash,
        equal_to<iter-key-type<InputIterator>>, Allocator>;

template<class Key, class T, class Allocator>
    unordered_multimap(initializer_list<pair<const Key, T>>, typename see below::size_type,
        Allocator)
    -> unordered_multimap<Key, T, hash<Key>, equal_to<Key>, Allocator>;

template<class Key, class T, class Allocator>
    unordered_multimap(initializer_list<pair<const Key, T>>, Allocator)
    -> unordered_multimap<Key, T, hash<Key>, equal_to<Key>, Allocator>;

template<class Key, class T, class Hash, class Allocator>
    unordered_multimap(initializer_list<pair<const Key, T>>, typename see below::size_type,
        Hash, Allocator)
    -> unordered_multimap<Key, T, Hash, equal_to<Key>, Allocator>;

// swap
template<class Key, class T, class Hash, class Pred, class Alloc>
    void swap(unordered_multimap<Key, T, Hash, Pred, Alloc>& x,
        unordered_multimap<Key, T, Hash, Pred, Alloc>& y)
        noexcept(noexcept(x.swap(y)));
}

```

- ⁴ A `size_type` parameter type in an `unordered_multimap` deduction guide refers to the `size_type` member type of the type deduced by the deduction guide.

27.5.5.2 Constructors

[unord.multimap.cnstr]

```

unordered_multimap() : unordered_multimap(size_type(see below)) { }
explicit unordered_multimap(size_type n,
    const hasher& hf = hasher(),
    const key_equal& eql = key_equal(),
    const allocator_type& a = allocator_type());

```

- ¹ *Effects:* Constructs an empty `unordered_multimap` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. For the default constructor, the number of buckets is implementation-defined. `max_load_factor()` returns 1.0.

- ² *Complexity:* Constant.

```

template<class InputIterator>
  unordered_multimap(InputIterator f, InputIterator l,
                    size_type n = see below,
                    const hasher& hf = hasher(),
                    const key_equal& eql = key_equal(),
                    const allocator_type& a = allocator_type());
unordered_multimap(initializer_list<value_type> il,
                  size_type n = see below,
                  const hasher& hf = hasher(),
                  const key_equal& eql = key_equal(),
                  const allocator_type& a = allocator_type());

```

3 *Effects:* Constructs an empty `unordered_multimap` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. If `n` is not provided, the number of buckets is implementation-defined. Then inserts elements from the range `[f, l)` for the first form, or from the range `[il.begin(), il.end())` for the second form. `max_load_factor()` returns 1.0.

4 *Complexity:* Average case linear, worst case quadratic.

27.5.5.3 Modifiers

[unord.multimap.modifiers]

```

template<class P>
  iterator insert(P&& obj);

```

1 *Effects:* Equivalent to: `return emplace(std::forward<P>(obj));`

2 *Remarks:* This signature shall not participate in overload resolution unless `is_constructible_v<value_type, P&&>` is true.

```

template<class P>
  iterator insert(const_iterator hint, P&& obj);

```

3 *Effects:* Equivalent to: `return emplace_hint(hint, std::forward<P>(obj));`

4 *Remarks:* This signature shall not participate in overload resolution unless `is_constructible_v<value_type, P&&>` is true.

27.5.6 Class template `unordered_set`

[unord.set]

27.5.6.1 Overview

[unord.set.overview]

1 An `unordered_set` is an unordered associative container that supports unique keys (an `unordered_set` contains at most one of each key value) and in which the elements' keys are the elements themselves. The `unordered_set` class supports forward iterators.

2 An `unordered_set` satisfies all of the requirements of a container, of an unordered associative container, and of an allocator-aware container (Table 84). It provides the operations described in the preceding requirements table for unique keys; that is, an `unordered_set` supports the `a_uniq` operations in that table, not the `a_eq` operations. For an `unordered_set<Key>` the key type and the value type are both `Key`. The `iterator` and `const_iterator` types are both constant iterator types. It is unspecified whether they are the same type.

3 This subclause only describes operations on `unordered_set` that are not described in one of the requirement tables, or for which there is additional semantic information.

```

namespace std {
  template<class Key,
           class Hash = hash<Key>,
           class Pred = equal_to<Key>,
           class Allocator = allocator<Key>>
  class unordered_set {
  public:
    // types
    using key_type           = Key;
    using value_type        = Key;
    using hasher             = Hash;
    using key_equal         = Pred;
    using allocator_type    = Allocator;
    using pointer           = typename allocator_traits<Allocator>::pointer;
    using const_pointer     = typename allocator_traits<Allocator>::const_pointer;

```

```

using reference          = value_type&;
using const_reference   = const value_type&;
using size_type         = implementation-defined; // see 27.2
using difference_type   = implementation-defined; // see 27.2

using iterator          = implementation-defined; // see 27.2
using const_iterator    = implementation-defined; // see 27.2
using local_iterator    = implementation-defined; // see 27.2
using const_local_iterator = implementation-defined; // see 27.2
using node_type         = unspecified;
using insert_return_type = INSERT_RETURN_TYPE<iterator, node_type>;

// 27.5.6.2, construct/copy/destroy
unordered_set();
explicit unordered_set(size_type n,
                      const hasher& hf = hasher(),
                      const key_equal& eql = key_equal(),
                      const allocator_type& a = allocator_type());
template<class InputIterator>
  unordered_set(InputIterator f, InputIterator l,
                size_type n = see below,
                const hasher& hf = hasher(),
                const key_equal& eql = key_equal(),
                const allocator_type& a = allocator_type());
unordered_set(const unordered_set&);
unordered_set(unordered_set&&);
explicit unordered_set(const Allocator&);
unordered_set(const unordered_set&, const Allocator&);
unordered_set(unordered_set&&, const Allocator&);
unordered_set(initializer_list<value_type> il,
              size_type n = see below,
              const hasher& hf = hasher(),
              const key_equal& eql = key_equal(),
              const allocator_type& a = allocator_type());
unordered_set(size_type n, const allocator_type& a)
  : unordered_set(n, hasher(), key_equal(), a) { }
unordered_set(size_type n, const hasher& hf, const allocator_type& a)
  : unordered_set(n, hf, key_equal(), a) { }
template<class InputIterator>
  unordered_set(InputIterator f, InputIterator l, size_type n, const allocator_type& a)
    : unordered_set(f, l, n, hasher(), key_equal(), a) { }
template<class InputIterator>
  unordered_set(InputIterator f, InputIterator l, size_type n, const hasher& hf,
                const allocator_type& a)
    : unordered_set(f, l, n, hf, key_equal(), a) { }
unordered_set(initializer_list<value_type> il, size_type n, const allocator_type& a)
  : unordered_set(il, n, hasher(), key_equal(), a) { }
unordered_set(initializer_list<value_type> il, size_type n, const hasher& hf,
              const allocator_type& a)
  : unordered_set(il, n, hf, key_equal(), a) { }
~unordered_set();
unordered_set& operator=(const unordered_set&);
unordered_set& operator=(unordered_set&&)
  noexcept(allocator_traits<Allocator>::is_always_equal::value &&
           is_nothrow_move_assignable_v<Hash> &&
           is_nothrow_move_assignable_v<Pred>);
unordered_set& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator      begin() noexcept;
const_iterator begin() const noexcept;
iterator      end() noexcept;
const_iterator end() const noexcept;

```

```

const_iterator cbegin() const noexcept;
const_iterator cend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

// modifiers
template<class... Args> pair<iterator, bool> emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
pair<iterator, bool> insert(const value_type& obj);
pair<iterator, bool> insert(value_type&& obj);
iterator insert(const_iterator hint, const value_type& obj);
iterator insert(const_iterator hint, value_type&& obj);
template<class InputIterator> void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
insert_return_type insert(node_type&& nh);
iterator          insert(const_iterator hint, node_type&& nh);

iterator  erase(iterator position);
iterator  erase(const_iterator position);
size_type erase(const key_type& k);
iterator  erase(const_iterator first, const_iterator last);
void      swap(unordered_set&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_swappable_v<Hash> &&
             is_nothrow_swappable_v<Pred>);
void      clear() noexcept;

template<class H2, class P2>
    void merge(unordered_set<Key, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_set<Key, H2, P2, Allocator>&& source);
template<class H2, class P2>
    void merge(unordered_multiset<Key, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_multiset<Key, H2, P2, Allocator>&& source);

// observers
hasher hash_function() const;
key_equal key_eq() const;

// set operations
iterator          find(const key_type& k);
const_iterator    find(const key_type& k) const;
size_type         count(const key_type& k) const;
bool              contains(const key_type& k) const;
pair<iterator, iterator> equal_range(const key_type& k);
pair<const_iterator, const_iterator> equal_range(const key_type& k) const;

// bucket interface
size_type bucket_count() const noexcept;
size_type max_bucket_count() const noexcept;
size_type bucket_size(size_type n) const;
size_type bucket(const key_type& k) const;
local_iterator begin(size_type n);
const_local_iterator begin(size_type n) const;
local_iterator end(size_type n);
const_local_iterator end(size_type n) const;
const_local_iterator cbegin(size_type n) const;

```

```

const_local_iterator cend(size_type n) const;

// hash policy
float load_factor() const noexcept;
float max_load_factor() const noexcept;
void max_load_factor(float z);
void rehash(size_type n);
void reserve(size_type n);
};

template<class InputIterator,
        class Hash = hash<iter-value-type<InputIterator>>,
        class Pred = equal_to<iter-value-type<InputIterator>>,
        class Allocator = allocator<iter-value-type<InputIterator>>>
unordered_set(InputIterator, InputIterator, typename see below::size_type = see below,
             Hash = Hash(), Pred = Pred(), Allocator = Allocator())
-> unordered_set<iter-value-type<InputIterator>,
               Hash, Pred, Allocator>;

template<class T, class Hash = hash<T>,
        class Pred = equal_to<T>, class Allocator = allocator<T>>
unordered_set(initializer_list<T>, typename see below::size_type = see below,
             Hash = Hash(), Pred = Pred(), Allocator = Allocator())
-> unordered_set<T, Hash, Pred, Allocator>;

template<class InputIterator, class Allocator>
unordered_set(InputIterator, InputIterator, typename see below::size_type, Allocator)
-> unordered_set<iter-value-type<InputIterator>,
               hash<iter-value-type<InputIterator>>,
               equal_to<iter-value-type<InputIterator>>,
               Allocator>;

template<class InputIterator, class Hash, class Allocator>
unordered_set(InputIterator, InputIterator, typename see below::size_type,
             Hash, Allocator)
-> unordered_set<iter-value-type<InputIterator>, Hash,
               equal_to<iter-value-type<InputIterator>>,
               Allocator>;

template<class T, class Allocator>
unordered_set(initializer_list<T>, typename see below::size_type, Allocator)
-> unordered_set<T, hash<T>, equal_to<T>, Allocator>;

template<class T, class Hash, class Allocator>
unordered_set(initializer_list<T>, typename see below::size_type, Hash, Allocator)
-> unordered_set<T, Hash, equal_to<T>, Allocator>;

// swap
template<class Key, class Hash, class Pred, class Alloc>
void swap(unordered_set<Key, Hash, Pred, Alloc>& x,
         unordered_set<Key, Hash, Pred, Alloc>& y)
noexcept(noexcept(x.swap(y)));
}

```

- ⁴ A `size_type` parameter type in an `unordered_set` deduction guide refers to the `size_type` member type of the type deduced by the deduction guide.

27.5.6.2 Constructors

[unord.set.cnstr]

```

unordered_set() : unordered_set(size_type(see below)) { }
explicit unordered_set(size_type n,
                    const hasher& hf = hasher(),
                    const key_equal& eql = key_equal(),

```

```
const allocator_type& a = allocator_type();
```

1 *Effects:* Constructs an empty `unordered_set` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. For the default constructor, the number of buckets is implementation-defined. `max_load_factor()` returns 1.0.

2 *Complexity:* Constant.

```
template<class InputIterator>
  unordered_set(InputIterator f, InputIterator l,
               size_type n = see below,
               const hasher& hf = hasher(),
               const key_equal& eql = key_equal(),
               const allocator_type& a = allocator_type());
unordered_set(initializer_list<value_type> il,
              size_type n = see below,
              const hasher& hf = hasher(),
              const key_equal& eql = key_equal(),
              const allocator_type& a = allocator_type());
```

3 *Effects:* Constructs an empty `unordered_set` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. If `n` is not provided, the number of buckets is implementation-defined. Then inserts elements from the range `[f, l)` for the first form, or from the range `[il.begin(), il.end())` for the second form. `max_load_factor()` returns 1.0.

4 *Complexity:* Average case linear, worst case quadratic.

27.5.7 Class template `unordered_multiset` [unord.multiset]

27.5.7.1 Overview [unord.multiset.overview]

1 An `unordered_multiset` is an unordered associative container that supports equivalent keys (an instance of `unordered_multiset` may contain multiple copies of the same key value) and in which each element's key is the element itself. The `unordered_multiset` class supports forward iterators.

2 An `unordered_multiset` satisfies all of the requirements of a container, of an unordered associative container, and of an allocator-aware container (Table 84). It provides the operations described in the preceding requirements table for equivalent keys; that is, an `unordered_multiset` supports the `a_eq` operations in that table, not the `a_uniq` operations. For an `unordered_multiset<Key>` the `key_type` and the `value_type` are both `Key`. The `iterator` and `const_iterator` types are both constant iterator types. It is unspecified whether they are the same type.

3 This subclause only describes operations on `unordered_multiset` that are not described in one of the requirement tables, or for which there is additional semantic information.

```
namespace std {
  template<class Key,
           class Hash = hash<Key>,
           class Pred = equal_to<Key>,
           class Allocator = allocator<Key>>
  class unordered_multiset {
  public:
    // types
    using key_type           = Key;
    using value_type        = Key;
    using hasher             = Hash;
    using key_equal         = Pred;
    using allocator_type    = Allocator;
    using pointer           = typename allocator_traits<Allocator>::pointer;
    using const_pointer     = typename allocator_traits<Allocator>::const_pointer;
    using reference         = value_type&;
    using const_reference   = const value_type&;
    using size_type         = implementation-defined; // see 27.2
    using difference_type   = implementation-defined; // see 27.2

    using iterator          = implementation-defined; // see 27.2
    using const_iterator    = implementation-defined; // see 27.2
    using local_iterator    = implementation-defined; // see 27.2
```



```

using const_local_iterator = implementation-defined; // see 27.2
using node_type           = unspecified;

// 27.5.7.2, construct/copy/destroy
unordered_multiset();
explicit unordered_multiset(size_type n,
                           const hasher& hf = hasher(),
                           const key_equal& eql = key_equal(),
                           const allocator_type& a = allocator_type());
template<class InputIterator>
    unordered_multiset(InputIterator f, InputIterator l,
                       size_type n = see below,
                       const hasher& hf = hasher(),
                       const key_equal& eql = key_equal(),
                       const allocator_type& a = allocator_type());
unordered_multiset(const unordered_multiset&&);
unordered_multiset(unordered_multiset&&);
explicit unordered_multiset(const Allocator&);
unordered_multiset(const unordered_multiset&, const Allocator&);
unordered_multiset(unordered_multiset&&, const Allocator&);
unordered_multiset(initializer_list<value_type> il,
                   size_type n = see below,
                   const hasher& hf = hasher(),
                   const key_equal& eql = key_equal(),
                   const allocator_type& a = allocator_type());
unordered_multiset(size_type n, const allocator_type& a)
    : unordered_multiset(n, hasher(), key_equal(), a) { }
unordered_multiset(size_type n, const hasher& hf, const allocator_type& a)
    : unordered_multiset(n, hf, key_equal(), a) { }
template<class InputIterator>
    unordered_multiset(InputIterator f, InputIterator l, size_type n, const allocator_type& a)
        : unordered_multiset(f, l, n, hasher(), key_equal(), a) { }
template<class InputIterator>
    unordered_multiset(InputIterator f, InputIterator l, size_type n, const hasher& hf,
                       const allocator_type& a)
        : unordered_multiset(f, l, n, hf, key_equal(), a) { }
unordered_multiset(initializer_list<value_type> il, size_type n, const allocator_type& a)
    : unordered_multiset(il, n, hasher(), key_equal(), a) { }
unordered_multiset(initializer_list<value_type> il, size_type n, const hasher& hf,
                   const allocator_type& a)
    : unordered_multiset(il, n, hf, key_equal(), a) { }
~unordered_multiset();
unordered_multiset& operator=(const unordered_multiset&);
unordered_multiset& operator=(unordered_multiset&&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_move_assignable_v<Hash> &&
             is_nothrow_move_assignable_v<Pred>);
unordered_multiset& operator=(initializer_list<value_type>);
allocator_type get_allocator() const noexcept;

// iterators
iterator      begin() noexcept;
const_iterator begin() const noexcept;
iterator      end() noexcept;
const_iterator end() const noexcept;
const_iterator cbegin() const noexcept;
const_iterator cend() const noexcept;

// capacity
[[nodiscard]] bool empty() const noexcept;
size_type size() const noexcept;
size_type max_size() const noexcept;

```

```

// modifiers
template<class... Args> iterator emplace(Args&&... args);
template<class... Args> iterator emplace_hint(const_iterator position, Args&&... args);
iterator insert(const value_type& obj);
iterator insert(value_type&& obj);
iterator insert(const_iterator hint, const value_type& obj);
iterator insert(const_iterator hint, value_type&& obj);
template<class InputIterator> void insert(InputIterator first, InputIterator last);
void insert(initializer_list<value_type>);

node_type extract(const_iterator position);
node_type extract(const key_type& x);
iterator insert(node_type&& nh);
iterator insert(const_iterator hint, node_type&& nh);

iterator erase(iterator position);
iterator erase(const_iterator position);
size_type erase(const key_type& k);
iterator erase(const_iterator first, const_iterator last);
void swap(unordered_multiset&)
    noexcept(allocator_traits<Allocator>::is_always_equal::value &&
             is_nothrow_swappable_v<Hash> &&
             is_nothrow_swappable_v<Pred>);
void clear() noexcept;

template<class H2, class P2>
    void merge(unordered_multiset<Key, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_multiset<Key, H2, P2, Allocator>&& source);
template<class H2, class P2>
    void merge(unordered_set<Key, H2, P2, Allocator>& source);
template<class H2, class P2>
    void merge(unordered_set<Key, H2, P2, Allocator>&& source);

// observers
hasher hash_function() const;
key_equal key_eq() const;

// set operations
iterator find(const key_type& k);
const_iterator find(const key_type& k) const;
size_type count(const key_type& k) const;
bool contains(const key_type& k) const;
pair<iterator, iterator> equal_range(const key_type& k);
pair<const_iterator, const_iterator> equal_range(const key_type& k) const;

// bucket interface
size_type bucket_count() const noexcept;
size_type max_bucket_count() const noexcept;
size_type bucket_size(size_type n) const;
size_type bucket(const key_type& k) const;
local_iterator begin(size_type n);
const_local_iterator begin(size_type n) const;
local_iterator end(size_type n);
const_local_iterator end(size_type n) const;
const_local_iterator cbegin(size_type n) const;
const_local_iterator cend(size_type n) const;

// hash policy
float load_factor() const noexcept;
float max_load_factor() const noexcept;
void max_load_factor(float z);
void rehash(size_type n);
void reserve(size_type n);

```

```

};

template<class InputIterator,
        class Hash = hash<iter-value-type<InputIterator>>,
        class Pred = equal_to<iter-value-type<InputIterator>>,
        class Allocator = allocator<iter-value-type<InputIterator>>>
unordered_multiset(InputIterator, InputIterator, see below::size_type = see below,
                  Hash = Hash(), Pred = Pred(), Allocator = Allocator())
-> unordered_multiset<iter-value-type<InputIterator>,
                    Hash, Pred, Allocator>;

template<class T, class Hash = hash<T>,
        class Pred = equal_to<T>, class Allocator = allocator<T>>
unordered_multiset(initializer_list<T>, typename see below::size_type = see below,
                  Hash = Hash(), Pred = Pred(), Allocator = Allocator())
-> unordered_multiset<T, Hash, Pred, Allocator>;

template<class InputIterator, class Allocator>
unordered_multiset(InputIterator, InputIterator, typename see below::size_type, Allocator)
-> unordered_multiset<iter-value-type<InputIterator>,
                    hash<iter-value-type<InputIterator>>,
                    equal_to<iter-value-type<InputIterator>>,
                    Allocator>;

template<class InputIterator, class Hash, class Allocator>
unordered_multiset(InputIterator, InputIterator, typename see below::size_type,
                  Hash, Allocator)
-> unordered_multiset<iter-value-type<InputIterator>, Hash,
                    equal_to<iter-value-type<InputIterator>>,
                    Allocator>;

template<class T, class Allocator>
unordered_multiset(initializer_list<T>, typename see below::size_type, Allocator)
-> unordered_multiset<T, hash<T>, equal_to<T>, Allocator>;

template<class T, class Hash, class Allocator>
unordered_multiset(initializer_list<T>, typename see below::size_type, Hash, Allocator)
-> unordered_multiset<T, Hash, equal_to<T>, Allocator>;

// swap
template<class Key, class Hash, class Pred, class Alloc>
void swap(unordered_multiset<Key, Hash, Pred, Alloc>& x,
          unordered_multiset<Key, Hash, Pred, Alloc>& y)
    noexcept(noexcept(x.swap(y)));
}

```

- ⁴ A `size_type` parameter type in an `unordered_multiset` deduction guide refers to the `size_type` member type of the type deduced by the deduction guide.

27.5.7.2 Constructors

[unord.multiset.cnstr]

```

unordered_multiset() : unordered_multiset(size_type(see below)) { }
explicit unordered_multiset(size_type n,
                           const hasher& hf = hasher(),
                           const key_equal& eql = key_equal(),
                           const allocator_type& a = allocator_type());

```

- ¹ *Effects:* Constructs an empty `unordered_multiset` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. For the default constructor, the number of buckets is implementation-defined. `max_load_factor()` returns 1.0.

- ² *Complexity:* Constant.

```

template<class InputIterator>
  unordered_multiset(InputIterator f, InputIterator l,
                    size_type n = see below,
                    const hasher& hf = hasher(),
                    const key_equal& eql = key_equal(),
                    const allocator_type& a = allocator_type());
unordered_multiset(initializer_list<value_type> il,
                  size_type n = see below,
                  const hasher& hf = hasher(),
                  const key_equal& eql = key_equal(),
                  const allocator_type& a = allocator_type());

```

3 *Effects:* Constructs an empty `unordered_multiset` using the specified hash function, key equality predicate, and allocator, and using at least `n` buckets. If `n` is not provided, the number of buckets is implementation-defined. Then inserts elements from the range `[f, l)` for the first form, or from the range `[il.begin(), il.end())` for the second form. `max_load_factor()` returns 1.0.

4 *Complexity:* Average case linear, worst case quadratic.

27.6 Container adaptors

[container.adaptors]

27.6.1 In general

[container.adaptors.general]

- 1 The headers `<queue>` and `<stack>` define the container adaptors `queue`, `priority_queue`, and `stack`.
- 2 The container adaptors each take a `Container` template parameter, and each constructor takes a `Container` reference argument. This container is copied into the `Container` member of each adaptor. If the container takes an allocator, then a compatible allocator may be passed in to the adaptor's constructor. Otherwise, normal copy or move construction is used for the container argument. The first template parameter `T` of the container adaptors shall denote the same type as `Container::value_type`.
- 3 For container adaptors, no `swap` function throws an exception unless that exception is thrown by the `swap` of the adaptor's `Container` or `Compare` object (if any).
- 4 A deduction guide for a container adaptor shall not participate in overload resolution if any of the following are true:
 - (4.1) — It has an `InputIterator` template parameter and a type that does not qualify as an input iterator is deduced for that parameter.
 - (4.2) — It has a `Compare` template parameter and a type that qualifies as an allocator is deduced for that parameter.
 - (4.3) — It has a `Container` template parameter and a type that qualifies as an allocator is deduced for that parameter.
 - (4.4) — It has an `Allocator` template parameter and a type that does not qualify as an allocator is deduced for that parameter.
 - (4.5) — It has both `Container` and `Allocator` template parameters, and `uses_allocator_v<Container, Allocator>` is false.

27.6.2 Header `<queue>` synopsis

[queue.syn]

```

#include <initializer_list>

namespace std {
  template<class T, class Container = deque<T>> class queue;
  template<class T, class Container = vector<T>,
           class Compare = less<typename Container::value_type>>
    class priority_queue;

  template<class T, class Container>
    bool operator==(const queue<T, Container>& x, const queue<T, Container>& y);
  template<class T, class Container>
    bool operator!=(const queue<T, Container>& x, const queue<T, Container>& y);
  template<class T, class Container>
    bool operator<(const queue<T, Container>& x, const queue<T, Container>& y);
  template<class T, class Container>
    bool operator>(const queue<T, Container>& x, const queue<T, Container>& y);

```

```

template<class T, class Container>
    bool operator<=(const queue<T, Container>& x, const queue<T, Container>& y);
template<class T, class Container>
    bool operator>=(const queue<T, Container>& x, const queue<T, Container>& y);

template<class T, class Container>
    void swap(queue<T, Container>& x, queue<T, Container>& y) noexcept(noexcept(x.swap(y)));
template<class T, class Container, class Compare>
    void swap(priority_queue<T, Container, Compare>& x,
              priority_queue<T, Container, Compare>& y) noexcept(noexcept(x.swap(y)));
}

```

27.6.3 Header <stack> synopsis

[stack.syn]

```

#include <initializer_list>

namespace std {
    template<class T, class Container = deque<T>> class stack;

    template<class T, class Container>
        bool operator==(const stack<T, Container>& x, const stack<T, Container>& y);
    template<class T, class Container>
        bool operator!=(const stack<T, Container>& x, const stack<T, Container>& y);
    template<class T, class Container>
        bool operator< (const stack<T, Container>& x, const stack<T, Container>& y);
    template<class T, class Container>
        bool operator> (const stack<T, Container>& x, const stack<T, Container>& y);
    template<class T, class Container>
        bool operator<=(const stack<T, Container>& x, const stack<T, Container>& y);
    template<class T, class Container>
        bool operator>=(const stack<T, Container>& x, const stack<T, Container>& y);

    template<class T, class Container>
        void swap(stack<T, Container>& x, stack<T, Container>& y) noexcept(noexcept(x.swap(y)));
}

```

27.6.4 Class template queue

[queue]

27.6.4.1 Definition

[queue.defn]

- ¹ Any sequence container supporting operations `front()`, `back()`, `push_back()` and `pop_front()` can be used to instantiate queue. In particular, `list` (27.3.10) and `deque` (27.3.8) can be used.

```

namespace std {
    template<class T, class Container = deque<T>>
        class queue {
        public:
            using value_type      = typename Container::value_type;
            using reference       = typename Container::reference;
            using const_reference = typename Container::const_reference;
            using size_type       = typename Container::size_type;
            using container_type  = Container;

        protected:
            Container c;

        public:
            queue() : queue(Container()) {}
            explicit queue(const Container&);
            explicit queue(Container&&);
            template<class Alloc> explicit queue(const Alloc&);
            template<class Alloc> queue(const Container&, const Alloc&);
            template<class Alloc> queue(Container&&, const Alloc&);
            template<class Alloc> queue(const queue&, const Alloc&);
            template<class Alloc> queue(queue&&, const Alloc&);
        };
}

```

```

[[nodiscard]] bool empty() const { return c.empty(); }
size_type      size() const    { return c.size(); }
reference      front()         { return c.front(); }
const_reference front() const  { return c.front(); }
reference      back()          { return c.back(); }
const_reference back() const   { return c.back(); }
void push(const value_type& x) { c.push_back(x); }
void push(value_type&& x)      { c.push_back(std::move(x)); }
template<class... Args>
    decltype(auto) emplace(Args&&... args)
        { return c.emplace_back(std::forward<Args>(args)...); }
void pop() { c.pop_front(); }
void swap(queue& q) noexcept(is_nothrow_swappable_v<Container>)
    { using std::swap; swap(c, q.c); }
};

template<class Container>
    queue(Container) -> queue<typename Container::value_type, Container>;

template<class Container, class Allocator>
    queue(Container, Allocator) -> queue<typename Container::value_type, Container>;

template<class T, class Container>
    void swap(queue<T, Container>& x, queue<T, Container>& y) noexcept(noexcept(x.swap(y)));

template<class T, class Container, class Alloc>
    struct uses_allocator<queue<T, Container>, Alloc>
        : uses_allocator<Container, Alloc>::type { };
}

```

27.6.4.2 Constructors

[queue.cons]

```
explicit queue(const Container& cont);
```

1 *Effects:* Initializes c with cont.

```
explicit queue(Container&& cont);
```

2 *Effects:* Initializes c with std::move(cont).

27.6.4.3 Constructors with allocators

[queue.cons.alloc]

1 If uses_allocator_v<container_type, Alloc> is false the constructors in this subclause shall not participate in overload resolution.

```
template<class Alloc> explicit queue(const Alloc& a);
```

2 *Effects:* Initializes c with a.

```
template<class Alloc> queue(const container_type& cont, const Alloc& a);
```

3 *Effects:* Initializes c with cont as the first argument and a as the second argument.

```
template<class Alloc> queue(container_type&& cont, const Alloc& a);
```

4 *Effects:* Initializes c with std::move(cont) as the first argument and a as the second argument.

```
template<class Alloc> queue(const queue& q, const Alloc& a);
```

5 *Effects:* Initializes c with q.c as the first argument and a as the second argument.

```
template<class Alloc> queue(queue&& q, const Alloc& a);
```

6 *Effects:* Initializes c with std::move(q.c) as the first argument and a as the second argument.

27.6.4.4 Operators

[queue.ops]

```
template<class T, class Container>
    bool operator==(const queue<T, Container>& x, const queue<T, Container>& y);
```

1 *Returns:* x.c == y.c.

```
template<class T, class Container>
    bool operator!=(const queue<T, Container>& x, const queue<T, Container>& y);
```

2 *Returns:* $x.c \neq y.c$.

```
template<class T, class Container>
    bool operator<(const queue<T, Container>& x, const queue<T, Container>& y);
```

3 *Returns:* $x.c < y.c$.

```
template<class T, class Container>
    bool operator>(const queue<T, Container>& x, const queue<T, Container>& y);
```

4 *Returns:* $x.c > y.c$.

```
template<class T, class Container>
    bool operator<=(const queue<T, Container>& x, const queue<T, Container>& y);
```

5 *Returns:* $x.c \leq y.c$.

```
template<class T, class Container>
    bool operator>=(const queue<T, Container>& x,
                  const queue<T, Container>& y);
```

6 *Returns:* $x.c \geq y.c$.

27.6.4.5 Specialized algorithms

[queue.special]

```
template<class T, class Container>
    void swap(queue<T, Container>& x, queue<T, Container>& y) noexcept(noexcept(x.swap(y)));
```

1 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<Container>` is true.

2 *Effects:* As if by `x.swap(y)`.

27.6.5 Class template `priority_queue`

[priority.queue]

27.6.5.1 Overview

[priorityqueue.overview]

1 Any sequence container with random access iterator and supporting operations `front()`, `push_back()` and `pop_back()` can be used to instantiate `priority_queue`. In particular, `vector` (27.3.11) and `deque` (27.3.8) can be used. Instantiating `priority_queue` also involves supplying a function or function object for making priority comparisons; the library assumes that the function or function object defines a strict weak ordering (29.7).

```
namespace std {
    template<class T, class Container = vector<T>,
            class Compare = less<typename Container::value_type>>
    class priority_queue {
    public:
        using value_type      = typename Container::value_type;
        using reference       = typename Container::reference;
        using const_reference = typename Container::const_reference;
        using size_type       = typename Container::size_type;
        using container_type  = Container;
        using value_compare   = Compare;

    protected:
        Container c;
        Compare comp;

    public:
        priority_queue() : priority_queue(Compare()) {}
        explicit priority_queue(const Compare& x) : priority_queue(x, Container()) {}
        priority_queue(const Compare& x, const Container&);
        priority_queue(const Compare& x, Container&&);
        template<class InputIterator>
            priority_queue(InputIterator first, InputIterator last, const Compare& x,
                          const Container&);
```

```

template<class InputIterator>
    priority_queue(InputIterator first, InputIterator last,
                  const Compare& x = Compare(), Container&& = Container());
template<class Alloc> explicit priority_queue(const Alloc&);
template<class Alloc> priority_queue(const Compare&, const Alloc&);
template<class Alloc> priority_queue(const Compare&, const Container&, const Alloc&);
template<class Alloc> priority_queue(const Compare&, Container&&, const Alloc&);
template<class Alloc> priority_queue(const priority_queue&, const Alloc&);
template<class Alloc> priority_queue(priority_queue&&, const Alloc&);

[[nodiscard]] bool empty() const { return c.empty(); }
size_type size() const          { return c.size(); }
const_reference top() const     { return c.front(); }
void push(const value_type& x);
void push(value_type&& x);
template<class... Args> void emplace(Args&&... args);
void pop();
void swap(priority_queue& q) noexcept(is_nothrow_swappable_v<Container> &&
                                       is_nothrow_swappable_v<Compare>)
    { using std::swap; swap(c, q.c); swap(comp, q.comp); }
};

template<class Compare, class Container>
    priority_queue(Compare, Container)
        -> priority_queue<typename Container::value_type, Container, Compare>;

template<class InputIterator,
        class Compare = less<typename iterator_traits<InputIterator>::value_type>,
        class Container = vector<typename iterator_traits<InputIterator>::value_type>>
    priority_queue(InputIterator, InputIterator, Compare = Compare(), Container = Container())
        -> priority_queue<typename iterator_traits<InputIterator>::value_type, Container, Compare>;

template<class Compare, class Container, class Allocator>
    priority_queue(Compare, Container, Allocator)
        -> priority_queue<typename Container::value_type, Container, Compare>;

// no equality is provided

template<class T, class Container, class Compare>
    void swap(priority_queue<T, Container, Compare>& x,
              priority_queue<T, Container, Compare>& y) noexcept(noexcept(x.swap(y)));

template<class T, class Container, class Compare, class Alloc>
    struct uses_allocator<priority_queue<T, Container, Compare>, Alloc>
        : uses_allocator<Container, Alloc>::type { };
}

```

27.6.5.2 Constructors

[priority_queue.cons]

```

priority_queue(const Compare& x, const Container& y);
priority_queue(const Compare& x, Container&& y);

```

¹ *Requires:* x shall define a strict weak ordering (29.7).

² *Effects:* Initializes comp with x and c with y (copy constructing or move constructing as appropriate); calls `make_heap(c.begin(), c.end(), comp)`.

```

template<class InputIterator>
    priority_queue(InputIterator first, InputIterator last, const Compare& x, const Container& y);
template<class InputIterator>
    priority_queue(InputIterator first, InputIterator last, const Compare& x = Compare(),
                  Container&& y = Container());

```

³ *Requires:* x shall define a strict weak ordering (29.7).

- 4 *Effects:* Initializes `comp` with `x` and `c` with `y` (copy constructing or move constructing as appropriate); calls `c.insert(c.end(), first, last)`; and finally calls `make_heap(c.begin(), c.end(), comp)`.

27.6.5.3 Constructors with allocators [priority_queue.cons.alloc]

- 1 If `uses_allocator_v<container_type, Alloc>` is `false` the constructors in this subclause shall not participate in overload resolution.

```
template<class Alloc> explicit priority_queue(const Alloc& a);
```

- 2 *Effects:* Initializes `c` with `a` and value-initializes `comp`.

```
template<class Alloc> priority_queue(const Compare& compare, const Alloc& a);
```

- 3 *Effects:* Initializes `c` with `a` and initializes `comp` with `compare`.

```
template<class Alloc>
priority_queue(const Compare& compare, const Container& cont, const Alloc& a);
```

- 4 *Effects:* Initializes `c` with `cont` as the first argument and `a` as the second argument, and initializes `comp` with `compare`; calls `make_heap(c.begin(), c.end(), comp)`.

```
template<class Alloc>
priority_queue(const Compare& compare, Container&& cont, const Alloc& a);
```

- 5 *Effects:* Initializes `c` with `std::move(cont)` as the first argument and `a` as the second argument, and initializes `comp` with `compare`; calls `make_heap(c.begin(), c.end(), comp)`.

```
template<class Alloc> priority_queue(const priority_queue& q, const Alloc& a);
```

- 6 *Effects:* Initializes `c` with `q.c` as the first argument and `a` as the second argument, and initializes `comp` with `q.comp`.

```
template<class Alloc> priority_queue(priority_queue&& q, const Alloc& a);
```

- 7 *Effects:* Initializes `c` with `std::move(q.c)` as the first argument and `a` as the second argument, and initializes `comp` with `std::move(q.comp)`.

27.6.5.4 Members [priority_queue.members]

```
void push(const value_type& x);
```

- 1 *Effects:* As if by:

```
    c.push_back(x);
    push_heap(c.begin(), c.end(), comp);
```

```
void push(value_type&& x);
```

- 2 *Effects:* As if by:

```
    c.push_back(std::move(x));
    push_heap(c.begin(), c.end(), comp);
```

```
template<class... Args> void emplace(Args&&... args)
```

- 3 *Effects:* As if by:

```
    c.emplace_back(std::forward<Args>(args)...);
    push_heap(c.begin(), c.end(), comp);
```

```
void pop();
```

- 4 *Effects:* As if by:

```
    pop_heap(c.begin(), c.end(), comp);
    c.pop_back();
```

27.6.5.5 Specialized algorithms [priority_queue.special]

```
template<class T, class Container, class Compare>
void swap(priority_queue<T, Container, Compare>& x,
```

```
priority_queue<T, Container, Compare>& y) noexcept(noexcept(x.swap(y)));
```

1 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<Container>` is true and `is_swappable_v<Compare>` is true.

2 *Effects:* As if by `x.swap(y)`.

27.6.6 Class template stack

[stack]

1 Any sequence container supporting operations `back()`, `push_back()` and `pop_back()` can be used to instantiate `stack`. In particular, `vector` (27.3.11), `list` (27.3.10) and `deque` (27.3.8) can be used.

27.6.6.1 Definition

[stack.defn]

```
namespace std {
    template<class T, class Container = deque<T>>
    class stack {
    public:
        using value_type      = typename Container::value_type;
        using reference       = typename Container::reference;
        using const_reference = typename Container::const_reference;
        using size_type       = typename Container::size_type;
        using container_type  = Container;

    protected:
        Container c;

    public:
        stack() : stack(Container()) {}
        explicit stack(const Container&);
        explicit stack(Container&&);
        template<class Alloc> explicit stack(const Alloc&);
        template<class Alloc> stack(const Container&, const Alloc&);
        template<class Alloc> stack(Container&&, const Alloc&);
        template<class Alloc> stack(const stack&, const Alloc&);
        template<class Alloc> stack(stack&&, const Alloc&);

        [[nodiscard]] bool empty() const { return c.empty(); }
        size_type size() const { return c.size(); }
        reference top() { return c.back(); }
        const_reference top() const { return c.back(); }
        void push(const value_type& x) { c.push_back(x); }
        void push(value_type&& x) { c.push_back(std::move(x)); }
        template<class... Args>
            decltype(auto) emplace(Args&&... args)
                { return c.emplace_back(std::forward<Args>(args)...); }
        void pop() { c.pop_back(); }
        void swap(stack& s) noexcept(is_nothrow_swappable_v<Container>)
            { using std::swap; swap(c, s.c); }
    };

    template<class Container>
        stack(Container) -> stack<typename Container::value_type, Container>;

    template<class Container, class Allocator>
        stack(Container, Allocator) -> stack<typename Container::value_type, Container>;

    template<class T, class Container, class Alloc>
        struct uses_allocator<stack<T, Container>, Alloc>
            : uses_allocator<Container, Alloc>::type { };
}

```

27.6.6.2 Constructors

[stack.cons]

```
explicit stack(const Container& cont);
```

1 *Effects:* Initializes `c` with `cont`.

```
explicit stack(Container&& cont);
```

2 *Effects:* Initializes `c` with `std::move(cont)`.

27.6.6.3 Constructors with allocators

[stack.cons.alloc]

1 If `uses_allocator_v<container_type, Alloc>` is `false` the constructors in this subclause shall not participate in overload resolution.

```
template<class Alloc> explicit stack(const Alloc& a);
```

2 *Effects:* Initializes `c` with `a`.

```
template<class Alloc> stack(const container_type& cont, const Alloc& a);
```

3 *Effects:* Initializes `c` with `cont` as the first argument and `a` as the second argument.

```
template<class Alloc> stack(container_type&& cont, const Alloc& a);
```

4 *Effects:* Initializes `c` with `std::move(cont)` as the first argument and `a` as the second argument.

```
template<class Alloc> stack(const stack& s, const Alloc& a);
```

5 *Effects:* Initializes `c` with `s.c` as the first argument and `a` as the second argument.

```
template<class Alloc> stack(stack&& s, const Alloc& a);
```

6 *Effects:* Initializes `c` with `std::move(s.c)` as the first argument and `a` as the second argument.

27.6.6.4 Operators

[stack.ops]

```
template<class T, class Container>
```

```
bool operator==(const stack<T, Container>& x, const stack<T, Container>& y);
```

1 *Returns:* `x.c == y.c`.

```
template<class T, class Container>
```

```
bool operator!=(const stack<T, Container>& x, const stack<T, Container>& y);
```

2 *Returns:* `x.c != y.c`.

```
template<class T, class Container>
```

```
bool operator<(const stack<T, Container>& x, const stack<T, Container>& y);
```

3 *Returns:* `x.c < y.c`.

```
template<class T, class Container>
```

```
bool operator>(const stack<T, Container>& x, const stack<T, Container>& y);
```

4 *Returns:* `x.c > y.c`.

```
template<class T, class Container>
```

```
bool operator<=(const stack<T, Container>& x, const stack<T, Container>& y);
```

5 *Returns:* `x.c <= y.c`.

```
template<class T, class Container>
```

```
bool operator>=(const stack<T, Container>& x, const stack<T, Container>& y);
```

6 *Returns:* `x.c >= y.c`.

27.6.6.5 Specialized algorithms

[stack.special]

```
template<class T, class Container>
```

```
void swap(stack<T, Container>& x, stack<T, Container>& y) noexcept(noexcept(x.swap(y)));
```

1 *Remarks:* This function shall not participate in overload resolution unless `is_swappable_v<Container>` is `true`.

2 *Effects:* As if by `x.swap(y)`.

27.7 Views

[views]

27.7.1 General

[views.general]

1 The header `` defines the view `span`.

27.7.2 Header `` synopsis**[span.syn]**

```

namespace std {
    // constants
    inline constexpr ptrdiff_t dynamic_extent = -1;

    // 27.7.3, class template span
    template<class ElementType, ptrdiff_t Extent = dynamic_extent>
        class span;

    // 27.7.3.7, comparison operators
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator==(span<T, X> l, span<U, Y> r);
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator!=(span<T, X> l, span<U, Y> r);
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator<(span<T, X> l, span<U, Y> r);
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator>(span<T, X> l, span<U, Y> r);
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator<=(span<T, X> l, span<U, Y> r);
    template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
        constexpr bool operator>=(span<T, X> l, span<U, Y> r);

    // 27.7.3.8, views of object representation
    template<class ElementType, ptrdiff_t Extent>
        span<const byte,
            Extent == dynamic_extent ? dynamic_extent
                : static_cast<ptrdiff_t>(sizeof(ElementType)) * Extent>
        as_bytes(span<ElementType, Extent> s) noexcept;

    template<class ElementType, ptrdiff_t Extent>
        span<byte,
            Extent == dynamic_extent ? dynamic_extent
                : static_cast<ptrdiff_t>(sizeof(ElementType)) * Extent>
        as_writable_bytes(span<ElementType, Extent> s) noexcept;
}

```

27.7.3 Class template `span`**[views.span]****27.7.3.1 Overview****[span.overview]**

- ¹ A `span` is a view over a contiguous sequence of objects, the storage of which is owned by some other object.
- ² `ElementType` is required to be a complete object type that is not an abstract class type.
- ³ If `Extent` is negative and not equal to `dynamic_extent`, the program is ill-formed.
- ⁴ The iterator types `span::iterator` and `span::const_iterator` are random access iterators (28.2.7), contiguous iterators (28.2.1), and `constexpr` iterators (28.2.1). All requirements on container iterators (27.2) apply to `span::iterator` and `span::const_iterator` as well.
- ⁵ All member functions of `span` have constant time complexity.

```

namespace std {
    template<class ElementType, ptrdiff_t Extent = dynamic_extent>
        class span {
        public:
            // constants and types
            using element_type = ElementType;
            using value_type = remove_cv_t<ElementType>;
            using index_type = ptrdiff_t;
            using difference_type = ptrdiff_t;
            using pointer = element_type*;
            using reference = element_type&;
            using iterator = implementation-defined;
            using const_iterator = implementation-defined;
            using reverse_iterator = std::reverse_iterator<iterator>;

```

```

using const_reverse_iterator = std::reverse_iterator<const_iterator>;
static constexpr index_type extent = Extent;

// 27.7.3.2, constructors, copy, and assignment
constexpr span() noexcept;
constexpr span(pointer ptr, index_type count);
constexpr span(pointer first, pointer last);
template<size_t N>
    constexpr span(element_type (&arr)[N]) noexcept;
template<size_t N>
    constexpr span(array<value_type, N>& arr) noexcept;
template<size_t N>
    constexpr span(const array<value_type, N>& arr) noexcept;
template<class Container>
    constexpr span(Container& cont);
template<class Container>
    constexpr span(const Container& cont);
constexpr span(const span& other) noexcept = default;
template<class OtherElementType, ptrdiff_t OtherExtent>
    constexpr span(const span<OtherElementType, OtherExtent>& s) noexcept;

~span() noexcept = default;

constexpr span& operator=(const span& other) noexcept = default;

// 27.7.3.3, subviews
template<ptrdiff_t Count>
    constexpr span<element_type, Count> first() const;
template<ptrdiff_t Count>
    constexpr span<element_type, Count> last() const;
template<ptrdiff_t Offset, ptrdiff_t Count = dynamic_extent>
    constexpr span<element_type, see below> subspan() const;

constexpr span<element_type, dynamic_extent> first(index_type count) const;
constexpr span<element_type, dynamic_extent> last(index_type count) const;
constexpr span<element_type, dynamic_extent> subspan(
    index_type offset, index_type count = dynamic_extent) const;

// 27.7.3.4, observers
constexpr index_type size() const noexcept;
constexpr index_type size_bytes() const noexcept;
constexpr bool empty() const noexcept;

// 27.7.3.5, element access
constexpr reference operator[](index_type idx) const;
constexpr reference operator()(index_type idx) const;
constexpr pointer data() const noexcept;

// 27.7.3.6, iterator support
constexpr iterator begin() const noexcept;
constexpr iterator end() const noexcept;
constexpr const_iterator cbegin() const noexcept;
constexpr const_iterator cend() const noexcept;
constexpr reverse_iterator rbegin() const noexcept;
constexpr reverse_iterator rend() const noexcept;
constexpr const_reverse_iterator crbegin() const noexcept;
constexpr const_reverse_iterator crend() const noexcept;

private:
    pointer data_; // exposition only
    index_type size_; // exposition only
};

```

```

template<class T, size_t N>
    span(T (&)[N]) -> span<T, N>;
template<class T, size_t N>
    span(array<T, N>&) -> span<T, N>;
template<class T, size_t N>
    span(const array<T, N>&) -> span<const T, N>;
template<class Container>
    span(Container&) -> span<typename Container::value_type>;
template<class Container>
    span(const Container&) -> span<const typename Container::value_type>;
}

```

27.7.3.2 Constructors, copy, and assignment

[span.cons]

```
constexpr span() noexcept;
```

1 *Ensures:* `size() == 0 && data() == nullptr`.

2 *Remarks:* This constructor shall not participate in overload resolution unless `Extent <= 0` is true.

```
constexpr span(pointer ptr, index_type count);
```

3 *Requires:* [`ptr`, `ptr + count`) shall be a valid range. If `extent` is not equal to `dynamic_extent`, then `count` shall be equal to `extent`.

4 *Effects:* Constructs a span that is a view over the range [`ptr`, `ptr + count`).

5 *Ensures:* `size() == count && data() == ptr`.

6 *Throws:* Nothing.

```
constexpr span(pointer first, pointer last);
```

7 *Requires:* [`first`, `last`) shall be a valid range. If `extent` is not equal to `dynamic_extent`, then `last - first` shall be equal to `extent`.

8 *Effects:* Constructs a span that is a view over the range [`first`, `last`).

9 *Ensures:* `size() == last - first && data() == first`.

10 *Throws:* Nothing.

```

template<size_t N> constexpr span(element_type (&arr)[N]) noexcept;
template<size_t N> constexpr span(array<value_type, N>& arr) noexcept;
template<size_t N> constexpr span(const array<value_type, N>& arr) noexcept;

```

11 *Effects:* Constructs a span that is a view over the supplied array.

12 *Ensures:* `size() == N && data() == data(arr)`.

13 *Remarks:* These constructors shall not participate in overload resolution unless:

(13.1) — `extent == dynamic_extent || N == extent` is true, and

(13.2) — `remove_pointer_t<decltype(data(arr))>(*) []` is convertible to `ElementType(*) []`.

```

template<class Container> constexpr span(Container& cont);
template<class Container> constexpr span(const Container& cont);

```

14 *Requires:* [`data(cont)`, `data(cont) + size(cont)`) shall be a valid range. If `extent` is not equal to `dynamic_extent`, then `size(cont)` shall be equal to `extent`.

15 *Effects:* Constructs a span that is a view over the range [`data(cont)`, `data(cont) + size(cont)`).

16 *Ensures:* `size() == size(cont) && data() == data(cont)`.

17 *Throws:* What and when `data(cont)` and `size(cont)` throw.

18 *Remarks:* These constructors shall not participate in overload resolution unless:

(18.1) — `Container` is not a specialization of `span`,

(18.2) — `Container` is not a specialization of `array`,

(18.3) — `is_array_v<Container>` is false,

(18.4) — `data(cont)` and `size(cont)` are both well-formed, and

(18.5) — `remove_pointer_t<decltype(data(cont))>(*) []` is convertible to `ElementType(*) []`.

```
constexpr span(const span& other) noexcept = default;
```

19 *Ensures:* `other.size() == size() && other.data() == data()`.

```
template<class OtherElementType, ptrdiff_t OtherExtent>
constexpr span(const span<OtherElementType, OtherExtent>& s) noexcept;
```

20 *Effects:* Constructs a span that is a view over the range `[s.data(), s.data() + s.size())`.

21 *Ensures:* `size() == s.size() && data() == s.data()`.

22 *Remarks:* This constructor shall not participate in overload resolution unless:

(22.1) — `Extent == dynamic_extent || Extent == OtherExtent` is true, and

(22.2) — `OtherElementType(*) []` is convertible to `ElementType(*) []`.

```
constexpr span& operator=(const span& other) noexcept = default;
```

23 *Ensures:* `size() == other.size() && data() == other.data()`.

27.7.3.3 Subviews

[span.sub]

```
template<ptrdiff_t Count> constexpr span<element_type, Count> first() const;
```

1 *Requires:* `0 <= Count && Count <= size()`.

2 *Effects:* Equivalent to: `return {data(), Count};`

```
template<ptrdiff_t Count> constexpr span<element_type, Count> last() const;
```

3 *Requires:* `0 <= Count && Count <= size()`.

4 *Effects:* Equivalent to: `return {data() + (size() - Count), Count};`

```
template<ptrdiff_t Offset, ptrdiff_t Count = dynamic_extent>
constexpr span<element_type, see below> subspan() const;
```

5 *Requires:*

```
(0 <= Offset && Offset <= size())
```

```
&& (Count == dynamic_extent || Count >= 0 && Offset + Count <= size())
```

6 *Effects:* Equivalent to:

```
return span<ElementType, see below>(
    data() + Offset, Count != dynamic_extent ? Count : size() - Offset);
```

7 *Remarks:* The second template argument of the returned span type is:

```
Count != dynamic_extent ? Count
    : (Extent != dynamic_extent ? Extent - Offset
    : dynamic_extent)
```

```
constexpr span<element_type, dynamic_extent> first(index_type count) const;
```

8 *Requires:* `0 <= count && count <= size()`.

9 *Effects:* Equivalent to: `return {data(), count};`

```
constexpr span<element_type, dynamic_extent> last(index_type count) const;
```

10 *Requires:* `0 <= count && count <= size()`.

11 *Effects:* Equivalent to: `return {data() + (size() - count), count};`

```
constexpr span<element_type, dynamic_extent> subspan(
    index_type offset, index_type count = dynamic_extent) const;
```

12 *Requires:*

```
(0 <= offset && offset <= size())
```

```
&& (count == dynamic_extent || count >= 0 && offset + count <= size())
```

13 *Effects:* Equivalent to:

```
return {data() + offset, count == dynamic_extent ? size() - offset : count};
```

27.7.3.4 Observers

[span.obs]

```
constexpr index_type size() const noexcept;
```

1 *Effects:* Equivalent to: return size_;

```
constexpr index_type size_bytes() const noexcept;
```

2 *Effects:* Equivalent to: return size() * sizeof(element_type);

```
constexpr bool empty() const noexcept;
```

3 *Effects:* Equivalent to: return size() == 0;

27.7.3.5 Element access

[span.elem]

```
constexpr reference operator[](index_type idx) const;
```

```
constexpr reference operator()(index_type idx) const;
```

1 *Requires:* 0 <= idx && idx < size().

2 *Effects:* Equivalent to: return *(data() + idx);

```
constexpr pointer data() const noexcept;
```

3 *Effects:* Equivalent to: return data_;

27.7.3.6 Iterator support

[span.iterators]

```
constexpr iterator begin() const noexcept;
```

1 *Returns:* An iterator referring to the first element in the span. If empty() is true, then it returns the same value as end().

```
constexpr iterator end() const noexcept;
```

2 *Returns:* An iterator which is the past-the-end value.

```
constexpr reverse_iterator rbegin() const noexcept;
```

3 *Effects:* Equivalent to: return reverse_iterator(end());

```
constexpr reverse_iterator rend() const noexcept;
```

4 *Returns:* Equivalent to: return reverse_iterator(begin());

```
constexpr const_iterator cbegin() const noexcept;
```

5 *Returns:* A constant iterator referring to the first element in the span. If empty() is true, then it returns the same value as cend().

```
constexpr const_iterator cend() const noexcept;
```

6 *Returns:* A constant iterator which is the past-the-end value.

```
constexpr const_reverse_iterator crbegin() const noexcept;
```

7 *Effects:* Equivalent to: return const_reverse_iterator(cend());

```
constexpr const_reverse_iterator crend() const noexcept;
```

8 *Effects:* Equivalent to: return const_reverse_iterator(cbegin());

27.7.3.7 Comparison operators

[span.comparison]

```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator==(span<T, X> l, span<U, Y> r);
```

1 *Effects:* Equivalent to: return equal(l.begin(), l.end(), r.begin(), r.end());

```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator!=(span<T, X> l, span<U, Y> r);
```

2 *Effects:* Equivalent to: return !(l == r);


```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator<(span<T, X> l, span<U, Y> r);
```

3 *Effects:* Equivalent to:

```
return lexicographical_compare(l.begin(), l.end(), r.begin(), r.end());
```

```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator>(span<T, X> l, span<U, Y> r);
```

4 *Effects:* Equivalent to: return (r < l);

```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator<=(span<T, X> l, span<U, Y> r);
```

5 *Effects:* Equivalent to: return !(r < l);

```
template<class T, ptrdiff_t X, class U, ptrdiff_t Y>
constexpr bool operator>=(span<T, X> l, span<U, Y> r);
```

6 *Effects:* Equivalent to: return !(l < r);

27.7.3.8 Views of object representation

[span.objectrep]

```
template <class ElementType, ptrdiff_t Extent>
span<const byte,
    Extent == dynamic_extent ? dynamic_extent
    : static_cast<ptrdiff_t>(sizeof(ElementType)) * Extent>
as_bytes(span<ElementType, Extent> s) noexcept;
```

1 *Effects:* Equivalent to: return {reinterpret_cast<const byte*>(s.data()), s.size_bytes()};

```
template<class ElementType, ptrdiff_t Extent>
span<byte,
    Extent == dynamic_extent ? dynamic_extent
    : static_cast<ptrdiff_t>(sizeof(ElementType)) * Extent>
as_writable_bytes(span<ElementType, Extent> s) noexcept;
```

2 *Effects:* Equivalent to: return {reinterpret_cast<byte*>(s.data()), s.size_bytes()};

3 *Remarks:* This function shall not participate in overload resolution unless `is_const_v<ElementType>` is false.

28 Iterators library

[iterators]

28.1 General

[iterators.general]

- ¹ This Clause describes components that C++ programs may use to perform iterations over containers (Clause 27), streams (31.7), and stream buffers (31.6).
- ² The following subclauses describe iterator requirements, and components for iterator primitives, predefined iterators, and stream iterators, as summarized in Table 90.

Table 90 — Iterators library summary

Subclause	Header(s)
28.2	Requirements
28.4	Iterator primitives <iterator>
28.5	Predefined iterators
28.6	Stream iterators

28.2 Iterator requirements

[iterator.requirements]

28.2.1 In general

[iterator.requirements.general]

- ¹ Iterators are a generalization of pointers that allow a C++ program to work with different data structures (containers) in a uniform manner. To be able to construct template algorithms that work correctly and efficiently on different types of data structures, the library formalizes not just the interfaces but also the semantics and complexity assumptions of iterators. An input iterator *i* supports the expression **i*, resulting in a value of some object type *T*, called the *value type* of the iterator. An output iterator *i* has a non-empty set of types that are *writable* to the iterator; for each such type *T*, the expression **i = o* is valid where *o* is a value of type *T*. An iterator *i* for which the expression *(*i).m* is well-defined supports the expression *i->m* with the same semantics as *(*i).m*. For every iterator type *X* for which equality is defined, there is a corresponding signed integer type called the *difference type* of the iterator.
- ² Since iterators are an abstraction of pointers, their semantics is a generalization of most of the semantics of pointers in C++. This ensures that every function template that takes iterators works as well with regular pointers. This document defines five categories of iterators, according to the operations defined on them: *input iterators*, *output iterators*, *forward iterators*, *bidirectional iterators* and *random access iterators*, as shown in Table 91.

Table 91 — Relations among iterator categories

Random Access	→	Bidirectional	→	Forward	→	Input
						→ Output

- ³ Forward iterators satisfy all the requirements of input iterators and can be used whenever an input iterator is specified; Bidirectional iterators also satisfy all the requirements of forward iterators and can be used whenever a forward iterator is specified; Random access iterators also satisfy all the requirements of bidirectional iterators and can be used whenever a bidirectional iterator is specified.
- ⁴ Iterators that further satisfy the requirements of output iterators are called *mutable iterators*. Nonmutable iterators are referred to as *constant iterators*.
- ⁵ In addition to the requirements in this subclause, the nested *typedef-names* specified in 28.4.1 shall be provided for the iterator type. [Note: Either the iterator type must provide the *typedef-names* directly (in which case `iterator_traits` pick them up automatically), or an `iterator_traits` specialization must provide them. — end note]
- ⁶ Iterators that further satisfy the requirement that, for integral values *n* and dereferenceable iterator values *a* and *(a + n)*, **(a + n)* is equivalent to **(addressof(*a) + n)*, are called *contiguous iterators*. [Note: For example, the type “pointer to int” is a contiguous iterator, but `reverse_iterator<int *>` is not.

For a valid iterator range $[a, b)$ with dereferenceable a , the corresponding range denoted by pointers is $[\text{addressof}(*a), \text{addressof}(*a) + (b - a)]$; b might not be dereferenceable. — *end note*

- 7 Just as a regular pointer to an array guarantees that there is a pointer value pointing past the last element of the array, so for any iterator type there is an iterator value that points past the last element of a corresponding sequence. These values are called *past-the-end* values. Values of an iterator i for which the expression $*i$ is defined are called *dereferenceable*. The library never assumes that past-the-end values are dereferenceable. Iterators can also have singular values that are not associated with any sequence. [*Example*: After the declaration of an uninitialized pointer x (as with `int* x;`), x must always be assumed to have a singular value of a pointer. — *end example*] Results of most expressions are undefined for singular values; the only exceptions are destroying an iterator that holds a singular value, the assignment of a non-singular value to an iterator that holds a singular value, and, for iterators that satisfy the *Cpp17DefaultConstructible* requirements, using a value-initialized iterator as the source of a copy or move operation. [*Note*: This guarantee is not offered for default-initialization, although the distinction only matters for types with trivial default constructors such as pointers or aggregates holding pointers. — *end note*] In these cases the singular value is overwritten the same way as any other value. Dereferenceable values are always non-singular.
- 8 An iterator j is called *reachable* from an iterator i if and only if there is a finite sequence of applications of the expression $++i$ that makes $i == j$. If j is reachable from i , they refer to elements of the same sequence.
- 9 Most of the library’s algorithmic templates that operate on data structures have interfaces that use ranges. A *range* is a pair of iterators that designate the beginning and end of the computation. A range $[i, i)$ is an empty range; in general, a range $[i, j)$ refers to the elements in the data structure starting with the element pointed to by i and up to but not including the element pointed to by j . Range $[i, j)$ is valid if and only if j is reachable from i . The result of the application of functions in the library to invalid ranges is undefined.
- 10 All the categories of iterators require only those functions that are realizable for a given category in constant time (amortized). Therefore, requirement tables for the iterators do not have a complexity column.
- 11 Destruction of an iterator may invalidate pointers and references previously obtained from that iterator.
- 12 An *invalid* iterator is an iterator that may be singular.²⁶³
- 13 Iterators are called *constexpr iterators* if all operations provided to satisfy iterator category operations are *constexpr* functions, except for
- (13.1) — a pseudo-destructor call (8.5.1.4), and
- (13.2) — the construction of an iterator with a singular value.

[*Note*: For example, the types “pointer to `int`” and `reverse_iterator<int*>` are *constexpr* iterators. — *end note*]

- 14 In the following subclauses, a and b denote values of type X or `const X`, `difference_type` and `reference` refer to the types `iterator_traits<X>::difference_type` and `iterator_traits<X>::reference`, respectively, n denotes a value of `difference_type`, u , `tmp`, and m denote identifiers, r denotes a value of `X&`, t denotes a value of value type T , o denotes a value of some type that is writable to the output iterator. [*Note*: For an iterator type X there must be an instantiation of `iterator_traits<X>` (28.4.1). — *end note*]

28.2.2 Cpp17Iterator

[**iterator.iterators**]

- 1 The *Cpp17Iterator* requirements form the basis of the iterator taxonomy; every iterator satisfies the *Cpp17Iterator* requirements. This set of requirements specifies operations for dereferencing and incrementing an iterator. Most algorithms will require additional operations to read (28.2.3) or write (28.2.4) values, or to provide a richer set of iterator movements (28.2.5, 28.2.6, 28.2.7).
- 2 A type X satisfies the *Cpp17Iterator* requirements if:
- (2.1) — X satisfies the *Cpp17CopyConstructible*, *Cpp17CopyAssignable*, and *Cpp17Destructible* requirements (20.5.3.1) and lvalues of type X are swappable (20.5.3.2), and
- (2.2) — the expressions in Table 92 are valid and have the indicated semantics.

²⁶³) This definition applies to pointers, since pointers are iterators. The effect of dereferencing an iterator that has been invalidated is undefined.

Table 92 — *Cpp17Iterator* requirements

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>*r</code>	unspecified		<i>Requires:</i> <code>r</code> is dereferenceable.
<code>++r</code>	<code>X&</code>		

28.2.3 Input iterators

[input.iterators]

- ¹ A class or pointer type `X` satisfies the requirements of an input iterator for the value type `T` if `X` satisfies the *Cpp17Iterator* (28.2.2) and *Cpp17EqualityComparable* (Table 22) requirements and the expressions in Table 93 are valid and have the indicated semantics.
- ² In Table 93, the term *the domain of ==* is used in the ordinary mathematical sense to denote the set of values over which `==` is (required to be) defined. This set can change over time. Each algorithm places additional requirements on the domain of `==` for the iterator values it uses. These requirements can be inferred from the uses that algorithm makes of `==` and `!=`. [Example: The call `find(a,b,x)` is defined only if the value of `a` has the property p defined as follows: `b` has property p and a value `i` has property p if `(*i==x)` or if `(*i!=x` and `++i` has property p). — end example]

Table 93 — *Cpp17InputIterator* requirements (in addition to *Cpp17Iterator*)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>a != b</code>	contextually convertible to <code>bool</code>	<code>!(a == b)</code>	<i>Requires:</i> <code>(a, b)</code> is in the domain of <code>==</code> .
<code>*a</code>	reference, convertible to <code>T</code>		<i>Requires:</i> <code>a</code> is dereferenceable. The expression <code>(void)*a</code> , <code>*a</code> is equivalent to <code>*a</code> . If <code>a == b</code> and <code>(a, b)</code> is in the domain of <code>==</code> then <code>*a</code> is equivalent to <code>*b</code> .
<code>a->m</code>		<code>(*a).m</code>	<i>Requires:</i> <code>a</code> is dereferenceable.
<code>++r</code>	<code>X&</code>		<i>Requires:</i> <code>r</code> is dereferenceable. <i>Ensures:</i> <code>r</code> is dereferenceable or <code>r</code> is past-the-end; any copies of the previous value of <code>r</code> are no longer required to be dereferenceable nor to be in the domain of <code>==</code> .
<code>(void)r++</code>			equivalent to <code>(void)++r</code>
<code>*r++</code>	convertible to <code>T</code>	<pre>{ T tmp = *r; ++r; return tmp; }</pre>	

- ³ [Note: For input iterators, `a == b` does not imply `++a == ++b`. (Equality does not guarantee the substitution property or referential transparency.) Algorithms on input iterators should never attempt to pass through the same iterator twice. They should be *single pass* algorithms. Value type `T` is not required to be a *Cpp17CopyAssignable* type (Table 28). These algorithms can be used with `istream` as the source of the input data through the `istream_iterator` class template. — end note]

28.2.4 Output iterators

[output.iterators]

- ¹ A class or pointer type *X* satisfies the requirements of an output iterator if *X* satisfies the *Cpp17Iterator* requirements (28.2.2) and the expressions in Table 94 are valid and have the indicated semantics.

Table 94 — *Cpp17OutputIterator* requirements (in addition to *Cpp17Iterator*)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>*r = o</code>	result is not used		<i>Remarks:</i> After this operation <i>r</i> is not required to be dereferenceable. <i>Ensures:</i> <i>r</i> is incrementable.
<code>++r</code>	<i>X</i> &		<code>&r == &++r.</code> <i>Remarks:</i> After this operation <i>r</i> is not required to be dereferenceable. <i>Ensures:</i> <i>r</i> is incrementable.
<code>r++</code>	convertible to <code>const X&</code>	<code>{ X tmp = r; ++r; return tmp; }</code>	<i>Remarks:</i> After this operation <i>r</i> is not required to be dereferenceable. <i>Ensures:</i> <i>r</i> is incrementable.
<code>*r++ = o</code>	result is not used		<i>Remarks:</i> After this operation <i>r</i> is not required to be dereferenceable. <i>Ensures:</i> <i>r</i> is incrementable.

- ² [Note: The only valid use of an `operator*` is on the left side of the assignment statement. *Assignment through the same value of the iterator happens only once.* Algorithms on output iterators should never attempt to pass through the same iterator twice. They should be *single pass* algorithms. Equality and inequality might not be defined. — end note]

28.2.5 Forward iterators

[forward.iterators]

- ¹ A class or pointer type *X* satisfies the requirements of a forward iterator if

- (1.1) — *X* satisfies the *Cpp17InputIterator* requirements (28.2.3),
- (1.2) — *X* satisfies the *Cpp17DefaultConstructible* requirements (20.5.3.1),
- (1.3) — if *X* is a mutable iterator, `reference` is a reference to *T*; if *X* is a constant iterator, `reference` is a reference to `const T`,
- (1.4) — the expressions in Table 95 are valid and have the indicated semantics, and
- (1.5) — objects of type *X* offer the multi-pass guarantee, described below.

- ² The domain of `==` for forward iterators is that of iterators over the same underlying sequence. However, value-initialized iterators may be compared and shall compare equal to other value-initialized iterators of the same type. [Note: Value-initialized iterators behave as if they refer past the end of the same empty sequence. — end note]

- ³ Two dereferenceable iterators *a* and *b* of type *X* offer the *multi-pass guarantee* if:

- (3.1) — `a == b` implies `++a == ++b` and
- (3.2) — *X* is a pointer type or the expression `(void)++X(a)`, `*a` is equivalent to the expression `*a`.

- ⁴ [Note: The requirement that `a == b` implies `++a == ++b` (which is not true for input and output iterators) and the removal of the restrictions on the number of the assignments through a mutable iterator (which applies to output iterators) allows the use of multi-pass one-directional algorithms with forward iterators. — end note]

Table 95 — *Cpp17ForwardIterator* requirements (in addition to *Cpp17InputIterator*)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>r++</code>	convertible to <code>const X&</code>	{ <code>X tmp = r;</code> <code>++r;</code> <code>return tmp; }</code>	
<code>*r++</code>	reference		

- ⁵ If `a` and `b` are equal, then either `a` and `b` are both dereferenceable or else neither is dereferenceable.
- ⁶ If `a` and `b` are both dereferenceable, then `a == b` if and only if `*a` and `*b` are bound to the same object.

28.2.6 Bidirectional iterators [bidirectional.iterators]

- ¹ A class or pointer type `X` satisfies the requirements of a bidirectional iterator if, in addition to satisfying the *Cpp17ForwardIterator* requirements, the following expressions are valid as shown in Table 96.

Table 96 — *Cpp17BidirectionalIterator* requirements (in addition to *Cpp17ForwardIterator*)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>--r</code>	<code>X&</code>		<i>Requires:</i> there exists <code>s</code> such that <code>r == ++s</code> . <i>Ensures:</i> <code>r</code> is dereferenceable. <code>--(++r) == r</code> . <code>--r == --s</code> implies <code>r == s</code> . <code>&r == &--r</code> .
<code>r--</code>	convertible to <code>const X&</code>	{ <code>X tmp = r;</code> <code>--r;</code> <code>return tmp; }</code>	
<code>*r--</code>	reference		

- ² [Note: Bidirectional iterators allow algorithms to move iterators backward as well as forward. — end note]

28.2.7 Random access iterators [random.access.iterators]

- ¹ A class or pointer type `X` satisfies the requirements of a random access iterator if, in addition to satisfying the *Cpp17BidirectionalIterator* requirements, the following expressions are valid as shown in Table 97.

Table 97 — *Cpp17RandomAccessIterator* requirements (in addition to *Cpp17BidirectionalIterator*)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>r += n</code>	<code>X&</code>	{ <code>difference_type m = n;</code> <code>if (m >= 0)</code> <code>while (m--)</code> <code>++r;</code> <code>else</code> <code>while (m++)</code> <code>--r;</code> <code>return r; }</code>	
<code>a + n</code> <code>n + a</code>	<code>X</code>	{ <code>X tmp = a;</code> <code>return tmp += n; }</code>	<code>a + n == n + a</code> .

Table 97 — *Cpp17RandomAccessIterator* requirements (in addition to *Cpp17BidirectionalIterator*) (continued)

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
$r -= n$	$X\&$	return $r += -n$;	<i>Requires:</i> the absolute value of n is in the range of representable values of <code>difference_type</code> .
$a - n$	X	{ X tmp = a; return tmp -= n; }	
$b - a$	<code>difference_type</code>	return n	<i>Requires:</i> there exists a value n of type <code>difference_type</code> such that $a + n == b$. $b == a + (b - a)$.
$a[n]$	convertible to reference	$*(a + n)$	
$a < b$	contextually convertible to <code>bool</code>	$b - a > 0$	$<$ is a total ordering relation
$a > b$	contextually convertible to <code>bool</code>	$b < a$	$>$ is a total ordering relation opposite to $<$.
$a >= b$	contextually convertible to <code>bool</code>	$!(a < b)$	
$a <= b$	contextually convertible to <code>bool</code> .	$!(a > b)$	

28.3 Header `<iterator>` synopsis

[iterator.synopsis]

```

namespace std {
    // 28.4, primitives
    template<class Iterator> struct iterator_traits;
    template<class T> struct iterator_traits<T*>;

    struct input_iterator_tag { };
    struct output_iterator_tag { };
    struct forward_iterator_tag: public input_iterator_tag { };
    struct bidirectional_iterator_tag: public forward_iterator_tag { };
    struct random_access_iterator_tag: public bidirectional_iterator_tag { };

    // 28.4.3, iterator operations
    template<class InputIterator, class Distance>
        constexpr void
            advance(InputIterator& i, Distance n);
    template<class InputIterator>
        constexpr typename iterator_traits<InputIterator>::difference_type
            distance(InputIterator first, InputIterator last);
    template<class InputIterator>
        constexpr InputIterator
            next(InputIterator x,
                typename iterator_traits<InputIterator>::difference_type n = 1);
    template<class BidirectionalIterator>
        constexpr BidirectionalIterator
            prev(BidirectionalIterator x,
                typename iterator_traits<BidirectionalIterator>::difference_type n = 1);

    // 28.5, predefined iterators
    template<class Iterator> class reverse_iterator;

```

```

template<class Iterator1, class Iterator2>
constexpr bool operator==(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator!=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);

template<class Iterator1, class Iterator2>
constexpr auto operator-(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y) -> decltype(y.base() - x.base());
template<class Iterator>
constexpr reverse_iterator<Iterator>
operator+(
    typename reverse_iterator<Iterator>::difference_type n,
    const reverse_iterator<Iterator>& x);

template<class Iterator>
constexpr reverse_iterator<Iterator> make_reverse_iterator(Iterator i);

template<class Container> class back_insert_iterator;
template<class Container>
    back_insert_iterator<Container> back_inserter(Container& x);

template<class Container> class front_insert_iterator;
template<class Container>
    front_insert_iterator<Container> front_inserter(Container& x);

template<class Container> class insert_iterator;
template<class Container>
    insert_iterator<Container> inserter(Container& x, typename Container::iterator i);

template<class Iterator> class move_iterator;
template<class Iterator1, class Iterator2>
constexpr bool operator==(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator!=(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);

```



```

template<class Iterator1, class Iterator2>
    constexpr bool operator<=(
        const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
    constexpr bool operator>=(
        const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);

template<class Iterator1, class Iterator2>
    constexpr auto operator-(
        const move_iterator<Iterator1>& x,
        const move_iterator<Iterator2>& y) -> decltype(x.base() - y.base());
template<class Iterator>
    constexpr move_iterator<Iterator> operator+(
        typename move_iterator<Iterator>::difference_type n, const move_iterator<Iterator>& x);
template<class Iterator>
    constexpr move_iterator<Iterator> make_move_iterator(Iterator i);

// 28.6, stream iterators
template<class T, class charT = char, class traits = char_traits<charT>,
        class Distance = ptrdiff_t>
class istream_iterator;
template<class T, class charT, class traits, class Distance>
    bool operator==(const istream_iterator<T, charT, traits, Distance>& x,
        const istream_iterator<T, charT, traits, Distance>& y);
template<class T, class charT, class traits, class Distance>
    bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
        const istream_iterator<T, charT, traits, Distance>& y);

template<class T, class charT = char, class traits = char_traits<charT>>
    class ostream_iterator;

template<class charT, class traits = char_traits<charT>>
    class istreambuf_iterator;
template<class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);
template<class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);

template<class charT, class traits = char_traits<charT>>
    class ostreambuf_iterator;

// 28.7, range access
template<class C> constexpr auto begin(C& c) -> decltype(c.begin());
template<class C> constexpr auto begin(const C& c) -> decltype(c.begin());
template<class C> constexpr auto end(C& c) -> decltype(c.end());
template<class C> constexpr auto end(const C& c) -> decltype(c.end());
template<class T, size_t N> constexpr T* begin(T (&array)[N]) noexcept;
template<class T, size_t N> constexpr T* end(T (&array)[N]) noexcept;
template<class C> constexpr auto cbegin(const C& c) noexcept(noexcept(std::begin(c)))
    -> decltype(std::begin(c));
template<class C> constexpr auto cend(const C& c) noexcept(noexcept(std::end(c)))
    -> decltype(std::end(c));
template<class C> constexpr auto rbegin(C& c) -> decltype(c.rbegin());
template<class C> constexpr auto rbegin(const C& c) -> decltype(c.rbegin());
template<class C> constexpr auto rend(C& c) -> decltype(c.rend());
template<class C> constexpr auto rend(const C& c) -> decltype(c.rend());
template<class T, size_t N> constexpr reverse_iterator<T*> rbegin(T (&array)[N]);
template<class T, size_t N> constexpr reverse_iterator<T*> rend(T (&array)[N]);
template<class E> constexpr reverse_iterator<const E*> rbegin(initializer_list<E> il);
template<class E> constexpr reverse_iterator<const E*> rend(initializer_list<E> il);
template<class C> constexpr auto crbegin(const C& c) -> decltype(std::rbegin(c));
template<class C> constexpr auto crend(const C& c) -> decltype(std::rend(c));

```

```

// 28.8, container access
template<class C> constexpr auto size(const C& c) -> decltype(c.size());
template<class T, size_t N> constexpr size_t size(const T (&array)[N]) noexcept;
template<class C> [[nodiscard]] constexpr auto empty(const C& c) -> decltype(c.empty());
template<class T, size_t N> [[nodiscard]] constexpr bool empty(const T (&array)[N]) noexcept;
template<class E> [[nodiscard]] constexpr bool empty(initializer_list<E> il) noexcept;
template<class C> constexpr auto data(C& c) -> decltype(c.data());
template<class C> constexpr auto data(const C& c) -> decltype(c.data());
template<class T, size_t N> constexpr T* data(T (&array)[N]) noexcept;
template<class E> constexpr const E* data(initializer_list<E> il) noexcept;
}

```

28.4 Iterator primitives

[iterator.primitives]

- ¹ To simplify the task of defining iterators, the library provides several classes and functions:

28.4.1 Iterator traits

[iterator.traits]

- ¹ To implement algorithms only in terms of iterators, it is often necessary to determine the value and difference types that correspond to a particular iterator type. Accordingly, it is required that if `Iterator` is the type of an iterator, the types

```

iterator_traits<Iterator>::difference_type
iterator_traits<Iterator>::value_type
iterator_traits<Iterator>::iterator_category

```

be defined as the iterator's difference type, value type and iterator category, respectively. In addition, the types

```

iterator_traits<Iterator>::reference
iterator_traits<Iterator>::pointer

```

shall be defined as the iterator's reference and pointer types, that is, for an iterator object `a`, the same type as the type of `*a` and `a->`, respectively. In the case of an output iterator, the types

```

iterator_traits<Iterator>::difference_type
iterator_traits<Iterator>::value_type
iterator_traits<Iterator>::reference
iterator_traits<Iterator>::pointer

```

may be defined as `void`.

- ² If `Iterator` has valid (17.9.2) member types `difference_type`, `value_type`, `pointer`, `reference`, and `iterator_category`, `iterator_traits<Iterator>` shall have the following as publicly accessible members:

```

using difference_type = typename Iterator::difference_type;
using value_type      = typename Iterator::value_type;
using pointer         = typename Iterator::pointer;
using reference       = typename Iterator::reference;
using iterator_category = typename Iterator::iterator_category;

```

Otherwise, `iterator_traits<Iterator>` shall have no members by any of the above names.

- ³ It is specialized for pointers as

```

namespace std {
    template<class T> struct iterator_traits<T*> {
        using difference_type = ptrdiff_t;
        using value_type     = remove_cv_t<T>;
        using pointer        = T*;
        using reference      = T&;
        using iterator_category = random_access_iterator_tag;
    };
}

```

- ⁴ [Example: To implement a generic `reverse` function, a C++ program can do the following:

```

template<class BidirectionalIterator>
void reverse(BidirectionalIterator first, BidirectionalIterator last) {
    typename iterator_traits<BidirectionalIterator>::difference_type n =
        distance(first, last);
    --n;
}

```

```

while(n > 0) {
    typename iterator_traits<BidirectionalIterator>::value_type
        tmp = *first;
    *first++ = *--last;
    *last = tmp;
    n -= 2;
}
}

```

— end example]

28.4.2 Standard iterator tags

[std.iterator.tags]

- ¹ It is often desirable for a function template specialization to find out what is the most specific category of its iterator argument, so that the function can select the most efficient algorithm at compile time. To facilitate this, the library introduces *category tag* classes which are used as compile time tags for algorithm selection. They are: `input_iterator_tag`, `output_iterator_tag`, `forward_iterator_tag`, `bidirectional_iterator_tag` and `random_access_iterator_tag`. For every iterator of type `Iterator`, `iterator_traits<Iterator>::iterator_category` shall be defined to be the most specific category tag that describes the iterator's behavior.

```

namespace std {
    struct input_iterator_tag { };
    struct output_iterator_tag { };
    struct forward_iterator_tag: public input_iterator_tag { };
    struct bidirectional_iterator_tag: public forward_iterator_tag { };
    struct random_access_iterator_tag: public bidirectional_iterator_tag { };
}

```

- ² [Example: For a program-defined iterator `BinaryTreeIterator`, it could be included into the bidirectional iterator category by specializing the `iterator_traits` template:

```

template<class T> struct iterator_traits<BinaryTreeIterator<T>> {
    using iterator_category = bidirectional_iterator_tag;
    using difference_type   = ptrdiff_t;
    using value_type        = T;
    using pointer           = T*;
    using reference         = T&;
};

```

— end example]

- ³ [Example: If `evolve()` is well-defined for bidirectional iterators, but can be implemented more efficiently for random access iterators, then the implementation is as follows:

```

template<class BidirectionalIterator>
inline void
evolve(BidirectionalIterator first, BidirectionalIterator last) {
    evolve(first, last,
        typename iterator_traits<BidirectionalIterator>::iterator_category());
}

template<class BidirectionalIterator>
void evolve(BidirectionalIterator first, BidirectionalIterator last,
    bidirectional_iterator_tag) {
    // more generic, but less efficient algorithm
}

template<class RandomAccessIterator>
void evolve(RandomAccessIterator first, RandomAccessIterator last,
    random_access_iterator_tag) {
    // more efficient, but less generic algorithm
}

```

— end example]

28.4.3 Iterator operations [iterator.operations]

- ¹ Since only random access iterators provide + and - operators, the library provides two function templates `advance` and `distance`. These function templates use + and - for random access iterators (and are, therefore, constant time for them); for input, forward and bidirectional iterators they use ++ to provide linear time implementations.

```
template<class InputIterator, class Distance>
constexpr void advance(InputIterator& i, Distance n);
```

- ² *Requires:* n shall be negative only for bidirectional and random access iterators.

- ³ *Effects:* Increments (or decrements for negative n) iterator reference i by n.

```
template<class InputIterator>
constexpr typename iterator_traits<InputIterator>::difference_type
distance(InputIterator first, InputIterator last);
```

- ⁴ *Effects:* If `InputIterator` meets the *Cpp17RandomAccessIterator* requirements, returns (last - first); otherwise, returns the number of increments needed to get from first to last.

- ⁵ *Requires:* If `InputIterator` meets the *Cpp17RandomAccessIterator* requirements, last shall be reachable from first or first shall be reachable from last; otherwise, last shall be reachable from first.

```
template<class InputIterator>
constexpr InputIterator next(InputIterator x,
                             typename iterator_traits<InputIterator>::difference_type n = 1);
```

- ⁶ *Effects:* Equivalent to: `advance(x, n); return x;`

```
template<class BidirectionalIterator>
constexpr BidirectionalIterator prev(BidirectionalIterator x,
                                     typename iterator_traits<BidirectionalIterator>::difference_type n = 1);
```

- ⁷ *Effects:* Equivalent to: `advance(x, -n); return x;`

28.5 Iterator adaptors [predef.iterators]

28.5.1 Reverse iterators [reverse.iterators]

- ¹ Class template `reverse_iterator` is an iterator adaptor that iterates from the end of the sequence defined by its underlying iterator to the beginning of that sequence. The fundamental relation between a reverse iterator and its corresponding iterator i is established by the identity: `&*(reverse_iterator(i)) == &*(i - 1)`.

28.5.1.1 Class template `reverse_iterator` [reverse.iterator]

```
namespace std {
    template<class Iterator>
    class reverse_iterator {
    public:
        using iterator_type      = Iterator;
        using iterator_category  = typename iterator_traits<Iterator>::iterator_category;
        using value_type         = typename iterator_traits<Iterator>::value_type;
        using difference_type     = typename iterator_traits<Iterator>::difference_type;
        using pointer            = typename iterator_traits<Iterator>::pointer;
        using reference           = typename iterator_traits<Iterator>::reference;

        constexpr reverse_iterator();
        constexpr explicit reverse_iterator(Iterator x);
        template<class U> constexpr reverse_iterator(const reverse_iterator<U>& u);
        template<class U> constexpr reverse_iterator& operator=(const reverse_iterator<U>& u);

        constexpr Iterator base() const;          // explicit
        constexpr reference operator*() const;
        constexpr pointer operator->() const;
    };
}
```

```

constexpr reverse_iterator& operator++();
constexpr reverse_iterator operator++(int);
constexpr reverse_iterator& operator--();
constexpr reverse_iterator operator--(int);

constexpr reverse_iterator operator+ (difference_type n) const;
constexpr reverse_iterator& operator+=(difference_type n);
constexpr reverse_iterator operator- (difference_type n) const;
constexpr reverse_iterator& operator-=(difference_type n);
constexpr unspecified operator[] (difference_type n) const;

protected:
    Iterator current;
};

template<class Iterator1, class Iterator2>
constexpr bool operator==(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator!=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>=(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr auto operator-(
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y) -> decltype(y.base() - x.base());
template<class Iterator>
constexpr reverse_iterator<Iterator> operator+(
    typename reverse_iterator<Iterator>::difference_type n,
    const reverse_iterator<Iterator>& x);

template<class Iterator>
constexpr reverse_iterator<Iterator> make_reverse_iterator(Iterator i);
}

```

28.5.1.2 reverse_iterator requirements [reverse.iter.requirements]

- ¹ The template parameter *Iterator* shall satisfy all the requirements of a *Cpp17BidirectionalIterator* (28.2.6).
- ² Additionally, *Iterator* shall satisfy the requirements of a *Cpp17RandomAccessIterator* (28.2.7) if any of the members *operator+*, *operator-*, *operator+=*, *operator-=* (28.5.1.6), *operator[]* (28.5.1.5), or the non-member operators (28.5.1.7) *operator<*, *operator>*, *operator<=*, *operator>=*, *operator-*, or *operator+* (28.5.1.8) are referenced in a way that requires instantiation (17.8.1).

28.5.1.3 reverse_iterator construction and assignment [reverse.iter.cons]

```
constexpr reverse_iterator();
```

- ¹ *Effects:* Value-initializes *current*. Iterator operations applied to the resulting iterator have defined

behavior if and only if the corresponding operations are defined on a value-initialized iterator of type `Iterator`.

```
constexpr explicit reverse_iterator(Iterator x);
```

2 *Effects:* Initializes `current` with `x`.

```
template<class U> constexpr reverse_iterator(const reverse_iterator<U>& u);
```

3 *Effects:* Initializes `current` with `u.current`.

```
template<class U>
constexpr reverse_iterator&
operator=(const reverse_iterator<U>& u);
```

4 *Effects:* Assigns `u.base()` to `current`.

5 *Returns:* `*this`.

28.5.1.4 Conversion

[reverse.iter.conv]

```
constexpr Iterator base() const; // explicit
```

1 *Returns:* `current`.

28.5.1.5 reverse_iterator element access

[reverse.iter.elem]

```
constexpr reference operator*() const;
```

1 *Effects:* As if by:

```
Iterator tmp = current;
return *--tmp;
```

```
constexpr pointer operator->() const;
```

2 *Returns:* `addressof(operator*())`.

```
constexpr unspecified operator[](difference_type n) const;
```

3 *Returns:* `current[-n-1]`.

28.5.1.6 reverse_iterator navigation

[reverse.iter.nav]

```
constexpr reverse_iterator operator+(difference_type n) const;
```

1 *Returns:* `reverse_iterator(current-n)`.

```
constexpr reverse_iterator operator-(difference_type n) const;
```

2 *Returns:* `reverse_iterator(current+n)`.

```
constexpr reverse_iterator& operator++();
```

3 *Effects:* As if by: `--current`;

4 *Returns:* `*this`.

```
constexpr reverse_iterator operator++(int);
```

5 *Effects:* As if by:

```
reverse_iterator tmp = *this;
--current;
return tmp;
```

```
constexpr reverse_iterator& operator--();
```

6 *Effects:* As if by `++current`.

7 *Returns:* `*this`.

```
constexpr reverse_iterator operator--(int);
```

8 *Effects:* As if by:

```
reverse_iterator tmp = *this;
```

```

    ++current;
    return tmp;

```

```
constexpr reverse_iterator& operator+=(difference_type n);
```

9 *Effects:* As if by: `current -= n;`

10 *Returns:* `*this.`

```
constexpr reverse_iterator& operator-=(difference_type n);
```

11 *Effects:* As if by: `current += n;`

12 *Returns:* `*this.`

28.5.1.7 reverse_iterator comparisons

[reverse.iter.cmp]

```
template<class Iterator1, class Iterator2>
constexpr bool operator==(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

1 *Returns:* `x.current == y.current.`

```
template<class Iterator1, class Iterator2>
constexpr bool operator!=(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

2 *Returns:* `x.current != y.current.`

```
template<class Iterator1, class Iterator2>
constexpr bool operator<(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

3 *Returns:* `x.current > y.current.`

```
template<class Iterator1, class Iterator2>
constexpr bool operator>(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

4 *Returns:* `x.current < y.current.`

```
template<class Iterator1, class Iterator2>
constexpr bool operator<=(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

5 *Returns:* `x.current >= y.current.`

```
template<class Iterator1, class Iterator2>
constexpr bool operator>=(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y);
```

6 *Returns:* `x.current <= y.current.`

28.5.1.8 Non-member functions

[reverse.iter.nonmember]

```
template<class Iterator1, class Iterator2>
constexpr auto operator-(

```

```
    const reverse_iterator<Iterator1>& x,
    const reverse_iterator<Iterator2>& y) -> decltype(y.base() - x.base());
```

1 *Returns:* `y.current - x.current.`

```
template<class Iterator>
```

```
constexpr reverse_iterator<Iterator> operator+(
    typename reverse_iterator<Iterator>::difference_type n,
```

```
const reverse_iterator<Iterator>& x);
```

2 *Returns:* reverse_iterator<Iterator> (x.current - n).

```
template<class Iterator>
constexpr reverse_iterator<Iterator> make_reverse_iterator(Iterator i);
```

3 *Returns:* reverse_iterator<Iterator>(i).

28.5.2 Insert iterators [insert.iterators]

1 To make it possible to deal with insertion in the same way as writing into an array, a special kind of iterator adaptors, called *insert iterators*, are provided in the library. With regular iterator classes,

```
while (first != last) *result++ = *first++;
```

causes a range [first, last) to be copied into a range starting with result. The same code with result being an insert iterator will insert corresponding elements into the container. This device allows all of the copying algorithms in the library to work in the *insert mode* instead of the *regular overwrite mode*.

2 An insert iterator is constructed from a container and possibly one of its iterators pointing to where insertion takes place if it is neither at the beginning nor at the end of the container. Insert iterators satisfy the requirements of output iterators. operator* returns the insert iterator itself. The assignment operator=(const T& x) is defined on insert iterators to allow writing into them, it inserts x right before where the insert iterator is pointing. In other words, an insert iterator is like a cursor pointing into the container where the insertion takes place. back_insert_iterator inserts elements at the end of a container, front_insert_iterator inserts elements at the beginning of a container, and insert_iterator inserts elements where the iterator points to in a container. back_inserter, front_inserter, and inserter are three functions making the insert iterators out of a container.

28.5.2.1 Class template back_insert_iterator [back.insert.iterator]

```
namespace std {
  template<class Container>
  class back_insert_iterator {
  protected:
    Container* container;

  public:
    using iterator_category = output_iterator_tag;
    using value_type        = void;
    using difference_type   = void;
    using pointer           = void;
    using reference         = void;
    using container_type    = Container;

    explicit back_insert_iterator(Container& x);
    back_insert_iterator& operator=(const typename Container::value_type& value);
    back_insert_iterator& operator=(typename Container::value_type&& value);

    back_insert_iterator& operator*();
    back_insert_iterator& operator++();
    back_insert_iterator operator++(int);
  };

  template<class Container>
  back_insert_iterator<Container> back_inserter(Container& x);
}
```

28.5.2.1.1 back_insert_iterator operations [back.insert.iter.ops]

```
explicit back_insert_iterator(Container& x);
```

1 *Effects:* Initializes container with addressof(x).

```
back_insert_iterator& operator=(const typename Container::value_type& value);
```

2 *Effects:* As if by: container->push_back(value);

3 *Returns:* *this.


```
back_insert_iterator& operator=(typename Container::value_type&& value);
```

4 *Effects:* As if by: `container->push_back(std::move(value));`

5 *Returns:* `*this`.

```
back_insert_iterator& operator*();
```

6 *Returns:* `*this`.

```
back_insert_iterator& operator++();
```

```
back_insert_iterator operator++(int);
```

7 *Returns:* `*this`.

28.5.2.1.2 back_inserter

[back.inserter]

```
template<class Container>
```

```
back_insert_iterator<Container> back_inserter(Container& x);
```

1 *Returns:* `back_insert_iterator<Container>(x)`.

28.5.2.2 Class template front_insert_iterator

[front.insert.iterator]

```
namespace std {
```

```
template<class Container>
```

```
class front_insert_iterator {
```

```
protected:
```

```
Container* container;
```

```
public:
```

```
using iterator_category = output_iterator_tag;
```

```
using value_type = void;
```

```
using difference_type = void;
```

```
using pointer = void;
```

```
using reference = void;
```

```
using container_type = Container;
```

```
explicit front_insert_iterator(Container& x);
```

```
front_insert_iterator& operator=(const typename Container::value_type& value);
```

```
front_insert_iterator& operator=(typename Container::value_type&& value);
```

```
front_insert_iterator& operator*();
```

```
front_insert_iterator& operator++();
```

```
front_insert_iterator operator++(int);
```

```
};
```

```
template<class Container>
```

```
front_insert_iterator<Container> front_inserter(Container& x);
```

```
}
```

28.5.2.2.1 front_insert_iterator operations

[front.insert.iter.ops]

```
explicit front_insert_iterator(Container& x);
```

1 *Effects:* Initializes container with `addressof(x)`.

```
front_insert_iterator& operator=(const typename Container::value_type& value);
```

2 *Effects:* As if by: `container->push_front(value);`

3 *Returns:* `*this`.

```
front_insert_iterator& operator=(typename Container::value_type&& value);
```

4 *Effects:* As if by: `container->push_front(std::move(value));`

5 *Returns:* `*this`.

```
front_insert_iterator& operator*();
```

6 *Returns:* `*this`.

```
front_insert_iterator& operator++();
front_insert_iterator operator++(int);
```

7 *Returns:* *this.

28.5.2.2.2 front_inserter

[front.inserter]

```
template<class Container>
front_insert_iterator<Container> front_inserter(Container& x);
```

1 *Returns:* front_insert_iterator<Container>(x).

28.5.2.3 Class template insert_iterator

[insert.iterator]

```
namespace std {
  template<class Container>
  class insert_iterator {
  protected:
    Container* container;
    typename Container::iterator iter;

  public:
    using iterator_category = output_iterator_tag;
    using value_type        = void;
    using difference_type   = void;
    using pointer           = void;
    using reference         = void;
    using container_type    = Container;

    insert_iterator(Container& x, typename Container::iterator i);
    insert_iterator& operator=(const typename Container::value_type& value);
    insert_iterator& operator=(typename Container::value_type&& value);

    insert_iterator& operator*();
    insert_iterator& operator++();
    insert_iterator& operator++(int);
  };

  template<class Container>
  insert_iterator<Container> inserter(Container& x, typename Container::iterator i);
}
```

28.5.2.3.1 insert_iterator operations

[insert.iter.ops]

```
insert_iterator(Container& x, typename Container::iterator i);
```

1 *Effects:* Initializes container with addressof(x) and iter with i.

```
insert_iterator& operator=(const typename Container::value_type& value);
```

2 *Effects:* As if by:

```
iter = container->insert(iter, value);
++iter;
```

3 *Returns:* *this.

```
insert_iterator& operator=(typename Container::value_type&& value);
```

4 *Effects:* As if by:

```
iter = container->insert(iter, std::move(value));
++iter;
```

5 *Returns:* *this.

```
insert_iterator& operator*();
```

6 *Returns:* *this.

```
insert_iterator& operator++();
insert_iterator& operator++(int);
```

7 *Returns: *this.*

28.5.2.3.2 inserter

[inserter]

```
template<class Container>
insert_iterator<Container> inserter(Container& x, typename Container::iterator i);
```

1 *Returns: insert_iterator<Container>(x, i).*

28.5.3 Move iterators

[move.iterators]

1 Class template `move_iterator` is an iterator adaptor with the same behavior as the underlying iterator except that its indirection operator implicitly converts the value returned by the underlying iterator's indirection operator to an rvalue. Some generic algorithms can be called with move iterators to replace copying with moving.

2 [Example:

```
list<string> s;
// populate the list s
vector<string> v1(s.begin(), s.end()); // copies strings into v1
vector<string> v2(make_move_iterator(s.begin()),
                 make_move_iterator(s.end())); // moves strings into v2
```

— end example]

28.5.3.1 Class template `move_iterator`

[move.iterator]

```
namespace std {
template<class Iterator>
class move_iterator {
public:
using iterator_type = Iterator;
using iterator_category = typename iterator_traits<Iterator>::iterator_category;
using value_type = typename iterator_traits<Iterator>::value_type;
using difference_type = typename iterator_traits<Iterator>::difference_type;
using pointer = Iterator;
using reference = see below;

constexpr move_iterator();
constexpr explicit move_iterator(Iterator i);
template<class U> constexpr move_iterator(const move_iterator<U>& u);
template<class U> constexpr move_iterator& operator=(const move_iterator<U>& u);

constexpr iterator_type base() const;
constexpr reference operator*() const;
constexpr pointer operator->() const;

constexpr move_iterator& operator++();
constexpr move_iterator operator++(int);
constexpr move_iterator& operator--();
constexpr move_iterator operator--(int);

constexpr move_iterator operator+(difference_type n) const;
constexpr move_iterator& operator+=(difference_type n);
constexpr move_iterator operator-(difference_type n) const;
constexpr move_iterator& operator-=(difference_type n);
constexpr unspecified operator[](difference_type n) const;

private:
Iterator current; // exposition only
};
```

```

template<class Iterator1, class Iterator2>
constexpr bool operator==(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator!=(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator<=(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
template<class Iterator1, class Iterator2>
constexpr bool operator>=(
    const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);

template<class Iterator1, class Iterator2>
constexpr auto operator-(
    const move_iterator<Iterator1>& x,
    const move_iterator<Iterator2>& y) -> decltype(x.base() - y.base());
template<class Iterator>
constexpr move_iterator<Iterator> operator+(
    typename move_iterator<Iterator>::difference_type n, const move_iterator<Iterator>& x);
template<class Iterator>
constexpr move_iterator<Iterator> make_move_iterator(Iterator i);
}

```

- ¹ Let R denote `iterator_traits<Iterator>::reference`. If `is_reference_v<R>` is true, the template specialization `move_iterator<Iterator>` shall define the nested type named `reference` as a synonym for `remove_reference_t<R>&&`, otherwise as a synonym for R .

28.5.3.2 `move_iterator` requirements

[move.iter.requirements]

- ¹ The template parameter `Iterator` shall satisfy the *Cpp17InputIterator* requirements (28.2.3). Additionally, if any of the bidirectional or random access traversal functions are instantiated, the template parameter shall satisfy the *Cpp17BidirectionalIterator* requirements (28.2.6) or *Cpp17RandomAccessIterator* requirements (28.2.7), respectively.

28.5.3.3 `move_iterator` construction and assignment

[move.iter.cons]

```
constexpr move_iterator();
```

- ¹ *Effects:* Constructs a `move_iterator`, value-initializing `current`. Iterator operations applied to the resulting iterator have defined behavior if and only if the corresponding operations are defined on a value-initialized iterator of type `Iterator`.

```
constexpr explicit move_iterator(Iterator i);
```

- ² *Effects:* Constructs a `move_iterator`, initializing `current` with `i`.

```
template<class U> constexpr move_iterator(const move_iterator<U>& u);
```

- ³ *Effects:* Constructs a `move_iterator`, initializing `current` with `u.base()`.

- ⁴ *Requires:* `U` shall be convertible to `Iterator`.

```
template<class U> constexpr move_iterator& operator=(const move_iterator<U>& u);
```

- ⁵ *Effects:* Assigns `u.base()` to `current`.

- ⁶ *Requires:* `U` shall be convertible to `Iterator`.

28.5.3.4 `move_iterator` conversion

[move.iter.op.conv]

```
constexpr Iterator base() const;
```

- ¹ *Returns:* `current`.

28.5.3.5 `move_iterator` element access

[move.iter.elem]

```
constexpr reference operator*() const;
```

1 *Returns:* `static_cast<reference>(*current)`.

```
constexpr pointer operator->() const;
```

2 *Returns:* `current`.

```
constexpr unspecified operator[](difference_type n) const;
```

3 *Returns:* `std::move(current[n])`.

28.5.3.6 `move_iterator` navigation

[move.iter.nav]

```
constexpr move_iterator& operator++();
```

1 *Effects:* As if by `++current`.

2 *Returns:* `*this`.

```
constexpr move_iterator operator++(int);
```

3 *Effects:* As if by:

```
    move_iterator tmp = *this;
    ++current;
    return tmp;
```

```
constexpr move_iterator& operator--();
```

4 *Effects:* As if by `--current`.

5 *Returns:* `*this`.

```
constexpr move_iterator operator--(int);
```

6 *Effects:* As if by:

```
    move_iterator tmp = *this;
    --current;
    return tmp;
```

```
constexpr move_iterator operator+(difference_type n) const;
```

7 *Returns:* `move_iterator(current + n)`.

```
constexpr move_iterator& operator+=(difference_type n);
```

8 *Effects:* As if by: `current += n`;

9 *Returns:* `*this`.

```
constexpr move_iterator operator-(difference_type n) const;
```

10 *Returns:* `move_iterator(current - n)`.

```
constexpr move_iterator& operator-=(difference_type n);
```

11 *Effects:* As if by: `current -= n`;

12 *Returns:* `*this`.

28.5.3.7 `move_iterator` comparisons

[move.iter.op.comp]

```
template<class Iterator1, class Iterator2>
```

```
constexpr bool operator==(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

1 *Returns:* `x.base() == y.base()`.

```
template<class Iterator1, class Iterator2>
```

```
constexpr bool operator!=(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

2 *Returns:* `!(x == y)`.

```
template<class Iterator1, class Iterator2>
constexpr bool operator<(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

3 *Returns:* `x.base() < y.base()`.

```
template<class Iterator1, class Iterator2>
constexpr bool operator>(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

4 *Returns:* `y < x`.

```
template<class Iterator1, class Iterator2>
constexpr bool operator<=(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

5 *Returns:* `!(y < x)`.

```
template<class Iterator1, class Iterator2>
constexpr bool operator>=(const move_iterator<Iterator1>& x, const move_iterator<Iterator2>& y);
```

6 *Returns:* `!(x < y)`.

28.5.3.8 `move_iterator` non-member functions

[`move.iter.nonmember`]

```
template<class Iterator1, class Iterator2>
constexpr auto operator-(
    const move_iterator<Iterator1>& x,
    const move_iterator<Iterator2>& y) -> decltype(x.base() - y.base());
```

1 *Returns:* `x.base() - y.base()`.

```
template<class Iterator>
constexpr move_iterator<Iterator> operator+(
    typename move_iterator<Iterator>::difference_type n, const move_iterator<Iterator>& x);
```

2 *Returns:* `x + n`.

```
template<class Iterator>
constexpr move_iterator<Iterator> make_move_iterator(Iterator i);
```

3 *Returns:* `move_iterator<Iterator>(i)`.

28.6 Stream iterators

[`stream.iterators`]

1 To make it possible for algorithmic templates to work directly with input/output streams, appropriate iterator-like class templates are provided.

[*Example:*

```
partial_sum(istream_iterator<double, char>(cin),
            istream_iterator<double, char>(),
            ostream_iterator<double, char>(cout, "\n"));
```

reads a file containing floating-point numbers from `cin`, and prints the partial sums onto `cout`. — *end example*]

28.6.1 Class template `istream_iterator`

[`istream.iterator`]

1 The class template `istream_iterator` is an input iterator (28.2.3) that reads (using `operator>>`) successive elements from the input stream for which it was constructed. After it is constructed, and every time `++` is used, the iterator reads and stores a value of `T`. If the iterator fails to read and store a value of `T` (`fail()` on the stream returns `true`), the iterator becomes equal to the *end-of-stream* iterator value. The constructor with no arguments `istream_iterator()` always constructs an end-of-stream input iterator object, which is the only legitimate iterator to be used for the end condition. The result of `operator*` on an end-of-stream iterator is not defined. For any other iterator value a `const T&` is returned. The result of `operator->` on an end-of-stream iterator is not defined. For any other iterator value a `const T*` is returned. The behavior of a program that applies `operator++()` to an end-of-stream iterator is undefined. It is impossible to store things into `istream` iterators. The type `T` shall satisfy the *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, and *Cpp17CopyAssignable* requirements.

2 Two end-of-stream iterators are always equal. An end-of-stream iterator is not equal to a non-end-of-stream iterator. Two non-end-of-stream iterators are equal when they are constructed from the same stream.

```

namespace std {
    template<class T, class charT = char, class traits = char_traits<charT>,
            class Distance = ptrdiff_t>
    class istream_iterator {
    public:
        using iterator_category = input_iterator_tag;
        using value_type        = T;
        using difference_type    = Distance;
        using pointer            = const T*;
        using reference          = const T&;
        using char_type          = charT;
        using traits_type        = traits;
        using istream_type       = basic_istream<charT,traits>;

        constexpr istream_iterator();
        istream_iterator(istream_type& s);
        istream_iterator(const istream_iterator& x) = default;
        ~istream_iterator() = default;
        istream_iterator& operator=(const istream_iterator&) = default;

        const T& operator*() const;
        const T* operator->() const;
        istream_iterator& operator++();
        istream_iterator operator++(int);

    private:
        basic_istream<charT,traits>* in_stream; // exposition only
        T value;                               // exposition only
    };

    template<class T, class charT, class traits, class Distance>
        bool operator==(const istream_iterator<T,charT,traits,Distance>& x,
                        const istream_iterator<T,charT,traits,Distance>& y);
    template<class T, class charT, class traits, class Distance>
        bool operator!=(const istream_iterator<T,charT,traits,Distance>& x,
                        const istream_iterator<T,charT,traits,Distance>& y);
}

```

28.6.1.1 istream_iterator constructors and destructor

[istream.iterator.cons]

```
constexpr istream_iterator();
```

- 1 *Effects:* Constructs the end-of-stream iterator. If `is_trivially_default_constructible_v<T>` is true, then this constructor is a constexpr constructor.

- 2 *Ensures:* `in_stream == 0`.

```
istream_iterator(istream_type& s);
```

- 3 *Effects:* Initializes `in_stream` with `addressof(s)`. `value` may be initialized during construction or the first time it is referenced.

- 4 *Ensures:* `in_stream == addressof(s)`.

```
istream_iterator(const istream_iterator& x) = default;
```

- 5 *Effects:* Constructs a copy of `x`. If `is_trivially_copy_constructible_v<T>` is true, then this constructor is a trivial copy constructor.

- 6 *Ensures:* `in_stream == x.in_stream`.

```
~istream_iterator() = default;
```

- 7 *Effects:* The iterator is destroyed. If `is_trivially_destructible_v<T>` is true, then this destructor is trivial.

28.6.1.2 istream_iterator operations

[istream.iterator.ops]

```
const T& operator*() const;
```

1 *Returns:* value.

```
const T* operator->() const;
```

2 *Returns:* addressof(operator*()).

```
istream_iterator& operator++();
```

3 *Requires:* in_stream != 0.

4 *Effects:* As if by: *in_stream >> value;

5 *Returns:* *this.

```
istream_iterator operator++(int);
```

6 *Requires:* in_stream != 0.

7 *Effects:* As if by:

```
    istream_iterator tmp = *this;
    *in_stream >> value;
    return (tmp);
```

```
template<class T, class charT, class traits, class Distance>
bool operator==(const istream_iterator<T,charT,traits,Distance>& x,
                const istream_iterator<T,charT,traits,Distance>& y);
```

8 *Returns:* x.in_stream == y.in_stream.

```
template<class T, class charT, class traits, class Distance>
bool operator!=(const istream_iterator<T,charT,traits,Distance>& x,
                const istream_iterator<T,charT,traits,Distance>& y);
```

9 *Returns:* !(x == y)

28.6.2 Class template ostream_iterator

[ostream.iterator]

1 **ostream_iterator** writes (using operator<<) successive elements onto the output stream from which it was constructed. If it was constructed with **charT*** as a constructor argument, this string, called a *delimiter string*, is written to the stream after every T is written. It is not possible to get a value out of the output iterator. Its only use is as an output iterator in situations like

```
while (first != last)
    *result++ = *first++;
```

2 **ostream_iterator** is defined as:

```
namespace std {
template<class T, class charT = char, class traits = char_traits<charT>>
class ostream_iterator {
public:
    using iterator_category = output_iterator_tag;
    using value_type        = void;
    using difference_type   = void;
    using pointer           = void;
    using reference         = void;
    using char_type        = charT;
    using traits_type       = traits;
    using ostream_type     = basic_ostream<charT,traits>;

    ostream_iterator(ostream_type& s);
    ostream_iterator(ostream_type& s, const charT* delimiter);
    ostream_iterator(const ostream_iterator& x);
    ~ostream_iterator();
    ostream_iterator& operator=(const ostream_iterator&) = default;
    ostream_iterator& operator=(const T& value);
```



```

    ostream_iterator& operator*();
    ostream_iterator& operator++();
    ostream_iterator& operator++(int);

private:
    basic_ostream<charT,traits>* out_stream; // exposition only
    const charT* delim; // exposition only
};
}

```

28.6.2.1 ostream_iterator constructors and destructor [ostream.iterator.cons.des]

```
ostream_iterator(ostream_type& s);
```

- 1 *Effects:* Initializes `out_stream` with `addressof(s)` and `delim` with `null`.

```
ostream_iterator(ostream_type& s, const charT* delimiter);
```

- 2 *Effects:* Initializes `out_stream` with `addressof(s)` and `delim` with `delimiter`.

```
ostream_iterator(const ostream_iterator& x);
```

- 3 *Effects:* Constructs a copy of `x`.

```
~ostream_iterator();
```

- 4 *Effects:* The iterator is destroyed.

28.6.2.2 ostream_iterator operations [ostream.iterator.ops]

```
ostream_iterator& operator=(const T& value);
```

- 1 *Effects:* As if by:

```

    *out_stream << value;
    if (delim != 0)
        *out_stream << delim;
    return *this;

```

```
ostream_iterator& operator*();
```

- 2 *Returns:* `*this`.

```
ostream_iterator& operator++();
ostream_iterator& operator++(int);
```

- 3 *Returns:* `*this`.

28.6.3 Class template istreambuf_iterator [istreambuf.iterator]

- 1 The class template `istreambuf_iterator` defines an input iterator (28.2.3) that reads successive *characters* from the streambuf for which it was constructed. `operator*` provides access to the current input character, if any. Each time `operator++` is evaluated, the iterator advances to the next input character. If the end of stream is reached (`streambuf_type::sgetc()` returns `traits::eof()`), the iterator becomes equal to the *end-of-stream* iterator value. The default constructor `istreambuf_iterator()` and the constructor `istreambuf_iterator(0)` both construct an end-of-stream iterator object suitable for use as an end-of-range. All specializations of `istreambuf_iterator` shall have a trivial copy constructor, a `constexpr` default constructor, and a trivial destructor.
- 2 The result of `operator*()` on an end-of-stream iterator is undefined. For any other iterator value a `char_type` value is returned. It is impossible to assign a character via an input iterator.

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
    class istreambuf_iterator {
    public:
        using iterator_category = input_iterator_tag;
        using value_type        = charT;
        using difference_type    = typename traits::off_type;
        using pointer            = unspecified;
        using reference          = charT;

```

```

using char_type      = charT;
using traits_type    = traits;
using int_type       = typename traits::int_type;
using streambuf_type = basic_streambuf<charT,traits>;
using istream_type   = basic_istream<charT,traits>;

class proxy;          // exposition only

constexpr istreambuf_iterator() noexcept;
istreambuf_iterator(const istreambuf_iterator&) noexcept = default;
~istreambuf_iterator() = default;
istreambuf_iterator(istream_type& s) noexcept;
istreambuf_iterator(streambuf_type* s) noexcept;
istreambuf_iterator(const proxy& p) noexcept;
istreambuf_iterator& operator=(const istreambuf_iterator&) noexcept = default;
charT operator*() const;
istreambuf_iterator& operator++();
proxy operator++(int);
bool equal(const istreambuf_iterator& b) const;

private:
    streambuf_type* sbuf_;          // exposition only
};

template<class charT, class traits>
    bool operator==(const istreambuf_iterator<charT,traits>&& a,
                    const istreambuf_iterator<charT,traits>&& b);
template<class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT,traits>&& a,
                    const istreambuf_iterator<charT,traits>&& b);
}

```

28.6.3.1 Class `istreambuf_iterator::proxy`

[`istreambuf.iterator.proxy`]

```

namespace std {
    template<class charT, class traits>
    class istreambuf_iterator<charT, traits>::proxy { // exposition only
        charT keep_;
        basic_streambuf<charT,traits>* sbuf_;
        proxy(charT c, basic_streambuf<charT,traits>* sbuf)
            : keep_(c), sbuf_(sbuf) { }
    public:
        charT operator*() { return keep_; }
    };
}

```

- ¹ Class `istreambuf_iterator<charT,traits>::proxy` is for exposition only. An implementation is permitted to provide equivalent functionality without providing a class with this name. Class `istreambuf_iterator<charT, traits>::proxy` provides a temporary placeholder as the return value of the post-increment operator (`operator++`). It keeps the character pointed to by the previous value of the iterator for some possible future access to get the character.

28.6.3.2 `istreambuf_iterator` constructors

[`istreambuf.iterator.cons`]

- ¹ For each `istreambuf_iterator` constructor in this subclause, an end-of-stream iterator is constructed if and only if the exposition-only member `sbuf_` is initialized with a null pointer value.

```

constexpr istreambuf_iterator() noexcept;
2     Effects: Initializes sbuf_ with nullptr.

istreambuf_iterator(istream_type& s) noexcept;
3     Effects: Initializes sbuf_ with s.rdbuf().

istreambuf_iterator(streambuf_type* s) noexcept;
4     Effects: Initializes sbuf_ with s.

```

```
istreambuf_iterator(const proxy& p) noexcept;
```

5 *Effects:* Initializes `sbuf_` with `p.sbuf_`.

28.6.3.3 `istreambuf_iterator` operations

[`istreambuf.iterator.ops`]

```
charT operator*() const
```

1 *Returns:* The character obtained via the `streambuf` member `sbuf_`→`sgetc()`.

```
istreambuf_iterator& operator++();
```

2 *Effects:* As if by `sbuf_`→`sbumpc()`.

3 *Returns:* `*this`.

```
proxy operator++(int);
```

4 *Returns:* `proxy(sbuf_`→`sbumpc(), sbuf_)`.

```
bool equal(const istreambuf_iterator& b) const;
```

5 *Returns:* `true` if and only if both iterators are at end-of-stream, or neither is at end-of-stream, regardless of what `streambuf` object they use.

```
template<class charT, class traits>
```

```
bool operator==(const istreambuf_iterator<charT,traits>& a,
                const istreambuf_iterator<charT,traits>& b);
```

6 *Returns:* `a.equal(b)`.

```
template<class charT, class traits>
```

```
bool operator!=(const istreambuf_iterator<charT,traits>& a,
                const istreambuf_iterator<charT,traits>& b);
```

7 *Returns:* `!a.equal(b)`.

28.6.4 Class template `ostreambuf_iterator`

[`ostreambuf.iterator`]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
    class ostreambuf_iterator {
    public:
        using iterator_category = output_iterator_tag;
        using value_type = void;
        using difference_type = void;
        using pointer = void;
        using reference = void;
        using char_type = charT;
        using traits_type = traits;
        using streambuf_type = basic_streambuf<charT,traits>;
        using ostream_type = basic_ostream<charT,traits>;

        ostreambuf_iterator(ostream_type& s) noexcept;
        ostreambuf_iterator(streambuf_type* s) noexcept;
        ostreambuf_iterator& operator=(charT c);

        ostreambuf_iterator& operator*();
        ostreambuf_iterator& operator++();
        ostreambuf_iterator& operator++(int);
        bool failed() const noexcept;

    private:
        streambuf_type* sbuf_; // exposition only
    };
}
```

1 The class template `ostreambuf_iterator` writes successive *characters* onto the output stream from which it was constructed. It is not possible to get a character value out of the output iterator.

28.6.4.1 ostreambuf_iterator constructors

[ostreambuf.iter.cons]

```
ostreambuf_iterator(ostream_type& s) noexcept;
```

1 *Requires:* `s.rdbuf()` shall not be a null pointer.

2 *Effects:* Initializes `sbuf_` with `s.rdbuf()`.

```
ostreambuf_iterator(streambuf_type* s) noexcept;
```

3 *Requires:* `s` shall not be a null pointer.

4 *Effects:* Initializes `sbuf_` with `s`.

28.6.4.2 ostreambuf_iterator operations

[ostreambuf.iter.ops]

```
ostreambuf_iterator& operator=(charT c);
```

1 *Effects:* If `failed()` yields `false`, calls `sbuf_>sputc(c)`; otherwise has no effect.

2 *Returns:* `*this`.

```
ostreambuf_iterator& operator*();
```

3 *Returns:* `*this`.

```
ostreambuf_iterator& operator++();
ostreambuf_iterator& operator++(int);
```

4 *Returns:* `*this`.

```
bool failed() const noexcept;
```

5 *Returns:* `true` if in any prior use of member `operator=`, the call to `sbuf_>sputc()` returned `traits::eof()`; or `false` otherwise.

28.7 Range access

[iterator.range]

1 In addition to being available via inclusion of the `<iterator>` header, the function templates in 28.7 are available when any of the following headers are included: `<array>`, `<deque>`, `<forward_list>`, `<list>`, `<map>`, `<regex>`, `<set>`, ``, `<string>`, `<string_view>`, `<unordered_map>`, `<unordered_set>`, and `<vector>`. Each of these templates is a designated customization point (20.5.4.2.1).

```
template<class C> constexpr auto begin(C& c) -> decltype(c.begin());
template<class C> constexpr auto begin(const C& c) -> decltype(c.begin());
```

2 *Returns:* `c.begin()`.

```
template<class C> constexpr auto end(C& c) -> decltype(c.end());
template<class C> constexpr auto end(const C& c) -> decltype(c.end());
```

3 *Returns:* `c.end()`.

```
template<class T, size_t N> constexpr T* begin(T (&array)[N]) noexcept;
```

4 *Returns:* `array`.

```
template<class T, size_t N> constexpr T* end(T (&array)[N]) noexcept;
```

5 *Returns:* `array + N`.

```
template<class C> constexpr auto cbegin(const C& c) noexcept(noexcept(std::begin(c)))
-> decltype(std::begin(c));
```

6 *Returns:* `std::begin(c)`.

```
template<class C> constexpr auto cend(const C& c) noexcept(noexcept(std::end(c)))
-> decltype(std::end(c));
```

7 *Returns:* `std::end(c)`.

```
template<class C> constexpr auto rbegin(C& c) -> decltype(c.rbegin());
template<class C> constexpr auto rbegin(const C& c) -> decltype(c.rbegin());
```

8 *Returns:* `c.rbegin()`.

```
template<class C> constexpr auto rend(C& c) -> decltype(c.rend());
template<class C> constexpr auto rend(const C& c) -> decltype(c.rend());
```

9 *Returns:* c.rend().

```
template<class T, size_t N> constexpr reverse_iterator<T*> rbegin(T (&array)[N]);
```

10 *Returns:* reverse_iterator<T*>(array + N).

```
template<class T, size_t N> constexpr reverse_iterator<T*> rend(T (&array)[N]);
```

11 *Returns:* reverse_iterator<T*>(array).

```
template<class E> constexpr reverse_iterator<const E*> rbegin(initializer_list<E> il);
```

12 *Returns:* reverse_iterator<const E*>(il.end()).

```
template<class E> constexpr reverse_iterator<const E*> rend(initializer_list<E> il);
```

13 *Returns:* reverse_iterator<const E*>(il.begin()).

```
template<class C> constexpr auto crbegin(const C& c) -> decltype(std::rbegin(c));
```

14 *Returns:* std::rbegin(c).

```
template<class C> constexpr auto crend(const C& c) -> decltype(std::rend(c));
```

15 *Returns:* std::rend(c).

28.8 Container and view access

[iterator.container]

1 In addition to being available via inclusion of the <iterator> header, the function templates in 28.8 are available when any of the following headers are included: <array>, <deque>, <forward_list>, <list>, <map>, <regex>, <set>, , <string>, <string_view>, <unordered_map>, <unordered_set>, and <vector>. Each of these templates is a designated customization point (20.5.4.2.1).

```
template<class C> constexpr auto size(const C& c) -> decltype(c.size());
```

2 *Returns:* c.size().

```
template<class T, size_t N> constexpr size_t size(const T (&array)[N]) noexcept;
```

3 *Returns:* N.

```
template<class C> [[nodiscard]] constexpr auto empty(const C& c) -> decltype(c.empty());
```

4 *Returns:* c.empty().

```
template<class T, size_t N> [[nodiscard]] constexpr bool empty(const T (&array)[N]) noexcept;
```

5 *Returns:* false.

```
template<class E> [[nodiscard]] constexpr bool empty(initializer_list<E> il) noexcept;
```

6 *Returns:* il.size() == 0.

```
template<class C> constexpr auto data(C& c) -> decltype(c.data());
```

```
template<class C> constexpr auto data(const C& c) -> decltype(c.data());
```

7 *Returns:* c.data().

```
template<class T, size_t N> constexpr T* data(T (&array)[N]) noexcept;
```

8 *Returns:* array.

```
template<class E> constexpr const E* data(initializer_list<E> il) noexcept;
```

9 *Returns:* il.begin().

29 Algorithms library [algorithms]

29.1 General [algorithms.general]

- ¹ This Clause describes components that C++ programs may use to perform algorithmic operations on containers (Clause 27) and other sequences.
- ² The following subclauses describe components for non-modifying sequence operations, mutating sequence operations, sorting and related operations, and algorithms from the ISO C library, as summarized in Table 98.

Table 98 — Algorithms library summary

Subclause	Header(s)
29.5 Non-modifying sequence operations	
29.6 Mutating sequence operations	<algorithm>
29.7 Sorting and related operations	
29.8 C library algorithms	<cstdlib>

29.2 Header <algorithm> synopsis [algorithm.syn]

```
#include <initializer_list>

namespace std {
    // 29.5, non-modifying sequence operations
    // 29.5.1, all of
    template<class InputIterator, class Predicate>
        constexpr bool all_of(InputIterator first, InputIterator last, Predicate pred);
    template<class ExecutionPolicy, class ForwardIterator, class Predicate>
        bool all_of(ExecutionPolicy&& exec, // see 29.4.5
                   ForwardIterator first, ForwardIterator last, Predicate pred);

    // 29.5.2, any of
    template<class InputIterator, class Predicate>
        constexpr bool any_of(InputIterator first, InputIterator last, Predicate pred);
    template<class ExecutionPolicy, class ForwardIterator, class Predicate>
        bool any_of(ExecutionPolicy&& exec, // see 29.4.5
                   ForwardIterator first, ForwardIterator last, Predicate pred);

    // 29.5.3, none of
    template<class InputIterator, class Predicate>
        constexpr bool none_of(InputIterator first, InputIterator last, Predicate pred);
    template<class ExecutionPolicy, class ForwardIterator, class Predicate>
        bool none_of(ExecutionPolicy&& exec, // see 29.4.5
                    ForwardIterator first, ForwardIterator last, Predicate pred);

    // 29.5.4, for each
    template<class InputIterator, class Function>
        constexpr Function for_each(InputIterator first, InputIterator last, Function f);
    template<class ExecutionPolicy, class ForwardIterator, class Function>
        void for_each(ExecutionPolicy&& exec, // see 29.4.5
                     ForwardIterator first, ForwardIterator last, Function f);
    template<class InputIterator, class Size, class Function>
        constexpr InputIterator for_each_n(InputIterator first, Size n, Function f);
    template<class ExecutionPolicy, class ForwardIterator, class Size, class Function>
        ForwardIterator for_each_n(ExecutionPolicy&& exec, // see 29.4.5
                                   ForwardIterator first, Size n, Function f);
}
```

```

// 29.5.5, find
template<class InputIterator, class T>
    constexpr InputIterator find(InputIterator first, InputIterator last,
                                const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    ForwardIterator find(ExecutionPolicy&& exec, // see 29.4.5
                        ForwardIterator first, ForwardIterator last,
                        const T& value);
template<class InputIterator, class Predicate>
    constexpr InputIterator find_if(InputIterator first, InputIterator last,
                                    Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator find_if(ExecutionPolicy&& exec, // see 29.4.5
                           ForwardIterator first, ForwardIterator last,
                           Predicate pred);
template<class InputIterator, class Predicate>
    constexpr InputIterator find_if_not(InputIterator first, InputIterator last,
                                        Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator find_if_not(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, ForwardIterator last,
                               Predicate pred);

// 29.5.6, find end
template<class ForwardIterator1, class ForwardIterator2>
    constexpr ForwardIterator1
        find_end(ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2);
template<class ForwardIterator1, class ForwardIterator2, class BinaryPredicate>
    constexpr ForwardIterator1
        find_end(ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2,
                 BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator1
        find_end(ExecutionPolicy&& exec, // see 29.4.5
                 ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1,
          class ForwardIterator2, class BinaryPredicate>
    ForwardIterator1
        find_end(ExecutionPolicy&& exec, // see 29.4.5
                 ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2,
                 BinaryPredicate pred);

// 29.5.7, find first
template<class InputIterator, class ForwardIterator>
    constexpr InputIterator
        find_first_of(InputIterator first1, InputIterator last1,
                     ForwardIterator first2, ForwardIterator last2);
template<class InputIterator, class ForwardIterator, class BinaryPredicate>
    constexpr InputIterator
        find_first_of(InputIterator first1, InputIterator last1,
                     ForwardIterator first2, ForwardIterator last2,
                     BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator1
        find_first_of(ExecutionPolicy&& exec, // see 29.4.5
                     ForwardIterator1 first1, ForwardIterator1 last1,
                     ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1,
          class ForwardIterator2, class BinaryPredicate>
    ForwardIterator1

```

```

    find_first_of(ExecutionPolicy&& exec, // see 29.4.5
                 ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2,
                 BinaryPredicate pred);

// 29.5.8, adjacent find
template<class ForwardIterator>
constexpr ForwardIterator
    adjacent_find(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class BinaryPredicate>
constexpr ForwardIterator
    adjacent_find(ForwardIterator first, ForwardIterator last,
                 BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
    adjacent_find(ExecutionPolicy&& exec, // see 29.4.5
                 ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class BinaryPredicate>
ForwardIterator
    adjacent_find(ExecutionPolicy&& exec, // see 29.4.5
                 ForwardIterator first, ForwardIterator last,
                 BinaryPredicate pred);

// 29.5.9, count
template<class InputIterator, class T>
constexpr typename iterator_traits<InputIterator>::difference_type
    count(InputIterator first, InputIterator last, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
typename iterator_traits<ForwardIterator>::difference_type
    count(ExecutionPolicy&& exec, // see 29.4.5
         ForwardIterator first, ForwardIterator last, const T& value);
template<class InputIterator, class Predicate>
constexpr typename iterator_traits<InputIterator>::difference_type
    count_if(InputIterator first, InputIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
typename iterator_traits<ForwardIterator>::difference_type
    count_if(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator first, ForwardIterator last, Predicate pred);

// 29.5.10, mismatch
template<class InputIterator1, class InputIterator2>
constexpr pair<InputIterator1, InputIterator2>
    mismatch(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2);
template<class InputIterator1, class InputIterator2, class BinaryPredicate>
constexpr pair<InputIterator1, InputIterator2>
    mismatch(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, BinaryPredicate pred);
template<class InputIterator1, class InputIterator2>
constexpr pair<InputIterator1, InputIterator2>
    mismatch(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2);
template<class InputIterator1, class InputIterator2, class BinaryPredicate>
constexpr pair<InputIterator1, InputIterator2>
    mismatch(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
pair<ForwardIterator1, ForwardIterator2>
    mismatch(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2);

```



```

template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2,
        BinaryPredicate pred);

// 29.5.11, equal
template<class InputIterator1, class InputIterator2>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2);
template<class InputIterator1, class InputIterator2, class BinaryPredicate>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, BinaryPredicate pred);
template<class InputIterator1, class InputIterator2>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, InputIterator2 last2);
template<class InputIterator1, class InputIterator2, class BinaryPredicate>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, InputIterator2 last2,
                    BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
bool equal(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
bool equal(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
bool equal(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
bool equal(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2,
        BinaryPredicate pred);

// 29.5.12, is permutation
template<class ForwardIterator1, class ForwardIterator2>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                             ForwardIterator2 first2);
template<class ForwardIterator1, class ForwardIterator2, class BinaryPredicate>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                             ForwardIterator2 first2, BinaryPredicate pred);
template<class ForwardIterator1, class ForwardIterator2>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                             ForwardIterator2 first2, ForwardIterator2 last2);

```

```

template<class ForwardIterator1, class ForwardIterator2, class BinaryPredicate>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                              ForwardIterator2 first2, ForwardIterator2 last2,
                              BinaryPredicate pred);

// 29.5.13, search
template<class ForwardIterator1, class ForwardIterator2>
constexpr ForwardIterator1
search(ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2);
template<class ForwardIterator1, class ForwardIterator2, class BinaryPredicate>
constexpr ForwardIterator1
search(ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2,
       BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator1
search(ExecutionPolicy&& exec, // see 29.4.5
       ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
ForwardIterator1
search(ExecutionPolicy&& exec, // see 29.4.5
       ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2,
       BinaryPredicate pred);
template<class ForwardIterator, class Size, class T>
constexpr ForwardIterator
search_n(ForwardIterator first, ForwardIterator last,
         Size count, const T& value);
template<class ForwardIterator, class Size, class T, class BinaryPredicate>
constexpr ForwardIterator
search_n(ForwardIterator first, ForwardIterator last,
         Size count, const T& value,
         BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T>
ForwardIterator
search_n(ExecutionPolicy&& exec, // see 29.4.5
         ForwardIterator first, ForwardIterator last,
         Size count, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T,
         class BinaryPredicate>
ForwardIterator
search_n(ExecutionPolicy&& exec, // see 29.4.5
         ForwardIterator first, ForwardIterator last,
         Size count, const T& value,
         BinaryPredicate pred);

template<class ForwardIterator, class Searcher>
constexpr ForwardIterator
search(ForwardIterator first, ForwardIterator last, const Searcher& searcher);

// 29.6, mutating sequence operations
// 29.6.1, copy
template<class InputIterator, class OutputIterator>
constexpr OutputIterator copy(InputIterator first, InputIterator last,
                              OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2 copy(ExecutionPolicy&& exec, // see 29.4.5
                    ForwardIterator1 first, ForwardIterator1 last,
                    ForwardIterator2 result);

```

```

template<class InputIterator, class Size, class OutputIterator>
    constexpr OutputIterator copy_n(InputIterator first, Size n,
                                    OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class Size,
        class ForwardIterator2>
    ForwardIterator2 copy_n(ExecutionPolicy&& exec, // see 29.4.5
                            ForwardIterator1 first, Size n,
                            ForwardIterator2 result);
template<class InputIterator, class OutputIterator, class Predicate>
    constexpr OutputIterator copy_if(InputIterator first, InputIterator last,
                                    OutputIterator result, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class Predicate>
    ForwardIterator2 copy_if(ExecutionPolicy&& exec, // see 29.4.5
                            ForwardIterator1 first, ForwardIterator1 last,
                            ForwardIterator2 result, Predicate pred);
template<class BidirectionalIterator1, class BidirectionalIterator2>
    constexpr BidirectionalIterator2
        copy_backward(BidirectionalIterator1 first, BidirectionalIterator1 last,
                    BidirectionalIterator2 result);

// 29.6.2, move
template<class InputIterator, class OutputIterator>
    constexpr OutputIterator move(InputIterator first, InputIterator last,
                                OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1,
        class ForwardIterator2>
    ForwardIterator2 move(ExecutionPolicy&& exec, // see 29.4.5
                        ForwardIterator1 first, ForwardIterator1 last,
                        ForwardIterator2 result);
template<class BidirectionalIterator1, class BidirectionalIterator2>
    constexpr BidirectionalIterator2
        move_backward(BidirectionalIterator1 first, BidirectionalIterator1 last,
                    BidirectionalIterator2 result);

// 29.6.3, swap
template<class ForwardIterator1, class ForwardIterator2>
    constexpr ForwardIterator2 swap_ranges(ForwardIterator1 first1, ForwardIterator1 last1,
                                           ForwardIterator2 first2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator2 swap_ranges(ExecutionPolicy&& exec, // see 29.4.5
                                ForwardIterator1 first1, ForwardIterator1 last1,
                                ForwardIterator2 first2);
template<class ForwardIterator1, class ForwardIterator2>
    constexpr void iter_swap(ForwardIterator1 a, ForwardIterator2 b);

// 29.6.4, transform
template<class InputIterator, class OutputIterator, class UnaryOperation>
    constexpr OutputIterator
        transform(InputIterator first, InputIterator last,
                OutputIterator result, UnaryOperation op);
template<class InputIterator1, class InputIterator2, class OutputIterator,
        class BinaryOperation>
    constexpr OutputIterator
        transform(InputIterator1 first1, InputIterator1 last1,
                InputIterator2 first2, OutputIterator result,
                BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class UnaryOperation>
    ForwardIterator2
        transform(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator1 first, ForwardIterator1 last,
                ForwardIterator2 result, UnaryOperation op);

```

```

template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator, class BinaryOperation>
ForwardIterator
    transform(ExecutionPolicy&& exec, // see 29.4.5
             ForwardIterator1 first1, ForwardIterator1 last1,
             ForwardIterator2 first2, ForwardIterator result,
             BinaryOperation binary_op);

// 29.6.5, replace
template<class ForwardIterator, class T>
    constexpr void replace(ForwardIterator first, ForwardIterator last,
                          const T& old_value, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    void replace(ExecutionPolicy&& exec, // see 29.4.5
               ForwardIterator first, ForwardIterator last,
               const T& old_value, const T& new_value);
template<class ForwardIterator, class Predicate, class T>
    constexpr void replace_if(ForwardIterator first, ForwardIterator last,
                             Predicate pred, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator, class Predicate, class T>
    void replace_if(ExecutionPolicy&& exec, // see 29.4.5
                  ForwardIterator first, ForwardIterator last,
                  Predicate pred, const T& new_value);
template<class InputIterator, class OutputIterator, class T>
    constexpr OutputIterator replace_copy(InputIterator first, InputIterator last,
                                         OutputIterator result,
                                         const T& old_value, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class T>
    ForwardIterator2 replace_copy(ExecutionPolicy&& exec, // see 29.4.5
                                  ForwardIterator1 first, ForwardIterator1 last,
                                  ForwardIterator2 result,
                                  const T& old_value, const T& new_value);
template<class InputIterator, class OutputIterator, class Predicate, class T>
    constexpr OutputIterator replace_copy_if(InputIterator first, InputIterator last,
                                             OutputIterator result,
                                             Predicate pred, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class Predicate, class T>
    ForwardIterator2 replace_copy_if(ExecutionPolicy&& exec, // see 29.4.5
                                     ForwardIterator1 first, ForwardIterator1 last,
                                     ForwardIterator2 result,
                                     Predicate pred, const T& new_value);

// 29.6.6, fill
template<class ForwardIterator, class T>
    constexpr void fill(ForwardIterator first, ForwardIterator last, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    void fill(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator first, ForwardIterator last, const T& value);
template<class OutputIterator, class Size, class T>
    constexpr OutputIterator fill_n(OutputIterator first, Size n, const T& value);
template<class ExecutionPolicy, class ForwardIterator,
        class Size, class T>
    ForwardIterator fill_n(ExecutionPolicy&& exec, // see 29.4.5
                          ForwardIterator first, Size n, const T& value);

// 29.6.7, generate
template<class ForwardIterator, class Generator>
    constexpr void generate(ForwardIterator first, ForwardIterator last,
                          Generator gen);
template<class ExecutionPolicy, class ForwardIterator, class Generator>
    void generate(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator first, ForwardIterator last,
                Generator gen);

```

```

template<class OutputIterator, class Size, class Generator>
    constexpr OutputIterator generate_n(OutputIterator first, Size n, Generator gen);
template<class ExecutionPolicy, class ForwardIterator, class Size, class Generator>
    ForwardIterator generate_n(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, Size n, Generator gen);

// 29.6.8, remove
template<class ForwardIterator, class T>
    constexpr ForwardIterator remove(ForwardIterator first, ForwardIterator last,
                                     const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    ForwardIterator remove(ExecutionPolicy&& exec, // see 29.4.5
                           ForwardIterator first, ForwardIterator last,
                           const T& value);
template<class ForwardIterator, class Predicate>
    constexpr ForwardIterator remove_if(ForwardIterator first, ForwardIterator last,
                                        Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator remove_if(ExecutionPolicy&& exec, // see 29.4.5
                              ForwardIterator first, ForwardIterator last,
                              Predicate pred);
template<class InputIterator, class OutputIterator, class T>
    constexpr OutputIterator
        remove_copy(InputIterator first, InputIterator last,
                    OutputIterator result, const T& value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class T>
    ForwardIterator2
        remove_copy(ExecutionPolicy&& exec, // see 29.4.5
                    ForwardIterator1 first, ForwardIterator1 last,
                    ForwardIterator2 result, const T& value);
template<class InputIterator, class OutputIterator, class Predicate>
    constexpr OutputIterator
        remove_copy_if(InputIterator first, InputIterator last,
                       OutputIterator result, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class Predicate>
    ForwardIterator2
        remove_copy_if(ExecutionPolicy&& exec, // see 29.4.5
                       ForwardIterator1 first, ForwardIterator1 last,
                       ForwardIterator2 result, Predicate pred);

// 29.6.9, unique
template<class ForwardIterator>
    constexpr ForwardIterator unique(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class BinaryPredicate>
    constexpr ForwardIterator unique(ForwardIterator first, ForwardIterator last,
                                     BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator unique(ExecutionPolicy&& exec, // see 29.4.5
                           ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class BinaryPredicate>
    ForwardIterator unique(ExecutionPolicy&& exec, // see 29.4.5
                           ForwardIterator first, ForwardIterator last,
                           BinaryPredicate pred);
template<class InputIterator, class OutputIterator>
    constexpr OutputIterator
        unique_copy(InputIterator first, InputIterator last,
                    OutputIterator result);
template<class InputIterator, class OutputIterator, class BinaryPredicate>
    constexpr OutputIterator
        unique_copy(InputIterator first, InputIterator last,
                    OutputIterator result, BinaryPredicate pred);

```

```

template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator2
    unique_copy(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator1 first, ForwardIterator1 last,
                ForwardIterator2 result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
    ForwardIterator2
    unique_copy(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator1 first, ForwardIterator1 last,
                ForwardIterator2 result, BinaryPredicate pred);

// 29.6.10, reverse
template<class BidirectionalIterator>
    constexpr void reverse(BidirectionalIterator first, BidirectionalIterator last);
template<class ExecutionPolicy, class BidirectionalIterator>
    void reverse(ExecutionPolicy&& exec, // see 29.4.5
                BidirectionalIterator first, BidirectionalIterator last);
template<class BidirectionalIterator, class OutputIterator>
    constexpr OutputIterator
    reverse_copy(BidirectionalIterator first, BidirectionalIterator last,
                OutputIterator result);
template<class ExecutionPolicy, class BidirectionalIterator, class ForwardIterator>
    ForwardIterator
    reverse_copy(ExecutionPolicy&& exec, // see 29.4.5
                BidirectionalIterator first, BidirectionalIterator last,
                ForwardIterator result);

// 29.6.11, rotate
template<class ForwardIterator>
    constexpr ForwardIterator rotate(ForwardIterator first,
                                    ForwardIterator middle,
                                    ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator rotate(ExecutionPolicy&& exec, // see 29.4.5
                          ForwardIterator first,
                          ForwardIterator middle,
                          ForwardIterator last);
template<class ForwardIterator, class OutputIterator>
    constexpr OutputIterator
    rotate_copy(ForwardIterator first, ForwardIterator middle,
                ForwardIterator last, OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator2
    rotate_copy(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator1 first, ForwardIterator1 middle,
                ForwardIterator1 last, ForwardIterator2 result);

// 29.6.12, sample
template<class PopulationIterator, class SampleIterator,
        class Distance, class UniformRandomBitGenerator>
    SampleIterator sample(PopulationIterator first, PopulationIterator last,
                          SampleIterator out, Distance n,
                          UniformRandomBitGenerator&& g);

// 29.6.13, shuffle
template<class RandomAccessIterator, class UniformRandomBitGenerator>
    void shuffle(RandomAccessIterator first,
                RandomAccessIterator last,
                UniformRandomBitGenerator&& g);

```

```

// 29.6.14, shift
template<class ForwardIterator>
    constexpr ForwardIterator
        shift_left(ForwardIterator first, ForwardIterator last,
                    typename iterator_traits<ForwardIterator>::difference_type n);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator
        shift_left(ExecutionPolicy&& exec, // see 29.4.5
                    ForwardIterator first, ForwardIterator last,
                    typename iterator_traits<ForwardIterator>::difference_type n);
template<class ForwardIterator>
    constexpr ForwardIterator
        shift_right(ForwardIterator first, ForwardIterator last,
                    typename iterator_traits<ForwardIterator>::difference_type n);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator
        shift_right(ExecutionPolicy&& exec, // see 29.4.5
                    ForwardIterator first, ForwardIterator last,
                    typename iterator_traits<ForwardIterator>::difference_type n);

// 29.7, sorting and related operations
// 29.7.1, sorting
template<class RandomAccessIterator>
    constexpr void sort(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void sort(RandomAccessIterator first, RandomAccessIterator last,
                        Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator>
    void sort(ExecutionPolicy&& exec, // see 29.4.5
              RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    void sort(ExecutionPolicy&& exec, // see 29.4.5
              RandomAccessIterator first, RandomAccessIterator last,
              Compare comp);

template<class RandomAccessIterator>
    void stable_sort(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    void stable_sort(RandomAccessIterator first, RandomAccessIterator last,
                    Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator>
    void stable_sort(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    void stable_sort(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first, RandomAccessIterator last,
                    Compare comp);

template<class RandomAccessIterator>
    constexpr void partial_sort(RandomAccessIterator first,
                                RandomAccessIterator middle,
                                RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void partial_sort(RandomAccessIterator first,
                                RandomAccessIterator middle,
                                RandomAccessIterator last, Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator>
    void partial_sort(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first,
                    RandomAccessIterator middle,
                    RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    void partial_sort(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first,

```

```

        RandomAccessIterator middle,
        RandomAccessIterator last, Compare comp);
template<class InputIterator, class RandomAccessIterator>
constexpr RandomAccessIterator
    partial_sort_copy(InputIterator first, InputIterator last,
        RandomAccessIterator result_first,
        RandomAccessIterator result_last);
template<class InputIterator, class RandomAccessIterator, class Compare>
constexpr RandomAccessIterator
    partial_sort_copy(InputIterator first, InputIterator last,
        RandomAccessIterator result_first,
        RandomAccessIterator result_last,
        Compare comp);
template<class ExecutionPolicy, class ForwardIterator, class RandomAccessIterator>
RandomAccessIterator
    partial_sort_copy(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator first, ForwardIterator last,
        RandomAccessIterator result_first,
        RandomAccessIterator result_last);
template<class ExecutionPolicy, class ForwardIterator, class RandomAccessIterator,
    class Compare>
RandomAccessIterator
    partial_sort_copy(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator first, ForwardIterator last,
        RandomAccessIterator result_first,
        RandomAccessIterator result_last,
        Compare comp);
template<class ForwardIterator>
constexpr bool is_sorted(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Compare>
constexpr bool is_sorted(ForwardIterator first, ForwardIterator last,
    Compare comp);
template<class ExecutionPolicy, class ForwardIterator>
bool is_sorted(ExecutionPolicy&& exec, // see 29.4.5
    ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
bool is_sorted(ExecutionPolicy&& exec, // see 29.4.5
    ForwardIterator first, ForwardIterator last,
    Compare comp);
template<class ForwardIterator>
constexpr ForwardIterator
    is_sorted_until(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Compare>
constexpr ForwardIterator
    is_sorted_until(ForwardIterator first, ForwardIterator last,
        Compare comp);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
    is_sorted_until(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
ForwardIterator
    is_sorted_until(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator first, ForwardIterator last,
        Compare comp);

// 29.7.2, Nth element
template<class RandomAccessIterator>
constexpr void nth_element(RandomAccessIterator first, RandomAccessIterator nth,
    RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
constexpr void nth_element(RandomAccessIterator first, RandomAccessIterator nth,
    RandomAccessIterator last, Compare comp);

```



```

template<class ExecutionPolicy, class RandomAccessIterator>
    void nth_element(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first, RandomAccessIterator nth,
                    RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    void nth_element(ExecutionPolicy&& exec, // see 29.4.5
                    RandomAccessIterator first, RandomAccessIterator nth,
                    RandomAccessIterator last, Compare comp);

// 29.7.3, binary search
template<class ForwardIterator, class T>
    constexpr ForwardIterator
        lower_bound(ForwardIterator first, ForwardIterator last,
                    const T& value);
template<class ForwardIterator, class T, class Compare>
    constexpr ForwardIterator
        lower_bound(ForwardIterator first, ForwardIterator last,
                    const T& value, Compare comp);

template<class ForwardIterator, class T>
    constexpr ForwardIterator
        upper_bound(ForwardIterator first, ForwardIterator last,
                    const T& value);
template<class ForwardIterator, class T, class Compare>
    constexpr ForwardIterator
        upper_bound(ForwardIterator first, ForwardIterator last,
                    const T& value, Compare comp);

template<class ForwardIterator, class T>
    constexpr pair<ForwardIterator, ForwardIterator>
        equal_range(ForwardIterator first, ForwardIterator last,
                    const T& value);
template<class ForwardIterator, class T, class Compare>
    constexpr pair<ForwardIterator, ForwardIterator>
        equal_range(ForwardIterator first, ForwardIterator last,
                    const T& value, Compare comp);

template<class ForwardIterator, class T>
    constexpr bool
        binary_search(ForwardIterator first, ForwardIterator last,
                       const T& value);
template<class ForwardIterator, class T, class Compare>
    constexpr bool
        binary_search(ForwardIterator first, ForwardIterator last,
                       const T& value, Compare comp);

// 29.7.4, partitions
template<class InputIterator, class Predicate>
    constexpr bool is_partitioned(InputIterator first, InputIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    bool is_partitioned(ExecutionPolicy&& exec, // see 29.4.5
                       ForwardIterator first, ForwardIterator last, Predicate pred);

template<class ForwardIterator, class Predicate>
    constexpr ForwardIterator partition(ForwardIterator first,
                                       ForwardIterator last,
                                       Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator partition(ExecutionPolicy&& exec, // see 29.4.5
                             ForwardIterator first,
                             ForwardIterator last,
                             Predicate pred);

```

```

template<class BidirectionalIterator, class Predicate>
    BidirectionalIterator stable_partition(BidirectionalIterator first,
                                          BidirectionalIterator last,
                                          Predicate pred);
template<class ExecutionPolicy, class BidirectionalIterator, class Predicate>
    BidirectionalIterator stable_partition(ExecutionPolicy&& exec, // see 29.4.5
                                          BidirectionalIterator first,
                                          BidirectionalIterator last,
                                          Predicate pred);
template<class InputIterator, class OutputIterator1,
         class OutputIterator2, class Predicate>
    constexpr pair<OutputIterator1, OutputIterator2>
        partition_copy(InputIterator first, InputIterator last,
                      OutputIterator1 out_true, OutputIterator2 out_false,
                      Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class ForwardIterator1,
         class ForwardIterator2, class Predicate>
    pair<ForwardIterator1, ForwardIterator2>
        partition_copy(ExecutionPolicy&& exec, // see 29.4.5
                      ForwardIterator first, ForwardIterator last,
                      ForwardIterator1 out_true, ForwardIterator2 out_false,
                      Predicate pred);
template<class ForwardIterator, class Predicate>
    constexpr ForwardIterator
        partition_point(ForwardIterator first, ForwardIterator last,
                      Predicate pred);

// 29.7.5, merge
template<class InputIterator1, class InputIterator2, class OutputIterator>
    constexpr OutputIterator
        merge(InputIterator1 first1, InputIterator1 last1,
             InputIterator2 first2, InputIterator2 last2,
             OutputIterator result);
template<class InputIterator1, class InputIterator2, class OutputIterator,
         class Compare>
    constexpr OutputIterator
        merge(InputIterator1 first1, InputIterator1 last1,
             InputIterator2 first2, InputIterator2 last2,
             OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class ForwardIterator>
    ForwardIterator
        merge(ExecutionPolicy&& exec, // see 29.4.5
             ForwardIterator1 first1, ForwardIterator1 last1,
             ForwardIterator2 first2, ForwardIterator2 last2,
             ForwardIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class ForwardIterator, class Compare>
    ForwardIterator
        merge(ExecutionPolicy&& exec, // see 29.4.5
             ForwardIterator1 first1, ForwardIterator1 last1,
             ForwardIterator2 first2, ForwardIterator2 last2,
             ForwardIterator result, Compare comp);

template<class BidirectionalIterator>
    void inplace_merge(BidirectionalIterator first,
                      BidirectionalIterator middle,
                      BidirectionalIterator last);
template<class BidirectionalIterator, class Compare>
    void inplace_merge(BidirectionalIterator first,
                      BidirectionalIterator middle,
                      BidirectionalIterator last, Compare comp);

```

```

template<class ExecutionPolicy, class BidirectionalIterator>
    void inplace_merge(ExecutionPolicy&& exec, // see 29.4.5
        BidirectionalIterator first,
        BidirectionalIterator middle,
        BidirectionalIterator last);
template<class ExecutionPolicy, class BidirectionalIterator, class Compare>
    void inplace_merge(ExecutionPolicy&& exec, // see 29.4.5
        BidirectionalIterator first,
        BidirectionalIterator middle,
        BidirectionalIterator last, Compare comp);

// 29.7.6, set operations
template<class InputIterator1, class InputIterator2>
    constexpr bool includes(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2, InputIterator2 last2);
template<class InputIterator1, class InputIterator2, class Compare>
    constexpr bool includes(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2, InputIterator2 last2,
        Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    bool includes(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
    class Compare>
    bool includes(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2,
        Compare comp);

template<class InputIterator1, class InputIterator2, class OutputIterator>
    constexpr OutputIterator
        set_union(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result);
template<class InputIterator1, class InputIterator2, class OutputIterator, class Compare>
    constexpr OutputIterator
        set_union(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
    class ForwardIterator>
    ForwardIterator
        set_union(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
    class ForwardIterator, class Compare>
    ForwardIterator
        set_union(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result, Compare comp);

template<class InputIterator1, class InputIterator2, class OutputIterator>
    constexpr OutputIterator
        set_intersection(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result);
template<class InputIterator1, class InputIterator2, class OutputIterator, class Compare>
    constexpr OutputIterator
        set_intersection(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,

```

```

        OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator>
    ForwardIterator
        set_intersection(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator, class Compare>
    ForwardIterator
        set_intersection(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result, Compare comp);

template<class InputIterator1, class InputIterator2, class OutputIterator>
    constexpr OutputIterator
        set_difference(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result);
template<class InputIterator1, class InputIterator2, class OutputIterator, class Compare>
    constexpr OutputIterator
        set_difference(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator>
    ForwardIterator
        set_difference(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator, class Compare>
    ForwardIterator
        set_difference(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result, Compare comp);

template<class InputIterator1, class InputIterator2, class OutputIterator>
    constexpr OutputIterator
        set_symmetric_difference(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result);
template<class InputIterator1, class InputIterator2, class OutputIterator, class Compare>
    constexpr OutputIterator
        set_symmetric_difference(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, InputIterator2 last2,
            OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator>
    ForwardIterator
        set_symmetric_difference(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,
            ForwardIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator, class Compare>
    ForwardIterator
        set_symmetric_difference(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator1 first1, ForwardIterator1 last1,
            ForwardIterator2 first2, ForwardIterator2 last2,

```

```

        ForwardIterator result, Compare comp);

// 29.7.7, heap operations
template<class RandomAccessIterator>
    constexpr void push_heap(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void push_heap(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);

template<class RandomAccessIterator>
    constexpr void pop_heap(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void pop_heap(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);

template<class RandomAccessIterator>
    constexpr void make_heap(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void make_heap(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);

template<class RandomAccessIterator>
    constexpr void sort_heap(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr void sort_heap(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);

template<class RandomAccessIterator>
    constexpr bool is_heap(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr bool is_heap(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator>
    bool is_heap(ExecutionPolicy&& exec, // see 29.4.5
        RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    bool is_heap(ExecutionPolicy&& exec, // see 29.4.5
        RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);
template<class RandomAccessIterator>
    constexpr RandomAccessIterator
        is_heap_until(RandomAccessIterator first, RandomAccessIterator last);
template<class RandomAccessIterator, class Compare>
    constexpr RandomAccessIterator
        is_heap_until(RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator>
    RandomAccessIterator
        is_heap_until(ExecutionPolicy&& exec, // see 29.4.5
        RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
    RandomAccessIterator
        is_heap_until(ExecutionPolicy&& exec, // see 29.4.5
        RandomAccessIterator first, RandomAccessIterator last,
        Compare comp);

// 29.7.8, minimum and maximum
template<class T> constexpr const T& min(const T& a, const T& b);
template<class T, class Compare>
    constexpr const T& min(const T& a, const T& b, Compare comp);
template<class T>
    constexpr T min(initializer_list<T> t);
template<class T, class Compare>
    constexpr T min(initializer_list<T> t, Compare comp);

```

```

template<class T> constexpr const T& max(const T& a, const T& b);
template<class T, class Compare>
    constexpr const T& max(const T& a, const T& b, Compare comp);
template<class T>
    constexpr T max(initializer_list<T> t);
template<class T, class Compare>
    constexpr T max(initializer_list<T> t, Compare comp);

template<class T> constexpr pair<const T&, const T&> minmax(const T& a, const T& b);
template<class T, class Compare>
    constexpr pair<const T&, const T&> minmax(const T& a, const T& b, Compare comp);
template<class T>
    constexpr pair<T, T> minmax(initializer_list<T> t);
template<class T, class Compare>
    constexpr pair<T, T> minmax(initializer_list<T> t, Compare comp);

template<class ForwardIterator>
    constexpr ForwardIterator min_element(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Compare>
    constexpr ForwardIterator min_element(ForwardIterator first, ForwardIterator last,
                                          Compare comp);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator min_element(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
    ForwardIterator min_element(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, ForwardIterator last,
                               Compare comp);

template<class ForwardIterator>
    constexpr ForwardIterator max_element(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Compare>
    constexpr ForwardIterator max_element(ForwardIterator first, ForwardIterator last,
                                          Compare comp);
template<class ExecutionPolicy, class ForwardIterator>
    ForwardIterator max_element(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
    ForwardIterator max_element(ExecutionPolicy&& exec, // see 29.4.5
                               ForwardIterator first, ForwardIterator last,
                               Compare comp);

template<class ForwardIterator>
    constexpr pair<ForwardIterator, ForwardIterator>
        minmax_element(ForwardIterator first, ForwardIterator last);
template<class ForwardIterator, class Compare>
    constexpr pair<ForwardIterator, ForwardIterator>
        minmax_element(ForwardIterator first, ForwardIterator last, Compare comp);
template<class ExecutionPolicy, class ForwardIterator>
    pair<ForwardIterator, ForwardIterator>
        minmax_element(ExecutionPolicy&& exec, // see 29.4.5
                       ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
    pair<ForwardIterator, ForwardIterator>
        minmax_element(ExecutionPolicy&& exec, // see 29.4.5
                       ForwardIterator first, ForwardIterator last, Compare comp);

// 29.7.9, bounded value
template<class T>
    constexpr const T& clamp(const T& v, const T& lo, const T& hi);
template<class T, class Compare>
    constexpr const T& clamp(const T& v, const T& lo, const T& hi, Compare comp);

```

```

// 29.7.10, lexicographical comparison
template<class InputIterator1, class InputIterator2>
    constexpr bool
        lexicographical_compare(InputIterator1 first1, InputIterator1 last1,
                                InputIterator2 first2, InputIterator2 last2);
template<class InputIterator1, class InputIterator2, class Compare>
    constexpr bool
        lexicographical_compare(InputIterator1 first1, InputIterator1 last1,
                                InputIterator2 first2, InputIterator2 last2,
                                Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    bool
        lexicographical_compare(ExecutionPolicy&& exec, // see 29.4.5
                                ForwardIterator1 first1, ForwardIterator1 last1,
                                ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class Compare>
    bool
        lexicographical_compare(ExecutionPolicy&& exec, // see 29.4.5
                                ForwardIterator1 first1, ForwardIterator1 last1,
                                ForwardIterator2 first2, ForwardIterator2 last2,
                                Compare comp);

// 29.7.11, three-way comparison algorithms
template<class T, class U>
    constexpr auto compare_3way(const T& a, const U& b);
template<class InputIterator1, class InputIterator2, class Cmp>
    constexpr auto
        lexicographical_compare_3way(InputIterator1 b1, InputIterator1 e1,
                                     InputIterator2 b2, InputIterator2 e2,
                                     Cmp comp)
        -> common_comparison_category_t<decltype(comp(*b1, *b2)), strong_ordering>;
template<class InputIterator1, class InputIterator2>
    constexpr auto
        lexicographical_compare_3way(InputIterator1 b1, InputIterator1 e1,
                                     InputIterator2 b2, InputIterator2 e2);

// 29.7.12, permutations
template<class BidirectionalIterator>
    constexpr bool next_permutation(BidirectionalIterator first,
                                     BidirectionalIterator last);
template<class BidirectionalIterator, class Compare>
    constexpr bool next_permutation(BidirectionalIterator first,
                                     BidirectionalIterator last, Compare comp);
template<class BidirectionalIterator>
    constexpr bool prev_permutation(BidirectionalIterator first,
                                     BidirectionalIterator last);
template<class BidirectionalIterator, class Compare>
    constexpr bool prev_permutation(BidirectionalIterator first,
                                     BidirectionalIterator last, Compare comp);
}

```

29.3 Algorithms requirements

[algorithms.requirements]

- 1 All of the algorithms are separated from the particular implementations of data structures and are parameterized by iterator types. Because of this, they can work with program-defined data structures, as long as these data structures have iterator types satisfying the assumptions on the algorithms.
 - 2 For purposes of determining the existence of data races, algorithms shall not modify objects referenced through an iterator argument unless the specification requires such modification.
 - 3 Throughout this Clause, the names of template parameters are used to express type requirements.
- (3.1) — If an algorithm's template parameter is named `InputIterator`, `InputIterator1`, or `InputIterator2`, the template argument shall satisfy the *Cpp17InputIterator* requirements (28.2.3).

- (3.2) — If an algorithm's template parameter is named `OutputIterator`, `OutputIterator1`, or `OutputIterator2`, the template argument shall satisfy the *Cpp17OutputIterator* requirements (28.2.4).
 - (3.3) — If an algorithm's template parameter is named `ForwardIterator`, `ForwardIterator1`, or `ForwardIterator2`, the template argument shall satisfy the *Cpp17ForwardIterator* requirements (28.2.5).
 - (3.4) — If an algorithm's template parameter is named `BidirectionalIterator`, `BidirectionalIterator1`, or `BidirectionalIterator2`, the template argument shall satisfy the *Cpp17BidirectionalIterator* requirements (28.2.6).
 - (3.5) — If an algorithm's template parameter is named `RandomAccessIterator`, `RandomAccessIterator1`, or `RandomAccessIterator2`, the template argument shall satisfy the *Cpp17RandomAccessIterator* requirements (28.2.7).
- 4 If an algorithm's *Effects*: element specifies that a value pointed to by any iterator passed as an argument is modified, then that algorithm has an additional type requirement: The type of that argument shall satisfy the requirements of a mutable iterator (28.2). [*Note*: This requirement does not affect arguments that are named `OutputIterator`, `OutputIterator1`, or `OutputIterator2`, because output iterators must always be mutable. — *end note*]
- 5 Both in-place and copying versions are provided for certain algorithms.²⁶⁴ When such a version is provided for *algorithm* it is called *algorithm_copy*. Algorithms that take predicates end with the suffix `_if` (which follows the suffix `_copy`).
- 6 The `Predicate` parameter is used whenever an algorithm expects a function object (24.14) that, when applied to the result of dereferencing the corresponding iterator, returns a value testable as `true`. In other words, if an algorithm takes `Predicate pred` as its argument and `first` as its iterator argument, it should work correctly in the construct `pred(*first)` contextually converted to `bool` (Clause 7). The function object `pred` shall not apply any non-constant function through the dereferenced iterator.
- 7 The `BinaryPredicate` parameter is used whenever an algorithm expects a function object that when applied to the result of dereferencing two corresponding iterators or to dereferencing an iterator and type `T` when `T` is part of the signature returns a value testable as `true`. In other words, if an algorithm takes `BinaryPredicate binary_pred` as its argument and `first1` and `first2` as its iterator arguments, it should work correctly in the construct `binary_pred(*first1, *first2)` contextually converted to `bool` (Clause 7). `BinaryPredicate` always takes the first iterator's `value_type` as its first argument, that is, in those cases when `T value` is part of the signature, it should work correctly in the construct `binary_pred(*first1, value)` contextually converted to `bool` (Clause 7). `binary_pred` shall not apply any non-constant function through the dereferenced iterators.
- 8 [*Note*: Unless otherwise specified, algorithms that take function objects as arguments are permitted to copy those function objects freely. Programmers for whom object identity is important should consider using a wrapper class that points to a noncopied implementation object such as `reference_wrapper<T>` (24.14.5), or some equivalent solution. — *end note*]
- 9 When the description of an algorithm gives an expression such as `*first == value` for a condition, the expression shall evaluate to either `true` or `false` in boolean contexts.
- 10 In the description of the algorithms operators `+` and `-` are used for some of the iterator categories for which they do not have to be defined. In these cases the semantics of `a+n` is the same as that of

```
X tmp = a;
advance(tmp, n);
return tmp;
```

and that of `b-a` is the same as of

```
return distance(a, b);
```

29.4 Parallel algorithms

[`algorithms.parallel`]

- 1 This subclause describes components that C++ programs may use to perform operations on containers and other sequences in parallel.

264) The decision whether to include a copying version was usually based on complexity considerations. When the cost of doing the operation dominates the cost of copy, the copying version is not included. For example, `sort_copy` is not included because the cost of sorting is much more significant, and users might as well do `copy` followed by `sort`.

29.4.1 Terms and definitions [algorithms.parallel.defns]

- 1 A *parallel algorithm* is a function template listed in this document with a template parameter named `ExecutionPolicy`.
- 2 Parallel algorithms access objects indirectly accessible via their arguments by invoking the following functions:
 - (2.1) — All operations of the categories of the iterators that the algorithm is instantiated with.
 - (2.2) — Operations on those sequence elements that are required by its specification.
 - (2.3) — User-provided function objects to be applied during the execution of the algorithm, if required by the specification.
 - (2.4) — Operations on those function objects required by the specification. [*Note*: See 29.3. — *end note*]

These functions are herein called *element access functions*. [*Example*: The `sort` function may invoke the following element access functions:

- (2.5) — Operations of the random-access iterator of the actual template argument (as per 28.2.7), as implied by the name of the template parameter `RandomAccessIterator`.
- (2.6) — The `swap` function on the elements of the sequence (as per the preconditions specified in 29.7.1.1).
- (2.7) — The user-provided `Compare` function object.
 - *end example*]

29.4.2 Requirements on user-provided function objects [algorithms.parallel.user]

- 1 Unless otherwise specified, function objects passed into parallel algorithms as objects of type `Predicate`, `BinaryPredicate`, `Compare`, `UnaryOperation`, `BinaryOperation`, `BinaryOperation1`, `BinaryOperation2`, and the operators used by the analogous overloads to these parallel algorithms that could be formed by the invocation with the specified default predicate or operation (where applicable) shall not directly or indirectly modify objects via their arguments, nor shall they rely on the identity of the provided objects.

29.4.3 Effect of execution policies on algorithm execution [algorithms.parallel.exec]

- 1 Parallel algorithms have template parameters named `ExecutionPolicy` (24.19) which describe the manner in which the execution of these algorithms may be parallelized and the manner in which they apply the element access functions.
- 2 If an object is modified by an element access function, the algorithm will perform no other unsynchronized accesses to that object. The modifying element access functions are those which are specified as modifying the object. [*Note*: For example, `swap()`, `++`, `--`, `@=`, and assignments modify the object. For the assignment and `@=` operators, only the left argument is modified. — *end note*]
- 3 Unless otherwise stated, implementations may make arbitrary copies of elements (with type `T`) from sequences where `is_trivially_copy_constructible_v<T>` and `is_trivially_destructible_v<T>` are `true`. [*Note*: This implies that user-supplied function objects should not rely on object identity of arguments for such input sequences. Users for whom the object identity of the arguments to these function objects is important should consider using a wrapping iterator that returns a non-copied implementation object such as `reference_wrapper<T>` (24.14.5) or some equivalent solution. — *end note*]
- 4 The invocations of element access functions in parallel algorithms invoked with an execution policy object of type `execution::sequenced_policy` all occur in the calling thread of execution. [*Note*: The invocations are not interleaved; see 6.8.1. — *end note*]
- 5 The invocations of element access functions in parallel algorithms invoked with an execution policy object of type `execution::parallel_policy` are permitted to execute in either the invoking thread of execution or in a thread of execution implicitly created by the library to support parallel algorithm execution. If the threads of execution created by `thread` (34.3.2) provide concurrent forward progress guarantees (6.8.2.2), then a thread of execution implicitly created by the library will provide parallel forward progress guarantees; otherwise, the provided forward progress guarantee is implementation-defined. Any such invocations executing in the same thread of execution are indeterminately sequenced with respect to each other. [*Note*: It is the caller's responsibility to ensure that the invocation does not introduce data races or deadlocks. — *end note*]

[*Example*:

```
int a[] = {0,1};
std::vector<int> v;
```

```
std::for_each(std::execution::par, std::begin(a), std::end(a), [&](int i) {
    v.push_back(i*2+1); // incorrect: data race
});
```

The program above has a data race because of the unsynchronized access to the container `v`. — *end example*]
[*Example*:

```
std::atomic<int> x{0};
int a[] = {1,2};
std::for_each(std::execution::par, std::begin(a), std::end(a), [&](int) {
    x.fetch_add(1, std::memory_order::relaxed);
    // spin wait for another iteration to change the value of x
    while (x.load(std::memory_order::relaxed) == 1) { } // incorrect: assumes execution order
});
```

The above example depends on the order of execution of the iterations, and will not terminate if both iterations are executed sequentially on the same thread of execution. — *end example*]
[*Example*:

```
int x = 0;
std::mutex m;
int a[] = {1,2};
std::for_each(std::execution::par, std::begin(a), std::end(a), [&](int) {
    std::lock_guard<mutex> guard(m);
    ++x;
});
```

The above example synchronizes access to object `x` ensuring that it is incremented correctly. — *end example*]

- 6 The invocations of element access functions in parallel algorithms invoked with an execution policy of type `execution::parallel_unsequenced_policy` are permitted to execute in an unordered fashion in unspecified threads of execution, and unsequenced with respect to one another within each thread of execution. These threads of execution are either the invoking thread of execution or threads of execution implicitly created by the library; the latter will provide weakly parallel forward progress guarantees. [*Note*: This means that multiple function object invocations may be interleaved on a single thread of execution, which overrides the usual guarantee from 6.8.1 that function executions do not interleave with one another. — *end note*]
Since `execution::parallel_unsequenced_policy` allows the execution of element access functions to be interleaved on a single thread of execution, blocking synchronization, including the use of mutexes, risks deadlock. Thus, the synchronization with `execution::parallel_unsequenced_policy` is restricted as follows: A standard library function is *vectorization-unsafe* if it is specified to synchronize with another function invocation, or another function invocation is specified to synchronize with it, and if it is not a memory allocation or deallocation function. Vectorization-unsafe standard library functions may not be invoked by user code called from `execution::parallel_unsequenced_policy` algorithms. [*Note*: Implementations must ensure that internal synchronization inside standard library functions does not prevent forward progress when those functions are executed by threads of execution with weakly parallel forward progress guarantees. — *end note*]
[*Example*:

```
int x = 0;
std::mutex m;
int a[] = {1,2};
std::for_each(std::execution::par_unseq, std::begin(a), std::end(a), [&](int) {
    std::lock_guard<mutex> guard(m); // incorrect: lock_guard constructor calls m.lock()
    ++x;
});
```

The above program may result in two consecutive calls to `m.lock()` on the same thread of execution (which may deadlock), because the applications of the function object are not guaranteed to run on different threads of execution. — *end example*]
[*Note*: The semantics of the `execution::parallel_policy` or the `execution::parallel_unsequenced_policy` invocation allow the implementation to fall back to sequential execution if the system cannot parallelize an algorithm invocation due to lack of resources. — *end note*]

- 7 If an invocation of a parallel algorithm uses threads of execution implicitly created by the library, then the invoking thread of execution will either
- (7.1) — temporarily block with forward progress guarantee delegation (6.8.2.2) on the completion of these library-managed threads of execution, or
 - (7.2) — eventually execute an element access function;

the thread of execution will continue to do so until the algorithm is finished. [*Note:* In blocking with forward progress guarantee delegation in this context, a thread of execution created by the library is considered to have finished execution as soon as it has finished the execution of the particular element access function that the invoking thread of execution logically depends on. — *end note*]

- ⁸ The semantics of parallel algorithms invoked with an execution policy object of implementation-defined type are implementation-defined.

29.4.4 Parallel algorithm exceptions [algorithms.parallel.exceptions]

- ¹ During the execution of a parallel algorithm, if temporary memory resources are required for parallelization and none are available, the algorithm throws a `bad_alloc` exception.
- ² During the execution of a parallel algorithm, if the invocation of an element access function exits via an uncaught exception, the behavior is determined by the `ExecutionPolicy`.

29.4.5 ExecutionPolicy algorithm overloads [algorithms.parallel.overloads]

- ¹ Parallel algorithms are algorithm overloads. Each parallel algorithm overload has an additional template type parameter named `ExecutionPolicy`, which is the first template parameter. Additionally, each parallel algorithm overload has an additional function parameter of type `ExecutionPolicy&&`, which is the first function parameter. [*Note:* Not all algorithms have parallel algorithm overloads. — *end note*]
- ² Unless otherwise specified, the semantics of `ExecutionPolicy` algorithm overloads are identical to their overloads without.
- ³ Unless otherwise specified, the complexity requirements of `ExecutionPolicy` algorithm overloads are relaxed from the complexity requirements of the overloads without as follows: when the guarantee says “at most *expr*” or “exactly *expr*” and does not specify the number of assignments or swaps, and *expr* is not already expressed with $\mathcal{O}()$ notation, the complexity of the algorithm shall be $\mathcal{O}(expr)$.
- ⁴ Parallel algorithms shall not participate in overload resolution unless `is_execution_policy_v<remove_cvref_t<ExecutionPolicy>>` is true.

29.5 Non-modifying sequence operations [alg.nonmodifying]

29.5.1 All of [alg.all_of]

```
template<class InputIterator, class Predicate>
constexpr bool all_of(InputIterator first, InputIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
bool all_of(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
           Predicate pred);
```

- ¹ *Returns:* true if `[first, last)` is empty or if `pred(*i)` is true for every iterator `i` in the range `[first, last)`, and false otherwise.
- ² *Complexity:* At most `last - first` applications of the predicate.

29.5.2 Any of [alg.any_of]

```
template<class InputIterator, class Predicate>
constexpr bool any_of(InputIterator first, InputIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
bool any_of(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
           Predicate pred);
```

- ¹ *Returns:* false if `[first, last)` is empty or if there is no iterator `i` in the range `[first, last)` such that `pred(*i)` is true, and true otherwise.
- ² *Complexity:* At most `last - first` applications of the predicate.

29.5.3 None of [alg.none_of]

```
template<class InputIterator, class Predicate>
constexpr bool none_of(InputIterator first, InputIterator last, Predicate pred);
```

```
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
  bool none_of(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
              Predicate pred);
```

1 *Returns:* true if `[first, last)` is empty or if `pred(*i)` is false for every iterator `i` in the range `[first, last)`, and false otherwise.

2 *Complexity:* At most `last - first` applications of the predicate.

29.5.4 For each

[alg.foreach]

```
template<class InputIterator, class Function>
  constexpr Function for_each(InputIterator first, InputIterator last, Function f);
```

1 *Requires:* Function shall satisfy the *Cpp17MoveConstructible* requirements (Table 25). [*Note:* Function need not meet the requirements of *Cpp17CopyConstructible* (Table 26). — *end note*]

2 *Effects:* Applies `f` to the result of dereferencing every iterator in the range `[first, last)`, starting from `first` and proceeding to `last - 1`. [*Note:* If the type of `first` satisfies the requirements of a mutable iterator, `f` may apply non-constant functions through the dereferenced iterator. — *end note*]

3 *Returns:* `f`.

4 *Complexity:* Applies `f` exactly `last - first` times.

5 *Remarks:* If `f` returns a result, the result is ignored.

```
template<class ExecutionPolicy, class ForwardIterator, class Function>
  void for_each(ExecutionPolicy&& exec,
               ForwardIterator first, ForwardIterator last,
               Function f);
```

6 *Requires:* Function shall satisfy the *Cpp17CopyConstructible* requirements.

7 *Effects:* Applies `f` to the result of dereferencing every iterator in the range `[first, last)`. [*Note:* If the type of `first` satisfies the requirements of a mutable iterator, `f` may apply non-constant functions through the dereferenced iterator. — *end note*]

8 *Complexity:* Applies `f` exactly `last - first` times.

9 *Remarks:* If `f` returns a result, the result is ignored. Implementations do not have the freedom granted under 29.4.3 to make arbitrary copies of elements from the input sequence.

10 [*Note:* Does not return a copy of its Function parameter, since parallelization may not permit efficient state accumulation. — *end note*]

```
template<class InputIterator, class Size, class Function>
  constexpr InputIterator for_each_n(InputIterator first, Size n, Function f);
```

11 *Requires:* Function shall satisfy the *Cpp17MoveConstructible* requirements [*Note:* Function need not meet the requirements of *Cpp17CopyConstructible*. — *end note*]

12 *Requires:* `n >= 0`.

13 *Effects:* Applies `f` to the result of dereferencing every iterator in the range `[first, first + n)` in order. [*Note:* If the type of `first` satisfies the requirements of a mutable iterator, `f` may apply non-constant functions through the dereferenced iterator. — *end note*]

14 *Returns:* `first + n`.

15 *Remarks:* If `f` returns a result, the result is ignored.

```
template<class ExecutionPolicy, class ForwardIterator, class Size, class Function>
  ForwardIterator for_each_n(ExecutionPolicy&& exec, ForwardIterator first, Size n,
                           Function f);
```

16 *Requires:* Function shall satisfy the *Cpp17CopyConstructible* requirements.

17 *Requires:* `n >= 0`.

18 *Effects:* Applies `f` to the result of dereferencing every iterator in the range `[first, first + n)`. [*Note:* If the type of `first` satisfies the requirements of a mutable iterator, `f` may apply non-constant functions through the dereferenced iterator. — *end note*]

19 *Returns:* first + n.

20 *Remarks:* If f returns a result, the result is ignored. Implementations do not have the freedom granted under 29.4.3 to make arbitrary copies of elements from the input sequence.

29.5.5 Find

[alg.find]

```
template<class InputIterator, class T>
    constexpr InputIterator find(InputIterator first, InputIterator last,
                                const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    ForwardIterator find(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
                        const T& value);

template<class InputIterator, class Predicate>
    constexpr InputIterator find_if(InputIterator first, InputIterator last,
                                    Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator find_if(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
                           Predicate pred);

template<class InputIterator, class Predicate>
    constexpr InputIterator find_if_not(InputIterator first, InputIterator last,
                                        Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
    ForwardIterator find_if_not(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
                               Predicate pred);
```

1 *Returns:* The first iterator i in the range [first, last) for which the following corresponding conditions hold: *i == value, pred(*i) != false, pred(*i) == false. Returns last if no such iterator is found.

2 *Complexity:* At most last - first applications of the corresponding predicate.

29.5.6 Find end

[alg.find.end]

```
template<class ForwardIterator1, class ForwardIterator2>
    constexpr ForwardIterator1
        find_end(ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator1
        find_end(ExecutionPolicy&& exec,
                 ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2);

template<class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
    constexpr ForwardIterator1
        find_end(ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2,
                 BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
    ForwardIterator1
        find_end(ExecutionPolicy&& exec,
                 ForwardIterator1 first1, ForwardIterator1 last1,
                 ForwardIterator2 first2, ForwardIterator2 last2,
                 BinaryPredicate pred);
```

1 *Effects:* Finds a subsequence of equal values in a sequence.

2 *Returns:* The last iterator i in the range [first1, last1 - (last2 - first2)) such that for every non-negative integer n < (last2 - first2), the following corresponding conditions hold: *(i + n) == *(first2 + n), pred(*(i + n), *(first2 + n)) != false. Returns last1 if [first2, last2) is empty or if no such iterator is found.

- 3 *Complexity:* At most $(last2 - first2) * (last1 - first1 - (last2 - first2) + 1)$ applications of the corresponding predicate.

29.5.7 Find first

[alg.find.first.of]

```
template<class InputIterator, class ForwardIterator>
constexpr InputIterator
    find_first_of(InputIterator first1, InputIterator last1,
                  ForwardIterator first2, ForwardIterator last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator1
    find_first_of(ExecutionPolicy&& exec,
                  ForwardIterator1 first1, ForwardIterator1 last1,
                  ForwardIterator2 first2, ForwardIterator2 last2);

template<class InputIterator, class ForwardIterator,
         class BinaryPredicate>
constexpr InputIterator
    find_first_of(InputIterator first1, InputIterator last1,
                  ForwardIterator first2, ForwardIterator last2,
                  BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
ForwardIterator1
    find_first_of(ExecutionPolicy&& exec,
                  ForwardIterator1 first1, ForwardIterator1 last1,
                  ForwardIterator2 first2, ForwardIterator2 last2,
                  BinaryPredicate pred);
```

- 1 *Effects:* Finds an element that matches one of a set of values.
- 2 *Returns:* The first iterator i in the range $[first1, last1)$ such that for some iterator j in the range $[first2, last2)$ the following conditions hold: $*i == *j$, $pred(*i,*j) != false$. Returns $last1$ if $[first2, last2)$ is empty or if no such iterator is found.
- 3 *Complexity:* At most $(last1-first1) * (last2-first2)$ applications of the corresponding predicate.

29.5.8 Adjacent find

[alg.adjacent.find]

```
template<class ForwardIterator>
constexpr ForwardIterator
    adjacent_find(ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
    adjacent_find(ExecutionPolicy&& exec,
                  ForwardIterator first, ForwardIterator last);

template<class ForwardIterator, class BinaryPredicate>
constexpr ForwardIterator
    adjacent_find(ForwardIterator first, ForwardIterator last,
                  BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator, class BinaryPredicate>
ForwardIterator
    adjacent_find(ExecutionPolicy&& exec,
                  ForwardIterator first, ForwardIterator last,
                  BinaryPredicate pred);
```

- 1 *Returns:* The first iterator i such that both i and $i + 1$ are in the range $[first, last)$ for which the following corresponding conditions hold: $*i == *(i + 1)$, $pred(*i, *(i + 1)) != false$. Returns $last$ if no such iterator is found.
- 2 *Complexity:* For the overloads with no `ExecutionPolicy`, exactly $\min((i - first) + 1, (last - first) - 1)$ applications of the corresponding predicate, where i is `adjacent_find`'s return value. For the overloads with an `ExecutionPolicy`, $\mathcal{O}(last - first)$ applications of the corresponding predicate.

29.5.9 Count**[alg.count]**

```

template<class InputIterator, class T>
constexpr typename iterator_traits<InputIterator>::difference_type
count(InputIterator first, InputIterator last, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
typename iterator_traits<ForwardIterator>::difference_type
count(ExecutionPolicy&& exec,
      ForwardIterator first, ForwardIterator last, const T& value);

template<class InputIterator, class Predicate>
constexpr typename iterator_traits<InputIterator>::difference_type
count_if(InputIterator first, InputIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
typename iterator_traits<ForwardIterator>::difference_type
count_if(ExecutionPolicy&& exec,
        ForwardIterator first, ForwardIterator last, Predicate pred);

```

- ¹ *Effects:* Returns the number of iterators *i* in the range `[first, last)` for which the following corresponding conditions hold: `*i == value`, `pred(*i) != false`.
- ² *Complexity:* Exactly `last - first` applications of the corresponding predicate.

29.5.10 Mismatch**[mismatch]**

```

template<class InputIterator1, class InputIterator2>
constexpr pair<InputIterator1, InputIterator2>
mismatch(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec,
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2);

template<class InputIterator1, class InputIterator2,
        class BinaryPredicate>
constexpr pair<InputIterator1, InputIterator2>
mismatch(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2, BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec,
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, BinaryPredicate pred);

template<class InputIterator1, class InputIterator2>
constexpr pair<InputIterator1, InputIterator2>
mismatch(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2, InputIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec,
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2);

template<class InputIterator1, class InputIterator2,
        class BinaryPredicate>
constexpr pair<InputIterator1, InputIterator2>
mismatch(InputIterator1 first1, InputIterator1 last1,
        InputIterator2 first2, InputIterator2 last2,
        BinaryPredicate pred);

```

```

template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
pair<ForwardIterator1, ForwardIterator2>
mismatch(ExecutionPolicy&& exec,
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2, ForwardIterator2 last2,
        BinaryPredicate pred);

```

1 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.

2 *Returns:* A pair of iterators `first1 + n` and `first2 + n`, where `n` is the smallest integer such that, respectively,

(2.1) — `!(*(first1 + n) == *(first2 + n))` or

(2.2) — `pred(*(first1 + n), *(first2 + n)) == false`,

or `min(last1 - first1, last2 - first2)` if no such integer exists.

3 *Complexity:* At most `min(last1 - first1, last2 - first2)` applications of the corresponding predicate.

29.5.11 Equal

[alg.equal]

```

template<class InputIterator1, class InputIterator2>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
bool equal(ExecutionPolicy&& exec,
          ForwardIterator1 first1, ForwardIterator1 last1,
          ForwardIterator2 first2);

```

```

template<class InputIterator1, class InputIterator2,
        class BinaryPredicate>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
bool equal(ExecutionPolicy&& exec,
          ForwardIterator1 first1, ForwardIterator1 last1,
          ForwardIterator2 first2, BinaryPredicate pred);

```

```

template<class InputIterator1, class InputIterator2>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, InputIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
bool equal(ExecutionPolicy&& exec,
          ForwardIterator1 first1, ForwardIterator1 last1,
          ForwardIterator2 first2, ForwardIterator2 last2);

```

```

template<class InputIterator1, class InputIterator2,
        class BinaryPredicate>
constexpr bool equal(InputIterator1 first1, InputIterator1 last1,
                    InputIterator2 first2, InputIterator2 last2,
                    BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
bool equal(ExecutionPolicy&& exec,
          ForwardIterator1 first1, ForwardIterator1 last1,
          ForwardIterator2 first2, ForwardIterator2 last2,
          BinaryPredicate pred);

```

1 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.

2 *Returns:* If `last1 - first1 != last2 - first2`, return `false`. Otherwise return `true` if for every iterator `i` in the range `[first1, last1)` the following corresponding conditions hold: `*i == *(first2 + (i - first1))`, `pred(*i, *(first2 + (i - first1))) != false`. Otherwise, returns `false`.

3 *Complexity:*

- (3.1) — For the overloads with no `ExecutionPolicy`,
- (3.1.1) — if `InputIterator1` and `InputIterator2` meet the *Cpp17RandomAccessIterator* requirements (28.2.7) and `last1 - first1 != last2 - first2`, then no applications of the corresponding predicate; otherwise,
- (3.1.2) — at most $\min(\text{last1} - \text{first1}, \text{last2} - \text{first2})$ applications of the corresponding predicate.
- (3.2) — For the overloads with an `ExecutionPolicy`,
- (3.2.1) — if `ForwardIterator1` and `ForwardIterator2` meet the *Cpp17RandomAccessIterator* requirements and `last1 - first1 != last2 - first2`, then no applications of the corresponding predicate; otherwise,
- (3.2.2) — $\mathcal{O}(\min(\text{last1} - \text{first1}, \text{last2} - \text{first2}))$ applications of the corresponding predicate.

29.5.12 Is permutation

[alg.is_permutation]

```
template<class ForwardIterator1, class ForwardIterator2>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                              ForwardIterator2 first2);
template<class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                              ForwardIterator2 first2, BinaryPredicate pred);
template<class ForwardIterator1, class ForwardIterator2>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                              ForwardIterator2 first2, ForwardIterator2 last2);
template<class ForwardIterator1, class ForwardIterator2,
         class BinaryPredicate>
constexpr bool is_permutation(ForwardIterator1 first1, ForwardIterator1 last1,
                              ForwardIterator2 first2, ForwardIterator2 last2,
                              BinaryPredicate pred);
```

- 1 *Requires:* `ForwardIterator1` and `ForwardIterator2` shall have the same value type. The comparison function shall be an equivalence relation.
- 2 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.
- 3 *Returns:* If `last1 - first1 != last2 - first2`, return `false`. Otherwise return `true` if there exists a permutation of the elements in the range `[first2, first2 + (last1 - first1))`, beginning with `ForwardIterator2 begin`, such that `equal(first1, last1, begin)` returns `true` or `equal(first1, last1, begin, pred)` returns `true`; otherwise, returns `false`.
- 4 *Complexity:* No applications of the corresponding predicate if `ForwardIterator1` and `ForwardIterator2` meet the requirements of random access iterators and `last1 - first1 != last2 - first2`. Otherwise, exactly `last1 - first1` applications of the corresponding predicate if `equal(first1, last1, first2, last2)` would return `true` if `pred` was not given in the argument list or `equal(first1, last1, first2, last2, pred)` would return `true` if `pred` was given in the argument list; otherwise, at worst $\mathcal{O}(N^2)$, where N has the value `last1 - first1`.

29.5.13 Search

[alg.search]

```
template<class ForwardIterator1, class ForwardIterator2>
constexpr ForwardIterator1
search(ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator1
search(ExecutionPolicy&& exec,
       ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2);
```

```

template<class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
constexpr ForwardIterator1
search(ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2,
       BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryPredicate>
ForwardIterator1
search(ExecutionPolicy&& exec,
       ForwardIterator1 first1, ForwardIterator1 last1,
       ForwardIterator2 first2, ForwardIterator2 last2,
       BinaryPredicate pred);

```

1 *Effects:* Finds a subsequence of equal values in a sequence.

2 *Returns:* The first iterator *i* in the range $[first1, last1 - (last2 - first2))$ such that for every non-negative integer *n* less than $last2 - first2$ the following corresponding conditions hold: $*(i + n) == *(first2 + n)$, $pred(*(i + n), *(first2 + n)) != false$. Returns *first1* if $[first2, last2)$ is empty, otherwise returns *last1* if no such iterator is found.

3 *Complexity:* At most $(last1 - first1) * (last2 - first2)$ applications of the corresponding predicate.

```

template<class ForwardIterator, class Size, class T>
constexpr ForwardIterator
search_n(ForwardIterator first, ForwardIterator last,
         Size count, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T>
ForwardIterator
search_n(ExecutionPolicy&& exec,
         ForwardIterator first, ForwardIterator last,
         Size count, const T& value);

```

```

template<class ForwardIterator, class Size, class T,
        class BinaryPredicate>
constexpr ForwardIterator
search_n(ForwardIterator first, ForwardIterator last,
         Size count, const T& value,
         BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T,
        class BinaryPredicate>
ForwardIterator
search_n(ExecutionPolicy&& exec,
         ForwardIterator first, ForwardIterator last,
         Size count, const T& value,
         BinaryPredicate pred);

```

4 *Requires:* The type *Size* shall be convertible to integral type (7.8, 15.3).

5 *Effects:* Finds a subsequence of equal values in a sequence.

6 *Returns:* The first iterator *i* in the range $[first, last - count)$ such that for every non-negative integer *n* less than *count* the following corresponding conditions hold: $*(i + n) == value$, $pred(*(i + n), value) != false$. Returns *last* if no such iterator is found.

7 *Complexity:* At most $last - first$ applications of the corresponding predicate.

```

template<class ForwardIterator, class Searcher>
constexpr ForwardIterator
search(ForwardIterator first, ForwardIterator last, const Searcher& searcher);

```

8 *Effects:* Equivalent to: `return searcher(first, last).first;`

9 *Remarks:* *Searcher* need not meet the *Cpp17CopyConstructible* requirements.

29.6 Mutating sequence operations

[alg.modifying.operations]

29.6.1 Copy

[alg.copy]

```
template<class InputIterator, class OutputIterator>
constexpr OutputIterator copy(InputIterator first, InputIterator last,
                             OutputIterator result);
```

1 *Requires:* result shall not be in the range [first, last).

2 *Effects:* Copies elements in the range [first, last) into the range [result, result + (last - first)) starting from first and proceeding to last. For each non-negative integer n < (last - first), performs *(result + n) = *(first + n).

3 *Returns:* result + (last - first).

4 *Complexity:* Exactly last - first assignments.

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2 copy(ExecutionPolicy&& policy,
                     ForwardIterator1 first, ForwardIterator1 last,
                     ForwardIterator2 result);
```

5 *Requires:* The ranges [first, last) and [result, result + (last - first)) shall not overlap.

6 *Effects:* Copies elements in the range [first, last) into the range [result, result + (last - first)). For each non-negative integer n < (last - first), performs *(result + n) = *(first + n).

7 *Returns:* result + (last - first).

8 *Complexity:* Exactly last - first assignments.

```
template<class InputIterator, class Size, class OutputIterator>
constexpr OutputIterator copy_n(InputIterator first, Size n,
                               OutputIterator result);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class Size, class ForwardIterator2>
ForwardIterator2 copy_n(ExecutionPolicy&& exec,
                       ForwardIterator1 first, Size n,
                       ForwardIterator2 result);
```

9 *Effects:* For each non-negative integer i < n, performs *(result + i) = *(first + i).

10 *Returns:* result + n.

11 *Complexity:* Exactly n assignments.

```
template<class InputIterator, class OutputIterator, class Predicate>
constexpr OutputIterator copy_if(InputIterator first, InputIterator last,
                                OutputIterator result, Predicate pred);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class Predicate>
```

```
ForwardIterator2 copy_if(ExecutionPolicy&& exec,
                        ForwardIterator1 first, ForwardIterator1 last,
                        ForwardIterator2 result, Predicate pred);
```

12 *Requires:* The ranges [first, last) and [result, result + (last - first)) shall not overlap. [Note: For the overload with an ExecutionPolicy, there may be a performance cost if iterator_traits<ForwardIterator1>::value_type is not Cpp17MoveConstructible (Table 25). — end note]

13 *Effects:* Copies all of the elements referred to by the iterator i in the range [first, last) for which pred(*i) is true.

14 *Returns:* The end of the resulting range.

15 *Complexity:* Exactly last - first applications of the corresponding predicate.

16 *Remarks:* Stable (20.5.5.7).

```
template<class BidirectionalIterator1, class BidirectionalIterator2>
constexpr BidirectionalIterator2
copy_backward(BidirectionalIterator1 first,
             BidirectionalIterator1 last,
```

```
BidirectionalIterator2 result);
```

- 17 *Requires:* result shall not be in the range [first, last].
- 18 *Effects:* Copies elements in the range [first, last) into the range [result - (last-first), result) starting from last - 1 and proceeding to first.²⁶⁵ For each positive integer n <= (last - first), performs *(result - n) = *(last - n).
- 19 *Returns:* result - (last - first).
- 20 *Complexity:* Exactly last - first assignments.

29.6.2 Move

[alg.move]

```
template<class InputIterator, class OutputIterator>
constexpr OutputIterator move(InputIterator first, InputIterator last,
                             OutputIterator result);
```

- 1 *Requires:* result shall not be in the range [first, last).
- 2 *Effects:* Moves elements in the range [first, last) into the range [result, result + (last - first)) starting from first and proceeding to last. For each non-negative integer n < (last-first), performs *(result + n) = std::move(*(first + n)).
- 3 *Returns:* result + (last - first).
- 4 *Complexity:* Exactly last - first move assignments.

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2 move(ExecutionPolicy&& policy,
                    ForwardIterator1 first, ForwardIterator1 last,
                    ForwardIterator2 result);
```

- 5 *Requires:* The ranges [first, last) and [result, result + (last - first)) shall not overlap.
- 6 *Effects:* Moves elements in the range [first, last) into the range [result, result + (last - first)). For each non-negative integer n < (last - first), performs *(result + n) = std::move(*(first + n)).
- 7 *Returns:* result + (last - first).
- 8 *Complexity:* Exactly last - first assignments.

```
template<class BidirectionalIterator1, class BidirectionalIterator2>
constexpr BidirectionalIterator2
move_backward(BidirectionalIterator1 first, BidirectionalIterator1 last,
             BidirectionalIterator2 result);
```

- 9 *Requires:* result shall not be in the range (first, last].
- 10 *Effects:* Moves elements in the range [first, last) into the range [result - (last-first), result) starting from last - 1 and proceeding to first.²⁶⁶ For each positive integer n <= (last - first), performs *(result - n) = std::move(*(last - n)).
- 11 *Returns:* result - (last - first).
- 12 *Complexity:* Exactly last - first assignments.

29.6.3 Swap

[alg.swap]

```
template<class ForwardIterator1, class ForwardIterator2>
constexpr ForwardIterator2
swap_ranges(ForwardIterator1 first1, ForwardIterator1 last1,
           ForwardIterator2 first2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2
swap_ranges(ExecutionPolicy&& exec,
           ForwardIterator1 first1, ForwardIterator1 last1,
```

²⁶⁵) copy_backward should be used instead of copy when last is in the range [result - (last - first), result).

²⁶⁶) move_backward should be used instead of move when last is in the range [result - (last - first), result).

```
ForwardIterator2 first2);
```

1 *Requires:* The two ranges `[first1, last1)` and `[first2, first2 + (last1 - first1))` shall not overlap. `*(first1 + n)` shall be swappable with (20.5.3.2) `*(first2 + n)`.

2 *Effects:* For each non-negative integer `n < (last1 - first1)` performs: `swap(*(first1 + n), *(first2 + n))`.

3 *Returns:* `first2 + (last1 - first1)`.

4 *Complexity:* Exactly `last1 - first1` swaps.

```
template<class ForwardIterator1, class ForwardIterator2>
constexpr void iter_swap(ForwardIterator1 a, ForwardIterator2 b);
```

5 *Requires:* `a` and `b` shall be dereferenceable. `*a` shall be swappable with (20.5.3.2) `*b`.

6 *Effects:* As if by `swap(*a, *b)`.

29.6.4 Transform

[alg.transform]

```
template<class InputIterator, class OutputIterator,
        class UnaryOperation>
constexpr OutputIterator
transform(InputIterator first, InputIterator last,
         OutputIterator result, UnaryOperation op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class UnaryOperation>
ForwardIterator2
transform(ExecutionPolicy&& exec,
         ForwardIterator1 first, ForwardIterator1 last,
         ForwardIterator2 result, UnaryOperation op);
```

```
template<class InputIterator1, class InputIterator2,
        class OutputIterator, class BinaryOperation>
constexpr OutputIterator
transform(InputIterator1 first1, InputIterator1 last1,
         InputIterator2 first2, OutputIterator result,
         BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class ForwardIterator, class BinaryOperation>
ForwardIterator
transform(ExecutionPolicy&& exec,
         ForwardIterator1 first1, ForwardIterator1 last1,
         ForwardIterator2 first2, ForwardIterator result,
         BinaryOperation binary_op);
```

1 *Requires:* `op` and `binary_op` shall not invalidate iterators or subranges, or modify elements in the ranges

(1.1) — `[first1, last1]`,

(1.2) — `[first2, first2 + (last1 - first1)]`, and

(1.3) — `[result, result + (last1 - first1)]`.²⁶⁷

2 *Effects:* Assigns through every iterator `i` in the range `[result, result + (last1 - first1))` a new corresponding value equal to `op(*(first1 + (i - result)))` or `binary_op(*(first1 + (i - result)), *(first2 + (i - result)))`.

3 *Returns:* `result + (last1 - first1)`.

4 *Complexity:* Exactly `last1 - first1` applications of `op` or `binary_op`. This requirement also applies to the overload with an `ExecutionPolicy`.

5 *Remarks:* `result` may be equal to `first` in case of unary transform, or to `first1` or `first2` in case of binary transform.

²⁶⁷) The use of fully closed ranges is intentional.

29.6.5 Replace

[alg.replace]

```

template<class ForwardIterator, class T>
    constexpr void replace(ForwardIterator first, ForwardIterator last,
                           const T& old_value, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator, class T>
    void replace(ExecutionPolicy&& exec,
                 ForwardIterator first, ForwardIterator last,
                 const T& old_value, const T& new_value);

template<class ForwardIterator, class Predicate, class T>
    constexpr void replace_if(ForwardIterator first, ForwardIterator last,
                              Predicate pred, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator, class Predicate, class T>
    void replace_if(ExecutionPolicy&& exec,
                    ForwardIterator first, ForwardIterator last,
                    Predicate pred, const T& new_value);

```

- 1 *Requires:* The expression `*first = new_value` shall be valid.
- 2 *Effects:* Substitutes elements referred by the iterator `i` in the range `[first, last)` with `new_value`, when the following corresponding conditions hold: `*i == old_value`, `pred(*i) != false`.
- 3 *Complexity:* Exactly `last - first` applications of the corresponding predicate.

```

template<class InputIterator, class OutputIterator, class T>
    constexpr OutputIterator
        replace_copy(InputIterator first, InputIterator last,
                     OutputIterator result,
                     const T& old_value, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class T>
    ForwardIterator2
        replace_copy(ExecutionPolicy&& exec,
                     ForwardIterator1 first, ForwardIterator1 last,
                     ForwardIterator2 result,
                     const T& old_value, const T& new_value);

template<class InputIterator, class OutputIterator, class Predicate, class T>
    constexpr OutputIterator
        replace_copy_if(InputIterator first, InputIterator last,
                        OutputIterator result,
                        Predicate pred, const T& new_value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
         class Predicate, class T>
    ForwardIterator2
        replace_copy_if(ExecutionPolicy&& exec,
                        ForwardIterator1 first, ForwardIterator1 last,
                        ForwardIterator2 result,
                        Predicate pred, const T& new_value);

```

- 4 *Requires:* The results of the expressions `*first` and `new_value` shall be writable (28.2.1) to the result output iterator. The ranges `[first, last)` and `[result, result + (last - first))` shall not overlap.
- 5 *Effects:* Assigns to every iterator `i` in the range `[result, result + (last - first))` either `new_value` or `*(first + (i - result))` depending on whether the following corresponding conditions hold:
- ```

 *(first + (i - result)) == old_value
 pred(*(first + (i - result))) != false

```
- 6     *Returns:* `result + (last - first)`.
- 7     *Complexity:* Exactly `last - first` applications of the corresponding predicate.

## 29.6.6 Fill

[alg.fill]

```

template<class ForwardIterator, class T>

```

```
constexpr void fill(ForwardIterator first, ForwardIterator last, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
void fill(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last, const T& value);
```

```
template<class OutputIterator, class Size, class T>
constexpr OutputIterator fill_n(OutputIterator first, Size n, const T& value);
template<class ExecutionPolicy, class ForwardIterator, class Size, class T>
ForwardIterator fill_n(ExecutionPolicy&& exec,
 ForwardIterator first, Size n, const T& value);
```

1 *Requires:* The expression `value` shall be writable (28.2.1) to the output iterator. The type `Size` shall be convertible to an integral type (7.8, 15.3).

2 *Effects:* The `fill` algorithms assign `value` through all the iterators in the range `[first, last)`. The `fill_n` algorithms assign `value` through all the iterators in the range `[first, first + n)` if `n` is positive, otherwise they do nothing.

3 *Returns:* `fill_n` returns `first + n` for non-negative values of `n` and `first` for negative values.

4 *Complexity:* Exactly `last - first`, `n`, or 0 assignments, respectively.

### 29.6.7 Generate

[alg.generate]

```
template<class ForwardIterator, class Generator>
constexpr void generate(ForwardIterator first, ForwardIterator last,
 Generator gen);
template<class ExecutionPolicy, class ForwardIterator, class Generator>
void generate(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Generator gen);
```

```
template<class OutputIterator, class Size, class Generator>
constexpr OutputIterator generate_n(OutputIterator first, Size n, Generator gen);
template<class ExecutionPolicy, class ForwardIterator, class Size, class Generator>
ForwardIterator generate_n(ExecutionPolicy&& exec,
 ForwardIterator first, Size n, Generator gen);
```

1 *Requires:* `gen` takes no arguments, `Size` shall be convertible to an integral type (7.8, 15.3).

2 *Effects:* The `generate` algorithms invoke the function object `gen` and assign the return value of `gen` through all the iterators in the range `[first, last)`. The `generate_n` algorithms invoke the function object `gen` and assign the return value of `gen` through all the iterators in the range `[first, first + n)` if `n` is positive, otherwise they do nothing.

3 *Returns:* `generate_n` returns `first + n` for non-negative values of `n` and `first` for negative values.

4 *Complexity:* Exactly `last - first`, `n`, or 0 invocations of `gen` and assignments, respectively.

### 29.6.8 Remove

[alg.remove]

```
template<class ForwardIterator, class T>
constexpr ForwardIterator remove(ForwardIterator first, ForwardIterator last,
 const T& value);
template<class ExecutionPolicy, class ForwardIterator, class T>
ForwardIterator remove(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 const T& value);

template<class ForwardIterator, class Predicate>
constexpr ForwardIterator remove_if(ForwardIterator first, ForwardIterator last,
 Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
ForwardIterator remove_if(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Predicate pred);
```

1 *Requires:* The type of `*first` shall satisfy the *Cpp17MoveAssignable* requirements (Table 27).

2 *Effects:* Eliminates all the elements referred to by iterator `i` in the range `[first, last)` for which the following corresponding conditions hold: `*i == value`, `pred(*i) != false`.

3 *Returns:* The end of the resulting range.

4 *Remarks:* Stable (20.5.5.7).

5 *Complexity:* Exactly `last - first` applications of the corresponding predicate.

6 [Note: Each element in the range `[ret, last)`, where `ret` is the returned value, has a valid but unspecified state, because the algorithms can eliminate elements by moving from elements that were originally in that range. — end note]

```
template<class InputIterator, class OutputIterator, class T>
constexpr OutputIterator
remove_copy(InputIterator first, InputIterator last,
 OutputIterator result, const T& value);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
class T>
ForwardIterator2
remove_copy(ExecutionPolicy&& exec,
 ForwardIterator1 first, ForwardIterator1 last,
 ForwardIterator2 result, const T& value);
```

```
template<class InputIterator, class OutputIterator, class Predicate>
constexpr OutputIterator
remove_copy_if(InputIterator first, InputIterator last,
 OutputIterator result, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
class Predicate>
ForwardIterator2
remove_copy_if(ExecutionPolicy&& exec,
 ForwardIterator1 first, ForwardIterator1 last,
 ForwardIterator2 result, Predicate pred);
```

7 *Requires:* The ranges `[first, last)` and `[result, result + (last - first))` shall not overlap. The expression `*result = *first` shall be valid. [Note: For the overloads with an `ExecutionPolicy`, there may be a performance cost if `iterator_traits<ForwardIterator1>::value_type` is not `Cpp17-MoveConstructible` (Table 25). — end note]

8 *Effects:* Copies all the elements referred to by the iterator `i` in the range `[first, last)` for which the following corresponding conditions do not hold: `*i == value`, `pred(*i) != false`.

9 *Returns:* The end of the resulting range.

10 *Complexity:* Exactly `last - first` applications of the corresponding predicate.

11 *Remarks:* Stable (20.5.5.7).

## 29.6.9 Unique

[alg.unique]

```
template<class ForwardIterator>
constexpr ForwardIterator unique(ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator unique(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);

template<class ForwardIterator, class BinaryPredicate>
constexpr ForwardIterator unique(ForwardIterator first, ForwardIterator last,
 BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator, class BinaryPredicate>
ForwardIterator unique(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 BinaryPredicate pred);
```

1 *Requires:* The comparison function shall be an equivalence relation. The type of `*first` shall satisfy the `Cpp17MoveAssignable` requirements (Table 27).



2 *Effects:* For a nonempty range, eliminates all but the first element from every consecutive group of equivalent elements referred to by the iterator `i` in the range `[first + 1, last)` for which the following conditions hold: `*(i - 1) == *i` or `pred(*(i - 1), *i) != false`.

3 *Returns:* The end of the resulting range.

4 *Complexity:* For nonempty ranges, exactly `(last - first) - 1` applications of the corresponding predicate.

```
template<class InputIterator, class OutputIterator>
constexpr OutputIterator
 unique_copy(InputIterator first, InputIterator last,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2
 unique_copy(ExecutionPolicy&& exec,
 ForwardIterator1 first, ForwardIterator1 last,
 ForwardIterator2 result);

template<class InputIterator, class OutputIterator,
 class BinaryPredicate>
constexpr OutputIterator
 unique_copy(InputIterator first, InputIterator last,
 OutputIterator result, BinaryPredicate pred);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class BinaryPredicate>
ForwardIterator2
 unique_copy(ExecutionPolicy&& exec,
 ForwardIterator1 first, ForwardIterator1 last,
 ForwardIterator2 result, BinaryPredicate pred);
```

5 *Requires:*

(5.1) — The comparison function shall be an equivalence relation.

(5.2) — The ranges `[first, last)` and `[result, result+(last-first))` shall not overlap.

(5.3) — The expression `*result = *first` shall be valid.

(5.4) — For the overloads with no `ExecutionPolicy`, let `T` be the value type of `InputIterator`. If `InputIterator` meets the *Cpp17ForwardIterator* requirements, then there are no additional requirements for `T`. Otherwise, if `OutputIterator` meets the *Cpp17ForwardIterator* requirements and its value type is the same as `T`, then `T` shall be *Cpp17CopyAssignable* (Table 28). Otherwise, `T` shall be both *Cpp17CopyConstructible* (Table 26) and *Cpp17CopyAssignable*. [Note: For the overloads with an `ExecutionPolicy`, there may be a performance cost if the value type of `ForwardIterator1` is not both *Cpp17CopyConstructible* and *Cpp17CopyAssignable*. — end note]

6 *Effects:* Copies only the first element from every consecutive group of equal elements referred to by the iterator `i` in the range `[first, last)` for which the following corresponding conditions hold: `*i == *(i - 1)` or `pred(*i, *(i - 1)) != false`.

7 *Returns:* The end of the resulting range.

8 *Complexity:* For nonempty ranges, exactly `last - first - 1` applications of the corresponding predicate.

### 29.6.10 Reverse

[alg.reverse]

```
template<class BidirectionalIterator>
constexpr void reverse(BidirectionalIterator first, BidirectionalIterator last);
template<class ExecutionPolicy, class BidirectionalIterator>
void reverse(ExecutionPolicy&& exec,
 BidirectionalIterator first, BidirectionalIterator last);
```

1 *Requires:* `BidirectionalIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2).

2 *Effects:* For each non-negative integer `i < (last - first) / 2`, applies `iter_swap` to all pairs of iterators `first + i`, `(last - i) - 1`.

3 *Complexity:* Exactly `(last - first)/2` swaps.

```

template<class BidirectionalIterator, class OutputIterator>
constexpr OutputIterator
reverse_copy(BidirectionalIterator first, BidirectionalIterator last,
 OutputIterator result);
template<class ExecutionPolicy, class BidirectionalIterator, class ForwardIterator>
ForwardIterator
reverse_copy(ExecutionPolicy&& exec,
 BidirectionalIterator first, BidirectionalIterator last,
 ForwardIterator result);

```

- 4     *Requires:* The ranges `[first, last)` and `[result, result + (last - first))` shall not overlap.
- 5     *Effects:* Copies the range `[first, last)` to the range `[result, result + (last - first))` such that for every non-negative integer  $i < (last - first)$  the following assignment takes place: `*(result + (last - first) - 1 - i) = *(first + i)`.
- 6     *Returns:* `result + (last - first)`.
- 7     *Complexity:* Exactly `last - first` assignments.

### 29.6.11 Rotate

[alg.rotate]

```

template<class ForwardIterator>
constexpr ForwardIterator
rotate(ForwardIterator first, ForwardIterator middle, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
rotate(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator middle, ForwardIterator last);

```

- 1     *Requires:* `[first, middle)` and `[middle, last)` shall be valid ranges. `ForwardIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.
- 2     *Effects:* For each non-negative integer  $i < (last - first)$ , places the element from the position `first + i` into position `first + (i + (last - middle)) % (last - first)`.
- 3     *Returns:* `first + (last - middle)`.
- 4     *Remarks:* This is a left rotate.
- 5     *Complexity:* At most `last - first` swaps.

```

template<class ForwardIterator, class OutputIterator>
constexpr OutputIterator
rotate_copy(ForwardIterator first, ForwardIterator middle, ForwardIterator last,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2
rotate_copy(ExecutionPolicy&& exec,
 ForwardIterator1 first, ForwardIterator1 middle, ForwardIterator1 last,
 ForwardIterator2 result);

```

- 6     *Requires:* The ranges `[first, last)` and `[result, result + (last - first))` shall not overlap.
- 7     *Effects:* Copies the range `[first, last)` to the range `[result, result + (last - first))` such that for each non-negative integer  $i < (last - first)$  the following assignment takes place: `*(result + i) = *(first + (i + (middle - first)) % (last - first))`.
- 8     *Returns:* `result + (last - first)`.
- 9     *Complexity:* Exactly `last - first` assignments.

### 29.6.12 Sample

[alg.random.sample]

```

template<class PopulationIterator, class SampleIterator,
 class Distance, class UniformRandomBitGenerator>
SampleIterator sample(PopulationIterator first, PopulationIterator last,
 SampleIterator out, Distance n,

```

```
UniformRandomBitGenerator&& g);
```

1 *Requires:*

- (1.1) — `PopulationIterator` shall satisfy the *Cpp17InputIterator* requirements (28.2.3).
- (1.2) — `SampleIterator` shall satisfy the *Cpp17OutputIterator* requirements (28.2.4).
- (1.3) — `SampleIterator` shall satisfy the *Cpp17RandomAccessIterator* requirements (28.2.7) unless `PopulationIterator` satisfies the *Cpp17ForwardIterator* requirements (28.2.5).
- (1.4) — `PopulationIterator`'s value type shall be writable (28.2.1) to `out`.
- (1.5) — `Distance` shall be an integer type.
- (1.6) — `remove_reference_t<UniformRandomBitGenerator>` shall satisfy the requirements of a uniform random bit generator type (30.7.2.3) whose return type is convertible to `Distance`.
- (1.7) — `out` shall not be in the range `[first, last)`.

2 *Effects:* Copies `min(last - first, n)` elements (the *sample*) from `[first, last)` (the *population*) to `out` such that each possible sample has equal probability of appearance. [*Note:* Algorithms that obtain such effects include *selection sampling* and *reservoir sampling*. — *end note*]

3 *Returns:* The end of the resulting sample range.

4 *Complexity:*  $\mathcal{O}(\text{last} - \text{first})$ .

5 *Remarks:*

- (5.1) — Stable if and only if `PopulationIterator` satisfies the *Cpp17ForwardIterator* requirements.
- (5.2) — To the extent that the implementation of this function makes use of random numbers, the object `g` shall serve as the implementation's source of randomness.

### 29.6.13 Shuffle

[alg.random.shuffle]

```
template<class RandomAccessIterator, class UniformRandomBitGenerator>
void shuffle(RandomAccessIterator first,
 RandomAccessIterator last,
 UniformRandomBitGenerator&& g);
```

1 *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type `remove_reference_t<UniformRandomBitGenerator>` shall satisfy the requirements of a uniform random bit generator (30.7.2.3) type whose return type is convertible to `iterator_traits<RandomAccessIterator>::difference_type`.

2 *Effects:* Permutes the elements in the range `[first, last)` such that each possible permutation of those elements has equal probability of appearance.

3 *Complexity:* Exactly `(last - first) - 1` swaps.

4 *Remarks:* To the extent that the implementation of this function makes use of random numbers, the object `g` shall serve as the implementation's source of randomness.

### 29.6.14 Shift

[alg.shift]

```
template<class ForwardIterator>
constexpr ForwardIterator
shift_left(ForwardIterator first, ForwardIterator last,
 typename iterator_traits<ForwardIterator>::difference_type n);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
shift_left(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
 typename iterator_traits<ForwardIterator>::difference_type n);
```

1 *Requires:* The type of `*first` shall satisfy the *Cpp17MoveAssignable* requirements.

2 *Effects:* If `n <= 0` or `n >= last - first`, does nothing. Otherwise, moves the element from position `first + n + i` into position `first + i` for each non-negative integer `i < (last - first) - n`. In the first overload case, does so in order starting from `i = 0` and proceeding to `i = (last - first) - n - 1`.

3 *Returns:* `first + (last - first - n)` if `n` is positive and `n < last - first`, otherwise `first` if `n` is positive, otherwise `last`.

4 *Complexity:* At most `(last - first) - n` assignments.

```
template<class ForwardIterator>
constexpr ForwardIterator
 shift_right(ForwardIterator first, ForwardIterator last,
 typename iterator_traits<ForwardIterator>::difference_type n);
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
 shift_right(ExecutionPolicy&& exec, ForwardIterator first, ForwardIterator last,
 typename iterator_traits<ForwardIterator>::difference_type n);
```

5 *Requires:* The type of `*first` shall satisfy the *Cpp17MoveAssignable* requirements. `ForwardIterator` shall meet the *Cpp17BidirectionalIterator* requirements (28.2.6) or the *Cpp17ValueSwappable* requirements.

6 *Effects:* If `n <= 0` or `n >= last - first`, does nothing. Otherwise, moves the element from position `first + i` into position `first + n + i` for each non-negative integer `i < (last - first) - n`. In the first overload case, if `ForwardIterator` satisfies the *Cpp17BidirectionalIterator* requirements, does so in order starting from `i = (last - first) - n - 1` and proceeding to `i = 0`.

7 *Returns:* `first + n` if `n` is positive and `n < last - first`, otherwise `last` if `n` is positive, otherwise `first`.

8 *Complexity:* At most `(last - first) - n` assignments or swaps.

## 29.7 Sorting and related operations

[alg.sorting]

1 All the operations in 29.7 have two versions: one that takes a function object of type `Compare` and one that uses an `operator<`.

2 `Compare` is a function object type (24.14). The return value of the function call operation applied to an object of type `Compare`, when contextually converted to `bool` (Clause 7), yields `true` if the first argument of the call is less than the second, and `false` otherwise. `Compare comp` is used throughout for algorithms assuming an ordering relation. It is assumed that `comp` will not apply any non-constant function through the dereferenced iterator.

3 For all algorithms that take `Compare`, there is a version that uses `operator<` instead. That is, `comp(*i, *j) != false` defaults to `*i < *j != false`. For algorithms other than those described in 29.7.3, `comp` shall induce a strict weak ordering on the values.

4 The term *strict* refers to the requirement of an irreflexive relation (`!comp(x, x)` for all `x`), and the term *weak* to requirements that are not as strong as those for a total ordering, but stronger than those for a partial ordering. If we define `equiv(a, b)` as `!comp(a, b) && !comp(b, a)`, then the requirements are that `comp` and `equiv` both be transitive relations:

(4.1) — `comp(a, b) && comp(b, c)` implies `comp(a, c)`

(4.2) — `equiv(a, b) && equiv(b, c)` implies `equiv(a, c)`

[Note: Under these conditions, it can be shown that

(4.3) — `equiv` is an equivalence relation,

(4.4) — `comp` induces a well-defined relation on the equivalence classes determined by `equiv`, and

(4.5) — the induced relation is a strict total ordering.

— end note]

5 A sequence is *sorted with respect to a comparator comp* if for every iterator `i` pointing to the sequence and every non-negative integer `n` such that `i + n` is a valid iterator pointing to an element of the sequence, `comp(*(i + n), *i) == false`.

6 A sequence `[start, finish)` is *partitioned with respect to an expression f(e)* if there exists an integer `n` such that for all `0 <= i < (finish - start)`, `f(*(start + i))` is `true` if and only if `i < n`.

7 In the descriptions of the functions that deal with ordering relationships we frequently use a notion of equivalence to describe concepts such as stability. The equivalence to which we refer is not necessarily an

`operator==`, but an equivalence relation induced by the strict weak ordering. That is, two elements `a` and `b` are considered equivalent if and only if `!(a < b) && !(b < a)`.

## 29.7.1 Sorting

[alg.sort]

### 29.7.1.1 `sort`

[sort]

```
template<class RandomAccessIterator>
 constexpr void sort(RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator>
 void sort(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last);

template<class RandomAccessIterator, class Compare>
 constexpr void sort(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
 void sort(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

<sup>1</sup> *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

<sup>2</sup> *Effects:* Sorts the elements in the range `[first, last)`.

<sup>3</sup> *Complexity:*  $\mathcal{O}(N \log N)$  comparisons, where  $N = \text{last} - \text{first}$ .

### 29.7.1.2 `stable_sort`

[stable.sort]

```
template<class RandomAccessIterator>
 void stable_sort(RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator>
 void stable_sort(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last);

template<class RandomAccessIterator, class Compare>
 void stable_sort(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
 void stable_sort(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

<sup>1</sup> *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

<sup>2</sup> *Effects:* Sorts the elements in the range `[first, last)`.

<sup>3</sup> *Complexity:* At most  $N \log^2(N)$  comparisons, where  $N = \text{last} - \text{first}$ , but only  $N \log N$  comparisons if there is enough extra memory.

<sup>4</sup> *Remarks:* Stable (20.5.5.7).

### 29.7.1.3 `partial_sort`

[partial.sort]

```
template<class RandomAccessIterator>
 constexpr void partial_sort(RandomAccessIterator first,
 RandomAccessIterator middle,
 RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator>
 void partial_sort(ExecutionPolicy&& exec,
 RandomAccessIterator first,
 RandomAccessIterator middle,
 RandomAccessIterator last);
```

```

template<class RandomAccessIterator, class Compare>
 constexpr void partial_sort(RandomAccessIterator first,
 RandomAccessIterator middle,
 RandomAccessIterator last,
 Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
 void partial_sort(ExecutionPolicy&& exec,
 RandomAccessIterator first,
 RandomAccessIterator middle,
 RandomAccessIterator last,
 Compare comp);

```

1 *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

2 *Effects:* Places the first `middle - first` sorted elements from the range `[first, last)` into the range `[first, middle)`. The rest of the elements in the range `[middle, last)` are placed in an unspecified order.

3 *Complexity:* Approximately  $(last - first) * \log(middle - first)$  comparisons.

#### 29.7.1.4 `partial_sort_copy`

[`partial.sort.copy`]

```

template<class InputIterator, class RandomAccessIterator>
 constexpr RandomAccessIterator
 partial_sort_copy(InputIterator first, InputIterator last,
 RandomAccessIterator result_first,
 RandomAccessIterator result_last);
template<class ExecutionPolicy, class ForwardIterator, class RandomAccessIterator>
 RandomAccessIterator
 partial_sort_copy(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 RandomAccessIterator result_first,
 RandomAccessIterator result_last);

template<class InputIterator, class RandomAccessIterator,
 class Compare>
 constexpr RandomAccessIterator
 partial_sort_copy(InputIterator first, InputIterator last,
 RandomAccessIterator result_first,
 RandomAccessIterator result_last,
 Compare comp);
template<class ExecutionPolicy, class ForwardIterator, class RandomAccessIterator,
 class Compare>
 RandomAccessIterator
 partial_sort_copy(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 RandomAccessIterator result_first,
 RandomAccessIterator result_last,
 Compare comp);

```

1 *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*result_first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

2 *Effects:* Places the first  $\min(last - first, result\_last - result\_first)$  sorted elements into the range `[result_first, result_first +  $\min(last - first, result\_last - result\_first)$ )`.

3 *Returns:* The smaller of: `result_last` or `result_first + (last - first)`.

4 *Complexity:* Approximately  $(last - first) * \log(\min(last - first, result\_last - result\_first))$  comparisons.

**29.7.1.5 is\_sorted****[is.sorted]**

```
template<class ForwardIterator>
constexpr bool is_sorted(ForwardIterator first, ForwardIterator last);
```

1 *Returns:* `is_sorted_until(first, last) == last`.

```
template<class ExecutionPolicy, class ForwardIterator>
bool is_sorted(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);
```

2 *Returns:* `is_sorted_until(std::forward<ExecutionPolicy>(exec), first, last) == last`.

```
template<class ForwardIterator, class Compare>
constexpr bool is_sorted(ForwardIterator first, ForwardIterator last,
 Compare comp);
```

3 *Returns:* `is_sorted_until(first, last, comp) == last`.

```
template<class ExecutionPolicy, class ForwardIterator, class Compare>
bool is_sorted(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Compare comp);
```

4 *Returns:*

`is_sorted_until(std::forward<ExecutionPolicy>(exec), first, last, comp) == last`

```
template<class ForwardIterator>
constexpr ForwardIterator
is_sorted_until(ForwardIterator first, ForwardIterator last);
```

```
template<class ExecutionPolicy, class ForwardIterator>
ForwardIterator
is_sorted_until(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);
```

```
template<class ForwardIterator, class Compare>
constexpr ForwardIterator
is_sorted_until(ForwardIterator first, ForwardIterator last,
 Compare comp);
```

```
template<class ExecutionPolicy, class ForwardIterator, class Compare>
ForwardIterator
is_sorted_until(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Compare comp);
```

5 *Returns:* If  $(last - first) < 2$ , returns `last`. Otherwise, returns the last iterator `i` in `[first, last]` for which the range `[first, i)` is sorted.

6 *Complexity:* Linear.

**29.7.2 Nth element****[alg.nth.element]**

```
template<class RandomAccessIterator>
constexpr void nth_element(RandomAccessIterator first, RandomAccessIterator nth,
 RandomAccessIterator last);
```

```
template<class ExecutionPolicy, class RandomAccessIterator>
void nth_element(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator nth,
 RandomAccessIterator last);
```

```
template<class RandomAccessIterator, class Compare>
constexpr void nth_element(RandomAccessIterator first, RandomAccessIterator nth,
 RandomAccessIterator last, Compare comp);
```

```
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
void nth_element(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator nth,
```

```
RandomAccessIterator last, Compare comp);
```

<sup>1</sup> *Requires:* RandomAccessIterator shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of \*first shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

<sup>2</sup> *Effects:* After nth\_element the element in the position pointed to by nth is the element that would be in that position if the whole range were sorted, unless nth == last. Also for every iterator i in the range [first, nth) and every iterator j in the range [nth, last) it holds that: !(\*j < \*i) or comp(\*j, \*i) == false.

<sup>3</sup> *Complexity:* For the overloads with no ExecutionPolicy, linear on average. For the overloads with an ExecutionPolicy,  $\mathcal{O}(N)$  applications of the predicate, and  $\mathcal{O}(N \log N)$  swaps, where  $N = \text{last} - \text{first}$ .

### 29.7.3 Binary search

[alg.binary.search]

<sup>1</sup> All of the algorithms in this subclause are versions of binary search and assume that the sequence being searched is partitioned with respect to an expression formed by binding the search key to an argument of the implied or explicit comparison function. They work on non-random access iterators minimizing the number of comparisons, which will be logarithmic for all types of iterators. They are especially appropriate for random access iterators, because these algorithms do a logarithmic number of steps through the data structure. For non-random access iterators they execute a linear number of steps.

#### 29.7.3.1 lower\_bound

[lower.bound]

```
template<class ForwardIterator, class T>
constexpr ForwardIterator
 lower_bound(ForwardIterator first, ForwardIterator last,
 const T& value);
```

```
template<class ForwardIterator, class T, class Compare>
constexpr ForwardIterator
 lower_bound(ForwardIterator first, ForwardIterator last,
 const T& value, Compare comp);
```

<sup>1</sup> *Requires:* The elements e of [first, last) shall be partitioned with respect to the expression e < value or comp(e, value).

<sup>2</sup> *Returns:* The furthestmost iterator i in the range [first, last] such that for every iterator j in the range [first, i) the following corresponding conditions hold: \*j < value or comp(\*j, value) != false.

<sup>3</sup> *Complexity:* At most  $\log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  comparisons.

#### 29.7.3.2 upper\_bound

[upper.bound]

```
template<class ForwardIterator, class T>
constexpr ForwardIterator
 upper_bound(ForwardIterator first, ForwardIterator last,
 const T& value);
```

```
template<class ForwardIterator, class T, class Compare>
constexpr ForwardIterator
 upper_bound(ForwardIterator first, ForwardIterator last,
 const T& value, Compare comp);
```

<sup>1</sup> *Requires:* The elements e of [first, last) shall be partitioned with respect to the expression !(value < e) or !comp(value, e).

<sup>2</sup> *Returns:* The furthestmost iterator i in the range [first, last] such that for every iterator j in the range [first, i) the following corresponding conditions hold: !(value < \*j) or comp(value, \*j) == false.

<sup>3</sup> *Complexity:* At most  $\log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  comparisons.



**29.7.3.3 equal\_range****[equal.range]**

```
template<class ForwardIterator, class T>
constexpr pair<ForwardIterator, ForwardIterator>
equal_range(ForwardIterator first,
 ForwardIterator last, const T& value);
```

```
template<class ForwardIterator, class T, class Compare>
constexpr pair<ForwardIterator, ForwardIterator>
equal_range(ForwardIterator first,
 ForwardIterator last, const T& value,
 Compare comp);
```

1 *Requires:* The elements *e* of `[first, last)` shall be partitioned with respect to the expressions `e < value` and `!(value < e)` or `comp(e, value)` and `!comp(value, e)`. Also, for all elements *e* of `[first, last)`, `e < value` shall imply `!(value < e)` or `comp(e, value)` shall imply `!comp(value, e)`.

2 *Returns:*

```
make_pair(lower_bound(first, last, value),
 upper_bound(first, last, value))
```

or

```
make_pair(lower_bound(first, last, value, comp),
 upper_bound(first, last, value, comp))
```

3 *Complexity:* At most  $2 * \log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  comparisons.

**29.7.3.4 binary\_search****[binary.search]**

```
template<class ForwardIterator, class T>
constexpr bool
binary_search(ForwardIterator first, ForwardIterator last,
 const T& value);
```

```
template<class ForwardIterator, class T, class Compare>
constexpr bool
binary_search(ForwardIterator first, ForwardIterator last,
 const T& value, Compare comp);
```

1 *Requires:* The elements *e* of `[first, last)` shall be partitioned with respect to the expressions `e < value` and `!(value < e)` or `comp(e, value)` and `!comp(value, e)`. Also, for all elements *e* of `[first, last)`, `e < value` shall imply `!(value < e)` or `comp(e, value)` shall imply `!comp(value, e)`.

2 *Returns:* `true` if there is an iterator *i* in the range `[first, last)` that satisfies the corresponding conditions: `!(*i < value) && !(value < *i)` or `comp(*i, value) == false && comp(value, *i) == false`.

3 *Complexity:* At most  $\log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  comparisons.

**29.7.4 Partitions****[alg.partitions]**

```
template<class InputIterator, class Predicate>
constexpr bool is_partitioned(InputIterator first, InputIterator last, Predicate pred);
```

```
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
bool is_partitioned(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last, Predicate pred);
```

1 *Requires:* For the overload with no `ExecutionPolicy`, `InputIterator`'s value type shall be convertible to `Predicate`'s argument type. For the overload with an `ExecutionPolicy`, `ForwardIterator`'s value type shall be convertible to `Predicate`'s argument type.

2 *Returns:* `true` if `[first, last)` is empty or if the elements *e* of `[first, last)` are partitioned with respect to the expression `pred(e)`.

3 *Complexity:* Linear. At most `last - first` applications of `pred`.

```

template<class ForwardIterator, class Predicate>
constexpr ForwardIterator
partition(ForwardIterator first, ForwardIterator last, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class Predicate>
ForwardIterator
partition(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last, Predicate pred);

```

4 *Requires:* ForwardIterator shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2).

5 *Effects:* Places all the elements in the range [first, last) that satisfy pred before all the elements that do not satisfy it.

6 *Returns:* An iterator i such that for every iterator j in the range [first, i) pred(\*j) != false, and for every iterator k in the range [i, last), pred(\*k) == false.

7 *Complexity:* Let  $N = \text{last} - \text{first}$ :

(7.1) — For the overload with no ExecutionPolicy, exactly  $N$  applications of the predicate. At most  $N/2$  swaps if ForwardIterator meets the *Cpp17BidirectionalIterator* requirements and at most  $N$  swaps otherwise.

(7.2) — For the overload with an ExecutionPolicy,  $\mathcal{O}(N \log N)$  swaps and  $\mathcal{O}(N)$  applications of the predicate.

```

template<class BidirectionalIterator, class Predicate>
BidirectionalIterator
stable_partition(BidirectionalIterator first, BidirectionalIterator last, Predicate pred);
template<class ExecutionPolicy, class BidirectionalIterator, class Predicate>
BidirectionalIterator
stable_partition(ExecutionPolicy&& exec,
 BidirectionalIterator first, BidirectionalIterator last, Predicate pred);

```

8 *Requires:* BidirectionalIterator shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of \*first shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

9 *Effects:* Places all the elements in the range [first, last) that satisfy pred before all the elements that do not satisfy it.

10 *Returns:* An iterator i such that for every iterator j in the range [first, i), pred(\*j) != false, and for every iterator k in the range [i, last), pred(\*k) == false. The relative order of the elements in both groups is preserved.

11 *Complexity:* Let  $N = \text{last} - \text{first}$ :

(11.1) — For the overload with no ExecutionPolicy, at most  $N \log N$  swaps, but only  $\mathcal{O}(N)$  swaps if there is enough extra memory. Exactly  $N$  applications of the predicate.

(11.2) — For the overload with an ExecutionPolicy,  $\mathcal{O}(N \log N)$  swaps and  $\mathcal{O}(N)$  applications of the predicate.

```

template<class InputIterator, class OutputIterator1,
 class OutputIterator2, class Predicate>
constexpr pair<OutputIterator1, OutputIterator2>
partition_copy(InputIterator first, InputIterator last,
 OutputIterator1 out_true, OutputIterator2 out_false, Predicate pred);
template<class ExecutionPolicy, class ForwardIterator, class ForwardIterator1,
 class ForwardIterator2, class Predicate>
pair<ForwardIterator1, ForwardIterator2>
partition_copy(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 ForwardIterator1 out_true, ForwardIterator2 out_false, Predicate pred);

```

12 *Requires:*

(12.1) — For the overload with no ExecutionPolicy, InputIterator's value type shall be *Cpp17CopyAssignable* (Table 28), and shall be writable (28.2.1) to the out\_true and out\_false OutputIterators, and shall be convertible to Predicate's argument type.

(12.2) — For the overload with an `ExecutionPolicy`, `ForwardIterator`'s value type shall be *Cpp17Copy-Assignable*, and shall be writable to the `out_true` and `out_false` `ForwardIterators`, and shall be convertible to `Predicate`'s argument type. [Note: There may be a performance cost if `ForwardIterator`'s value type is not *Cpp17CopyConstructible*. — end note]

(12.3) — For both overloads, the input range shall not overlap with either of the output ranges.

13 *Effects:* For each iterator `i` in `[first, last)`, copies `*i` to the output range beginning with `out_true` if `pred(*i)` is true, or to the output range beginning with `out_false` otherwise.

14 *Returns:* A pair `p` such that `p.first` is the end of the output range beginning at `out_true` and `p.second` is the end of the output range beginning at `out_false`.

15 *Complexity:* Exactly `last - first` applications of `pred`.

```
template<class ForwardIterator, class Predicate>
constexpr ForwardIterator
partition_point(ForwardIterator first, ForwardIterator last, Predicate pred);
```

16 *Requires:* `ForwardIterator`'s value type shall be convertible to `Predicate`'s argument type. The elements `e` of `[first, last)` shall be partitioned with respect to the expression `pred(e)`.

17 *Returns:* An iterator `mid` such that `all_of(first, mid, pred)` and `none_of(mid, last, pred)` are both true.

18 *Complexity:*  $\mathcal{O}(\log(\text{last} - \text{first}))$  applications of `pred`.

## 29.7.5 Merge

[alg.merge]

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator>
constexpr OutputIterator
merge(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator>
ForwardIterator
merge(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result);
```

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator, class Compare>
constexpr OutputIterator
merge(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result, Compare comp);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator, class Compare>
ForwardIterator
merge(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result, Compare comp);
```

1 *Requires:* The ranges `[first1, last1)` and `[first2, last2)` shall be sorted with respect to `operator<` or `comp`. The resulting range shall not overlap with either of the original ranges.

2 *Effects:* Copies all the elements of the two ranges `[first1, last1)` and `[first2, last2)` into the range `[result, result_last)`, where `result_last` is `result + (last1 - first1) + (last2 - first2)`, such that the resulting range satisfies `is_sorted(result, result_last)` or `is_sorted(result, result_last, comp)`, respectively.

3 *Returns:* `result + (last1 - first1) + (last2 - first2)`.

4 *Complexity:* Let  $N = (\text{last1} - \text{first1}) + (\text{last2} - \text{first2})$ :

(4.1) — For the overloads with no `ExecutionPolicy`, at most  $N - 1$  comparisons.

(4.2) — For the overloads with an `ExecutionPolicy`,  $\mathcal{O}(N)$  comparisons.

5 *Remarks:* Stable (20.5.5.7).

```
template<class BidirectionalIterator>
 void inplace_merge(BidirectionalIterator first,
 BidirectionalIterator middle,
 BidirectionalIterator last);
template<class ExecutionPolicy, class BidirectionalIterator>
 void inplace_merge(ExecutionPolicy&& exec,
 BidirectionalIterator first,
 BidirectionalIterator middle,
 BidirectionalIterator last);

template<class BidirectionalIterator, class Compare>
 void inplace_merge(BidirectionalIterator first,
 BidirectionalIterator middle,
 BidirectionalIterator last, Compare comp);
template<class ExecutionPolicy, class BidirectionalIterator, class Compare>
 void inplace_merge(ExecutionPolicy&& exec,
 BidirectionalIterator first,
 BidirectionalIterator middle,
 BidirectionalIterator last, Compare comp);
```

6 *Requires:* The ranges `[first, middle)` and `[middle, last)` shall be sorted with respect to `operator<` or `comp`. `BidirectionalIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

7 *Effects:* Merges two sorted consecutive ranges `[first, middle)` and `[middle, last)`, putting the result of the merge into the range `[first, last)`. The resulting range will be in non-decreasing order; that is, for every iterator `i` in `[first, last)` other than `first`, the condition `*i < *(i - 1)` or, respectively, `comp(*i, *(i - 1))` will be false.

8 *Complexity:* Let  $N = \text{last} - \text{first}$ :

(8.1) — For the overloads with no `ExecutionPolicy`, if enough additional memory is available, exactly  $N - 1$  comparisons.

(8.2) — For the overloads with no `ExecutionPolicy` if no additional memory is available,  $\mathcal{O}(N \log N)$  comparisons.

(8.3) — For the overloads with an `ExecutionPolicy`,  $\mathcal{O}(N \log N)$  comparisons.

9 *Remarks:* Stable (20.5.5.7).

## 29.7.6 Set operations on sorted structures

[alg.set.operations]

1 This subclause defines all the basic set operations on sorted structures. They also work with `multisets` (27.4.7) containing multiple copies of equivalent elements. The semantics of the set operations are generalized to `multisets` in a standard way by defining `set_union()` to contain the maximum number of occurrences of every element, `set_intersection()` to contain the minimum, and so on.

### 29.7.6.1 includes

[includes]

```
template<class InputIterator1, class InputIterator2>
 constexpr bool includes(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
 bool includes(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2);

template<class InputIterator1, class InputIterator2, class Compare>
 constexpr bool includes(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 Compare comp);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class Compare>
bool includes(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 Compare comp);
```

<sup>1</sup> *Returns:* true if [first2, last2) is empty or if every element in the range [first2, last2) is contained in the range [first1, last1). Returns false otherwise.

<sup>2</sup> *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  comparisons.

### 29.7.6.2 set\_union

[set.union]

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator>
constexpr OutputIterator
set_union(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator>
ForwardIterator
set_union(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result);
```

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator, class Compare>
constexpr OutputIterator
set_union(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator, class Compare>
ForwardIterator
set_union(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result, Compare comp);
```

<sup>1</sup> *Requires:* The resulting range shall not overlap with either of the original ranges.

<sup>2</sup> *Effects:* Constructs a sorted union of the elements from the two ranges; that is, the set of elements that are present in one or both of the ranges.

<sup>3</sup> *Returns:* The end of the constructed range.

<sup>4</sup> *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  comparisons.

<sup>5</sup> *Remarks:* If [first1, last1) contains  $m$  elements that are equivalent to each other and [first2, last2) contains  $n$  elements that are equivalent to them, then all  $m$  elements from the first range shall be copied to the output range, in order, and then  $\max(n - m, 0)$  elements from the second range shall be copied to the output range, in order.

### 29.7.6.3 set\_intersection

[set.intersection]

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator>
constexpr OutputIterator
set_intersection(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator>
ForwardIterator
set_intersection(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
```

```

 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result);

template<class InputIterator1, class InputIterator2,
 class OutputIterator, class Compare>
constexpr OutputIterator
 set_intersection(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator, class Compare>
ForwardIterator
 set_intersection(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result, Compare comp);

```

1 *Requires:* The resulting range shall not overlap with either of the original ranges.

2 *Effects:* Constructs a sorted intersection of the elements from the two ranges; that is, the set of elements that are present in both of the ranges.

3 *Returns:* The end of the constructed range.

4 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  comparisons.

5 *Remarks:* If `[first1, last1)` contains  $m$  elements that are equivalent to each other and `[first2, last2)` contains  $n$  elements that are equivalent to them, the first  $\min(m, n)$  elements shall be copied from the first range to the output range, in order.

#### 29.7.6.4 set\_difference

[set.difference]

```

template<class InputIterator1, class InputIterator2,
 class OutputIterator>
constexpr OutputIterator
 set_difference(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator>
ForwardIterator
 set_difference(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result);

template<class InputIterator1, class InputIterator2,
 class OutputIterator, class Compare>
constexpr OutputIterator
 set_difference(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator, class Compare>
ForwardIterator
 set_difference(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result, Compare comp);

```

1 *Requires:* The resulting range shall not overlap with either of the original ranges.

2 *Effects:* Copies the elements of the range `[first1, last1)` which are not present in the range `[first2, last2)` to the range beginning at `result`. The elements in the constructed range are sorted.

3 *Returns:* The end of the constructed range.

4 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  comparisons.

- 5 *Remarks:* If `[first1, last1)` contains  $m$  elements that are equivalent to each other and `[first2, last2)` contains  $n$  elements that are equivalent to them, the last  $\max(m - n, 0)$  elements from `[first1, last1)` shall be copied to the output range.

### 29.7.6.5 `set_symmetric_difference` [set.symmetric.difference]

```
template<class InputIterator1, class InputIterator2,
 class OutputIterator>
constexpr OutputIterator
 set_symmetric_difference(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator>
ForwardIterator
 set_symmetric_difference(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result);

template<class InputIterator1, class InputIterator2,
 class OutputIterator, class Compare>
constexpr OutputIterator
 set_symmetric_difference(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 OutputIterator result, Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
 class ForwardIterator, class Compare>
ForwardIterator
 set_symmetric_difference(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 ForwardIterator result, Compare comp);
```

- 1 *Requires:* The resulting range shall not overlap with either of the original ranges.
- 2 *Effects:* Copies the elements of the range `[first1, last1)` that are not present in the range `[first2, last2)`, and the elements of the range `[first2, last2)` that are not present in the range `[first1, last1)` to the range beginning at `result`. The elements in the constructed range are sorted.
- 3 *Returns:* The end of the constructed range.
- 4 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  comparisons.
- 5 *Remarks:* If `[first1, last1)` contains  $m$  elements that are equivalent to each other and `[first2, last2)` contains  $n$  elements that are equivalent to them, then  $|m - n|$  of those elements shall be copied to the output range: the last  $m - n$  of these elements from `[first1, last1)` if  $m > n$ , and the last  $n - m$  of these elements from `[first2, last2)` if  $m < n$ .

## 29.7.7 Heap operations [alg.heap.operations]

- 1 A *heap* is a particular organization of elements in a range between two random access iterators `[a, b)` such that:
- (1.1) — With  $N = b - a$ , for all  $i$ ,  $0 < i < N$ , `comp(a[ $\lfloor \frac{i-1}{2} \rfloor$ ], a[i])` is false.
- (1.2) — `*a` may be removed by `pop_heap()`, or a new element added by `push_heap()`, in  $\mathcal{O}(\log N)$  time.
- 2 These properties make heaps useful as priority queues.
- 3 `make_heap()` converts a range into a heap and `sort_heap()` turns a heap into a sorted sequence.

### 29.7.7.1 `push_heap` [push.heap]

```
template<class RandomAccessIterator>
constexpr void push_heap(RandomAccessIterator first, RandomAccessIterator last);
```

```
template<class RandomAccessIterator, class Compare>
constexpr void push_heap(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

1 *Requires:* The range `[first, last - 1)` shall be a valid heap. The type of `*first` shall satisfy the *Cpp17MoveConstructible* requirements (Table 25) and the *Cpp17MoveAssignable* requirements (Table 27).

2 *Effects:* Places the value in the location `last - 1` into the resulting heap `[first, last)`.

3 *Complexity:* At most  $\log(\text{last} - \text{first})$  comparisons.

### 29.7.7.2 pop\_heap

[pop.heap]

```
template<class RandomAccessIterator>
constexpr void pop_heap(RandomAccessIterator first, RandomAccessIterator last);
```

```
template<class RandomAccessIterator, class Compare>
constexpr void pop_heap(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

1 *Requires:* The range `[first, last)` shall be a valid non-empty heap. `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

2 *Effects:* Swaps the value in the location `first` with the value in the location `last - 1` and makes `[first, last - 1)` into a heap.

3 *Complexity:* At most  $2 \log(\text{last} - \text{first})$  comparisons.

### 29.7.7.3 make\_heap

[make.heap]

```
template<class RandomAccessIterator>
constexpr void make_heap(RandomAccessIterator first, RandomAccessIterator last);
```

```
template<class RandomAccessIterator, class Compare>
constexpr void make_heap(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

1 *Requires:* The type of `*first` shall satisfy the *Cpp17MoveConstructible* requirements (Table 25) and the *Cpp17MoveAssignable* requirements (Table 27).

2 *Effects:* Constructs a heap out of the range `[first, last)`.

3 *Complexity:* At most  $3(\text{last} - \text{first})$  comparisons.

### 29.7.7.4 sort\_heap

[sort.heap]

```
template<class RandomAccessIterator>
constexpr void sort_heap(RandomAccessIterator first, RandomAccessIterator last);
```

```
template<class RandomAccessIterator, class Compare>
constexpr void sort_heap(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
```

1 *Requires:* The range `[first, last)` shall be a valid heap. `RandomAccessIterator` shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2). The type of `*first` shall satisfy the *Cpp17MoveConstructible* (Table 25) and *Cpp17MoveAssignable* (Table 27) requirements.

2 *Effects:* Sorts elements in the heap `[first, last)`.

3 *Complexity:* At most  $2N \log N$  comparisons, where  $N = \text{last} - \text{first}$ .

### 29.7.7.5 is\_heap

[is.heap]

```
template<class RandomAccessIterator>
constexpr bool is_heap(RandomAccessIterator first, RandomAccessIterator last);
```

1 *Returns:* `is_heap_until(first, last) == last`.



```

template<class ExecutionPolicy, class RandomAccessIterator>
 bool is_heap(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last);
2 Returns: is_heap_until(std::forward<ExecutionPolicy>(exec), first, last) == last.

template<class RandomAccessIterator, class Compare>
 constexpr bool is_heap(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
3 Returns: is_heap_until(first, last, comp) == last.

template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
 bool is_heap(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
4 Returns:
 is_heap_until(std::forward<ExecutionPolicy>(exec), first, last, comp) == last

template<class RandomAccessIterator>
 constexpr RandomAccessIterator
 is_heap_until(RandomAccessIterator first, RandomAccessIterator last);
template<class ExecutionPolicy, class RandomAccessIterator>
 RandomAccessIterator
 is_heap_until(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last);

template<class RandomAccessIterator, class Compare>
 constexpr RandomAccessIterator
 is_heap_until(RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
template<class ExecutionPolicy, class RandomAccessIterator, class Compare>
 RandomAccessIterator
 is_heap_until(ExecutionPolicy&& exec,
 RandomAccessIterator first, RandomAccessIterator last,
 Compare comp);
5 Returns: If (last - first) < 2, returns last. Otherwise, returns the last iterator i in [first,
 last] for which the range [first, i) is a heap.
6 Complexity: Linear.

```

## 29.7.8 Minimum and maximum

[alg.min.max]

```

template<class T> constexpr const T& min(const T& a, const T& b);
template<class T, class Compare>
 constexpr const T& min(const T& a, const T& b, Compare comp);
1 Requires: For the first form, type T shall be Cpp17LessThanComparable (Table 23).
2 Returns: The smaller value.
3 Remarks: Returns the first argument when the arguments are equivalent.
4 Complexity: Exactly one comparison.

template<class T>
 constexpr T min(initializer_list<T> t);
template<class T, class Compare>
 constexpr T min(initializer_list<T> t, Compare comp);
5 Requires: T shall be Cpp17CopyConstructible and t.size() > 0. For the first form, type T shall be
 Cpp17LessThanComparable.
6 Returns: The smallest value in the initializer list.
7 Remarks: Returns a copy of the leftmost argument when several arguments are equivalent to the
 smallest.
8 Complexity: Exactly t.size() - 1 comparisons.

```

```
template<class T> constexpr const T& max(const T& a, const T& b);
template<class T, class Compare>
 constexpr const T& max(const T& a, const T& b, Compare comp);
```

9       *Requires:* For the first form, type T shall be *Cpp17LessThanComparable* (Table 23).

10       *Returns:* The larger value.

11       *Remarks:* Returns the first argument when the arguments are equivalent.

12       *Complexity:* Exactly one comparison.

```
template<class T>
 constexpr T max(initializer_list<T> t);
template<class T, class Compare>
 constexpr T max(initializer_list<T> t, Compare comp);
```

13       *Requires:* T shall be *Cpp17CopyConstructible* and `t.size() > 0`. For the first form, type T shall be *Cpp17LessThanComparable*.

14       *Returns:* The largest value in the initializer list.

15       *Remarks:* Returns a copy of the leftmost argument when several arguments are equivalent to the largest.

16       *Complexity:* Exactly `t.size() - 1` comparisons.

```
template<class T> constexpr pair<const T&, const T&> minmax(const T& a, const T& b);
template<class T, class Compare>
 constexpr pair<const T&, const T&> minmax(const T& a, const T& b, Compare comp);
```

17       *Requires:* For the first form, type T shall be *Cpp17LessThanComparable* (Table 23).

18       *Returns:* `pair<const T&, const T&>(b, a)` if b is smaller than a, and `pair<const T&, const T&>(a, b)` otherwise.

19       *Remarks:* Returns `pair<const T&, const T&>(a, b)` when the arguments are equivalent.

20       *Complexity:* Exactly one comparison.

```
template<class T>
 constexpr pair<T, T> minmax(initializer_list<T> t);
template<class T, class Compare>
 constexpr pair<T, T> minmax(initializer_list<T> t, Compare comp);
```

21       *Requires:* T shall be *Cpp17CopyConstructible* and `t.size() > 0`. For the first form, type T shall be *Cpp17LessThanComparable*.

22       *Returns:* `pair<T, T>(x, y)`, where x has the smallest and y has the largest value in the initializer list.

23       *Remarks:* x is a copy of the leftmost argument when several arguments are equivalent to the smallest. y is a copy of the rightmost argument when several arguments are equivalent to the largest.

24       *Complexity:* At most  $(3/2)t.size()$  applications of the corresponding predicate.

```
template<class ForwardIterator>
 constexpr ForwardIterator min_element(ForwardIterator first, ForwardIterator last);
```

```
template<class ExecutionPolicy, class ForwardIterator>
 ForwardIterator min_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);
```

```
template<class ForwardIterator, class Compare>
 constexpr ForwardIterator min_element(ForwardIterator first, ForwardIterator last,
 Compare comp);
```

```
template<class ExecutionPolicy, class ForwardIterator, class Compare>
 ForwardIterator min_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Compare comp);
```

25       *Returns:* The first iterator i in the range `[first, last)` such that for every iterator j in the range `[first, last)` the following corresponding conditions hold: `!(*j < *i)` or `comp(*j, *i) == false`. Returns last if `first == last`.

26 *Complexity:* Exactly  $\max(\text{last} - \text{first} - 1, 0)$  applications of the corresponding comparisons.

```
template<class ForwardIterator>
 constexpr ForwardIterator max_element(ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
 ForwardIterator max_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);

template<class ForwardIterator, class Compare>
 constexpr ForwardIterator max_element(ForwardIterator first, ForwardIterator last,
 Compare comp);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
 ForwardIterator max_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last,
 Compare comp);
```

27 *Returns:* The first iterator *i* in the range  $[\text{first}, \text{last})$  such that for every iterator *j* in the range  $[\text{first}, \text{last})$  the following corresponding conditions hold:  $!( *i < *j )$  or  $\text{comp}( *i, *j ) == \text{false}$ . Returns *last* if  $\text{first} == \text{last}$ .

28 *Complexity:* Exactly  $\max(\text{last} - \text{first} - 1, 0)$  applications of the corresponding comparisons.

```
template<class ForwardIterator>
 constexpr pair<ForwardIterator, ForwardIterator>
 minmax_element(ForwardIterator first, ForwardIterator last);
template<class ExecutionPolicy, class ForwardIterator>
 pair<ForwardIterator, ForwardIterator>
 minmax_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last);

template<class ForwardIterator, class Compare>
 constexpr pair<ForwardIterator, ForwardIterator>
 minmax_element(ForwardIterator first, ForwardIterator last, Compare comp);
template<class ExecutionPolicy, class ForwardIterator, class Compare>
 pair<ForwardIterator, ForwardIterator>
 minmax_element(ExecutionPolicy&& exec,
 ForwardIterator first, ForwardIterator last, Compare comp);
```

29 *Returns:*  $\text{make\_pair}(\text{first}, \text{first})$  if  $[\text{first}, \text{last})$  is empty, otherwise  $\text{make\_pair}(m, M)$ , where *m* is the first iterator in  $[\text{first}, \text{last})$  such that no iterator in the range refers to a smaller element, and where *M* is the last iterator<sup>268</sup> in  $[\text{first}, \text{last})$  such that no iterator in the range refers to a larger element.

30 *Complexity:* At most  $\max(\lfloor \frac{3}{2}(N - 1) \rfloor, 0)$  applications of the corresponding predicate, where *N* is  $\text{last} - \text{first}$ .

### 29.7.9 Bounded value

[alg.clamp]

```
template<class T>
 constexpr const T& clamp(const T& v, const T& lo, const T& hi);
template<class T, class Compare>
 constexpr const T& clamp(const T& v, const T& lo, const T& hi, Compare comp);
```

1 *Requires:* The value of *lo* shall be no greater than *hi*. For the first form, type *T* shall be *Cpp17LessThanComparable* (Table 23).

2 *Returns:* *lo* if *v* is less than *lo*, *hi* if *hi* is less than *v*, otherwise *v*.

3 [Note: If NaN is avoided, *T* can be a floating-point type. — end note]

4 *Complexity:* At most two comparisons.

### 29.7.10 Lexicographical comparison

[alg.lex.comparison]

```
template<class InputIterator1, class InputIterator2>
 constexpr bool
```

---

268) This behavior intentionally differs from `max_element()`.

```

lexicographical_compare(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
bool
lexicographical_compare(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2);

template<class InputIterator1, class InputIterator2, class Compare>
constexpr bool
lexicographical_compare(InputIterator1 first1, InputIterator1 last1,
 InputIterator2 first2, InputIterator2 last2,
 Compare comp);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
class Compare>
bool
lexicographical_compare(ExecutionPolicy&& exec,
 ForwardIterator1 first1, ForwardIterator1 last1,
 ForwardIterator2 first2, ForwardIterator2 last2,
 Compare comp);

```

1 *Returns:* true if the sequence of elements defined by the range [first1, last1) is lexicographically less than the sequence of elements defined by the range [first2, last2) and false otherwise.

2 *Complexity:* At most 2min(last1 - first1, last2 - first2) applications of the corresponding comparison.

3 *Remarks:* If two sequences have the same number of elements and their corresponding elements (if any) are equivalent, then neither sequence is lexicographically less than the other. If one sequence is a prefix of the other, then the shorter sequence is lexicographically less than the longer sequence. Otherwise, the lexicographical comparison of the sequences yields the same result as the comparison of the first corresponding pair of elements that are not equivalent.

4 *[Example:* The following sample implementation satisfies these requirements:

```

for (; first1 != last1 && first2 != last2 ; ++first1, (void) ++first2) {
 if (*first1 < *first2) return true;
 if (*first2 < *first1) return false;
}
return first1 == last1 && first2 != last2;

```

— end example]

5 *[Note:* An empty sequence is lexicographically less than any non-empty sequence, but not less than any empty sequence. — end note]

### 29.7.11 Three-way comparison algorithms

[alg.3way]

```

template<class T, class U> constexpr auto compare_3way(const T& a, const U& b);

```

1 *Effects:* Compares two values and produces a result of the strongest applicable comparison category type:

- (1.1) — Returns a <=> b if that expression is well-formed.
- (1.2) — Otherwise, if the expressions a == b and a < b are each well-formed and convertible to bool, returns strong\_ordering::equal when a == b is true, otherwise returns strong\_ordering::less when a < b is true, and otherwise returns strong\_ordering::greater.
- (1.3) — Otherwise, if the expression a == b is well-formed and convertible to bool, returns strong\_equality::equal when a == b is true, and otherwise returns strong\_equality::nonequal.
- (1.4) — Otherwise, the function is defined as deleted.

```

template<class InputIterator1, class InputIterator2, class Cmp>
constexpr auto
lexicographical_compare_3way(InputIterator1 b1, InputIterator1 e1,
 InputIterator2 b2, InputIterator2 e2,
 Cmp comp)

```

```
-> common_comparison_category_t<decltype(comp(*b1, *b2)), strong_ordering>;
```

2 *Requires:* Cmp shall be a function object type whose return type is a comparison category type.

3 *Effects:* Lexicographically compares two ranges and produces a result of the strongest applicable comparison category type. Equivalent to:

```
for (; b1 != e1 && b2 != e2; void(++b1), void(++b2))
 if (auto cmp = comp(*b1,*b2); cmp != 0)
 return cmp;
return b1 != e1 ? strong_ordering::greater :
 b2 != e2 ? strong_ordering::less :
 strong_ordering::equal;
```

```
template<class InputIterator1, class InputIterator2>
constexpr auto
lexicographical_compare_3way(InputIterator1 b1, InputIterator1 e1,
 InputIterator2 b2, InputIterator2 e2);
```

4 *Effects:* Equivalent to:

```
return lexicographical_compare_3way(b1, e1, b2, e2,
 [](const auto& t, const auto& u) {
 return compare_3way(t, u);
 });
```

### 29.7.12 Permutation generators

[alg.permutation.generators]

```
template<class BidirectionalIterator>
constexpr bool next_permutation(BidirectionalIterator first,
 BidirectionalIterator last);
```

```
template<class BidirectionalIterator, class Compare>
constexpr bool next_permutation(BidirectionalIterator first,
 BidirectionalIterator last, Compare comp);
```

1 *Requires:* BidirectionalIterator shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2).

2 *Effects:* Takes a sequence defined by the range [first, last) and transforms it into the next permutation. The next permutation is found by assuming that the set of all permutations is lexicographically sorted with respect to operator< or comp.

3 *Returns:* true if such a permutation exists. Otherwise, it transforms the sequence into the smallest permutation, that is, the ascendingly sorted one, and returns false.

4 *Complexity:* At most (last - first) / 2 swaps.

```
template<class BidirectionalIterator>
constexpr bool prev_permutation(BidirectionalIterator first,
 BidirectionalIterator last);
```

```
template<class BidirectionalIterator, class Compare>
constexpr bool prev_permutation(BidirectionalIterator first,
 BidirectionalIterator last, Compare comp);
```

5 *Requires:* BidirectionalIterator shall satisfy the *Cpp17ValueSwappable* requirements (20.5.3.2).

6 *Effects:* Takes a sequence defined by the range [first, last) and transforms it into the previous permutation. The previous permutation is found by assuming that the set of all permutations is lexicographically sorted with respect to operator< or comp.

7 *Returns:* true if such a permutation exists. Otherwise, it transforms the sequence into the largest permutation, that is, the descendingly sorted one, and returns false.

8 *Complexity:* At most (last - first) / 2 swaps.

### 29.8 C library algorithms

[alg.c.library]

1 [Note: The header <cstdlib> (21.2.2) declares the functions described in this subclause. — end note]

```
void* bsearch(const void* key, const void* base, size_t nmemb, size_t size,
 c-compare-pred* compar);
```

```
void* bsearch(const void* key, const void* base, size_t nmemb, size_t size,
 compare-pred* compar);
void qsort(void* base, size_t nmemb, size_t size, c-compare-pred* compar);
void qsort(void* base, size_t nmemb, size_t size, compare-pred* compar);
```

<sup>2</sup> *Effects:* These functions have the semantics specified in the C standard library.

<sup>3</sup> *Remarks:* The behavior is undefined unless the objects in the array pointed to by `base` are of trivial type.

<sup>4</sup> *Throws:* Any exception thrown by `compar()` (20.5.5.12).

SEE ALSO: ISO C 7.22.5.

## 30 Numerics library

[**numerics**]

### 30.1 General

[**numerics.general**]

- <sup>1</sup> This Clause describes components that C++ programs may use to perform seminumerical operations.
- <sup>2</sup> The following subclauses describe components for complex number types, random number generation, numeric (*n*-at-a-time) arrays, generalized numeric algorithms, and mathematical functions for floating-point types, as summarized in Table 99.

Table 99 — Numerics library summary

| Subclause | Header(s)                                                         |
|-----------|-------------------------------------------------------------------|
| 30.2      | Definitions                                                       |
| 30.3      | Requirements                                                      |
| 30.4      | Floating-point environment <cfenv>                                |
| 30.5      | Complex numbers <complex>                                         |
| 30.6      | Bit manipulation <bit>                                            |
| 30.7      | Random number generation <random>                                 |
| 30.8      | Numeric arrays <valarray>                                         |
| 30.9      | Generalized numeric operations <numeric>                          |
| 30.10     | Mathematical functions for floating-point types <cmath> <cstdlib> |

### 30.2 Definitions

[**numerics.defns**]

- <sup>1</sup> Define *GENERALIZED\_NONCOMMUTATIVE\_SUM*(*op*, *a1*, ..., *aN*) as follows:
  - (1.1) — *a1* when *N* is 1, otherwise
  - (1.2) — *op*(*GENERALIZED\_NONCOMMUTATIVE\_SUM*(*op*, *a1*, ..., *aK*), *GENERALIZED\_NONCOMMUTATIVE\_SUM*(*op*, *aM*, ..., *aN*)) for any *K* where  $1 < K + 1 = M \leq N$ .
- <sup>2</sup> Define *GENERALIZED\_SUM*(*op*, *a1*, ..., *aN*) as *GENERALIZED\_NONCOMMUTATIVE\_SUM*(*op*, *b1*, ..., *bN*), where *b1*, ..., *bN* may be any permutation of *a1*, ..., *aN*.

### 30.3 Numeric type requirements

[**numeric.requirements**]

- <sup>1</sup> The *complex* and *valarray* components are parameterized by the type of information they contain and manipulate. A C++ program shall instantiate these components only with a type *T* that satisfies the following requirements:<sup>269</sup>
  - (1.1) — *T* is not an abstract class (it has no pure virtual member functions);
  - (1.2) — *T* is not a reference type;
  - (1.3) — *T* is not cv-qualified;
  - (1.4) — If *T* is a class, it has a public default constructor;
  - (1.5) — If *T* is a class, it has a public copy constructor with the signature *T::T*(const *T*&);
  - (1.6) — If *T* is a class, it has a public destructor;
  - (1.7) — If *T* is a class, it has a public assignment operator whose signature is either *T& T::operator*=(const *T*&) or *T& T::operator*=(*T*);
  - (1.8) — If *T* is a class, its assignment operator, copy and default constructors, and destructor shall correspond to each other in the following sense:
    - (1.8.1) — Initialization of raw storage using the copy constructor on the value of *T*( ), however obtained, is semantically equivalent to value-initialization of the same raw storage.

<sup>269</sup> In other words, value types. These include arithmetic types, pointers, the library class *complex*, and instantiations of *valarray* for value types.

- (1.8.2) — Initialization of raw storage using the default constructor, followed by assignment, is semantically equivalent to initialization of raw storage using the copy constructor.
- (1.8.3) — Destruction of an object, followed by initialization of its raw storage using the copy constructor, is semantically equivalent to assignment to the original object.

[*Note:* This rule states, in part, that there shall not be any subtle differences in the semantics of initialization versus assignment. This gives an implementation considerable flexibility in how arrays are initialized.

[*Example:* An implementation is allowed to initialize a `valarray` by allocating storage using the `new` operator (which implies a call to the default constructor for each element) and then assigning each element its value. Or the implementation can allocate raw storage and use the copy constructor to initialize each element. — *end example*]

If the distinction between initialization and assignment is important for a class, or if it fails to satisfy any of the other conditions listed above, the programmer should use `vector` (27.3.11) instead of `valarray` for that class. — *end note*]

- (1.9) — If `T` is a class, it does not overload unary operator `&`.
- <sup>2</sup> If any operation on `T` throws an exception the effects are undefined.
- <sup>3</sup> In addition, many member and related functions of `valarray<T>` can be successfully instantiated and will exhibit well-defined behavior if and only if `T` satisfies additional requirements specified for each such member or related function.
- <sup>4</sup> [*Example:* It is valid to instantiate `valarray<complex>`, but `operator>()` will not be successfully instantiated for `valarray<complex>` operands, since `complex` does not have any ordering operators. — *end example*]

## 30.4 The floating-point environment

[cfenv]

### 30.4.1 Header `<cfenv>` synopsis

[cfenv.syn]

```
#define FE_ALL_EXCEPT see below
#define FE_DIVBYZERO see below // optional
#define FE_INEXACT see below // optional
#define FE_INVALID see below // optional
#define FE_OVERFLOW see below // optional
#define FE_UNDERFLOW see below // optional

#define FE_DOWNWARD see below // optional
#define FE_TONEAREST see below // optional
#define FE_TOWARDZERO see below // optional
#define FE_UPWARD see below // optional

#define FE_DFL_ENV see below

namespace std {
 // types
 using fenv_t = object type;
 using fexcept_t = integer type;

 // functions
 int feclearexcept(int except);
 int fegetexceptflag(fexcept_t* pflag, int except);
 int feraiseexcept(int except);
 int fesetexceptflag(const fexcept_t* pflag, int except);
 int fetestexcept(int except);

 int fegetround();
 int fesetround(int mode);

 int fegetenv(fenv_t* penv);
 int feholdexcept(fenv_t* penv);
 int fesetenv(const fenv_t* penv);
 int feupdateenv(const fenv_t* penv);
}
```



- <sup>1</sup> The contents and meaning of the header `<cfenv>` are the same as the C standard library header `<fenv.h>`. [Note: This document does not require an implementation to support the `FENV_ACCESS` pragma; it is implementation-defined (19.6) whether the pragma is supported. As a consequence, it is implementation-defined whether these functions can be used to test floating-point status flags, set floating-point control modes, or run under non-default mode settings. If the pragma is used to enable control over the floating-point environment, this document does not specify the effect on floating-point evaluation in constant expressions. — end note]
- <sup>2</sup> The floating-point environment has thread storage duration (6.6.4.2). The initial state for a thread's floating-point environment is the state of the floating-point environment of the thread that constructs the corresponding thread object (34.3.2) at the time it constructed the object. [Note: That is, the child thread gets the floating-point state of the parent thread at the time of the child's creation. — end note]
- <sup>3</sup> A separate floating-point environment shall be maintained for each thread. Each function accesses the environment corresponding to its calling thread.

SEE ALSO: ISO C 7.6

### 30.5 Complex numbers

[complex.numbers]

- <sup>1</sup> The header `<complex>` defines a class template, and numerous functions for representing and manipulating complex numbers.
- <sup>2</sup> The effect of instantiating the template `complex` for any type other than `float`, `double`, or `long double` is unspecified. The specializations `complex<float>`, `complex<double>`, and `complex<long double>` are literal types (6.7).
- <sup>3</sup> If the result of a function is not mathematically defined or not in the range of representable values for its type, the behavior is undefined.
- <sup>4</sup> If `z` is an lvalue of type `cv complex<T>` then:

- (4.1) — the expression `reinterpret_cast<cv T(&)[2]>(z)` shall be well-formed,
- (4.2) — `reinterpret_cast<cv T(&)[2]>(z)[0]` shall designate the real part of `z`, and
- (4.3) — `reinterpret_cast<cv T(&)[2]>(z)[1]` shall designate the imaginary part of `z`.

Moreover, if `a` is an expression of type `cv complex<T>*` and the expression `a[i]` is well-defined for an integer expression `i`, then:

- (4.4) — `reinterpret_cast<cv T*>(a)[2*i]` shall designate the real part of `a[i]`, and
- (4.5) — `reinterpret_cast<cv T*>(a)[2*i + 1]` shall designate the imaginary part of `a[i]`.

#### 30.5.1 Header `<complex>` synopsis

[complex.syn]

```
namespace std {
 // 30.5.2, class template complex
 template<class T> class complex;

 // 30.5.3, complex specializations
 template<> class complex<float>;
 template<> class complex<double>;
 template<> class complex<long double>;

 // 30.5.6, operators
 template<class T> constexpr complex<T> operator+(const complex<T>&, const complex<T>&);
 template<class T> constexpr complex<T> operator+(const complex<T>&, const T&);
 template<class T> constexpr complex<T> operator+(const T&, const complex<T>&);

 template<class T> constexpr complex<T> operator-(const complex<T>&, const complex<T>&);
 template<class T> constexpr complex<T> operator-(const complex<T>&, const T&);
 template<class T> constexpr complex<T> operator-(const T&, const complex<T>&);

 template<class T> constexpr complex<T> operator*(const complex<T>&, const complex<T>&);
 template<class T> constexpr complex<T> operator*(const complex<T>&, const T&);
 template<class T> constexpr complex<T> operator*(const T&, const complex<T>&);
}
```

```

template<class T> constexpr complex<T> operator/(const complex<T>&, const complex<T>&);
template<class T> constexpr complex<T> operator/(const complex<T>&, const T&);
template<class T> constexpr complex<T> operator/(const T&, const complex<T>&);

template<class T> constexpr complex<T> operator+(const complex<T>&);
template<class T> constexpr complex<T> operator-(const complex<T>&);

template<class T> constexpr bool operator==(const complex<T>&, const complex<T>&);
template<class T> constexpr bool operator==(const complex<T>&, const T&);
template<class T> constexpr bool operator==(const T&, const complex<T>&);

template<class T> constexpr bool operator!=(const complex<T>&, const complex<T>&);
template<class T> constexpr bool operator!=(const complex<T>&, const T&);
template<class T> constexpr bool operator!=(const T&, const complex<T>&);

template<class T, class charT, class traits>
 basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>&, complex<T>&);

template<class T, class charT, class traits>
 basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&, const complex<T>&);

// 30.5.7, values
template<class T> constexpr T real(const complex<T>&);
template<class T> constexpr T imag(const complex<T>&);

template<class T> T abs(const complex<T>&);
template<class T> T arg(const complex<T>&);
template<class T> constexpr T norm(const complex<T>&);

template<class T> constexpr complex<T> conj(const complex<T>&);
template<class T> complex<T> proj(const complex<T>&);
template<class T> complex<T> polar(const T&, const T& = T());

// 30.5.8, transcendentals
template<class T> complex<T> acos(const complex<T>&);
template<class T> complex<T> asin(const complex<T>&);
template<class T> complex<T> atan(const complex<T>&);

template<class T> complex<T> acosh(const complex<T>&);
template<class T> complex<T> asinh(const complex<T>&);
template<class T> complex<T> atanh(const complex<T>&);

template<class T> complex<T> cos (const complex<T>&);
template<class T> complex<T> cosh (const complex<T>&);
template<class T> complex<T> exp (const complex<T>&);
template<class T> complex<T> log (const complex<T>&);
template<class T> complex<T> log10(const complex<T>&);

template<class T> complex<T> pow (const complex<T>&, const T&);
template<class T> complex<T> pow (const complex<T>&, const complex<T>&);
template<class T> complex<T> pow (const T&, const complex<T>&);

template<class T> complex<T> sin (const complex<T>&);
template<class T> complex<T> sinh (const complex<T>&);
template<class T> complex<T> sqrt (const complex<T>&);
template<class T> complex<T> tan (const complex<T>&);
template<class T> complex<T> tanh (const complex<T>&);

// 30.5.10, complex literals
inline namespace literals {
inline namespace complex_literals {
 constexpr complex<long double> operator""il(long double);
 constexpr complex<long double> operator""il(unsigned long long);
 constexpr complex<double> operator""i(long double);

```

```

constexpr complex<double> operator""i(unsigned long long);
constexpr complex<float> operator""if(long double);
constexpr complex<float> operator""if(unsigned long long);
}
}
}

```

### 30.5.2 Class template complex

[complex]

```

namespace std {
 template<class T> class complex {
 public:
 using value_type = T;

 constexpr complex(const T& re = T(), const T& im = T());
 constexpr complex(const complex&);
 template<class X> constexpr complex(const complex<X>&);

 constexpr T real() const;
 constexpr void real(T);
 constexpr T imag() const;
 constexpr void imag(T);

 constexpr complex& operator= (const T&);
 constexpr complex& operator+=(const T&);
 constexpr complex& operator-=(const T&);
 constexpr complex& operator*=(const T&);
 constexpr complex& operator/=(const T&);

 constexpr complex& operator=(const complex&);
 template<class X> constexpr complex& operator= (const complex<X>&);
 template<class X> constexpr complex& operator+=(const complex<X>&);
 template<class X> constexpr complex& operator-=(const complex<X>&);
 template<class X> constexpr complex& operator*=(const complex<X>&);
 template<class X> constexpr complex& operator/=(const complex<X>&);
 };
}

```

- <sup>1</sup> The class `complex` describes an object that can store the Cartesian components, `real()` and `imag()`, of a complex number.

### 30.5.3 complex specializations

[complex.special]

```

namespace std {
 template<> class complex<float> {
 public:
 using value_type = float;

 constexpr complex(float re = 0.0f, float im = 0.0f);
 constexpr complex(const complex<float>&) = default;
 constexpr explicit complex(const complex<double>&);
 constexpr explicit complex(const complex<long double>&);

 constexpr float real() const;
 constexpr void real(float);
 constexpr float imag() const;
 constexpr void imag(float);

 constexpr complex& operator= (float);
 constexpr complex& operator+=(float);
 constexpr complex& operator-=(float);
 constexpr complex& operator*=(float);
 constexpr complex& operator/=(float);
 };
}

```

```

 constexpr complex& operator=(const complex&);
 template<class X> constexpr complex& operator= (const complex<X>&);
 template<class X> constexpr complex& operator+=(const complex<X>&);
 template<class X> constexpr complex& operator-=(const complex<X>&);
 template<class X> constexpr complex& operator*=(const complex<X>&);
 template<class X> constexpr complex& operator/=(const complex<X>&);
};

template<> class complex<double> {
public:
 using value_type = double;

 constexpr complex(double re = 0.0, double im = 0.0);
 constexpr complex(const complex<float>&);
 constexpr complex(const complex<double>&) = default;
 constexpr explicit complex(const complex<long double>&);

 constexpr double real() const;
 constexpr void real(double);
 constexpr double imag() const;
 constexpr void imag(double);

 constexpr complex& operator= (double);
 constexpr complex& operator+=(double);
 constexpr complex& operator-=(double);
 constexpr complex& operator*=(double);
 constexpr complex& operator/=(double);

 constexpr complex& operator=(const complex&);
 template<class X> constexpr complex& operator= (const complex<X>&);
 template<class X> constexpr complex& operator+=(const complex<X>&);
 template<class X> constexpr complex& operator-=(const complex<X>&);
 template<class X> constexpr complex& operator*=(const complex<X>&);
 template<class X> constexpr complex& operator/=(const complex<X>&);
};

template<> class complex<long double> {
public:
 using value_type = long double;

 constexpr complex(long double re = 0.0L, long double im = 0.0L);
 constexpr complex(const complex<float>&);
 constexpr complex(const complex<double>&);
 constexpr complex(const complex<long double>&) = default;

 constexpr long double real() const;
 constexpr void real(long double);
 constexpr long double imag() const;
 constexpr void imag(long double);

 constexpr complex& operator= (long double);
 constexpr complex& operator+=(long double);
 constexpr complex& operator-=(long double);
 constexpr complex& operator*=(long double);
 constexpr complex& operator/=(long double);

 constexpr complex& operator=(const complex&);
 template<class X> constexpr complex& operator= (const complex<X>&);
 template<class X> constexpr complex& operator+=(const complex<X>&);
 template<class X> constexpr complex& operator-=(const complex<X>&);
 template<class X> constexpr complex& operator*=(const complex<X>&);
 template<class X> constexpr complex& operator/=(const complex<X>&);
};
}

```

**30.5.4 complex member functions****[complex.members]**

```
template<class T> constexpr complex(const T& re = T(), const T& im = T());
```

1 *Effects:* Constructs an object of class `complex`.

2 *Ensures:* `real() == re && imag() == im`.

```
constexpr T real() const;
```

3 *Returns:* The value of the real component.

```
constexpr void real(T val);
```

4 *Effects:* Assigns `val` to the real component.

```
constexpr T imag() const;
```

5 *Returns:* The value of the imaginary component.

```
constexpr void imag(T val);
```

6 *Effects:* Assigns `val` to the imaginary component.

**30.5.5 complex member operators****[complex.member.ops]**

```
constexpr complex& operator+=(const T& rhs);
```

1 *Effects:* Adds the scalar value `rhs` to the real part of the complex value `*this` and stores the result in the real part of `*this`, leaving the imaginary part unchanged.

2 *Returns:* `*this`.

```
constexpr complex& operator-=(const T& rhs);
```

3 *Effects:* Subtracts the scalar value `rhs` from the real part of the complex value `*this` and stores the result in the real part of `*this`, leaving the imaginary part unchanged.

4 *Returns:* `*this`.

```
constexpr complex& operator*=(const T& rhs);
```

5 *Effects:* Multiplies the scalar value `rhs` by the complex value `*this` and stores the result in `*this`.

6 *Returns:* `*this`.

```
constexpr complex& operator/=(const T& rhs);
```

7 *Effects:* Divides the scalar value `rhs` into the complex value `*this` and stores the result in `*this`.

8 *Returns:* `*this`.

```
template<class X> constexpr complex& operator+=(const complex<X>& rhs);
```

9 *Effects:* Adds the complex value `rhs` to the complex value `*this` and stores the sum in `*this`.

10 *Returns:* `*this`.

```
template<class X> constexpr complex& operator-=(const complex<X>& rhs);
```

11 *Effects:* Subtracts the complex value `rhs` from the complex value `*this` and stores the difference in `*this`.

12 *Returns:* `*this`.

```
template<class X> constexpr complex& operator*=(const complex<X>& rhs);
```

13 *Effects:* Multiplies the complex value `rhs` by the complex value `*this` and stores the product in `*this`.

14 *Returns:* `*this`.

```
template<class X> constexpr complex& operator/=(const complex<X>& rhs);
```

15 *Effects:* Divides the complex value `rhs` into the complex value `*this` and stores the quotient in `*this`.

16 *Returns:* `*this`.

## 30.5.6 complex non-member operations

[complex.ops]

```
template<class T> constexpr complex<T> operator+(const complex<T>& lhs);
```

1 *Returns:* `complex<T>(lhs)`.

2 *Remarks:* unary operator.

```
template<class T> constexpr complex<T> operator+(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr complex<T> operator+(const complex<T>& lhs, const T& rhs);
template<class T> constexpr complex<T> operator+(const T& lhs, const complex<T>& rhs);
```

3 *Returns:* `complex<T>(lhs) += rhs`.

```
template<class T> constexpr complex<T> operator-(const complex<T>& lhs);
```

4 *Returns:* `complex<T>(-lhs.real(), -lhs.imag())`.

5 *Remarks:* unary operator.

```
template<class T> constexpr complex<T> operator-(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr complex<T> operator-(const complex<T>& lhs, const T& rhs);
template<class T> constexpr complex<T> operator-(const T& lhs, const complex<T>& rhs);
```

6 *Returns:* `complex<T>(lhs) -= rhs`.

```
template<class T> constexpr complex<T> operator*(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr complex<T> operator*(const complex<T>& lhs, const T& rhs);
template<class T> constexpr complex<T> operator*(const T& lhs, const complex<T>& rhs);
```

7 *Returns:* `complex<T>(lhs) *= rhs`.

```
template<class T> constexpr complex<T> operator/(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr complex<T> operator/(const complex<T>& lhs, const T& rhs);
template<class T> constexpr complex<T> operator/(const T& lhs, const complex<T>& rhs);
```

8 *Returns:* `complex<T>(lhs) /= rhs`.

```
template<class T> constexpr bool operator==(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr bool operator==(const complex<T>& lhs, const T& rhs);
template<class T> constexpr bool operator==(const T& lhs, const complex<T>& rhs);
```

9 *Returns:* `lhs.real() == rhs.real() && lhs.imag() == rhs.imag()`.

10 *Remarks:* The imaginary part is assumed to be `T()`, or `0.0`, for the `T` arguments.

```
template<class T> constexpr bool operator!=(const complex<T>& lhs, const complex<T>& rhs);
template<class T> constexpr bool operator!=(const complex<T>& lhs, const T& rhs);
template<class T> constexpr bool operator!=(const T& lhs, const complex<T>& rhs);
```

11 *Returns:* `rhs.real() != lhs.real() || rhs.imag() != lhs.imag()`.

```
template<class T, class charT, class traits>
basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>& is, complex<T>& x);
```

12 *Requires:* The input values shall be convertible to `T`.

13 *Effects:* Extracts a complex number `x` of the form: `u`, `(u)`, or `(u,v)`, where `u` is the real part and `v` is the imaginary part (31.7.4.2).

14 If bad input is encountered, calls `is.setstate(ios_base::failbit)` (which may throw `ios::failure` (31.5.5.4)).

15 *Returns:* `is`.

16 *Remarks:* This extraction is performed as a series of simpler extractions. Therefore, the skipping of whitespace is specified to be the same for each of the simpler extractions.

```
template<class T, class charT, class traits>
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& o, const complex<T>& x);
```

17 *Effects:* Inserts the complex number `x` onto the stream `o` as if it were implemented as follows:

```
basic_ostringstream<charT, traits> s;
s.flags(o.flags());
```

```

 s.imbue(o.getloc());
 s.precision(o.precision());
 s << '(' << x.real() << "," << x.imag() << ')';
 return o << s.str();

```

- 18 [Note: In a locale in which comma is used as a decimal point character, the use of comma as a field separator can be ambiguous. Inserting `showpoint` into the output stream forces all outputs to show an explicit decimal point character; as a result, all inserted sequences of complex numbers can be extracted unambiguously. — *end note*]

### 30.5.7 complex value operations

[`complex.value.ops`]

```
template<class T> constexpr T real(const complex<T>& x);
```

- 1 *Returns:* `x.real()`.

```
template<class T> constexpr T imag(const complex<T>& x);
```

- 2 *Returns:* `x.imag()`.

```
template<class T> T abs(const complex<T>& x);
```

- 3 *Returns:* The magnitude of `x`.

```
template<class T> T arg(const complex<T>& x);
```

- 4 *Returns:* The phase angle of `x`, or `atan2(imag(x), real(x))`.

```
template<class T> constexpr T norm(const complex<T>& x);
```

- 5 *Returns:* The squared magnitude of `x`.

```
template<class T> constexpr complex<T> conj(const complex<T>& x);
```

- 6 *Returns:* The complex conjugate of `x`.

```
template<class T> complex<T> proj(const complex<T>& x);
```

- 7 *Returns:* The projection of `x` onto the Riemann sphere.

- 8 *Remarks:* Behaves the same as the C function `cproj`. SEE ALSO: ISO C 7.3.9.5

```
template<class T> complex<T> polar(const T& rho, const T& theta = T());
```

- 9 *Requires:* `rho` shall be non-negative and non-NaN. `theta` shall be finite.

- 10 *Returns:* The complex value corresponding to a complex number whose magnitude is `rho` and whose phase angle is `theta`.

### 30.5.8 complex transcendentals

[`complex.transcendentals`]

```
template<class T> complex<T> acos(const complex<T>& x);
```

- 1 *Returns:* The complex arc cosine of `x`.

- 2 *Remarks:* Behaves the same as the C function `caacos`. SEE ALSO: ISO C 7.3.5.1

```
template<class T> complex<T> asin(const complex<T>& x);
```

- 3 *Returns:* The complex arc sine of `x`.

- 4 *Remarks:* Behaves the same as the C function `casin`. SEE ALSO: ISO C 7.3.5.2

```
template<class T> complex<T> atan(const complex<T>& x);
```

- 5 *Returns:* The complex arc tangent of `x`.

- 6 *Remarks:* Behaves the same as the C function `catan`. SEE ALSO: ISO C 7.3.5.3

```
template<class T> complex<T> acosh(const complex<T>& x);
```

- 7 *Returns:* The complex arc hyperbolic cosine of `x`.

- 8 *Remarks:* Behaves the same as the C function `cacosh`. SEE ALSO: ISO C 7.3.6.1

```
template<class T> complex<T> asinh(const complex<T>& x);
```

9 *Returns:* The complex arc hyperbolic sine of  $x$ .

10 *Remarks:* Behaves the same as the C function `casinh`. SEE ALSO: ISO C 7.3.6.2

```
template<class T> complex<T> atanh(const complex<T>& x);
```

11 *Returns:* The complex arc hyperbolic tangent of  $x$ .

12 *Remarks:* Behaves the same as the C function `catanh`. SEE ALSO: ISO C 7.3.6.3

```
template<class T> complex<T> cos(const complex<T>& x);
```

13 *Returns:* The complex cosine of  $x$ .

```
template<class T> complex<T> cosh(const complex<T>& x);
```

14 *Returns:* The complex hyperbolic cosine of  $x$ .

```
template<class T> complex<T> exp(const complex<T>& x);
```

15 *Returns:* The complex base- $e$  exponential of  $x$ .

```
template<class T> complex<T> log(const complex<T>& x);
```

16 *Returns:* The complex natural (base- $e$ ) logarithm of  $x$ . For all  $x$ , `imag(log(x))` lies in the interval  $[-\pi, \pi]$ . [*Note:* The semantics of this function are intended to be the same in C++ as they are for `clog` in C. — *end note*]

17 *Remarks:* The branch cuts are along the negative real axis.

```
template<class T> complex<T> log10(const complex<T>& x);
```

18 *Returns:* The complex common (base-10) logarithm of  $x$ , defined as  $\log(x) / \log(10)$ .

19 *Remarks:* The branch cuts are along the negative real axis.

```
template<class T> complex<T> pow(const complex<T>& x, const complex<T>& y);
```

```
template<class T> complex<T> pow(const complex<T>& x, const T& y);
```

```
template<class T> complex<T> pow(const T& x, const complex<T>& y);
```

20 *Returns:* The complex power of base  $x$  raised to the  $y^{\text{th}}$  power, defined as  $\exp(y * \log(x))$ . The value returned for `pow(0, 0)` is implementation-defined.

21 *Remarks:* The branch cuts are along the negative real axis.

```
template<class T> complex<T> sin(const complex<T>& x);
```

22 *Returns:* The complex sine of  $x$ .

```
template<class T> complex<T> sinh(const complex<T>& x);
```

23 *Returns:* The complex hyperbolic sine of  $x$ .

```
template<class T> complex<T> sqrt(const complex<T>& x);
```

24 *Returns:* The complex square root of  $x$ , in the range of the right half-plane. [*Note:* The semantics of this function are intended to be the same in C++ as they are for `csqrt` in C. — *end note*]

25 *Remarks:* The branch cuts are along the negative real axis.

```
template<class T> complex<T> tan(const complex<T>& x);
```

26 *Returns:* The complex tangent of  $x$ .

```
template<class T> complex<T> tanh(const complex<T>& x);
```

27 *Returns:* The complex hyperbolic tangent of  $x$ .

### 30.5.9 Additional overloads

[`cmplx.over`]

1 The following function templates shall have additional overloads:

|                   |                   |
|-------------------|-------------------|
| <code>arg</code>  | <code>norm</code> |
| <code>conj</code> | <code>proj</code> |
| <code>imag</code> | <code>real</code> |



where `norm`, `conj`, `imag`, and `real` are `constexpr` overloads.

<sup>2</sup> The additional overloads shall be sufficient to ensure:

- (2.1) — If the argument has type `long double`, then it is effectively cast to `complex<long double>`.
- (2.2) — Otherwise, if the argument has type `double` or an integer type, then it is effectively cast to `complex<double>`.
- (2.3) — Otherwise, if the argument has type `float`, then it is effectively cast to `complex<float>`.

<sup>3</sup> Function template `pow` shall have additional overloads sufficient to ensure, for a call with at least one argument of type `complex<T>`:

- (3.1) — If either argument has type `complex<long double>` or type `long double`, then both arguments are effectively cast to `complex<long double>`.
- (3.2) — Otherwise, if either argument has type `complex<double>`, `double`, or an integer type, then both arguments are effectively cast to `complex<double>`.
- (3.3) — Otherwise, if either argument has type `complex<float>` or `float`, then both arguments are effectively cast to `complex<float>`.

### 30.5.10 Suffixes for complex number literals [complex.literals]

<sup>1</sup> This subclause describes literal suffixes for constructing complex number literals. The suffixes `i`, `il`, and `if` create complex numbers of the types `complex<double>`, `complex<long double>`, and `complex<float>` respectively, with their imaginary part denoted by the given literal number and the real part being zero.

```
constexpr complex<long double> operator""il(long double d);
constexpr complex<long double> operator""il(unsigned long long d);
```

<sup>2</sup> *Returns:* `complex<long double>{0.0L, static_cast<long double>(d)}`.

```
constexpr complex<double> operator""i(long double d);
constexpr complex<double> operator""i(unsigned long long d);
```

<sup>3</sup> *Returns:* `complex<double>{0.0, static_cast<double>(d)}`.

```
constexpr complex<float> operator""if(long double d);
constexpr complex<float> operator""if(unsigned long long d);
```

<sup>4</sup> *Returns:* `complex<float>{0.0f, static_cast<float>(d)}`.

## 30.6 Bit manipulation [bit]

### 30.6.1 General [bit.general]

<sup>1</sup> The header `<bit>` provides components to access, manipulate and process both individual bits and bit sequences.

### 30.6.2 Header `<bit>` synopsis [bit.syn]

```
namespace std {
 // 30.6.3, bit_cast
 template<typename To, typename From>
 constexpr To bit_cast(const From& from) noexcept;

 // 30.6.4, integral powers of 2
 template <class T>
 constexpr bool ispow2(T x) noexcept;
 template <class T>
 constexpr T ceil2(T x) noexcept;
 template <class T>
 constexpr T floor2(T x) noexcept;
 template <class T>
 constexpr T log2p1(T x) noexcept;
}
```

**30.6.3 Function template `bit_cast`****[bit.cast]**

```
template<typename To, typename From>
constexpr To bit_cast(const From& from) noexcept;
```

1 *Returns:* An object of type `To`. Each bit of the value representation of the result is equal to the corresponding bit in the object representation of `from`. Padding bits of the `To` object are unspecified. If there is no value of type `To` corresponding to the value representation produced, the behavior is undefined. If there are multiple such values, which value is produced is unspecified.

2 *Remarks:* This function shall not participate in overload resolution unless:

- (2.1) — `sizeof(To) == sizeof(From)` is true;
- (2.2) — `is_trivially_copyable_v<To>` is true; and
- (2.3) — `is_trivially_copyable_v<From>` is true.

This function shall be `constexpr` if and only if `To`, `From`, and the types of all subobjects of `To` and `From` are types `T` such that:

- (2.4) — `is_union_v<T>` is false;
- (2.5) — `is_pointer_v<T>` is false;
- (2.6) — `is_member_pointer_v<T>` is false;
- (2.7) — `is_volatile_v<T>` is false; and
- (2.8) — `T` has no non-static data members of reference type.

**30.6.4 Integral powers of 2****[bit.pow.two]**

```
template <class T>
constexpr bool ispow2(T x) noexcept;
```

1 *Returns:* true if `x` is an integral power of two; false otherwise.

2 *Remarks:* This function shall not participate in overload resolution unless `T` is an unsigned integer type (6.7.1).

```
template <class T>
constexpr T ceil2(T x) noexcept;
```

3 *Returns:* The minimal value `y` such that `ispow2(y)` is true and `y >= x`; if `y` is not representable as a value of type `T`, the result is an unspecified value.

4 *Remarks:* This function shall not participate in overload resolution unless `T` is an unsigned integer type (6.7.1).

```
template <class T>
constexpr T floor2(T x) noexcept;
```

5 *Returns:* If `x == 0`, 0; otherwise the maximal value `y` such that `ispow2(y)` is true and `y <= x`.

6 *Remarks:* This function shall not participate in overload resolution unless `T` is an unsigned integer type (6.7.1).

```
template <class T>
constexpr T log2p1(T x) noexcept;
```

7 *Returns:* If `x == 0`, 0; otherwise one plus the base-2 logarithm of `x`, with any fractional part discarded.

8 *Remarks:* This function shall not participate in overload resolution unless `T` is an unsigned integer type (6.7.1).

**30.7 Random number generation****[rand]**

1 This subclause defines a facility for generating (pseudo-)random numbers.

2 In addition to a few utilities, four categories of entities are described: *uniform random bit generators*, *random number engines*, *random number engine adaptors*, and *random number distributions*. These categorizations are applicable to types that satisfy the corresponding requirements, to objects instantiated from such types, and to templates producing such types when instantiated. [Note: These entities are specified in such a way as to permit the binding of any uniform random bit generator object `e` as the argument to any random number

distribution object `d`, thus producing a zero-argument function object such as given by `bind(d,e)`. — *end note*

- <sup>3</sup> Each of the entities specified via this subclause has an associated arithmetic type (6.7.1) identified as `result_type`. With `T` as the `result_type` thus associated with such an entity, that entity is characterized:
- as *boolean* or equivalently as *boolean-valued*, if `T` is `bool`;
  - otherwise as *integral* or equivalently as *integer-valued*, if `numeric_limits<T>::is_integer` is `true`;
  - otherwise as *floating* or equivalently as *real-valued*.

If integer-valued, an entity may optionally be further characterized as *signed* or *unsigned*, according to `numeric_limits<T>::is_signed`.

- <sup>4</sup> Unless otherwise specified, all descriptions of calculations in this subclause use mathematical real numbers.
- <sup>5</sup> Throughout this subclause, the operators `bitand`, `bitor`, and `xor` denote the respective conventional bitwise operations. Further:
- the operator `rshift` denotes a bitwise right shift with zero-valued bits appearing in the high bits of the result, and
  - the operator `lshiftw` denotes a bitwise left shift with zero-valued bits appearing in the low bits of the result, and whose result is always taken modulo  $2^w$ .

### 30.7.1 Header <random> synopsis

[rand.synopsis]

```
#include <initializer_list>

namespace std {
 // 30.7.2.3, uniform random bit generator requirements
 template<class G>
 concept UniformRandomBitGenerator = see below;

 // 30.7.3.1, class template linear_congruential_engine
 template<class UIntType, UIntType a, UIntType c, UIntType m>
 class linear_congruential_engine;

 // 30.7.3.2, class template mersenne_twister_engine
 template<class UIntType, size_t w, size_t n, size_t m, size_t r,
 UIntType a, size_t u, UIntType d, size_t s,
 UIntType b, size_t t,
 UIntType c, size_t l, UIntType f>
 class mersenne_twister_engine;

 // 30.7.3.3, class template subtract_with_carry_engine
 template<class UIntType, size_t w, size_t s, size_t r>
 class subtract_with_carry_engine;

 // 30.7.4.2, class template discard_block_engine
 template<class Engine, size_t p, size_t r>
 class discard_block_engine;

 // 30.7.4.3, class template independent_bits_engine
 template<class Engine, size_t w, class UIntType>
 class independent_bits_engine;

 // 30.7.4.4, class template shuffle_order_engine
 template<class Engine, size_t k>
 class shuffle_order_engine;

 // 30.7.5, engines and engine adaptors with predefined parameters
 using minstd_rand0 = see below;
 using minstd_rand = see below;
 using mt19937 = see below;
 using mt19937_64 = see below;
 using ranlux24_base = see below;
 using ranlux48_base = see below;
}
```

```
using ranlux24 = see below;
using ranlux48 = see below;
using knuth_b = see below;

using default_random_engine = see below;

// 30.7.6, class random_device
class random_device;

// 30.7.7.1, class seed_seq
class seed_seq;

// 30.7.7.2, function template generate_canonical
template<class RealType, size_t bits, class URBG>
RealType generate_canonical(URBG& g);

// 30.7.8.2.1, class template uniform_int_distribution
template<class IntType = int>
class uniform_int_distribution;

// 30.7.8.2.2, class template uniform_real_distribution
template<class RealType = double>
class uniform_real_distribution;

// 30.7.8.3.1, class bernoulli_distribution
class bernoulli_distribution;

// 30.7.8.3.2, class template binomial_distribution
template<class IntType = int>
class binomial_distribution;

// 30.7.8.3.3, class template geometric_distribution
template<class IntType = int>
class geometric_distribution;

// 30.7.8.3.4, class template negative_binomial_distribution
template<class IntType = int>
class negative_binomial_distribution;

// 30.7.8.4.1, class template poisson_distribution
template<class IntType = int>
class poisson_distribution;

// 30.7.8.4.2, class template exponential_distribution
template<class RealType = double>
class exponential_distribution;

// 30.7.8.4.3, class template gamma_distribution
template<class RealType = double>
class gamma_distribution;

// 30.7.8.4.4, class template weibull_distribution
template<class RealType = double>
class weibull_distribution;

// 30.7.8.4.5, class template extreme_value_distribution
template<class RealType = double>
class extreme_value_distribution;

// 30.7.8.5.1, class template normal_distribution
template<class RealType = double>
class normal_distribution;
```

```

// 30.7.8.5.2, class template lognormal_distribution
template<class RealType = double>
 class lognormal_distribution;

// 30.7.8.5.3, class template chi_squared_distribution
template<class RealType = double>
 class chi_squared_distribution;

// 30.7.8.5.4, class template cauchy_distribution
template<class RealType = double>
 class cauchy_distribution;

// 30.7.8.5.5, class template fisher_f_distribution
template<class RealType = double>
 class fisher_f_distribution;

// 30.7.8.5.6, class template student_t_distribution
template<class RealType = double>
 class student_t_distribution;

// 30.7.8.6.1, class template discrete_distribution
template<class IntType = int>
 class discrete_distribution;

// 30.7.8.6.2, class template piecewise_constant_distribution
template<class RealType = double>
 class piecewise_constant_distribution;

// 30.7.8.6.3, class template piecewise_linear_distribution
template<class RealType = double>
 class piecewise_linear_distribution;
}

```

## 30.7.2 Requirements

[rand.req]

### 30.7.2.1 General requirements

[rand.req.gen1]

- <sup>1</sup> Throughout this subclause 30.7, the effect of instantiating a template:
  - a) that has a template type parameter named `Sseq` is undefined unless the corresponding template argument is cv-unqualified and satisfies the requirements of seed sequence (30.7.2.2).
  - b) that has a template type parameter named `URBG` is undefined unless the corresponding template argument is cv-unqualified and satisfies the requirements of uniform random bit generator (30.7.2.3).
  - c) that has a template type parameter named `Engine` is undefined unless the corresponding template argument is cv-unqualified and satisfies the requirements of random number engine (30.7.2.4).
  - d) that has a template type parameter named `RealType` is undefined unless the corresponding template argument is cv-unqualified and is one of `float`, `double`, or `long double`.
  - e) that has a template type parameter named `IntType` is undefined unless the corresponding template argument is cv-unqualified and is one of `short`, `int`, `long`, `long long`, `unsigned short`, `unsigned int`, `unsigned long`, or `unsigned long long`.
  - f) that has a template type parameter named `UIntType` is undefined unless the corresponding template argument is cv-unqualified and is one of `unsigned short`, `unsigned int`, `unsigned long`, or `unsigned long long`.
- <sup>2</sup> Throughout this subclause 30.7, phrases of the form “x is an iterator of a specific kind” shall be interpreted as equivalent to the more formal requirement that “x is a value of a type satisfying the requirements of the specified iterator type”.
- <sup>3</sup> Throughout this subclause 30.7, any constructor that can be called with a single argument and that satisfies a requirement specified in this subclause shall be declared `explicit`.

**30.7.2.2 Seed sequence requirements**

[rand.req.seedseq]

- <sup>1</sup> A *seed sequence* is an object that consumes a sequence of integer-valued data and produces a requested number of unsigned integer values  $i$ ,  $0 \leq i < 2^{32}$ , based on the consumed data. [Note: Such an object provides a mechanism to avoid replication of streams of random variates. This can be useful, for example, in applications requiring large numbers of random number engines. — end note]
- <sup>2</sup> A class **S** satisfies the requirements of a seed sequence if the expressions shown in Table 100 are valid and have the indicated semantics, and if **S** also satisfies all other requirements of this subclause 30.7.2.2. In that Table and throughout this subclause:
- T is the type named by **S**'s associated `result_type`;
  - q is a value of **S** and r is a possibly const value of **S**;
  - ib and ie are input iterators with an unsigned integer `value_type` of at least 32 bits;
  - rb and re are mutable random access iterators with an unsigned integer `value_type` of at least 32 bits;
  - ob is an output iterator; and
  - il is a value of `initializer_list<T>`.

Table 100 — Seed sequence requirements

| Expression                     | Return type | Pre/post-condition                                                                                                                                                                                                                                              | Complexity                                   |
|--------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <code>S::result_type</code>    | T           | T is an unsigned integer type (6.7.1) of at least 32 bits.                                                                                                                                                                                                      | compile-time                                 |
| <code>S()</code>               |             | Creates a seed sequence with the same initial state as all other default-constructed seed sequences of type <b>S</b> .                                                                                                                                          | constant                                     |
| <code>S(ib,ie)</code>          |             | Creates a seed sequence having internal state that depends on some or all of the bits of the supplied sequence [ib,ie).                                                                                                                                         | $\mathcal{O}(\text{ie} - \text{ib})$         |
| <code>S(il)</code>             |             | Same as <code>S(il.begin(), il.end())</code> .                                                                                                                                                                                                                  | same as <code>S(il.begin(), il.end())</code> |
| <code>q.generate(rb,re)</code> | void        | Does nothing if <code>rb == re</code> . Otherwise, fills the supplied sequence [rb,re) with 32-bit quantities that depend on the sequence supplied to the constructor and possibly also depend on the history of <code>generate</code> 's previous invocations. | $\mathcal{O}(\text{re} - \text{rb})$         |
| <code>r.size()</code>          | size_t      | The number of 32-bit units that would be copied by a call to <code>r.param</code> .                                                                                                                                                                             | constant                                     |
| <code>r.param(ob)</code>       | void        | Copies to the given destination a sequence of 32-bit units that can be provided to the constructor of a second object of type <b>S</b> , and that would reproduce in that second object a state indistinguishable from the state of the first object.           | $\mathcal{O}(\text{r.size}())$               |

### 30.7.2.3 Uniform random bit generator requirements [rand.req.urng]

- <sup>1</sup> A *uniform random bit generator* `g` of type `G` is a function object returning unsigned integer values such that each value in the range of possible results has (ideally) equal probability of being returned. [Note: The degree to which `g`'s results approximate the ideal is often determined statistically. — end note]

```
template<class G>
concept UniformRandomBitGenerator =
 Invocable<G&&> && UnsignedIntegral<invoke_result_t<G&&>> &&
 requires {
 G::min(); requires Same<decltype(G::min()), invoke_result_t<G&&>>;
 G::max(); requires Same<decltype(G::max()), invoke_result_t<G&&>>;
 };
```

- <sup>2</sup> Let `g` be an object of type `G`. `G` models `UniformRandomBitGenerator` only if

(2.1) — both `G::min()` and `G::max()` are constant expressions (8.6),

(2.2) — `G::min() < G::max()`,

(2.3) — `G::min() <= g()`,

(2.4) — `g() <= G::max()`, and

(2.5) — `g()` has amortized constant complexity.

- <sup>3</sup> A class `G` meets the *uniform random bit generator* requirements if `G` models `UniformRandomBitGenerator`, `invoke_result_t<G&&>` is an unsigned integer type (6.7.1), and `G` provides a nested *typedef-name* `result_type` that denotes the same type as `invoke_result_t<G&&>`.

### 30.7.2.4 Random number engine requirements [rand.req.eng]

- <sup>1</sup> A *random number engine* (commonly shortened to *engine*) `e` of type `E` is a uniform random bit generator that additionally meets the requirements (e.g., for seeding and for input/output) specified in this subclause.

- <sup>2</sup> At any given time, `e` has a state `ei` for some integer  $i \geq 0$ . Upon construction, `e` has an initial state `e0`. An engine's state may be established via a constructor, a `seed` function, assignment, or a suitable `operator>>`.

- <sup>3</sup> `E`'s specification shall define:

- a) the size of `E`'s state in multiples of the size of `result_type`, given as an integral constant expression;
- b) the *transition algorithm* `TA` by which `e`'s state `ei` is advanced to its *successor state* `ei+1`; and
- c) the *generation algorithm* `GA` by which an engine's state is mapped to a value of type `result_type`.

- <sup>4</sup> A class `E` that satisfies the requirements of a uniform random bit generator (30.7.2.3) also satisfies the requirements of a *random number engine* if the expressions shown in Table 101 are valid and have the indicated semantics, and if `E` also satisfies all other requirements of this subclause 30.7.2.4. In that Table and throughout this subclause:

- a) `T` is the type named by `E`'s associated `result_type`;
- b) `e` is a value of `E`, `v` is an lvalue of `E`, `x` and `y` are (possibly `const`) values of `E`;
- c) `s` is a value of `T`;
- d) `q` is an lvalue satisfying the requirements of a seed sequence (30.7.2.2);
- e) `z` is a value of type `unsigned long long`;
- f) `os` is an lvalue of the type of some class template specialization `basic_ostream<charT, traits>`; and
- g) `is` is an lvalue of the type of some class template specialization `basic_istream<charT, traits>`;

where `charT` and `traits` are constrained according to Clause 25 and Clause 31.

Table 101 — Random number engine requirements

| Expression       | Return type | Pre/post-condition                                                                                              | Complexity                    |
|------------------|-------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------|
| <code>E()</code> |             | Creates an engine with the same initial state as all other default-constructed engines of type <code>E</code> . | $\mathcal{O}$ (size of state) |

| Expression                    | Return type                   | Pre/post-condition                                                                                                                                                                                                                                                                                                                                | Complexity                                                                            |
|-------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| $E(x)$                        |                               | Creates an engine that compares equal to $x$ .                                                                                                                                                                                                                                                                                                    | $\mathcal{O}(\text{size of state})$                                                   |
| $E(s)$                        |                               | Creates an engine with initial state determined by $s$ .                                                                                                                                                                                                                                                                                          | $\mathcal{O}(\text{size of state})$                                                   |
| $E(q)$ <sup>270</sup>         |                               | Creates an engine with an initial state that depends on a sequence produced by one call to $q.generate$ .                                                                                                                                                                                                                                         | same as complexity of $q.generate$ called on a sequence whose length is size of state |
| $e.seed()$                    | void                          | <i>Ensures:</i> $e == E()$ .                                                                                                                                                                                                                                                                                                                      | same as $E()$                                                                         |
| $e.seed(s)$                   | void                          | <i>Ensures:</i> $e == E(s)$ .                                                                                                                                                                                                                                                                                                                     | same as $E(s)$                                                                        |
| $e.seed(q)$                   | void                          | <i>Ensures:</i> $e == E(q)$ .                                                                                                                                                                                                                                                                                                                     | same as $E(q)$                                                                        |
| $e()$                         | T                             | Advances $e$ 's state $e_i$ to $e_{i+1} = TA(e_i)$ and returns $GA(e_i)$ .                                                                                                                                                                                                                                                                        | per 30.7.2.3                                                                          |
| $e.discard(z)$ <sup>271</sup> | void                          | Advances $e$ 's state $e_i$ to $e_{i+z}$ by any means equivalent to $z$ consecutive calls $e()$ .                                                                                                                                                                                                                                                 | no worse than the complexity of $z$ consecutive calls $e()$                           |
| $x == y$                      | bool                          | This operator is an equivalence relation. With $S_x$ and $S_y$ as the infinite sequences of values that would be generated by repeated future calls to $x()$ and $y()$ , respectively, returns <b>true</b> if $S_x = S_y$ ; else returns <b>false</b> .                                                                                           | $\mathcal{O}(\text{size of state})$                                                   |
| $x != y$                      | bool                          | $!(x == y)$ .                                                                                                                                                                                                                                                                                                                                     | $\mathcal{O}(\text{size of state})$                                                   |
| $os \ll x$                    | reference to the type of $os$ | With $os.fmtflags$ set to <code>ios_base::dec   ios_base::left</code> and the fill character set to the space character, writes to $os$ the textual representation of $x$ 's current state. In the output, adjacent numbers are separated by one or more space characters.<br><i>Ensures:</i> The $os.fmtflags$ and fill character are unchanged. | $\mathcal{O}(\text{size of state})$                                                   |

270) This constructor (as well as the subsequent corresponding `seed()` function) may be particularly useful to applications requiring a large number of independent random sequences.

271) This operation is common in user code, and can often be implemented in an engine-specific manner so as to provide significant performance improvements over an equivalent naive loop that makes  $z$  consecutive calls  $e()$ .



| Expression                 | Return type                                 | Pre/post-condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Complexity                          |
|----------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <code>is &gt;&gt; v</code> | reference to the type of<br><code>is</code> | With <code>is.fmtflags</code> set to <code>ios_base::dec</code> , sets <code>v</code> 's state as determined by reading its textual representation from <code>is</code> .<br>If bad input is encountered, ensures that <code>v</code> 's state is unchanged by the operation and calls <code>is.setstate(ios::failbit)</code> (which may throw <code>ios::failure</code> (31.5.5.4)). If a textual representation written via <code>os &lt;&lt; x</code> was subsequently read via <code>is &gt;&gt; v</code> , then <code>x == v</code> provided that there have been no intervening invocations of <code>x</code> or of <code>v</code> .<br><i>Requires:</i> <code>is</code> provides a textual representation that was previously written using an output stream whose imbued locale was the same as that of <code>is</code> , and whose type's template specialization arguments <code>charT</code> and <code>traits</code> were respectively the same as those of <code>is</code> .<br><i>Ensures:</i> The <code>is.fmtflags</code> are unchanged. | $\mathcal{O}(\text{size of state})$ |

- <sup>5</sup> E shall satisfy the *Cpp17CopyConstructible* (Table 26) and *Cpp17CopyAssignable* (Table 28) requirements. These operations shall each be of complexity no worse than  $\mathcal{O}(\text{size of state})$ .

### 30.7.2.5 Random number engine adaptor requirements [rand.req.adapt]

- <sup>1</sup> A *random number engine adaptor* (commonly shortened to *adaptor*) `a` of type `A` is a random number engine that takes values produced by some other random number engine, and applies an algorithm to those values in order to deliver a sequence of values with different randomness properties. An engine `b` of type `B` adapted in this way is termed a *base engine* in this context. The expression `a.base()` shall be valid and shall return a `const` reference to `a`'s base engine.
- <sup>2</sup> The requirements of a random number engine type shall be interpreted as follows with respect to a random number engine adaptor type.

```
A::A();
```

- <sup>3</sup> *Effects:* The base engine is initialized as if by its default constructor.

```
bool operator==(const A& a1, const A& a2);
```

- <sup>4</sup> *Returns:* `true` if `a1`'s base engine is equal to `a2`'s base engine. Otherwise returns `false`.

```
A::A(result_type s);
```

- <sup>5</sup> *Effects:* The base engine is initialized with `s`.

```
template<class Sseq> A::A(Sseq& q);
```

- <sup>6</sup> *Effects:* The base engine is initialized with `q`.

```
void seed();
```

- <sup>7</sup> *Effects:* With `b` as the base engine, invokes `b.seed()`.

```
void seed(result_type s);
```

8 *Effects:* With `b` as the base engine, invokes `b.seed(s)`.

```
template<class Sseq> void seed(Sseq& q);
```

9 *Effects:* With `b` as the base engine, invokes `b.seed(q)`.

10 A shall also satisfy the following additional requirements:

- a) The complexity of each function shall not exceed the complexity of the corresponding function applied to the base engine.
- b) The state of A shall include the state of its base engine. The size of A's state shall be no less than the size of the base engine.
- c) Copying A's state (e.g., during copy construction or copy assignment) shall include copying the state of the base engine of A.
- d) The textual representation of A shall include the textual representation of its base engine.

### 30.7.2.6 Random number distribution requirements [rand.req.dist]

1 A *random number distribution* (commonly shortened to *distribution*) `d` of type D is a function object returning values that are distributed according to an associated mathematical *probability density function*  $p(z)$  or according to an associated *discrete probability function*  $P(z_i)$ . A distribution's specification identifies its associated probability function  $p(z)$  or  $P(z_i)$ .

2 An associated probability function is typically expressed using certain externally-supplied quantities known as the *parameters of the distribution*. Such distribution parameters are identified in this context by writing, for example,  $p(z | a, b)$  or  $P(z_i | a, b)$ , to name specific parameters, or by writing, for example,  $p(z | \{p\})$  or  $P(z_i | \{p\})$ , to denote a distribution's parameters `p` taken as a whole.

3 A class D satisfies the requirements of a *random number distribution* if the expressions shown in Table 102 are valid and have the indicated semantics, and if D and its associated types also satisfy all other requirements of this subclause 30.7.2.6. In that Table and throughout this subclause,

- a) T is the type named by D's associated `result_type`;
- b) P is the type named by D's associated `param_type`;
- c) `d` is a value of D, and `x` and `y` are (possibly `const`) values of D;
- d) `glb` and `lub` are values of T respectively corresponding to the greatest lower bound and the least upper bound on the values potentially returned by `d`'s `operator()`, as determined by the current values of `d`'s parameters;
- e) `p` is a (possibly `const`) value of P;
- f) `g`, `g1`, and `g2` are lvalues of a type satisfying the requirements of a uniform random bit generator (30.7.2.3);
- g) `os` is an lvalue of the type of some class template specialization `basic_ostream<charT, traits>`; and
- h) `is` is an lvalue of the type of some class template specialization `basic_istream<charT, traits>`;

where `charT` and `traits` are constrained according to Clause 25 and Clause 31.

Table 102 — Random number distribution requirements

| Expression                  | Return type | Pre/post-condition                                                                                                                  | Complexity   |
|-----------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <code>D::result_type</code> | T           | T is an arithmetic type (6.7.1).                                                                                                    | compile-time |
| <code>D::param_type</code>  | P           |                                                                                                                                     | compile-time |
| <code>D()</code>            |             | Creates a distribution whose behavior is indistinguishable from that of any other newly default-constructed distribution of type D. | constant     |

| Expression                 | Return type                              | Pre/post-condition                                                                                                                                                                                                                                                                                                                                                           | Complexity                                                 |
|----------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <code>D(p)</code>          |                                          | Creates a distribution whose behavior is indistinguishable from that of a distribution newly constructed directly from the values used to construct <code>p</code> .                                                                                                                                                                                                         | same as <code>p</code> 's construction                     |
| <code>d.reset()</code>     | <code>void</code>                        | Subsequent uses of <code>d</code> do not depend on values produced by any engine prior to invoking <code>reset</code> .                                                                                                                                                                                                                                                      | constant                                                   |
| <code>x.param()</code>     | <code>P</code>                           | Returns a value <code>p</code> such that <code>D(p).param() == p</code> .                                                                                                                                                                                                                                                                                                    | no worse than the complexity of <code>D(p)</code>          |
| <code>d.param(p)</code>    | <code>void</code>                        | <i>Ensures:</i> <code>d.param() == p</code> .                                                                                                                                                                                                                                                                                                                                | no worse than the complexity of <code>D(p)</code>          |
| <code>d(g)</code>          | <code>T</code>                           | With <code>p = d.param()</code> , the sequence of numbers returned by successive invocations with the same object <code>g</code> is randomly distributed according to the associated $p(z   \{p\})$ or $P(z_i   \{p\})$ function.                                                                                                                                            | amortized constant number of invocations of <code>g</code> |
| <code>d(g,p)</code>        | <code>T</code>                           | The sequence of numbers returned by successive invocations with the same objects <code>g</code> and <code>p</code> is randomly distributed according to the associated $p(z   \{p\})$ or $P(z_i   \{p\})$ function.                                                                                                                                                          | amortized constant number of invocations of <code>g</code> |
| <code>x.min()</code>       | <code>T</code>                           | Returns <code>glb</code> .                                                                                                                                                                                                                                                                                                                                                   | constant                                                   |
| <code>x.max()</code>       | <code>T</code>                           | Returns <code>lub</code> .                                                                                                                                                                                                                                                                                                                                                   | constant                                                   |
| <code>x == y</code>        | <code>bool</code>                        | This operator is an equivalence relation. Returns <code>true</code> if <code>x.param() == y.param()</code> and $S_1 = S_2$ , where $S_1$ and $S_2$ are the infinite sequences of values that would be generated, respectively, by repeated future calls to <code>x(g1)</code> and <code>y(g2)</code> whenever <code>g1 == g2</code> . Otherwise returns <code>false</code> . | constant                                                   |
| <code>x != y</code>        | <code>bool</code>                        | <code>!(x == y)</code> .                                                                                                                                                                                                                                                                                                                                                     | same as <code>x == y</code> .                              |
| <code>os &lt;&lt; x</code> | reference to the type of <code>os</code> | Writes to <code>os</code> a textual representation for the parameters and the additional internal data of <code>x</code> .<br><i>Ensures:</i> The <code>os.fmtflags</code> and fill character are unchanged.                                                                                                                                                                 |                                                            |

| Expression                 | Return type                                 | Pre/post-condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Complexity |
|----------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <code>is &gt;&gt; d</code> | reference to the type of<br><code>is</code> | Restores from <code>is</code> the parameters and additional internal data of the lvalue <code>d</code> . If bad input is encountered, ensures that <code>d</code> is unchanged by the operation and calls<br><code>is.setstate(ios::failbit)</code> (which may throw <code>ios::failure</code> (31.5.5.4)).<br><i>Requires:</i> <code>is</code> provides a textual representation that was previously written using an <code>os</code> whose imbued locale and whose type's template specialization arguments <code>charT</code> and <code>traits</code> were the same as those of <code>is</code> .<br><i>Ensures:</i> The <code>is.fmtflags</code> are unchanged. |            |

- <sup>4</sup> D shall satisfy the *Cpp17CopyConstructible* (Table 26) and *Cpp17CopyAssignable* (Table 28) requirements.
- <sup>5</sup> The sequence of numbers produced by repeated invocations of `d(g)` shall be independent of any invocation of `os << d` or of any `const` member function of D between any of the invocations `d(g)`.
- <sup>6</sup> If a textual representation is written using `os << x` and that representation is restored into the same or a different object `y` of the same type using `is >> y`, repeated invocations of `y(g)` shall produce the same sequence of numbers as would repeated invocations of `x(g)`.
- <sup>7</sup> It is unspecified whether `D::param_type` is declared as a (nested) `class` or via a `typedef`. In this subclause 30.7, declarations of `D::param_type` are in the form of `typedefs` for convenience of exposition only.
- <sup>8</sup> P shall satisfy the *Cpp17CopyConstructible* (Table 26), *Cpp17CopyAssignable* (Table 28), and *Cpp17EqualityComparable* (Table 22) requirements.
- <sup>9</sup> For each of the constructors of D taking arguments corresponding to parameters of the distribution, P shall have a corresponding constructor subject to the same requirements and taking arguments identical in number, type, and default values. Moreover, for each of the member functions of D that return values corresponding to parameters of the distribution, P shall have a corresponding member function with the identical name, type, and semantics.
- <sup>10</sup> P shall have a declaration of the form
- ```
using distribution_type = D;
```

30.7.3 Random number engine class templates [rand.eng]

- ¹ Each type instantiated from a class template specified in this subclause 30.7.3 satisfies the requirements of a random number engine (30.7.2.4) type.
- ² Except where specified otherwise, the complexity of each function specified in this subclause 30.7.3 is constant.
- ³ Except where specified otherwise, no function described in this subclause 30.7.3 throws an exception.
- ⁴ Every function described in this subclause 30.7.3 that has a function parameter `q` of type `Sseq&` for a template type parameter named `Sseq` that is different from type `seed_seq` throws what and when the invocation of `q.generate` throws.
- ⁵ Descriptions are provided in this subclause 30.7.3 only for engine operations that are not described in 30.7.2.4 or for operations where there is additional semantic information. In particular, declarations for copy constructors, for copy assignment operators, for streaming operators, and for equality and inequality operators are not shown in the synopses.
- ⁶ Each template specified in this subclause 30.7.3 requires one or more relationships, involving the value(s) of its non-type template parameter(s), to hold. A program instantiating any of these templates is ill-formed if any such required relationship fails to hold.

- 7 For every random number engine and for every random number engine adaptor **X** defined in this subclause (30.7.3) and in subclause 30.7.4:

- (7.1) — if the constructor

```
template<class Sseq> explicit X(Sseq& q);
```

is called with a type `Sseq` that does not qualify as a seed sequence, then this constructor shall not participate in overload resolution;

- (7.2) — if the member function

```
template<class Sseq> void seed(Sseq& q);
```

is called with a type `Sseq` that does not qualify as a seed sequence, then this function shall not participate in overload resolution.

The extent to which an implementation determines that a type cannot be a seed sequence is unspecified, except that as a minimum a type shall not qualify as a seed sequence if it is implicitly convertible to `X::result_type`.

30.7.3.1 Class template `linear_congruential_engine` [rand.eng.lcong]

- 1 A `linear_congruential_engine` random number engine produces unsigned integer random numbers. The state x_i of a `linear_congruential_engine` object `x` is of size 1 and consists of a single integer. The transition algorithm is a modular linear function of the form $TA(x_i) = (a \cdot x_i + c) \bmod m$; the generation algorithm is $GA(x_i) = x_{i+1}$.

```
template<class UIntType, UIntType a, UIntType c, UIntType m>
class linear_congruential_engine {
public:
    // types
    using result_type = UIntType;

    // engine characteristics
    static constexpr result_type multiplier = a;
    static constexpr result_type increment = c;
    static constexpr result_type modulus = m;
    static constexpr result_type min() { return c == 0u ? 1u : 0u; }
    static constexpr result_type max() { return m - 1u; }
    static constexpr result_type default_seed = 1u;

    // constructors and seeding functions
    linear_congruential_engine() : linear_congruential_engine(default_seed) {}
    explicit linear_congruential_engine(result_type s);
    template<class Sseq> explicit linear_congruential_engine(Sseq& q);
    void seed(result_type s = default_seed);
    template<class Sseq> void seed(Sseq& q);

    // generating functions
    result_type operator()();
    void discard(unsigned long long z);
};
```

- 2 If the template parameter `m` is 0, the modulus m used throughout this subclause 30.7.3.1 is `numeric_limits<result_type>::max()` plus 1. [Note: m need not be representable as a value of type `result_type`. — end note]
- 3 If the template parameter `m` is not 0, the following relations shall hold: $a < m$ and $c < m$.
- 4 The textual representation consists of the value of x_i .

```
explicit linear_congruential_engine(result_type s);
```

- 5 *Effects:* Constructs a `linear_congruential_engine` object. If $c \bmod m$ is 0 and $s \bmod m$ is 0, sets the engine's state to 1, otherwise sets the engine's state to $s \bmod m$.

```
template<class Sseq> explicit linear_congruential_engine(Sseq& q);
```

- 6 *Effects:* Constructs a `linear_congruential_engine` object. With $k = \left\lceil \frac{\log_2 m}{32} \right\rceil$ and a an array (or equivalent) of length $k + 3$, invokes `q.generate(a + 0, a + k + 3)` and then computes $S = \left(\sum_{j=0}^{k-1} a_{j+3} \cdot 2^{32j} \right) \bmod m$. If $c \bmod m$ is 0 and S is 0, sets the engine's state to 1, else sets the engine's state to S .

30.7.3.2 Class template `mersenne_twister_engine` [rand.eng.mers]

- 1 A `mersenne_twister_engine` random number engine²⁷² produces unsigned integer random numbers in the closed interval $[0, 2^w - 1]$. The state x_i of a `mersenne_twister_engine` object x is of size n and consists of a sequence X of n values of the type delivered by x ; all subscripts applied to X are to be taken modulo n .
- 2 The transition algorithm employs a twisted generalized feedback shift register defined by shift values n and m , a twist value r , and a conditional xor-mask a . To improve the uniformity of the result, the bits of the raw shift register are additionally *tempered* (i.e., scrambled) according to a bit-scrambling matrix defined by values u, d, s, b, t, c , and ℓ .

The state transition is performed as follows:

- a) Concatenate the upper $w - r$ bits of X_{i-n} with the lower r bits of X_{i+1-n} to obtain an unsigned integer value Y .
- b) With $\alpha = a \cdot (Y \text{ bitand } 1)$, set X_i to X_{i+m-n} xor $(Y \text{ rshift } 1)$ xor α .

The sequence X is initialized with the help of an initialization multiplier f .

- 3 The generation algorithm determines the unsigned integer values z_1, z_2, z_3, z_4 as follows, then delivers z_4 as its result:
- a) Let $z_1 = X_i$ xor $((X_i \text{ rshift } u) \text{ bitand } d)$.
 - b) Let $z_2 = z_1$ xor $((z_1 \text{ lshift}_w s) \text{ bitand } b)$.
 - c) Let $z_3 = z_2$ xor $((z_2 \text{ lshift}_w t) \text{ bitand } c)$.
 - d) Let $z_4 = z_3$ xor $(z_3 \text{ rshift } \ell)$.

```
template<class UIntType, size_t w, size_t n, size_t m, size_t r,
        UIntType a, size_t u, UIntType d, size_t s,
        UIntType b, size_t t,
        UIntType c, size_t l, UIntType f>
class mersenne_twister_engine {
public:
    // types
    using result_type = UIntType;

    // engine characteristics
    static constexpr size_t word_size = w;
    static constexpr size_t state_size = n;
    static constexpr size_t shift_size = m;
    static constexpr size_t mask_bits = r;
    static constexpr UIntType xor_mask = a;
    static constexpr size_t tempering_u = u;
    static constexpr UIntType tempering_d = d;
    static constexpr size_t tempering_s = s;
    static constexpr UIntType tempering_b = b;
    static constexpr size_t tempering_t = t;
    static constexpr UIntType tempering_c = c;
    static constexpr size_t tempering_l = l;
    static constexpr UIntType initialization_multiplier = f;
    static constexpr result_type min() { return 0; }
    static constexpr result_type max() { return 2w - 1; }
    static constexpr result_type default_seed = 5489u;
```

272) The name of this engine refers, in part, to a property of its period: For properly-selected values of the parameters, the period is closely related to a large Mersenne prime number.

```

// constructors and seeding functions
mersenne_twister_engine() : mersenne_twister_engine(default_seed) {}
explicit mersenne_twister_engine(result_type value);
template<class Sseq> explicit mersenne_twister_engine(Sseq& q);
void seed(result_type value = default_seed);
template<class Sseq> void seed(Sseq& q);

// generating functions
result_type operator()();
void discard(unsigned long long z);
};

```

- 4 The following relations shall hold: $0 < m$, $m \leq n$, $2u < w$, $r \leq w$, $u \leq w$, $s \leq w$, $t \leq w$, $l \leq w$, $w \leq \text{numeric_limits}<\text{UIntType}>::\text{digits}$, $a \leq (1u \ll w) - 1u$, $b \leq (1u \ll w) - 1u$, $c \leq (1u \ll w) - 1u$, $d \leq (1u \ll w) - 1u$, and $f \leq (1u \ll w) - 1u$.

- 5 The textual representation of \mathbf{x}_i consists of the values of X_{i-n}, \dots, X_{i-1} , in that order.

```
explicit mersenne_twister_engine(result_type value);
```

- 6 *Effects:* Constructs a `mersenne_twister_engine` object. Sets X_{-n} to `value mod 2^w` . Then, iteratively for $i = 1 - n, \dots, -1$, sets X_i to

$$[f \cdot (X_{i-1} \text{ xor } (X_{i-1} \text{ rshift } (w - 2))) + i \bmod n] \bmod 2^w .$$

- 7 *Complexity:* $\mathcal{O}(n)$.

```
template<class Sseq> explicit mersenne_twister_engine(Sseq& q);
```

- 8 *Effects:* Constructs a `mersenne_twister_engine` object. With $k = \lceil w/32 \rceil$ and a an array (or equivalent) of length $n \cdot k$, invokes `q.generate(a+0, a+n*k)` and then, iteratively for $i = -n, \dots, -1$, sets X_i to $(\sum_{j=0}^{k-1} a_{k(i+n)+j} \cdot 2^{32j}) \bmod 2^w$. Finally, if the most significant $w - r$ bits of X_{-n} are zero, and if each of the other resulting X_i is 0, changes X_{-n} to 2^{w-1} .

30.7.3.3 Class template `subtract_with_carry_engine`

[rand.eng.sub]

- 1 A `subtract_with_carry_engine` random number engine produces unsigned integer random numbers.
- 2 The state \mathbf{x}_i of a `subtract_with_carry_engine` object \mathbf{x} is of size $\mathcal{O}(r)$, and consists of a sequence X of r integer values $0 \leq X_i < m = 2^w$; all subscripts applied to X are to be taken modulo r . The state \mathbf{x}_i additionally consists of an integer c (known as the *carry*) whose value is either 0 or 1.
- 3 The state transition is performed as follows:

- Let $Y = X_{i-s} - X_{i-r} - c$.
- Set X_i to $y = Y \bmod m$. Set c to 1 if $Y < 0$, otherwise set c to 0.

[Note: This algorithm corresponds to a modular linear function of the form $\text{TA}(\mathbf{x}_i) = (a \cdot \mathbf{x}_i) \bmod b$, where b is of the form $m^r - m^s + 1$ and $a = b - (b - 1)/m$. — end note]

- 4 The generation algorithm is given by $\text{GA}(\mathbf{x}_i) = y$, where y is the value produced as a result of advancing the engine's state as described above.

```

template<class UIntType, size_t w, size_t s, size_t r>
class subtract_with_carry_engine {
public:
    // types
    using result_type = UIntType;

    // engine characteristics
    static constexpr size_t word_size = w;
    static constexpr size_t short_lag = s;
    static constexpr size_t long_lag = r;
    static constexpr result_type min() { return 0; }
    static constexpr result_type max() { return m - 1; }
    static constexpr result_type default_seed = 19780503u;
};

```

```

// constructors and seeding functions
subtract_with_carry_engine() : subtract_with_carry_engine(default_seed) {}
explicit subtract_with_carry_engine(result_type value);
template<class Sseq> explicit subtract_with_carry_engine(Sseq& q);
void seed(result_type value = default_seed);
template<class Sseq> void seed(Sseq& q);

// generating functions
result_type operator()();
void discard(unsigned long long z);
};

```

5 The following relations shall hold: $0u < s$, $s < r$, $0 < w$, and $w \leq \text{numeric_limits}<\text{UIntType}>::\text{digits}$.

6 The textual representation consists of the values of X_{i-r}, \dots, X_{i-1} , in that order, followed by c .

```
explicit subtract_with_carry_engine(result_type value);
```

7 *Effects:* Constructs a `subtract_with_carry_engine` object. Sets the values of X_{-r}, \dots, X_{-1} , in that order, as specified below. If X_{-1} is then 0, sets c to 1; otherwise sets c to 0.

To set the values X_k , first construct `e`, a `linear_congruential_engine` object, as if by the following definition:

```
linear_congruential_engine<result_type,
    40014u, 0u, 2147483563u> e(value == 0u ? default_seed : value);
```

Then, to set each X_k , obtain new values z_0, \dots, z_{n-1} from $n = \lceil w/32 \rceil$ successive invocations of `e` taken modulo 2^{32} . Set X_k to $\left(\sum_{j=0}^{n-1} z_j \cdot 2^{32j}\right) \bmod m$.

8 *Complexity:* Exactly $n \cdot r$ invocations of `e`.

```
template<class Sseq> explicit subtract_with_carry_engine(Sseq& q);
```

9 *Effects:* Constructs a `subtract_with_carry_engine` object. With $k = \lceil w/32 \rceil$ and a an array (or equivalent) of length $r \cdot k$, invokes `q.generate(a+0, a+r*k)` and then, iteratively for $i = -r, \dots, -1$, sets X_i to $\left(\sum_{j=0}^{k-1} a_{k(i+r)+j} \cdot 2^{32j}\right) \bmod m$. If X_{-1} is then 0, sets c to 1; otherwise sets c to 0.

30.7.4 Random number engine adaptor class templates [rand.adapt]

30.7.4.1 In general [rand.adapt.general]

1 Each type instantiated from a class template specified in this subclause 30.7.4 satisfies the requirements of a random number engine adaptor (30.7.2.5) type.

2 Except where specified otherwise, the complexity of each function specified in this subclause 30.7.4 is constant.

3 Except where specified otherwise, no function described in this subclause 30.7.4 throws an exception.

4 Every function described in this subclause 30.7.4 that has a function parameter `q` of type `Sseq&` for a template type parameter named `Sseq` that is different from type `seed_seq` throws what and when the invocation of `q.generate` throws.

5 Descriptions are provided in this subclause 30.7.4 only for adaptor operations that are not described in subclause 30.7.2.5 or for operations where there is additional semantic information. In particular, declarations for copy constructors, for copy assignment operators, for streaming operators, and for equality and inequality operators are not shown in the synopses.

6 Each template specified in this subclause 30.7.4 requires one or more relationships, involving the value(s) of its non-type template parameter(s), to hold. A program instantiating any of these templates is ill-formed if any such required relationship fails to hold.

30.7.4.2 Class template `discard_block_engine` [rand.adapt.disc]

1 A `discard_block_engine` random number engine adaptor produces random numbers selected from those produced by some base engine e . The state x_i of a `discard_block_engine` engine adaptor object `x` consists of the state e_i of its base engine `e` and an additional integer n . The size of the state is the size of e 's state plus 1.

- 2 The transition algorithm discards all but $r > 0$ values from each block of $p \geq r$ values delivered by e . The state transition is performed as follows: If $n \geq r$, advance the state of e from e_i to e_{i+p-r} and set n to 0. In any case, then increment n and advance e 's then-current state e_j to e_{j+1} .
- 3 The generation algorithm yields the value returned by the last invocation of $e()$ while advancing e 's state as described above.

```

template<class Engine, size_t p, size_t r>
class discard_block_engine {
public:
    // types
    using result_type = typename Engine::result_type;

    // engine characteristics
    static constexpr size_t block_size = p;
    static constexpr size_t used_block = r;
    static constexpr result_type min() { return Engine::min(); }
    static constexpr result_type max() { return Engine::max(); }

    // constructors and seeding functions
    discard_block_engine();
    explicit discard_block_engine(const Engine& e);
    explicit discard_block_engine(Engine&& e);
    explicit discard_block_engine(result_type s);
    template<class Sseq> explicit discard_block_engine(Sseq& q);
    void seed();
    void seed(result_type s);
    template<class Sseq> void seed(Sseq& q);

    // generating functions
    result_type operator()();
    void discard(unsigned long long z);

    // property functions
    const Engine& base() const noexcept { return e; };

private:
    Engine e;    // exposition only
    int n;      // exposition only
};

```

- 4 The following relations shall hold: $0 < r$ and $r \leq p$.
- 5 The textual representation consists of the textual representation of e followed by the value of n .
- 6 In addition to its behavior pursuant to subclause 30.7.2.5, each constructor that is not a copy constructor sets n to 0.

30.7.4.3 Class template independent_bits_engine [rand.adapt.ibits]

- 1 An `independent_bits_engine` random number engine adaptor combines random numbers that are produced by some base engine e , so as to produce random numbers with a specified number of bits w . The state x_i of an `independent_bits_engine` engine adaptor object x consists of the state e_i of its base engine e ; the size of the state is the size of e 's state.
- 2 The transition and generation algorithms are described in terms of the following integral constants:
 - a) Let $R = e.max() - e.min() + 1$ and $m = \lfloor \log_2 R \rfloor$.
 - b) With n as determined below, let $w_0 = \lfloor w/n \rfloor$, $n_0 = n - w \bmod n$, $y_0 = 2^{w_0} \lfloor R/2^{w_0} \rfloor$, and $y_1 = 2^{w_0+1} \lfloor R/2^{w_0+1} \rfloor$.
 - c) Let $n = \lceil w/m \rceil$ if and only if the relation $R - y_0 \leq \lfloor y_0/n \rfloor$ holds as a result. Otherwise let $n = 1 + \lceil w/m \rceil$.

[Note: The relation $w = n_0 w_0 + (n - n_0)(w_0 + 1)$ always holds. — end note]
- 3 The transition algorithm is carried out by invoking $e()$ as often as needed to obtain n_0 values less than $y_0 + e.min()$ and $n - n_0$ values less than $y_1 + e.min()$.

- 4 The generation algorithm uses the values produced while advancing the state as described above to yield a quantity S obtained as if by the following algorithm:

```

S = 0;
for (k = 0; k ≠ n0; k += 1) {
  do u = e() - e.min(); while (u ≥ y0);
  S = 2w0 · S + u mod 2w0;
}
for (k = n0; k ≠ n; k += 1) {
  do u = e() - e.min(); while (u ≥ y1);
  S = 2w0+1 · S + u mod 2w0+1;
}

template<class Engine, size_t w, class UIntType>
class independent_bits_engine {
public:
  // types
  using result_type = UIntType;

  // engine characteristics
  static constexpr result_type min() { return 0; }
  static constexpr result_type max() { return 2w - 1; }

  // constructors and seeding functions
  independent_bits_engine();
  explicit independent_bits_engine(const Engine& e);
  explicit independent_bits_engine(Engine&& e);
  explicit independent_bits_engine(result_type s);
  template<class Sseq> explicit independent_bits_engine(Sseq& q);
  void seed();
  void seed(result_type s);
  template<class Sseq> void seed(Sseq& q);

  // generating functions
  result_type operator()();
  void discard(unsigned long long z);

  // property functions
  const Engine& base() const noexcept { return e; };

private:
  Engine e; // exposition only
};

```

- 5 The following relations shall hold: $0 < w$ and $w \leq \text{numeric_limits}<\text{result_type}>::\text{digits}$.
- 6 The textual representation consists of the textual representation of e .

30.7.4.4 Class template `shuffle_order_engine` [rand.adapt.shuf]

- 1 A `shuffle_order_engine` random number engine adaptor produces the same random numbers that are produced by some base engine e , but delivers them in a different sequence. The state x_i of a `shuffle_order_engine` engine adaptor object x consists of the state e_i of its base engine e , an additional value Y of the type delivered by e , and an additional sequence V of k values also of the type delivered by e . The size of the state is the size of e 's state plus $k + 1$.
- 2 The transition algorithm permutes the values produced by e . The state transition is performed as follows:
- Calculate an integer $j = \left\lfloor \frac{k \cdot (Y - e_{\min})}{e_{\max} - e_{\min} + 1} \right\rfloor$.
 - Set Y to V_j and then set V_j to $e()$.
- 3 The generation algorithm yields the last value of Y produced while advancing e 's state as described above.

```

template<class Engine, size_t k>
class shuffle_order_engine {
public:
  // types
  using result_type = typename Engine::result_type;

```

```

// engine characteristics
static constexpr size_t table_size = k;
static constexpr result_type min() { return Engine::min(); }
static constexpr result_type max() { return Engine::max(); }

// constructors and seeding functions
shuffle_order_engine();
explicit shuffle_order_engine(const Engine& e);
explicit shuffle_order_engine(Engine&& e);
explicit shuffle_order_engine(result_type s);
template<class Sseq> explicit shuffle_order_engine(Sseq& q);
void seed();
void seed(result_type s);
template<class Sseq> void seed(Sseq& q);

// generating functions
result_type operator()();
void discard(unsigned long long z);

// property functions
const Engine& base() const noexcept { return e; };

private:
    Engine e;           // exposition only
    result_type V[k];  // exposition only
    result_type Y;     // exposition only
};

```

- 4 The following relation shall hold: $0 < k$.
- 5 The textual representation consists of the textual representation of e , followed by the k values of V , followed by the value of Y .
- 6 In addition to its behavior pursuant to subclause 30.7.2.5, each constructor that is not a copy constructor initializes $V[0], \dots, V[k-1]$ and Y , in that order, with values returned by successive invocations of $e()$.

30.7.5 Engines and engine adaptors with predefined parameters [rand.predef]

```

using minstd_rand0 =
    linear_congruential_engine<uint_fast32_t, 16807, 0, 2147483647>;

```

- 1 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `minstd_rand0` shall produce the value 1043618065.

```

using minstd_rand =
    linear_congruential_engine<uint_fast32_t, 48271, 0, 2147483647>;

```

- 2 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `minstd_rand` shall produce the value 399268537.

```

using mt19937 =
    mersenne_twister_engine<uint_fast32_t,
        32,624,397,31,0x9908b0df,11,0xffffffff,7,0x9d2c5680,15,0xefc60000,18,1812433253>;

```

- 3 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `mt19937` shall produce the value 4123659995.

```

using mt19937_64 =
    mersenne_twister_engine<uint_fast64_t,
        64,312,156,31,0xb5026f5aa96619e9,29,
        0x5555555555555555,17,
        0x71d67ffeda60000,37,
        0xfff7eee000000000,43,
        6364136223846793005>;

```

- 4 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `mt19937_64` shall produce the value 9981545732273789042.

```
using ranlux24_base =
    subtract_with_carry_engine<uint_fast32_t, 24, 10, 24>;
```

- 5 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `ranlux24_base` shall produce the value 7937952.

```
using ranlux48_base =
    subtract_with_carry_engine<uint_fast64_t, 48, 5, 12>;
```

- 6 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `ranlux48_base` shall produce the value 61839128582725.

```
using ranlux24 = discard_block_engine<ranlux24_base, 223, 23>;
```

- 7 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `ranlux24` shall produce the value 9901578.

```
using ranlux48 = discard_block_engine<ranlux48_base, 389, 11>;
```

- 8 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `ranlux48` shall produce the value 249142670248501.

```
using knuth_b = shuffle_order_engine<minstd_rand0,256>;
```

- 9 *Required behavior:* The 10000th consecutive invocation of a default-constructed object of type `knuth_b` shall produce the value 1112339016.

```
using default_random_engine = implementation-defined;
```

- 10 *Remarks:* The choice of engine type named by this `typedef` is implementation-defined. [Note: The implementation may select this type on the basis of performance, size, quality, or any combination of such factors, so as to provide at least acceptable engine behavior for relatively casual, inexperienced, and/or lightweight use. Because different implementations may select different underlying engine types, code that uses this `typedef` need not generate identical sequences across implementations. — end note]

30.7.6 Class `random_device`

[`rand.device`]

- 1 A `random_device` uniform random bit generator produces nondeterministic random numbers.
- 2 If implementation limitations prevent generating nondeterministic random numbers, the implementation may employ a random number engine.

```
class random_device {
public:
    // types
    using result_type = unsigned int;

    // generator characteristics
    static constexpr result_type min() { return numeric_limits<result_type>::min(); }
    static constexpr result_type max() { return numeric_limits<result_type>::max(); }

    // constructors
    random_device() : random_device(implementation-defined) {}
    explicit random_device(const string& token);

    // generating functions
    result_type operator()();

    // property functions
    double entropy() const noexcept;

    // no copy functions
    random_device(const random_device& ) = delete;
    void operator=(const random_device& ) = delete;
};
```

```
explicit random_device(const string& token);
```

3 *Effects:* Constructs a `random_device` nondeterministic uniform random bit generator object. The semantics of the `token` parameter and the token value used by the default constructor are implementation-defined.²⁷³

4 *Throws:* A value of an implementation-defined type derived from `exception` if the `random_device` could not be initialized.

```
double entropy() const noexcept;
```

5 *Returns:* If the implementation employs a random number engine, returns 0.0. Otherwise, returns an entropy estimate²⁷⁴ for the random numbers returned by `operator()`, in the range `min()` to `log2(max() + 1)`.

```
result_type operator()();
```

6 *Returns:* A nondeterministic random value, uniformly distributed between `min()` and `max()`, inclusive. It is implementation-defined how these values are generated.

7 *Throws:* A value of an implementation-defined type derived from `exception` if a random number could not be obtained.

30.7.7 Utilities

[rand.util]

30.7.7.1 Class `seed_seq`

[rand.util.seedseq]

```
class seed_seq {
public:
    // types
    using result_type = uint_least32_t;

    // constructors
    seed_seq();
    template<class T>
        seed_seq(initializer_list<T> il);
    template<class InputIterator>
        seed_seq(InputIterator begin, InputIterator end);

    // generating functions
    template<class RandomAccessIterator>
        void generate(RandomAccessIterator begin, RandomAccessIterator end);

    // property functions
    size_t size() const noexcept;
    template<class OutputIterator>
        void param(OutputIterator dest) const;

    // no copy functions
    seed_seq(const seed_seq& ) = delete;
    void operator=(const seed_seq& ) = delete;

private:
    vector<result_type> v;    // exposition only
};
```

```
seed_seq();
```

1 *Effects:* Constructs a `seed_seq` object as if by default-constructing its member `v`.

2 *Throws:* Nothing.

```
template<class T>
    seed_seq(initializer_list<T> il);
```

3 *Requires:* `T` shall be an integer type.

²⁷³) The parameter is intended to allow an implementation to differentiate between different sources of randomness.

²⁷⁴) If a device has n states whose respective probabilities are P_0, \dots, P_{n-1} , the device entropy S is defined as

$$S = - \sum_{i=0}^{n-1} P_i \cdot \log P_i.$$

4 *Effects:* Same as `seed_seq(il.begin(), il.end())`.

```
template<class InputIterator>
seed_seq(InputIterator begin, InputIterator end);
```

5 *Requires:* `InputIterator` shall satisfy the *Cpp17InputIterator* requirements (28.2.3). Moreover, `iterator_traits<InputIterator>::value_type` shall denote an integer type.

6 *Effects:* Constructs a `seed_seq` object by the following algorithm:

```
for( InputIterator s = begin; s != end; ++s)
    v.push_back((*s)mod232);
```

```
template<class RandomAccessIterator>
void generate(RandomAccessIterator begin, RandomAccessIterator end);
```

7 *Requires:* `RandomAccessIterator` shall satisfy the *Cpp17RandomAccessIterator* requirements (28.2.7) and the requirements of a mutable iterator. Moreover, `iterator_traits<RandomAccessIterator>::value_type` shall denote an unsigned integer type capable of accommodating 32-bit quantities.

8 *Effects:* Does nothing if `begin == end`. Otherwise, with $s = v.size()$ and $n = end - begin$, fills the supplied range `[begin, end)` according to the following algorithm in which each operation is to be carried out modulo 2^{32} , each indexing operator applied to `begin` is to be taken modulo n , and $T(x)$ is defined as $x \text{ xor } (x \text{ rshift } 27)$:

a) By way of initialization, set each element of the range to the value `0x8b8b8b8b`. Additionally, for use in subsequent steps, let $p = (n - t)/2$ and let $q = p + t$, where

$$t = (n \geq 623) ? 11 : (n \geq 68) ? 7 : (n \geq 39) ? 5 : (n \geq 7) ? 3 : (n - 1)/2;$$

b) With m as the larger of $s + 1$ and n , transform the elements of the range: iteratively for $k = 0, \dots, m - 1$, calculate values

$$\begin{aligned} r_1 &= 1664525 \cdot T(\text{begin}[k] \text{ xor } \text{begin}[k + p] \text{ xor } \text{begin}[k - 1]) \\ r_2 &= r_1 + \begin{cases} s & , k = 0 \\ k \bmod n + v[k - 1] & , 0 < k \leq s \\ k \bmod n & , s < k \end{cases} \end{aligned}$$

and, in order, increment `begin[k + p]` by r_1 , increment `begin[k + q]` by r_2 , and set `begin[k]` to r_2 .

c) Transform the elements of the range again, beginning where the previous step ended: iteratively for $k = m, \dots, m + n - 1$, calculate values

$$\begin{aligned} r_3 &= 1566083941 \cdot T(\text{begin}[k] + \text{begin}[k + p] + \text{begin}[k - 1]) \\ r_4 &= r_3 - (k \bmod n) \end{aligned}$$

and, in order, update `begin[k + p]` by xoring it with r_3 , update `begin[k + q]` by xoring it with r_4 , and set `begin[k]` to r_4 .

9 *Throws:* What and when `RandomAccessIterator` operations of `begin` and `end` throw.

```
size_t size() const noexcept;
```

10 *Returns:* The number of 32-bit units that would be returned by a call to `param()`.

11 *Complexity:* Constant time.

```
template<class OutputIterator>
void param(OutputIterator dest) const;
```

12 *Requires:* `OutputIterator` shall satisfy the *Cpp17OutputIterator* requirements (28.2.4). Moreover, the expression `*dest = rt` shall be valid for a value `rt` of type `result_type`.

13 *Effects:* Copies the sequence of prepared 32-bit units to the given destination, as if by executing the following statement:

```
copy(v.begin(), v.end(), dest);
```

14 *Throws:* What and when `OutputIterator` operations of `dest` throw.

30.7.7.2 Function template `generate_canonical` [rand.util.canonical]

1 Each function instantiated from the template described in this subclause 30.7.7.2 maps the result of one or more invocations of a supplied uniform random bit generator `g` to one member of the specified `RealType` such that, if the values g_i produced by `g` are uniformly distributed, the instantiation's results t_j , $0 \leq t_j < 1$, are distributed as uniformly as possible as specified below.

2 [Note: Obtaining a value in this way can be a useful step in the process of transforming a value generated by a uniform random bit generator into a value that can be delivered by a random number distribution. — end note]

```
template<class RealType, size_t bits, class URBG>
RealType generate_canonical(URBG& g);
```

3 *Complexity:* Exactly $k = \max(1, \lceil b/\log_2 R \rceil)$ invocations of `g`, where b^{275} is the lesser of `numeric_limits<RealType>::digits` and `bits`, and R is the value of `g.max() - g.min() + 1`.

4 *Effects:* Invokes `g()` k times to obtain values g_0, \dots, g_{k-1} , respectively. Calculates a quantity

$$S = \sum_{i=0}^{k-1} (g_i - g.\text{min}()) \cdot R^i$$

using arithmetic of type `RealType`.

5 *Returns:* S/R^k .

6 *Throws:* What and when `g` throws.

30.7.8 Random number distribution class templates [rand.dist]

30.7.8.1 In general [rand.dist.general]

1 Each type instantiated from a class template specified in this subclause 30.7.8 satisfies the requirements of a random number distribution (30.7.2.6) type.

2 Descriptions are provided in this subclause 30.7.8 only for distribution operations that are not described in 30.7.2.6 or for operations where there is additional semantic information. In particular, declarations for copy constructors, for copy assignment operators, for streaming operators, and for equality and inequality operators are not shown in the synopses.

3 The algorithms for producing each of the specified distributions are implementation-defined.

4 The value of each probability density function $p(z)$ and of each discrete probability function $P(z_i)$ specified in this subclause is 0 everywhere outside its stated domain.

30.7.8.2 Uniform distributions [rand.dist.uni]

30.7.8.2.1 Class template `uniform_int_distribution` [rand.dist.uni.int]

1 A `uniform_int_distribution` random number distribution produces random integers i , $a \leq i \leq b$, distributed according to the constant discrete probability function

$$P(i | a, b) = 1/(b - a + 1) .$$

```
template<class IntType = int>
class uniform_int_distribution {
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructors and reset functions
    uniform_int_distribution() : uniform_int_distribution(0) {}
    explicit uniform_int_distribution(IntType a, IntType b = numeric_limits<IntType>::max());
    explicit uniform_int_distribution(const param_type& parm);
    void reset();
```

275) b is introduced to avoid any attempt to produce more bits of randomness than can be held in `RealType`.

```

// generating functions
template<class URBG>
    result_type operator()(URBG& g);
template<class URBG>
    result_type operator()(URBG& g, const param_type& parm);

// property functions
result_type a() const;
result_type b() const;
param_type param() const;
void param(const param_type& parm);
result_type min() const;
result_type max() const;
};

```

```
explicit uniform_int_distribution(IntType a, IntType b = numeric_limits<IntType>::max());
```

2 *Requires:* $a \leq b$.

3 *Effects:* Constructs a `uniform_int_distribution` object; `a` and `b` correspond to the respective parameters of the distribution.

```
result_type a() const;
```

4 *Returns:* The value of the `a` parameter with which the object was constructed.

```
result_type b() const;
```

5 *Returns:* The value of the `b` parameter with which the object was constructed.

30.7.8.2.2 Class template `uniform_real_distribution` [rand.dist.uni.real]

1 A `uniform_real_distribution` random number distribution produces random numbers x , $a \leq x < b$, distributed according to the constant probability density function

$$p(x | a, b) = 1/(b - a) .$$

[Note: This implies that $p(x | a, b)$ is undefined when $a == b$. — end note]

```

template<class RealType = double>
class uniform_real_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructors and reset functions
    uniform_real_distribution() : uniform_real_distribution(0.0) {}
    explicit uniform_real_distribution(RealType a, RealType b = 1.0);
    explicit uniform_real_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    result_type a() const;
    result_type b() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```



```
explicit uniform_real_distribution(RealType a, RealType b = 1.0);
```

2 *Requires:* $a \leq b$ and $b - a \leq \text{numeric_limits}\langle \text{RealType} \rangle::\text{max}()$.

3 *Effects:* Constructs a `uniform_real_distribution` object; a and b correspond to the respective parameters of the distribution.

```
result_type a() const;
```

4 *Returns:* The value of the a parameter with which the object was constructed.

```
result_type b() const;
```

5 *Returns:* The value of the b parameter with which the object was constructed.

30.7.8.3 Bernoulli distributions [rand.dist.bern]

30.7.8.3.1 Class `bernoulli_distribution` [rand.dist.bern.bernoulli]

1 A `bernoulli_distribution` random number distribution produces `bool` values b distributed according to the discrete probability function

$$P(b|p) = \begin{cases} p & \text{if } b = \text{true, or} \\ 1 - p & \text{if } b = \text{false.} \end{cases}$$

```
class bernoulli_distribution {
public:
    // types
    using result_type = bool;
    using param_type = unspecified;

    // constructors and reset functions
    bernoulli_distribution() : bernoulli_distribution(0.5) {}
    explicit bernoulli_distribution(double p);
    explicit bernoulli_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    double p() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
explicit bernoulli_distribution(double p);
```

2 *Requires:* $0 \leq p \leq 1$.

3 *Effects:* Constructs a `bernoulli_distribution` object; p corresponds to the parameter of the distribution.

```
double p() const;
```

4 *Returns:* The value of the p parameter with which the object was constructed.

30.7.8.3.2 Class `template binomial_distribution` [rand.dist.bern.bin]

1 A `binomial_distribution` random number distribution produces integer values $i \geq 0$ distributed according to the discrete probability function

$$P(i|t,p) = \binom{t}{i} \cdot p^i \cdot (1-p)^{t-i}.$$

```

template<class IntType = int>
class binomial_distribution {
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructors and reset functions
    binomial_distribution() : binomial_distribution(1) {}
    explicit binomial_distribution(IntType t, double p = 0.5);
    explicit binomial_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    IntType t() const;
    double p() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit binomial_distribution(IntType t, double p = 0.5);
```

2 *Requires:* $0 \leq p \leq 1$ and $0 \leq t$.

3 *Effects:* Constructs a `binomial_distribution` object; `t` and `p` correspond to the respective parameters of the distribution.

```
IntType t() const;
```

4 *Returns:* The value of the `t` parameter with which the object was constructed.

```
double p() const;
```

5 *Returns:* The value of the `p` parameter with which the object was constructed.

30.7.8.3.3 Class template `geometric_distribution` [rand.dist.bern.geo]

1 A `geometric_distribution` random number distribution produces integer values $i \geq 0$ distributed according to the discrete probability function

$$P(i | p) = p \cdot (1 - p)^i .$$

```

template<class IntType = int>
class geometric_distribution {
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructors and reset functions
    geometric_distribution() : geometric_distribution(0.5) {}
    explicit geometric_distribution(double p);
    explicit geometric_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

```

```

    // property functions
    double p() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit geometric_distribution(double p);
```

2 *Requires:* $0 < p < 1$.

3 *Effects:* Constructs a `geometric_distribution` object; `p` corresponds to the parameter of the distribution.

```
double p() const;
```

4 *Returns:* The value of the `p` parameter with which the object was constructed.

30.7.8.3.4 Class template `negative_binomial_distribution` [rand.dist.bern.negbin]

1 A `negative_binomial_distribution` random number distribution produces random integers $i \geq 0$ distributed according to the discrete probability function

$$P(i | k, p) = \binom{k + i - 1}{i} \cdot p^k \cdot (1 - p)^i .$$

[Note: This implies that $P(i | k, p)$ is undefined when `p == 1`. — end note]

```

template<class IntType = int>
class negative_binomial_distribution {
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructor and reset functions
    negative_binomial_distribution() : negative_binomial_distribution(1) {}
    explicit negative_binomial_distribution(IntType k, double p = 0.5);
    explicit negative_binomial_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    IntType k() const;
    double p() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit negative_binomial_distribution(IntType k, double p = 0.5);
```

2 *Requires:* $0 < p \leq 1$ and $0 < k$.

3 *Effects:* Constructs a `negative_binomial_distribution` object; `k` and `p` correspond to the respective parameters of the distribution.

```
IntType k() const;
```

4 *Returns:* The value of the `k` parameter with which the object was constructed.

```
double p() const;
```

⁵ *Returns:* The value of the `p` parameter with which the object was constructed.

30.7.8.4 Poisson distributions

[rand.dist.pois]

30.7.8.4.1 Class template `poisson_distribution`

[rand.dist.pois.poisson]

¹ A `poisson_distribution` random number distribution produces integer values $i \geq 0$ distributed according to the discrete probability function

$$P(i | \mu) = \frac{e^{-\mu} \mu^i}{i!} .$$

The distribution parameter μ is also known as this distribution's *mean*.

```
template<class IntType = int>
class poisson_distribution
{
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructors and reset functions
    poisson_distribution() : poisson_distribution(1.0) {}
    explicit poisson_distribution(double mean);
    explicit poisson_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    double mean() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
explicit poisson_distribution(double mean);
```

² *Requires:* $0 < \text{mean}$.

³ *Effects:* Constructs a `poisson_distribution` object; `mean` corresponds to the parameter of the distribution.

```
double mean() const;
```

⁴ *Returns:* The value of the `mean` parameter with which the object was constructed.

30.7.8.4.2 Class template `exponential_distribution`

[rand.dist.pois.exp]

¹ An `exponential_distribution` random number distribution produces random numbers $x > 0$ distributed according to the probability density function

$$p(x | \lambda) = \lambda e^{-\lambda x} .$$

```
template<class RealType = double>
class exponential_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;
```

```

// constructors and reset functions
exponential_distribution() : exponential_distribution(1.0) {}
explicit exponential_distribution(RealType lambda);
explicit exponential_distribution(const param_type& parm);
void reset();

// generating functions
template<class URBG>
    result_type operator()(URBG& g);
template<class URBG>
    result_type operator()(URBG& g, const param_type& parm);

// property functions
RealType lambda() const;
param_type param() const;
void param(const param_type& parm);
result_type min() const;
result_type max() const;
};

```

```
explicit exponential_distribution(RealType lambda);
```

2 *Requires:* $0 < \text{lambda}$.

3 *Effects:* Constructs an `exponential_distribution` object; `lambda` corresponds to the parameter of the distribution.

```
RealType lambda() const;
```

4 *Returns:* The value of the `lambda` parameter with which the object was constructed.

30.7.8.4.3 Class template `gamma_distribution` [rand.dist.pois.gamma]

1 A `gamma_distribution` random number distribution produces random numbers $x > 0$ distributed according to the probability density function

$$p(x | \alpha, \beta) = \frac{e^{-x/\beta}}{\beta^\alpha \cdot \Gamma(\alpha)} \cdot x^{\alpha-1} .$$

```

template<class RealType = double>
class gamma_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructors and reset functions
    gamma_distribution() : gamma_distribution(1.0) {}
    explicit gamma_distribution(RealType alpha, RealType beta = 1.0);
    explicit gamma_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType alpha() const;
    RealType beta() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit gamma_distribution(RealType alpha, RealType beta = 1.0);
```

2 *Requires:* $0 < \alpha$ and $0 < \beta$.

3 *Effects:* Constructs a `gamma_distribution` object; `alpha` and `beta` correspond to the parameters of the distribution.

```
RealType alpha() const;
```

4 *Returns:* The value of the `alpha` parameter with which the object was constructed.

```
RealType beta() const;
```

5 *Returns:* The value of the `beta` parameter with which the object was constructed.

30.7.8.4.4 Class template `weibull_distribution` [rand.dist.pois.weibull]

1 A `weibull_distribution` random number distribution produces random numbers $x \geq 0$ distributed according to the probability density function

$$p(x | a, b) = \frac{a}{b} \cdot \left(\frac{x}{b}\right)^{a-1} \cdot \exp\left(-\left(\frac{x}{b}\right)^a\right).$$

```
template<class RealType = double>
class weibull_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    weibull_distribution() : weibull_distribution(1.0) {}
    explicit weibull_distribution(RealType a, RealType b = 1.0);
    explicit weibull_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType a() const;
    RealType b() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
explicit weibull_distribution(RealType a, RealType b = 1.0);
```

2 *Requires:* $0 < a$ and $0 < b$.

3 *Effects:* Constructs a `weibull_distribution` object; `a` and `b` correspond to the respective parameters of the distribution.

```
RealType a() const;
```

4 *Returns:* The value of the `a` parameter with which the object was constructed.

```
RealType b() const;
```

5 *Returns:* The value of the `b` parameter with which the object was constructed.

30.7.8.4.5 Class template `extreme_value_distribution` [rand.dist.pois.extreme]

- ¹ An `extreme_value_distribution` random number distribution produces random numbers x distributed according to the probability density function²⁷⁶

$$p(x | a, b) = \frac{1}{b} \cdot \exp\left(\frac{a-x}{b} - \exp\left(\frac{a-x}{b}\right)\right).$$

```
template<class RealType = double>
class extreme_value_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    extreme_value_distribution() : extreme_value_distribution(0.0) {}
    explicit extreme_value_distribution(RealType a, RealType b = 1.0);
    explicit extreme_value_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType a() const;
    RealType b() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
explicit extreme_value_distribution(RealType a, RealType b = 1.0);
```

- ² *Requires:* $0 < b$.

- ³ *Effects:* Constructs an `extreme_value_distribution` object; a and b correspond to the respective parameters of the distribution.

```
RealType a() const;
```

- ⁴ *Returns:* The value of the a parameter with which the object was constructed.

```
RealType b() const;
```

- ⁵ *Returns:* The value of the b parameter with which the object was constructed.

30.7.8.5 Normal distributions [rand.dist.norm]

30.7.8.5.1 Class template `normal_distribution` [rand.dist.norm.normal]

- ¹ A `normal_distribution` random number distribution produces random numbers x distributed according to the probability density function

$$p(x | \mu, \sigma) = \frac{1}{\sigma\sqrt{2\pi}} \cdot \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right).$$

The distribution parameters μ and σ are also known as this distribution's *mean* and *standard deviation*.

```
template<class RealType = double>
class normal_distribution {
public:
    // types
    using result_type = RealType;
```

²⁷⁶) The distribution corresponding to this probability density function is also known (with a possible change of variable) as the Gumbel Type I, the log-Weibull, or the Fisher-Tippett Type I distribution.

```

using param_type = unspecified;

// constructors and reset functions
normal_distribution() : normal_distribution(0.0) {}
explicit normal_distribution(RealType mean, RealType stddev = 1.0);
explicit normal_distribution(const param_type& parm);
void reset();

// generating functions
template<class URBG>
    result_type operator()(URBG& g);
template<class URBG>
    result_type operator()(URBG& g, const param_type& parm);

// property functions
RealType mean() const;
RealType stddev() const;
param_type param() const;
void param(const param_type& parm);
result_type min() const;
result_type max() const;
};

```

```
explicit normal_distribution(RealType mean, RealType stddev = 1.0);
```

2 *Requires:* $0 < \text{stddev}$.

3 *Effects:* Constructs a `normal_distribution` object; `mean` and `stddev` correspond to the respective parameters of the distribution.

```
RealType mean() const;
```

4 *Returns:* The value of the `mean` parameter with which the object was constructed.

```
RealType stddev() const;
```

5 *Returns:* The value of the `stddev` parameter with which the object was constructed.

30.7.8.5.2 Class template `lognormal_distribution` [rand.dist.norm.lognormal]

1 A `lognormal_distribution` random number distribution produces random numbers $x > 0$ distributed according to the probability density function

$$p(x | m, s) = \frac{1}{sx\sqrt{2\pi}} \cdot \exp\left(-\frac{(\ln x - m)^2}{2s^2}\right).$$

```

template<class RealType = double>
class lognormal_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    lognormal_distribution() : lognormal_distribution(0.0) {}
    explicit lognormal_distribution(RealType m, RealType s = 1.0);
    explicit lognormal_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

```



```

    // property functions
    RealType m() const;
    RealType s() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit lognormal_distribution(RealType m, RealType s = 1.0);
```

2 *Requires:* $0 < s$.

3 *Effects:* Constructs a `lognormal_distribution` object; `m` and `s` correspond to the respective parameters of the distribution.

```
RealType m() const;
```

4 *Returns:* The value of the `m` parameter with which the object was constructed.

```
RealType s() const;
```

5 *Returns:* The value of the `s` parameter with which the object was constructed.

30.7.8.5.3 Class template `chi_squared_distribution` [`rand.dist.norm.chisq`]

1 A `chi_squared_distribution` random number distribution produces random numbers $x > 0$ distributed according to the probability density function

$$p(x | n) = \frac{x^{(n/2)-1} \cdot e^{-x/2}}{\Gamma(n/2) \cdot 2^{n/2}}.$$

```

template<class RealType = double>
class chi_squared_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    chi_squared_distribution() : chi_squared_distribution(1) {}
    explicit chi_squared_distribution(RealType n);
    explicit chi_squared_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType n() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
explicit chi_squared_distribution(RealType n);
```

2 *Requires:* $0 < n$.

3 *Effects:* Constructs a `chi_squared_distribution` object; `n` corresponds to the parameter of the distribution.

```
RealType n() const;
```

4 *Returns:* The value of the `n` parameter with which the object was constructed.

30.7.8.5.4 Class template cauchy_distribution**[rand.dist.norm.cauchy]**

- ¹ A `cauchy_distribution` random number distribution produces random numbers x distributed according to the probability density function

$$p(x | a, b) = \left(\pi b \left(1 + \left(\frac{x - a}{b} \right)^2 \right) \right)^{-1}.$$

```
template<class RealType = double>
class cauchy_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    cauchy_distribution() : cauchy_distribution(0.0) {}
    explicit cauchy_distribution(RealType a, RealType b = 1.0);
    explicit cauchy_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType a() const;
    RealType b() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
explicit cauchy_distribution(RealType a, RealType b = 1.0);
```

- ² *Requires:* $0 < b$.

- ³ *Effects:* Constructs a `cauchy_distribution` object; a and b correspond to the respective parameters of the distribution.

```
RealType a() const;
```

- ⁴ *Returns:* The value of the a parameter with which the object was constructed.

```
RealType b() const;
```

- ⁵ *Returns:* The value of the b parameter with which the object was constructed.

30.7.8.5.5 Class template fisher_f_distribution**[rand.dist.norm.f]**

- ¹ A `fisher_f_distribution` random number distribution produces random numbers $x \geq 0$ distributed according to the probability density function

$$p(x | m, n) = \frac{\Gamma((m+n)/2)}{\Gamma(m/2) \Gamma(n/2)} \cdot \left(\frac{m}{n}\right)^{m/2} \cdot x^{(m/2)-1} \cdot \left(1 + \frac{mx}{n}\right)^{-(m+n)/2}.$$

```
template<class RealType = double>
class fisher_f_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;
```

```

// constructor and reset functions
fisher_f_distribution() : fisher_f_distribution(1) {}
explicit fisher_f_distribution(RealType m, RealType n = 1);
explicit fisher_f_distribution(const param_type& parm);
void reset();

// generating functions
template<class URBG>
    result_type operator()(URBG& g);
template<class URBG>
    result_type operator()(URBG& g, const param_type& parm);

// property functions
RealType m() const;
RealType n() const;
param_type param() const;
void param(const param_type& parm);
result_type min() const;
result_type max() const;
};

```

```
explicit fisher_f_distribution(RealType m, RealType n = 1);
```

2 *Requires:* $0 < m$ and $0 < n$.

3 *Effects:* Constructs a `fisher_f_distribution` object; `m` and `n` correspond to the respective parameters of the distribution.

```
RealType m() const;
```

4 *Returns:* The value of the `m` parameter with which the object was constructed.

```
RealType n() const;
```

5 *Returns:* The value of the `n` parameter with which the object was constructed.

30.7.8.5.6 Class template `student_t_distribution` [rand.dist.norm.t]

1 A `student_t_distribution` random number distribution produces random numbers x distributed according to the probability density function

$$p(x | n) = \frac{1}{\sqrt{n\pi}} \cdot \frac{\Gamma((n+1)/2)}{\Gamma(n/2)} \cdot \left(1 + \frac{x^2}{n}\right)^{-(n+1)/2}.$$

```

template<class RealType = double>
class student_t_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    student_t_distribution() : student_t_distribution(1) {}
    explicit student_t_distribution(RealType n);
    explicit student_t_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    RealType n() const;
    param_type param() const;
    void param(const param_type& parm);
};

```

```

    result_type min() const;
    result_type max() const;
};

```

```
explicit student_t_distribution(RealType n);
```

2 *Requires:* $0 < n$.

3 *Effects:* Constructs a `student_t_distribution` object; `n` corresponds to the parameter of the distribution.

```
RealType n() const;
```

4 *Returns:* The value of the `n` parameter with which the object was constructed.

30.7.8.6 Sampling distributions [rand.dist.samp]

30.7.8.6.1 Class template `discrete_distribution` [rand.dist.samp.discrete]

1 A `discrete_distribution` random number distribution produces random integers i , $0 \leq i < n$, distributed according to the discrete probability function

$$P(i | p_0, \dots, p_{n-1}) = p_i .$$

2 Unless specified otherwise, the distribution parameters are calculated as: $p_k = w_k/S$ for $k = 0, \dots, n-1$, in which the values w_k , commonly known as the *weights*, shall be non-negative, non-NaN, and non-infinity. Moreover, the following relation shall hold: $0 < S = w_0 + \dots + w_{n-1}$.

```

template<class IntType = int>
class discrete_distribution {
public:
    // types
    using result_type = IntType;
    using param_type = unspecified;

    // constructor and reset functions
    discrete_distribution();
    template<class InputIterator>
        discrete_distribution(InputIterator firstW, InputIterator lastW);
    discrete_distribution(initializer_list<double> w1);
    template<class UnaryOperation>
        discrete_distribution(size_t nw, double xmin, double xmax, UnaryOperation fw);
    explicit discrete_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    vector<double> probabilities() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
discrete_distribution();
```

3 *Effects:* Constructs a `discrete_distribution` object with $n = 1$ and $p_0 = 1$. [Note: Such an object will always deliver the value 0. — end note]

```

template<class InputIterator>
discrete_distribution(InputIterator firstW, InputIterator lastW);

```

4 *Requires:* `InputIterator` shall satisfy the *Cpp17InputIterator* requirements (28.2.3). Moreover, `iterator_traits<InputIterator>::value_type` shall denote a type that is convertible to `double`.

If `firstW == lastW`, let $n = 1$ and $w_0 = 1$. Otherwise, `[firstW, lastW)` shall form a sequence w of length $n > 0$.

5 *Effects*: Constructs a `discrete_distribution` object with probabilities given by the formula above.

```
discrete_distribution(initializer_list<double> wl);
```

6 *Effects*: Same as `discrete_distribution(wl.begin(), wl.end())`.

```
template<class UnaryOperation>
```

```
discrete_distribution(size_t nw, double xmin, double xmax, UnaryOperation fw);
```

7 *Requires*: Each instance of type `UnaryOperation` shall be a function object (24.14) whose return type shall be convertible to `double`. Moreover, `double` shall be convertible to the type of `UnaryOperation`'s sole parameter. If $nw = 0$, let $n = 1$, otherwise let $n = nw$. The relation $0 < \delta = (xmax - xmin)/n$ shall hold.

8 *Effects*: Constructs a `discrete_distribution` object with probabilities given by the formula above, using the following values: If $nw = 0$, let $w_0 = 1$. Otherwise, let $w_k = fw(xmin + k \cdot \delta + \delta/2)$ for $k = 0, \dots, n - 1$.

9 *Complexity*: The number of invocations of `fw` shall not exceed n .

```
vector<double> probabilities() const;
```

10 *Returns*: A `vector<double>` whose `size` member returns n and whose `operator[]` member returns p_k when invoked with argument k for $k = 0, \dots, n - 1$.

30.7.8.6.2 Class template `piecewise_constant_distribution` [rand.dist.samp.pconst]

1 A `piecewise_constant_distribution` random number distribution produces random numbers x , $b_0 \leq x < b_n$, uniformly distributed over each subinterval $[b_i, b_{i+1})$ according to the probability density function

$$p(x | b_0, \dots, b_n, \rho_0, \dots, \rho_{n-1}) = \rho_i, \text{ for } b_i \leq x < b_{i+1}.$$

2 The $n + 1$ distribution parameters b_i , also known as this distribution's *interval boundaries*, shall satisfy the relation $b_i < b_{i+1}$ for $i = 0, \dots, n - 1$. Unless specified otherwise, the remaining n distribution parameters are calculated as:

$$\rho_k = \frac{w_k}{S \cdot (b_{k+1} - b_k)} \text{ for } k = 0, \dots, n - 1,$$

in which the values w_k , commonly known as the *weights*, shall be non-negative, non-NaN, and non-infinity. Moreover, the following relation shall hold: $0 < S = w_0 + \dots + w_{n-1}$.

```
template<class RealType = double>
class piecewise_constant_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    piecewise_constant_distribution();
    template<class InputIteratorB, class InputIteratorW>
        piecewise_constant_distribution(InputIteratorB firstB, InputIteratorB lastB,
                                       InputIteratorW firstW);

    template<class UnaryOperation>
        piecewise_constant_distribution(initializer_list<RealType> bl, UnaryOperation fw);
    template<class UnaryOperation>
        piecewise_constant_distribution(size_t nw, RealType xmin, RealType xmax,
                                       UnaryOperation fw);
    explicit piecewise_constant_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);
```

```

    // property functions
    vector<result_type> intervals() const;
    vector<result_type> densities() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};

```

```
piecewise_constant_distribution();
```

- 3 *Effects:* Constructs a `piecewise_constant_distribution` object with $n = 1$, $\rho_0 = 1$, $b_0 = 0$, and $b_1 = 1$.

```

template<class InputIteratorB, class InputIteratorW>
piecewise_constant_distribution(InputIteratorB firstB, InputIteratorB lastB,
                               InputIteratorW firstW);

```

- 4 *Requires:* `InputIteratorB` and `InputIteratorW` shall each satisfy the *Cpp17InputIterator* requirements (28.2.3). Moreover, `iterator_traits<InputIteratorB>::value_type` and `iterator_traits<InputIteratorW>::value_type` shall each denote a type that is convertible to `double`. If `firstB == lastB` or `++firstB == lastB`, let $n = 1$, $w_0 = 1$, $b_0 = 0$, and $b_1 = 1$. Otherwise, $[firstB, lastB)$ shall form a sequence b of length $n + 1$, the length of the sequence w starting from `firstW` shall be at least n , and any w_k for $k \geq n$ shall be ignored by the distribution.

- 5 *Effects:* Constructs a `piecewise_constant_distribution` object with parameters as specified above.

```

template<class UnaryOperation>
piecewise_constant_distribution(initializer_list<RealType> bl, UnaryOperation fw);

```

- 6 *Requires:* Each instance of type `UnaryOperation` shall be a function object (24.14) whose return type shall be convertible to `double`. Moreover, `double` shall be convertible to the type of `UnaryOperation`'s sole parameter.

- 7 *Effects:* Constructs a `piecewise_constant_distribution` object with parameters taken or calculated from the following values: If `bl.size() < 2`, let $n = 1$, $w_0 = 1$, $b_0 = 0$, and $b_1 = 1$. Otherwise, let $[bl.begin(), bl.end())$ form a sequence b_0, \dots, b_n , and let $w_k = fw((b_{k+1} + b_k)/2)$ for $k = 0, \dots, n - 1$.

- 8 *Complexity:* The number of invocations of `fw` shall not exceed n .

```

template<class UnaryOperation>
piecewise_constant_distribution(size_t nw, RealType xmin, RealType xmax, UnaryOperation fw);

```

- 9 *Requires:* Each instance of type `UnaryOperation` shall be a function object (24.14) whose return type shall be convertible to `double`. Moreover, `double` shall be convertible to the type of `UnaryOperation`'s sole parameter. If `nw = 0`, let $n = 1$, otherwise let $n = nw$. The relation $0 < \delta = (xmax - xmin)/n$ shall hold.

- 10 *Effects:* Constructs a `piecewise_constant_distribution` object with parameters taken or calculated from the following values: Let $b_k = xmin + k \cdot \delta$ for $k = 0, \dots, n$, and $w_k = fw(b_k + \delta/2)$ for $k = 0, \dots, n - 1$.

- 11 *Complexity:* The number of invocations of `fw` shall not exceed n .

```
vector<result_type> intervals() const;
```

- 12 *Returns:* A `vector<result_type>` whose `size` member returns $n + 1$ and whose `operator[]` member returns b_k when invoked with argument k for $k = 0, \dots, n$.

```
vector<result_type> densities() const;
```

- 13 *Returns:* A `vector<result_type>` whose `size` member returns n and whose `operator[]` member returns ρ_k when invoked with argument k for $k = 0, \dots, n - 1$.

30.7.8.6.3 Class template `piecewise_linear_distribution` [rand.dist.samp.plinear]

- 1 A `piecewise_linear_distribution` random number distribution produces random numbers x , $b_0 \leq x < b_n$, distributed over each subinterval $[b_i, b_{i+1})$ according to the probability density function

$$p(x | b_0, \dots, b_n, \rho_0, \dots, \rho_n) = \rho_i \cdot \frac{b_{i+1} - x}{b_{i+1} - b_i} + \rho_{i+1} \cdot \frac{x - b_i}{b_{i+1} - b_i}, \text{ for } b_i \leq x < b_{i+1}.$$

- ² The $n + 1$ distribution parameters b_i , also known as this distribution's *interval boundaries*, shall satisfy the relation $b_i < b_{i+1}$ for $i = 0, \dots, n - 1$. Unless specified otherwise, the remaining $n + 1$ distribution parameters are calculated as $\rho_k = w_k/S$ for $k = 0, \dots, n$, in which the values w_k , commonly known as the *weights at boundaries*, shall be non-negative, non-NaN, and non-infinity. Moreover, the following relation shall hold:

$$0 < S = \frac{1}{2} \cdot \sum_{k=0}^{n-1} (w_k + w_{k+1}) \cdot (b_{k+1} - b_k) .$$

```
template<class RealType = double>
class piecewise_linear_distribution {
public:
    // types
    using result_type = RealType;
    using param_type = unspecified;

    // constructor and reset functions
    piecewise_linear_distribution();
    template<class InputIteratorB, class InputIteratorW>
        piecewise_linear_distribution(InputIteratorB firstB, InputIteratorB lastB,
                                     InputIteratorW firstW);
    template<class UnaryOperation>
        piecewise_linear_distribution(initializer_list<RealType> bl, UnaryOperation fw);
    template<class UnaryOperation>
        piecewise_linear_distribution(size_t nw, RealType xmin, RealType xmax, UnaryOperation fw);
    explicit piecewise_linear_distribution(const param_type& parm);
    void reset();

    // generating functions
    template<class URBG>
        result_type operator()(URBG& g);
    template<class URBG>
        result_type operator()(URBG& g, const param_type& parm);

    // property functions
    vector<result_type> intervals() const;
    vector<result_type> densities() const;
    param_type param() const;
    void param(const param_type& parm);
    result_type min() const;
    result_type max() const;
};
```

```
piecewise_linear_distribution();
```

- ³ *Effects:* Constructs a `piecewise_linear_distribution` object with $n = 1$, $\rho_0 = \rho_1 = 1$, $b_0 = 0$, and $b_1 = 1$.

```
template<class InputIteratorB, class InputIteratorW>
piecewise_linear_distribution(InputIteratorB firstB, InputIteratorB lastB,
                             InputIteratorW firstW);
```

- ⁴ *Requires:* `InputIteratorB` and `InputIteratorW` shall each satisfy the *Cpp17InputIterator* requirements (28.2.3). Moreover, `iterator_traits<InputIteratorB>::value_type` and `iterator_traits<InputIteratorW>::value_type` shall each denote a type that is convertible to `double`. If `firstB == lastB` or `++firstB == lastB`, let $n = 1$, $\rho_0 = \rho_1 = 1$, $b_0 = 0$, and $b_1 = 1$. Otherwise, `[firstB, lastB)` shall form a sequence b of length $n + 1$, the length of the sequence w starting from `firstW` shall be at least $n + 1$, and any w_k for $k \geq n + 1$ shall be ignored by the distribution.

- ⁵ *Effects:* Constructs a `piecewise_linear_distribution` object with parameters as specified above.

```
template<class UnaryOperation>
```

```
piecewise_linear_distribution(initializer_list<RealType> bl, UnaryOperation fw);
```

6 *Requires:* Each instance of type `UnaryOperation` shall be a function object (24.14) whose return type shall be convertible to `double`. Moreover, `double` shall be convertible to the type of `UnaryOperation`'s sole parameter.

7 *Effects:* Constructs a `piecewise_linear_distribution` object with parameters taken or calculated from the following values: If `bl.size() < 2`, let $n = 1$, $\rho_0 = \rho_1 = 1$, $b_0 = 0$, and $b_1 = 1$. Otherwise, let `[bl.begin(), bl.end())` form a sequence b_0, \dots, b_n , and let $w_k = fw(b_k)$ for $k = 0, \dots, n$.

8 *Complexity:* The number of invocations of `fw` shall not exceed $n + 1$.

```
template<class UnaryOperation>
```

```
piecewise_linear_distribution(size_t nw, RealType xmin, RealType xmax, UnaryOperation fw);
```

9 *Requires:* Each instance of type `UnaryOperation` shall be a function object (24.14) whose return type shall be convertible to `double`. Moreover, `double` shall be convertible to the type of `UnaryOperation`'s sole parameter. If `nw = 0`, let $n = 1$, otherwise let $n = nw$. The relation $0 < \delta = (xmax - xmin)/n$ shall hold.

10 *Effects:* Constructs a `piecewise_linear_distribution` object with parameters taken or calculated from the following values: Let $b_k = xmin + k \cdot \delta$ for $k = 0, \dots, n$, and $w_k = fw(b_k)$ for $k = 0, \dots, n$.

11 *Complexity:* The number of invocations of `fw` shall not exceed $n + 1$.

```
vector<result_type> intervals() const;
```

12 *Returns:* A `vector<result_type>` whose `size` member returns $n + 1$ and whose `operator[]` member returns b_k when invoked with argument k for $k = 0, \dots, n$.

```
vector<result_type> densities() const;
```

13 *Returns:* A `vector<result_type>` whose `size` member returns n and whose `operator[]` member returns ρ_k when invoked with argument k for $k = 0, \dots, n$.

30.7.9 Low-quality random number generation

[c.math.rand]

1 [Note: The header `<cstdlib>` (21.2.2) declares the functions described in this subclause. — end note]

```
int rand();
```

```
void srand(unsigned int seed);
```

2 *Effects:* The `rand` and `srand` functions have the semantics specified in the C standard library.

3 *Remarks:* The implementation may specify that particular library functions may call `rand`. It is implementation-defined whether the `rand` function may introduce data races (20.5.5.9). [Note: The other random number generation facilities in this document (30.7) are often preferable to `rand`, because `rand`'s underlying algorithm is unspecified. Use of `rand` therefore continues to be non-portable, with unpredictable and oft-questionable quality and performance. — end note]

SEE ALSO: ISO C 7.22.2

30.8 Numeric arrays

[numarray]

30.8.1 Header `<valarray>` synopsis

[valarray.syn]

```
#include <initializer_list>
```

```
namespace std {
    template<class T> class valarray;           // An array of type T
    class slice;                               // a BLAS-like slice out of an array
    template<class T> class slice_array;
    class gslice;                             // a generalized slice out of an array
    template<class T> class gslice_array;
    template<class T> class mask_array;       // a masked array
    template<class T> class indirect_array;   // an indirected array

    template<class T> void swap(valarray<T>&, valarray<T>&) noexcept;
```



```

template<class T> valarray<T> sqrt (const valarray<T>&);
template<class T> valarray<T> tan  (const valarray<T>&);
template<class T> valarray<T> tanh (const valarray<T>&);

template<class T> unspecified1 begin(valarray<T>& v);
template<class T> unspecified2 begin(const valarray<T>& v);
template<class T> unspecified1 end(valarray<T>& v);
template<class T> unspecified2 end(const valarray<T>& v);
}

```

- ¹ The header `<valarray>` defines five class templates (`valarray`, `slice_array`, `gslice_array`, `mask_array`, and `indirect_array`), two classes (`slice` and `gslice`), and a series of related function templates for representing and manipulating arrays of values.
- ² The `valarray` array classes are defined to be free of certain forms of aliasing, thus allowing operations on these classes to be optimized.
- ³ Any function returning a `valarray<T>` is permitted to return an object of another type, provided all the `const` member functions of `valarray<T>` are also applicable to this type. This return type shall not add more than two levels of template nesting over the most deeply nested argument type.²⁷⁷
- ⁴ Implementations introducing such replacement types shall provide additional functions and operators as follows:
 - (4.1) — for every function taking a `const valarray<T>&` other than `begin` and `end` (30.8.10), identical functions taking the replacement types shall be added;
 - (4.2) — for every function taking two `const valarray<T>&` arguments, identical functions taking every combination of `const valarray<T>&` and replacement types shall be added.
- ⁵ In particular, an implementation shall allow a `valarray<T>` to be constructed from such replacement types and shall allow assignments and compound assignments of such types to `valarray<T>`, `slice_array<T>`, `gslice_array<T>`, `mask_array<T>` and `indirect_array<T>` objects.
- ⁶ These library functions are permitted to throw a `bad_alloc` (21.6.3.1) exception if there are not sufficient resources available to carry out the operation. Note that the exception is not mandated.

30.8.2 Class template `valarray`

[template.valarray]

30.8.2.1 Class template `valarray` overview

[template.valarray.overview]

```

namespace std {
template<class T> class valarray {
public:
    using value_type = T;

    // 30.8.2.2, construct/destroy
    valarray();
    explicit valarray(size_t);
    valarray(const T&, size_t);
    valarray(const T*, size_t);
    valarray(const valarray&);
    valarray(valarray&&) noexcept;
    valarray(const slice_array<T>&);
    valarray(const gslice_array<T>&);
    valarray(const mask_array<T>&);
    valarray(const indirect_array<T>&);
    valarray(initializer_list<T>);
    ~valarray();

    // 30.8.2.3, assignment
    valarray& operator=(const valarray&);
    valarray& operator=(valarray&&) noexcept;
    valarray& operator=(initializer_list<T>);
    valarray& operator=(const T&);
    valarray& operator=(const slice_array<T>&);

```

²⁷⁷ Annex B recommends a minimum number of recursively nested template instantiations. This requirement thus indirectly suggests a minimum allowable complexity for `valarray` expressions.

```

valarray& operator=(const gslice_array<T>&);
valarray& operator=(const mask_array<T>&);
valarray& operator=(const indirect_array<T>&);

// 30.8.2.4, element access
const T&      operator[](size_t) const;
T&           operator[](size_t);

// 30.8.2.5, subset operations
valarray      operator[](slice) const;
slice_array<T> operator[](slice);
valarray      operator[](const gslice&) const;
gslice_array<T> operator[](const gslice&);
valarray      operator[](const valarray<bool>&) const;
mask_array<T> operator[](const valarray<bool>&);
valarray      operator[](const valarray<size_t>&) const;
indirect_array<T> operator[](const valarray<size_t>&);

// 30.8.2.6, unary operators
valarray operator+() const;
valarray operator-() const;
valarray operator~() const;
valarray<bool> operator!() const;

// 30.8.2.7, compound assignment
valarray& operator*= (const T&);
valarray& operator/= (const T&);
valarray& operator%=(const T&);
valarray& operator+=(const T&);
valarray& operator-=(const T&);
valarray& operator^=(const T&);
valarray& operator&=(const T&);
valarray& operator|=(const T&);
valarray& operator<<=(const T&);
valarray& operator>>=(const T&);

valarray& operator*= (const valarray&);
valarray& operator/= (const valarray&);
valarray& operator%=(const valarray&);
valarray& operator+=(const valarray&);
valarray& operator-=(const valarray&);
valarray& operator^=(const valarray&);
valarray& operator|=(const valarray&);
valarray& operator&=(const valarray&);
valarray& operator<<=(const valarray&);
valarray& operator>>=(const valarray&);

// 30.8.2.8, member functions
void swap(valarray&) noexcept;

size_t size() const;

T sum() const;
T min() const;
T max() const;

valarray shift (int) const;
valarray cshift(int) const;
valarray apply(T func(T)) const;
valarray apply(T func(const T&)) const;
void resize(size_t sz, T c = T());
};

```

```

    template<class T, size_t cnt> valarray(const T(&)[cnt], size_t) -> valarray<T>;
}

```

- 1 The class template `valarray<T>` is a one-dimensional smart array, with elements numbered sequentially from zero. It is a representation of the mathematical concept of an ordered set of values. For convenience, an object of type `valarray<T>` is referred to as an “array” throughout the remainder of 30.8. The illusion of higher dimensionality may be produced by the familiar idiom of computed indices, together with the powerful subsetting capabilities provided by the generalized subscript operators.²⁷⁸

30.8.2.2 `valarray` constructors

[`valarray.cons`]

```
valarray();
```

- 1 *Effects:* Constructs a `valarray` that has zero length.²⁷⁹

```
explicit valarray(size_t n);
```

- 2 *Effects:* Constructs a `valarray` that has length `n`. Each element of the array is value-initialized (11.6).

```
valarray(const T& v, size_t n);
```

- 3 *Effects:* Constructs a `valarray` that has length `n`. Each element of the array is initialized with `v`.

```
valarray(const T* p, size_t n);
```

- 4 *Requires:* `p` points to an array (11.3.4) of at least `n` elements.

Effects: Constructs a `valarray` that has length `n`. The values of the elements of the array are initialized with the first `n` values pointed to by the first argument.²⁸⁰

```
valarray(const valarray& v);
```

- 5 *Effects:* Constructs a `valarray` that has the same length as `v`. The elements are initialized with the values of the corresponding elements of `v`.²⁸¹

```
valarray(valarray&& v) noexcept;
```

- 6 *Effects:* Constructs a `valarray` that has the same length as `v`. The elements are initialized with the values of the corresponding elements of `v`.

- 7 *Complexity:* Constant.

```
valarray(initializer_list<T> il);
```

- 8 *Effects:* Equivalent to `valarray(il.begin(), il.size())`.

```
valarray(const slice_array<T>&);
valarray(const gslslice_array<T>&);
valarray(const mask_array<T>&);
valarray(const indirect_array<T>&);
```

- 9 These conversion constructors convert one of the four reference templates to a `valarray`.

```
~valarray();
```

- 10 *Effects:* The destructor is applied to every element of `*this`; an implementation may return all allocated memory.

30.8.2.3 `valarray` assignment

[`valarray.assign`]

```
valarray& operator=(const valarray& v);
```

- 1 *Effects:* Each element of the `*this` array is assigned the value of the corresponding element of `v`. If the length of `v` is not equal to the length of `*this`, resizes `*this` to make the two arrays the same length, as if by calling `resize(v.size())`, before performing the assignment.

278) The intent is to specify an array template that has the minimum functionality necessary to address aliasing ambiguities and the proliferation of temporary objects. Thus, the `valarray` template is neither a matrix class nor a field class. However, it is a very useful building block for designing such classes.

279) This default constructor is essential, since arrays of `valarray` may be useful. After initialization, the length of an empty array can be increased with the `resize` member function.

280) This constructor is the preferred method for converting a C array to a `valarray` object.

281) This copy constructor creates a distinct array rather than an alias. Implementations in which arrays share storage are permitted, but they would need to implement a copy-on-reference mechanism to ensure that arrays are conceptually distinct.

2 *Ensures:* `size() == v.size()`.

3 *Returns:* `*this`.

```
valarray& operator=(valarray&& v) noexcept;
```

4 *Effects:* `*this` obtains the value of `v`. The value of `v` after the assignment is not specified.

5 *Returns:* `*this`.

6 *Complexity:* Linear.

```
valarray& operator=(initializer_list<T> il);
```

7 *Effects:* Equivalent to: `return *this = valarray(il);`

```
valarray& operator=(const T& v);
```

8 *Effects:* Assigns `v` to each element of `*this`.

9 *Returns:* `*this`.

```
valarray& operator=(const slice_array<T>&);
```

```
valarray& operator=(const gslice_array<T>&);
```

```
valarray& operator=(const mask_array<T>&);
```

```
valarray& operator=(const indirect_array<T>&);
```

10 *Requires:* The length of the array to which the argument refers equals `size()`. The value of an element in the left-hand side of a `valarray` assignment operator does not depend on the value of another element in that left-hand side.

11 These operators allow the results of a generalized subscripting operation to be assigned directly to a `valarray`.

30.8.2.4 `valarray` element access

[`valarray.access`]

```
const T& operator[](size_t n) const;
```

```
T& operator[](size_t n);
```

1 *Requires:* `n < size()`.

2 *Returns:* A reference to the corresponding element of the array. [*Note:* The expression `(a[i] = q, a[i]) == q` evaluates to `true` for any non-constant `valarray<T>` `a`, any `T` `q`, and for any `size_t` `i` such that the value of `i` is less than the length of `a`. — *end note*]

3 *Remarks:* The expression `&a[i+j] == &a[i] + j` evaluates to `true` for all `size_t` `i` and `size_t` `j` such that `i+j < a.size()`.

4 The expression `&a[i] != &b[j]` evaluates to `true` for any two arrays `a` and `b` and for any `size_t` `i` and `size_t` `j` such that `i < a.size()` and `j < b.size()`. [*Note:* This property indicates an absence of aliasing and may be used to advantage by optimizing compilers. Compilers may take advantage of inlining, constant propagation, loop fusion, tracking of pointers obtained from `operator new`, and other techniques to generate efficient `valarrays`. — *end note*]

5 The reference returned by the subscript operator for an array shall be valid until the member function `resize(size_t, T)` (30.8.2.8) is called for that array or until the lifetime of that array ends, whichever happens first.

30.8.2.5 `valarray` subset operations

[`valarray.sub`]

1 The member `operator[]` is overloaded to provide several ways to select sequences of elements from among those controlled by `*this`. Each of these operations returns a subset of the array. The `const`-qualified versions return this subset as a new `valarray` object. The non-`const` versions return a class template object which has reference semantics to the original array, working in conjunction with various overloads of `operator=` and other assigning operators to allow selective replacement (slicing) of the controlled sequence. In each case the selected element(s) shall exist.

```
valarray operator[](slice slicearr) const;
```

2 *Returns:* A `valarray` containing those elements of the controlled sequence designated by `slicearr`.

[*Example:*

```
const valarray<char> v0("abcdefghijklmnop", 16);
```

```

    // v0[slice(2, 5, 3)] returns valarray<char>("cfile", 5)
    — end example]

```

```
slice_array<T> operator[](slice slicearr);
```

- 3 *Returns:* An object that holds references to elements of the controlled sequence selected by `slicearr`.
[Example:

```

    valarray<char> v0("abcdefghijklmnop", 16);
    valarray<char> v1("ABCDE", 5);
    v0[slice(2, 5, 3)] = v1;
    // v0 == valarray<char>("abAdeBghCjkDmnEp", 16);
    — end example]

```

```
valarray operator[](const gslice& gslicearr) const;
```

- 4 *Returns:* A `valarray` containing those elements of the controlled sequence designated by `gslicearr`.
[Example:

```

    const valarray<char> v0("abcdefghijklmnop", 16);
    const size_t lv[] = { 2, 3 };
    const size_t dv[] = { 7, 2 };
    const valarray<size_t> len(lv, 2), str(dv, 2);
    // v0[gslice(3, len, str)] returns
    // valarray<char>("dfhkmo", 6)
    — end example]

```

```
gslice_array<T> operator[](const gslice& gslicearr);
```

- 5 *Returns:* An object that holds references to elements of the controlled sequence selected by `gslicearr`.
[Example:

```

    valarray<char> v0("abcdefghijklmnop", 16);
    valarray<char> v1("ABCDEF", 6);
    const size_t lv[] = { 2, 3 };
    const size_t dv[] = { 7, 2 };
    const valarray<size_t> len(lv, 2), str(dv, 2);
    v0[gslice(3, len, str)] = v1;
    // v0 == valarray<char>("abcAeBgCijDlEnFp", 16)
    — end example]

```

```
valarray operator[](const valarray<bool>& boolarr) const;
```

- 6 *Returns:* A `valarray` containing those elements of the controlled sequence designated by `boolarr`.
[Example:

```

    const valarray<char> v0("abcdefghijklmnop", 16);
    const bool vb[] = { false, false, true, true, false, true };
    // v0[valarray<bool>(vb, 6)] returns
    // valarray<char>("cdf", 3)
    — end example]

```

```
mask_array<T> operator[](const valarray<bool>& boolarr);
```

- 7 *Returns:* An object that holds references to elements of the controlled sequence selected by `boolarr`.
[Example:

```

    valarray<char> v0("abcdefghijklmnop", 16);
    valarray<char> v1("ABC", 3);
    const bool vb[] = { false, false, true, true, false, true };
    v0[valarray<bool>(vb, 6)] = v1;
    // v0 == valarray<char>("abABeCghijklmnop", 16)
    — end example]

```

```
valarray operator[](const valarray<size_t>& indarr) const;
```

- 8 *Returns:* A `valarray` containing those elements of the controlled sequence designated by `indarr`.
[Example:

```

const valarray<char> v0("abcdefghijklmnop", 16);
const size_t vi[] = { 7, 5, 2, 3, 8 };
// v0[valarray<size_t>(vi, 5)] returns
// valarray<char>("hfcdi", 5)

```

— end example]

```
indirect_array<T> operator[](const valarray<size_t>& indarr);
```

- 9 *Returns:* An object that holds references to elements of the controlled sequence selected by `indarr`.
[*Example:*

```

valarray<char> v0("abcdefghijklmnop", 16);
valarray<char> v1("ABCDE", 5);
const size_t vi[] = { 7, 5, 2, 3, 8 };
v0[valarray<size_t>(vi, 5)] = v1;
// v0 == valarray<char>("abCDeBgAEjklmnop", 16)

```

— end example]

30.8.2.6 valarray unary operators

[valarray.unary]

```

valarray operator+() const;
valarray operator-() const;
valarray operator~() const;
valarray<bool> operator!() const;

```

- 1 *Requires:* Each of these operators may only be instantiated for a type `T` to which the indicated operator can be applied and for which the indicated operator returns a value which is of type `T` (`bool` for `operator!`) or which may be unambiguously implicitly converted to type `T` (`bool` for `operator!`).
- 2 *Returns:* A `valarray` whose length is `size()`. Each element of the returned array is initialized with the result of applying the indicated operator to the corresponding element of the array.

30.8.2.7 valarray compound assignment

[valarray.cassign]

```

valarray& operator*=(const valarray& v);
valarray& operator/=(const valarray& v);
valarray& operator%=(const valarray& v);
valarray& operator+=(const valarray& v);
valarray& operator-=(const valarray& v);
valarray& operator^=(const valarray& v);
valarray& operator&=(const valarray& v);
valarray& operator|=(const valarray& v);
valarray& operator<<=(const valarray& v);
valarray& operator>>=(const valarray& v);

```

- 1 *Requires:* `size() == v.size()`. Each of these operators may only be instantiated for a type `T` if the indicated operator can be applied to two operands of type `T`. The value of an element in the left-hand side of a `valarray` compound assignment operator does not depend on the value of another element in that left hand side.
- 2 *Effects:* Each of these operators performs the indicated operation on each of the elements of `*this` and the corresponding element of `v`.
- 3 *Returns:* `*this`.
- 4 *Remarks:* The appearance of an array on the left-hand side of a compound assignment does not invalidate references or pointers.

```

valarray& operator*=(const T& v);
valarray& operator/=(const T& v);
valarray& operator%=(const T& v);
valarray& operator+=(const T& v);
valarray& operator-=(const T& v);
valarray& operator^=(const T& v);
valarray& operator&=(const T& v);
valarray& operator|=(const T& v);
valarray& operator<<=(const T& v);

```



```
valarray& operator>>=(const T& v);
```

5 *Requires:* Each of these operators may only be instantiated for a type T if the indicated operator can be applied to two operands of type T.

6 *Effects:* Each of these operators applies the indicated operation to each element of **this* and v.

7 *Returns:* **this*

8 *Remarks:* The appearance of an array on the left-hand side of a compound assignment does not invalidate references or pointers to the elements of the array.

30.8.2.8 valarray member functions

[valarray.members]

```
void swap(valarray& v) noexcept;
```

1 *Effects:* **this* obtains the value of v. v obtains the value of **this*.

2 *Complexity:* Constant.

```
size_t size() const;
```

3 *Returns:* The number of elements in the array.

4 *Complexity:* Constant time.

```
T sum() const;
```

5 *Requires:* `size() > 0`. This function may only be instantiated for a type T to which `operator+=` can be applied.

6 *Returns:* The sum of all the elements of the array. If the array has length 1, returns the value of element 0. Otherwise, the returned value is calculated by applying `operator+=` to a copy of an element of the array and all other elements of the array in an unspecified order.

```
T min() const;
```

7 *Requires:* `size() > 0`

8 *Returns:* The minimum value contained in **this*. For an array of length 1, the value of element 0 is returned. For all other array lengths, the determination is made using `operator<`.

```
T max() const;
```

9 *Requires:* `size() > 0`.

10 *Returns:* The maximum value contained in **this*. For an array of length 1, the value of element 0 is returned. For all other array lengths, the determination is made using `operator<`.

```
valarray shift(int n) const;
```

11 *Returns:* A valarray of length `size()`, each of whose elements *I* is `(*this)[I + n]` if *I* + *n* is non-negative and less than `size()`, otherwise `T()`. [Note: If element zero is taken as the leftmost element, a positive value of *n* shifts the elements left *n* places, with zero fill. — end note]

12 [Example: If the argument has the value -2, the first two elements of the result will be value-initialized (11.6); the third element of the result will be assigned the value of the first element of the argument; etc. — end example]

```
valarray cshift(int n) const;
```

13 *Returns:* A valarray of length `size()` that is a circular shift of **this*. If element zero is taken as the leftmost element, a non-negative value of *n* shifts the elements circularly left *n* places and a negative value of *n* shifts the elements circularly right $-n$ places.

```
valarray apply(T func(T)) const;
```

```
valarray apply(T func(const T&)) const;
```

14 *Returns:* A valarray whose length is `size()`. Each element of the returned array is assigned the value returned by applying the argument function to the corresponding element of **this*.

```
void resize(size_t sz, T c = T());
```

- 15 *Effects:* Changes the length of the **this* array to *sz* and then assigns to each element the value of the second argument. Resizing invalidates all pointers and references to elements in the array.

30.8.3 valarray non-member operations [valarray.nonmembers]

30.8.3.1 valarray binary operators [valarray.binary]

```
template<class T> valarray<T> operator* (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator/ (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator% (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator+ (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator- (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator^ (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator& (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator| (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator<< (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> operator>> (const valarray<T>&, const valarray<T>&);
```

- 1 *Requires:* Each of these operators may only be instantiated for a type *T* to which the indicated operator can be applied and for which the indicated operator returns a value which is of type *T* or which can be unambiguously implicitly converted to type *T*. The argument arrays have the same length.

- 2 *Returns:* A *valarray* whose length is equal to the lengths of the argument arrays. Each element of the returned array is initialized with the result of applying the indicated operator to the corresponding elements of the argument arrays.

```
template<class T> valarray<T> operator* (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator* (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator/ (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator/ (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator% (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator% (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator+ (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator+ (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator- (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator- (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator^ (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator^ (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator& (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator& (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator| (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator| (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator<< (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
template<class T> valarray<T> operator<< (const typename valarray<T>::value_type&,
                                         const valarray<T>&);
template<class T> valarray<T> operator>> (const valarray<T>&,
                                         const typename valarray<T>::value_type&);
```

```
template<class T> valarray<T> operator>>(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
```

3 *Requires:* Each of these operators may only be instantiated for a type T to which the indicated operator can be applied and for which the indicated operator returns a value which is of type T or which can be unambiguously implicitly converted to type T.

4 *Returns:* A `valarray` whose length is equal to the length of the array argument. Each element of the returned array is initialized with the result of applying the indicated operator to the corresponding element of the array argument and the non-array argument.

30.8.3.2 `valarray` logical operators

[`valarray.comparison`]

```
template<class T> valarray<bool> operator==(const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator!=(const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator< (const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator> (const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator<=(const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator>=(const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator&&(const valarray<T>&, const valarray<T>&);
template<class T> valarray<bool> operator|| (const valarray<T>&, const valarray<T>&);
```

1 *Requires:* Each of these operators may only be instantiated for a type T to which the indicated operator can be applied and for which the indicated operator returns a value which is of type `bool` or which can be unambiguously implicitly converted to type `bool`. The two array arguments have the same length.

2 *Returns:* A `valarray<bool>` whose length is equal to the length of the array arguments. Each element of the returned array is initialized with the result of applying the indicated operator to the corresponding elements of the argument arrays.

```
template<class T> valarray<bool> operator==(const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator==(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator!=(const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator!=(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator< (const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator< (const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator> (const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator> (const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator<=(const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator<=(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator>=(const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator>=(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator&&(const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator&&(const typename valarray<T>::value_type&,
                                       const valarray<T>&);
template<class T> valarray<bool> operator|| (const valarray<T>&,
                                       const typename valarray<T>::value_type&);
template<class T> valarray<bool> operator|| (const typename valarray<T>::value_type&,
                                       const valarray<T>&);
```

3 *Requires:* Each of these operators may only be instantiated for a type T to which the indicated operator can be applied and for which the indicated operator returns a value which is of type `bool` or which can be unambiguously implicitly converted to type `bool`.

- 4 *Returns:* A `valarray<bool>` whose length is equal to the length of the array argument. Each element of the returned array is initialized with the result of applying the indicated operator to the corresponding element of the array and the non-array argument.

30.8.3.3 `valarray` transcendentals

[`valarray.transcend`]

```
template<class T> valarray<T> abs (const valarray<T>&);
template<class T> valarray<T> acos (const valarray<T>&);
template<class T> valarray<T> asin (const valarray<T>&);
template<class T> valarray<T> atan (const valarray<T>&);
template<class T> valarray<T> atan2(const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> atan2(const valarray<T>&, const typename valarray<T>::value_type&);
template<class T> valarray<T> atan2(const typename valarray<T>::value_type&, const valarray<T>&);
template<class T> valarray<T> cos (const valarray<T>&);
template<class T> valarray<T> cosh (const valarray<T>&);
template<class T> valarray<T> exp (const valarray<T>&);
template<class T> valarray<T> log (const valarray<T>&);
template<class T> valarray<T> log10(const valarray<T>&);
template<class T> valarray<T> pow (const valarray<T>&, const valarray<T>&);
template<class T> valarray<T> pow (const valarray<T>&, const typename valarray<T>::value_type&);
template<class T> valarray<T> pow (const typename valarray<T>::value_type&, const valarray<T>&);
template<class T> valarray<T> sin (const valarray<T>&);
template<class T> valarray<T> sinh (const valarray<T>&);
template<class T> valarray<T> sqrt (const valarray<T>&);
template<class T> valarray<T> tan (const valarray<T>&);
template<class T> valarray<T> tanh (const valarray<T>&);
```

- 1 *Requires:* Each of these functions may only be instantiated for a type `T` to which a unique function with the indicated name can be applied (unqualified). This function shall return a value which is of type `T` or which can be unambiguously implicitly converted to type `T`.

30.8.3.4 `valarray` specialized algorithms

[`valarray.special`]

```
template<class T> void swap(valarray<T>& x, valarray<T>& y) noexcept;
```

- 1 *Effects:* Equivalent to `x.swap(y)`.

30.8.4 Class `slice`

[`class.slice`]

30.8.4.1 Class `slice` overview

[`class.slice.overview`]

```
namespace std {
  class slice {
  public:
    slice();
    slice(size_t, size_t, size_t);

    size_t start() const;
    size_t size() const;
    size_t stride() const;
  };
}
```

- 1 The `slice` class represents a BLAS-like slice from an array. Such a slice is specified by a starting index, a length, and a stride.²⁸²

30.8.4.2 `slice` constructors

[`cons.slice`]

```
slice();
slice(size_t start, size_t length, size_t stride);
slice(const slice&);
```

- 1 The default constructor is equivalent to `slice(0, 0, 0)`. A default constructor is provided only to permit the declaration of arrays of slices. The constructor with arguments for a slice takes a `start`, `length`, and `stride` parameter.

²⁸² BLAS stands for *Basic Linear Algebra Subprograms*. C++ programs may instantiate this class. See, for example, Dongarra, Du Croz, Duff, and Hammerling: *A set of Level 3 Basic Linear Algebra Subprograms*; Technical Report MCS-P1-0888, Argonne National Laboratory (USA), Mathematics and Computer Science Division, August, 1988.

- 2 *[Example: slice(3, 8, 2) constructs a slice which selects elements 3, 5, 7, ... 17 from an array. — end example]*

30.8.4.3 slice access functions

[slice.access]

```
size_t start() const;
size_t size() const;
size_t stride() const;
```

- 1 *Returns:* The start, length, or stride specified by a `slice` object.

- 2 *Complexity:* Constant time.

30.8.5 Class template `slice_array`

[template.slice.array]

30.8.5.1 Class template `slice_array` overview

[template.slice.array.overview]

```
namespace std {
    template<class T> class slice_array {
    public:
        using value_type = T;

        void operator= (const valarray<T>&) const;
        void operator*= (const valarray<T>&) const;
        void operator/= (const valarray<T>&) const;
        void operator%=(const valarray<T>&) const;
        void operator+=(const valarray<T>&) const;
        void operator-=(const valarray<T>&) const;
        void operator^=(const valarray<T>&) const;
        void operator&=(const valarray<T>&) const;
        void operator|=(const valarray<T>&) const;
        void operator<<=(const valarray<T>&) const;
        void operator>>=(const valarray<T>&) const;

        slice_array(const slice_array&);
        ~slice_array();
        const slice_array& operator=(const slice_array&) const;
        void operator=(const T&) const;

        slice_array() = delete; // as implied by declaring copy constructor above
    };
}
```

- 1 This template is a helper template used by the `slice` subscript operator

```
slice_array<T> valarray<T>::operator[] (slice);
```

- 2 It has reference semantics to a subset of an array specified by a `slice` object. *[Example: The expression `a[slice(1, 5, 3)] = b;` has the effect of assigning the elements of `b` to a slice of the elements in `a`. For the slice shown, the elements selected from `a` are 1, 4, ..., 13. — end example]*

30.8.5.2 slice_array assignment

[slice.arr.assign]

```
void operator=(const valarray<T>&) const;
const slice_array& operator=(const slice_array&) const;
```

- 1 These assignment operators have reference semantics, assigning the values of the argument array elements to selected elements of the `valarray<T>` object to which the `slice_array` object refers.

30.8.5.3 slice_array compound assignment

[slice.arr.comp.assign]

```
void operator*= (const valarray<T>&) const;
void operator/= (const valarray<T>&) const;
void operator%=(const valarray<T>&) const;
void operator+=(const valarray<T>&) const;
void operator-=(const valarray<T>&) const;
void operator^=(const valarray<T>&) const;
void operator&=(const valarray<T>&) const;
void operator|=(const valarray<T>&) const;
```

```
void operator<<=(const valarray<T>&) const;
void operator>>=(const valarray<T>&) const;
```

- ¹ These compound assignments have reference semantics, applying the indicated operation to the elements of the argument array and selected elements of the `valarray<T>` object to which the `slice_array` object refers.

30.8.5.4 `slice_array` fill function

[`slice.arr.fill`]

```
void operator=(const T&) const;
```

- ¹ This function has reference semantics, assigning the value of its argument to the elements of the `valarray<T>` object to which the `slice_array` object refers.

30.8.6 The `gslice` class

[`class.gslice`]

30.8.6.1 The `gslice` class overview

[`class.gslice.overview`]

```
namespace std {
  class gslice {
  public:
    gslice();
    gslice(size_t s, const valarray<size_t>& l, const valarray<size_t>& d);

    size_t      start() const;
    valarray<size_t> size() const;
    valarray<size_t> stride() const;
  };
}
```

- ¹ This class represents a generalized slice out of an array. A `gslice` is defined by a starting offset (s), a set of lengths (l_j), and a set of strides (d_j). The number of lengths shall equal the number of strides.
- ² A `gslice` represents a mapping from a set of indices (i_j), equal in number to the number of strides, to a single index k . It is useful for building multidimensional array classes using the `valarray` template, which is one-dimensional. The set of one-dimensional index values specified by a `gslice` are

$$k = s + \sum_j i_j d_j$$

where the multidimensional indices i_j range in value from 0 to $l_{ij} - 1$.

- ³ [*Example*: The `gslice` specification

```
start = 3
length = {2, 4, 3}
stride = {19, 4, 1}
```

yields the sequence of one-dimensional indices

$$k = 3 + (0, 1) \times 19 + (0, 1, 2, 3) \times 4 + (0, 1, 2) \times 1$$

which are ordered as shown in the following table:

$(i_0,$	$i_1,$	$i_2,$	$k)$	=
	(0,	0,	0,	3),
	(0,	0,	1,	4),
	(0,	0,	2,	5),
	(0,	1,	0,	7),
	(0,	1,	1,	8),
	(0,	1,	2,	9),
	(0,	2,	0,	11),
	(0,	2,	1,	12),
	(0,	2,	2,	13),
	(0,	3,	0,	15),
	(0,	3,	1,	16),
	(0,	3,	2,	17),
	(1,	0,	0,	22),

```
(1, 0, 1, 23),
...
(1, 3, 2, 36)
```

That is, the highest-ordered index turns fastest. — *end example*]

⁴ It is possible to have degenerate generalized slices in which an address is repeated.

⁵ [*Example*: If the stride parameters in the previous example are changed to {1, 1, 1}, the first few elements of the resulting sequence of indices will be

```
(0, 0, 0, 3),
(0, 0, 1, 4),
(0, 0, 2, 5),
(0, 1, 0, 4),
(0, 1, 1, 5),
(0, 1, 2, 6),
...
```

— *end example*]

⁶ If a degenerate slice is used as the argument to the non-const version of `operator [] (const gslice&)`, the behavior is undefined.

30.8.6.2 gslice constructors

[gslice.cons]

```
gslice();
gslice(size_t start, const valarray<size_t>& lengths,
       const valarray<size_t>& strides);
gslice(const gslice&);
```

¹ The default constructor is equivalent to `gslice(0, valarray<size_t>(), valarray<size_t>())`. The constructor with arguments builds a `gslice` based on a specification of start, lengths, and strides, as explained in the previous subclause.

30.8.6.3 gslice access functions

[gslice.access]

```
size_t      start() const;
valarray<size_t> size() const;
valarray<size_t> stride() const;
```

¹ *Returns*: The representation of the start, lengths, or strides specified for the `gslice`.

² *Complexity*: `start()` is constant time. `size()` and `stride()` are linear in the number of strides.

30.8.7 Class template `gslice_array`

[template.gslice.array]

30.8.7.1 Class template `gslice_array` overview

[template.gslice.array.overview]

```
namespace std {
  template<class T> class gslice_array {
  public:
    using value_type = T;

    void operator= (const valarray<T>&) const;
    void operator*= (const valarray<T>&) const;
    void operator/= (const valarray<T>&) const;
    void operator%=(const valarray<T>&) const;
    void operator+=(const valarray<T>&) const;
    void operator-=(const valarray<T>&) const;
    void operator^=(const valarray<T>&) const;
    void operator&=(const valarray<T>&) const;
    void operator|=(const valarray<T>&) const;
    void operator<<=(const valarray<T>&) const;
    void operator>>=(const valarray<T>&) const;
```

```

    gslice_array(const gslice_array&);
    ~gslice_array();
    const gslice_array& operator=(const gslice_array&) const;
    void operator=(const T&) const;

    gslice_array() = delete;      // as implied by declaring copy constructor above
};
}

```

¹ This template is a helper template used by the `gslice` subscript operator

```
gslice_array<T> valarray<T>::operator[](const gslice&);
```

² It has reference semantics to a subset of an array specified by a `gslice` object. Thus, the expression `a[gslice(1, length, stride)] = b` has the effect of assigning the elements of `b` to a generalized slice of the elements in `a`.

30.8.7.2 `gslice_array` assignment

[`gslice.array.assign`]

```
void operator=(const valarray<T>&) const;
const gslice_array& operator=(const gslice_array&) const;
```

¹ These assignment operators have reference semantics, assigning the values of the argument array elements to selected elements of the `valarray<T>` object to which the `gslice_array` refers.

30.8.7.3 `gslice_array` compound assignment

[`gslice.array.comp.assign`]

```
void operator*= (const valarray<T>&) const;
void operator/= (const valarray<T>&) const;
void operator%= (const valarray<T>&) const;
void operator+= (const valarray<T>&) const;
void operator-= (const valarray<T>&) const;
void operator^= (const valarray<T>&) const;
void operator&= (const valarray<T>&) const;
void operator|= (const valarray<T>&) const;
void operator<<= (const valarray<T>&) const;
void operator>>= (const valarray<T>&) const;
```

¹ These compound assignments have reference semantics, applying the indicated operation to the elements of the argument array and selected elements of the `valarray<T>` object to which the `gslice_array` object refers.

30.8.7.4 `gslice_array` fill function

[`gslice.array.fill`]

```
void operator=(const T&) const;
```

¹ This function has reference semantics, assigning the value of its argument to the elements of the `valarray<T>` object to which the `gslice_array` object refers.

30.8.8 Class template `mask_array`

[`template.mask.array`]

30.8.8.1 Class template `mask_array` overview

[`template.mask.array.overview`]

```

namespace std {
    template<class T> class mask_array {
    public:
        using value_type = T;

        void operator= (const valarray<T>&) const;
        void operator*= (const valarray<T>&) const;
        void operator/= (const valarray<T>&) const;
        void operator%= (const valarray<T>&) const;
        void operator+= (const valarray<T>&) const;
        void operator-= (const valarray<T>&) const;
        void operator^= (const valarray<T>&) const;
        void operator&= (const valarray<T>&) const;
        void operator|= (const valarray<T>&) const;
        void operator<<= (const valarray<T>&) const;
        void operator>>= (const valarray<T>&) const;
    };
}

```



```

    mask_array(const mask_array&);
    ~mask_array();
    const mask_array& operator=(const mask_array&) const;
    void operator=(const T&) const;

    mask_array() = delete;           // as implied by declaring copy constructor above
};
}

```

¹ This template is a helper template used by the mask subscript operator:

```
mask_array<T> valarray<T>::operator[](const valarray<bool>&).
```

² It has reference semantics to a subset of an array specified by a boolean mask. Thus, the expression `a[mask] = b;` has the effect of assigning the elements of `b` to the masked elements in `a` (those for which the corresponding element in `mask` is true.)

30.8.8.2 mask_array assignment

[mask.array.assign]

```

void operator=(const valarray<T>&) const;
const mask_array& operator=(const mask_array&) const;

```

¹ These assignment operators have reference semantics, assigning the values of the argument array elements to selected elements of the `valarray<T>` object to which it refers.

30.8.8.3 mask_array compound assignment

[mask.array.comp.assign]

```

void operator*= (const valarray<T>&) const;
void operator/= (const valarray<T>&) const;
void operator%= (const valarray<T>&) const;
void operator+= (const valarray<T>&) const;
void operator-= (const valarray<T>&) const;
void operator^= (const valarray<T>&) const;
void operator&= (const valarray<T>&) const;
void operator|= (const valarray<T>&) const;
void operator<<= (const valarray<T>&) const;
void operator>>= (const valarray<T>&) const;

```

¹ These compound assignments have reference semantics, applying the indicated operation to the elements of the argument array and selected elements of the `valarray<T>` object to which the mask object refers.

30.8.8.4 mask_array fill function

[mask.array.fill]

```
void operator=(const T&) const;
```

¹ This function has reference semantics, assigning the value of its argument to the elements of the `valarray<T>` object to which the `mask_array` object refers.

30.8.9 Class template indirect_array

[template.indirect.array]

30.8.9.1 Class template indirect_array overview

[template.indirect.array.overview]

```

namespace std {
    template<class T> class indirect_array {
    public:
        using value_type = T;

        void operator= (const valarray<T>&) const;
        void operator*= (const valarray<T>&) const;
        void operator/= (const valarray<T>&) const;
        void operator%= (const valarray<T>&) const;
        void operator+= (const valarray<T>&) const;
        void operator-= (const valarray<T>&) const;
        void operator^= (const valarray<T>&) const;
        void operator&= (const valarray<T>&) const;
        void operator|= (const valarray<T>&) const;
        void operator<<= (const valarray<T>&) const;
        void operator>>= (const valarray<T>&) const;
    };
}

```

```

    indirect_array(const indirect_array&);
    ~indirect_array();
    const indirect_array& operator=(const indirect_array&) const;
    void operator=(const T&) const;

    indirect_array() = delete;           // as implied by declaring copy constructor above
};
}

```

¹ This template is a helper template used by the indirect subscript operator

```
indirect_array<T> valarray<T>::operator[](const valarray<size_t>&).
```

² It has reference semantics to a subset of an array specified by an `indirect_array`. Thus, the expression `a[indirect] = b;` has the effect of assigning the elements of `b` to the elements in `a` whose indices appear in `indirect`.

30.8.9.2 `indirect_array` assignment

[`indirect.array.assign`]

```
void operator=(const valarray<T>&) const;
const indirect_array& operator=(const indirect_array&) const;
```

¹ These assignment operators have reference semantics, assigning the values of the argument array elements to selected elements of the `valarray<T>` object to which it refers.

² If the `indirect_array` specifies an element in the `valarray<T>` object to which it refers more than once, the behavior is undefined.

³ [Example:

```

    int addr[] = {2, 3, 1, 4, 4};
    valarray<size_t> indirect(addr, 5);
    valarray<double> a(0., 10), b(1., 5);
    a[indirect] = b;

```

results in undefined behavior since element 4 is specified twice in the indirection. — *end example*]

30.8.9.3 `indirect_array` compound assignment

[`indirect.array.comp.assign`]

```

void operator*=(const valarray<T>&) const;
void operator/=(const valarray<T>&) const;
void operator%=(const valarray<T>&) const;
void operator+=(const valarray<T>&) const;
void operator-=(const valarray<T>&) const;
void operator^=(const valarray<T>&) const;
void operator&=(const valarray<T>&) const;
void operator|=(const valarray<T>&) const;
void operator<<=(const valarray<T>&) const;
void operator>>=(const valarray<T>&) const;

```

¹ These compound assignments have reference semantics, applying the indicated operation to the elements of the argument array and selected elements of the `valarray<T>` object to which the `indirect_array` object refers.

² If the `indirect_array` specifies an element in the `valarray<T>` object to which it refers more than once, the behavior is undefined.

30.8.9.4 `indirect_array` fill function

[`indirect.array.fill`]

```
void operator=(const T&) const;
```

¹ This function has reference semantics, assigning the value of its argument to the elements of the `valarray<T>` object to which the `indirect_array` object refers.

30.8.10 `valarray` range access

[`valarray.range`]

¹ In the `begin` and `end` function templates that follow, *unspecified1* is a type that meets the requirements of a mutable random access iterator (28.2.7) and of a contiguous iterator (28.2.1) whose `value_type` is the template parameter `T` and whose `reference` type is `T&`. *unspecified2* is a type that meets the requirements

of a constant random access iterator (28.2.7) and of a contiguous iterator (28.2.1) whose `value_type` is the template parameter `T` and whose `reference` type is `const T&`.

- ² The iterators returned by `begin` and `end` for an array are guaranteed to be valid until the member function `resize(size_t, T)` (30.8.2.8) is called for that array or until the lifetime of that array ends, whichever happens first.

```
template<class T> unspecified1 begin(valarray<T>& v);
template<class T> unspecified2 begin(const valarray<T>& v);
```

- ³ *Returns:* An iterator referencing the first value in the array.

```
template<class T> unspecified1 end(valarray<T>& v);
template<class T> unspecified2 end(const valarray<T>& v);
```

- ⁴ *Returns:* An iterator referencing one past the last value in the array.

30.9 Generalized numeric operations

[numeric.ops]

30.9.1 Header <numeric> synopsis

[numeric.ops.overview]

```
namespace std {
    // 30.9.2, accumulate
    template<class InputIterator, class T>
        T accumulate(InputIterator first, InputIterator last, T init);
    template<class InputIterator, class T, class BinaryOperation>
        T accumulate(InputIterator first, InputIterator last, T init, BinaryOperation binary_op);

    // 30.9.3, reduce
    template<class InputIterator>
        typename iterator_traits<InputIterator>::value_type
            reduce(InputIterator first, InputIterator last);
    template<class InputIterator, class T>
        T reduce(InputIterator first, InputIterator last, T init);
    template<class InputIterator, class T, class BinaryOperation>
        T reduce(InputIterator first, InputIterator last, T init, BinaryOperation binary_op);
    template<class ExecutionPolicy, class ForwardIterator>
        typename iterator_traits<ForwardIterator>::value_type
            reduce(ExecutionPolicy&& exec, // see 29.4.5
                ForwardIterator first, ForwardIterator last);
    template<class ExecutionPolicy, class ForwardIterator, class T>
        T reduce(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator first, ForwardIterator last, T init);
    template<class ExecutionPolicy, class ForwardIterator, class T, class BinaryOperation>
        T reduce(ExecutionPolicy&& exec, // see 29.4.5
            ForwardIterator first, ForwardIterator last, T init, BinaryOperation binary_op);

    // 30.9.4, inner product
    template<class InputIterator1, class InputIterator2, class T>
        T inner_product(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, T init);
    template<class InputIterator1, class InputIterator2, class T,
        class BinaryOperation1, class BinaryOperation2>
        T inner_product(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2, T init,
            BinaryOperation1 binary_op1,
            BinaryOperation2 binary_op2);

    // 30.9.5, transform reduce
    template<class InputIterator1, class InputIterator2, class T>
        T transform_reduce(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2,
            T init);
    template<class InputIterator1, class InputIterator2, class T,
        class BinaryOperation1, class BinaryOperation2>
        T transform_reduce(InputIterator1 first1, InputIterator1 last1,
            InputIterator2 first2,
```

```

        T init,
        BinaryOperation1 binary_op1,
        BinaryOperation2 binary_op2);
template<class InputIterator, class T,
        class BinaryOperation, class UnaryOperation>
T transform_reduce(InputIterator first, InputIterator last,
        T init,
        BinaryOperation binary_op, UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2, class T>
T transform_reduce(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2,
        T init);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2, class T,
        class BinaryOperation1, class BinaryOperation2>
T transform_reduce(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first1, ForwardIterator1 last1,
        ForwardIterator2 first2,
        T init,
        BinaryOperation1 binary_op1,
        BinaryOperation2 binary_op2);
template<class ExecutionPolicy,
        class ForwardIterator, class T,
        class BinaryOperation, class UnaryOperation>
T transform_reduce(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator first, ForwardIterator last,
        T init,
        BinaryOperation binary_op, UnaryOperation unary_op);

// 30.9.6, partial sum
template<class InputIterator, class OutputIterator>
OutputIterator partial_sum(InputIterator first,
        InputIterator last,
        OutputIterator result);
template<class InputIterator, class OutputIterator, class BinaryOperation>
OutputIterator partial_sum(InputIterator first,
        InputIterator last,
        OutputIterator result,
        BinaryOperation binary_op);

// 30.9.7, exclusive scan
template<class InputIterator, class OutputIterator, class T>
OutputIterator exclusive_scan(InputIterator first, InputIterator last,
        OutputIterator result,
        T init);
template<class InputIterator, class OutputIterator, class T, class BinaryOperation>
OutputIterator exclusive_scan(InputIterator first, InputIterator last,
        OutputIterator result,
        T init, BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class T>
ForwardIterator2 exclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first, ForwardIterator1 last,
        ForwardIterator2 result,
        T init);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class T,
        class BinaryOperation>
ForwardIterator2 exclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
        ForwardIterator1 first, ForwardIterator1 last,
        ForwardIterator2 result,
        T init, BinaryOperation binary_op);

```

```

// 30.9.8, inclusive scan
template<class InputIterator, class OutputIterator>
    OutputIterator inclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result);
template<class InputIterator, class OutputIterator, class BinaryOperation>
    OutputIterator inclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result,
                                BinaryOperation binary_op);
template<class InputIterator, class OutputIterator, class BinaryOperation, class T>
    OutputIterator inclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result,
                                BinaryOperation binary_op, T init);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                   ForwardIterator1 first, ForwardIterator1 last,
                                   ForwardIterator2 result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation>
    ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                   ForwardIterator1 first, ForwardIterator1 last,
                                   ForwardIterator2 result,
                                   BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation, class T>
    ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                   ForwardIterator1 first, ForwardIterator1 last,
                                   ForwardIterator2 result,
                                   BinaryOperation binary_op, T init);

// 30.9.9, transform exclusive scan
template<class InputIterator, class OutputIterator, class T,
        class BinaryOperation, class UnaryOperation>
    OutputIterator transform_exclusive_scan(InputIterator first, InputIterator last,
                                           OutputIterator result,
                                           T init,
                                           BinaryOperation binary_op,
                                           UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2, class T,
        class BinaryOperation, class UnaryOperation>
    ForwardIterator2 transform_exclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                             ForwardIterator1 first, ForwardIterator1 last,
                                             ForwardIterator2 result,
                                             T init,
                                             BinaryOperation binary_op,
                                             UnaryOperation unary_op);

// 30.9.10, transform inclusive scan
template<class InputIterator, class OutputIterator,
        class BinaryOperation, class UnaryOperation>
    OutputIterator transform_inclusive_scan(InputIterator first, InputIterator last,
                                           OutputIterator result,
                                           BinaryOperation binary_op,
                                           UnaryOperation unary_op);
template<class InputIterator, class OutputIterator,
        class BinaryOperation, class UnaryOperation, class T>
    OutputIterator transform_inclusive_scan(InputIterator first, InputIterator last,
                                           OutputIterator result,
                                           BinaryOperation binary_op,
                                           UnaryOperation unary_op,
                                           T init);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation, class UnaryOperation>

```

```

    ForwardIterator2 transform_inclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                             ForwardIterator1 first, ForwardIterator1 last,
                                             ForwardIterator2 result,
                                             BinaryOperation binary_op,
                                             UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation, class UnaryOperation, class T>
    ForwardIterator2 transform_inclusive_scan(ExecutionPolicy&& exec, // see 29.4.5
                                             ForwardIterator1 first, ForwardIterator1 last,
                                             ForwardIterator2 result,
                                             BinaryOperation binary_op,
                                             UnaryOperation unary_op,
                                             T init);

// 30.9.11, adjacent difference
template<class InputIterator, class OutputIterator>
    OutputIterator adjacent_difference(InputIterator first,
                                      InputIterator last,
                                      OutputIterator result);
template<class InputIterator, class OutputIterator, class BinaryOperation>
    OutputIterator adjacent_difference(InputIterator first,
                                      InputIterator last,
                                      OutputIterator result,
                                      BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
    ForwardIterator2 adjacent_difference(ExecutionPolicy&& exec, // see 29.4.5
                                         ForwardIterator1 first,
                                         ForwardIterator1 last,
                                         ForwardIterator2 result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation>
    ForwardIterator2 adjacent_difference(ExecutionPolicy&& exec, // see 29.4.5
                                         ForwardIterator1 first,
                                         ForwardIterator1 last,
                                         ForwardIterator2 result,
                                         BinaryOperation binary_op);

// 30.9.12, iota
template<class ForwardIterator, class T>
    void iota(ForwardIterator first, ForwardIterator last, T value);

// 30.9.13, greatest common divisor
template<class M, class N>
    constexpr common_type_t<M,N> gcd(M m, N n);

// 30.9.14, least common multiple
template<class M, class N>
    constexpr common_type_t<M,N> lcm(M m, N n);
}

```

- ¹ The requirements on the types of algorithms' arguments that are described in the introduction to [Clause 29](#) also apply to the following algorithms.
- ² Throughout this subclause, the parameters `UnaryOperation`, `BinaryOperation`, `BinaryOperation1`, and `BinaryOperation2` are used whenever an algorithm expects a function object ([24.14](#)).
- ³ [Note: The use of closed ranges as well as semi-open ranges to specify requirements throughout this subclause is intentional. — end note]

30.9.2 Accumulate

[accumulate]

```

template<class InputIterator, class T>
    T accumulate(InputIterator first, InputIterator last, T init);

```

```
template<class InputIterator, class T, class BinaryOperation>
  T accumulate(InputIterator first, InputIterator last, T init,
              BinaryOperation binary_op);
```

1 *Requires:* T shall satisfy the *Cpp17CopyConstructible* (Table 26) and *Cpp17CopyAssignable* (Table 28) requirements. In the range `[first, last]`, `binary_op` shall neither modify elements nor invalidate iterators or subranges.²⁸³

2 *Effects:* Computes its result by initializing the accumulator `acc` with the initial value `init` and then modifies it with `acc = std::move(acc) + *i` or `acc = binary_op(std::move(acc), *i)` for every iterator `i` in the range `[first, last)` in order.²⁸⁴

30.9.3 Reduce

[reduce]

```
template<class InputIterator>
  typename iterator_traits<InputIterator>::value_type
  reduce(InputIterator first, InputIterator last);
```

1 *Effects:* Equivalent to:

```
return reduce(first, last,
              typename iterator_traits<InputIterator>::value_type{});
```

```
template<class ExecutionPolicy, class ForwardIterator>
  typename iterator_traits<ForwardIterator>::value_type
  reduce(ExecutionPolicy&& exec,
        ForwardIterator first, ForwardIterator last);
```

2 *Effects:* Equivalent to:

```
return reduce(std::forward<ExecutionPolicy>(exec), first, last,
              typename iterator_traits<ForwardIterator>::value_type{});
```

```
template<class InputIterator, class T>
  T reduce(InputIterator first, InputIterator last, T init);
```

3 *Effects:* Equivalent to:

```
return reduce(first, last, init, plus<>());
```

```
template<class ExecutionPolicy, class ForwardIterator, class T>
  T reduce(ExecutionPolicy&& exec,
        ForwardIterator first, ForwardIterator last, T init);
```

4 *Effects:* Equivalent to:

```
return reduce(std::forward<ExecutionPolicy>(exec), first, last, init, plus<>());
```

```
template<class InputIterator, class T, class BinaryOperation>
  T reduce(InputIterator first, InputIterator last, T init,
          BinaryOperation binary_op);
```

```
template<class ExecutionPolicy, class ForwardIterator, class T, class BinaryOperation>
  T reduce(ExecutionPolicy&& exec,
        ForwardIterator first, ForwardIterator last, T init,
        BinaryOperation binary_op);
```

5 *Requires:*

- (5.1) — T shall be *Cpp17MoveConstructible* (Table 25).
- (5.2) — All of `binary_op(init, *first)`, `binary_op(*first, init)`, `binary_op(init, init)`, and `binary_op(*first, *first)` shall be convertible to T.
- (5.3) — `binary_op` shall neither invalidate iterators or subranges, nor modify elements in the range `[first, last]`.

6 *Returns:* `GENERALIZED_SUM(binary_op, init, *i, ...)` for every `i` in `[first, last)`.

7 *Complexity:* $\mathcal{O}(\text{last} - \text{first})$ applications of `binary_op`.

²⁸³) The use of fully closed ranges is intentional.

²⁸⁴) `accumulate` is similar to the APL reduction operator and Common Lisp `reduce` function, but it avoids the difficulty of defining the result of reduction on an empty sequence by always requiring an initial value.

- 8 [Note: The difference between `reduce` and `accumulate` is that `reduce` applies `binary_op` in an unspecified order, which yields a nondeterministic result for non-associative or non-commutative `binary_op` such as floating-point addition. — *end note*]

30.9.4 Inner product

[inner.product]

```
template<class InputIterator1, class InputIterator2, class T>
    T inner_product(InputIterator1 first1, InputIterator1 last1,
                   InputIterator2 first2, T init);
template<class InputIterator1, class InputIterator2, class T,
         class BinaryOperation1, class BinaryOperation2>
    T inner_product(InputIterator1 first1, InputIterator1 last1,
                   InputIterator2 first2, T init,
                   BinaryOperation1 binary_op1,
                   BinaryOperation2 binary_op2);
```

- 1 *Requires:* T shall satisfy the *Cpp17CopyConstructible* (Table 26) and *Cpp17CopyAssignable* (Table 28) requirements. In the ranges `[first1, last1]` and `[first2, first2 + (last1 - first1)]` `binary_op1` and `binary_op2` shall neither modify elements nor invalidate iterators or subranges.²⁸⁵
- 2 *Effects:* Computes its result by initializing the accumulator `acc` with the initial value `init` and then modifying it with `acc = std::move(acc) + (*i1) * (*i2)` or `acc = binary_op1(std::move(acc), binary_op2(*i1, *i2))` for every iterator `i1` in the range `[first1, last1]` and iterator `i2` in the range `[first2, first2 + (last1 - first1)]` in order.

30.9.5 Transform reduce

[transform.reduce]

```
template<class InputIterator1, class InputIterator2, class T>
    T transform_reduce(InputIterator1 first1, InputIterator1 last1,
                      InputIterator2 first2,
                      T init);
```

- 1 *Effects:* Equivalent to:

```
return transform_reduce(first1, last1, first2, init, plus<>(), multiplies<>());
```

```
template<class ExecutionPolicy,
         class ForwardIterator1, class ForwardIterator2, class T>
    T transform_reduce(ExecutionPolicy&& exec,
                      ForwardIterator1 first1, ForwardIterator1 last1,
                      ForwardIterator2 first2,
                      T init);
```

- 2 *Effects:* Equivalent to:

```
return transform_reduce(std::forward<ExecutionPolicy>(exec),
                      first1, last1, first2, init, plus<>(), multiplies<>());
```

```
template<class InputIterator1, class InputIterator2, class T,
         class BinaryOperation1, class BinaryOperation2>
    T transform_reduce(InputIterator1 first1, InputIterator1 last1,
                      InputIterator2 first2,
                      T init,
                      BinaryOperation1 binary_op1,
                      BinaryOperation2 binary_op2);
```

```
template<class ExecutionPolicy,
         class ForwardIterator1, class ForwardIterator2, class T,
         class BinaryOperation1, class BinaryOperation2>
    T transform_reduce(ExecutionPolicy&& exec,
                      ForwardIterator1 first1, ForwardIterator1 last1,
                      ForwardIterator2 first2,
                      T init,
                      BinaryOperation1 binary_op1,
                      BinaryOperation2 binary_op2);
```

- 3 *Requires:*

285) The use of fully closed ranges is intentional.

- (3.1) — T shall be *Cpp17MoveConstructible* (Table 25).
- (3.2) — All of
- (3.2.1) — `binary_op1(init, init)`,
- (3.2.2) — `binary_op1(init, binary_op2(*first1, *first2))`,
- (3.2.3) — `binary_op1(binary_op2(*first1, *first2), init)`, and
- (3.2.4) — `binary_op1(binary_op2(*first1, *first2), binary_op2(*first1, *first2))`
- shall be convertible to T.
- (3.3) — Neither `binary_op1` nor `binary_op2` shall invalidate subranges, or modify elements in the ranges `[first1, last1]` and `[first2, first2 + (last1 - first1)]`.

4 *Returns:*

`GENERALIZED_SUM(binary_op1, init, binary_op2(*i, *(first2 + (i - first1))), ...)`

for every iterator `i` in `[first1, last1]`.

5 *Complexity:* $\mathcal{O}(\text{last1} - \text{first1})$ applications each of `binary_op1` and `binary_op2`.

```
template<class InputIterator, class T,
        class BinaryOperation, class UnaryOperation>
T transform_reduce(InputIterator first, InputIterator last, T init,
                  BinaryOperation binary_op, UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator, class T,
        class BinaryOperation, class UnaryOperation>
T transform_reduce(ExecutionPolicy&& exec,
                  ForwardIterator first, ForwardIterator last,
                  T init, BinaryOperation binary_op, UnaryOperation unary_op);
```

6 *Requires:*

- (6.1) — T shall be *Cpp17MoveConstructible* (Table 25).
- (6.2) — All of
- (6.2.1) — `binary_op(init, init)`,
- (6.2.2) — `binary_op(init, unary_op(*first))`,
- (6.2.3) — `binary_op(unary_op(*first), init)`, and
- (6.2.4) — `binary_op(unary_op(*first), unary_op(*first))`
- shall be convertible to T.
- (6.3) — Neither `unary_op` nor `binary_op` shall invalidate subranges, or modify elements in the range `[first, last]`.

7 *Returns:*

`GENERALIZED_SUM(binary_op, init, unary_op(*i), ...)`

for every iterator `i` in `[first, last]`.

8 *Complexity:* $\mathcal{O}(\text{last} - \text{first})$ applications each of `unary_op` and `binary_op`.

9 [Note: `transform_reduce` does not apply `unary_op` to `init`. — end note]

30.9.6 Partial sum

[partial.sum]

```
template<class InputIterator, class OutputIterator>
OutputIterator partial_sum(
    InputIterator first, InputIterator last,
    OutputIterator result);
template<class InputIterator, class OutputIterator, class BinaryOperation>
OutputIterator partial_sum(
    InputIterator first, InputIterator last,
    OutputIterator result, BinaryOperation binary_op);
```

1 *Requires:* `InputIterator`'s value type shall be constructible from the type of `*first`. The result of the expression `std::move(acc) + *i` or `binary_op(std::move(acc), *i)` shall be implicitly convertible

to `InputIterator`'s value type. `acc` shall be writable (28.2.1) to the `result` output iterator. In the ranges `[first, last]` and `[result, result + (last - first)]` `binary_op` shall neither modify elements nor invalidate iterators or subranges.²⁸⁶

2 *Effects:* For a non-empty range, the function creates an accumulator `acc` whose type is `InputIterator`'s value type, initializes it with `*first`, and assigns the result to `*result`. For every iterator `i` in `[first + 1, last)` in order, `acc` is then modified by `acc = std::move(acc) + *i` or `acc = binary_op(std::move(acc), *i)` and the result is assigned to `*(result + (i - first))`.

3 *Returns:* `result + (last - first)`.

4 *Complexity:* Exactly $(last - first) - 1$ applications of the binary operation.

5 *Remarks:* `result` may be equal to `first`.

30.9.7 Exclusive scan

[exclusive.scan]

```
template<class InputIterator, class OutputIterator, class T>
    OutputIterator exclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result, T init);
```

1 *Effects:* Equivalent to:

```
    return exclusive_scan(first, last, result, init, plus<>());
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2, class T>
    ForwardIterator2 exclusive_scan(ExecutionPolicy&& exec,
                                    ForwardIterator1 first, ForwardIterator1 last,
                                    ForwardIterator2 result, T init);
```

2 *Effects:* Equivalent to:

```
    return exclusive_scan(std::forward<ExecutionPolicy>(exec),
                          first, last, result, init, plus<>());
```

```
template<class InputIterator, class OutputIterator, class T, class BinaryOperation>
    OutputIterator exclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result, T init, BinaryOperation binary_op);
```

```
template<class ExecutionPolicy,
         class ForwardIterator1, class ForwardIterator2, class T, class BinaryOperation>
    ForwardIterator2 exclusive_scan(ExecutionPolicy&& exec,
                                    ForwardIterator1 first, ForwardIterator1 last,
                                    ForwardIterator2 result, T init, BinaryOperation binary_op);
```

3 *Requires:*

(3.1) — `T` shall be *Cpp17MoveConstructible* (Table 25).

(3.2) — All of `binary_op(init, init)`, `binary_op(init, *first)`, and `binary_op(*first, *first)` shall be convertible to `T`.

(3.3) — `binary_op` shall neither invalidate iterators or subranges, nor modify elements in the ranges `[first, last]` or `[result, result + (last - first)]`.

4 *Effects:* For each integer `K` in $[0, last - first)$ assigns through `result + K` the value of:

```
    GENERALIZED_NONCOMMUTATIVE_SUM(
        binary_op, init, *(first + 0), *(first + 1), ..., *(first + K - 1))
```

5 *Returns:* The end of the resulting range beginning at `result`.

6 *Complexity:* $\mathcal{O}(last - first)$ applications of `binary_op`.

7 *Remarks:* `result` may be equal to `first`.

8 [Note: The difference between `exclusive_scan` and `inclusive_scan` is that `exclusive_scan` excludes the i^{th} input element from the i^{th} sum. If `binary_op` is not mathematically associative, the behavior of `exclusive_scan` may be nondeterministic. — end note]

286) The use of fully closed ranges is intentional.

30.9.8 Inclusive scan

[inclusive.scan]

```
template<class InputIterator, class OutputIterator>
  OutputIterator inclusive_scan(InputIterator first, InputIterator last, OutputIterator result);
```

1 *Effects:* Equivalent to:

```
    return inclusive_scan(first, last, result, plus<>());
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
  ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec,
                                ForwardIterator1 first, ForwardIterator1 last,
                                ForwardIterator2 result);
```

2 *Effects:* Equivalent to:

```
    return inclusive_scan(std::forward<ExecutionPolicy>(exec), first, last, result, plus<>());
```

```
template<class InputIterator, class OutputIterator, class BinaryOperation>
  OutputIterator inclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result, BinaryOperation binary_op);
```

```
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation>
  ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec,
                                ForwardIterator1 first, ForwardIterator1 last,
                                ForwardIterator2 result, BinaryOperation binary_op);
```

```
template<class InputIterator, class OutputIterator, class BinaryOperation, class T>
  OutputIterator inclusive_scan(InputIterator first, InputIterator last,
                                OutputIterator result, BinaryOperation binary_op, T init);
```

```
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2, class BinaryOperation, class T>
  ForwardIterator2 inclusive_scan(ExecutionPolicy&& exec,
                                ForwardIterator1 first, ForwardIterator1 last,
                                ForwardIterator2 result, BinaryOperation binary_op, T init);
```

3 *Requires:*

- (3.1) — If `init` is provided, `T` shall be *Cpp17MoveConstructible* (Table 25); otherwise, `ForwardIterator1`'s value type shall be *Cpp17MoveConstructible*.
- (3.2) — If `init` is provided, all of `binary_op(init, init)`, `binary_op(init, *first)`, and `binary_op(*first, *first)` shall be convertible to `T`; otherwise, `binary_op(*first, *first)` shall be convertible to `ForwardIterator1`'s value type.
- (3.3) — `binary_op` shall neither invalidate iterators or subranges, nor modify elements in the ranges `[first, last]` or `[result, result + (last - first)]`.

4 *Effects:* For each integer `K` in `[0, last - first)` assigns through `result + K` the value of

(4.1) — `GENERALIZED_NONCOMMUTATIVE_SUM`(
 `binary_op, init, *(first + 0), *(first + 1), ..., *(first + K)`)
 if `init` is provided, or

(4.2) — `GENERALIZED_NONCOMMUTATIVE_SUM`(
 `binary_op, *(first + 0), *(first + 1), ..., *(first + K)`)
 otherwise.

5 *Returns:* The end of the resulting range beginning at `result`.

6 *Complexity:* $\mathcal{O}(\text{last} - \text{first})$ applications of `binary_op`.

7 *Remarks:* `result` may be equal to `first`.

8 [Note: The difference between `exclusive_scan` and `inclusive_scan` is that `inclusive_scan` includes the i^{th} input element in the i^{th} sum. If `binary_op` is not mathematically associative, the behavior of `inclusive_scan` may be nondeterministic. — end note]

30.9.9 Transform exclusive scan

[transform.exclusive.scan]

```
template<class InputIterator, class OutputIterator, class T,
        class BinaryOperation, class UnaryOperation>
```

```

OutputIterator transform_exclusive_scan(InputIterator first, InputIterator last,
                                     OutputIterator result, T init,
                                     BinaryOperation binary_op,UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2, class T,
        class BinaryOperation, class UnaryOperation>
ForwardIterator2 transform_exclusive_scan(ExecutionPolicy&& exec,
                                       ForwardIterator1 first, ForwardIterator1 last,
                                       ForwardIterator2 result, T init,
                                       BinaryOperation binary_op, UnaryOperation unary_op);

```

1 *Requires:*

- (1.1) — T shall be *Cpp17MoveConstructible* (Table 25).
- (1.2) — All of
 - (1.2.1) — `binary_op(init, init)`,
 - (1.2.2) — `binary_op(init, unary_op(*first))`, and
 - (1.2.3) — `binary_op(unary_op(*first), unary_op(*first))`
 shall be convertible to T.
- (1.3) — Neither `unary_op` nor `binary_op` shall invalidate iterators or subranges, or modify elements in the ranges `[first, last]` or `[result, result + (last - first)]`.

2 *Effects:* For each integer K in `[0, last - first)` assigns through `result + K` the value of:

```

GENERALIZED_NONCOMMUTATIVE_SUM(
    binary_op, init,
    unary_op(*(first + 0)), unary_op(*(first + 1)), ..., unary_op(*(first + K - 1))
)

```

3 *Returns:* The end of the resulting range beginning at `result`.

4 *Complexity:* $\mathcal{O}(\text{last} - \text{first})$ applications each of `unary_op` and `binary_op`.

5 *Remarks:* `result` may be equal to `first`.

6 *[Note:* The difference between `transform_exclusive_scan` and `transform_inclusive_scan` is that `transform_exclusive_scan` excludes the i^{th} input element from the i^{th} sum. If `binary_op` is not mathematically associative, the behavior of `transform_exclusive_scan` may be nondeterministic. `transform_exclusive_scan` does not apply `unary_op` to `init`. — *end note*]

30.9.10 Transform inclusive scan

[transform.inclusive.scan]

```

template<class InputIterator, class OutputIterator,
        class BinaryOperation, class UnaryOperation>
OutputIterator transform_inclusive_scan(InputIterator first, InputIterator last,
                                       OutputIterator result,
                                       BinaryOperation binary_op, UnaryOperation unary_op);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation, class UnaryOperation>
ForwardIterator2 transform_inclusive_scan(ExecutionPolicy&& exec,
                                       ForwardIterator1 first, ForwardIterator1 last,
                                       ForwardIterator2 result,
                                       BinaryOperation binary_op, UnaryOperation unary_op);
template<class InputIterator, class OutputIterator,
        class BinaryOperation, class UnaryOperation, class T>
OutputIterator transform_inclusive_scan(InputIterator first, InputIterator last,
                                       OutputIterator result,
                                       BinaryOperation binary_op, UnaryOperation unary_op,
                                       T init);
template<class ExecutionPolicy,
        class ForwardIterator1, class ForwardIterator2,
        class BinaryOperation, class UnaryOperation, class T>
ForwardIterator2 transform_inclusive_scan(ExecutionPolicy&& exec,
                                       ForwardIterator1 first, ForwardIterator1 last,
                                       ForwardIterator2 result,

```

```
BinaryOperation binary_op, UnaryOperation unary_op,
T init);
```

1 *Requires:*

(1.1) — If `init` is provided, `T` shall be *Cpp17MoveConstructible* (Table 25); otherwise, `ForwardIterator1`'s value type shall be *Cpp17MoveConstructible*.

(1.2) — If `init` is provided, all of

(1.2.1) — `binary_op(init, init)`,

(1.2.2) — `binary_op(init, unary_op(*first))`, and

(1.2.3) — `binary_op(unary_op(*first), unary_op(*first))`

shall be convertible to `T`; otherwise, `binary_op(unary_op(*first), unary_op(*first))` shall be convertible to `ForwardIterator1`'s value type.

(1.3) — Neither `unary_op` nor `binary_op` shall invalidate iterators or subranges, nor modify elements in the ranges `[first, last]` or `[result, result + (last - first)]`.

2 *Effects:* For each integer `K` in `[0, last - first)` assigns through `result + K` the value of

(2.1) — `GENERALIZED_NONCOMMUTATIVE_SUM(`
`binary_op, init,`
`unary_op(*(first + 0)), unary_op(*(first + 1)), ..., unary_op(*(first + K))`
 if `init` is provided, or

(2.2) — `GENERALIZED_NONCOMMUTATIVE_SUM(`
`binary_op,`
`unary_op(*(first + 0)), unary_op(*(first + 1)), ..., unary_op(*(first + K))`
 otherwise.

3 *Returns:* The end of the resulting range beginning at `result`.

4 *Complexity:* $\mathcal{O}(\text{last} - \text{first})$ applications each of `unary_op` and `binary_op`.

5 *Remarks:* `result` may be equal to `first`.

6 [*Note:* The difference between `transform_exclusive_scan` and `transform_inclusive_scan` is that `transform_inclusive_scan` includes the i^{th} input element in the i^{th} sum. If `binary_op` is not mathematically associative, the behavior of `transform_inclusive_scan` may be nondeterministic. `transform_inclusive_scan` does not apply `unary_op` to `init`. — *end note*]

30.9.11 Adjacent difference

[`adjacent.difference`]

```
template<class InputIterator, class OutputIterator>
OutputIterator
adjacent_difference(InputIterator first, InputIterator last, OutputIterator result);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2>
ForwardIterator2
adjacent_difference(ExecutionPolicy&& exec,
                    ForwardIterator1 first, ForwardIterator1 last, ForwardIterator2 result);

template<class InputIterator, class OutputIterator, class BinaryOperation>
OutputIterator
adjacent_difference(InputIterator first, InputIterator last,
                    OutputIterator result, BinaryOperation binary_op);
template<class ExecutionPolicy, class ForwardIterator1, class ForwardIterator2,
class BinaryOperation>
ForwardIterator2
adjacent_difference(ExecutionPolicy&& exec,
                    ForwardIterator1 first, ForwardIterator1 last,
                    ForwardIterator2 result, BinaryOperation binary_op);
```

1 Let `T` be the value type of `decltype(first)`. For the overloads that do not take an argument `binary_op`, let `binary_op` be an lvalue that denotes an object of type `minus<>`.

2 *Requires:*

- (2.1) — For the overloads with no `ExecutionPolicy`, `T` shall be *Cpp17MoveAssignable* (Table 27) and shall be constructible from the type of `*first`. `acc` (defined below) shall be writable (28.2.1) to the `result` output iterator. The result of the expression `binary_op(val, std::move(acc))` shall be writable to the `result` output iterator.
- (2.2) — For the overloads with an `ExecutionPolicy`, the result of the expressions `binary_op(*first, *first)` and `*first` shall be writable to `result`.
- (2.3) — For all overloads, in the ranges `[first, last]` and `[result, result + (last - first)]`, `binary_op` shall neither modify elements nor invalidate iterators or subranges.²⁸⁷
- 3 *Effects:* For the overloads with no `ExecutionPolicy` and a non-empty range, the function creates an accumulator `acc` of type `T`, initializes it with `*first`, and assigns the result to `*result`. For every iterator `i` in `[first + 1, last)` in order, creates an object `val` whose type is `T`, initializes it with `*i`, computes `binary_op(val, std::move(acc))`, assigns the result to `*(result + (i - first))`, and move assigns from `val` to `acc`.
- 4 For the overloads with an `ExecutionPolicy` and a non-empty range, performs `*result = *first`. Then, for every `d` in `[1, last - first - 1]`, performs `*(result + d) = binary_op(*(first + d), *(first + (d - 1)))`.
- 5 *Returns:* `result + (last - first)`.
- 6 *Complexity:* Exactly `(last - first) - 1` applications of the binary operation.
- 7 *Remarks:* For the overloads with no `ExecutionPolicy`, `result` may be equal to `first`. For the overloads with an `ExecutionPolicy`, the ranges `[first, last)` and `[result, result + (last - first))` shall not overlap.

30.9.12 Iota

[numeric.iota]

```
template<class ForwardIterator, class T>
void iota(ForwardIterator first, ForwardIterator last, T value);
```

- 1 *Requires:* `T` shall be convertible to `ForwardIterator`'s value type. The expression `++val`, where `val` has type `T`, shall be well-formed.
- 2 *Effects:* For each element referred to by the iterator `i` in the range `[first, last)`, assigns `*i = value` and increments `value` as if by `++value`.
- 3 *Complexity:* Exactly `last - first` increments and assignments.

30.9.13 Greatest common divisor

[numeric.ops.gcd]

```
template<class M, class N>
constexpr common_type_t<M,N> gcd(M m, N n);
```

- 1 *Requires:* `|m|` and `|n|` shall be representable as a value of `common_type_t<M, N>`. [Note: These requirements ensure, for example, that `gcd(m, m) = |m|` is representable as a value of type `M`. — end note]
- 2 *Remarks:* If either `M` or `N` is not an integer type, or if either is `cv bool`, the program is ill-formed.
- 3 *Returns:* Zero when `m` and `n` are both zero. Otherwise, returns the greatest common divisor of `|m|` and `|n|`.
- 4 *Throws:* Nothing.

30.9.14 Least common multiple

[numeric.ops.lcm]

```
template<class M, class N>
constexpr common_type_t<M,N> lcm(M m, N n);
```

- 1 *Requires:* `|m|` and `|n|` shall be representable as a value of `common_type_t<M, N>`. The least common multiple of `|m|` and `|n|` shall be representable as a value of type `common_type_t<M,N>`.
- 2 *Remarks:* If either `M` or `N` is not an integer type, or if either is `cv bool` the program is ill-formed.
- 3 *Returns:* Zero when either `m` or `n` is zero. Otherwise, returns the least common multiple of `|m|` and `|n|`.
- 4 *Throws:* Nothing.

²⁸⁷) The use of fully closed ranges is intentional.

30.10 Mathematical functions for floating-point types

[c.math]

30.10.1 Header <cmath> synopsis

[cmath.syn]

```

namespace std {
    using float_t = see below;
    using double_t = see below;
}

#define HUGE_VAL see below
#define HUGE_VALF see below
#define HUGE_VALL see below
#define INFINITY see below
#define NAN see below
#define FP_INFINITE see below
#define FP_NAN see below
#define FP_NORMAL see below
#define FP_SUBNORMAL see below
#define FP_ZERO see below
#define FP_FAST_FMA see below
#define FP_FAST_FMAF see below
#define FP_FAST_FMAL see below
#define FP_ILOGB0 see below
#define FP_ILOGBNAN see below
#define MATH_ERRNO see below
#define MATH_ERREXCEPT see below

#define math_errhandling see below

namespace std {
    float acos(float x); // see 20.2
    double acos(double x);
    long double acos(long double x); // see 20.2
    float acosf(float x);
    long double acosl(long double x);

    float asin(float x); // see 20.2
    double asin(double x);
    long double asin(long double x); // see 20.2
    float asinf(float x);
    long double asinl(long double x);

    float atan(float x); // see 20.2
    double atan(double x);
    long double atan(long double x); // see 20.2
    float atanf(float x);
    long double atanl(long double x);

    float atan2(float y, float x); // see 20.2
    double atan2(double y, double x);
    long double atan2(long double y, long double x); // see 20.2
    float atan2f(float y, float x);
    long double atan2l(long double y, long double x);

    float cos(float x); // see 20.2
    double cos(double x);
    long double cos(long double x); // see 20.2
    float cosf(float x);
    long double cosl(long double x);

    float sin(float x); // see 20.2
    double sin(double x);
    long double sin(long double x); // see 20.2
    float sinf(float x);
    long double sinl(long double x);

```

```
float tan(float x); // see 20.2
double tan(double x);
long double tan(long double x); // see 20.2
float tanf(float x);
long double tanl(long double x);

float acosh(float x); // see 20.2
double acosh(double x);
long double acosh(long double x); // see 20.2
float acoshf(float x);
long double acoshl(long double x);

float asinh(float x); // see 20.2
double asinh(double x);
long double asinh(long double x); // see 20.2
float asinhf(float x);
long double asinhl(long double x);

float atanh(float x); // see 20.2
double atanh(double x);
long double atanh(long double x); // see 20.2
float atanhf(float x);
long double atanh1(long double x);

float cosh(float x); // see 20.2
double cosh(double x);
long double cosh(long double x); // see 20.2
float coshf(float x);
long double coshl(long double x);

float sinh(float x); // see 20.2
double sinh(double x);
long double sinh(long double x); // see 20.2
float sinh1(float x);
long double sinhl(long double x);

float tanh(float x); // see 20.2
double tanh(double x);
long double tanh(long double x); // see 20.2
float tanhf(float x);
long double tanhl(long double x);

float exp(float x); // see 20.2
double exp(double x);
long double exp(long double x); // see 20.2
float expf(float x);
long double expl(long double x);

float exp2(float x); // see 20.2
double exp2(double x);
long double exp2(long double x); // see 20.2
float exp2f(float x);
long double exp2l(long double x);

float expm1(float x); // see 20.2
double expm1(double x);
long double expm1(long double x); // see 20.2
float expm1f(float x);
long double expm1l(long double x);

float frexp(float value, int* exp); // see 20.2
double frexp(double value, int* exp);
long double frexp(long double value, int* exp); // see 20.2
float frexpf(float value, int* exp);
```



```

long double frexpl(long double value, int* exp);

int ilogb(float x); // see 20.2
int ilogb(double x);
int ilogb(long double x); // see 20.2
int ilogbf(float x);
int ilogbl(long double x);

float ldexp(float x, int exp); // see 20.2
double ldexp(double x, int exp);
long double ldexp(long double x, int exp); // see 20.2
float ldexpf(float x, int exp);
long double ldexpl(long double x, int exp);

float log(float x); // see 20.2
double log(double x);
long double log(long double x); // see 20.2
float logf(float x);
long double logl(long double x);

float log10(float x); // see 20.2
double log10(double x);
long double log10(long double x); // see 20.2
float log10f(float x);
long double log10l(long double x);

float log1p(float x); // see 20.2
double log1p(double x);
long double log1p(long double x); // see 20.2
float log1pf(float x);
long double log1pl(long double x);

float log2(float x); // see 20.2
double log2(double x);
long double log2(long double x); // see 20.2
float log2f(float x);
long double log2l(long double x);

float logb(float x); // see 20.2
double logb(double x);
long double logb(long double x); // see 20.2
float logbf(float x);
long double logbl(long double x);

float modf(float value, float* iptr); // see 20.2
double modf(double value, double* iptr);
long double modf(long double value, long double* iptr); // see 20.2
float modff(float value, float* iptr);
long double modfl(long double value, long double* iptr);

float scalbn(float x, int n); // see 20.2
double scalbn(double x, int n);
long double scalbn(long double x, int n); // see 20.2
float scalbnf(float x, int n);
long double scalbnl(long double x, int n);

float scalbln(float x, long int n); // see 20.2
double scalbln(double x, long int n);
long double scalbln(long double x, long int n); // see 20.2
float scalblnf(float x, long int n);
long double scalblnl(long double x, long int n);

float cbrt(float x); // see 20.2
double cbrt(double x);

```

```

long double cbrt(long double x); // see 20.2
float cbrtf(float x);
long double cbrtl(long double x);

// 30.10.2, absolute values
int abs(int j);
long int abs(long int j);
long long int abs(long long int j);
float abs(float j);
double abs(double j);
long double abs(long double j);

float fabs(float x); // see 20.2
double fabs(double x);
long double fabs(long double x); // see 20.2
float fabsf(float x);
long double fabsl(long double x);

float hypot(float x, float y); // see 20.2
double hypot(double x, double y);
long double hypot(long double x, long double y); // see 20.2
float hypotf(float x, float y);
long double hypotl(long double x, long double y);

// 30.10.3, three-dimensional hypotenuse
float hypot(float x, float y, float z);
double hypot(double x, double y, double z);
long double hypot(long double x, long double y, long double z);

float pow(float x, float y); // see 20.2
double pow(double x, double y);
long double pow(long double x, long double y); // see 20.2
float powf(float x, float y);
long double powl(long double x, long double y);

float sqrt(float x); // see 20.2
double sqrt(double x);
long double sqrt(long double x); // see 20.2
float sqrtf(float x);
long double sqrtl(long double x);

float erf(float x); // see 20.2
double erf(double x);
long double erf(long double x); // see 20.2
float erff(float x);
long double erfl(long double x);

float erfc(float x); // see 20.2
double erfc(double x);
long double erfc(long double x); // see 20.2
float erfcf(float x);
long double erfcl(long double x);

float lgamma(float x); // see 20.2
double lgamma(double x);
long double lgamma(long double x); // see 20.2
float lgammaf(float x);
long double lgammal(long double x);

float tgamma(float x); // see 20.2
double tgamma(double x);
long double tgamma(long double x); // see 20.2
float tgammaf(float x);
long double tgammal(long double x);

```

```
float ceil(float x); // see 20.2
double ceil(double x);
long double ceil(long double x); // see 20.2
float ceilf(float x);
long double ceill(long double x);

float floor(float x); // see 20.2
double floor(double x);
long double floor(long double x); // see 20.2
float floorf(float x);
long double floorl(long double x);

float nearbyint(float x); // see 20.2
double nearbyint(double x);
long double nearbyint(long double x); // see 20.2
float nearbyintf(float x);
long double nearbyintl(long double x);

float rint(float x); // see 20.2
double rint(double x);
long double rint(long double x); // see 20.2
float rintf(float x);
long double rintl(long double x);

long int lrint(float x); // see 20.2
long int lrint(double x);
long int lrint(long double x); // see 20.2
long int lrintf(float x);
long int lrintl(long double x);

long long int llrint(float x); // see 20.2
long long int llrint(double x);
long long int llrint(long double x); // see 20.2
long long int llrintf(float x);
long long int llrintl(long double x);

float round(float x); // see 20.2
double round(double x);
long double round(long double x); // see 20.2
float roundf(float x);
long double roundl(long double x);

long int lround(float x); // see 20.2
long int lround(double x);
long int lround(long double x); // see 20.2
long int lroundf(float x);
long int lroundl(long double x);

long long int llround(float x); // see 20.2
long long int llround(double x);
long long int llround(long double x); // see 20.2
long long int llroundf(float x);
long long int llroundl(long double x);

float trunc(float x); // see 20.2
double trunc(double x);
long double trunc(long double x); // see 20.2
float truncf(float x);
long double truncf(long double x);

float fmod(float x, float y); // see 20.2
double fmod(double x, double y);
long double fmod(long double x, long double y); // see 20.2
float fmodf(float x, float y);
```

```

long double fmodl(long double x, long double y);

float remainder(float x, float y); // see 20.2
double remainder(double x, double y);
long double remainder(long double x, long double y); // see 20.2
float remainderf(float x, float y);
long double remainderl(long double x, long double y);

float remquo(float x, float y, int* quo); // see 20.2
double remquo(double x, double y, int* quo);
long double remquo(long double x, long double y, int* quo); // see 20.2
float remquof(float x, float y, int* quo);
long double remquol(long double x, long double y, int* quo);

float copysign(float x, float y); // see 20.2
double copysign(double x, double y);
long double copysign(long double x, long double y); // see 20.2
float copysignf(float x, float y);
long double copysignl(long double x, long double y);

double nan(const char* tagp);
float nanf(const char* tagp);
long double nanl(const char* tagp);

float nextafter(float x, float y); // see 20.2
double nextafter(double x, double y);
long double nextafter(long double x, long double y); // see 20.2
float nextafterf(float x, float y);
long double nextafterl(long double x, long double y);

float nexttoward(float x, long double y); // see 20.2
double nexttoward(double x, long double y);
long double nexttoward(long double x, long double y); // see 20.2
float nexttowardf(float x, long double y);
long double nexttowardl(long double x, long double y);

float fdim(float x, float y); // see 20.2
double fdim(double x, double y);
long double fdim(long double x, long double y); // see 20.2
float fdimf(float x, float y);
long double fdiml(long double x, long double y);

float fmax(float x, float y); // see 20.2
double fmax(double x, double y);
long double fmax(long double x, long double y); // see 20.2
float fmaxf(float x, float y);
long double fmaxl(long double x, long double y);

float fmin(float x, float y); // see 20.2
double fmin(double x, double y);
long double fmin(long double x, long double y); // see 20.2
float fminf(float x, float y);
long double fminl(long double x, long double y);

float fma(float x, float y, float z); // see 20.2
double fma(double x, double y, double z);
long double fma(long double x, long double y, long double z); // see 20.2
float fmaf(float x, float y, float z);
long double fmal(long double x, long double y, long double z);

// 30.10.4, classification / comparison functions
int fpclassify(float x);
int fpclassify(double x);
int fpclassify(long double x);

```

```

bool isfinite(float x);
bool isfinite(double x);
bool isfinite(long double x);

bool isinf(float x);
bool isinf(double x);
bool isinf(long double x);

bool isnan(float x);
bool isnan(double x);
bool isnan(long double x);

bool isnormal(float x);
bool isnormal(double x);
bool isnormal(long double x);

bool signbit(float x);
bool signbit(double x);
bool signbit(long double x);

bool isgreater(float x, float y);
bool isgreater(double x, double y);
bool isgreater(long double x, long double y);

bool isgreaterequal(float x, float y);
bool isgreaterequal(double x, double y);
bool isgreaterequal(long double x, long double y);

bool isless(float x, float y);
bool isless(double x, double y);
bool isless(long double x, long double y);

bool islessequal(float x, float y);
bool islessequal(double x, double y);
bool islessequal(long double x, long double y);

bool islessgreater(float x, float y);
bool islessgreater(double x, double y);
bool islessgreater(long double x, long double y);

bool isunordered(float x, float y);
bool isunordered(double x, double y);
bool isunordered(long double x, long double y);

// 30.10.5, mathematical special functions

// 30.10.5.1, associated Laguerre polynomials
double      assoc_laguerre(unsigned n, unsigned m, double x);
float       assoc_laguerref(unsigned n, unsigned m, float x);
long double assoc_laguerrel(unsigned n, unsigned m, long double x);

// 30.10.5.2, associated Legendre functions
double      assoc_legendre(unsigned l, unsigned m, double x);
float       assoc_legendref(unsigned l, unsigned m, float x);
long double assoc_legendrel(unsigned l, unsigned m, long double x);

// 30.10.5.3, beta function
double      beta(double x, double y);
float       betaf(float x, float y);
long double betal(long double x, long double y);

// 30.10.5.4, complete elliptic integral of the first kind
double      comp_ellint_1(double k);
float       comp_ellint_1f(float k);

```

```

long double  comp_ellint_1l(long double k);

// 30.10.5.5, complete elliptic integral of the second kind
double      comp_ellint_2(double k);
float       comp_ellint_2f(float k);
long double comp_ellint_2l(long double k);

// 30.10.5.6, complete elliptic integral of the third kind
double      comp_ellint_3(double k, double nu);
float       comp_ellint_3f(float k, float nu);
long double comp_ellint_3l(long double k, long double nu);

// 30.10.5.7, regular modified cylindrical Bessel functions
double      cyl_bessel_i(double nu, double x);
float       cyl_bessel_if(float nu, float x);
long double cyl_bessel_il(long double nu, long double x);

// 30.10.5.8, cylindrical Bessel functions of the first kind
double      cyl_bessel_j(double nu, double x);
float       cyl_bessel_jf(float nu, float x);
long double cyl_bessel_jl(long double nu, long double x);

// 30.10.5.9, irregular modified cylindrical Bessel functions
double      cyl_bessel_k(double nu, double x);
float       cyl_bessel_kf(float nu, float x);
long double cyl_bessel_kl(long double nu, long double x);

// 30.10.5.10, cylindrical Neumann functions;
// cylindrical Bessel functions of the second kind
double      cyl_neumann(double nu, double x);
float       cyl_neumannf(float nu, float x);
long double cyl_neumannl(long double nu, long double x);

// 30.10.5.11, incomplete elliptic integral of the first kind
double      ellint_1(double k, double phi);
float       ellint_1f(float k, float phi);
long double ellint_1l(long double k, long double phi);

// 30.10.5.12, incomplete elliptic integral of the second kind
double      ellint_2(double k, double phi);
float       ellint_2f(float k, float phi);
long double ellint_2l(long double k, long double phi);

// 30.10.5.13, incomplete elliptic integral of the third kind
double      ellint_3(double k, double nu, double phi);
float       ellint_3f(float k, float nu, float phi);
long double ellint_3l(long double k, long double nu, long double phi);

// 30.10.5.14, exponential integral
double      expint(double x);
float       expintf(float x);
long double expintl(long double x);

// 30.10.5.15, Hermite polynomials
double      hermite(unsigned n, double x);
float       hermitef(unsigned n, float x);
long double hermitel(unsigned n, long double x);

// 30.10.5.16, Laguerre polynomials
double      laguerre(unsigned n, double x);
float       laguerref(unsigned n, float x);
long double laguerrel(unsigned n, long double x);

```

```

// 30.10.5.17, Legendre polynomials
double      legendre(unsigned l, double x);
float       legendref(unsigned l, float x);
long double legendrel(unsigned l, long double x);

// 30.10.5.18, Riemann zeta function
double      riemann_zeta(double x);
float       riemann_zetaf(float x);
long double riemann_zetal(long double x);

// 30.10.5.19, spherical Bessel functions of the first kind
double      sph_bessel(unsigned n, double x);
float       sph_besself(unsigned n, float x);
long double sph_bessell(unsigned n, long double x);

// 30.10.5.20, spherical associated Legendre functions
double      sph_legendre(unsigned l, unsigned m, double theta);
float       sph_legendref(unsigned l, unsigned m, float theta);
long double sph_legendrel(unsigned l, unsigned m, long double theta);

// 30.10.5.21, spherical Neumann functions;
// spherical Bessel functions of the second kind
double      sph_neumann(unsigned n, double x);
float       sph_neumannf(unsigned n, float x);
long double sph_neumannl(unsigned n, long double x);
}

```

- ¹ The contents and meaning of the header `<cmath>` are the same as the C standard library header `<math.h>`, with the addition of a three-dimensional hypotenuse function (30.10.3) and the mathematical special functions described in 30.10.5. [Note: Several functions have additional overloads in this document, but they have the same behavior as in the C standard library (20.2). — end note]
- ² For each set of overloaded functions within `<cmath>`, with the exception of `abs`, there shall be additional overloads sufficient to ensure:
1. If any argument of arithmetic type corresponding to a `double` parameter has type `long double`, then all arguments of arithmetic type (6.7.1) corresponding to `double` parameters are effectively cast to `long double`.
 2. Otherwise, if any argument of arithmetic type corresponding to a `double` parameter has type `double` or an integer type, then all arguments of arithmetic type corresponding to `double` parameters are effectively cast to `double`.
 3. Otherwise, all arguments of arithmetic type corresponding to `double` parameters have type `float`.

[Note: `abs` is exempted from these rules in order to stay compatible with C. — end note]

SEE ALSO: ISO C 7.12

30.10.2 Absolute values

[c.math.abs]

- ¹ [Note: The headers `<cstdlib>` (21.2.2) and `<cmath>` (30.10.1) declare the functions described in this subclause. — end note]

```

int abs(int j);
long int abs(long int j);
long long int abs(long long int j);
float abs(float j);
double abs(double j);
long double abs(long double j);

```

- ² *Effects:* The `abs` functions have the semantics specified in the C standard library for the functions `abs`, `labs`, `llabs`, `fabsf`, `fabs`, and `fabsl`.
- ³ *Remarks:* If `abs()` is called with an argument of type `X` for which `is_unsigned_v<X>` is `true` and if `X` cannot be converted to `int` by integral promotion (7.6), the program is ill-formed. [Note: Arguments that can be promoted to `int` are permitted for compatibility with C. — end note]

SEE ALSO: ISO C 7.12.7.2, 7.22.6.1

30.10.3 Three-dimensional hypotenuse**[c.math.hypot3]**

```
float hypot(float x, float y, float z);
double hypot(double x, double y, double z);
long double hypot(long double x, long double y, long double z);
```

¹ *Returns:* $\sqrt{x^2 + y^2 + z^2}$.

30.10.4 Classification / comparison functions**[c.math.fpclass]**

¹ The classification / comparison functions behave the same as the C macros with the corresponding names defined in the C standard library. Each function is overloaded for the three floating-point types.

SEE ALSO: ISO C 7.12.3, 7.12.4

30.10.5 Mathematical special functions**[sf.cmath]**

¹ If any argument value to any of the functions specified in this subclause is a NaN (Not a Number), the function shall return a NaN but it shall not report a domain error. Otherwise, the function shall report a domain error for just those argument values for which:

- (1.1) — the function description's *Returns:* clause explicitly specifies a domain and those argument values fall outside the specified domain, or
- (1.2) — the corresponding mathematical function value has a nonzero imaginary component, or
- (1.3) — the corresponding mathematical function is not mathematically defined.²⁸⁸

² Unless otherwise specified, each function is defined for all finite values, for negative infinity, and for positive infinity.

30.10.5.1 Associated Laguerre polynomials**[sf.cmath.assoc_laguerre]**

```
double      assoc_laguerre(unsigned n, unsigned m, double x);
float       assoc_laguerref(unsigned n, unsigned m, float x);
long double assoc_laguerrel(unsigned n, unsigned m, long double x);
```

¹ *Effects:* These functions compute the associated Laguerre polynomials of their respective arguments *n*, *m*, and *x*.

² *Returns:*

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x), \quad \text{for } x \geq 0,$$

where *n* is *n*, *m* is *m*, and *x* is *x*.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if *n* \geq 128 or if *m* \geq 128.

30.10.5.2 Associated Legendre functions**[sf.cmath.assoc_legendre]**

```
double      assoc_legendre(unsigned l, unsigned m, double x);
float       assoc_legendref(unsigned l, unsigned m, float x);
long double assoc_legendrel(unsigned l, unsigned m, long double x);
```

¹ *Effects:* These functions compute the associated Legendre functions of their respective arguments *l*, *m*, and *x*.

² *Returns:*

$$P_l^m(x) = (1 - x^2)^{m/2} \frac{d^m}{dx^m} P_l(x), \quad \text{for } |x| \leq 1,$$

where *l* is *l*, *m* is *m*, and *x* is *x*.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if *l* \geq 128.

²⁸⁸ A mathematical function is mathematically defined for a given set of argument values (a) if it is explicitly defined for that set of argument values, or (b) if its limiting value exists and does not depend on the direction of approach.

30.10.5.3 Beta function

[sf.cmath.beta]

```
double    beta(double x, double y);
float     betaf(float x, float y);
long double betal(long double x, long double y);
```

1 *Effects:* These functions compute the beta function of their respective arguments x and y .

2 *Returns:*

$$B(x, y) = \frac{\Gamma(x)\Gamma(y)}{\Gamma(x+y)}, \quad \text{for } x > 0, y > 0,$$

where x is x and y is y .

30.10.5.4 Complete elliptic integral of the first kind

[sf.cmath.comp_ellint_1]

```
double    comp_ellint_1(double k);
float     comp_ellint_1f(float k);
long double comp_ellint_1l(long double k);
```

1 *Effects:* These functions compute the complete elliptic integral of the first kind of their respective arguments k .

2 *Returns:*

$$K(k) = F(k, \pi/2), \quad \text{for } |k| \leq 1,$$

where k is k .

3 See also [30.10.5.11](#).

30.10.5.5 Complete elliptic integral of the second kind

[sf.cmath.comp_ellint_2]

```
double    comp_ellint_2(double k);
float     comp_ellint_2f(float k);
long double comp_ellint_2l(long double k);
```

1 *Effects:* These functions compute the complete elliptic integral of the second kind of their respective arguments k .

2 *Returns:*

$$E(k) = E(k, \pi/2), \quad \text{for } |k| \leq 1,$$

where k is k .

3 See also [30.10.5.12](#).

30.10.5.6 Complete elliptic integral of the third kind

[sf.cmath.comp_ellint_3]

```
double    comp_ellint_3(double k, double nu);
float     comp_ellint_3f(float k, float nu);
long double comp_ellint_3l(long double k, long double nu);
```

1 *Effects:* These functions compute the complete elliptic integral of the third kind of their respective arguments k and ν .

2 *Returns:*

$$\Pi(\nu, k) = \Pi(\nu, k, \pi/2), \quad \text{for } |k| \leq 1,$$

where k is k and ν is ν .

3 See also [30.10.5.13](#).

30.10.5.7 Regular modified cylindrical Bessel functions

[sf.cmath.cyl_bessel_i]

```
double    cyl_bessel_i(double nu, double x);
float     cyl_bessel_if(float nu, float x);
long double cyl_bessel_il(long double nu, long double x);
```

1 *Effects:* These functions compute the regular modified cylindrical Bessel functions of their respective arguments ν and x .

2 *Returns:*

$$I_\nu(x) = i^{-\nu} J_\nu(ix) = \sum_{k=0}^{\infty} \frac{(x/2)^{\nu+2k}}{k! \Gamma(\nu+k+1)}, \quad \text{for } x \geq 0,$$

where ν is `nu` and x is `x`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `nu` \geq 128.

4 See also [30.10.5.8](#).

30.10.5.8 Cylindrical Bessel functions of the first kind [sf.cmath.cyl_bessel_j]

```
double    cyl_bessel_j(double nu, double x);
float     cyl_bessel_jf(float nu, float x);
long double cyl_bessel_jl(long double nu, long double x);
```

1 *Effects:* These functions compute the cylindrical Bessel functions of the first kind of their respective arguments `nu` and `x`.

2 *Returns:*

$$J_\nu(x) = \sum_{k=0}^{\infty} \frac{(-1)^k (x/2)^{\nu+2k}}{k! \Gamma(\nu+k+1)}, \quad \text{for } x \geq 0,$$

where ν is `nu` and x is `x`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `nu` \geq 128.

30.10.5.9 Irregular modified cylindrical Bessel functions [sf.cmath.cyl_bessel_k]

```
double    cyl_bessel_k(double nu, double x);
float     cyl_bessel_kf(float nu, float x);
long double cyl_bessel_kl(long double nu, long double x);
```

1 *Effects:* These functions compute the irregular modified cylindrical Bessel functions of their respective arguments `nu` and `x`.

2 *Returns:*

$$K_\nu(x) = (\pi/2)i^{\nu+1}(J_\nu(ix) + iN_\nu(ix)) = \begin{cases} \frac{\pi}{2} \frac{I_{-\nu}(x) - I_\nu(x)}{\sin \nu\pi}, & \text{for } x \geq 0 \text{ and non-integral } \nu \\ \frac{\pi}{2} \lim_{\mu \rightarrow \nu} \frac{I_{-\mu}(x) - I_\mu(x)}{\sin \mu\pi}, & \text{for } x \geq 0 \text{ and integral } \nu \end{cases}$$

where ν is `nu` and x is `x`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `nu` \geq 128.

4 See also [30.10.5.7](#), [30.10.5.8](#), [30.10.5.10](#).

30.10.5.10 Cylindrical Neumann functions [sf.cmath.cyl_neumann]

```
double    cyl_neumann(double nu, double x);
float     cyl_neumannf(float nu, float x);
long double cyl_neumannl(long double nu, long double x);
```

1 *Effects:* These functions compute the cylindrical Neumann functions, also known as the cylindrical Bessel functions of the second kind, of their respective arguments `nu` and `x`.

2 *Returns:*

$$N_\nu(x) = \begin{cases} \frac{J_\nu(x) \cos \nu\pi - J_{-\nu}(x)}{\sin \nu\pi}, & \text{for } x \geq 0 \text{ and non-integral } \nu \\ \lim_{\mu \rightarrow \nu} \frac{J_\mu(x) \cos \mu\pi - J_{-\mu}(x)}{\sin \mu\pi}, & \text{for } x \geq 0 \text{ and integral } \nu \end{cases}$$

where ν is `nu` and x is `x`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `nu` \geq 128.

4 See also [30.10.5.8](#).

30.10.5.11 Incomplete elliptic integral of the first kind [sf.cmath.ellint_1]

```
double    ellint_1(double k, double phi);
float     ellint_1f(float k, float phi);
long double ellint_1l(long double k, long double phi);
```

¹ *Effects:* These functions compute the incomplete elliptic integral of the first kind of their respective arguments `k` and `phi` (`phi` measured in radians).

² *Returns:*

$$F(k, \phi) = \int_0^{\phi} \frac{d\theta}{\sqrt{1 - k^2 \sin^2 \theta}}, \quad \text{for } |k| \leq 1,$$

where k is `k` and ϕ is `phi`.

30.10.5.12 Incomplete elliptic integral of the second kind [sf.cmath.ellint_2]

```
double    ellint_2(double k, double phi);
float     ellint_2f(float k, float phi);
long double ellint_2l(long double k, long double phi);
```

¹ *Effects:* These functions compute the incomplete elliptic integral of the second kind of their respective arguments `k` and `phi` (`phi` measured in radians).

² *Returns:*

$$E(k, \phi) = \int_0^{\phi} \sqrt{1 - k^2 \sin^2 \theta} d\theta, \quad \text{for } |k| \leq 1,$$

where k is `k` and ϕ is `phi`.

30.10.5.13 Incomplete elliptic integral of the third kind [sf.cmath.ellint_3]

```
double    ellint_3(double k, double nu, double phi);
float     ellint_3f(float k, float nu, float phi);
long double ellint_3l(long double k, long double nu, long double phi);
```

¹ *Effects:* These functions compute the incomplete elliptic integral of the third kind of their respective arguments `k`, `nu`, and `phi` (`phi` measured in radians).

² *Returns:*

$$\Pi(\nu, k, \phi) = \int_0^{\phi} \frac{d\theta}{(1 - \nu \sin^2 \theta) \sqrt{1 - k^2 \sin^2 \theta}}, \quad \text{for } |k| \leq 1,$$

where ν is `nu`, k is `k`, and ϕ is `phi`.

30.10.5.14 Exponential integral [sf.cmath.expint]

```
double    expint(double x);
float     expintf(float x);
long double expintl(long double x);
```

¹ *Effects:* These functions compute the exponential integral of their respective arguments `x`.

² *Returns:*

$$\text{Ei}(x) = - \int_{-x}^{\infty} \frac{e^{-t}}{t} dt$$

where x is `x`.

30.10.5.15 Hermite polynomials [sf.cmath.hermite]

```
double    hermite(unsigned n, double x);
float     hermitef(unsigned n, float x);
long double hermitel(unsigned n, long double x);
```

¹ *Effects:* These functions compute the Hermite polynomials of their respective arguments `n` and `x`.

² *Returns:*

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

where n is `n` and x is `x`.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if `n` \geq 128.

30.10.5.16 Laguerre polynomials

[sf.cmath.laguerre]

```
double    laguerre(unsigned n, double x);
float     laguerref(unsigned n, float x);
long double laguerrel(unsigned n, long double x);
```

¹ *Effects:* These functions compute the Laguerre polynomials of their respective arguments **n** and **x**.

² *Returns:*

$$L_n(x) = \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x}), \quad \text{for } x \geq 0,$$

where n is **n** and x is **x**.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if **n** \geq 128.

30.10.5.17 Legendre polynomials

[sf.cmath.legendre]

```
double    legendre(unsigned l, double x);
float     legendref(unsigned l, float x);
long double legendrel(unsigned l, long double x);
```

¹ *Effects:* These functions compute the Legendre polynomials of their respective arguments **l** and **x**.

² *Returns:*

$$P_\ell(x) = \frac{1}{2^\ell \ell!} \frac{d^\ell}{dx^\ell} (x^2 - 1)^\ell, \quad \text{for } |x| \leq 1,$$

where l is **l** and x is **x**.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if **l** \geq 128.

30.10.5.18 Riemann zeta function

[sf.cmath.riemann_zeta]

```
double    riemann_zeta(double x);
float     riemann_zetaf(float x);
long double riemann_zetal(long double x);
```

¹ *Effects:* These functions compute the Riemann zeta function of their respective arguments **x**.

² *Returns:*

$$\zeta(x) = \begin{cases} \sum_{k=1}^{\infty} k^{-x}, & \text{for } x > 1 \\ \frac{1}{1 - 2^{1-x}} \sum_{k=1}^{\infty} (-1)^{k-1} k^{-x}, & \text{for } 0 \leq x \leq 1 \\ 2^x \pi^{x-1} \sin\left(\frac{\pi x}{2}\right) \Gamma(1-x) \zeta(1-x), & \text{for } x < 0 \end{cases}$$

where x is **x**.

30.10.5.19 Spherical Bessel functions of the first kind

[sf.cmath.sph_bessel]

```
double    sph_bessel(unsigned n, double x);
float     sph_besself(unsigned n, float x);
long double sph_bessell(unsigned n, long double x);
```

¹ *Effects:* These functions compute the spherical Bessel functions of the first kind of their respective arguments **n** and **x**.

² *Returns:*

$$j_n(x) = (\pi/2x)^{1/2} J_{n+1/2}(x), \quad \text{for } x \geq 0,$$

where n is **n** and x is **x**.

³ *Remarks:* The effect of calling each of these functions is implementation-defined if **n** \geq 128.

⁴ See also [30.10.5.8](#).

30.10.5.20 Spherical associated Legendre functions [sf.cmath.sph_legendre]

```
double sph_legendre(unsigned l, unsigned m, double theta);
float sph_legendref(unsigned l, unsigned m, float theta);
long double sph_legendrel(unsigned l, unsigned m, long double theta);
```

1 *Effects:* These functions compute the spherical associated Legendre functions of their respective arguments `l`, `m`, and `theta` (`theta` measured in radians).

2 *Returns:*

$$Y_{\ell}^m(\theta, 0)$$

where

$$Y_{\ell}^m(\theta, \phi) = (-1)^m \left[\frac{(2\ell + 1)}{4\pi} \frac{(\ell - m)!}{(\ell + m)!} \right]^{1/2} P_{\ell}^m(\cos \theta) e^{im\phi}, \quad \text{for } |m| \leq \ell,$$

and l is `l`, m is `m`, and θ is `theta`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `l` \geq 128.

4 See also [30.10.5.2](#).

30.10.5.21 Spherical Neumann functions [sf.cmath.sph_neumann]

```
double sph_neumann(unsigned n, double x);
float sph_neumannf(unsigned n, float x);
long double sph_neumannl(unsigned n, long double x);
```

1 *Effects:* These functions compute the spherical Neumann functions, also known as the spherical Bessel functions of the second kind, of their respective arguments `n` and `x`.

2 *Returns:*

$$n_n(x) = (\pi/2x)^{1/2} N_{n+1/2}(x), \quad \text{for } x \geq 0,$$

where n is `n` and x is `x`.

3 *Remarks:* The effect of calling each of these functions is implementation-defined if `n` \geq 128.

4 See also [30.10.5.10](#).

31 Input/output library [input.output]

31.1 General [input.output.general]

- ¹ This Clause describes components that C++ programs may use to perform input/output operations.
- ² The following subclasses describe requirements for stream parameters, and components for forward declarations of iostreams, predefined iostreams objects, base iostreams classes, stream buffering, stream formatting and manipulators, string streams, and file streams, as summarized in Table 103.

Table 103 — Input/output library summary

Subclause	Header(s)
31.2	Requirements
31.3	Forward declarations <iosfwd>
31.4	Standard iostream objects <iostream>
31.5	Iostreams base classes <ios>
31.6	Stream buffers <streambuf>
31.7	Formatting and manipulators <istream> <ostream> <iomanip>
31.8	String streams <sstream>
31.9	File streams <fstream>
31.10	Synchronized output streams <syncstream>
31.11	File systems <filesystem>
31.12	C library files <cstdio> <cinttypes>

- ³ Figure 7 illustrates relationships among various types described in this clause. A line from **A** to **B** indicates that **A** is an alias (e.g., a typedef) for **B** or that **A** is defined in terms of **B**.

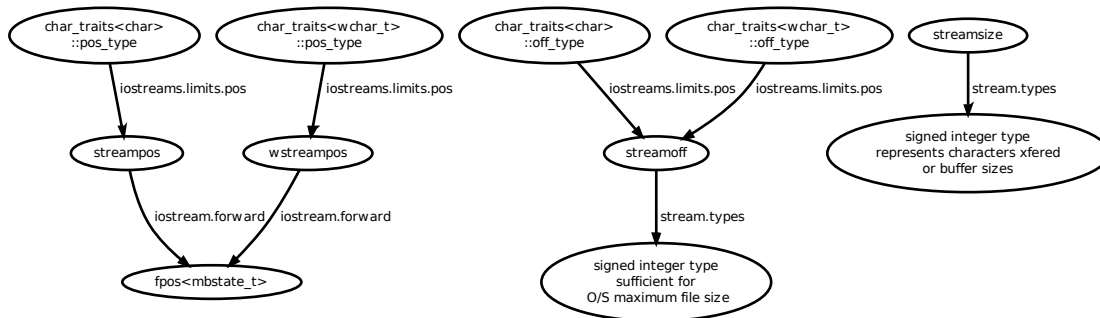


Figure 7 — Stream position, offset, and size types [non-normative]

31.2 Iostreams requirements [iostreams.requirements]

31.2.1 Imbue limitations [iostream.limits.imbue]

- ¹ No function described in Clause 31 except for `ios_base::imbue` and `basic_filebuf::pubimbue` causes any instance of `basic_ios::imbue` or `basic_streambuf::imbue` to be called. If any user function called from a function declared in Clause 31 or as an overriding virtual function of any class declared in Clause 31 calls `imbue`, the behavior is undefined.

31.2.2 Positioning type limitations**[iostreams.limits.pos]**

- ¹ The classes of [Clause 31](#) with template arguments `charT` and `traits` behave as described if `traits::pos_type` and `traits::off_type` are `streampos` and `streamoff` respectively. Except as noted explicitly below, their behavior when `traits::pos_type` and `traits::off_type` are other types is implementation-defined.
- ² In the classes of [Clause 31](#), a template parameter with name `charT` represents a member of the set of types containing `char`, `wchar_t`, and any other implementation-defined character types that satisfy the requirements for a character on which any of the `iostream` components can be instantiated.

31.2.3 Thread safety**[iostreams.threadsafety]**

- ¹ Concurrent access to a stream object ([31.8](#), [31.9](#)), stream buffer object ([31.6](#)), or C Library stream ([31.12](#)) by multiple threads may result in a data race ([6.8.2](#)) unless otherwise specified ([31.4](#)). [*Note: Data races result in undefined behavior ([6.8.2](#)). — end note*]
- ² If one thread makes a library call *a* that writes a value to a stream and, as a result, another thread reads this value from the stream through a library call *b* such that this does not result in a data race, then *a*'s write synchronizes with *b*'s read.

31.3 Forward declarations**[iostream.forward]****31.3.1 Header `<iosfwd>` synopsis****[iosfwd.syn]**

```

namespace std {
    template<class charT> class char_traits;
    template<> class char_traits<char>;
    template<> class char_traits<char16_t>;
    template<> class char_traits<char32_t>;
    template<> class char_traits<wchar_t>;

    template<class T> class allocator;

    template<class charT, class traits = char_traits<charT>>
        class basic_ios;
    template<class charT, class traits = char_traits<charT>>
        class basic_streambuf;
    template<class charT, class traits = char_traits<charT>>
        class basic_istream;
    template<class charT, class traits = char_traits<charT>>
        class basic_ostream;
    template<class charT, class traits = char_traits<charT>>
        class basic_iostream;

    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_stringbuf;
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_istreamstream;
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_ostreamstream;
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_stringstream;

    template<class charT, class traits = char_traits<charT>>
        class basic_filebuf;
    template<class charT, class traits = char_traits<charT>>
        class basic_ifstream;
    template<class charT, class traits = char_traits<charT>>
        class basic_ofstream;
    template<class charT, class traits = char_traits<charT>>
        class basic_fstream;

```

```

template<class charT, class traits = char_traits<charT>,
        class Allocator = allocator<charT>>
    class basic_syncbuf;
template<class charT, class traits = char_traits<charT>,
        class Allocator = allocator<charT>>
    class basic_osyncstream;

template<class charT, class traits = char_traits<charT>>
    class istreambuf_iterator;
template<class charT, class traits = char_traits<charT>>
    class ostreambuf_iterator;

using ios    = basic_ios<char>;
using wios   = basic_ios<wchar_t>;

using streambuf = basic_streambuf<char>;
using istream   = basic_istream<char>;
using ostream   = basic_ostream<char>;
using iostream  = basic_iostream<char>;

using stringbuf    = basic_stringbuf<char>;
using istringstream = basic_istringstream<char>;
using ostreamstream = basic_ostringstream<char>;
using stringstream  = basic_stringstream<char>;

using filebuf    = basic_filebuf<char>;
using ifstream  = basic_ifstream<char>;
using ofstream  = basic_ofstream<char>;
using fstream   = basic_fstream<char>;

using syncbuf = basic_syncbuf<char>;
using osyncstream = basic_osyncstream<char>;

using wstreambuf = basic_streambuf<wchar_t>;
using wistream   = basic_istream<wchar_t>;
using wostream   = basic_ostream<wchar_t>;
using wiostream  = basic_iostream<wchar_t>;

using wstringbuf    = basic_stringbuf<wchar_t>;
using wistringstream = basic_istringstream<wchar_t>;
using wostringstream = basic_ostringstream<wchar_t>;
using wstringstream  = basic_stringstream<wchar_t>;

using wfilebuf    = basic_filebuf<wchar_t>;
using wifstream  = basic_ifstream<wchar_t>;
using wofstream  = basic_ofstream<wchar_t>;
using wfstream   = basic_fstream<wchar_t>;

using wsyncbuf = basic_syncbuf<wchar_t>;
using wosyncstream = basic_osyncstream<wchar_t>;

template<class state> class fpos;
using streampos    = fpos<char_traits<char>::state_type>;
using wstreampos   = fpos<char_traits<wchar_t>::state_type>;
}

```

¹ Default template arguments are described as appearing both in `<iosfwd>` and in the synopsis of other headers but it is well-formed to include both `<iosfwd>` and one or more of the other headers.²⁸⁹

289) It is the implementation's responsibility to implement headers so that including `<iosfwd>` and other headers does not violate the rules about multiple occurrences of default arguments.

31.3.2 Overview**[iostream.forward.overview]**

- 1 The class template specialization `basic_ios<charT, traits>` serves as a virtual base class for the class templates `basic_istream`, `basic_ostream`, and class templates derived from them. `basic_iostream` is a class template derived from both `basic_istream<charT, traits>` and `basic_ostream<charT, traits>`.
- 2 The class template specialization `basic_streambuf<charT, traits>` serves as a base class for class templates `basic_stringbuf` and `basic_filebuf`.
- 3 The class template specialization `basic_istream<charT, traits>` serves as a base class for class templates `basic_istreamstream` and `basic_ifstream`.
- 4 The class template specialization `basic_ostream<charT, traits>` serves as a base class for class templates `basic_ostreamstream` and `basic_ofstream`.
- 5 The class template specialization `basic_iostream<charT, traits>` serves as a base class for class templates `basic_stringstream` and `basic_fstream`.
- 6 Other *typedef-names* define instances of class templates specialized for `char` or `wchar_t` types.
- 7 Specializations of the class template `fpos` are used for specifying file position information.
- 8 The types `streampos` and `wstreampos` are used for positioning streams specialized on `char` and `wchar_t` respectively.
- 9 [Note: This synopsis suggests a circularity between `streampos` and `char_traits<char>`. An implementation can avoid this circularity by substituting equivalent types. One way to do this might be

```
template<class stateT> class fpos { /* ... */ };           // depends on nothing
using _STATE = /* ... */ ;                               // implementation private declaration of stateT

using streampos = fpos<_STATE>;

template<> struct char_traits<char> {
    using pos_type = streampos;
}
```

— end note]

31.4 Standard iostream objects**[iostream.objects]****31.4.1 Header <iostream> synopsis****[iostream.syn]**

```
#include <ios>           // see 31.5.1
#include <streambuf>     // see 31.6.1
#include <istream>       // see 31.7.1
#include <ostream>       // see 31.7.2
```

```
namespace std {
    extern istream cin;
    extern ostream cout;
    extern ostream cerr;
    extern ostream clog;

    extern wistream wcin;
    extern wostream wcout;
    extern wostream wcerr;
    extern wostream wclog;
}
```

31.4.2 Overview**[iostream.objects.overview]**

- 1 In this Clause, the type name `FILE` refers to the type `FILE` declared in `<cstdio>` (31.12.1).
- 2 The header `<iostream>` declares objects that associate objects with the standard C streams provided for by the functions declared in `<cstdio>` (31.12), and includes all the headers necessary to use these objects.
- 3 The objects are constructed and the associations are established at some time prior to or during the first time an object of class `ios_base::Init` is constructed, and in any case before the body of `main` (6.8.3.1)

begins execution.²⁹⁰ The objects are not destroyed during program execution.²⁹¹ The results of including `<iostream>` in a translation unit shall be as if `<iostream>` defined an instance of `ios_base::Init` with static storage duration.

- 4 Mixing operations on corresponding wide- and narrow-character streams follows the same semantics as mixing such operations on `FILEs`, as specified in the C standard library.
- 5 Concurrent access to a synchronized (31.5.3.4) standard `iostream` object's formatted and unformatted input (31.7.4.1) and output (31.7.5.1) functions or a standard C stream by multiple threads shall not result in a data race (6.8.2). [*Note: Users must still synchronize concurrent use of these objects and streams by multiple threads if they wish to avoid interleaved characters. — end note*]

SEE ALSO: ISO C 7.21.2

31.4.3 Narrow stream objects

[`narrow.stream.objects`]

`istream cin;`

- 1 The object `cin` controls input from a stream buffer associated with the object `stdin`, declared in `<cstdio>` (31.12.1).

- 2 After the object `cin` is initialized, `cin.tie()` returns `&cout`. Its state is otherwise the same as required for `basic_ios<char>::init` (31.5.5.2).

`ostream cout;`

- 3 The object `cout` controls output to a stream buffer associated with the object `stdout`, declared in `<cstdio>` (31.12.1).

`ostream cerr;`

- 4 The object `cerr` controls output to a stream buffer associated with the object `stderr`, declared in `<cstdio>` (31.12.1).

- 5 After the object `cerr` is initialized, `cerr.flags() & unitbuf` is nonzero and `cerr.tie()` returns `&cout`. Its state is otherwise the same as required for `basic_ios<char>::init` (31.5.5.2).

`ostream clog;`

- 6 The object `clog` controls output to a stream buffer associated with the object `stderr`, declared in `<cstdio>` (31.12.1).

31.4.4 Wide stream objects

[`wide.stream.objects`]

`wistream wcin;`

- 1 The object `wcin` controls input from a stream buffer associated with the object `stdin`, declared in `<cstdio>` (31.12.1).

- 2 After the object `wcin` is initialized, `wcin.tie()` returns `&wcout`. Its state is otherwise the same as required for `basic_ios<wchar_t>::init` (31.5.5.2).

`wostream wcout;`

- 3 The object `wcout` controls output to a stream buffer associated with the object `stdout`, declared in `<cstdio>` (31.12.1).

`wostream wcerr;`

- 4 The object `wcerr` controls output to a stream buffer associated with the object `stderr`, declared in `<cstdio>` (31.12.1).

- 5 After the object `wcerr` is initialized, `wcerr.flags() & unitbuf` is nonzero and `wcerr.tie()` returns `&wcout`. Its state is otherwise the same as required for `basic_ios<wchar_t>::init` (31.5.5.2).

`wostream wclog;`

- 6 The object `wclog` controls output to a stream buffer associated with the object `stderr`, declared in `<cstdio>` (31.12.1).

²⁹⁰ If it is possible for them to do so, implementations should initialize the objects earlier than required.

²⁹¹ Constructors and destructors for static objects can access these objects to read input from `stdin` or write output to `stdout` or `stderr`.

31.5 Iostreams base classes

[iostreams.base]

31.5.1 Header <ios> synopsis

[ios.syn]

```

#include <iosfwd>    // see 31.3.1

namespace std {
    using streamoff = implementation-defined;
    using streamsize = implementation-defined;
    template<class stateT> class fpos;

    class ios_base;
    template<class charT, class traits = char_traits<charT>>
        class basic_ios;

    // 31.5.6, manipulators
    ios_base& boolalpha (ios_base& str);
    ios_base& noboolalpha(ios_base& str);

    ios_base& showbase (ios_base& str);
    ios_base& noshowbase (ios_base& str);

    ios_base& showpoint (ios_base& str);
    ios_base& noshowpoint(ios_base& str);

    ios_base& showpos (ios_base& str);
    ios_base& noshowpos (ios_base& str);

    ios_base& skipws (ios_base& str);
    ios_base& noskipws (ios_base& str);

    ios_base& uppercase (ios_base& str);
    ios_base& nouppercase(ios_base& str);

    ios_base& unitbuf (ios_base& str);
    ios_base& nunitbuf (ios_base& str);

    // 31.5.6.2, adjustfield
    ios_base& internal (ios_base& str);
    ios_base& left (ios_base& str);
    ios_base& right (ios_base& str);

    // 31.5.6.3, basefield
    ios_base& dec (ios_base& str);
    ios_base& hex (ios_base& str);
    ios_base& oct (ios_base& str);

    // 31.5.6.4, floatfield
    ios_base& fixed (ios_base& str);
    ios_base& scientific (ios_base& str);
    ios_base& hexfloat (ios_base& str);
    ios_base& defaultfloat(ios_base& str);

    // 31.5.7, error reporting
    enum class io_errc {
        stream = 1
    };

    template<> struct is_error_code_enum<io_errc> : public true_type { };
    error_code make_error_code(io_errc e) noexcept;
    error_condition make_error_condition(io_errc e) noexcept;
    const error_category& iostream_category() noexcept;
}

```

31.5.2 Types**[stream.types]**

```
using streamoff = implementation-defined;
```

- ¹ The type `streamoff` is a synonym for one of the signed basic integral types of sufficient size to represent the maximum possible file size for the operating system.²⁹²

```
using streamsize = implementation-defined;
```

- ² The type `streamsize` is a synonym for one of the signed basic integral types. It is used to represent the number of characters transferred in an I/O operation, or the size of I/O buffers.²⁹³

31.5.3 Class `ios_base`**[ios.base]**

```
namespace std {
    class ios_base {
    public:
        class failure; // see below

        // 31.5.3.1.2, fmtflags
        using fmtflags = T1;
        static constexpr fmtflags boolalpha = unspecified;
        static constexpr fmtflags dec = unspecified;
        static constexpr fmtflags fixed = unspecified;
        static constexpr fmtflags hex = unspecified;
        static constexpr fmtflags internal = unspecified;
        static constexpr fmtflags left = unspecified;
        static constexpr fmtflags oct = unspecified;
        static constexpr fmtflags right = unspecified;
        static constexpr fmtflags scientific = unspecified;
        static constexpr fmtflags showbase = unspecified;
        static constexpr fmtflags showpoint = unspecified;
        static constexpr fmtflags showpos = unspecified;
        static constexpr fmtflags skipws = unspecified;
        static constexpr fmtflags unitbuf = unspecified;
        static constexpr fmtflags uppercase = unspecified;
        static constexpr fmtflags adjustfield = see below;
        static constexpr fmtflags basefield = see below;
        static constexpr fmtflags floatfield = see below;

        // 31.5.3.1.3, iostate
        using iostate = T2;
        static constexpr iostate badbit = unspecified;
        static constexpr iostate eofbit = unspecified;
        static constexpr iostate failbit = unspecified;
        static constexpr iostate goodbit = see below;

        // 31.5.3.1.4, openmode
        using openmode = T3;
        static constexpr openmode app = unspecified;
        static constexpr openmode ate = unspecified;
        static constexpr openmode binary = unspecified;
        static constexpr openmode in = unspecified;
        static constexpr openmode out = unspecified;
        static constexpr openmode trunc = unspecified;

        // 31.5.3.1.5, seekdir
        using seekdir = T4;
        static constexpr seekdir beg = unspecified;
        static constexpr seekdir cur = unspecified;
        static constexpr seekdir end = unspecified;

        class Init;
```

²⁹²) Typically long long.

²⁹³) `streamsize` is used in most places where ISO C would use `size_t`.

```

// 31.5.3.2, fmtflags state
fmtflags flags() const;
fmtflags flags(fmtflags fmtfl);
fmtflags setf(fmtflags fmtfl);
fmtflags setf(fmtflags fmtfl, fmtflags mask);
void unsetf(fmtflags mask);

streamsize precision() const;
streamsize precision(streamsize prec);
streamsize width() const;
streamsize width(streamsize wide);

// 31.5.3.3, locales
locale imbue(const locale& loc);
locale getloc() const;

// 31.5.3.5, storage
static int xalloc();
long& iword(int idx);
void*& pword(int idx);

// destructor
virtual ~ios_base();

// 31.5.3.6, callbacks
enum event { erase_event, imbue_event, copyfmt_event };
using event_callback = void (*)(event, ios_base&, int idx);
void register_callback(event_callback fn, int idx);

ios_base(const ios_base&) = delete;
ios_base& operator=(const ios_base&) = delete;

static bool sync_with_stdio(bool sync = true);

protected:
    ios_base();

private:
    static int index; // exposition only
    long* iarray; // exposition only
    void** parray; // exposition only
};
}

```

¹ `ios_base` defines several member types:

- (1.1) — a type `failure`, defined as either a class derived from `system_error` or a synonym for a class derived from `system_error`;
- (1.2) — a class `Init`;
- (1.3) — three bitmask types, `fmtflags`, `iostate`, and `openmode`;
- (1.4) — an enumerated type, `seekdir`.

² It maintains several kinds of data:

- (2.1) — state information that reflects the integrity of the stream buffer;
- (2.2) — control information that influences how to interpret (format) input sequences and how to generate (format) output sequences;
- (2.3) — additional information that is stored by the program for its private use.

³ [Note: For the sake of exposition, the maintained data is presented here as:

- (3.1) — `static int index`, specifies the next available unique index for the integer or pointer arrays maintained for the private use of the program, initialized to an unspecified value;

- (3.2) — `long* iarray`, points to the first element of an arbitrary-length `long` array maintained for the private use of the program;
- (3.3) — `void** parray`, points to the first element of an arbitrary-length pointer array maintained for the private use of the program.

— *end note*]

31.5.3.1 Types [ios.types]

31.5.3.1.1 Class `ios_base::failure` [ios::failure]

```
namespace std {
    class ios_base::failure : public system_error {
    public:
        explicit failure(const string& msg, const error_code& ec = io_errc::stream);
        explicit failure(const char* msg, const error_code& ec = io_errc::stream);
    };
}
```

- ¹ An implementation is permitted to define `ios_base::failure` as a synonym for a class with equivalent functionality to class `ios_base::failure` shown in this subclause. [*Note*: When `ios_base::failure` is a synonym for another type it shall provide a nested type `failure`, to emulate the injected class name. — *end note*] The class `failure` defines the base class for the types of all objects thrown as exceptions, by functions in the `iostreams` library, to report errors detected during stream buffer operations.
- ² When throwing `ios_base::failure` exceptions, implementations should provide values of `ec` that identify the specific reason for the failure. [*Note*: Errors arising from the operating system would typically be reported as `system_category()` errors with an error value of the error number reported by the operating system. Errors arising from within the stream library would typically be reported as `error_code(io_errc::stream, iostream_category())`. — *end note*]

```
explicit failure(const string& msg, const error_code& ec = io_errc::stream);
```

- ³ *Effects*: Constructs an object of class `failure` by constructing the base class with `msg` and `ec`.

```
explicit failure(const char* msg, const error_code& ec = io_errc::stream);
```

- ⁴ *Effects*: Constructs an object of class `failure` by constructing the base class with `msg` and `ec`.

31.5.3.1.2 Type `ios_base::fmtflags` [ios::fmtflags]

```
using fmtflags = T1;
```

- ¹ The type `fmtflags` is a bitmask type (20.4.2.1.4). Setting its elements has the effects indicated in Table 104.
- ² Type `fmtflags` also defines the constants indicated in Table 105.

31.5.3.1.3 Type `ios_base::iostate` [ios::iostate]

```
using iostate = T2;
```

- ¹ The type `iostate` is a bitmask type (20.4.2.1.4) that contains the elements indicated in Table 106.
- ² Type `iostate` also defines the constant:
- (2.1) — `goodbit`, the value zero.

31.5.3.1.4 Type `ios_base::openmode` [ios::openmode]

```
using openmode = T3;
```

- ¹ The type `openmode` is a bitmask type (20.4.2.1.4). It contains the elements indicated in Table 107.

31.5.3.1.5 Type `ios_base::seekdir` [ios::seekdir]

```
using seekdir = T4;
```

- ¹ The type `seekdir` is an enumerated type (20.4.2.1.3) that contains the elements indicated in Table 108.

Table 104 — `fntflags` effects

Element	Effect(s) if set
<code>boolalpha</code>	insert and extract <code>bool</code> type in alphabetic format
<code>dec</code>	converts integer input or generates integer output in decimal base
<code>fixed</code>	generate floating-point output in fixed-point notation
<code>hex</code>	converts integer input or generates integer output in hexadecimal base
<code>internal</code>	adds fill characters at a designated internal point in certain generated output, or identical to <code>right</code> if no such point is designated
<code>left</code>	adds fill characters on the right (final positions) of certain generated output
<code>oct</code>	converts integer input or generates integer output in octal base
<code>right</code>	adds fill characters on the left (initial positions) of certain generated output
<code>scientific</code>	generates floating-point output in scientific notation
<code>showbase</code>	generates a prefix indicating the numeric base of generated integer output
<code>showpoint</code>	generates a decimal-point character unconditionally in generated floating-point output
<code>showpos</code>	generates a <code>+</code> sign in non-negative generated numeric output
<code>skipws</code>	skips leading whitespace before certain input operations
<code>unitbuf</code>	flushes output after each output operation
<code>uppercase</code>	replaces certain lowercase letters with their uppercase equivalents in generated output

Table 105 — `fntflags` constants

Constant	Allowable values
<code>adjustfield</code>	<code>left</code> <code>right</code> <code>internal</code>
<code>basefield</code>	<code>dec</code> <code>oct</code> <code>hex</code>
<code>floatfield</code>	<code>scientific</code> <code>fixed</code>

Table 106 — `iostate` effects

Element	Effect(s) if set
<code>badbit</code>	indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file);
<code>eofbit</code>	indicates that an input operation reached the end of an input sequence;
<code>failbit</code>	indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Table 107 — `openmode` effects

Element	Effect(s) if set
<code>app</code>	seek to end before each write
<code>ate</code>	open and seek to end immediately after opening
<code>binary</code>	perform input and output in binary mode (as opposed to text mode)
<code>in</code>	open for input
<code>out</code>	open for output
<code>trunc</code>	truncate an existing stream when opening

Table 108 — `seekdir` effects

Element	Meaning
<code>beg</code>	request a seek (for subsequent input or output) relative to the beginning of the stream
<code>cur</code>	request a seek relative to the current position within the sequence
<code>end</code>	request a seek relative to the current end of the sequence

31.5.3.1.6 Class ios_base::Init**[ios::Init]**

```

namespace std {
    class ios_base::Init {
    public:
        Init();
        Init(const Init&) = default;
        ~Init();
        Init& operator=(const Init&) = default;
    private:
        static int init_cnt; // exposition only
    };
}

```

- 1 The class `Init` describes an object whose construction ensures the construction of the eight objects declared in `<iostream>` (31.4) that associate file stream buffers with the standard C streams provided for by the functions declared in `<cstdio>` (31.12.1).
- 2 For the sake of exposition, the maintained data is presented here as:
- (2.1) — `static int init_cnt`, counts the number of constructor and destructor calls for class `Init`, initialized to zero.

```
Init();
```

- 3 *Effects:* Constructs an object of class `Init`. Constructs and initializes the objects `cin`, `cout`, `cerr`, `clog`, `wcin`, `wcout`, `wcerr`, and `wclog` if they have not already been constructed and initialized.

```
~Init();
```

- 4 *Effects:* Destroys an object of class `Init`. If there are no other instances of the class still in existence, calls `cout.flush()`, `cerr.flush()`, `clog.flush()`, `wcout.flush()`, `wcerr.flush()`, `wclog.flush()`.

31.5.3.2 ios_base state functions**[fmtflags.state]**

```
fmtflags flags() const;
```

- 1 *Returns:* The format control information for both input and output.

```
fmtflags flags(fmtflags fmtfl);
```

- 2 *Ensures:* `fmtfl == flags()`.

- 3 *Returns:* The previous value of `flags()`.

```
fmtflags setf(fmtflags fmtfl);
```

- 4 *Effects:* Sets `fmtfl` in `flags()`.

- 5 *Returns:* The previous value of `flags()`.

```
fmtflags setf(fmtflags fmtfl, fmtflags mask);
```

- 6 *Effects:* Clears `mask` in `flags()`, sets `fmtfl & mask` in `flags()`.

- 7 *Returns:* The previous value of `flags()`.

```
void unsetf(fmtflags mask);
```

- 8 *Effects:* Clears `mask` in `flags()`.

```
streamsize precision() const;
```

- 9 *Returns:* The precision to generate on certain output conversions.

```
streamsize precision(streamsize prec);
```

- 10 *Ensures:* `prec == precision()`.

- 11 *Returns:* The previous value of `precision()`.

```
streamsize width() const;
```

- 12 *Returns:* The minimum field width (number of characters) to generate on certain output conversions.


```
streamsize width(streamsize wide);
```

13 *Ensures:* `wide == width()`.

14 *Returns:* The previous value of `width()`.

31.5.3.3 ios_base functions

[ios.base.locales]

```
locale imbue(const locale& loc);
```

1 *Effects:* Calls each registered callback pair `(fn, idx)` (31.5.3.6) as `(*fn)(imbue_event, *this, idx)` at such a time that a call to `ios_base::getloc()` from within `fn` returns the new locale value `loc`.

2 *Returns:* The previous value of `getloc()`.

3 *Ensures:* `loc == getloc()`.

```
locale getloc() const;
```

4 *Returns:* If no locale has been imbued, a copy of the global C++ locale, `locale()`, in effect at the time of construction. Otherwise, returns the imbued locale, to be used to perform locale-dependent input and output operations.

31.5.3.4 ios_base static members

[ios.members.static]

```
bool sync_with_stdio(bool sync = true);
```

1 *Returns:* `true` if the previous state of the standard iostream objects (31.4) was synchronized and otherwise returns `false`. The first time it is called, the function returns `true`.

2 *Effects:* If any input or output operation has occurred using the standard streams prior to the call, the effect is implementation-defined. Otherwise, called with a `false` argument, it allows the standard streams to operate independently of the standard C streams.

3 When a standard iostream object `str` is *synchronized* with a standard stdio stream `f`, the effect of inserting a character `c` by

```
fputc(f, c);
```

is the same as the effect of

```
str.rdbuf()->sputc(c);
```

for any sequences of characters; the effect of extracting a character `c` by

```
c = fgetc(f);
```

is the same as the effect of

```
c = str.rdbuf()->sbumpc();
```

for any sequences of characters; and the effect of pushing back a character `c` by

```
ungetc(c, f);
```

is the same as the effect of

```
str.rdbuf()->sputbackc(c);
```

for any sequence of characters.²⁹⁴

31.5.3.5 ios_base storage functions

[ios.base.storage]

```
static int xalloc();
```

1 *Returns:* `index ++`.

2 *Remarks:* Concurrent access to this function by multiple threads shall not result in a data race (6.8.2).

```
long& iword(int idx);
```

3 *Requires:* `idx` is a value obtained by a call to `xalloc`.

4 *Effects:* If `iarray` is a null pointer, allocates an array of `long` of unspecified size and stores a pointer to its first element in `iarray`. The function then extends the array pointed at by `iarray` as necessary

²⁹⁴) This implies that operations on a standard iostream object can be mixed arbitrarily with operations on the corresponding stdio stream. In practical terms, synchronization usually means that a standard iostream object and a standard stdio object share a buffer.

to include the element `iarray[idx]`. Each newly allocated element of the array is initialized to zero. The reference returned is invalid after any other operations on the object.²⁹⁵ However, the value of the storage referred to is retained, so that until the next call to `copyfmt`, calling `word` with the same index yields another reference to the same value. If the function fails²⁹⁶ and `*this` is a base class subobject of a `basic_ios<>` object or subobject, the effect is equivalent to calling `basic_ios<>::setstate(badbit)` on the derived object (which may throw `failure`).

5 *Returns:* On success `iarray[idx]`. On failure, a valid `long&` initialized to 0.

```
void*& pword(int idx);
```

6 *Requires:* `idx` is a value obtained by a call to `xalloc`.

7 *Effects:* If `parray` is a null pointer, allocates an array of pointers to `void` of unspecified size and stores a pointer to its first element in `parray`. The function then extends the array pointed at by `parray` as necessary to include the element `parray[idx]`. Each newly allocated element of the array is initialized to a null pointer. The reference returned is invalid after any other operations on the object. However, the value of the storage referred to is retained, so that until the next call to `copyfmt`, calling `pword` with the same index yields another reference to the same value. If the function fails²⁹⁷ and `*this` is a base class subobject of a `basic_ios<>` object or subobject, the effect is equivalent to calling `basic_ios<>::setstate(badbit)` on the derived object (which may throw `failure`).

8 *Returns:* On success `parray[idx]`. On failure a valid `void*&` initialized to 0.

9 *Remarks:* After a subsequent call to `pword(int)` for the same object, the earlier return value may no longer be valid.

31.5.3.6 ios_base callbacks

[ios.base.callback]

```
void register_callback(event_callback fn, int idx);
```

1 *Effects:* Registers the pair `(fn, idx)` such that during calls to `imbue()` (31.5.3.3), `copyfmt()`, or `~ios_base()` (31.5.3.7), the function `fn` is called with argument `idx`. Functions registered are called when an event occurs, in opposite order of registration. Functions registered while a callback function is active are not called until the next event.

2 *Requires:* The function `fn` shall not throw exceptions.

3 *Remarks:* Identical pairs are not merged. A function registered twice will be called twice.

31.5.3.7 ios_base constructors/destructor

[ios.base.cons]

```
ios_base();
```

1 *Effects:* Each `ios_base` member has an indeterminate value after construction. The object's members shall be initialized by calling `basic_ios::init` before the object's first use or before it is destroyed, whichever comes first; otherwise the behavior is undefined.

```
~ios_base();
```

2 *Effects:* Destroys an object of class `ios_base`. Calls each registered callback pair `(fn, idx)` (31.5.3.6) as `(*fn)(erase_event, *this, idx)` at such time that any `ios_base` member function called from within `fn` has well-defined results.

31.5.4 Class template fpos

[fpos]

```
namespace std {
    template<class stateT> class fpos {
    public:
        // 31.5.4.1, members
        stateT state() const;
        void state(stateT);
    private:
        stateT st; // exposition only
    };
};
```

295) An implementation is free to implement both the integer array pointed at by `iarray` and the pointer array pointed at by `parray` as sparse data structures, possibly with a one-element cache for each.

296) For example, because it cannot allocate space.

297) For example, because it cannot allocate space.

```

    };
}

```

31.5.4.1 fpos members

[fpos.members]

```
void state(stateT s);
```

¹ *Effects:* Assigns `s` to `st`.

```
stateT state() const;
```

² *Returns:* Current value of `st`.

31.5.4.2 fpos requirements

[fpos.operations]

¹ An `fpos` type specifies file position information. It holds a state object whose type is equal to the template parameter `stateT`. Type `stateT` shall meet the *Cpp17DefaultConstructible* (Table 24), *Cpp17CopyConstructible* (Table 26), *Cpp17CopyAssignable* (Table 28), and *Cpp17Destructible* (Table 29) requirements. If `is_trivially_copy_constructible_v<stateT>` is true, then `fpos<stateT>` has a trivial copy constructor. If `is_trivially_copy_assignable<stateT>` is true, then `fpos<stateT>` has a trivial copy assignment operator. If `is_trivially_destructible_v<stateT>` is true, then `fpos<stateT>` has a trivial destructor. All specializations of `fpos` satisfy the *Cpp17DefaultConstructible*, *Cpp17CopyConstructible*, *Cpp17CopyAssignable*, *Cpp17Destructible*, and *Cpp17EqualityComparable* (Table 22) requirements. In addition, the expressions shown in Table 109 are valid and have the indicated semantics. In that table,

- (1.1) — `P` refers to an instance of `fpos`,
- (1.2) — `p` and `q` refer to values of type `P` or `const P`,
- (1.3) — `p1` and `q1` refer to modifiable lvalues of type `P`,
- (1.4) — `O` refers to type `streamoff`, and
- (1.5) — `o` refers to a value of type `streamoff` or `const streamoff`.

Table 109 — Position type requirements

Expression	Return type	Operational semantics	Assertion/note pre-/post-condition
<code>P(o)</code>	<code>P</code>	converts from <code>offset</code>	<i>Effects:</i> Value-initializes the state object.
<code>P p(o);</code> <code>P p = o;</code>			<i>Effects:</i> Value-initializes the state object. <i>Ensures:</i> <code>p == P(o)</code>
<code>P()</code>	<code>P</code>	<code>P(O)</code>	
<code>P p;</code>		<code>P p(O);</code>	
<code>O(p)</code>	<code>streamoff</code>	converts to <code>offset</code>	<code>P(O(p)) == p</code>
<code>p != q</code>	convertible to <code>bool</code>	<code>!(p == q)</code>	
<code>p + o</code>	<code>P</code>	<code>+ offset</code>	<i>Remarks:</i> With <code>q1 = p + o;</code> , then: <code>q1 - o == p</code>
<code>p1 += o</code>	<code>P&</code>	<code>+= offset</code>	<i>Remarks:</i> With <code>q1 = p1;</code> before the <code>+=</code> , then: <code>p1 - o == q1</code>
<code>p - o</code>	<code>P</code>	<code>- offset</code>	<i>Remarks:</i> With <code>q1 = p - o;</code> , then: <code>q1 + o == p</code>
<code>p1 -= o</code>	<code>P&</code>	<code>-= offset</code>	<i>Remarks:</i> With <code>q1 = p1;</code> before the <code>-=</code> , then: <code>p1 + o == q1</code>
<code>o + p</code>	convertible to <code>P</code>	<code>p + o</code>	<code>P(o + p) == p + o</code>
<code>p - q</code>	<code>streamoff</code>	distance	<code>p == q + (p - q)</code>

² Stream operations that return a value of type `traits::pos_type` return `P(O(-1))` as an invalid value to signal an error. If this value is used as an argument to any `istream`, `ostream`, or `streambuf` member that accepts a value of type `traits::pos_type` then the behavior of that function is undefined.

31.5.5 Class template basic_ios

[ios]

31.5.5.1 Overview

[ios.overview]

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_ios : public ios_base {
    public:
        using char_type    = charT;
        using int_type      = typename traits::int_type;
        using pos_type      = typename traits::pos_type;
        using off_type      = typename traits::off_type;
        using traits_type   = traits;

        // 31.5.5.4, flags functions
        explicit operator bool() const;
        bool operator!() const;
        iostate rdstate() const;
        void clear(iostate state = goodbit);
        void setstate(iostate state);
        bool good() const;
        bool eof() const;
        bool fail() const;
        bool bad() const;

        iostate exceptions() const;
        void exceptions(iostate except);

        // 31.5.5.2, constructor/destructor
        explicit basic_ios(basic_streambuf<charT, traits>* sb);
        virtual ~basic_ios();

        // 31.5.5.3, members
        basic_ostream<charT, traits>* tie() const;
        basic_ostream<charT, traits>* tie(basic_ostream<charT, traits>* tiestr);

        basic_streambuf<charT, traits>* rdbuf() const;
        basic_streambuf<charT, traits>* rdbuf(basic_streambuf<charT, traits>* sb);

        basic_ios& copyfmt(const basic_ios& rhs);

        char_type fill() const;
        char_type fill(char_type ch);

        locale imbue(const locale& loc);

        char narrow(char_type c, char dfault) const;
        char_type widen(char c) const;

        basic_ios(const basic_ios&) = delete;
        basic_ios& operator=(const basic_ios&) = delete;

    protected:
        basic_ios();
        void init(basic_streambuf<charT, traits>* sb);
        void move(basic_ios& rhs);
        void move(basic_ios&& rhs);
        void swap(basic_ios& rhs) noexcept;
        void set_rdbuf(basic_streambuf<charT, traits>* sb);
    };
}

```

31.5.5.2 `basic_ios` constructors[`basic.ios.cons`]

```
explicit basic_ios(basic_streambuf<charT, traits>* sb);
```

- 1 *Effects:* Constructs an object of class `basic_ios`, assigning initial values to its member objects by calling `init(sb)`.

```
basic_ios();
```

- 2 *Effects:* Constructs an object of class `basic_ios` (31.5.3.7) leaving its member objects uninitialized. The object shall be initialized by calling `basic_ios::init` before its first use or before it is destroyed, whichever comes first; otherwise the behavior is undefined.

```
~basic_ios();
```

- 3 *Remarks:* The destructor does not destroy `rdbuf()`.

```
void init(basic_streambuf<charT, traits>* sb);
```

- 4 *Ensures:* The postconditions of this function are indicated in Table 110.

Table 110 — `basic_ios::init()` effects

Element	Value
<code>rdbuf()</code>	<code>sb</code>
<code>tie()</code>	0
<code>rdstate()</code>	goodbit if <code>sb</code> is not a null pointer, otherwise badbit.
<code>exceptions()</code>	goodbit
<code>flags()</code>	<code>skipws dec</code>
<code>width()</code>	0
<code>precision()</code>	6
<code>fill()</code>	<code>widen(' ')</code>
<code>getloc()</code>	a copy of the value returned by <code>locale()</code>
<i>iarray</i>	a null pointer
<i>parray</i>	a null pointer

31.5.5.3 Member functions

[`basic.ios.members`]

```
basic_ostream<charT, traits>* tie() const;
```

- 1 *Returns:* An output sequence that is *tied* to (synchronized with) the sequence controlled by the stream buffer.

```
basic_ostream<charT, traits>* tie(basic_ostream<charT, traits>* tiestr);
```

- 2 *Requires:* If `tiestr` is not null, `tiestr` shall not be reachable by traversing the linked list of tied stream objects starting from `tiestr->tie()`.

- 3 *Ensures:* `tiestr == tie()`.

- 4 *Returns:* The previous value of `tie()`.

```
basic_streambuf<charT, traits>* rdbuf() const;
```

- 5 *Returns:* A pointer to the `streambuf` associated with the stream.

```
basic_streambuf<charT, traits>* rdbuf(basic_streambuf<charT, traits>* sb);
```

- 6 *Ensures:* `sb == rdbuf()`.

- 7 *Effects:* Calls `clear()`.

- 8 *Returns:* The previous value of `rdbuf()`.

```
locale imbue(const locale& loc);
```

- 9 *Effects:* Calls `ios_base::imbue(loc)` (31.5.3.3) and if `rdbuf() != 0` then `rdbuf()->pubimbue(loc)` (31.6.3.2.1).

10 *Returns:* The prior value of `ios_base::imbue()`.

```
char narrow(char_type c, char dfaul) const;
```

11 *Returns:* `use_facet<ctype<char_type>>(getloc()).narrow(c, dfaul)`

```
char_type widen(char c) const;
```

12 *Returns:* `use_facet<ctype<char_type>>(getloc()).widen(c)`

```
char_type fill() const;
```

13 *Returns:* The character used to pad (fill) an output conversion to the specified field width.

```
char_type fill(char_type fillch);
```

14 *Ensures:* `traits::eq(fillch, fill())`.

15 *Returns:* The previous value of `fill()`.

```
basic_ios& copyfmt(const basic_ios& rhs);
```

16 *Effects:* If `(this == &rhs)` does nothing. Otherwise assigns to the member objects of `*this` the corresponding member objects of `rhs` as follows:

(16.1) — calls each registered callback pair `(fn, idx)` as `(*fn)(erase_event, *this, idx)`;

(16.2) — then, assigns to the member objects of `*this` the corresponding member objects of `rhs`, except that

(16.2.1) — `rdstate()`, `rdbuf()`, and `exceptions()` are left unchanged;

(16.2.2) — the contents of arrays pointed at by `pword` and `iword` are copied, not the pointers themselves;²⁹⁸ and

(16.2.3) — if any newly stored pointer values in `*this` point at objects stored outside the object `rhs` and those objects are destroyed when `rhs` is destroyed, the newly stored pointer values are altered to point at newly constructed copies of the objects;

(16.3) — then, calls each callback pair that was copied from `rhs` as `(*fn)(copyfmt_event, *this, idx)`;

(16.4) — then, calls `exceptions(rhs.exceptions())`.

17 [*Note:* The second pass through the callback pairs permits a copied `pword` value to be zeroed, or to have its referent deep copied or reference counted, or to have other special action taken. — *end note*]

18 *Ensures:* The postconditions of this function are indicated in Table 111.

Table 111 — `basic_ios::copyfmt()` effects

Element	Value
<code>rdbuf()</code>	<i>unchanged</i>
<code>tie()</code>	<code>rhs.tie()</code>
<code>rdstate()</code>	<i>unchanged</i>
<code>exceptions()</code>	<code>rhs.exceptions()</code>
<code>flags()</code>	<code>rhs.flags()</code>
<code>width()</code>	<code>rhs.width()</code>
<code>precision()</code>	<code>rhs.precision()</code>
<code>fill()</code>	<code>rhs.fill()</code>
<code>getloc()</code>	<code>rhs.getloc()</code>

19 *Returns:* `*this`.

```
void move(basic_ios& rhs);
```

²⁹⁸) This suggests an infinite amount of copying, but the implementation can keep track of the maximum element of the arrays that is nonzero.

```
void move(basic_ios&& rhs);
```

20 *Ensures:* `*this` shall have the state that `rhs` had before the function call, except that `rdbuf()` shall return 0. `rhs` shall be in a valid but unspecified state, except that `rhs.rdbuf()` shall return the same value as it returned before the function call, and `rhs.tie()` shall return 0.

```
void swap(basic_ios& rhs) noexcept;
```

21 *Effects:* The states of `*this` and `rhs` shall be exchanged, except that `rdbuf()` shall return the same value as it returned before the function call, and `rhs.rdbuf()` shall return the same value as it returned before the function call.

```
void set_rdbuf(basic_streambuf<charT, traits>* sb);
```

22 *Requires:* `sb != nullptr`.

23 *Effects:* Associates the `basic_streambuf` object pointed to by `sb` with this stream without calling `clear()`.

24 *Ensures:* `rdbuf() == sb`.

25 *Throws:* Nothing.

31.5.5.4 `basic_ios` flags functions

[`iostate.flags`]

```
explicit operator bool() const;
```

1 *Returns:* `!fail()`.

```
bool operator!() const;
```

2 *Returns:* `fail()`.

```
iostate rdstate() const;
```

3 *Returns:* The error state of the stream buffer.

```
void clear(iostate state = goodbit);
```

4 *Ensures:* If `rdbuf() != 0` then `state == rdstate()`; otherwise `rdstate() == (state | ios_base::badbit)`.

5 *Effects:* If `((state | (rdbuf() ? goodbit : badbit)) & exceptions()) == 0`, returns. Otherwise, the function throws an object of class `basic_ios::failure` (31.5.3.1.1), constructed with implementation-defined argument values.

```
void setstate(iostate state);
```

6 *Effects:* Calls `clear(rdstate() | state)` (which may throw `basic_ios::failure` (31.5.3.1.1)).

```
bool good() const;
```

7 *Returns:* `rdstate() == 0`

```
bool eof() const;
```

8 *Returns:* true if eofbit is set in `rdstate()`.

```
bool fail() const;
```

9 *Returns:* true if failbit or badbit is set in `rdstate()`.²⁹⁹

```
bool bad() const;
```

10 *Returns:* true if badbit is set in `rdstate()`.

```
iostate exceptions() const;
```

11 *Returns:* A mask that determines what elements set in `rdstate()` cause exceptions to be thrown.

```
void exceptions(iostate except);
```

12 *Ensures:* `except == exceptions()`.

²⁹⁹) Checking badbit also for fail() is historical practice.

13 *Effects:* Calls `clear(rdstate())`.

31.5.6 ios_base manipulators

[std.ios.manip]

31.5.6.1 fmtflags manipulators

[fmtflags.manip]

1 Each function specified in this subclause is a designated addressable function (20.5.4.2.1).

`ios_base& boolalpha(ios_base& str);`

2 *Effects:* Calls `str.setf(ios_base::boolalpha)`.

3 *Returns:* `str`.

`ios_base& noboolalpha(ios_base& str);`

4 *Effects:* Calls `str.unsetf(ios_base::boolalpha)`.

5 *Returns:* `str`.

`ios_base& showbase(ios_base& str);`

6 *Effects:* Calls `str.setf(ios_base::showbase)`.

7 *Returns:* `str`.

`ios_base& noshowbase(ios_base& str);`

8 *Effects:* Calls `str.unsetf(ios_base::showbase)`.

9 *Returns:* `str`.

`ios_base& showpoint(ios_base& str);`

10 *Effects:* Calls `str.setf(ios_base::showpoint)`.

11 *Returns:* `str`.

`ios_base& noshowpoint(ios_base& str);`

12 *Effects:* Calls `str.unsetf(ios_base::showpoint)`.

13 *Returns:* `str`.

`ios_base& showpos(ios_base& str);`

14 *Effects:* Calls `str.setf(ios_base::showpos)`.

15 *Returns:* `str`.

`ios_base& noshowpos(ios_base& str);`

16 *Effects:* Calls `str.unsetf(ios_base::showpos)`.

17 *Returns:* `str`.

`ios_base& skipws(ios_base& str);`

18 *Effects:* Calls `str.setf(ios_base::skipws)`.

19 *Returns:* `str`.

`ios_base& noskipws(ios_base& str);`

20 *Effects:* Calls `str.unsetf(ios_base::skipws)`.

21 *Returns:* `str`.

`ios_base& uppercase(ios_base& str);`

22 *Effects:* Calls `str.setf(ios_base::uppercase)`.

23 *Returns:* `str`.

`ios_base& nouppercase(ios_base& str);`

24 *Effects:* Calls `str.unsetf(ios_base::uppercase)`.

25 *Returns:* `str`.


```
ios_base& unitbuf(ios_base& str);
```

26 *Effects:* Calls `str.setf(ios_base::unitbuf)`.

27 *Returns:* `str`.

```
ios_base& nunitbuf(ios_base& str);
```

28 *Effects:* Calls `str.unsetf(ios_base::unitbuf)`.

29 *Returns:* `str`.

31.5.6.2 adjustfield manipulators

[adjustfield.manip]

1 Each function specified in this subclause is a designated addressable function (20.5.4.2.1).

```
ios_base& internal(ios_base& str);
```

2 *Effects:* Calls `str.setf(ios_base::internal, ios_base::adjustfield)`.

3 *Returns:* `str`.

```
ios_base& left(ios_base& str);
```

4 *Effects:* Calls `str.setf(ios_base::left, ios_base::adjustfield)`.

5 *Returns:* `str`.

```
ios_base& right(ios_base& str);
```

6 *Effects:* Calls `str.setf(ios_base::right, ios_base::adjustfield)`.

7 *Returns:* `str`.

31.5.6.3 basefield manipulators

[basefield.manip]

1 Each function specified in this subclause is a designated addressable function (20.5.4.2.1).

```
ios_base& dec(ios_base& str);
```

2 *Effects:* Calls `str.setf(ios_base::dec, ios_base::basefield)`.

3 *Returns:* `str`³⁰⁰.

```
ios_base& hex(ios_base& str);
```

4 *Effects:* Calls `str.setf(ios_base::hex, ios_base::basefield)`.

5 *Returns:* `str`.

```
ios_base& oct(ios_base& str);
```

6 *Effects:* Calls `str.setf(ios_base::oct, ios_base::basefield)`.

7 *Returns:* `str`.

31.5.6.4 floatfield manipulators

[floatfield.manip]

1 Each function specified in this subclause is a designated addressable function (20.5.4.2.1).

```
ios_base& fixed(ios_base& str);
```

2 *Effects:* Calls `str.setf(ios_base::fixed, ios_base::floatfield)`.

3 *Returns:* `str`.

```
ios_base& scientific(ios_base& str);
```

4 *Effects:* Calls `str.setf(ios_base::scientific, ios_base::floatfield)`.

5 *Returns:* `str`.

```
ios_base& hexfloat(ios_base& str);
```

6 *Effects:* Calls `str.setf(ios_base::fixed | ios_base::scientific, ios_base::floatfield)`.

7 *Returns:* `str`.

300) The function signature `dec(ios_base&)` can be called by the function signature `basic_ostream& stream::operator<<(ios_base& (*)(ios_base&))` to permit expressions of the form `cout << dec` to change the format flags stored in `cout`.

- 8 [Note: The more obvious use of `ios_base::hex` to specify hexadecimal floating-point format would change the meaning of existing well-defined programs. C++ 2003 gives no meaning to the combination of `fixed` and `scientific`. — *end note*]

```
ios_base& defaultfloat(ios_base& str);
```

- 9 *Effects:* Calls `str.unsetf(ios_base::floatfield)`.

10 *Returns:* `str`.

31.5.7 Error reporting [error.reporting]

```
error_code make_error_code(io_errc e) noexcept;
```

- 1 *Returns:* `error_code(static_cast<int>(e), iostream_category())`.

```
error_condition make_error_condition(io_errc e) noexcept;
```

- 2 *Returns:* `error_condition(static_cast<int>(e), iostream_category())`.

```
const error_category& iostream_category() noexcept;
```

- 3 *Returns:* A reference to an object of a type derived from class `error_category`.

- 4 The object's `default_error_condition` and `equivalent` virtual functions shall behave as specified for the class `error_category`. The object's `name` virtual function shall return a pointer to the string "iostream".

31.6 Stream buffers [stream.buffer]

31.6.1 Header <streambuf> synopsis [streambuf.syn]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
        class basic_streambuf;
    using streambuf = basic_streambuf<char>;
    using wstreambuf = basic_streambuf<wchar_t>;
}
```

- 1 The header <streambuf> defines types that control input from and output to *character* sequences.

31.6.2 Stream buffer requirements [streambuf.reqts]

- 1 Stream buffers can impose various constraints on the sequences they control. Some constraints are:

- (1.1) — The controlled input sequence can be not readable.
- (1.2) — The controlled output sequence can be not writable.
- (1.3) — The controlled sequences can be associated with the contents of other representations for character sequences, such as external files.
- (1.4) — The controlled sequences can support operations *directly* to or from associated sequences.
- (1.5) — The controlled sequences can impose limitations on how the program can read characters from a sequence, write characters to a sequence, put characters back into an input sequence, or alter the stream position.

- 2 Each sequence is characterized by three pointers which, if non-null, all point into the same `charT` array object. The array object represents, at any moment, a (sub)sequence of characters from the sequence. Operations performed on a sequence alter the values stored in these pointers, perform reads and writes directly to or from associated sequences, and alter “the stream position” and conversion state as needed to maintain this subsequence relationship. The three pointers are:

- (2.1) — the *beginning pointer*, or lowest element address in the array (called `xbeg` here);
- (2.2) — the *next pointer*, or next element address that is a current candidate for reading or writing (called `xnext` here);
- (2.3) — the *end pointer*, or first element address beyond the end of the array (called `xend` here).

- 3 The following semantic constraints shall always apply for any set of three pointers for a sequence, using the pointer names given immediately above:

- (3.1) — If `xnext` is not a null pointer, then `xbeg` and `xend` shall also be non-null pointers into the same `charT` array, as described above; otherwise, `xbeg` and `xend` shall also be null.
- (3.2) — If `xnext` is not a null pointer and `xnext < xend` for an output sequence, then a *write position* is available. In this case, `*xnext` shall be assignable as the next element to write (to put, or to store a character value, into the sequence).
- (3.3) — If `xnext` is not a null pointer and `xbeg < xnext` for an input sequence, then a *putback position* is available. In this case, `xnext[-1]` shall have a defined value and is the next (preceding) element to store a character that is put back into the input sequence.
- (3.4) — If `xnext` is not a null pointer and `xnext < xend` for an input sequence, then a *read position* is available. In this case, `*xnext` shall have a defined value and is the next element to read (to get, or to obtain a character value, from the sequence).

31.6.3 Class template `basic_streambuf`

[streambuf]

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_streambuf {
    public:
        using char_type    = charT;
        using int_type     = typename traits::int_type;
        using pos_type     = typename traits::pos_type;
        using off_type     = typename traits::off_type;
        using traits_type  = traits;

        virtual ~basic_streambuf();

        // 31.6.3.2.1, locales
        locale    pubimbue(const locale& loc);
        locale    getloc() const;

        // 31.6.3.2.2, buffer and positioning
        basic_streambuf* pubsetbuf(char_type* s, streamsize n);
        pos_type pubseekoff(off_type off, ios_base::seekdir way,
                           ios_base::openmode which
                           = ios_base::in | ios_base::out);
        pos_type pubseekpos(pos_type sp,
                           ios_base::openmode which
                           = ios_base::in | ios_base::out);

        int    pubsync();

        // get and put areas
        // 31.6.3.2.3, get area
        streamsize in_avail();
        int_type snextc();
        int_type sbumpc();
        int_type sgetc();
        streamsize sgetn(char_type* s, streamsize n);

        // 31.6.3.2.4, putback
        int_type sputbackc(char_type c);
        int_type sungetc();

        // 31.6.3.2.5, put area
        int_type sputc(char_type c);
        streamsize sputn(const char_type* s, streamsize n);

    protected:
        basic_streambuf();
        basic_streambuf(const basic_streambuf& rhs);
        basic_streambuf& operator=(const basic_streambuf& rhs);

        void swap(basic_streambuf& rhs);
    };
}

```

```

// 31.6.3.3.2, get area access
char_type* eback() const;
char_type* gptr() const;
char_type* egptr() const;
void      gbump(int n);
void      setg(char_type* gbeg, char_type* gnext, char_type* gend);

// 31.6.3.3.3, put area access
char_type* pbase() const;
char_type* pptr() const;
char_type* ep_ptr() const;
void      pbump(int n);
void      setp(char_type* pbeg, char_type* pend);

// 31.6.3.4, virtual functions
// 31.6.3.4.1, locales
virtual void imbue(const locale& loc);

// 31.6.3.4.2, buffer management and positioning
virtual basic_streambuf* setbuf(char_type* s, streamsize n);
virtual pos_type seekoff(off_type off, ios_base::seekdir way,
                        ios_base::openmode which
                        = ios_base::in | ios_base::out);
virtual pos_type seekpos(pos_type sp,
                        ios_base::openmode which
                        = ios_base::in | ios_base::out);
virtual int      sync();

// 31.6.3.4.3, get area
virtual streamsize showmanyc();
virtual streamsize xsgetn(char_type* s, streamsize n);
virtual int_type   underflow();
virtual int_type   uflow();

// 31.6.3.4.4, putback
virtual int_type   pbackfail(int_type c = traits::eof());

// 31.6.3.4.5, put area
virtual streamsize xsputn(const char_type* s, streamsize n);
virtual int_type   overflow(int_type c = traits::eof());
};
}

```

¹ The class template `basic_streambuf` serves as an abstract base class for deriving various *stream buffers* whose objects each control two *character sequences*:

- (1.1) — a character *input sequence*;
- (1.2) — a character *output sequence*.

31.6.3.1 `basic_streambuf` constructors

[`streambuf.cons`]

```
basic_streambuf();
```

¹ *Effects*: Constructs an object of class `basic_streambuf<charT, traits>` and initializes:³⁰¹

- (1.1) — all its pointer member objects to null pointers,
- (1.2) — the `getloc()` member to a copy the global locale, `locale()`, at the time of construction.

² *Remarks*: Once the `getloc()` member is initialized, results of calling locale member functions, and of members of facets so obtained, can safely be cached until the next time the member `imbue` is called.

³⁰¹) The default constructor is protected for class `basic_streambuf` to assure that only objects for classes derived from this class may be constructed.

```
basic_streambuf(const basic_streambuf& rhs);
```

3 *Effects:* Constructs a copy of rhs.

4 *Ensures:*

(4.1) — eback() == rhs.eback()

(4.2) — gptr() == rhs.gptr()

(4.3) — egptr() == rhs.egptr()

(4.4) — pbase() == rhs.pbase()

(4.5) — pptr() == rhs.pptr()

(4.6) — epptr() == rhs.epptr()

(4.7) — getloc() == rhs.getloc()

```
~basic_streambuf();
```

5 *Effects:* None.

31.6.3.2 basic_streambuf public member functions

[streambuf.members]

31.6.3.2.1 Locales

[streambuf.locales]

```
locale pubimbue(const locale& loc);
```

1 *Ensures:* loc == getloc().

2 *Effects:* Calls imbue(loc).

3 *Returns:* Previous value of getloc().

```
locale getloc() const;
```

4 *Returns:* If pubimbue() has ever been called, then the last value of loc supplied, otherwise the current global locale, locale(), in effect at the time of construction. If called after pubimbue() has been called but before pubimbue has returned (i.e., from within the call of imbue()) then it returns the previous value.

31.6.3.2.2 Buffer management and positioning

[streambuf.buffer]

```
basic_streambuf* pubsetbuf(char_type* s, streamsize n);
```

1 *Returns:* setbuf(s, n).

```
pos_type pubseekoff(off_type off, ios_base::seekdir way,
ios_base::openmode which
= ios_base::in | ios_base::out);
```

2 *Returns:* seekoff(off, way, which).

```
pos_type pubseekpos(pos_type sp,
ios_base::openmode which
= ios_base::in | ios_base::out);
```

3 *Returns:* seekpos(sp, which).

```
int pubsync();
```

4 *Returns:* sync().

31.6.3.2.3 Get area

[streambuf.pub.get]

```
streamsize in_avail();
```

1 *Returns:* If a read position is available, returns egptr() - gptr(). Otherwise returns showmanyc() (31.6.3.4.3).

```
int_type snextc();
```

2 *Effects:* Calls sbumpc().

3 *Returns:* If that function returns traits::eof(), returns traits::eof(). Otherwise, returns sgetc().

```
int_type sbumpc();
```

- 4 *Returns:* If the input sequence read position is not available, returns `uflow()`. Otherwise, returns `traits::to_int_type(*gptr())` and increments the next pointer for the input sequence.

```
int_type sgetc();
```

- 5 *Returns:* If the input sequence read position is not available, returns `underflow()`. Otherwise, returns `traits::to_int_type(*gptr())`.

```
streamsize sgetn(char_type* s, streamsize n);
```

- 6 *Returns:* `xsgetn(s, n)`.

31.6.3.2.4 Putback [streambuf.pub.pback]

```
int_type sputback(char_type c);
```

- 1 *Returns:* If the input sequence putback position is not available, or if `traits::eq(c, gptr()[-1])` is `false`, returns `pbackfail(traits::to_int_type(c))`. Otherwise, decrements the next pointer for the input sequence and returns `traits::to_int_type(*gptr())`.

```
int_type sungetc();
```

- 2 *Returns:* If the input sequence putback position is not available, returns `pbackfail()`. Otherwise, decrements the next pointer for the input sequence and returns `traits::to_int_type(*gptr())`.

31.6.3.2.5 Put area [streambuf.pub.put]

```
int_type sputc(char_type c);
```

- 1 *Returns:* If the output sequence write position is not available, returns `overflow(traits::to_int_type(c))`. Otherwise, stores `c` at the next pointer for the output sequence, increments the pointer, and returns `traits::to_int_type(c)`.

```
streamsize sputn(const char_type* s, streamsize n);
```

- 2 *Returns:* `xspun(s, n)`.

31.6.3.3 basic_streambuf protected member functions [streambuf.protected]

31.6.3.3.1 Assignment [streambuf.assign]

```
basic_streambuf& operator=(const basic_streambuf& rhs);
```

- 1 *Effects:* Assigns the data members of `rhs` to `*this`.

2 *Ensures:*

- (2.1) — `eback() == rhs.eback()`
- (2.2) — `gptr() == rhs.gptr()`
- (2.3) — `egptr() == rhs.egptr()`
- (2.4) — `pbase() == rhs.pbase()`
- (2.5) — `pptr() == rhs.pptr()`
- (2.6) — `epptr() == rhs.epptr()`
- (2.7) — `getloc() == rhs.getloc()`

3 *Returns:* `*this`.

```
void swap(basic_streambuf& rhs);
```

- 4 *Effects:* Swaps the data members of `rhs` and `*this`.

31.6.3.3.2 Get area access [streambuf.get.area]

```
char_type* eback() const;
```

- 1 *Returns:* The beginning pointer for the input sequence.

```
char_type* gptr() const;
```

2 *Returns:* The next pointer for the input sequence.

```
char_type* egptr() const;
```

3 *Returns:* The end pointer for the input sequence.

```
void gbump(int n);
```

4 *Effects:* Adds *n* to the next pointer for the input sequence.

```
void setg(char_type* gbeg, char_type* gnext, char_type* gend);
```

5 *Ensures:* *gbeg* == *eback()*, *gnext* == *gptr()*, and *gend* == *egptr()*.

31.6.3.3.3 Put area access

[streambuf.put.area]

```
char_type* pbase() const;
```

1 *Returns:* The beginning pointer for the output sequence.

```
char_type* pptr() const;
```

2 *Returns:* The next pointer for the output sequence.

```
char_type* eptr() const;
```

3 *Returns:* The end pointer for the output sequence.

```
void pbump(int n);
```

4 *Effects:* Adds *n* to the next pointer for the output sequence.

```
void setp(char_type* pbeg, char_type* pend);
```

5 *Ensures:* *pbeg* == *pbase()*, *pbeg* == *pptr()*, and *pend* == *eptr()*.

31.6.3.4 basic_streambuf virtual functions

[streambuf.virtuals]

31.6.3.4.1 Locales

[streambuf.virt.locales]

```
void imbue(const locale&);
```

1 *Effects:* Change any translations based on locale.

2 *Remarks:* Allows the derived class to be informed of changes in locale at the time they occur. Between invocations of this function a class derived from `streambuf` can safely cache results of calls to locale functions and to members of facets so obtained.

3 *Default behavior:* Does nothing.

31.6.3.4.2 Buffer management and positioning

[streambuf.virt.buffer]

```
basic_streambuf* setbuf(char_type* s, streamsize n);
```

1 *Effects:* Influences stream buffering in a way that is defined separately for each class derived from `basic_streambuf` in this Clause (31.8.2.4, 31.9.2.4).

2 *Default behavior:* Does nothing. Returns *this*.

```
pos_type seekoff(off_type off, ios_base::seekdir way,
                ios_base::openmode which
                = ios_base::in | ios_base::out);
```

3 *Effects:* Alters the stream positions within one or more of the controlled sequences in a way that is defined separately for each class derived from `basic_streambuf` in this Clause (31.8.2.4, 31.9.2.4).

4 *Default behavior:* Returns `pos_type(off_type(-1))`.

```
pos_type seekpos(pos_type sp,
                ios_base::openmode which
                = ios_base::in | ios_base::out);
```

5 *Effects:* Alters the stream positions within one or more of the controlled sequences in a way that is defined separately for each class derived from `basic_streambuf` in this Clause (31.8.2, 31.9.2).

6 *Default behavior:* Returns `pos_type(off_type(-1))`.

`int sync();`

7 *Effects:* Synchronizes the controlled sequences with the arrays. That is, if `pbase()` is non-null the characters between `pbase()` and `pptr()` are written to the controlled sequence. The pointers may then be reset as appropriate.

8 *Returns:* `-1` on failure. What constitutes failure is determined by each derived class (31.9.2.4).

9 *Default behavior:* Returns zero.

31.6.3.4.3 Get area

[`streambuf.virt.get`]

`streamsize showmanyc();`³⁰²

1 *Returns:* An estimate of the number of characters available in the sequence, or `-1`. If it returns a positive value, then successive calls to `underflow()` will not return `traits::eof()` until at least that number of characters have been extracted from the stream. If `showmanyc()` returns `-1`, then calls to `underflow()` or `uflow()` will fail.³⁰³

2 *Default behavior:* Returns zero.

3 *Remarks:* Uses `traits::eof()`.

`streamsize xsgetn(char_type* s, streamsize n);`

4 *Effects:* Assigns up to `n` characters to successive elements of the array whose first element is designated by `s`. The characters assigned are read from the input sequence as if by repeated calls to `sbumpc()`. Assigning stops when either `n` characters have been assigned or a call to `sbumpc()` would return `traits::eof()`.

5 *Returns:* The number of characters assigned.³⁰⁴

6 *Remarks:* Uses `traits::eof()`.

`int_type underflow();`

7 *Remarks:* The public members of `basic_streambuf` call this virtual function only if `gptr()` is null or `gptr() >= egptr()`

8 *Returns:* `traits::to_int_type(c)`, where `c` is the first *character* of the *pending sequence*, without moving the input sequence position past it. If the pending sequence is null then the function returns `traits::eof()` to indicate failure.

9 The *pending sequence* of characters is defined as the concatenation of

- (9.1) — the empty sequence if `gptr()` is null, otherwise the characters in `[gptr(), egptr())`, followed by
- (9.2) — some (possibly empty) sequence of characters read from the input sequence.

10 The *result character* is the first character of the pending sequence if it is non-empty, otherwise the next character that would be read from the input sequence.

11 The *backup sequence* is the empty sequence if `eback()` is null, otherwise the characters in `[eback(), gptr())`.

12 *Effects:* The function sets up the `gptr()` and `egptr()` such that if the pending sequence is non-empty, then `egptr()` is non-null and the characters in `[gptr(), egptr())` are the characters in the pending sequence, otherwise either `gptr()` is null or `gptr() == egptr()`.

13 If `eback()` and `gptr()` are non-null then the function is not constrained as to their contents, but the “usual backup condition” is that either

- (13.1) — the backup sequence contains at least `gptr() - eback()` characters, in which case the characters in `[eback(), gptr())` agree with the last `gptr() - eback()` characters of the backup sequence, or

302) The morphemes of `showmanyc` are “es-how-many-see”, not “show-manic”.

303) `underflow` or `uflow` might fail by throwing an exception prematurely. The intention is not only that the calls will not return `eof()` but that they will return “immediately”.

304) Classes derived from `basic_streambuf` can provide more efficient ways to implement `xsgetn()` and `xsputn()` by overriding these definitions from the base class.

- (13.2) — the characters in `[gptr() - n, gptr())` agree with the backup sequence (where `n` is the length of the backup sequence).

14 *Default behavior:* Returns `traits::eof()`.

`int_type uflow();`

15 *Requires:* The constraints are the same as for `underflow()`, except that the result character shall be transferred from the pending sequence to the backup sequence, and the pending sequence shall not be empty before the transfer.

16 *Default behavior:* Calls `underflow()`. If `underflow()` returns `traits::eof()`, returns `traits::eof()`. Otherwise, returns the value of `traits::to_int_type(*gptr())` and increment the value of the next pointer for the input sequence.

17 *Returns:* `traits::eof()` to indicate failure.

31.6.3.4.4 Putback

[`streambuf.virt.pback`]

`int_type pbackfail(int_type c = traits::eof());`

1 *Remarks:* The public functions of `basic_streambuf` call this virtual function only when `gptr()` is null, `gptr() == eback()`, or `traits::eq(traits::to_char_type(c), gptr()[-1])` returns `false`. Other calls shall also satisfy that constraint.

The *pending sequence* is defined as for `underflow()`, with the modifications that

- (1.1) — If `traits::eq_int_type(c, traits::eof())` returns `true`, then the input sequence is backed up one character before the pending sequence is determined.

- (1.2) — If `traits::eq_int_type(c, traits::eof())` returns `false`, then `c` is prepended. Whether the input sequence is backed up or modified in any other way is unspecified.

2 *Ensures:* On return, the constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

3 *Returns:* `traits::eof()` to indicate failure. Failure may occur because the input sequence could not be backed up, or if for some other reason the pointers could not be set consistent with the constraints. `pbackfail()` is called only when put back has really failed.

4 Returns some value other than `traits::eof()` to indicate success.

5 *Default behavior:* Returns `traits::eof()`.

31.6.3.4.5 Put area

[`streambuf.virt.put`]

`streamsize xsputn(const char_type* s, streamsize n);`

1 *Effects:* Writes up to `n` characters to the output sequence as if by repeated calls to `sputc(c)`. The characters written are obtained from successive elements of the array whose first element is designated by `s`. Writing stops when either `n` characters have been written or a call to `sputc(c)` would return `traits::eof()`. It is unspecified whether the function calls `overflow()` when `pptr() == epptr()` becomes `true` or whether it achieves the same effects by other means.

2 *Returns:* The number of characters written.

`int_type overflow(int_type c = traits::eof());`

3 *Effects:* Consumes some initial subsequence of the characters of the *pending sequence*. The pending sequence is defined as the concatenation of

- (3.1) — the empty sequence if `pbase()` is null, otherwise the `pptr() - pbase()` characters beginning at `pbase()`, followed by

- (3.2) — the empty sequence if `traits::eq_int_type(c, traits::eof())` returns `true`, otherwise the sequence consisting of `c`.

4 *Remarks:* The member functions `sputc()` and `sputn()` call this function in case that no room can be found in the put buffer enough to accommodate the argument character sequence.

5 *Requires:* Every overriding definition of this virtual function shall obey the following constraints:

- (5.1) — The effect of consuming a character on the associated output sequence is specified.³⁰⁵
- (5.2) — Let *r* be the number of characters in the pending sequence not consumed. If *r* is nonzero then `pbase()` and `pptr()` shall be set so that: `pptr() - pbase() == r` and the *r* characters starting at `pbase()` are the associated output stream. In case *r* is zero (all characters of the pending sequence have been consumed) then either `pbase()` is set to `nullptr`, or `pbase()` and `pptr()` are both set to the same non-null value.
- (5.3) — The function may fail if either appending some character to the associated output stream fails or if it is unable to establish `pbase()` and `pptr()` according to the above rules.
- 6 *Returns:* `traits::eof()` or throws an exception if the function fails.
Otherwise, returns some value other than `traits::eof()` to indicate success.³⁰⁶
- 7 *Default behavior:* Returns `traits::eof()`.

31.7 Formatting and manipulators

[iostream.format]

31.7.1 Header <iostream> synopsis

[iostream.syn]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
        class basic_istream;

    using istream = basic_istream<char>;
    using wistream = basic_istream<wchar_t>;

    template<class charT, class traits = char_traits<charT>>
        class basic_iostream;

    using iostream = basic_iostream<char>;
    using wiostream = basic_iostream<wchar_t>;

    template<class charT, class traits>
        basic_istream<charT, traits>& ws(basic_istream<charT, traits>& is);

    template<class charT, class traits, class T>
        basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>&& is, T&& x);
}

```

31.7.2 Header <ostream> synopsis

[ostream.syn]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
        class basic_ostream;

    using ostream = basic_ostream<char>;
    using wostream = basic_ostream<wchar_t>;

    template<class charT, class traits>
        basic_ostream<charT, traits>& endl(basic_ostream<charT, traits>& os);
    template<class charT, class traits>
        basic_ostream<charT, traits>& ends(basic_ostream<charT, traits>& os);
    template<class charT, class traits>
        basic_ostream<charT, traits>& flush(basic_ostream<charT, traits>& os);

    template<class charT, class traits>
        basic_ostream<charT, traits>& emit_on_flush(basic_ostream<charT, traits>& os);
    template<class charT, class traits>
        basic_ostream<charT, traits>& noemit_on_flush(basic_ostream<charT, traits>& os);
    template<class charT, class traits>
        basic_ostream<charT, traits>& flush_emit(basic_ostream<charT, traits>& os);
}

```

305) That is, for each class derived from an instance of `basic_streambuf` in this Clause (31.8.2, 31.9.2), a specification of how consuming a character effects the associated output sequence is given. There is no requirement on a program-defined class.

306) Typically, `overflow` returns `c` to indicate success, except when `traits::eq_int_type(c, traits::eof())` returns `true`, in which case it returns `traits::not_eof(c)`.

```

template<class charT, class traits, class T>
    basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&& os, const T& x);
}

```

31.7.3 Header <iomanip> synopsis

[iomanip.syn]

```

namespace std {
    // types T1, T2, ... are unspecified implementation types
    T1 resetiosflags(ios_base::fmtflags mask);
    T2 setiosflags (ios_base::fmtflags mask);
    T3 setbase(int base);
    template<class charT> T4 setfill(charT c);
    T5 setprecision(int n);
    T6 setw(int n);
    template<class moneyT> T7 get_money(moneyT& mon, bool intl = false);
    template<class moneyT> T8 put_money(const moneyT& mon, bool intl = false);
    template<class charT> T9 get_time(struct tm* tmb, const charT* fmt);
    template<class charT> T10 put_time(const struct tm* tmb, const charT* fmt);

    template<class charT>
        T11 quoted(const charT* s, charT delim = charT('"'), charT escape = charT('\\'));

    template<class charT, class traits, class Allocator>
        T12 quoted(const basic_string<charT, traits, Allocator>& s,
            charT delim = charT('"'), charT escape = charT('\\'));

    template<class charT, class traits, class Allocator>
        T13 quoted(basic_string<charT, traits, Allocator>& s,
            charT delim = charT('"'), charT escape = charT('\\'));

    template<class charT, class traits>
        T14 quoted(basic_string_view<charT, traits> s,
            charT delim = charT('"'), charT escape = charT('\\'));
}

```

31.7.4 Input streams

[input.streams]

- ¹ The header <istream> defines two types and a function signature that control input from a stream buffer along with a function template that extracts from stream rvalues.

31.7.4.1 Class template basic_istream

[istream]

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_istream : virtual public basic_ios<charT, traits> {
    public:
        // types (inherited from basic_ios (31.5.5))
        using char_type = charT;
        using int_type = typename traits::int_type;
        using pos_type = typename traits::pos_type;
        using off_type = typename traits::off_type;
        using traits_type = traits;

        // 31.7.4.1.1, constructor/destructor
        explicit basic_istream(basic_streambuf<charT, traits>* sb);
        virtual ~basic_istream();

        // 31.7.4.1.3, prefix/suffix
        class sentry;

        // 31.7.4.2, formatted input
        basic_istream<charT, traits>&
            operator>>(basic_istream<charT, traits>& (*pf)(basic_istream<charT, traits>&));
        basic_istream<charT, traits>&
            operator>>(basic_ios<charT, traits>& (*pf)(basic_ios<charT, traits>&));
    };
}

```

```

basic_istream<charT, traits>&
    operator>>(ios_base& (*pf)(ios_base&));

basic_istream<charT, traits>& operator>>(bool& n);
basic_istream<charT, traits>& operator>>(short& n);
basic_istream<charT, traits>& operator>>(unsigned short& n);
basic_istream<charT, traits>& operator>>(int& n);
basic_istream<charT, traits>& operator>>(unsigned int& n);
basic_istream<charT, traits>& operator>>(long& n);
basic_istream<charT, traits>& operator>>(unsigned long& n);
basic_istream<charT, traits>& operator>>(long long& n);
basic_istream<charT, traits>& operator>>(unsigned long long& n);
basic_istream<charT, traits>& operator>>(float& f);
basic_istream<charT, traits>& operator>>(double& f);
basic_istream<charT, traits>& operator>>(long double& f);

basic_istream<charT, traits>& operator>>(void*& p);
basic_istream<charT, traits>& operator>>(basic_streambuf<char_type, traits>* sb);

// 31.7.4.3, unformatted input
streamsize gcount() const;
int_type get();
basic_istream<charT, traits>& get(char_type& c);
basic_istream<charT, traits>& get(char_type* s, streamsize n);
basic_istream<charT, traits>& get(char_type* s, streamsize n, char_type delim);
basic_istream<charT, traits>& get(basic_streambuf<char_type, traits>& sb);
basic_istream<charT, traits>& get(basic_streambuf<char_type, traits>& sb, char_type delim);

basic_istream<charT, traits>& getline(char_type* s, streamsize n);
basic_istream<charT, traits>& getline(char_type* s, streamsize n, char_type delim);

basic_istream<charT, traits>& ignore(streamsize n = 1, int_type delim = traits::eof());
int_type peek();
basic_istream<charT, traits>& read (char_type* s, streamsize n);
streamsize readsome(char_type* s, streamsize n);

basic_istream<charT, traits>& putback(char_type c);
basic_istream<charT, traits>& unget();
int sync();

pos_type tellg();
basic_istream<charT, traits>& seekg(pos_type);
basic_istream<charT, traits>& seekg(off_type, ios_base::seekdir);

protected:
// 31.7.4.1.1, copy/move constructor
basic_istream(const basic_istream& rhs) = delete;
basic_istream(basic_istream&& rhs);

// 31.7.4.1.2, assign and swap
basic_istream& operator=(const basic_istream& rhs) = delete;
basic_istream& operator=(basic_istream&& rhs);
void swap(basic_istream& rhs);
};

// 31.7.4.2.3, character extraction templates
template<class charT, class traits>
    basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>&, charT&);
template<class traits>
    basic_istream<char, traits>& operator>>(basic_istream<char, traits>&, unsigned char&);
template<class traits>
    basic_istream<char, traits>& operator>>(basic_istream<char, traits>&, signed char&);

```

```

template<class charT, class traits>
    basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>&, charT*);
template<class traits>
    basic_istream<char, traits>& operator>>(basic_istream<char, traits>&, unsigned char*);
template<class traits>
    basic_istream<char, traits>& operator>>(basic_istream<char, traits>&, signed char*);
}

```

- 1 The class template `basic_istream` defines a number of member function signatures that assist in reading and interpreting input from sequences controlled by a stream buffer.
- 2 Two groups of member function signatures share common properties: the *formatted input functions* (or *extractors*) and the *unformatted input functions*. Both groups of input functions are described as if they obtain (or *extract*) input *characters* by calling `rdbuf()->sbumpc()` or `rdbuf()->sgetc()`. They may use other public members of `istream`.
- 3 If `rdbuf()->sbumpc()` or `rdbuf()->sgetc()` returns `traits::eof()`, then the input function, except as explicitly noted otherwise, completes its actions and does `setstate(eofbit)`, which may throw `ios_base::failure` (31.5.5.4), before returning.
- 4 If one of these called functions throws an exception, then unless explicitly noted otherwise, the input function sets `badbit` in error state. If `badbit` is on in `exceptions()`, the input function rethrows the exception without completing its actions, otherwise it does not throw anything and proceeds as if the called function had returned a failure indication.

31.7.4.1.1 `basic_istream` constructors

[istream.cons]

```
explicit basic_istream(basic_streambuf<charT, traits>* sb);
```

- 1 *Effects:* Constructs an object of class `basic_istream`, initializing the base class subobject with `basic_ios::init(sb)` (31.5.5.2).

- 2 *Ensures:* `gcount() == 0`.

```
basic_istream(basic_istream&& rhs);
```

- 3 *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by default constructing the base class, copying the `gcount()` from `rhs`, calling `basic_ios<charT, traits>::move(rhs)` to initialize the base class, and setting the `gcount()` for `rhs` to 0.

```
virtual ~basic_istream();
```

- 4 *Effects:* Destroys an object of class `basic_istream`.

- 5 *Remarks:* Does not perform any operations of `rdbuf()`.

31.7.4.1.2 Class `basic_istream` assign and swap

[istream.assign]

```
basic_istream& operator=(basic_istream&& rhs);
```

- 1 *Effects:* As if by `swap(rhs)`.

- 2 *Returns:* `*this`.

```
void swap(basic_istream& rhs);
```

- 3 *Effects:* Calls `basic_ios<charT, traits>::swap(rhs)`. Exchanges the values returned by `gcount()` and `rhs.gcount()`.

31.7.4.1.3 Class `basic_istream::sentry`

[istream::sentry]

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_istream<charT, traits>::sentry {
        using traits_type = traits;
        bool ok_; // exposition only
    public:
        explicit sentry(basic_istream<charT, traits>& is, bool noskipws = false);
        ~sentry();
        explicit operator bool() const { return ok_; }
        sentry(const sentry&) = delete;
    };
}

```

```

    sentry& operator=(const sentry&) = delete;
};
}

```

1 The class `sentry` defines a class that is responsible for doing exception safe prefix and suffix operations.

```
explicit sentry(basic_istream<charT, traits>& is, bool noskipws = false);
```

2 *Effects:* If `is.good()` is false, calls `is.setstate(failbit)`. Otherwise, prepares for formatted or unformatted input. First, if `is.tie()` is not a null pointer, the function calls `is.tie()->flush()` to synchronize the output sequence with any associated external C stream. Except that this call can be suppressed if the put area of `is.tie()` is empty. Further an implementation is allowed to defer the call to `flush` until a call of `is.rdbuf()->underflow()` occurs. If no such call occurs before the `sentry` object is destroyed, the call to `flush` may be eliminated entirely.³⁰⁷ If `noskipws` is zero and `is.flags() & ios_base::skipws` is nonzero, the function extracts and discards each character as long as the next available input character `c` is a whitespace character. If `is.rdbuf()->sgetc()` or `is.rdbuf()->sgetc()` returns `traits::eof()`, the function calls `setstate(failbit | eofbit)` (which may throw `ios_base::failure`).

3 *Remarks:* The constructor

```
explicit sentry(basic_istream<charT, traits>& is, bool noskipws = false)
```

uses the currently imbued locale in `is`, to determine whether the next input character is whitespace or not.

4 To decide if the character `c` is a whitespace character, the constructor performs as if it executes the following code fragment:

```
const ctype<charT>& ctype = use_facet<ctype<charT>>(is.getloc());
if (ctype.is(ctype.space, c) != 0)
    // c is a whitespace character.

```

5 If, after any preparation is completed, `is.good()` is true, `ok_ != false` otherwise, `ok_ == false`. During preparation, the constructor may call `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4))³⁰⁸

```
~sentry();
```

6 *Effects:* None.

```
explicit operator bool() const;
```

7 *Effects:* Returns `ok_`.

31.7.4.2 Formatted input functions

[istream.formatted]

31.7.4.2.1 Common requirements

[istream.formatted.reqmts]

1 Each formatted input function begins execution by constructing an object of class `sentry` with the `noskipws` (second) argument false. If the `sentry` object returns true, when converted to a value of type `bool`, the function endeavors to obtain the requested input. If an exception is thrown during input then `ios::badbit` is turned on³⁰⁹ in `*this`'s error state. If `(exceptions()&badbit) != 0` then the exception is rethrown. In any case, the formatted input function destroys the `sentry` object. If no exception has been thrown, it returns `*this`.

31.7.4.2.2 Arithmetic extractors

[istream.formatted.arithmetic]

```
operator>>(unsigned short& val);
operator>>(unsigned int& val);
operator>>(long& val);
operator>>(unsigned long& val);
operator>>(long long& val);
operator>>(unsigned long long& val);
operator>>(float& val);
operator>>(double& val);

```

307) This will be possible only in functions that are part of the library. The semantics of the constructor used in user code is as specified.

308) The `sentry` constructor and destructor can also perform additional implementation-dependent operations.

309) This is done without causing an `ios::failure` to be thrown.

```
operator>>(long double& val);
operator>>(bool& val);
operator>>(void*& val);
```

- 1 As in the case of the inserters, these extractors depend on the locale's `num_get<>` (26.4.2.1) object to perform parsing the input stream data. These extractors behave as formatted input functions (as described in 31.7.4.2.1). After a sentry object is constructed, the conversion occurs as if performed by the following code fragment:

```
using numget = num_get<charT, istreambuf_iterator<charT, traits>>;
iostate err = iostate::goodbit;
use_facet<numget>(loc).get(*this, 0, *this, err, val);
setstate(err);
```

In the above fragment, `loc` stands for the private member of the `basic_ios` class. [*Note:* The first argument provides an object of the `istreambuf_iterator` class which is an iterator pointed to an input stream. It bypasses istreams and uses streambufs directly. — *end note*] Class `locale` relies on this type as its interface to `istream`, so that it does not need to depend directly on `istream`.

```
operator>>(short& val);
```

- 2 The conversion occurs as if performed by the following code fragment (using the same notation as for the preceding code fragment):

```
using numget = num_get<charT, istreambuf_iterator<charT, traits>>;
iostate err = ios_base::goodbit;
long lval;
use_facet<numget>(loc).get(*this, 0, *this, err, lval);
if (lval < numeric_limits<short>::min()) {
    err |= ios_base::failbit;
    val = numeric_limits<short>::min();
} else if (numeric_limits<short>::max() < lval) {
    err |= ios_base::failbit;
    val = numeric_limits<short>::max();
} else
    val = static_cast<short>(lval);
setstate(err);
```

```
operator>>(int& val);
```

- 3 The conversion occurs as if performed by the following code fragment (using the same notation as for the preceding code fragment):

```
using numget = num_get<charT, istreambuf_iterator<charT, traits>>;
iostate err = ios_base::goodbit;
long lval;
use_facet<numget>(loc).get(*this, 0, *this, err, lval);
if (lval < numeric_limits<int>::min()) {
    err |= ios_base::failbit;
    val = numeric_limits<int>::min();
} else if (numeric_limits<int>::max() < lval) {
    err |= ios_base::failbit;
    val = numeric_limits<int>::max();
} else
    val = static_cast<int>(lval);
setstate(err);
```

31.7.4.2.3 `basic_istream::operator>>`

[`istream.extractors`]

```
basic_istream<charT, traits>&
operator>>(basic_istream<charT, traits>& (*pf)(basic_istream<charT, traits>&));
```

- 1 *Effects:* None. This extractor does not behave as a formatted input function (as described in 31.7.4.2.1).
- 2 *Returns:* `pf(*this)`.³¹⁰

³¹⁰ See, for example, the function signature `ws(basic_istream&)` (31.7.4.4).

```
basic_istream<charT, traits>&
operator>>(basic_ios<charT, traits>& (*pf)(basic_ios<charT, traits>&));
```

3 *Effects:* Calls `pf(*this)`. This extractor does not behave as a formatted input function (as described in 31.7.4.2.1).

4 *Returns:* `*this`.

```
basic_istream<charT, traits>& operator>>(ios_base& (*pf)(ios_base&));
```

5 *Effects:* Calls `pf(*this)`.³¹¹ This extractor does not behave as a formatted input function (as described in 31.7.4.2.1).

6 *Returns:* `*this`.

```
template<class charT, class traits>
basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>& in, charT* s);
template<class traits>
basic_istream<char, traits>& operator>>(basic_istream<char, traits>& in, unsigned char* s);
template<class traits>
basic_istream<char, traits>& operator>>(basic_istream<char, traits>& in, signed char* s);
```

7 *Effects:* Behaves like a formatted input member (as described in 31.7.4.2.1) of `in`. After a sentry object is constructed, `operator>>` extracts characters and stores them into successive locations of an array whose first element is designated by `s`. If `width()` is greater than zero, `n` is `width()`. Otherwise `n` is the number of elements of the largest array of `char_type` that can store a terminating `charT()`. `n` is the maximum number of characters stored.

8 Characters are extracted and stored until any of the following occurs:

(8.1) — `n-1` characters are stored;

(8.2) — end of file occurs on the input sequence;

(8.3) — letting `ct` be `use_facet<ctype<charT>>(in.getloc())`, `ct.is(ct.space, c)` is true.

9 `operator>>` then stores a null byte (`charT()`) in the next position, which may be the first position if no characters were extracted. `operator>>` then calls `width(0)`.

10 If the function extracted no characters, it calls `setstate(failbit)`, which may throw `ios_base::failure` (31.5.5.4).

11 *Returns:* `in`.

```
template<class charT, class traits>
basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>& in, charT& c);
template<class traits>
basic_istream<char, traits>& operator>>(basic_istream<char, traits>& in, unsigned char& c);
template<class traits>
basic_istream<char, traits>& operator>>(basic_istream<char, traits>& in, signed char& c);
```

12 *Effects:* Behaves like a formatted input member (as described in 31.7.4.2.1) of `in`. After a sentry object is constructed a character is extracted from `in`, if one is available, and stored in `c`. Otherwise, the function calls `in.setstate(failbit)`.

13 *Returns:* `in`.

```
basic_istream<charT, traits>& operator>>(basic_streambuf<charT, traits>* sb);
```

14 *Effects:* Behaves as an unformatted input function (31.7.4.3). If `sb` is null, calls `setstate(failbit)`, which may throw `ios_base::failure` (31.5.5.4). After a sentry object is constructed, extracts characters from `*this` and inserts them in the output sequence controlled by `sb`. Characters are extracted and inserted until any of the following occurs:

(14.1) — end-of-file occurs on the input sequence;

(14.2) — inserting in the output sequence fails (in which case the character to be inserted is not extracted);

(14.3) — an exception occurs (in which case the exception is caught).

311) See, for example, the function signature `dec(ios_base&)` (31.5.6.3).

15 If the function inserts no characters, it calls `setstate(failbit)`, which may throw `ios_base::failure` (31.5.5.4). If it inserted no characters because it caught an exception thrown while extracting characters from `*this` and `failbit` is on in `exceptions()` (31.5.5.4), then the caught exception is rethrown.

16 *Returns:* `*this`.

31.7.4.3 Unformatted input functions [istream.unformatted]

1 Each unformatted input function begins execution by constructing an object of class `sentry` with the default argument `noskipws` (second) argument `true`. If the `sentry` object returns `true`, when converted to a value of type `bool`, the function endeavors to obtain the requested input. Otherwise, if the `sentry` constructor exits by throwing an exception or if the `sentry` object returns `false`, when converted to a value of type `bool`, the function returns without attempting to obtain any input. In either case the number of extracted characters is set to 0; unformatted input functions taking a character array of nonzero size as an argument shall also store a null character (using `charT()`) in the first location of the array. If an exception is thrown during input then `ios::badbit` is turned on³¹² in `*this`'s error state. (Exceptions thrown from `basic_ios<>::clear()` are not caught or rethrown.) If `(exceptions()&badbit) != 0` then the exception is rethrown. It also counts the number of characters extracted. If no exception has been thrown it ends by storing the count in a member object and returning the value specified. In any event the `sentry` object is destroyed before leaving the unformatted input function.

```
streamsize gcount() const;
```

2 *Effects:* None. This member function does not behave as an unformatted input function (as described above).

3 *Returns:* The number of characters extracted by the last unformatted input member function called for the object.

```
int_type get();
```

4 *Effects:* Behaves as an unformatted input function (as described above). After constructing a `sentry` object, extracts a character `c`, if one is available. Otherwise, the function calls `setstate(failbit)`, which may throw `ios_base::failure` (31.5.5.4),

5 *Returns:* `c` if available, otherwise `traits::eof()`.

```
basic_istream<charT, traits>& get(char_type& c);
```

6 *Effects:* Behaves as an unformatted input function (as described above). After constructing a `sentry` object, extracts a character, if one is available, and assigns it to `c`.³¹³ Otherwise, the function calls `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4)).

7 *Returns:* `*this`.

```
basic_istream<charT, traits>& get(char_type* s, streamsize n, char_type delim);
```

8 *Effects:* Behaves as an unformatted input function (as described above). After constructing a `sentry` object, extracts characters and stores them into successive locations of an array whose first element is designated by `s`.³¹⁴ Characters are extracted and stored until any of the following occurs:

- (8.1) — `n` is less than one or `n - 1` characters are stored;
- (8.2) — end-of-file occurs on the input sequence (in which case the function calls `setstate(eofbit)`);
- (8.3) — `traits::eq(c, delim)` for the next available input character `c` (in which case `c` is not extracted).

9 If the function stores no characters, it calls `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4)). In any case, if `n` is greater than zero it then stores a null character into the next successive location of the array.

10 *Returns:* `*this`.

```
basic_istream<charT, traits>& get(char_type* s, streamsize n);
```

11 *Effects:* Calls `get(s, n, widen('\n'))`.

³¹²) This is done without causing an `ios::failure` to be thrown.

³¹³) Note that this function is not overloaded on types `signed char` and `unsigned char`.

³¹⁴) Note that this function is not overloaded on types `signed char` and `unsigned char`.

12 *Returns:* Value returned by the call.

```
basic_istream<charT, traits>& get(basic_streambuf<char_type, traits>& sb, char_type delim);
```

13 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, extracts characters and inserts them in the output sequence controlled by `sb`. Characters are extracted and inserted until any of the following occurs:

- (13.1) — end-of-file occurs on the input sequence;
- (13.2) — inserting in the output sequence fails (in which case the character to be inserted is not extracted);
- (13.3) — `traits::eq(c, delim)` for the next available input character `c` (in which case `c` is not extracted);
- (13.4) — an exception occurs (in which case, the exception is caught but not rethrown).

14 If the function inserts no characters, it calls `setstate(failbit)`, which may throw `ios_base::failure` (31.5.5.4).

15 *Returns:* `*this`.

```
basic_istream<charT, traits>& get(basic_streambuf<char_type, traits>& sb);
```

16 *Effects:* Calls `get(sb, widen('\n'))`.

17 *Returns:* Value returned by the call.

```
basic_istream<charT, traits>& getline(char_type* s, streamsize n, char_type delim);
```

18 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, extracts characters and stores them into successive locations of an array whose first element is designated by `s`.³¹⁵ Characters are extracted and stored until one of the following occurs:

1. end-of-file occurs on the input sequence (in which case the function calls `setstate eofbit`);
2. `traits::eq(c, delim)` for the next available input character `c` (in which case the input character is extracted but not stored);³¹⁶
3. `n` is less than one or `n - 1` characters are stored (in which case the function calls `setstate(failbit)`).

19 These conditions are tested in the order shown.³¹⁷

20 If the function extracts no characters, it calls `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4)).³¹⁸

21 In any case, if `n` is greater than zero, it then stores a null character (using `charT()`) into the next successive location of the array.

22 *Returns:* `*this`.

23 [*Example:*

```
#include <iostream>

int main() {
    using namespace std;
    const int line_buffer_size = 100;

    char buffer[line_buffer_size];
    int line_number = 0;
    while (cin.getline(buffer, line_buffer_size, '\n') || cin.gcount()) {
        int count = cin.gcount();
        if (cin.eof())
            cout << "Partial final line"; // cin.fail() is false
        else if (cin.fail()) {
            cout << "Partial long line";
            cin.clear(cin.rdstate() & ~ios_base::failbit);
        }
    }
}
```

315) Note that this function is not overloaded on types `signed char` and `unsigned char`.

316) Since the final input character is “extracted”, it is counted in the `gcount()`, even though it is not stored.

317) This allows an input line which exactly fills the buffer, without setting `failbit`. This is different behavior than the historical AT&T implementation.

318) This implies an empty input line will not cause `failbit` to be set.

```

    } else {
        count--; // Don't include newline in count
        cout << "Line " << ++line_number;
    }
    cout << " (" << count << " chars): " << buffer << endl;
}
}
— end example]

```

```
basic_istream<charT, traits>& getline(char_type* s, streamsize n);
```

24 *Returns:* `getline(s, n, widen('\n'))`

```
basic_istream<charT, traits>& ignore(streamsize n = 1, int_type delim = traits::eof());
```

25 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, extracts characters and discards them. Characters are extracted until any of the following occurs:

- (25.1) — `n != numeric_limits<streamsize>::max()` (21.3.4) and `n` characters have been extracted so far
- (25.2) — end-of-file occurs on the input sequence (in which case the function calls `setstate(eofbit)`, which may throw `ios_base::failure` (31.5.5.4));
- (25.3) — `traits::eq_int_type(traits::to_int_type(c), delim)` for the next available input character `c` (in which case `c` is extracted).

26 *Remarks:* The last condition will never occur if `traits::eq_int_type(delim, traits::eof())`.

27 *Returns:* `*this`.

```
int_type peek();
```

28 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, reads but does not extract the current input character.

29 *Returns:* `traits::eof()` if `good()` is false. Otherwise, returns `rdbuf()->sgetc()`.

```
basic_istream<charT, traits>& read(char_type* s, streamsize n);
```

30 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, if `!good()` calls `setstate(failbit)` which may throw an exception, and return. Otherwise extracts characters and stores them into successive locations of an array whose first element is designated by `s`.³¹⁹ Characters are extracted and stored until either of the following occurs:

- (30.1) — `n` characters are stored;
- (30.2) — end-of-file occurs on the input sequence (in which case the function calls `setstate(failbit | eofbit)`, which may throw `ios_base::failure` (31.5.5.4)).

31 *Returns:* `*this`.

```
streamsize readsome(char_type* s, streamsize n);
```

32 *Effects:* Behaves as an unformatted input function (as described above). After constructing a sentry object, if `!good()` calls `setstate(failbit)` which may throw an exception, and return. Otherwise extracts characters and stores them into successive locations of an array whose first element is designated by `s`. If `rdbuf()->in_avail() == -1`, calls `setstate(eofbit)` (which may throw `ios_base::failure` (31.5.5.4)), and extracts no characters;

(32.1) — If `rdbuf()->in_avail() == 0`, extracts no characters

(32.2) — If `rdbuf()->in_avail() > 0`, extracts `min(rdbuf()->in_avail(), n)`.

33 *Returns:* The number of characters extracted.

```
basic_istream<charT, traits>& putback(char_type c);
```

34 *Effects:* Behaves as an unformatted input function (as described above), except that the function first clears `eofbit`. After constructing a sentry object, if `!good()` calls `setstate(failbit)` which may

³¹⁹) Note that this function is not overloaded on types `signed char` and `unsigned char`.

throw an exception, and return. If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`. If `rdbuf()` is null, or if `sputbackc` returns `traits::eof()`, calls `setstate(badbit)` (which may throw `ios_base::failure` (31.5.5.4)). [Note: This function extracts no characters, so the value returned by the next call to `gcount()` is 0. — end note]

35 *Returns: *this.*

```
basic_istream<charT, traits>& unget();
```

36 *Effects:* Behaves as an unformatted input function (as described above), except that the function first clears `eofbit`. After constructing a sentry object, if `!good()` calls `setstate(failbit)` which may throw an exception, and return. If `rdbuf()` is not null, calls `rdbuf()->sungetc()`. If `rdbuf()` is null, or if `sungetc` returns `traits::eof()`, calls `setstate(badbit)` (which may throw `ios_base::failure` (31.5.5.4)). [Note: This function extracts no characters, so the value returned by the next call to `gcount()` is 0. — end note]

37 *Returns: *this.*

```
int sync();
```

38 *Effects:* Behaves as an unformatted input function (as described above), except that it does not count the number of characters extracted and does not affect the value returned by subsequent calls to `gcount()`. After constructing a sentry object, if `rdbuf()` is a null pointer, returns `-1`. Otherwise, calls `rdbuf()->pubsync()` and, if that function returns `-1` calls `setstate(badbit)` (which may throw `ios_base::failure` (31.5.5.4), and returns `-1`. Otherwise, returns zero.

```
pos_type tellg();
```

39 *Effects:* Behaves as an unformatted input function (as described above), except that it does not count the number of characters extracted and does not affect the value returned by subsequent calls to `gcount()`.

40 *Returns:* After constructing a sentry object, if `fail() != false`, returns `pos_type(-1)` to indicate failure. Otherwise, returns `rdbuf()->pubseekoff(0, cur, in)`.

```
basic_istream<charT, traits>& seekg(pos_type pos);
```

41 *Effects:* Behaves as an unformatted input function (as described above), except that the function first clears `eofbit`, it does not count the number of characters extracted, and it does not affect the value returned by subsequent calls to `gcount()`. After constructing a sentry object, if `fail() != true`, executes `rdbuf()->pubseekpos(pos, ios_base::in)`. In case of failure, the function calls `setstate(failbit)` (which may throw `ios_base::failure`).

42 *Returns: *this.*

```
basic_istream<charT, traits>& seekg(off_type off, ios_base::seekdir dir);
```

43 *Effects:* Behaves as an unformatted input function (as described above), except that the function first clears `eofbit`, does not count the number of characters extracted, and does not affect the value returned by subsequent calls to `gcount()`. After constructing a sentry object, if `fail() != true`, executes `rdbuf()->pubseekoff(off, dir, ios_base::in)`. In case of failure, the function calls `setstate(failbit)` (which may throw `ios_base::failure`).

44 *Returns: *this.*

31.7.4.4 Standard `basic_istream` manipulators [istream.manip]

¹ Each instantiation of the function template specified in this subclause is a designated addressable function (20.5.4.2.1).

```
template<class charT, class traits>
  basic_istream<charT, traits>& ws(basic_istream<charT, traits>& is);
```

² *Effects:* Behaves as an unformatted input function (31.7.4.3), except that it does not count the number of characters extracted and does not affect the value returned by subsequent calls to `is.gcount()`. After constructing a sentry object extracts characters as long as the next available character `c` is whitespace or until there are no more characters in the sequence. Whitespace characters are distinguished with the same criterion as used by `sentry::sentry` (31.7.4.1.3). If `ws` stops extracting characters because there are no more available it sets `eofbit`, but not `failbit`.

3 *Returns:* is.

31.7.4.5 Rvalue stream extraction [istream.rvalue]

```
template<class charT, class traits, class T>
basic_istream<charT, traits>& operator>>(basic_istream<charT, traits>&& is, T&& x);
```

1 *Effects:* Equivalent to:

```
is >> std::forward<T>(x);
return is;
```

2 *Remarks:* This function shall not participate in overload resolution unless the expression `is >> std::forward<T>(x)` is well-formed.

31.7.4.6 Class template basic_iostream [iostreamclass]

```
namespace std {
template<class charT, class traits = char_traits<charT>>
class basic_iostream
: public basic_istream<charT, traits>,
  public basic_ostream<charT, traits> {
public:
using char_type = charT;
using int_type = typename traits::int_type;
using pos_type = typename traits::pos_type;
using off_type = typename traits::off_type;
using traits_type = traits;

// 31.7.4.6.1, constructor
explicit basic_iostream(basic_streambuf<charT, traits>* sb);

// 31.7.4.6.2, destructor
virtual ~basic_iostream();

protected:
// 31.7.4.6.1, constructor
basic_iostream(const basic_iostream& rhs) = delete;
basic_iostream(basic_iostream&& rhs);

// 31.7.4.6.3, assign and swap
basic_iostream& operator=(const basic_iostream& rhs) = delete;
basic_iostream& operator=(basic_iostream&& rhs);
void swap(basic_iostream& rhs);
};
}
```

1 The class template `basic_iostream` inherits a number of functions that allow reading input and writing output to sequences controlled by a stream buffer.

31.7.4.6.1 basic_iostream constructors [iostream.cons]

```
explicit basic_iostream(basic_streambuf<charT, traits>* sb);
```

1 *Effects:* Constructs an object of class `basic_iostream`, initializing the base class subobjects with `basic_istream<charT, traits>(sb)` (31.7.4.1) and `basic_ostream<charT, traits>(sb)` (31.7.5.1).

2 *Ensures:* `rdbuf() == sb` and `gcount() == 0`.

```
basic_iostream(basic_iostream&& rhs);
```

3 *Effects:* Move constructs from the rvalue `rhs` by constructing the `basic_istream` base class with `move(rhs)`.

31.7.4.6.2 basic_iostream destructor [iostream.dest]

```
virtual ~basic_iostream();
```

1 *Effects:* Destroys an object of class `basic_iostream`.

2 *Remarks:* Does not perform any operations on `rdbuf()`.

31.7.4.6.3 basic_ostream assign and swap

[ostream.assign]

```
basic_ostream& operator=(basic_ostream&& rhs);
```

¹ *Effects:* As if by swap(rhs).

```
void swap(basic_ostream& rhs);
```

² *Effects:* Calls basic_ostream<charT, traits>::swap(rhs).

31.7.5 Output streams

[output.streams]

¹ The header <ostream> defines a type and several function signatures that control output to a stream buffer along with a function template that inserts into stream rvalues.

31.7.5.1 Class template basic_ostream

[ostream]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_ostream : virtual public basic_ios<charT, traits> {
    public:
        // types (inherited from basic_ios (31.5.5))
        using char_type = charT;
        using int_type = typename traits::int_type;
        using pos_type = typename traits::pos_type;
        using off_type = typename traits::off_type;
        using traits_type = traits;

        // 31.7.5.1.1, constructor/destructor
        explicit basic_ostream(basic_streambuf<char_type, traits>* sb);
        virtual ~basic_ostream();

        // 31.7.5.1.3, prefix/suffix
        class sentry;

        // 31.7.5.2, formatted output
        basic_ostream<charT, traits>&
            operator<<(basic_ostream<charT, traits>& (*pf)(basic_ostream<charT, traits>&));
        basic_ostream<charT, traits>&
            operator<<(basic_ios<charT, traits>& (*pf)(basic_ios<charT, traits>&));
        basic_ostream<charT, traits>&
            operator<<(ios_base& (*pf)(ios_base&));

        basic_ostream<charT, traits>& operator<<(bool n);
        basic_ostream<charT, traits>& operator<<(short n);
        basic_ostream<charT, traits>& operator<<(unsigned short n);
        basic_ostream<charT, traits>& operator<<(int n);
        basic_ostream<charT, traits>& operator<<(unsigned int n);
        basic_ostream<charT, traits>& operator<<(long n);
        basic_ostream<charT, traits>& operator<<(unsigned long n);
        basic_ostream<charT, traits>& operator<<(long long n);
        basic_ostream<charT, traits>& operator<<(unsigned long long n);
        basic_ostream<charT, traits>& operator<<(float f);
        basic_ostream<charT, traits>& operator<<(double f);
        basic_ostream<charT, traits>& operator<<(long double f);

        basic_ostream<charT, traits>& operator<<(const void* p);
        basic_ostream<charT, traits>& operator<<(nullptr_t);
        basic_ostream<charT, traits>& operator<<(basic_streambuf<char_type, traits>* sb);

        // 31.7.5.3, unformatted output
        basic_ostream<charT, traits>& put(char_type c);
        basic_ostream<charT, traits>& write(const char_type* s, streamsize n);

        basic_ostream<charT, traits>& flush();
```

```

// 31.7.5.1.4, seeks
pos_type tellp();
basic_ostream<charT, traits>& seekp(pos_type);
basic_ostream<charT, traits>& seekp(off_type, ios_base::seekdir);

protected:
// 31.7.5.1.1, copy/move constructor
basic_ostream(const basic_ostream& rhs) = delete;
basic_ostream(basic_ostream&& rhs);

// 31.7.5.1.2, assign and swap
basic_ostream& operator=(const basic_ostream& rhs) = delete;
basic_ostream& operator=(basic_ostream&& rhs);
void swap(basic_ostream& rhs);
};

// 31.7.5.2.4, character inserters
template<class charT, class traits>
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&, charT);
template<class charT, class traits>
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&, char);
template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, char);

template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, signed char);
template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, unsigned char);

template<class charT, class traits>
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&, const charT*);
template<class charT, class traits>
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&, const char*);
template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, const char*);

template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, const signed char*);
template<class traits>
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>&, const unsigned char*);
}

```

- ¹ The class template `basic_ostream` defines a number of member function signatures that assist in formatting and writing output to output sequences controlled by a stream buffer.
- ² Two groups of member function signatures share common properties: the *formatted output functions* (or *inserters*) and the *unformatted output functions*. Both groups of output functions generate (or *insert*) output *characters* by actions equivalent to calling `rdbuf() -> sputc(int_type)`. They may use other public members of `basic_ostream` except that they shall not invoke any virtual members of `rdbuf()` except `overflow()`, `xspn()`, and `sync()`.
- ³ If one of these called functions throws an exception, then unless explicitly noted otherwise the output function sets `badbit` in error state. If `badbit` is on in `exceptions()`, the output function rethrows the exception without completing its actions, otherwise it does not throw anything and treat as an error.

31.7.5.1.1 `basic_ostream` constructors

[ostream.cons]

```
explicit basic_ostream(basic_streambuf<charT, traits>* sb);
```

- ¹ *Effects:* Constructs an object of class `basic_ostream`, initializing the base class subobject with `basic_ios<charT, traits>::init(sb)` (31.5.5.2).
- ² *Ensures:* `rdbuf() == sb`.

```
basic_ostream(basic_ostream&& rhs);
```

- 3 *Effects:* Move constructs from the rvalue rhs. This is accomplished by default constructing the base class and calling `basic_ios<charT, traits>::move(rhs)` to initialize the base class.

```
virtual ~basic_ostream();
```

- 4 *Effects:* Destroys an object of class `basic_ostream`.

- 5 *Remarks:* Does not perform any operations on `rdbuf()`.

31.7.5.1.2 Class `basic_ostream` assign and swap [ostream.assign]

```
basic_ostream& operator=(basic_ostream&& rhs);
```

- 1 *Effects:* As if by `swap(rhs)`.

- 2 *Returns:* `*this`.

```
void swap(basic_ostream& rhs);
```

- 3 *Effects:* Calls `basic_ios<charT, traits>::swap(rhs)`.

31.7.5.1.3 Class `basic_ostream::sentry` [ostream::sentry]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_ostream<charT, traits>::sentry {
        bool ok_; // exposition only
    public:
        explicit sentry(basic_ostream<charT, traits>& os);
        ~sentry();
        explicit operator bool() const { return ok_; }

        sentry(const sentry&) = delete;
        sentry& operator=(const sentry&) = delete;
    };
}
```

- 1 The class `sentry` defines a class that is responsible for doing exception safe prefix and suffix operations.

```
explicit sentry(basic_ostream<charT, traits>& os);
```

- 2 If `os.good()` is nonzero, prepares for formatted or unformatted output. If `os.tie()` is not a null pointer, calls `os.tie()->flush()`.³²⁰

- 3 If, after any preparation is completed, `os.good()` is true, `ok_ == true` otherwise, `ok_ == false`. During preparation, the constructor may call `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4))³²¹

```
~sentry();
```

- 4 If `(os.flags() & ios_base::unitbuf) && !uncaught_exceptions() && os.good()` is true, calls `os.rdbuf()->pubsync()`. If that function returns -1, sets `badbit` in `os.rdstate()` without propagating an exception.

```
explicit operator bool() const;
```

- 5 *Effects:* Returns `ok_`.

31.7.5.1.4 `basic_ostream` seek members [ostream.seek]

- 1 Each seek member function begins execution by constructing an object of class `sentry`. It returns by destroying the `sentry` object.

```
pos_type tellp();
```

- 2 *Returns:* If `fail() != false`, returns `pos_type(-1)` to indicate failure. Otherwise, returns `rdbuf()->pubseekoff(0, cur, out)`.

³²⁰) The call `os.tie()->flush()` does not necessarily occur if the function can determine that no synchronization is necessary.

³²¹) The `sentry` constructor and destructor can also perform additional implementation-dependent operations.


```
basic_ostream<charT, traits>& seekp(pos_type pos);
```

3 *Effects:* If `fail() != true`, executes `rdbuf()->pubseekpos(pos, ios_base::out)`. In case of failure, the function calls `setstate(failbit)` (which may throw `ios_base::failure`).

4 *Returns:* `*this`.

```
basic_ostream<charT, traits>& seekp(off_type off, ios_base::seekdir dir);
```

5 *Effects:* If `fail() != true`, executes `rdbuf()->pubseekoff(off, dir, ios_base::out)`. In case of failure, the function calls `setstate(failbit)` (which may throw `ios_base::failure`).

6 *Returns:* `*this`.

31.7.5.2 Formatted output functions [ostream.formatted]

31.7.5.2.1 Common requirements [ostream.formatted.reqmts]

1 Each formatted output function begins execution by constructing an object of class `sentry`. If this object returns `true` when converted to a value of type `bool`, the function endeavors to generate the requested output. If the generation fails, then the formatted output function does `setstate(ios_base::failbit)`, which might throw an exception. If an exception is thrown during output, then `ios::badbit` is turned on³²² in `*this`'s error state. If `(exceptions()&badbit) != 0` then the exception is rethrown. Whether or not an exception is thrown, the `sentry` object is destroyed before leaving the formatted output function. If no exception is thrown, the result of the formatted output function is `*this`.

2 The descriptions of the individual formatted output functions describe how they perform output and do not mention the `sentry` object.

3 If a formatted output function of a stream `os` determines padding, it does so as follows. Given a `charT` character sequence `seq` where `charT` is the character type of the stream, if the length of `seq` is less than `os.width()`, then enough copies of `os.fill()` are added to this sequence as necessary to pad to a width of `os.width()` characters. If `(os.flags() & ios_base::adjustfield) == ios_base::left` is `true`, the fill characters are placed after the character sequence; otherwise, they are placed before the character sequence.

31.7.5.2.2 Arithmetic inserters [ostream.inserters.arithmetic]

```
operator<<(bool val);
operator<<(short val);
operator<<(unsigned short val);
operator<<(int val);
operator<<(unsigned int val);
operator<<(long val);
operator<<(unsigned long val);
operator<<(long long val);
operator<<(unsigned long long val);
operator<<(float val);
operator<<(double val);
operator<<(long double val);
operator<<(const void* val);
```

1 *Effects:* The classes `num_get<>` and `num_put<>` handle locale-dependent numeric formatting and parsing. These inserter functions use the imbued `locale` value to perform numeric formatting. When `val` is of type `bool`, `long`, `unsigned long`, `long long`, `unsigned long long`, `double`, `long double`, or `const void*`, the formatting conversion occurs as if it performed the following code fragment:

```
bool failed = use_facet<
    num_put<charT, ostreambuf_iterator<charT, traits>>
    >(getloc()).put(*this, *this, fill(), val).failed();
```

When `val` is of type `short` the formatting conversion occurs as if it performed the following code fragment:

```
ios_base::fmtflags baseflags = ios_base::flags() & ios_base::basefield;
```

322) without causing an `ios::failure` to be thrown.

```

bool failed = use_facet<
    num_put<charT, ostreambuf_iterator<charT, traits>>
    >(getloc()).put(*this, *this, fill(),
        baseflags == ios_base::oct || baseflags == ios_base::hex
        ? static_cast<long>(static_cast<unsigned short>(val))
        : static_cast<long>(val)).failed();

```

When `val` is of type `int` the formatting conversion occurs as if it performed the following code fragment:

```

ios_base::fmtflags baseflags = ios_base::flags() & ios_base::basefield;
bool failed = use_facet<
    num_put<charT, ostreambuf_iterator<charT, traits>>
    >(getloc()).put(*this, *this, fill(),
        baseflags == ios_base::oct || baseflags == ios_base::hex
        ? static_cast<long>(static_cast<unsigned int>(val))
        : static_cast<long>(val)).failed();

```

When `val` is of type `unsigned short` or `unsigned int` the formatting conversion occurs as if it performed the following code fragment:

```

bool failed = use_facet<
    num_put<charT, ostreambuf_iterator<charT, traits>>
    >(getloc()).put(*this, *this, fill(),
        static_cast<unsigned long>(val)).failed();

```

When `val` is of type `float` the formatting conversion occurs as if it performed the following code fragment:

```

bool failed = use_facet<
    num_put<charT, ostreambuf_iterator<charT, traits>>
    >(getloc()).put(*this, *this, fill(),
        static_cast<double>(val)).failed();

```

2 The first argument provides an object of the `ostreambuf_iterator<>` class which is an iterator for class `basic_ostream<>`. It bypasses `ostream`s and uses `streambuf`s directly. Class `locale` relies on these types as its interface to `iostream`s, since for flexibility it has been abstracted away from direct dependence on `ostream`. The second parameter is a reference to the base class subobject of type `ios_base`. It provides formatting specifications such as field width, and a locale from which to obtain other facets. If `failed` is true then does `setstate(badbit)`, which may throw an exception, and returns.

3 *Returns:* `*this`.

31.7.5.2.3 `basic_ostream::operator<<` [ostream.inserters]

```

basic_ostream<charT, traits>&
    operator<<(basic_ostream<charT, traits>& (*pf)(basic_ostream<charT, traits>&));

```

1 *Effects:* None. Does not behave as a formatted output function (as described in 31.7.5.2.1).

2 *Returns:* `pf(*this)`.³²³

```

basic_ostream<charT, traits>&
    operator<<(basic_ios<charT, traits>& (*pf)(basic_ios<charT, traits>&));

```

3 *Effects:* Calls `pf(*this)`. This inserter does not behave as a formatted output function (as described in 31.7.5.2.1).

4 *Returns:* `*this`.³²⁴

```

basic_ostream<charT, traits>& operator<<(ios_base& (*pf)(ios_base&));

```

5 *Effects:* Calls `pf(*this)`. This inserter does not behave as a formatted output function (as described in 31.7.5.2.1).

6 *Returns:* `*this`.

323) See, for example, the function signature `endl(basic_ostream&)` (31.7.5.4).

324) See, for example, the function signature `dec(ios_base&)` (31.5.6.3).

```
basic_ostream<charT, traits>& operator<<(basic_streambuf<charT, traits>* sb);
```

7 *Effects:* Behaves as an unformatted output function (31.7.5.3). After the sentry object is constructed, if `sb` is null calls `setstate(badbit)` (which may throw `ios_base::failure`).

8 Gets characters from `sb` and inserts them in `*this`. Characters are read from `sb` and inserted until any of the following occurs:

(8.1) — end-of-file occurs on the input sequence;

(8.2) — inserting in the output sequence fails (in which case the character to be inserted is not extracted);

(8.3) — an exception occurs while getting a character from `sb`.

9 If the function inserts no characters, it calls `setstate(failbit)` (which may throw `ios_base::failure` (31.5.5.4)). If an exception was thrown while extracting a character, the function sets `failbit` in error state, and if `failbit` is on in `exceptions()` the caught exception is rethrown.

10 *Returns:* `*this`.

```
basic_ostream<charT, traits>& operator<<(nullptr_t);
```

11 *Effects:* Equivalent to:

```
return *this << s;
```

where `s` is an implementation-defined NTCTS (20.3.17).

31.7.5.2.4 Character inserter function templates

[ostream.inserters.character]

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& out, charT c);
```

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& out, char c);
```

```
// specialization
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out, char c);
```

```
// signed and unsigned
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out, signed char c);
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out, unsigned char c);
```

1 *Effects:* Behaves as a formatted output function (31.7.5.2.1) of `out`. Constructs a character sequence `seq`. If `c` has type `char` and the character type of the stream is not `char`, then `seq` consists of `out.widen(c)`; otherwise `seq` consists of `c`. Determines padding for `seq` as described in 31.7.5.2.1. Inserts `seq` into `out`. Calls `os.width(0)`.

2 *Returns:* `out`.

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& out, const charT* s);
```

```
template<class charT, class traits>
```

```
basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>& out, const char* s);
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out, const char* s);
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out, const signed char* s);
```

```
template<class traits>
```

```
basic_ostream<char, traits>& operator<<(basic_ostream<char, traits>& out,
const unsigned char* s);
```

3 *Requires:* `s` shall not be a null pointer.

4 *Effects:* Behaves like a formatted inserter (as described in 31.7.5.2.1) of `out`. Creates a character sequence `seq` of `n` characters starting at `s`, each widened using `out.widen()` (31.5.5.3), where `n` is the number that would be computed as if by:

(4.1) — `traits::length(s)` for the overload where the first argument is of type `basic_ostream<charT, traits>&` and the second is of type `const charT*`, and also for the overload where the first argument is of type `basic_ostream<char, traits>&` and the second is of type `const char*`,

(4.2) — `char_traits<char>::length(s)` for the overload where the first argument is of type `basic_ostream<charT, traits>&` and the second is of type `const char*`,

(4.3) — `traits::length(reinterpret_cast<const char*>(s))` for the other two overloads.

Determines padding for `seq` as described in 31.7.5.2.1. Inserts `seq` into `out`. Calls `width(0)`.

5 *Returns:* `out`.

31.7.5.3 Unformatted output functions [ostream.unformatted]

1 Each unformatted output function begins execution by constructing an object of class `sentry`. If this object returns `true`, while converting to a value of type `bool`, the function endeavors to generate the requested output. If an exception is thrown during output, then `ios::badbit` is turned on³²⁵ in `*this`'s error state. If `(exceptions() & badbit) != 0` then the exception is rethrown. In any case, the unformatted output function ends by destroying the sentry object, then, if no exception was thrown, returning the value specified for the unformatted output function.

```
basic_ostream<charT, traits>& put(char_type c);
```

2 *Effects:* Behaves as an unformatted output function (as described above). After constructing a sentry object, inserts the character `c`, if possible.³²⁶

3 Otherwise, calls `setstate(badbit)` (which may throw `ios_base::failure` (31.5.5.4)).

4 *Returns:* `*this`.

```
basic_ostream& write(const char_type* s, streamsize n);
```

5 *Effects:* Behaves as an unformatted output function (as described above). After constructing a sentry object, obtains characters to insert from successive locations of an array whose first element is designated by `s`.³²⁷ Characters are inserted until either of the following occurs:

(5.1) — `n` characters are inserted;

(5.2) — inserting in the output sequence fails (in which case the function calls `setstate(badbit)`, which may throw `ios_base::failure` (31.5.5.4)).

6 *Returns:* `*this`.

```
basic_ostream& flush();
```

7 *Effects:* Behaves as an unformatted output function (as described above). If `rdbuf()` is not a null pointer, constructs a sentry object. If this object returns `true` when converted to a value of type `bool` the function calls `rdbuf()->pubsync()`. If that function returns `-1` calls `setstate(badbit)` (which may throw `ios_base::failure` (31.5.5.4)). Otherwise, if the sentry object returns `false`, does nothing.

8 *Returns:* `*this`.

31.7.5.4 Standard basic_ostream manipulators [ostream.manip]

1 Each instantiation of any of the function templates specified in this subclause is a designated addressable function (20.5.4.2.1).

```
template<class charT, class traits>
basic_ostream<charT, traits>& endl(basic_ostream<charT, traits>& os);
```

2 *Effects:* Calls `os.put(os.widen('\n'))`, then `os.flush()`.

3 *Returns:* `os`.

```
template<class charT, class traits>
basic_ostream<charT, traits>& ends(basic_ostream<charT, traits>& os);
```

4 *Effects:* Inserts a null character into the output sequence: calls `os.put(charT())`.

5 *Returns:* `os`.

³²⁵) without causing an `ios::failure` to be thrown.

³²⁶) Note that this function is not overloaded on types `signed char` and `unsigned char`.

³²⁷) Note that this function is not overloaded on types `signed char` and `unsigned char`.

```
template<class charT, class traits>
    basic_ostream<charT, traits>& flush(basic_ostream<charT, traits>& os);
```

6 *Effects:* Calls `os.flush()`.

7 *Returns:* `os`.

```
template<class charT, class traits>
    basic_ostream<charT, traits>& emit_on_flush(basic_ostream<charT, traits>& os);
```

8 *Effects:* If `os.rdbuf()` is a `basic_syncbuf<charT, traits, Allocator>*`, called `buf` for the purpose of exposition, calls `buf->set_emit_on_sync(true)`. Otherwise this manipulator has no effect. [*Note:* To work around the issue that the `Allocator` template argument cannot be deduced, implementations can introduce an intermediate base class to `basic_syncbuf` that manages its `emit_on_sync` flag. — *end note*]

9 *Returns:* `os`.

```
template<class charT, class traits>
    basic_ostream<charT, traits>& noemit_on_flush(basic_ostream<charT, traits>& os);
```

10 *Effects:* If `os.rdbuf()` is a `basic_syncbuf<charT, traits, Allocator>*`, called `buf` for the purpose of exposition, calls `buf->set_emit_on_sync(false)`. Otherwise this manipulator has no effect.

11 *Returns:* `os`.

```
template<class charT, class traits>
    basic_ostream<charT, traits>& flush_emit(basic_ostream<charT, traits>& os);
```

12 *Effects:* Calls `os.flush()`. Then, if `os.rdbuf()` is a `basic_syncbuf<charT, traits, Allocator>*`, called `buf` for the purpose of exposition, calls `buf->emit()`.

13 *Returns:* `os`.

31.7.5.5 Rvalue stream insertion

[`ostream.rvalue`]

```
template<class charT, class traits, class T>
    basic_ostream<charT, traits>& operator<<(basic_ostream<charT, traits>&& os, const T& x);
```

1 *Effects:* As if by: `os << x`;

2 *Returns:* `os`.

3 *Remarks:* This function shall not participate in overload resolution unless the expression `os << x` is well-formed.

31.7.6 Standard manipulators

[`std.manip`]

1 The header `<iomanip>` defines several functions that support extractors and inserters that alter information maintained by class `ios_base` and its derived classes.

```
unspecified resetiosflags(ios_base::fmtflags mask);
```

2 *Returns:* An object of unspecified type such that if `out` is an object of type `basic_ostream<charT, traits>` then the expression `out << resetiosflags(mask)` behaves as if it called `f(out, mask)`, or if `in` is an object of type `basic_istream<charT, traits>` then the expression `in >> resetiosflags(mask)` behaves as if it called `f(in, mask)`, where the function `f` is defined as:³²⁸

```
void f(ios_base& str, ios_base::fmtflags mask) {
    // reset specified flags
    str.setf(ios_base::fmtflags(0), mask);
}
```

The expression `out << resetiosflags(mask)` shall have type `basic_ostream<charT, traits>&` and value `out`. The expression `in >> resetiosflags(mask)` shall have type `basic_istream<charT, traits>&` and value `in`.

328) The expression `cin >> resetiosflags(ios_base::skipws)` clears `ios_base::skipws` in the format flags stored in the `basic_istream<charT, traits>` object `cin` (the same as `cin >> noskipws`), and the expression `cout << resetiosflags(ios_base::showbase)` clears `ios_base::showbase` in the format flags stored in the `basic_ostream<charT, traits>` object `cout` (the same as `cout << noshowbase`).

unspecified setiosflags(ios_base::fmtflags mask);

- 3 *Returns:* An object of unspecified type such that if *out* is an object of type `basic_ostream<charT, traits>` then the expression `out << setiosflags(mask)` behaves as if it called `f(out, mask)`, or if *in* is an object of type `basic_istream<charT, traits>` then the expression `in >> setiosflags(mask)` behaves as if it called `f(in, mask)`, where the function *f* is defined as:

```
void f(ios_base& str, ios_base::fmtflags mask) {
    // set specified flags
    str.setf(mask);
}
```

The expression `out << setiosflags(mask)` shall have type `basic_ostream<charT, traits>&` and value *out*. The expression `in >> setiosflags(mask)` shall have type `basic_istream<charT, traits>&` and value *in*.

unspecified setbase(int base);

- 4 *Returns:* An object of unspecified type such that if *out* is an object of type `basic_ostream<charT, traits>` then the expression `out << setbase(base)` behaves as if it called `f(out, base)`, or if *in* is an object of type `basic_istream<charT, traits>` then the expression `in >> setbase(base)` behaves as if it called `f(in, base)`, where the function *f* is defined as:

```
void f(ios_base& str, int base) {
    // set basefield
    str.setf(base == 8 ? ios_base::oct :
            base == 10 ? ios_base::dec :
            base == 16 ? ios_base::hex :
            ios_base::fmtflags(0), ios_base::basefield);
}
```

The expression `out << setbase(base)` shall have type `basic_ostream<charT, traits>&` and value *out*. The expression `in >> setbase(base)` shall have type `basic_istream<charT, traits>&` and value *in*.

unspecified setfill(char_type c);

- 5 *Returns:* An object of unspecified type such that if *out* is an object of type `basic_ostream<charT, traits>` and *c* has type `charT` then the expression `out << setfill(c)` behaves as if it called `f(out, c)`, where the function *f* is defined as:

```
template<class charT, class traits>
void f(basic_ios<charT, traits>& str, charT c) {
    // set fill character
    str.fill(c);
}
```

The expression `out << setfill(c)` shall have type `basic_ostream<charT, traits>&` and value *out*.

unspecified setprecision(int n);

- 6 *Returns:* An object of unspecified type such that if *out* is an object of type `basic_ostream<charT, traits>` then the expression `out << setprecision(n)` behaves as if it called `f(out, n)`, or if *in* is an object of type `basic_istream<charT, traits>` then the expression `in >> setprecision(n)` behaves as if it called `f(in, n)`, where the function *f* is defined as:

```
void f(ios_base& str, int n) {
    // set precision
    str.precision(n);
}
```

The expression `out << setprecision(n)` shall have type `basic_ostream<charT, traits>&` and value *out*. The expression `in >> setprecision(n)` shall have type `basic_istream<charT, traits>&` and value *in*.

unspecified setw(int n);

- 7 *Returns:* An object of unspecified type such that if *out* is an instance of `basic_ostream<charT, traits>` then the expression `out << setw(n)` behaves as if it called `f(out, n)`, or if *in* is an object

of type `basic_istream<charT, traits>` then the expression `in >> setw(n)` behaves as if it called `f(in, n)`, where the function `f` is defined as:

```
void f(ios_base& str, int n) {
    // set width
    str.width(n);
}
```

The expression `out << setw(n)` shall have type `basic_ostream<charT, traits>&` and value `out`. The expression `in >> setw(n)` shall have type `basic_istream<charT, traits>&` and value `in`.

31.7.7 Extended manipulators [ext.manip]

- ¹ The header `<iomanip>` defines several functions that support extractors and inserters that allow for the parsing and formatting of sequences and values for money and time.

```
template<class moneyT> unspecified get_money(moneyT& mon, bool intl = false);
```

- ² *Requires:* The type `moneyT` shall be either long double or a specialization of the `basic_string` template (Clause 25).

- ³ *Effects:* The expression `in >> get_money(mon, intl)` described below behaves as a formatted input function (31.7.4.2.1).

- ⁴ *Returns:* An object of unspecified type such that if `in` is an object of type `basic_istream<charT, traits>` then the expression `in >> get_money(mon, intl)` behaves as if it called `f(in, mon, intl)`, where the function `f` is defined as:

```
template<class charT, class traits, class moneyT>
void f(basic_ios<charT, traits>& str, moneyT& mon, bool intl) {
    using Iter      = istreambuf_iterator<charT, traits>;
    using MoneyGet  = money_get<charT, Iter>;

    ios_base::iostate err = ios_base::goodbit;
    const MoneyGet& mg = use_facet<MoneyGet>(str.getloc());

    mg.get(Iter(str.rdbuf()), Iter(), intl, str, err, mon);

    if (ios_base::goodbit != err)
        str.setstate(err);
}
```

The expression `in >> get_money(mon, intl)` shall have type `basic_istream<charT, traits>&` and value `in`.

```
template<class moneyT> unspecified put_money(const moneyT& mon, bool intl = false);
```

- ⁵ *Requires:* The type `moneyT` shall be either long double or a specialization of the `basic_string` template (Clause 25).

- ⁶ *Returns:* An object of unspecified type such that if `out` is an object of type `basic_ostream<charT, traits>` then the expression `out << put_money(mon, intl)` behaves as a formatted output function (31.7.5.2.1) that calls `f(out, mon, intl)`, where the function `f` is defined as:

```
template<class charT, class traits, class moneyT>
void f(basic_ios<charT, traits>& str, const moneyT& mon, bool intl) {
    using Iter      = ostreambuf_iterator<charT, traits>;
    using MoneyPut  = money_put<charT, Iter>;

    const MoneyPut& mp = use_facet<MoneyPut>(str.getloc());
    const Iter end = mp.put(Iter(str.rdbuf()), intl, str, str.fill(), mon);

    if (end.failed())
        str.setstate(ios::badbit);
}
```

The expression `out << put_money(mon, intl)` shall have type `basic_ostream<charT, traits>&` and value `out`.

```
template<class charT> unspecified get_time(struct tm* tmb, const charT* fmt);
```

7 *Requires:* The argument `tmb` shall be a valid pointer to an object of type `struct tm`. The argument `fmt` shall be a valid pointer to an array of objects of type `charT` with `char_traits<charT>::length(fmt)` elements.

8 *Returns:* An object of unspecified type such that if `in` is an object of type `basic_istream<charT, traits>` then the expression `in >> get_time(tmb, fmt)` behaves as if it called `f(in, tmb, fmt)`, where the function `f` is defined as:

```
template<class charT, class traits>
void f(basic_ios<charT, traits>& str, struct tm* tmb, const charT* fmt) {
    using Iter    = istreambuf_iterator<charT, traits>;
    using TimeGet = time_get<charT, Iter>;

    ios_base::iostate err = ios_base::goodbit;
    const TimeGet& tg = use_facet<TimeGet>(str.getloc());

    tg.get(Iter(str.rdbuf()), Iter(), str, err, tmb,
          fmt, fmt + traits::length(fmt));

    if (err != ios_base::goodbit)
        str.setstate(err);
}
```

The expression `in >> get_time(tmb, fmt)` shall have type `basic_istream<charT, traits>&` and value `in`.

```
template<class charT> unspecified put_time(const struct tm* tmb, const charT* fmt);
```

9 *Requires:* The argument `tmb` shall be a valid pointer to an object of type `struct tm`, and the argument `fmt` shall be a valid pointer to an array of objects of type `charT` with `char_traits<charT>::length(fmt)` elements.

10 *Returns:* An object of unspecified type such that if `out` is an object of type `basic_ostream<charT, traits>` then the expression `out << put_time(tmb, fmt)` behaves as if it called `f(out, tmb, fmt)`, where the function `f` is defined as:

```
template<class charT, class traits>
void f(basic_ios<charT, traits>& str, const struct tm* tmb, const charT* fmt) {
    using Iter    = ostreambuf_iterator<charT, traits>;
    using TimePut = time_put<charT, Iter>;

    const TimePut& tp = use_facet<TimePut>(str.getloc());
    const Iter end = tp.put(Iter(str.rdbuf()), str, str.fill(), tmb,
                           fmt, fmt + traits::length(fmt));

    if (end.failed())
        str.setstate(ios_base::badbit);
}
```

The expression `out << put_time(tmb, fmt)` shall have type `basic_ostream<charT, traits>&` and value `out`.

31.7.8 Quoted manipulators

[quoted.manip]

1 [Note: Quoted manipulators provide string insertion and extraction of quoted strings (for example, XML and CSV formats). Quoted manipulators are useful in ensuring that the content of a string with embedded spaces remains unchanged if inserted and then extracted via stream I/O. — end note]

```
template<class charT>
unspecified quoted(const charT* s, charT delim = charT('\"'), charT escape = charT('\\'));
template<class charT, class traits, class Allocator>
unspecified quoted(const basic_string<charT, traits, Allocator>& s,
                  charT delim = charT('\"'), charT escape = charT('\\'));
```



```
template<class charT, class traits>
    unspecified quoted(basic_string_view<charT, traits> s,
                      charT delim = charT('"'), charT escape = charT('\\'));
```

2 *Returns:* An object of unspecified type such that if `out` is an instance of `basic_ostream` with member type `char_type` the same as `charT` and with member type `traits_type`, which in the second and third forms is the same as `traits`, then the expression `out << quoted(s, delim, escape)` behaves as a formatted output function (31.7.5.2.1) of `out`. This forms a character sequence `seq`, initially consisting of the following elements:

- (2.1) — `delim`.
- (2.2) — Each character in `s`. If the character to be output is equal to `escape` or `delim`, as determined by `traits_type::eq`, first output `escape`.
- (2.3) — `delim`.

Let `x` be the number of elements initially in `seq`. Then padding is determined for `seq` as described in 31.7.5.2.1, `seq` is inserted as if by calling `out.rdbuf()->sputn(seq, n)`, where `n` is the larger of `out.width()` and `x`, and `out.width(0)` is called. The expression `out << quoted(s, delim, escape)` shall have type `basic_ostream<charT, traits>&` and value `out`.

```
template<class charT, class traits, class Allocator>
    unspecified quoted(basic_string<charT, traits, Allocator>& s,
                      charT delim = charT('"'), charT escape = charT('\\'));
```

3 *Returns:* An object of unspecified type such that:

- (3.1) — If `in` is an instance of `basic_istream` with member types `char_type` and `traits_type` the same as `charT` and `traits`, respectively, then the expression `in >> quoted(s, delim, escape)` behaves as if it extracts the following characters from `in` using `operator>>(basic_istream<charT, traits>&, charT&)` (31.7.4.2.3) which may throw `ios_base::failure` (31.5.3.1.1):
 - (3.1.1) — If the first character extracted is equal to `delim`, as determined by `traits_type::eq`, then:
 - (3.1.1.1) — Turn off the `skipws` flag.
 - (3.1.1.2) — `s.clear()`
 - (3.1.1.3) — Until an unescaped `delim` character is reached or `!in`, extract characters from `in` and append them to `s`, except that if an `escape` is reached, ignore it and append the next character to `s`.
 - (3.1.1.4) — Discard the final `delim` character.
 - (3.1.1.5) — Restore the `skipws` flag to its original value.
 - (3.1.2) — Otherwise, `in >> s`.
- (3.2) — If `out` is an instance of `basic_ostream` with member types `char_type` and `traits_type` the same as `charT` and `traits`, respectively, then the expression `out << quoted(s, delim, escape)` behaves as specified for the `const basic_string<charT, traits, Allocator>&` overload of the `quoted` function.

The expression `in >> quoted(s, delim, escape)` shall have type `basic_istream<charT, traits>&` and value `in`. The expression `out << quoted(s, delim, escape)` shall have type `basic_ostream<charT, traits>&` and value `out`.

31.8 String-based streams

[string.streams]

31.8.1 Header `<sstream>` synopsis

[sstream.syn]

```
namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_stringbuf;

    using stringbuf = basic_stringbuf<char>;
    using wstringbuf = basic_stringbuf<wchar_t>;
```

```

template<class charT, class traits = char_traits<charT>,
        class Allocator = allocator<charT>>
    class basic_istream;

using istream = basic_istream<char>;
using wistream = basic_istream<wchar_t>;

template<class charT, class traits = char_traits<charT>,
        class Allocator = allocator<charT>>
    class basic_ostream;
using ostream = basic_ostream<char>;
using wostream = basic_ostream<wchar_t>;

template<class charT, class traits = char_traits<charT>,
        class Allocator = allocator<charT>>
    class basic_stringstream;
using stringstream = basic_stringstream<char>;
using wstringstream = basic_stringstream<wchar_t>;
}

```

- ¹ The header `<sstream>` defines four class templates and eight types that associate stream buffers with objects of class `basic_string`, as described in [25.3](#).

31.8.2 Class template `basic_stringbuf`

[stringbuf]

```

namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
    class basic_stringbuf : public basic_streambuf<charT, traits> {
    public:
        using char_type      = charT;
        using int_type       = typename traits::int_type;
        using pos_type       = typename traits::pos_type;
        using off_type       = typename traits::off_type;
        using traits_type    = traits;
        using allocator_type = Allocator;

        // 31.8.2.1, constructors
        basic_stringbuf() : basic_stringbuf(ios_base::in | ios_base::out) {}
        explicit basic_stringbuf(ios_base::openmode which);
        explicit basic_stringbuf(
            const basic_string<charT, traits, Allocator>& str,
            ios_base::openmode which = ios_base::in | ios_base::out);
        basic_stringbuf(const basic_stringbuf& rhs) = delete;
        basic_stringbuf(basic_stringbuf&& rhs);

        // 31.8.2.2, assign and swap
        basic_stringbuf& operator=(const basic_stringbuf& rhs) = delete;
        basic_stringbuf& operator=(basic_stringbuf&& rhs);
        void swap(basic_stringbuf& rhs);

        // 31.8.2.3, get and set
        basic_string<charT, traits, Allocator> str() const;
        void str(const basic_string<charT, traits, Allocator>& s);

    protected:
        // 31.8.2.4, overridden virtual functions
        int_type underflow() override;
        int_type pbackfail(int_type c = traits::eof()) override;
        int_type overflow(int_type c = traits::eof()) override;
        basic_streambuf<charT, traits>* setbuf(charT*, streamsize) override;

        pos_type seekoff(off_type off, ios_base::seekdir way,
            ios_base::openmode which
            = ios_base::in | ios_base::out) override;
    };
}

```

```

    pos_type seekpos(pos_type sp,
                    ios_base::openmode which
                    = ios_base::in | ios_base::out) override;

private:
    ios_base::openmode mode; // exposition only
};

template<class charT, class traits, class Allocator>
    void swap(basic_stringbuf<charT, traits, Allocator>& x,
             basic_stringbuf<charT, traits, Allocator>& y);
}

```

- 1 The class `basic_stringbuf` is derived from `basic_streambuf` to associate possibly the input sequence and possibly the output sequence with a sequence of arbitrary *characters*. The sequence can be initialized from, or made available as, an object of class `basic_string`.
- 2 For the sake of exposition, the maintained data is presented here as:
- (2.1) — `ios_base::openmode mode`, has `in` set if the input sequence can be read, and `out` set if the output sequence can be written.

31.8.2.1 `basic_stringbuf` constructors

[stringbuf.cons]

```
explicit basic_stringbuf(ios_base::openmode which);
```

- 1 *Effects:* Constructs an object of class `basic_stringbuf`, initializing the base class with `basic_streambuf()` (31.6.3.1), and initializing `mode` with `which`.

- 2 *Ensures:* `str() == ""`.

```
explicit basic_stringbuf(
    const basic_string<charT, traits, Allocator>& s,
    ios_base::openmode which = ios_base::in | ios_base::out);
```

- 3 *Effects:* Constructs an object of class `basic_stringbuf`, initializing the base class with `basic_streambuf()` (31.6.3.1), and initializing `mode` with `which`. Then calls `str(s)`.

```
basic_stringbuf(basic_stringbuf&& rhs);
```

- 4 *Effects:* Move constructs from the rvalue `rhs`. It is implementation-defined whether the sequence pointers in `*this` (`eback()`, `gptr()`, `egptr()`, `pbase()`, `pptr()`, `epptr()`) obtain the values which `rhs` had. Whether they do or not, `*this` and `rhs` reference separate buffers (if any at all) after the construction. The `openmode`, `locale` and any other state of `rhs` is also copied.

- 5 *Ensures:* Let `rhs_p` refer to the state of `rhs` just prior to this construction and let `rhs_a` refer to the state of `rhs` just after this construction.

- (5.1) — `str() == rhs_p.str()`
- (5.2) — `gptr() - eback() == rhs_p.gptr() - rhs_p.eback()`
- (5.3) — `egptr() - eback() == rhs_p.egptr() - rhs_p.eback()`
- (5.4) — `pptr() - pbase() == rhs_p.pptr() - rhs_p.pbase()`
- (5.5) — `epptr() - pbase() == rhs_p.epptr() - rhs_p.pbase()`
- (5.6) — `if (eback()) eback() != rhs_a.eback()`
- (5.7) — `if (gptr()) gptr() != rhs_a.gptr()`
- (5.8) — `if (egptr()) egptr() != rhs_a.egptr()`
- (5.9) — `if (pbase()) pbase() != rhs_a.pbase()`
- (5.10) — `if (pptr()) pptr() != rhs_a.pptr()`
- (5.11) — `if (epptr()) epptr() != rhs_a.epptr()`

31.8.2.2 Assign and swap

[stringbuf.assign]

```
basic_stringbuf& operator=(basic_stringbuf&& rhs);
```

1 *Effects:* After the move assignment `*this` has the observable state it would have had if it had been move constructed from `rhs` (see 31.8.2.1).

2 *Returns:* `*this`.

```
void swap(basic_stringbuf& rhs);
```

3 *Effects:* Exchanges the state of `*this` and `rhs`.

```
template<class charT, class traits, class Allocator>
void swap(basic_stringbuf<charT, traits, Allocator>& x,
         basic_stringbuf<charT, traits, Allocator>& y);
```

4 *Effects:* As if by `x.swap(y)`.

31.8.2.3 Member functions

[stringbuf.members]

```
basic_string<charT, traits, Allocator> str() const;
```

1 *Returns:* A `basic_string` object whose content is equal to the `basic_stringbuf` underlying character sequence. If the `basic_stringbuf` was created only in input mode, the resultant `basic_string` contains the character sequence in the range `[eback(), egptr())`. If the `basic_stringbuf` was created with `which & ios_base::out` being nonzero then the resultant `basic_string` contains the character sequence in the range `[pbase(), high_mark)`, where `high_mark` represents the position one past the highest initialized character in the buffer. Characters can be initialized by writing to the stream, by constructing the `basic_stringbuf` with a `basic_string`, or by calling the `str(basic_string)` member function. In the case of calling the `str(basic_string)` member function, all characters initialized prior to the call are now considered uninitialized (except for those characters re-initialized by the new `basic_string`). Otherwise the `basic_stringbuf` has been created in neither input nor output mode and a zero length `basic_string` is returned.

```
void str(const basic_string<charT, traits, Allocator>& s);
```

2 *Effects:* Copies the content of `s` into the `basic_stringbuf` underlying character sequence and initializes the input and output sequences according to mode.

3 *Ensures:* If mode & `ios_base::out` is nonzero, `pbase()` points to the first underlying character and `eptr() >= pbase() + s.size()` holds; in addition, if mode & `ios_base::ate` is nonzero, `pptr() == pbase() + s.size()` holds, otherwise `pptr() == pbase()` is true. If mode & `ios_base::in` is nonzero, `eback()` points to the first underlying character, and both `gptr() == eback()` and `egptr() == eback() + s.size()` hold.

31.8.2.4 Overridden virtual functions

[stringbuf.virtuals]

```
int_type underflow() override;
```

1 *Returns:* If the input sequence has a read position available, returns `traits::to_int_type(*gptr())`. Otherwise, returns `traits::eof()`. Any character in the underlying buffer which has been initialized is considered to be part of the input sequence.

```
int_type pbackfail(int_type c = traits::eof()) override;
```

2 *Effects:* Puts back the character designated by `c` to the input sequence, if possible, in one of three ways:

(2.1) — If `traits::eq_int_type(c, traits::eof())` returns false and if the input sequence has a putback position available, and if `traits::eq(to_char_type(c), gptr()[-1])` returns true, assigns `gptr() - 1` to `gptr()`.

Returns: `c`.

(2.2) — If `traits::eq_int_type(c, traits::eof())` returns false and if the input sequence has a putback position available, and if mode & `ios_base::out` is nonzero, assigns `c` to `*--gptr()`.

Returns: `c`.

(2.3) — If `traits::eq_int_type(c, traits::eof())` returns true and if the input sequence has a putback position available, assigns `gptr() - 1` to `gptr()`.

Returns: `traits::not_eof(c)`.

3 *Returns:* As specified above, or `traits::eof()` to indicate failure.

4 *Remarks:* If the function can succeed in more than one of these ways, it is unspecified which way is chosen.

```
int_type overflow(int_type c = traits::eof()) override;
```

5 *Effects:* Appends the character designated by `c` to the output sequence, if possible, in one of two ways:

(5.1) — If `traits::eq_int_type(c, traits::eof())` returns `false` and if either the output sequence has a write position available or the function makes a write position available (as described below), the function calls `sputc(c)`.

Signals success by returning `c`.

(5.2) — If `traits::eq_int_type(c, traits::eof())` returns `true`, there is no character to append.

Signals success by returning a value other than `traits::eof()`.

6 *Remarks:* The function can alter the number of write positions available as a result of any call.

7 *Returns:* As specified above, or `traits::eof()` to indicate failure.

8 The function can make a write position available only if `(mode & ios_base::out) != 0`. To make a write position available, the function reallocates (or initially allocates) an array object with a sufficient number of elements to hold the current array object (if any), plus at least one additional write position. If `(mode & ios_base::in) != 0`, the function alters the read end pointer `egptr()` to point just past the new write position.

```
pos_type seekoff(off_type off, ios_base::seekdir way,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
```

9 *Effects:* Alters the stream position within one of the controlled sequences, if possible, as indicated in Table 112.

Table 112 — `seekoff` positioning

Conditions	Result
<code>(which & ios_base::in) == ios_*</code> <code>base::in</code>	positions the input sequence
<code>(which & ios_base::out) == ios_*</code> <code>base::out</code>	positions the output sequence
<code>(which & (ios_base::in ios_base::out)) == (ios_base::in ios_base::out)</code> and <code>way ==</code> either <code>ios_base::beg</code> or <code>ios_base::end</code>	positions both the input and the output sequences
Otherwise	the positioning operation fails.

10 For a sequence to be positioned, the function determines `newoff` as indicated in Table 113. If the sequence's next pointer (either `gptr()` or `pptr()`) is a null pointer and `newoff` is nonzero, the positioning operation fails.

11 If `(newoff + off) < 0`, or if `newoff + off` refers to an uninitialized character (31.8.2.3), the positioning operation fails. Otherwise, the function assigns `xbeg + newoff + off` to the next pointer `xnext`.

12 *Returns:* `pos_type(newoff)`, constructed from the resultant offset `newoff` (of type `off_type`), that stores the resultant stream position, if possible. If the positioning operation fails, or if the constructed object cannot represent the resultant stream position, the return value is `pos_type(off_type(-1))`.

Table 113 — newoff values

Condition	newoff Value
way == ios_base::beg	0
way == ios_base::cur	the next pointer minus the beginning pointer (xnext - xbeg).
way == ios_base::end	the high mark pointer minus the beginning pointer (high_mark - xbeg).

```
pos_type seekpos(pos_type sp,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
```

13 *Effects:* Equivalent to seekoff(off_type(sp), ios_base::beg, which).

14 *Returns:* sp to indicate success, or pos_type(off_type(-1)) to indicate failure.

```
basic_streambuf<charT, traits>* setbuf(charT* s, streamsize n);
```

15 *Effects:* implementation-defined, except that setbuf(0, 0) has no effect.

16 *Returns:* this.

31.8.3 Class template basic_istringstream

[istringstream]

```
namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
    class basic_istringstream : public basic_istream<charT, traits> {
    public:
        using char_type      = charT;
        using int_type       = typename traits::int_type;
        using pos_type       = typename traits::pos_type;
        using off_type       = typename traits::off_type;
        using traits_type    = traits;
        using allocator_type = Allocator;

        // 31.8.3.1, constructors
        basic_istringstream() : basic_istringstream(ios_base::in) {}
        explicit basic_istringstream(ios_base::openmode which);
        explicit basic_istringstream(
            const basic_string<charT, traits, Allocator>& str,
            ios_base::openmode which = ios_base::in);
        basic_istringstream(const basic_istringstream& rhs) = delete;
        basic_istringstream(basic_istringstream&& rhs);

        // 31.8.3.2, assign and swap
        basic_istringstream& operator=(const basic_istringstream& rhs) = delete;
        basic_istringstream& operator=(basic_istringstream&& rhs);
        void swap(basic_istringstream& rhs);

        // 31.8.3.3, members
        basic_stringbuf<charT, traits, Allocator>* rdbuf() const;

        basic_string<charT, traits, Allocator> str() const;
        void str(const basic_string<charT, traits, Allocator>& s);
    private:
        basic_stringbuf<charT, traits, Allocator> sb; // exposition only
    };

    template<class charT, class traits, class Allocator>
        void swap(basic_istringstream<charT, traits, Allocator>& x,
                 basic_istringstream<charT, traits, Allocator>& y);
}
```

- ¹ The class `basic_istream<charT, traits, Allocator>` supports reading objects of class `basic_string<charT, traits, Allocator>`. It uses a `basic_stringbuf<charT, traits, Allocator>` object to control the associated storage. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the `stringbuf` object.

31.8.3.1 `basic_istream` constructors [istream.cons]

```
explicit basic_istream(ios_base::openmode which);
```

- ¹ *Effects:* Constructs an object of class `basic_istream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(which | ios_base::in)` (31.8.2.1).

```
explicit basic_istream(
    const basic_string<charT, traits, Allocator>& str,
    ios_base::openmode which = ios_base::in);
```

- ² *Effects:* Constructs an object of class `basic_istream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(str, which | ios_base::in)` (31.8.2.1).

```
basic_istream(basic_istream&& rhs);
```

- ³ *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_stringbuf`. Next `basic_istream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_stringbuf`.

31.8.3.2 Assign and swap [istream.assign]

```
basic_istream& operator=(basic_istream&& rhs);
```

- ¹ *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

² *Returns:* `*this`.

```
void swap(basic_istream& rhs);
```

- ³ *Effects:* Exchanges the state of `*this` and `rhs` by calling `basic_istream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits, class Allocator>
    void swap(basic_istream<charT, traits, Allocator>& x,
              basic_istream<charT, traits, Allocator>& y);
```

- ⁴ *Effects:* As if by `x.swap(y)`.

31.8.3.3 Member functions [istream.members]

```
basic_stringbuf<charT, traits, Allocator>* rdbuf() const;
```

- ¹ *Returns:* `const_cast<basic_stringbuf<charT, traits, Allocator>*>(&sb)`.

```
basic_string<charT, traits, Allocator> str() const;
```

- ² *Returns:* `rdbuf()->str()`.

```
void str(const basic_string<charT, traits, Allocator>& s);
```

- ³ *Effects:* Calls `rdbuf()->str(s)`.

31.8.4 Class template `basic_ostringstream` [ostream]

```
namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
        class basic_ostringstream : public basic_ostream<charT, traits> {
        public:
            using char_type      = charT;
            using int_type       = typename traits::int_type;
            using pos_type       = typename traits::pos_type;
```

```

using off_type      = typename traits::off_type;
using traits_type   = traits;
using allocator_type = Allocator;

// 31.8.4.1, constructors
basic_ostringstream() : basic_ostringstream(ios_base::out) {}
explicit basic_ostringstream(ios_base::openmode which);
explicit basic_ostringstream(
    const basic_string<charT, traits, Allocator>& str,
    ios_base::openmode which = ios_base::out);
basic_ostringstream(const basic_ostringstream& rhs) = delete;
basic_ostringstream(basic_ostringstream&& rhs);

// 31.8.4.2, assign and swap
basic_ostringstream& operator=(const basic_ostringstream& rhs) = delete;
basic_ostringstream& operator=(basic_ostringstream&& rhs);
void swap(basic_ostringstream& rhs);

// 31.8.4.3, members
basic_stringbuf<charT, traits, Allocator>* rdbuf() const;

basic_string<charT, traits, Allocator> str() const;
void str(const basic_string<charT, traits, Allocator>& s);
private:
    basic_stringbuf<charT, traits, Allocator> sb; // exposition only
};

template<class charT, class traits, class Allocator>
    void swap(basic_ostringstream<charT, traits, Allocator>& x,
              basic_ostringstream<charT, traits, Allocator>& y);
}

```

¹ The class `basic_ostringstream<charT, traits, Allocator>` supports writing objects of class `basic_string<charT, traits, Allocator>`. It uses a `basic_stringbuf` object to control the associated storage. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the `stringbuf` object.

31.8.4.1 `basic_ostringstream` constructors [`ostringstream.cons`]

```
explicit basic_ostringstream(ios_base::openmode which);
```

¹ *Effects:* Constructs an object of class `basic_ostringstream<charT, traits>`, initializing the base class with `basic_ostream<charT, traits>(&sb)` (31.7.5.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(which | ios_base::out)` (31.8.2.1).

```
explicit basic_ostringstream(
    const basic_string<charT, traits, Allocator>& str,
    ios_base::openmode which = ios_base::out);
```

² *Effects:* Constructs an object of class `basic_ostringstream<charT, traits>`, initializing the base class with `basic_ostream<charT, traits>(&sb)` (31.7.5.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(str, which | ios_base::out)` (31.8.2.1).

```
basic_ostringstream(basic_ostringstream&& rhs);
```

³ *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_stringbuf`. Next `basic_ostream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_stringbuf`.

31.8.4.2 Assign and swap [`ostringstream.assign`]

```
basic_ostringstream& operator=(basic_ostringstream&& rhs);
```

¹ *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

² *Returns:* `*this`.


```
void swap(basic_ostringstream& rhs);
```

- 3 *Effects:* Exchanges the state of **this* and *rhs* by calling `basic_ostream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits, class Allocator>
void swap(basic_ostringstream<charT, traits, Allocator>& x,
         basic_ostringstream<charT, traits, Allocator>& y);
```

- 4 *Effects:* As if by `x.swap(y)`.

31.8.4.3 Member functions [ostringstream.members]

```
basic_stringbuf<charT, traits, Allocator>* rdbuf() const;
```

- 1 *Returns:* `const_cast<basic_stringbuf<charT, traits, Allocator>*>(&sb)`.

```
basic_string<charT, traits, Allocator> str() const;
```

- 2 *Returns:* `rdbuf()->str()`.

```
void str(const basic_string<charT, traits, Allocator>& s);
```

- 3 *Effects:* Calls `rdbuf()->str(s)`.

31.8.5 Class template `basic_stringstream` [stringstream]

```
namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
    class basic_stringstream : public basic_istream<charT, traits> {
    public:
        using char_type      = charT;
        using int_type       = typename traits::int_type;
        using pos_type       = typename traits::pos_type;
        using off_type       = typename traits::off_type;
        using traits_type    = traits;
        using allocator_type = Allocator;

        // 31.8.5.1, constructors
        basic_stringstream() : basic_stringstream(ios_base::out | ios_base::in) {}
        explicit basic_stringstream(ios_base::openmode which);
        explicit basic_stringstream(
            const basic_string<charT, traits, Allocator>& str,
            ios_base::openmode which = ios_base::out | ios_base::in);
        basic_stringstream(const basic_stringstream& rhs) = delete;
        basic_stringstream(basic_stringstream&& rhs);

        // 31.8.5.2, assign and swap
        basic_stringstream& operator=(const basic_stringstream& rhs) = delete;
        basic_stringstream& operator=(basic_stringstream&& rhs);
        void swap(basic_stringstream& rhs);

        // 31.8.5.3, members
        basic_stringbuf<charT, traits, Allocator>* rdbuf() const;
        basic_string<charT, traits, Allocator> str() const;
        void str(const basic_string<charT, traits, Allocator>& str);

    private:
        basic_stringbuf<charT, traits> sb; // exposition only
    };

    template<class charT, class traits, class Allocator>
    void swap(basic_stringstream<charT, traits, Allocator>& x,
            basic_stringstream<charT, traits, Allocator>& y);
}
```

- ¹ The class template `basic_stringstream<charT, traits>` supports reading and writing from objects of class `basic_string<charT, traits, Allocator>`. It uses a `basic_stringbuf<charT, traits, Allocator>` object to control the associated sequence. For the sake of exposition, the maintained data is presented here as

(1.1) — `sb`, the `stringbuf` object.

31.8.5.1 `basic_stringstream` constructors [stringstream.cons]

```
explicit basic_stringstream(ios_base::openmode which);
```

- ¹ *Effects:* Constructs an object of class `basic_stringstream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.6.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(which)`.

```
explicit basic_stringstream(
    const basic_string<charT, traits, Allocator>& str,
    ios_base::openmode which = ios_base::out | ios_base::in);
```

- ² *Effects:* Constructs an object of class `basic_stringstream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.6.1) and initializing `sb` with `basic_stringbuf<charT, traits, Allocator>(str, which)`.

```
basic_stringstream(basic_stringstream&& rhs);
```

- ³ *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_stringbuf`. Next `basic_istream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_stringbuf`.

31.8.5.2 Assign and swap [stringstream.assign]

```
basic_stringstream& operator=(basic_stringstream&& rhs);
```

- ¹ *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

² *Returns:* `*this`.

```
void swap(basic_stringstream& rhs);
```

- ³ *Effects:* Exchanges the state of `*this` and `rhs` by calling `basic_istream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits, class Allocator>
    void swap(basic_stringstream<charT, traits, Allocator>& x,
              basic_stringstream<charT, traits, Allocator>& y);
```

- ⁴ *Effects:* As if by `x.swap(y)`.

31.8.5.3 Member functions [stringstream.members]

```
basic_stringbuf<charT, traits, Allocator>* rdbuf() const;
```

- ¹ *Returns:* `const_cast<basic_stringbuf<charT, traits, Allocator>*>(&sb)`

```
basic_string<charT, traits, Allocator> str() const;
```

- ² *Returns:* `rdbuf()->str()`.

```
void str(const basic_string<charT, traits, Allocator>& str);
```

- ³ *Effects:* Calls `rdbuf()->str(str)`.

31.9 File-based streams [file.streams]

31.9.1 Header `<fstream>` synopsis [fstream.syn]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
        class basic_filebuf;
    using filebuf = basic_filebuf<char>;
    using wfilebuf = basic_filebuf<wchar_t>;
```

```

template<class charT, class traits = char_traits<charT>>
    class basic_ifstream;
using ifstream = basic_ifstream<char>;
using wifstream = basic_ifstream<wchar_t>;

template<class charT, class traits = char_traits<charT>>
    class basic_ofstream;
using ofstream = basic_ofstream<char>;
using wofstream = basic_ofstream<wchar_t>;

template<class charT, class traits = char_traits<charT>>
    class basic_fstream;
using fstream = basic_fstream<char>;
using wfstream = basic_fstream<wchar_t>;
}

```

- ¹ The header `<fstream>` defines four class templates and eight types that associate stream buffers with files and assist reading and writing files.
- ² [*Note:* The class template `basic_filebuf` treats a file as a source or sink of bytes. In an environment that uses a large character set, the file typically holds multibyte character sequences and the `basic_filebuf` object converts those multibyte sequences into wide character sequences. — *end note*]
- ³ In this subclause, member functions taking arguments of `const filesystem::path::value_type*` are only be provided on systems where `filesystem::path::value_type` (31.11.7) is not `char`. [*Note:* These functions enable class `path` support for systems with a wide native path character type, such as `wchar_t`. — *end note*]

31.9.2 Class template `basic_filebuf`

[`filebuf`]

```

namespace std {
    template<class charT, class traits = char_traits<charT>>
        class basic_filebuf : public basic_streambuf<charT, traits> {
        public:
            using char_type = charT;
            using int_type = typename traits::int_type;
            using pos_type = typename traits::pos_type;
            using off_type = typename traits::off_type;
            using traits_type = traits;

            // 31.9.2.1, constructors/destructor
            basic_filebuf();
            basic_filebuf(const basic_filebuf& rhs) = delete;
            basic_filebuf(basic_filebuf&& rhs);
            virtual ~basic_filebuf();

            // 31.9.2.2, assign and swap
            basic_filebuf& operator=(const basic_filebuf& rhs) = delete;
            basic_filebuf& operator=(basic_filebuf&& rhs);
            void swap(basic_filebuf& rhs);

            // 31.9.2.3, members
            bool is_open() const;
            basic_filebuf* open(const char* s, ios_base::openmode mode);
            basic_filebuf* open(const filesystem::path::value_type* s,
                               ios_base::openmode mode); // wide systems only; see 31.9.1
            basic_filebuf* open(const string& s,
                               ios_base::openmode mode);
            basic_filebuf* open(const filesystem::path& s,
                               ios_base::openmode mode);
            basic_filebuf* close();

        protected:
            // 31.9.2.4, overridden virtual functions
            streamsize showmanyc() override;
            int_type underflow() override;
            int_type uflow() override;

```

```

int_type pbackfail(int_type c = traits::eof()) override;
int_type overflow (int_type c = traits::eof()) override;

basic_streambuf<charT, traits>* setbuf(char_type* s,
                                     streamsizetype n) override;
pos_type seekoff(off_type off, ios_base::seekdir way,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
pos_type seekpos(pos_type sp,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
int      sync() override;
void     imbue(const locale& loc) override;
};

template<class charT, class traits>
void swap(basic_filebuf<charT, traits>& x,
         basic_filebuf<charT, traits>& y);
}

```

- 1 The class `basic_filebuf<charT, traits>` associates both the input sequence and the output sequence with a file.
- 2 The restrictions on reading and writing a sequence controlled by an object of class `basic_filebuf<charT, traits>` are the same as for reading and writing with the C standard library `FILES`.
- 3 In particular:
 - (3.1) — If the file is not open for reading the input sequence cannot be read.
 - (3.2) — If the file is not open for writing the output sequence cannot be written.
 - (3.3) — A joint file position is maintained for both the input sequence and the output sequence.
- 4 An instance of `basic_filebuf` behaves as described in 31.9.2 provided `traits::pos_type` is `fpos<traits::state_type>`. Otherwise the behavior is undefined.
- 5 In order to support file I/O and multibyte/wide character conversion, conversions are performed using members of a facet, referred to as `a_codecvt` in following subclauses, obtained as if by

```

const codecvt<charT, char, typename traits::state_type>& a_codecvt =
    use_facet<codecvt<charT, char, typename traits::state_type>>(getloc());

```

31.9.2.1 `basic_filebuf` constructors

[filebuf.cons]

```

basic_filebuf();

```

- 1 *Effects:* Constructs an object of class `basic_filebuf<charT, traits>`, initializing the base class with `basic_streambuf<charT, traits>()` (31.6.3.1).

- 2 *Ensures:* `is_open() == false`.

```

basic_filebuf(basic_filebuf&& rhs);

```

- 3 *Effects:* Move constructs from the rvalue `rhs`. It is implementation-defined whether the sequence pointers in `*this` (`eback()`, `gptr()`, `egptr()`, `pbase()`, `pptr()`, `epptr()`) obtain the values which `rhs` had. Whether they do or not, `*this` and `rhs` reference separate buffers (if any at all) after the construction. Additionally `*this` references the file which `rhs` did before the construction, and `rhs` references no file after the construction. The openmode, locale and any other state of `rhs` is also copied.

- 4 *Ensures:* Let `rhs_p` refer to the state of `rhs` just prior to this construction and let `rhs_a` refer to the state of `rhs` just after this construction.

- (4.1) — `is_open() == rhs_p.is_open()`
- (4.2) — `rhs_a.is_open() == false`
- (4.3) — `gptr() - eback() == rhs_p.gptr() - rhs_p.eback()`
- (4.4) — `egptr() - eback() == rhs_p.egptr() - rhs_p.eback()`
- (4.5) — `pptr() - pbase() == rhs_p.pptr() - rhs_p.pbase()`

- (4.6) — `epptr() - pbase() == rhs_p.epptr() - rhs_p.pbase()`
 (4.7) — `if (eback()) eback() != rhs_a.eback()`
 (4.8) — `if (gptra()) gptra() != rhs_a.gptra()`
 (4.9) — `if (egptra()) egptra() != rhs_a.egptra()`
 (4.10) — `if (pbase()) pbase() != rhs_a.pbase()`
 (4.11) — `if (pptra()) pptra() != rhs_a.pptra()`
 (4.12) — `if (epptr()) epptr() != rhs_a.epptr()`

```
virtual ~basic_filebuf();
```

- 5 *Effects:* Destroys an object of class `basic_filebuf<charT, traits>`. Calls `close()`. If an exception occurs during the destruction of the object, including the call to `close()`, the exception is caught but not rethrown (see 20.5.5.12).

31.9.2.2 Assign and swap

[filebuf.assign]

```
basic_filebuf& operator=(basic_filebuf&& rhs);
```

- 1 *Effects:* Calls `close()` then move assigns from `rhs`. After the move assignment `*this` has the observable state it would have had if it had been move constructed from `rhs` (see 31.9.2.1).

- 2 *Returns:* `*this`.

```
void swap(basic_filebuf& rhs);
```

- 3 *Effects:* Exchanges the state of `*this` and `rhs`.

```
template<class charT, class traits>
void swap(basic_filebuf<charT, traits>& x,
         basic_filebuf<charT, traits>& y);
```

- 4 *Effects:* As if by `x.swap(y)`.

31.9.2.3 Member functions

[filebuf.members]

```
bool is_open() const;
```

- 1 *Returns:* true if a previous call to `open` succeeded (returned a non-null value) and there has been no intervening call to `close`.

```
basic_filebuf* open(const char* s, ios_base::openmode mode);
basic_filebuf* open(const filesystem::path::value_type* s,
                   ios_base::openmode mode); // wide systems only; see 31.9.1
```

- 2 *Effects:* If `is_open() != false`, returns a null pointer. Otherwise, initializes the `filebuf` as required. It then opens a file, if possible, whose name is the NTBS `s` (as if by calling `fopen(s, modstr)`). The NTBS `modstr` is determined from `mode & ~ios_base::ate` as indicated in Table 114. If `mode` is not some combination of flags shown in the table then the open fails.

- 3 If the open operation succeeds and `(mode & ios_base::ate) != 0`, positions the file to the end (as if by calling `fseek(file, 0, SEEK_END)`).³²⁹

- 4 If the repositioning operation fails, calls `close()` and returns a null pointer to indicate failure.

- 5 *Returns:* `this` if successful, a null pointer otherwise.

```
basic_filebuf* open(const string& s, ios_base::openmode mode);
basic_filebuf* open(const filesystem::path& s, ios_base::openmode mode);
```

- 6 *Returns:* `open(s.c_str(), mode)`;

```
basic_filebuf* close();
```

- 7 *Effects:* If `is_open() == false`, returns a null pointer. If a put area exists, calls `overflow(traits::eof())` to flush characters. If the last virtual member function called on `*this` (between `underflow`, `overflow`, `seekoff`, and `seekpos`) was `overflow` then calls `a_codecvt.unshift` (possibly several

³²⁹ The macro `SEEK_END` is defined, and the function signatures `fopen(const char*, const char*)` and `fseek(FILE*, long, int)` are declared, in `<stdio>` (31.12.1).

Table 114 — File open modes

ios_base flag combination				stdio equivalent
binary	in	out	trunc	app
		+		"w"
		+		+
				+
		+	+	"w"
	+			"r"
	+	+		"r+"
	+	+	+	"w+"
	+	+		+
	+			+
+		+		"wb"
+		+		+
+				+
+		+	+	"wb"
+	+			"rb"
+	+	+		"r+b"
+	+	+	+	"w+b"
+	+	+		+
+	+			+

times) to determine a termination sequence, inserts those characters and calls `overflow(traits::eof())` again. Finally, regardless of whether any of the preceding calls fails or throws an exception, the function closes the file (as if by calling `fclose(file)`). If any of the calls made by the function, including `fclose`, fails, `close` fails by returning a null pointer. If one of these calls throws an exception, the exception is caught and rethrown after closing the file.

8 *Returns:* this on success, a null pointer otherwise.

9 *Ensures:* `is_open() == false`.

31.9.2.4 Overridden virtual functions

[filebuf.virtuals]

`streamsize showmanyc()` override;

1 *Effects:* Behaves the same as `basic_streambuf::showmanyc()` (31.6.3.4).

2 *Remarks:* An implementation might well provide an overriding definition for this function signature if it can determine that more characters can be read from the input sequence.

`int_type underflow()` override;

3 *Effects:* Behaves according to the description of `basic_streambuf<charT, traits>::underflow()`, with the specialization that a sequence of characters is read from the input sequence as if by reading from the associated file into an internal buffer (`extern_buf`) and then as if by doing:

```
char  extern_buf[XSIZE];
char* extern_end;
charT intern_buf[ISIZE];
charT* intern_end;
codecvt_base::result r =
    a_codecvt.in(state, extern_buf, extern_buf+XSIZE, extern_end,
                intern_buf, intern_buf+ISIZE, intern_end);
```

This shall be done in such a way that the class can recover the position (`fpos_t`) corresponding to each character between `intern_buf` and `intern_end`. If the value of `r` indicates that `a_codecvt.in()` ran out of space in `intern_buf`, retry with a larger `intern_buf`.

```
int_type uflow() override;
```

- 4 *Effects:* Behaves according to the description of `basic_streambuf<charT, traits>::uflow()`, with the specialization that a sequence of characters is read from the input with the same method as used by `underflow`.

```
int_type pbackfail(int_type c = traits::eof()) override;
```

- 5 *Effects:* Puts back the character designated by `c` to the input sequence, if possible, in one of three ways:
- (5.1) — If `traits::eq_int_type(c, traits::eof())` returns `false` and if the function makes a putback position available and if `traits::eq(to_char_type(c), gptr()[-1])` returns `true`, decrements the next pointer for the input sequence, `gptr()`.
Returns: `c`.
- (5.2) — If `traits::eq_int_type(c, traits::eof())` returns `false` and if the function makes a putback position available and if the function is permitted to assign to the putback position, decrements the next pointer for the input sequence, and stores `c` there.
Returns: `c`.
- (5.3) — If `traits::eq_int_type(c, traits::eof())` returns `true`, and if either the input sequence has a putback position available or the function makes a putback position available, decrements the next pointer for the input sequence, `gptr()`.
Returns: `traits::not_eof(c)`.

6 *Returns:* As specified above, or `traits::eof()` to indicate failure.

7 *Remarks:* If `is_open() == false`, the function always fails.

8 The function does not put back a character directly to the input sequence.

9 If the function can succeed in more than one of these ways, it is unspecified which way is chosen. The function can alter the number of putback positions available as a result of any call.

```
int_type overflow(int_type c = traits::eof()) override;
```

- 10 *Effects:* Behaves according to the description of `basic_streambuf<charT, traits>::overflow(c)`, except that the behavior of “consuming characters” is performed by first converting as if by:

```
charT* b = pbase();
charT* p = pptr();
charT* end;
char xbuf[XSIZE];
char* xbuf_end;
codecvt_base::result r =
    a_codecvt.out(state, b, p, end, xbuf, xbuf+XSIZE, xbuf_end);
```

and then

- (10.1) — If `r == codecvt_base::error` then fail.
- (10.2) — If `r == codecvt_base::noconv` then output characters from `b` up to (and not including) `p`.
- (10.3) — If `r == codecvt_base::partial` then output to the file characters from `xbuf` up to `xbuf_end`, and repeat using characters from `end` to `p`. If output fails, fail (without repeating).
- (10.4) — Otherwise output from `xbuf` to `xbuf_end`, and fail if output fails. At this point if `b != p` and `b == end` (`xbuf` isn’t large enough) then increase `XSIZE` and repeat from the beginning.
- 11 *Returns:* `traits::not_eof(c)` to indicate success, and `traits::eof()` to indicate failure. If `is_open() == false`, the function always fails.

```
basic_streambuf* setbuf(char_type* s, streamsize n) override;
```

- 12 *Effects:* If `setbuf(0, 0)` is called on a stream before any I/O has occurred on that stream, the stream becomes unbuffered. Otherwise the results are implementation-defined. “Unbuffered” means that `pbase()` and `pptr()` always return null and output to the file should appear as soon as possible.

```
pos_type seekoff(off_type off, ios_base::seekdir way,
                ios_base::openmode which
```

```
= ios_base::in | ios_base::out) override;
```

13 *Effects:* Let `width` denote `a_codecvt.encoding()`. If `is_open() == false`, or `off != 0` && `width <= 0`, then the positioning operation fails. Otherwise, if `way != basic_ios::cur` or `off != 0`, and if the last operation was output, then update the output sequence and write any unshift sequence. Next, seek to the new position: if `width > 0`, call `fseek(file, width * off, whence)`, otherwise call `fseek(file, 0, whence)`.

14 *Remarks:* “The last operation was output” means either the last virtual operation was overflow or the put buffer is non-empty. “Write any unshift sequence” means, if `width` is less than zero then call `a_codecvt.unshift(state, xbuf, xbuf+XSIZE, xbuf_end)` and output the resulting unshift sequence. The function determines one of three values for the argument `whence`, of type `int`, as indicated in Table 115.

Table 115 — seekoff effects

way	Value	stdio Equivalent
<code>basic_ios::beg</code>		SEEK_SET
<code>basic_ios::cur</code>		SEEK_CUR
<code>basic_ios::end</code>		SEEK_END

15 *Returns:* A newly constructed `pos_type` object that stores the resultant stream position, if possible. If the positioning operation fails, or if the object cannot represent the resultant stream position, returns `pos_type(off_type(-1))`.

```
pos_type seekpos(pos_type sp,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
```

16 Alters the file position, if possible, to correspond to the position stored in `sp` (as described below). Altering the file position performs as follows:

1. if `(om & ios_base::out) != 0`, then update the output sequence and write any unshift sequence;
2. set the file position to `sp` as if by a call to `fsetpos`;
3. if `(om & ios_base::in) != 0`, then update the input sequence;

where `om` is the open mode passed to the last call to `open()`. The operation fails if `is_open()` returns `false`.

17 If `sp` is an invalid stream position, or if the function positions neither sequence, the positioning operation fails. If `sp` has not been obtained by a previous successful call to one of the positioning functions (`seekoff` or `seekpos`) on the same file the effects are undefined.

18 *Returns:* `sp` on success. Otherwise returns `pos_type(off_type(-1))`.

```
int sync() override;
```

19 *Effects:* If a put area exists, calls `filebuf::overflow` to write the characters to the file, then flushes the file as if by calling `fflush(file)`. If a get area exists, the effect is implementation-defined.

```
void imbue(const locale& loc) override;
```

20 *Requires:* If the file is not positioned at its beginning and the encoding of the current locale as determined by `a_codecvt.encoding()` is state-dependent (26.4.1.4.2) then that facet is the same as the corresponding facet of `loc`.

21 *Effects:* Causes characters inserted or extracted after this call to be converted according to `loc` until another call of `imbue`.

22 *Remarks:* This may require reversion of previously converted characters. This in turn may require the implementation to be able to reconstruct the original contents of the file.

31.9.3 Class template `basic_ifstream`

[`ifstream`]

```
namespace std {
    template<class charT, class traits = char_traits<charT>>
    class basic_ifstream : public basic_istream<charT, traits> {
```



```

public:
    using char_type    = charT;
    using int_type     = typename traits::int_type;
    using pos_type     = typename traits::pos_type;
    using off_type     = typename traits::off_type;
    using traits_type  = traits;

    // 31.9.3.1, constructors
    basic_ifstream();
    explicit basic_ifstream(const char* s,
                           ios_base::openmode mode = ios_base::in);
    explicit basic_ifstream(const filesystem::path::value_type* s,
                           ios_base::openmode mode = ios_base::in); // wide systems only; see 31.9.1
    explicit basic_ifstream(const string& s,
                           ios_base::openmode mode = ios_base::in);
    explicit basic_ifstream(const filesystem::path& s,
                           ios_base::openmode mode = ios_base::in);
    basic_ifstream(const basic_ifstream& rhs) = delete;
    basic_ifstream(basic_ifstream&& rhs);

    // 31.9.3.2, assign and swap
    basic_ifstream& operator=(const basic_ifstream& rhs) = delete;
    basic_ifstream& operator=(basic_ifstream&& rhs);
    void swap(basic_ifstream& rhs);

    // 31.9.3.3, members
    basic_filebuf<charT, traits>* rdbuf() const;

    bool is_open() const;
    void open(const char* s, ios_base::openmode mode = ios_base::in);
    void open(const filesystem::path::value_type* s,
              ios_base::openmode mode = ios_base::in); // wide systems only; see 31.9.1
    void open(const string& s, ios_base::openmode mode = ios_base::in);
    void open(const filesystem::path& s, ios_base::openmode mode = ios_base::in);
    void close();
private:
    basic_filebuf<charT, traits> sb; // exposition only
};

template<class charT, class traits>
    void swap(basic_ifstream<charT, traits>& x,
              basic_ifstream<charT, traits>& y);
}

```

¹ The class `basic_ifstream<charT, traits>` supports reading from named files. It uses a `basic_filebuf<charT, traits>` object to control the associated sequence. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the filebuf object.

31.9.3.1 `basic_ifstream` constructors

[`ifstream.cons`]

```
basic_ifstream();
```

¹ *Effects:* Constructs an object of class `basic_ifstream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.1.1) and initializing `sb` with `basic_filebuf<charT, traits>()` (31.9.2.1).

```
explicit basic_ifstream(const char* s,
                       ios_base::openmode mode = ios_base::in);
explicit basic_ifstream(const filesystem::path::value_type* s,
                       ios_base::openmode mode = ios_base::in); // wide systems only; see 31.9.1
```

² *Effects:* Constructs an object of class `basic_ifstream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.1.1) and initializing `sb` with `basic_filebuf<charT,`

traits>() (31.9.2.1), then calls `rdbuf()->open(s, mode | ios_base::in)`. If that function returns a null pointer, calls `setstate(failbit)`.

```
explicit basic_ifstream(const string& s,
                       ios_base::openmode mode = ios_base::in);
explicit basic_ifstream(const filesystem::path& s,
                       ios_base::openmode mode = ios_base::in);
```

3 *Effects:* The same as `basic_ifstream(s.c_str(), mode)`.

```
basic_ifstream(basic_ifstream&& rhs);
```

4 *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_filebuf`. Next `basic_istream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_filebuf`.

31.9.3.2 Assign and swap

[ifstream.assign]

```
basic_ifstream& operator=(basic_ifstream&& rhs);
```

1 *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

2 *Returns:* `*this`.

```
void swap(basic_ifstream& rhs);
```

3 *Effects:* Exchanges the state of `*this` and `rhs` by calling `basic_istream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits>
void swap(basic_ifstream<charT, traits>& x,
         basic_ifstream<charT, traits>& y);
```

4 *Effects:* As if by `x.swap(y)`.

31.9.3.3 Member functions

[ifstream.members]

```
basic_filebuf<charT, traits>* rdbuf() const;
```

1 *Returns:* `const_cast<basic_filebuf<charT, traits>*>(&sb)`.

```
bool is_open() const;
```

2 *Returns:* `rdbuf()->is_open()`.

```
void open(const char* s, ios_base::openmode mode = ios_base::in);
void open(const filesystem::path::value_type* s,
         ios_base::openmode mode = ios_base::in); // wide systems only; see 31.9.1
```

3 *Effects:* Calls `rdbuf()->open(s, mode | ios_base::in)`. If that function does not return a null pointer calls `clear()`, otherwise calls `setstate(failbit)` (which may throw `ios_base::failure`) (31.5.5.4).

```
void open(const string& s, ios_base::openmode mode = ios_base::in);
void open(const filesystem::path& s, ios_base::openmode mode = ios_base::in);
```

4 *Effects:* Calls `open(s.c_str(), mode)`.

```
void close();
```

5 *Effects:* Calls `rdbuf()->close()` and, if that function returns a null pointer, calls `setstate(failbit)` (which may throw `ios_base::failure`) (31.5.5.4).

31.9.4 Class template `basic_ofstream`

[ofstream]

```
namespace std {
template<class charT, class traits = char_traits<charT>>
class basic_ofstream : public basic_ostream<charT, traits> {
public:
    using char_type    = charT;
    using int_type     = typename traits::int_type;
```

```

using pos_type    = typename traits::pos_type;
using off_type    = typename traits::off_type;
using traits_type = traits;

// 31.9.4.1, constructors
basic_ofstream();
explicit basic_ofstream(const char* s,
                       ios_base::openmode mode = ios_base::out);
explicit basic_ofstream(const filesystem::path::value_type* s,
                       ios_base::openmode mode = ios_base::out); // wide systems only; see 31.9.1
explicit basic_ofstream(const string& s,
                       ios_base::openmode mode = ios_base::out);
explicit basic_ofstream(const filesystem::path& s,
                       ios_base::openmode mode = ios_base::out);
basic_ofstream(const basic_ofstream& rhs) = delete;
basic_ofstream(basic_ofstream&& rhs);

// 31.9.4.2, assign and swap
basic_ofstream& operator=(const basic_ofstream& rhs) = delete;
basic_ofstream& operator=(basic_ofstream&& rhs);
void swap(basic_ofstream& rhs);

// 31.9.4.3, members
basic_filebuf<charT, traits>* rdbuf() const;

bool is_open() const;
void open(const char* s, ios_base::openmode mode = ios_base::out);
void open(const filesystem::path::value_type* s,
          ios_base::openmode mode = ios_base::out); // wide systems only; see 31.9.1
void open(const string& s, ios_base::openmode mode = ios_base::out);
void open(const filesystem::path& s, ios_base::openmode mode = ios_base::out);
void close();
private:
    basic_filebuf<charT, traits> sb; // exposition only
};

template<class charT, class traits>
void swap(basic_ofstream<charT, traits>& x,
         basic_ofstream<charT, traits>& y);
}

```

¹ The class `basic_ofstream<charT, traits>` supports writing to named files. It uses a `basic_filebuf<charT, traits>` object to control the associated sequence. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the filebuf object.

31.9.4.1 basic_ofstream constructors

[ofstream.cons]

```
basic_ofstream();
```

¹ *Effects:* Constructs an object of class `basic_ofstream<charT, traits>`, initializing the base class with `basic_ostream<charT, traits>(&sb)` (31.7.5.1.1) and initializing `sb` with `basic_filebuf<charT, traits>()` (31.9.2.1).

```
explicit basic_ofstream(const char* s,
                       ios_base::openmode mode = ios_base::out);
explicit basic_ofstream(const filesystem::path::value_type* s,
                       ios_base::openmode mode = ios_base::out); // wide systems only; see 31.9.1
```

² *Effects:* Constructs an object of class `basic_ofstream<charT, traits>`, initializing the base class with `basic_ostream<charT, traits>(&sb)` (31.7.5.1.1) and initializing `sb` with `basic_filebuf<charT, traits>()` (31.9.2.1), then calls `rdbuf()->open(s, mode | ios_base::out)`. If that function returns a null pointer, calls `setstate(failbit)`.

```
explicit basic_ofstream(const string& s,
                       ios_base::openmode mode = ios_base::out);
explicit basic_ofstream(const filesystem::path& s,
                       ios_base::openmode mode = ios_base::out);
```

3 *Effects:* The same as `basic_ofstream(s.c_str(), mode)`.

```
basic_ofstream(basic_ofstream&& rhs);
```

4 *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_filebuf`. Next `basic_ofstream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_filebuf`.

31.9.4.2 Assign and swap

[ofstream.assign]

```
basic_ofstream& operator=(basic_ofstream&& rhs);
```

1 *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

2 *Returns:* `*this`.

```
void swap(basic_ofstream& rhs);
```

3 *Effects:* Exchanges the state of `*this` and `rhs` by calling `basic_ofstream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits>
void swap(basic_ofstream<charT, traits>& x,
         basic_ofstream<charT, traits>& y);
```

4 *Effects:* As if by `x.swap(y)`.

31.9.4.3 Member functions

[ofstream.members]

```
basic_filebuf<charT, traits>* rdbuf() const;
```

1 *Returns:* `const_cast<basic_filebuf<charT, traits>*>(&sb)`.

```
bool is_open() const;
```

2 *Returns:* `rdbuf()->is_open()`.

```
void open(const char* s, ios_base::openmode mode = ios_base::out);
```

```
void open(const filesystem::path::value_type* s,
         ios_base::openmode mode = ios_base::out); // wide systems only; see 31.9.1
```

3 *Effects:* Calls `rdbuf()->open(s, mode | ios_base::out)`. If that function does not return a null pointer calls `clear()`, otherwise calls `setstate(failbit)` (which may throw `ios_base::failure`) (31.5.5.4).

```
void close();
```

4 *Effects:* Calls `rdbuf()->close()` and, if that function fails (returns a null pointer), calls `setstate(failbit)` (which may throw `ios_base::failure`) (31.5.5.4).

```
void open(const string& s, ios_base::openmode mode = ios_base::out);
```

```
void open(const filesystem::path& s, ios_base::openmode mode = ios_base::out);
```

5 *Effects:* Calls `open(s.c_str(), mode)`.

31.9.5 Class template `basic_fstream`

[fstream]

```
namespace std {
  template<class charT, class traits = char_traits<charT>>
  class basic_fstream : public basic_iostream<charT, traits> {
  public:
    using char_type    = charT;
    using int_type     = typename traits::int_type;
    using pos_type     = typename traits::pos_type;
    using off_type     = typename traits::off_type;
    using traits_type  = traits;
```

```

// 31.9.5.1, constructors
basic_fstream();
explicit basic_fstream(
    const char* s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
explicit basic_fstream(
    const filesystem::path::value_type* s,
    ios_base::openmode mode = ios_base::in|ios_base::out); // wide systems only; see 31.9.1
explicit basic_fstream(
    const string& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
explicit basic_fstream(
    const filesystem::path& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
basic_fstream(const basic_fstream& rhs) = delete;
basic_fstream(basic_fstream&& rhs);

// 31.9.5.2, assign and swap
basic_fstream& operator=(const basic_fstream& rhs) = delete;
basic_fstream& operator=(basic_fstream&& rhs);
void swap(basic_fstream& rhs);

// 31.9.5.3, members
basic_filebuf<charT, traits>* rdbuf() const;
bool is_open() const;
void open(
    const char* s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
void open(
    const filesystem::path::value_type* s,
    ios_base::openmode mode = ios_base::in|ios_base::out); // wide systems only; see 31.9.1
void open(
    const string& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
void open(
    const filesystem::path& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
void close();

private:
    basic_filebuf<charT, traits> sb; // exposition only
};

template<class charT, class traits>
    void swap(basic_fstream<charT, traits>& x,
              basic_fstream<charT, traits>& y);
}

```

- ¹ The class template `basic_fstream<charT, traits>` supports reading and writing from named files. It uses a `basic_filebuf<charT, traits>` object to control the associated sequences. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the `basic_filebuf` object.

31.9.5.1 `basic_fstream` constructors

[fstream.cons]

```
basic_fstream();
```

- ¹ *Effects:* Constructs an object of class `basic_fstream<charT, traits>`, initializing the base class with `basic_iostream<charT, traits>(&sb)` (31.7.4.6.1) and initializing `sb` with `basic_filebuf<charT, traits>()`.

```
explicit basic_fstream(
    const char* s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
```

```
explicit basic_fstream(
    const filesystem::path::value_type* s,
    ios_base::openmode mode = ios_base::in | ios_base::out); // wide systems only; see 31.9.1
```

- 2 *Effects:* Constructs an object of class `basic_fstream<charT, traits>`, initializing the base class with `basic_istream<charT, traits>(&sb)` (31.7.4.6.1) and initializing `sb` with `basic_filebuf<charT, traits>()`. Then calls `rdbuf()->open(s, mode)`. If that function returns a null pointer, calls `setstate(failbit)`.

```
explicit basic_fstream(
    const string& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
explicit basic_fstream(
    const filesystem::path& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
```

- 3 *Effects:* The same as `basic_fstream(s.c_str(), mode)`.

```
basic_fstream(basic_fstream&& rhs);
```

- 4 *Effects:* Move constructs from the rvalue `rhs`. This is accomplished by move constructing the base class, and the contained `basic_filebuf`. Next `basic_istream<charT, traits>::set_rdbuf(&sb)` is called to install the contained `basic_filebuf`.

31.9.5.2 Assign and swap

[fstream.assign]

```
basic_fstream& operator=(basic_fstream&& rhs);
```

- 1 *Effects:* Move assigns the base and members of `*this` from the base and corresponding members of `rhs`.

- 2 *Returns:* `*this`.

```
void swap(basic_fstream& rhs);
```

- 3 *Effects:* Exchanges the state of `*this` and `rhs` by calling `basic_istream<charT, traits>::swap(rhs)` and `sb.swap(rhs.sb)`.

```
template<class charT, class traits>
    void swap(basic_fstream<charT, traits>& x,
              basic_fstream<charT, traits>& y);
```

- 4 *Effects:* As if by `x.swap(y)`.

31.9.5.3 Member functions

[fstream.members]

```
basic_filebuf<charT, traits>* rdbuf() const;
```

- 1 *Returns:* `const_cast<basic_filebuf<charT, traits>*>(&sb)`.

```
bool is_open() const;
```

- 2 *Returns:* `rdbuf()->is_open()`.

```
void open(
    const char* s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
void open(
    const filesystem::path::value_type* s,
    ios_base::openmode mode = ios_base::in | ios_base::out); // wide systems only; see 31.9.1
```

- 3 *Effects:* Calls `rdbuf()->open(s, mode)`. If that function does not return a null pointer calls `clear()`, otherwise calls `setstate(failbit)` (which may throw `ios_base::failure`) (31.5.5.4).

```
void open(
    const string& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
```

```

void open(
    const filesystem::path& s,
    ios_base::openmode mode = ios_base::in | ios_base::out);
4     Effects: Calls open(s.c_str(), mode).

void close();
5     Effects: Calls rdbuf()->close() and, if that function returns a null pointer, calls setstate(failbit)
    (which may throw ios_base::failure) (31.5.5.4).

```

31.10 Synchronized output streams [syncstream]

31.10.1 Header <syncstream> synopsis [syncstream.syn]

```

#include <ostream> // see 31.7.2

namespace std {
    template<class charT, class traits, class Allocator>
        class basic_syncbuf;

    using syncbuf = basic_syncbuf<char>;
    using wsyncbuf = basic_syncbuf<wchar_t>;

    template<class charT, class traits, class Allocator>
        class basic_osyncstream;

    using osyncstream = basic_osyncstream<char>;
    using wosyncstream = basic_osyncstream<wchar_t>;
}

```

¹ The header <syncstream> provides a mechanism to synchronize execution agents writing to the same stream.

31.10.2 Class template basic_syncbuf [syncstream.syncbuf]

31.10.2.1 Overview [syncstream.syncbuf.overview]

```

namespace std {
    template<class charT, class traits, class Allocator>
    class basic_syncbuf : public basic_streambuf<charT, traits> {
    public:
        using char_type      = charT;
        using int_type       = typename traits::int_type;
        using pos_type       = typename traits::pos_type;
        using off_type       = typename traits::off_type;
        using traits_type    = traits;
        using allocator_type = Allocator;

        using streambuf_type = basic_streambuf<charT, traits>;

        // 31.10.2.2, construction and destruction
        explicit basic_syncbuf(streambuf_type* obuf = nullptr)
            : basic_syncbuf(obuf, Allocator()) {}
        basic_syncbuf(streambuf_type*, const Allocator&);
        basic_syncbuf(basic_syncbuf&&);
        ~basic_syncbuf();

        // 31.10.2.3, assignment and swap
        basic_syncbuf& operator=(basic_syncbuf&&);
        void swap(basic_syncbuf&);

        // 31.10.2.4, member functions
        bool emit();
        streambuf_type* get_wrapped() const noexcept;
        allocator_type get_allocator() const noexcept;
        void set_emit_on_sync(bool) noexcept;
    };
}

```

```

protected:
    // 31.10.2.5, overridden virtual functions
    int sync() override;

private:
    streambuf_type* wrapped;    // exposition only
    bool emit_on_sync{};       // exposition only
};

// 31.10.2.6, specialized algorithms
template<class charT, class traits, class Allocator>
    void swap(basic_syncbuf<charT, traits, Allocator>&,
              basic_syncbuf<charT, traits, Allocator>&);
}

```

- 1 Class template `basic_syncbuf` stores character data written to it, known as the associated output, into internal buffers allocated using the object's allocator. The associated output is transferred to the wrapped stream buffer object `*wrapped` when `emit()` is called or when the `basic_syncbuf` object is destroyed. Such transfers are atomic with respect to transfers by other `basic_syncbuf` objects with the same wrapped stream buffer object.

31.10.2.2 Construction and destruction

[syncstream.syncbuf.cons]

```
basic_syncbuf(streambuf_type* obuf, const Allocator& allocator);
```

- 1 *Effects:* Constructs the `basic_syncbuf` object and sets `wrapped` to `obuf`.
- 2 *Remarks:* A copy of `allocator` is used to allocate memory for internal buffers holding the associated output.
- 3 *Throws:* Nothing unless an exception is thrown by the construction of a mutex or by memory allocation.
- 4 *Ensures:* `get_wrapped() == obuf` and `get_allocator() == allocator` are true.

```
basic_syncbuf(basic_syncbuf&& other);
```

- 5 *Effects:* Move constructs from `other` (Table 25).
- 6 *Ensures:* The value returned by `this->get_wrapped()` is the value returned by `other.get_wrapped()` prior to calling this constructor. Output stored in `other` prior to calling this constructor will be stored in `*this` afterwards. `other.rdbuf()->pptr() == other.rdbuf()->pptr()` and `other.get_wrapped() == nullptr` are true.
- 7 *Remarks:* This constructor disassociates `other` from its wrapped stream buffer, ensuring destruction of `other` produces no output.

```
~basic_syncbuf();
```

- 8 *Effects:* Calls `emit()`.
- 9 *Throws:* Nothing. If an exception is thrown from `emit()`, the destructor catches and ignores that exception.

31.10.2.3 Assignment and swap

[syncstream.syncbuf.assign]

```
basic_syncbuf& operator=(basic_syncbuf&& rhs) noexcept;
```

- 1 *Effects:* Calls `emit()` then move assigns from `rhs`. After the move assignment `*this` has the observable state it would have had if it had been move constructed from `rhs` (31.10.2.2).
- 2 *Returns:* `*this`.
- 3 *Ensures:*
- (3.1) — `rhs.get_wrapped() == nullptr` is true.
- (3.2) — `this->get_allocator() == rhs.get_allocator()` is true when `allocator_traits<Allocator>::propagate_on_container_move_assignment::value` is true; otherwise, the allocator is unchanged.
- 4 *Remarks:* This assignment operator disassociates `rhs` from its wrapped stream buffer, ensuring destruction of `rhs` produces no output.


```
void swap(basic_syncbuf& other) noexcept;
```

5 *Requires:* Either `allocator_traits<Allocator>::propagate_on_container_swap::value` is true or `this->get_allocator() == other.get_allocator()` is true.

6 *Effects:* Exchanges the state of `*this` and `other`.

31.10.2.4 Member functions

[syncstream.syncbuf.members]

```
bool emit();
```

1 *Effects:* Atomically transfers the associated output of `*this` to the stream buffer `*wrapped`, so that it appears in the output stream as a contiguous sequence of characters. `wrapped->pubsync()` is called if and only if a call was made to `sync()` since the most recent call to `emit()`, if any.

2 *Returns:* `true` if all of the following conditions hold; otherwise `false`:

(2.1) — `wrapped == nullptr` is `false`.

(2.2) — All of the characters in the associated output were successfully transferred.

(2.3) — The call to `wrapped->pubsync()` (if any) succeeded.

3 *Ensures:* On success, the associated output is empty.

4 *Synchronization:* All `emit()` calls transferring characters to the same stream buffer object appear to execute in a total order consistent with the “happens before” relation (6.8.2.1), where each `emit()` call synchronizes with subsequent `emit()` calls in that total order.

5 *Remarks:* May call member functions of `wrapped` while holding a lock uniquely associated with `wrapped`.

```
streambuf_type* get_wrapped() const noexcept;
```

6 *Returns:* `wrapped`.

```
allocator_type get_allocator() const noexcept;
```

7 *Returns:* A copy of the allocator that was set in the constructor or assignment operator.

```
void set_emit_on_sync(bool b) noexcept;
```

8 *Effects:* `emit_on_sync = b`.

31.10.2.5 Overridden virtual functions

[syncstream.syncbuf.virtuals]

```
int sync() override;
```

1 *Effects:* Records that the wrapped stream buffer is to be flushed. Then, if `emit_on_sync` is `true`, calls `emit()`. [Note: If `emit_on_sync` is `false`, the actual flush is delayed until a call to `emit()`. — end note]

2 *Returns:* If `emit()` was called and returned `false`, returns `-1`; otherwise `0`.

31.10.2.6 Specialized algorithms

[syncstream.syncbuf.special]

```
template<class charT, class traits, class Allocator>
void swap(basic_syncbuf<charT, traits, Allocator>& a,
         basic_syncbuf<charT, traits, Allocator>& b) noexcept;
```

1 *Effects:* Equivalent to `a.swap(b)`.

31.10.3 Class template `basic_osyncstream`

[syncstream.osyncstream]

31.10.3.1 Overview

[syncstream.osyncstream.overview]

```
namespace std {
    template<class charT, class traits, class Allocator>
    class basic_osyncstream : public basic_ostream<charT, traits> {
    public:
        using char_type = charT;
        using int_type = typename traits::int_type;
        using pos_type = typename traits::pos_type;
        using off_type = typename traits::off_type;
        using traits_type = traits;
```

```

using allocator_type = Allocator;
using streambuf_type = basic_streambuf<charT, traits>;
using syncbuf_type   = basic_syncbuf<charT, traits, Allocator>;

// 31.10.3.2, construction and destruction
basic_osyncstream(streambuf_type*, const Allocator&);
explicit basic_osyncstream(streambuf_type* obuf)
    : basic_osyncstream(obuf, Allocator()) {}
basic_osyncstream(basic_ostream<charT, traits>& os, const Allocator& allocator)
    : basic_osyncstream(os.rdbuf(), allocator) {}
explicit basic_osyncstream(basic_ostream<charT, traits>& os)
    : basic_osyncstream(os, Allocator()) {}
basic_osyncstream(basic_osyncstream&&) noexcept;
~basic_osyncstream();

// 31.10.3.3, assignment
basic_osyncstream& operator=(basic_osyncstream&&) noexcept;

// 31.10.3.4, member functions
void emit();
streambuf_type* get_wrapped() const noexcept;
syncbuf_type* rdbuf() const noexcept { return &sb ; }

private:
    syncbuf_type sb;    // exposition only
};
}

```

¹ Allocator shall satisfy the *Cpp17Allocator* requirements (Table 33).

² [Example: A named variable can be used within a block statement for streaming.

```

{
    ostream cout(cout);
    cout << "Hello, ";
    cout << "World!";
    cout << endl; // flush is noted
    cout << "and more!\n";
} // characters are transferred and cout is flushed

```

— end example]

³ [Example: A temporary object can be used for streaming within a single statement.

```

ostream(cout) << "Hello, " << "World!" << '\n';

```

In this example, cout is not flushed. — end example]

31.10.3.2 Construction and destruction

[syncstream.osyncstream.cons]

```

basic_osyncstream(streambuf_type* buf, const Allocator& allocator);

```

¹ *Effects:* Initializes sb from buf and allocator. Initializes the base class with basic_ostream(&sb).

² [Note: The member functions of the provided stream buffer might be called from emit() while a lock is held. Care should be taken to ensure that this does not result in deadlock. — end note]

³ *Ensures:* get_wrapped() == buf is true.

```

basic_osyncstream(basic_osyncstream&& other) noexcept;

```

⁴ *Effects:* Move constructs the base class and sb from the corresponding subobjects of other, and calls basic_ostream<charT, traits>::set_rdbuf(&sb).

⁵ *Ensures:* The value returned by get_wrapped() is the value returned by os.get_wrapped() prior to calling this constructor. nullptr == other.get_wrapped() is true.

```

~basic_osyncstream();

```

⁶ *Effects:* Calls emit(). If an exception is thrown from emit(), that exception is caught and ignored.

31.10.3.3 Assignment

[syncstream.osyncstream.assign]

```
basic_osyncstream& operator=(basic_osyncstream&& rhs) noexcept;
```

- 1 *Effects:* First, calls `emit()`. If an exception is thrown from `emit()`, that exception is caught and ignored. Move assigns `sb` from `rhs.sb`. [Note: This disassociates `rhs` from its wrapped stream buffer ensuring destruction of `rhs` produces no output. — end note]
- 2 *Ensures:* `nullptr == rhs.get_wrapped()` is true. `get_wrapped()` returns the value previously returned by `rhs.get_wrapped()`.

31.10.3.4 Member functions

[syncstream.osyncstream.members]

```
void emit();
```

- 1 *Effects:* Calls `sb.emit()`. If that call returns `false`, calls `setstate(ios::badbit)`.

- 2 [Example: A flush on a `basic_osyncstream` does not flush immediately:

```
{
    osyncstream bout(cout);
    bout << "Hello," << '\n'; // no flush
    bout.emit(); // characters transferred; cout not flushed
    bout << "World!" << endl; // flush noted; cout not flushed
    bout.emit(); // characters transferred; cout flushed
    bout << "Greetings." << '\n'; // no flush
} // characters transferred; cout not flushed
```

— end example]

- 3 [Example: The function `emit()` can be used to handle exceptions from operations on the underlying stream.

```
{
    osyncstream bout(cout);
    bout << "Hello, " << "World!" << '\n';
    try {
        bout.emit();
    } catch (...) {
        // handle exception
    }
}
```

— end example]

```
streambuf_type* get_wrapped() const noexcept;
```

- 4 *Returns:* `sb.get_wrapped()`.

- 5 [Example: Obtaining the wrapped stream buffer with `get_wrapped()` allows wrapping it again with an `osyncstream`. For example,

```
{
    osyncstream bout1(cout);
    bout1 << "Hello, ";
    {
        osyncstream(bout1.get_wrapped()) << "Goodbye, " << "Planet!" << '\n';
    }
    bout1 << "World!" << '\n';
}
```

produces the *uninterleaved* output

```
Goodbye, Planet!
Hello, World!
```

— end example]

31.11 File systems [filesystems]

31.11.1 General [fs.general]

- 1 This subclause describes operations on file systems and their components, such as paths, regular files, and directories.
- 2 A *file system* is a collection of files and their attributes.
- 3 A *file* is an object within a file system that holds user or system data. Files can be written to, or read from, or both. A file has certain attributes, including type. File types include regular files and directories. Other types of files, such as symbolic links, may be supported by the implementation.
- 4 A *directory* is a file within a file system that acts as a container of directory entries that contain information about other files, possibly including other directory files. The *parent directory* of a directory is the directory that both contains a directory entry for the given directory and is represented by the dot-dot filename (31.11.7.1) in the given directory. The *parent directory* of other types of files is a directory containing a directory entry for the file under discussion.
- 5 A *link* is an object that associates a filename with a file. Several links can associate names with the same file. A *hard link* is a link to an existing file. Some file systems support multiple hard links to a file. If the last hard link to a file is removed, the file itself is removed. [Note: A hard link can be thought of as a shared-ownership smart pointer to a file. — end note] A *symbolic link* is a type of file with the property that when the file is encountered during pathname resolution (31.11.7), a string stored by the file is used to modify the pathname resolution. [Note: Symbolic links are often called symlinks. A symbolic link can be thought of as a raw pointer to a file. If the file pointed to does not exist, the symbolic link is said to be a “dangling” symbolic link. — end note]

31.11.2 Conformance [fs.conformance]

- 1 Conformance is specified in terms of behavior. Ideal behavior is not always implementable, so the conformance subclauses take that into account.

31.11.2.1 POSIX conformance [fs.conform.9945]

- 1 Some behavior is specified by reference to POSIX (31.11.3). How such behavior is actually implemented is unspecified. [Note: This constitutes an “as if” rule allowing implementations to call native operating system or other APIs. — end note]
- 2 Implementations should provide such behavior as it is defined by POSIX. Implementations shall document any behavior that differs from the behavior defined by POSIX. Implementations that do not support exact POSIX behavior should provide behavior as close to POSIX behavior as is reasonable given the limitations of actual operating systems and file systems. If an implementation cannot provide any reasonable behavior, the implementation shall report an error as specified in 31.11.6. [Note: This allows users to rely on an exception being thrown or an error code being set when an implementation cannot provide any reasonable behavior. — end note]
- 3 Implementations are not required to provide behavior that is not supported by a particular file system. [Example: The FAT file system used by some memory cards, camera memory, and floppy disks does not support hard links, symlinks, and many other features of more capable file systems, so implementations are not required to support those features on the FAT file system but instead are required to report an error as described above. — end example]

31.11.2.2 Operating system dependent behavior conformance [fs.conform.os]

- 1 Behavior that is specified as being *operating system dependent* is dependent upon the behavior and characteristics of an operating system. The operating system an implementation is dependent upon is implementation-defined.
- 2 It is permissible for an implementation to be dependent upon an operating system emulator rather than the actual underlying operating system.

31.11.2.3 File system race behavior [fs.race.behavior]

- 1 A *file system race* is the condition that occurs when multiple threads, processes, or computers interleave access and modification of the same object within a file system. Behavior is undefined if calls to functions provided by this subclause introduce a file system race.

- ² If the possibility of a file system race would make it unreliable for a program to test for a precondition before calling a function described herein, *Requires:* is not specified for the function. [*Note:* As a design practice, preconditions are not specified when it is unreasonable for a program to detect them prior to calling the function. — *end note*]

31.11.3 Normative references [fs.norm.ref]

- ¹ This subclause mentions commercially available operating systems for purposes of exposition.³³⁰

31.11.4 Requirements [fs.req]

- ¹ Throughout this subclause, `char`, `wchar_t`, `char16_t`, and `char32_t` are collectively called *encoded character types*.
- ² Functions with template parameters named `EcharT` shall not participate in overload resolution unless `EcharT` is one of the encoded character types.
- ³ Template parameters named `InputIterator` shall satisfy the *Cpp17InputIterator* requirements (28.2.3) and shall have a value type that is one of the encoded character types.
- ⁴ [*Note:* Use of an encoded character type implies an associated character set and encoding. Since `signed char` and `unsigned char` have no implied character set and encoding, they are not included as permitted types. — *end note*]
- ⁵ Template parameters named `Allocator` shall satisfy the *Cpp17Allocator* requirements (Table 33).

31.11.4.1 Namespaces and headers [fs.req.namespace]

- ¹ Unless otherwise specified, references to entities described in this subclause are assumed to be qualified with `::std::filesystem::`.

31.11.5 Header `<filesystem>` synopsis [fs.filesystem.syn]

```
namespace std::filesystem {
    // 31.11.7, paths
    class path;

    // 31.11.7.7, path non-member functions
    void swap(path& lhs, path& rhs) noexcept;
    size_t hash_value(const path& p) noexcept;

    bool operator==(const path& lhs, const path& rhs) noexcept;
    bool operator!=(const path& lhs, const path& rhs) noexcept;
    bool operator<(const path& lhs, const path& rhs) noexcept;
    bool operator<=(const path& lhs, const path& rhs) noexcept;
    bool operator>(const path& lhs, const path& rhs) noexcept;
    bool operator>=(const path& lhs, const path& rhs) noexcept;

    path operator/ (const path& lhs, const path& rhs);

    // 31.11.7.7.1, path factory functions
    template<class Source>
        path u8path(const Source& source);
    template<class InputIterator>
        path u8path(InputIterator first, InputIterator last);

    // 31.11.8, filesystem errors
    class filesystem_error;

    // 31.11.11, directory entries
    class directory_entry;

    // 31.11.12, directory iterators
    class directory_iterator;
```

330) POSIX® is a registered trademark of The IEEE. Windows® is a registered trademark of Microsoft Corporation. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO or IEC of these products.

```

// 31.11.12.2, range access for directory iterators
directory_iterator begin(directory_iterator iter) noexcept;
directory_iterator end(const directory_iterator&) noexcept;

// 31.11.13, recursive directory iterators
class recursive_directory_iterator;

// 31.11.13.2, range access for recursive directory iterators
recursive_directory_iterator begin(recursive_directory_iterator iter) noexcept;
recursive_directory_iterator end(const recursive_directory_iterator&) noexcept;

// 31.11.10, file status
class file_status;

struct space_info {
    uintmax_t capacity;
    uintmax_t free;
    uintmax_t available;
};

// 31.11.9, enumerations
enum class file_type;
enum class perms;
enum class perm_options;
enum class copy_options;
enum class directory_options;

using file_time_type = chrono::time_point<chrono::file_clock>;

// 31.11.14, filesystem operations
path absolute(const path& p);
path absolute(const path& p, error_code& ec);

path canonical(const path& p);
path canonical(const path& p, error_code& ec);

void copy(const path& from, const path& to);
void copy(const path& from, const path& to, error_code& ec);
void copy(const path& from, const path& to, copy_options options);
void copy(const path& from, const path& to, copy_options options,
          error_code& ec);

bool copy_file(const path& from, const path& to);
bool copy_file(const path& from, const path& to, error_code& ec);
bool copy_file(const path& from, const path& to, copy_options option);
bool copy_file(const path& from, const path& to, copy_options option,
               error_code& ec);

void copy_symlink(const path& existing_symlink, const path& new_symlink);
void copy_symlink(const path& existing_symlink, const path& new_symlink,
                  error_code& ec) noexcept;

bool create_directories(const path& p);
bool create_directories(const path& p, error_code& ec);

bool create_directory(const path& p);
bool create_directory(const path& p, error_code& ec) noexcept;

bool create_directory(const path& p, const path& attributes);
bool create_directory(const path& p, const path& attributes,
                     error_code& ec) noexcept;

void create_directory_symlink(const path& to, const path& new_symlink);

```

```
void create_directory_symlink(const path& to, const path& new_symlink,
                             error_code& ec) noexcept;

void create_hard_link(const path& to, const path& new_hard_link);
void create_hard_link(const path& to, const path& new_hard_link,
                      error_code& ec) noexcept;

void create_symlink(const path& to, const path& new_symlink);
void create_symlink(const path& to, const path& new_symlink,
                    error_code& ec) noexcept;

path current_path();
path current_path(error_code& ec);
void current_path(const path& p);
void current_path(const path& p, error_code& ec) noexcept;

bool equivalent(const path& p1, const path& p2);
bool equivalent(const path& p1, const path& p2, error_code& ec) noexcept;

bool exists(file_status s) noexcept;
bool exists(const path& p);
bool exists(const path& p, error_code& ec) noexcept;

uintmax_t file_size(const path& p);
uintmax_t file_size(const path& p, error_code& ec) noexcept;

uintmax_t hard_link_count(const path& p);
uintmax_t hard_link_count(const path& p, error_code& ec) noexcept;

bool is_block_file(file_status s) noexcept;
bool is_block_file(const path& p);
bool is_block_file(const path& p, error_code& ec) noexcept;

bool is_character_file(file_status s) noexcept;
bool is_character_file(const path& p);
bool is_character_file(const path& p, error_code& ec) noexcept;

bool is_directory(file_status s) noexcept;
bool is_directory(const path& p);
bool is_directory(const path& p, error_code& ec) noexcept;

bool is_empty(const path& p);
bool is_empty(const path& p, error_code& ec);

bool is_fifo(file_status s) noexcept;
bool is_fifo(const path& p);
bool is_fifo(const path& p, error_code& ec) noexcept;

bool is_other(file_status s) noexcept;
bool is_other(const path& p);
bool is_other(const path& p, error_code& ec) noexcept;

bool is_regular_file(file_status s) noexcept;
bool is_regular_file(const path& p);
bool is_regular_file(const path& p, error_code& ec) noexcept;

bool is_socket(file_status s) noexcept;
bool is_socket(const path& p);
bool is_socket(const path& p, error_code& ec) noexcept;

bool is_symlink(file_status s) noexcept;
bool is_symlink(const path& p);
bool is_symlink(const path& p, error_code& ec) noexcept;
```

```

file_time_type last_write_time(const path& p);
file_time_type last_write_time(const path& p, error_code& ec) noexcept;
void last_write_time(const path& p, file_time_type new_time);
void last_write_time(const path& p, file_time_type new_time,
                    error_code& ec) noexcept;

void permissions(const path& p, perms prms, perm_options opts=perm_options::replace);
void permissions(const path& p, perms prms, error_code& ec) noexcept;
void permissions(const path& p, perms prms, perm_options opts, error_code& ec);

path proximate(const path& p, error_code& ec);
path proximate(const path& p, const path& base = current_path());
path proximate(const path& p, const path& base, error_code& ec);

path read_symlink(const path& p);
path read_symlink(const path& p, error_code& ec);

path relative(const path& p, error_code& ec);
path relative(const path& p, const path& base = current_path());
path relative(const path& p, const path& base, error_code& ec);

bool remove(const path& p);
bool remove(const path& p, error_code& ec) noexcept;

uintmax_t remove_all(const path& p);
uintmax_t remove_all(const path& p, error_code& ec);

void rename(const path& from, const path& to);
void rename(const path& from, const path& to, error_code& ec) noexcept;

void resize_file(const path& p, uintmax_t size);
void resize_file(const path& p, uintmax_t size, error_code& ec) noexcept;

space_info space(const path& p);
space_info space(const path& p, error_code& ec) noexcept;

file_status status(const path& p);
file_status status(const path& p, error_code& ec) noexcept;

bool status_known(file_status s) noexcept;

file_status symlink_status(const path& p);
file_status symlink_status(const path& p, error_code& ec) noexcept;

path temp_directory_path();
path temp_directory_path(error_code& ec);

path weakly_canonical(const path& p);
path weakly_canonical(const path& p, error_code& ec);
}

```

- ¹ *trivial-clock* is an implementation-defined type that satisfies the *Cpp17TrivialClock* requirements (24.17.3) and that is capable of representing and measuring file time values. Implementations should ensure that the resolution and range of `file_time_type` reflect the operating system dependent resolution and range of file time values.

31.11.6 Error reporting

[fs.err.report]

- ¹ Filesystem library functions often provide two overloads, one that throws an exception to report file system errors, and another that sets an `error_code`. [Note: This supports two common use cases:
- (1.1) — Uses where file system errors are truly exceptional and indicate a serious failure. Throwing an exception is an appropriate response.

- (1.2) — Uses where file system errors are routine and do not necessarily represent failure. Returning an error code is the most appropriate response. This allows application specific error handling, including simply ignoring the error.
- *end note*]
- ² Functions not having an argument of type `error_code&` handle errors as follows, unless otherwise specified:
- (2.1) — When a call by the implementation to an operating system or other underlying API results in an error that prevents the function from meeting its specifications, an exception of type `filesystem_error` shall be thrown. For functions with a single path argument, that argument shall be passed to the `filesystem_error` constructor with a single path argument. For functions with two path arguments, the first of these arguments shall be passed to the `filesystem_error` constructor as the `path1` argument, and the second shall be passed as the `path2` argument. The `filesystem_error` constructor's `error_code` argument is set as appropriate for the specific operating system dependent error.
- (2.2) — Failure to allocate storage is reported by throwing an exception as described in 20.5.5.12.
- (2.3) — Destructors throw nothing.
- ³ Functions having an argument of type `error_code&` handle errors as follows, unless otherwise specified:
- (3.1) — If a call by the implementation to an operating system or other underlying API results in an error that prevents the function from meeting its specifications, the `error_code&` argument is set as appropriate for the specific operating system dependent error. Otherwise, `clear()` is called on the `error_code&` argument.

31.11.7 Class path

[**fs.class.path**]

- ¹ An object of class `path` represents a path and contains a pathname. Such an object is concerned only with the lexical and syntactic aspects of a path. The path does not necessarily exist in external storage, and the pathname is not necessarily valid for the current operating system or for a particular file system.
- ² [*Note*: Class `path` is used to support the differences between the string types used by different operating systems to represent pathnames, and to perform conversions between encodings when necessary. — *end note*]
- ³ A *path* is a sequence of elements that identify the location of a file within a filesystem. The elements are the *root-name_{opt}*, *root-directory_{opt}*, and an optional sequence of *filenames* (31.11.7.1). The maximum number of elements in the sequence is operating system dependent (31.11.2.2).
- ⁴ An *absolute path* is a path that unambiguously identifies the location of a file without reference to an additional starting location. The elements of a path that determine if it is absolute are operating system dependent. A *relative path* is a path that is not absolute, and as such, only unambiguously identifies the location of a file when resolved relative to an implied starting location. The elements of a path that determine if it is relative are operating system dependent. [*Note*: Pathnames “.” and “..” are relative paths. — *end note*]
- ⁵ A *pathname* is a character string that represents the name of a path. Pathnames are formatted according to the generic pathname format grammar (31.11.7.1) or according to an operating system dependent *native pathname format* accepted by the host operating system.
- ⁶ *Pathname resolution* is the operating system dependent mechanism for resolving a pathname to a particular file in a file hierarchy. There may be multiple pathnames that resolve to the same file. [*Example*: POSIX specifies the mechanism in section 4.11, Pathname resolution. — *end example*]

```
namespace std::filesystem {
    class path {
    public:
        using value_type = see below;
        using string_type = basic_string<value_type>;
        static constexpr value_type preferred_separator = see below;

        // 31.11.9.1, enumeration format
        enum format;

        // 31.11.7.4.1, constructors and destructor
        path() noexcept;
```

```

path(const path& p);
path(path&& p) noexcept;
path(string_type&& source, format fmt = auto_format);
template<class Source>
    path(const Source& source, format fmt = auto_format);
template<class InputIterator>
    path(InputIterator first, InputIterator last, format fmt = auto_format);
template<class Source>
    path(const Source& source, const locale& loc, format fmt = auto_format);
template<class InputIterator>
    path(InputIterator first, InputIterator last, const locale& loc, format fmt = auto_format);
~path();

// 31.11.7.4.2, assignments
path& operator=(const path& p);
path& operator=(path&& p) noexcept;
path& operator=(string_type&& source);
path& assign(string_type&& source);
template<class Source>
    path& operator=(const Source& source);
template<class Source>
    path& assign(const Source& source);
template<class InputIterator>
    path& assign(InputIterator first, InputIterator last);

// 31.11.7.4.3, appends
path& operator/=(const path& p);
template<class Source>
    path& operator/=(const Source& source);
template<class Source>
    path& append(const Source& source);
template<class InputIterator>
    path& append(InputIterator first, InputIterator last);

// 31.11.7.4.4, concatenation
path& operator+=(const path& x);
path& operator+=(const string_type& x);
path& operator+=(basic_string_view<value_type> x);
path& operator+=(const value_type* x);
path& operator+=(value_type x);
template<class Source>
    path& operator+=(const Source& x);
template<class EcharT>
    path& operator+=(EcharT x);
template<class Source>
    path& concat(const Source& x);
template<class InputIterator>
    path& concat(InputIterator first, InputIterator last);

// 31.11.7.4.5, modifiers
void clear() noexcept;
path& make_preferred();
path& remove_filename();
path& replace_filename(const path& replacement);
path& replace_extension(const path& replacement = path());
void swap(path& rhs) noexcept;

// 31.11.7.4.6, native format observers
const string_type& native() const noexcept;
const value_type* c_str() const noexcept;
operator string_type() const;

```

```

template<class EcharT, class traits = char_traits<EcharT>,
        class Allocator = allocator<EcharT>>
    basic_string<EcharT, traits, Allocator>
        string(const Allocator& a = Allocator()) const;
std::string    string() const;
std::wstring  wstring() const;
std::string    u8string() const;
std::u16string u16string() const;
std::u32string u32string() const;

// 31.11.7.4.7, generic format observers
template<class EcharT, class traits = char_traits<EcharT>,
        class Allocator = allocator<EcharT>>
    basic_string<EcharT, traits, Allocator>
        generic_string(const Allocator& a = Allocator()) const;
std::string    generic_string() const;
std::wstring  generic_wstring() const;
std::string    generic_u8string() const;
std::u16string generic_u16string() const;
std::u32string generic_u32string() const;

// 31.11.7.4.8, compare
int compare(const path& p) const noexcept;
int compare(const string_type& s) const;
int compare(basic_string_view<value_type> s) const;
int compare(const value_type* s) const;

// 31.11.7.4.9, decomposition
path root_name() const;
path root_directory() const;
path root_path() const;
path relative_path() const;
path parent_path() const;
path filename() const;
path stem() const;
path extension() const;

// 31.11.7.4.10, query
[[nodiscard]] bool empty() const noexcept;
bool has_root_name() const;
bool has_root_directory() const;
bool has_root_path() const;
bool has_relative_path() const;
bool has_parent_path() const;
bool has_filename() const;
bool has_stem() const;
bool has_extension() const;
bool is_absolute() const;
bool is_relative() const;

// 31.11.7.4.11, generation
path lexically_normal() const;
path lexically_relative(const path& base) const;
path lexically_proximate(const path& base) const;

// 31.11.7.5, iterators
class iterator;
using const_iterator = iterator;

iterator begin() const;
iterator end() const;

```

```

// 31.11.7.6, path inserter and extractor
template<class charT, class traits>
    friend basic_ostream<charT, traits>&
        operator<<(basic_ostream<charT, traits>& os, const path& p);
template<class charT, class traits>
    friend basic_istream<charT, traits>&
        operator>>(basic_istream<charT, traits>& is, path& p);
};
}

```

- ⁷ `value_type` is a typedef for the operating system dependent encoded character type used to represent pathnames.
- ⁸ The value of the `preferred_separator` member is the operating system dependent *preferred-separator* character (31.11.7.1).
- ⁹ [Example: For POSIX-based operating systems, `value_type` is `char` and `preferred_separator` is the slash character (`'/'`). For Windows-based operating systems, `value_type` is `wchar_t` and `preferred_separator` is the backslash character (`L'\\'`). — end example]

31.11.7.1 Generic pathname format

[fs.path.generic]

pathname:

*root-name*_{opt} *root-directory*_{opt} *relative-path*

root-name:

operating system dependent sequences of characters
implementation-defined sequences of characters

root-directory:

directory-separator

relative-path:

filename
filename *directory-separator* *relative-path*
an empty path

filename:

non-empty sequence of characters other than *directory-separator* characters

directory-separator:

preferred-separator *directory-separator*_{opt}
fallback-separator *directory-separator*_{opt}

preferred-separator:

operating system dependent directory separator character

fallback-separator:

`/`, if *preferred-separator* is not `/`

- ¹ A *filename* is the name of a file. The *dot* and *dot-dot* filenames, consisting solely of one and two period characters respectively, have special meaning. The following characteristics of filenames are operating system dependent:
- (1.1) — The permitted characters. [Example: Some operating systems prohibit the ASCII control characters (0x00 – 0x1F) in filenames. — end example] [Note: For wide portability, users may wish to limit *filename* characters to the POSIX Portable Filename Character Set:
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
a b c d e f g h i j k l m n o p q r s t u v w x y z
0 1 2 3 4 5 6 7 8 9 . _ - — end note]
- (1.2) — The maximum permitted length.
- (1.3) — Filenames that are not permitted.
- (1.4) — Filenames that have special meaning.
- (1.5) — Case awareness and sensitivity during path resolution.
- (1.6) — Special rules that may apply to file types other than regular files, such as directories.

- ² Except in a *root-name*, multiple successive *directory-separator* characters are considered to be the same as one *directory-separator* character.

- 3 The dot filename is treated as a reference to the current directory. The dot-dot filename is treated as a reference to the parent directory. What the dot-dot filename refers to relative to *root-directory* is implementation-defined. Specific filenames may have special meanings for a particular operating system.
- 4 A *root-name* identifies the starting location for pathname resolution (31.11.7). If there are no operating system dependent *root-names*, at least one implementation-defined *root-name* is required. [Note: Many operating systems define a name beginning with two *directory-separator* characters as a *root-name* that identifies network or other resource locations. Some operating systems define a single letter followed by a colon as a drive specifier – a *root-name* identifying a specific device such as a disk drive. — end note]
- 5 If a *root-name* is otherwise ambiguous, the possibility with the longest sequence of characters is chosen. [Note: On a POSIX-like operating system, it is impossible to have a *root-name* and a *relative-path* without an intervening *root-directory* element. — end note]
- 6 *Normalization* of a generic format pathname means:
 1. If the path is empty, stop.
 2. Replace each slash character in the *root-name* with a *preferred-separator*.
 3. Replace each *directory-separator* with a *preferred-separator*. [Note: The generic pathname grammar (31.11.7.1) defines *directory-separator* as one or more slashes and *preferred-separators*. — end note]
 4. Remove each dot filename and any immediately following *directory-separator*.
 5. As long as any appear, remove a non-dot-dot filename immediately followed by a *directory-separator* and a dot-dot filename, along with any immediately following *directory-separator*.
 6. If there is a *root-directory*, remove all dot-dot filenames and any *directory-separators* immediately following them. [Note: These dot-dot filenames attempt to refer to nonexistent parent directories. — end note]
 7. If the last filename is dot-dot, remove any trailing *directory-separator*.
 8. If the path is empty, add a dot.

The result of normalization is a path in *normal form*, which is said to be *normalized*.

31.11.7.2 path conversions

[fs.path.cvt]

31.11.7.2.1 path argument format conversions

[fs.path.fmt.cvt]

- 1 [Note: The format conversions described in this subclause are not applied on POSIX-based operating systems because on these systems:
 - (1.1) — The generic format is acceptable as a native path.
 - (1.2) — There is no need to distinguish between native format and generic format in function arguments.
 - (1.3) — Paths for regular files and paths for directories share the same syntax.
 — end note]
- 2 Several functions are defined to accept *detected-format* arguments, which are character sequences. A detected-format argument represents a path using either a pathname in the generic format (31.11.7.1) or a pathname in the native format (31.11.7). Such an argument is taken to be in the generic format if and only if it matches the generic format and is not acceptable to the operating system as a native path.
- 3 [Note: Some operating systems may have no unambiguous way to distinguish between native format and generic format arguments. This is by design as it simplifies use for operating systems that do not require disambiguation. An implementation for an operating system where disambiguation is required is permitted to distinguish between the formats. — end note]
- 4 Pathnames are converted as needed between the generic and native formats in an operating-system-dependent manner. Let $G(n)$ and $N(g)$ in a mathematical sense be the implementation's functions that convert native-to-generic and generic-to-native formats respectively. If $g=G(n)$ for some n , then $G(N(g))=g$; if $n=N(g)$ for some g , then $N(G(n))=n$. [Note: Neither G nor N need be invertible. — end note]
- 5 If the native format requires paths for regular files to be formatted differently from paths for directories, the path shall be treated as a directory path if its last element is a *directory-separator*, otherwise it shall be treated as a path to a regular file.

- 6 [Note: A path stores a native format pathname (31.11.7.4.6) and acts as if it also stores a generic format pathname, related as given below. The implementation may generate the generic format pathname based on the native format pathname (and possibly other information) when requested. — end note]
- 7 When a path is constructed from or is assigned a single representation separate from any path, the other representation is selected by the appropriate conversion function (*G* or *N*).
- 8 When the (new) value *p* of one representation of a path is derived from the representation of that or another path, a value *q* is chosen for the other representation. The value *q* converts to *p* (by *G* or *N* as appropriate) if any such value does so; *q* is otherwise unspecified. [Note: If *q* is the result of converting any path at all, it is the result of converting *p*. — end note]

31.11.7.2.2 path type and encoding conversions

[fs.path.type.cvt]

- 1 The *native encoding* of a narrow character string is the operating system dependent current encoding for pathnames (31.11.7). The *native encoding* for wide character strings is the implementation-defined execution wide-character set encoding (5.3).
- 2 For member function arguments that take character sequences representing paths and for member functions returning strings, value type and encoding conversion is performed if the value type of the argument or return value differs from `path::value_type`. For the argument or return value, the method of conversion and the encoding to be converted to is determined by its value type:
- (2.1) — `char`: The encoding is the native narrow encoding. The method of conversion, if any, is operating system dependent. [Note: For POSIX-based operating systems `path::value_type` is `char` so no conversion from `char` value type arguments or to `char` value type return values is performed. For Windows-based operating systems, the native narrow encoding is determined by calling a Windows API function. — end note] [Note: This results in behavior identical to other C and C++ standard library functions that perform file operations using narrow character strings to identify paths. Changing this behavior would be surprising and error prone. — end note]
- (2.2) — `wchar_t`: The encoding is the native wide encoding. The method of conversion is unspecified. [Note: For Windows-based operating systems `path::value_type` is `wchar_t` so no conversion from `wchar_t` value type arguments or to `wchar_t` value type return values is performed. — end note]
- (2.3) — `char16_t`: The encoding is UTF-16. The method of conversion is unspecified.
- (2.4) — `char32_t`: The encoding is UTF-32. The method of conversion is unspecified.
- 3 If the encoding being converted to has no representation for source characters, the resulting converted characters, if any, are unspecified. Implementations should not modify member function arguments if already of type `path::value_type`.

31.11.7.3 path requirements

[fs.path.req]

- 1 In addition to the requirements (31.11.4), function template parameters named `Source` shall be one of:
- (1.1) — `basic_string<EcharT, traits, Allocator>`. A function argument `const Source& source` shall have an effective range [`source.begin()`, `source.end()`).
- (1.2) — `basic_string_view<EcharT, traits>`. A function argument `const Source& source` shall have an effective range [`source.begin()`, `source.end()`).
- (1.3) — A type meeting the *Cpp17InputIterator* requirements that iterates over a NTCTS. The value type shall be an encoded character type. A function argument `const Source& source` shall have an effective range [`source`, `end`) where `end` is the first iterator value with an element value equal to `iterator_traits<Source>::value_type()`.
- (1.4) — A character array that after array-to-pointer decay results in a pointer to the start of a NTCTS. The value type shall be an encoded character type. A function argument `const Source& source` shall have an effective range [`source`, `end`) where `end` is the first iterator value with an element value equal to `iterator_traits<decay_t<Source>>::value_type()`.
- 2 Functions taking template parameters named `Source` shall not participate in overload resolution unless either
- (2.1) — `Source` is a specialization of `basic_string` or `basic_string_view`, or
- (2.2) — the *qualified-id* `iterator_traits<decay_t<Source>>::value_type` is valid and denotes a possibly `const` encoded character type (17.9.2).

3 [Note: See path conversions (31.11.7.2) for how the value types above and their encodings convert to `path::value_type` and its encoding. — end note]

4 Arguments of type `Source` shall not be null pointers.

31.11.7.4 path members [fs.path.member]

31.11.7.4.1 path constructors [fs.path.construct]

```
path() noexcept;
```

1 *Effects:* Constructs an object of class `path`.

2 *Ensures:* `empty() == true`.

```
path(const path& p);
path(path&& p) noexcept;
```

3 *Effects:* Constructs an object of class `path` having the same pathname in the native and generic formats, respectively, as the original value of `p`. In the second form, `p` is left in a valid but unspecified state.

```
path(string_type&& source, format fmt = auto_format);
```

4 *Effects:* Constructs an object of class `path` for which the pathname in the detected-format of `source` has the original value of `source` (31.11.7.2.1), converting format if required (31.11.7.2.1). `source` is left in a valid but unspecified state.

```
template<class Source>
  path(const Source& source, format fmt = auto_format);
template<class InputIterator>
  path(InputIterator first, InputIterator last, format fmt = auto_format);
```

5 *Effects:* Let `s` be the effective range of `source` (31.11.7.3) or the range `[first, last)`, with the encoding converted if required (31.11.7.2). Finds the detected-format of `s` (31.11.7.2.1) and constructs an object of class `path` for which the pathname in that format is `s`.

```
template<class Source>
  path(const Source& source, const locale& loc, format fmt = auto_format);
template<class InputIterator>
  path(InputIterator first, InputIterator last, const locale& loc, format fmt = auto_format);
```

6 *Requires:* The value type of `Source` and `InputIterator` is `char`.

7 *Effects:* Let `s` be the effective range of `source` or the range `[first, last)`, after converting the encoding as follows:

(7.1) — If `value_type` is `wchar_t`, converts to the native wide encoding (31.11.7.2.2) using the `codecvt<wchar_t, char, mbstate_t>` facet of `loc`.

(7.2) — Otherwise a conversion is performed using the `codecvt<wchar_t, char, mbstate_t>` facet of `loc`, and then a second conversion to the current narrow encoding.

8 Finds the detected-format of `s` (31.11.7.2.1) and constructs an object of class `path` for which the pathname in that format is `s`.

[Example: A string is to be read from a database that is encoded in ISO/IEC 8859-1, and used to create a directory:

```
namespace fs = std::filesystem;
std::string latin1_string = read_latin1_data();
codecvt_8859_1<wchar_t> latin1_facet;
std::locale latin1_locale(std::locale(), latin1_facet);
fs::create_directory(fs::path(latin1_string, latin1_locale));
```

For POSIX-based operating systems, the path is constructed by first using `latin1_facet` to convert ISO/IEC 8859-1 encoded `latin1_string` to a wide character string in the native wide encoding (31.11.7.2.2). The resulting wide string is then converted to a narrow character pathname string in the current native narrow encoding. If the native wide encoding is UTF-16 or UTF-32, and the current native narrow encoding is UTF-8, all of the characters in the ISO/IEC 8859-1 character set will be converted to their Unicode representation, but for other native narrow encodings some characters may have no representation.

For Windows-based operating systems, the path is constructed by using `latin1_facet` to convert ISO/IEC 8859-1 encoded `latin1_string` to a UTF-16 encoded wide character pathname string. All of the characters in the ISO/IEC 8859-1 character set will be converted to their Unicode representation.
 — *end example*]

31.11.7.4.2 path assignments

[fs.path.assign]

```
path& operator=(const path& p);
```

1 *Effects:* If `*this` and `p` are the same object, has no effect. Otherwise, sets both respective pathnames of `*this` to the respective pathnames of `p`.

2 *Returns:* `*this`.

```
path& operator=(path&& p) noexcept;
```

3 *Effects:* If `*this` and `p` are the same object, has no effect. Otherwise, sets both respective pathnames of `*this` to the respective pathnames of `p`. `p` is left in a valid but unspecified state. [Note: A valid implementation is `swap(p)`. — *end note*]

4 *Returns:* `*this`.

```
path& operator=(string_type&& source);
path& assign(string_type&& source);
```

5 *Effects:* Sets the pathname in the detected-format of `source` to the original value of `source`. `source` is left in a valid but unspecified state.

6 *Returns:* `*this`.

```
template<class Source>
  path& operator=(const Source& source);
template<class Source>
  path& assign(const Source& source);
template<class InputIterator>
  path& assign(InputIterator first, InputIterator last);
```

7 *Effects:* Let `s` be the effective range of `source` (31.11.7.3) or the range `[first, last)`, with the encoding converted if required (31.11.7.2). Finds the detected-format of `s` (31.11.7.2.1) and sets the pathname in that format to `s`.

8 *Returns:* `*this`.

31.11.7.4.3 path appends

[fs.path.append]

1 The append operations use `operator/=` to denote their semantic effect of appending *preferred-separator* when needed.

```
path& operator/=(const path& p);
```

2 *Effects:* If `p.is_absolute() || (p.has_root_name() && p.root_name() != root_name())`, then `operator=(p)`.

3 Otherwise, modifies `*this` as if by these steps:

(3.1) — If `p.has_root_directory()`, then removes any root directory and relative path from the generic format pathname. Otherwise, if `!has_root_directory() && is_absolute()` is true or if `has_filename()` is true, then appends `path::preferred_separator` to the generic format pathname.

(3.2) — Then appends the native format pathname of `p`, omitting any *root-name* from its generic format pathname, to the native format pathname.

4 [Example: Even if `//host` is interpreted as a *root-name*, both of the paths `path("//host")/"foo"` and `path("//host/")/"foo"` equal `"//host/foo"`.

Expression examples:

```
// On POSIX,
path("foo") / ""; // yields "foo/"
path("foo") / "/bar"; // yields "/bar"
// On Windows, backslashes replace slashes in the above yields
```



```

    // On Windows,
    path("foo") / "c:/bar"; // yields "c:/bar"
    path("foo") / "c: ";   // yields "c:"
    path("c:") / " ";     // yields "c:"
    path("c:foo") / "/bar"; // yields "c:/bar"
    path("c:foo") / "c:bar"; // yields "c:foo/bar"
    — end example]

```

5 Returns: **this*.

```

template<class Source>
    path& operator/=(const Source& source);
template<class Source>
    path& append(const Source& source);

```

6 Effects: Equivalent to: `return operator/=(path(source));`

```

template<class InputIterator>
    path& append(InputIterator first, InputIterator last);

```

7 Effects: Equivalent to: `return operator/=(path(first, last));`

31.11.7.4.4 path concatenation

[fs.path.concat]

```

path& operator+=(const path& x);
path& operator+=(const string_type& x);
path& operator+=(basic_string_view<value_type> x);
path& operator+=(const value_type* x);
path& operator+=(value_type x);
template<class Source>
    path& operator+=(const Source& x);
template<class EcharT>
    path& operator+=(EcharT x);
template<class Source>
    path& concat(const Source& x);

```

1 Effects: Appends `path(x).native()` to the pathname in the native format. [Note: This directly manipulates the value of `native()` and may not be portable between operating systems. — end note]

2 Returns: **this*.

```

template<class InputIterator>
    path& concat(InputIterator first, InputIterator last);

```

3 Effects: Equivalent to: `return *this += path(first, last);`

31.11.7.4.5 path modifiers

[fs.path.modifiers]

```

void clear() noexcept;

```

1 Ensures: `empty() == true`.

```

path& make_preferred();

```

2 Effects: Each *directory-separator* of the pathname in the generic format is converted to *preferred-separator*.

3 Returns: **this*.

4 [Example:

```

    path p("foo/bar");
    std::cout << p << '\n';
    p.make_preferred();
    std::cout << p << '\n';

```

On an operating system where *preferred-separator* is a slash, the output is:

```

    "foo/bar"
    "foo/bar"

```

On an operating system where *preferred-separator* is a backslash, the output is:

```

    "foo/bar"
    "foo\bar"
— end example]

```

```
path& remove_filename();
```

5 *Ensures:* !has_filename().

6 *Effects:* Remove the generic format pathname of filename() from the generic format pathname.

7 *Returns:* *this.

8 *[Example:*

```

    path("foo/bar").remove_filename(); // yields "foo/"
    path("foo/").remove_filename();   // yields "foo/"
    path("/foo").remove_filename();   // yields "/"
    path("/").remove_filename();      // yields "/"
— end example]

```

```
path& replace_filename(const path& replacement);
```

9 *Effects:* Equivalent to:

```

    remove_filename();
    operator/=(replacement);

```

10 *Returns:* *this.

11 *[Example:*

```

    path("/foo").replace_filename("bar"); // yields "/bar" on POSIX
    path("/").replace_filename("bar");   // yields "/bar" on POSIX
— end example]

```

```
path& replace_extension(const path& replacement = path());
```

12 *Effects:*

(12.1) — Any existing extension() (31.11.7.4.9) is removed from the pathname in the generic format, then

(12.2) — If replacement is not empty and does not begin with a dot character, a dot character is appended to the pathname in the generic format, then

(12.3) — operator+=(replacement);.

13 *Returns:* *this.

```
void swap(path& rhs) noexcept;
```

14 *Effects:* Swaps the contents (in all formats) of the two paths.

15 *Complexity:* Constant time.

31.11.7.4.6 path native format observers

[fs.path.native.obs]

1 The string returned by all native format observers is in the native pathname format (31.11.7).

```
const string_type& native() const noexcept;
```

2 *Returns:* The pathname in the native format.

```
const value_type* c_str() const noexcept;
```

3 *Effects:* Equivalent to: return native().c_str();

```
operator string_type() const;
```

4 *Returns:* native().

5 *[Note:* Conversion to string_type is provided so that an object of class path can be given as an argument to existing standard library file stream constructors and open functions. — end note]

```

template<class EcharT, class traits = char_traits<EcharT>,
        class Allocator = allocator<EcharT>>
    basic_string<EcharT, traits, Allocator>
    string(const Allocator& a = Allocator()) const;

```

6 *Returns:* native().

7 *Remarks:* All memory allocation, including for the return value, shall be performed by *a*. Conversion, if any, is specified by 31.11.7.2.

```

std::string string() const;
std::wstring wstring() const;
std::string u8string() const;
std::u16string u16string() const;
std::u32string u32string() const;

```

8 *Returns:* native().

9 *Remarks:* Conversion, if any, is performed as specified by 31.11.7.2. The encoding of the string returned by `u8string()` is always UTF-8.

31.11.7.4.7 path generic format observers [fs.path.generic.obs]

1 Generic format observer functions return strings formatted according to the generic pathname format (31.11.7.1). A single slash ('/') character is used as the *directory-separator*.

2 [*Example:* On an operating system that uses backslash as its *preferred-separator*,

```
path("foo\\bar").generic_string()
```

returns "foo/bar". — *end example*]

```

template<class EcharT, class traits = char_traits<EcharT>,
        class Allocator = allocator<EcharT>>
    basic_string<EcharT, traits, Allocator>
    generic_string(const Allocator& a = Allocator()) const;

```

3 *Returns:* The pathname in the generic format.

4 *Remarks:* All memory allocation, including for the return value, shall be performed by *a*. Conversion, if any, is specified by 31.11.7.2.

```

std::string generic_string() const;
std::wstring generic_wstring() const;
std::string generic_u8string() const;
std::u16string generic_u16string() const;
std::u32string generic_u32string() const;

```

5 *Returns:* The pathname in the generic format.

6 *Remarks:* Conversion, if any, is specified by 31.11.7.2. The encoding of the string returned by `generic_u8string()` is always UTF-8.

31.11.7.4.8 path compare [fs.path.compare]

```
int compare(const path& p) const noexcept;
```

1 *Returns:*

(1.1) — A value less than 0, if `native()` for the elements of `*this` are lexicographically less than `native()` for the elements of *p*; otherwise,

(1.2) — a value greater than 0, if `native()` for the elements of `*this` are lexicographically greater than `native()` for the elements of *p*; otherwise,

(1.3) — 0.

2 *Remarks:* The elements are determined as if by iteration over the half-open range `[begin(), end())` for `*this` and *p*.

```

int compare(const string_type& s) const
int compare(basic_string_view<value_type> s) const;

```

3 *Returns:* `compare(path(s))`.

```
int compare(const value_type* s) const
```

4 *Returns:* compare(path(s)).

31.11.7.4.9 path decomposition

[fs.path.decompose]

```
path root_name() const;
```

1 *Returns:* root-name, if the pathname in the generic format includes root-name, otherwise path().

```
path root_directory() const;
```

2 *Returns:* root-directory, if the pathname in the generic format includes root-directory, otherwise path().

```
path root_path() const;
```

3 *Returns:* root_name() / root_directory().

```
path relative_path() const;
```

4 *Returns:* A path composed from the pathname in the generic format, if empty() is false, beginning with the first filename after root_path(). Otherwise, path().

```
path parent_path() const;
```

5 *Returns:* *this if has_relative_path() is false, otherwise a path whose generic format pathname is the longest prefix of the generic format pathname of *this that produces one fewer element in its iteration.

```
path filename() const;
```

6 *Returns:* relative_path().empty() ? path() : *--end().

7 [Example:

```
path("/foo/bar.txt").filename(); // yields "bar.txt"
path("/foo/bar").filename(); // yields "bar"
path("/foo/bar/").filename(); // yields ""
path("/").filename(); // yields ""
path("//host").filename(); // yields ""
path(".").filename(); // yields "."
path("..").filename(); // yields ".."
— end example]
```

```
path stem() const;
```

8 *Returns:* Let f be the generic format pathname of filename(). Returns a path whose pathname in the generic format is

(8.1) — f, if it contains no periods other than a leading period or consists solely of one or two periods;

(8.2) — otherwise, the prefix of f ending before its last period.

9 [Example:

```
std::cout << path("/foo/bar.txt").stem(); // outputs "bar"
path p = "foo.bar.baz.tar";
for (; !p.extension().empty(); p = p.stem())
    std::cout << p.extension() << '\n';
// outputs: .tar
// .baz
// .bar
— end example]
```

```
path extension() const;
```

10 *Returns:* A path whose pathname in the generic format is the suffix of filename() not included in stem().

11 [Example:

```
path("/foo/bar.txt").extension(); // yields ".txt" and stem() is "bar"
path("/foo/bar").extension(); // yields "" and stem() is "bar"
```

```

    path("/foo/.profile").extension(); // yields "" and stem() is ".profile"
    path(".bar").extension();          // yields "" and stem() is ".bar"
    path("..bar").extension();         // yields ".bar" and stem() is "."

```

— end example]

12 [Note: The period is included in the return value so that it is possible to distinguish between no extension and an empty extension. — end note]

13 [Note: On non-POSIX operating systems, for a path *p*, it may not be the case that *p.stem()* + *p.extension()* == *p.filename()*, even though the generic format pathnames are the same. — end note]

31.11.7.4.10 path query

[fs.path.query]

```
[[nodiscard]] bool empty() const noexcept;
```

1 *Returns:* true if the pathname in the generic format is empty, else false.

```
bool has_root_path() const;
```

2 *Returns:* !root_path().empty().

```
bool has_root_name() const;
```

3 *Returns:* !root_name().empty().

```
bool has_root_directory() const;
```

4 *Returns:* !root_directory().empty().

```
bool has_relative_path() const;
```

5 *Returns:* !relative_path().empty().

```
bool has_parent_path() const;
```

6 *Returns:* !parent_path().empty().

```
bool has_filename() const;
```

7 *Returns:* !filename().empty().

```
bool has_stem() const;
```

8 *Returns:* !stem().empty().

```
bool has_extension() const;
```

9 *Returns:* !extension().empty().

```
bool is_absolute() const;
```

10 *Returns:* true if the pathname in the native format contains an absolute path (31.11.7), else false.

11 [Example: path("/").is_absolute() is true for POSIX-based operating systems, and false for Windows-based operating systems. — end example]

```
bool is_relative() const;
```

12 *Returns:* !is_absolute().

31.11.7.4.11 path generation

[fs.path.gen]

```
path lexically_normal() const;
```

1 *Returns:* A path whose pathname in the generic format is the normal form (31.11.7.1) of the pathname in the generic format of *this.

2 [Example:

```

    assert(path("foo/./bar/..").lexically_normal() == "foo/");
    assert(path("foo/.////bar/..").lexically_normal() == "foo/");

```

The above assertions will succeed. On Windows, the returned path's *directory-separator* characters will be backslashes rather than slashes, but that does not affect path equality. — end example]

```
path lexically_relative(const path& base) const;
```

3 *Returns:* `*this` made relative to `base`. Does not resolve (31.11.7) symlinks. Does not first normalize (31.11.7.1) `*this` or `base`.

4 *Effects:* If `root_name() != base.root_name()` is true or `is_absolute() != base.is_absolute()` is true or `!has_root_directory() && base.has_root_directory()` is true, returns `path()`. Determines the first mismatched element of `*this` and `base` as if by:

```
    auto [a, b] = mismatch(begin(), end(), base.begin(), base.end());
```

Then,

(4.1) — if `a == end()` and `b == base.end()`, returns `path(".")`; otherwise

(4.2) — let `n` be the number of *filename* elements in `[b, base.end())` that are not dot or dot-dot minus the number that are dot-dot. If `n < 0`, returns `path()`; otherwise

(4.3) — returns an object of class `path` that is default-constructed, followed by

(4.3.1) — application of `operator/=(path("../"))` `n` times, and then

(4.3.2) — application of `operator/=` for each element in `[a, end())`.

5 *[Example:*

```
    assert(path("/a/d").lexically_relative("/a/b/c") == ".././d");
    assert(path("/a/b/c").lexically_relative("/a/d") == "../b/c");
    assert(path("a/b/c").lexically_relative("a") == "b/c");
    assert(path("a/b/c").lexically_relative("a/b/c/x/y") == "../.");
    assert(path("a/b/c").lexically_relative("a/b/c") == ".");
    assert(path("a/b").lexically_relative("c/d") == ".././a/b");
```

The above assertions will succeed. On Windows, the returned path's *directory-separator* characters will be backslashes rather than slashes, but that does not affect `path` equality. — *end example*]

6 *[Note:* If symlink following semantics are desired, use the operational function `relative()`. — *end note*]

7 *[Note:* If normalization (31.11.7.1) is needed to ensure consistent matching of elements, apply `lexically_normal()` to `*this`, `base`, or both. — *end note*]

```
path lexically_proximate(const path& base) const;
```

8 *Returns:* If the value of `lexically_relative(base)` is not an empty path, return it. Otherwise return `*this`.

9 *[Note:* If symlink following semantics are desired, use the operational function `proximate()`. — *end note*]

10 *[Note:* If normalization (31.11.7.1) is needed to ensure consistent matching of elements, apply `lexically_normal()` to `*this`, `base`, or both. — *end note*]

31.11.7.5 path iterators

[fs.path.itr]

1 Path iterators iterate over the elements of the pathname in the generic format (31.11.7.1).

2 A `path::iterator` is a constant iterator satisfying all the requirements of a bidirectional iterator (28.2.6) except that, for dereferenceable iterators `a` and `b` of type `path::iterator` with `a == b`, there is no requirement that `*a` and `*b` are bound to the same object. Its `value_type` is `path`.

3 Calling any non-const member function of a `path` object invalidates all iterators referring to elements of that object.

4 For the elements of the pathname in the generic format, the forward traversal order is as follows:

(4.1) — The *root-name* element, if present.

(4.2) — The *root-directory* element, if present. *[Note:* The generic format is required to ensure lexicographical comparison works correctly. — *end note*]

(4.3) — Each successive *filename* element, if present.

(4.4) — An empty element, if a trailing non-root *directory-separator* is present.

5 The backward traversal order is the reverse of forward traversal.

```
iterator begin() const;
```

6 *Returns:* An iterator for the first present element in the traversal list above. If no elements are present, the end iterator.

```
iterator end() const;
```

7 *Returns:* The end iterator.

31.11.7.6 path inserter and extractor

[fs.path.io]

```
template<class charT, class traits>
friend basic_ostream<charT, traits>&
operator<<(basic_ostream<charT, traits>& os, const path& p);
```

1 *Effects:* Equivalent to `os << quoted(p.string<charT, traits>())`. [*Note:* The quoted function is described in 31.7.8. — end note]

2 *Returns:* `os`.

```
template<class charT, class traits>
friend basic_istream<charT, traits>&
operator>>(basic_istream<charT, traits>& is, path& p);
```

3 *Effects:* Equivalent to:

```
basic_string<charT, traits> tmp;
is >> quoted(tmp);
p = tmp;
```

4 *Returns:* `is`.

31.11.7.7 path non-member functions

[fs.path.nonmember]

```
void swap(path& lhs, path& rhs) noexcept;
```

1 *Effects:* Equivalent to `lhs.swap(rhs)`.

```
size_t hash_value (const path& p) noexcept;
```

2 *Returns:* A hash value for the path `p`. If for two paths, `p1 == p2` then `hash_value(p1) == hash_value(p2)`.

```
bool operator==(const path& lhs, const path& rhs) noexcept;
```

3 *Returns:* `!(lhs < rhs) && !(rhs < lhs)`.

4 [*Note:* Path equality and path equivalence have different semantics.

(4.1) — Equality is determined by the path non-member `operator==`, which considers the two paths' lexical representations only. [*Example:* `path("foo") == "bar"` is never `true`. — end example]

(4.2) — Equivalence is determined by the `equivalent()` non-member function, which determines if two paths resolve (31.11.7) to the same file system entity. [*Example:* `equivalent("foo", "bar")` will be `true` when both paths resolve to the same file. — end example]

Programmers wishing to determine if two paths are “the same” must decide if “the same” means “the same representation” or “resolve to the same actual file”, and choose the appropriate function accordingly. — end note]

```
bool operator!=(const path& lhs, const path& rhs) noexcept;
```

5 *Returns:* `!(lhs == rhs)`.

```
bool operator< (const path& lhs, const path& rhs) noexcept;
```

6 *Returns:* `lhs.compare(rhs) < 0`.

```
bool operator<=(const path& lhs, const path& rhs) noexcept;
```

7 *Returns:* `!(rhs < lhs)`.

```
bool operator> (const path& lhs, const path& rhs) noexcept;
```

8 *Returns:* `rhs < lhs`.

```
bool operator>=(const path& lhs, const path& rhs) noexcept;
```

9 *Returns:* !(lhs < rhs).

```
path operator/ (const path& lhs, const path& rhs);
```

10 *Effects:* Equivalent to: return path(lhs) /= rhs;

31.11.7.7.1 path factory functions

[fs.path.factory]

```
template<class Source>
```

```
path u8path(const Source& source);
```

```
template<class InputIterator>
```

```
path u8path(InputIterator first, InputIterator last);
```

1 *Requires:* The source and [first, last) sequences are UTF-8 encoded. The value type of Source and InputIterator is char.

2 *Returns:*

(2.1) — If value_type is char and the current native narrow encoding (31.11.7.2.2) is UTF-8, return path(source) or path(first, last); otherwise,

(2.2) — if value_type is wchar_t and the native wide encoding is UTF-16, or if value_type is char16_t or char32_t, convert source or [first, last) to a temporary, tmp, of type string_type and return path(tmp); otherwise,

(2.3) — convert source or [first, last) to a temporary, tmp, of type u32string and return path(tmp).

3 *Remarks:* Argument format conversion (31.11.7.2.1) applies to the arguments for these functions. How Unicode encoding conversions are performed is unspecified.

4 *[Example:* A string is to be read from a database that is encoded in UTF-8, and used to create a directory using the native encoding for filenames:

```
namespace fs = std::filesystem;
std::string utf8_string = read_utf8_data();
fs::create_directory(fs::u8path(utf8_string));
```

For POSIX-based operating systems with the native narrow encoding set to UTF-8, no encoding or type conversion occurs.

For POSIX-based operating systems with the native narrow encoding not set to UTF-8, a conversion to UTF-32 occurs, followed by a conversion to the current native narrow encoding. Some Unicode characters may have no native character set representation.

For Windows-based operating systems a conversion from UTF-8 to UTF-16 occurs. — end example]

31.11.8 Class filesystem_error

[fs.class.filesystem_error]

```
namespace std::filesystem {
```

```
class filesystem_error : public system_error {
```

```
public:
```

```
filesystem_error(const string& what_arg, error_code ec);
```

```
filesystem_error(const string& what_arg,
```

```
const path& p1, error_code ec);
```

```
filesystem_error(const string& what_arg,
```

```
const path& p1, const path& p2, error_code ec);
```

```
const path& path1() const noexcept;
```

```
const path& path2() const noexcept;
```

```
const char* what() const noexcept override;
```

```
};
```

```
}
```

1 The class filesystem_error defines the type of objects thrown as exceptions to report file system errors from functions described in this subclause.

31.11.8.1 filesystem_error members

[fs.filesystem_error.members]

1 Constructors are provided that store zero, one, or two paths associated with an error.


```
filesystem_error(const string& what_arg, error_code ec);
```

2 *Ensures:*

- (2.1) — `code() == ec`,
- (2.2) — `path1().empty() == true`,
- (2.3) — `path2().empty() == true`, and
- (2.4) — `string_view(what()).find(what_arg) != string_view::npos`.

```
filesystem_error(const string& what_arg, const path& p1, error_code ec);
```

3 *Ensures:*

- (3.1) — `code() == ec`,
- (3.2) — `path1()` returns a reference to the stored copy of `p1`,
- (3.3) — `path2().empty() == true`, and
- (3.4) — `string_view(what()).find(what_arg) != string_view::npos`.

```
filesystem_error(const string& what_arg, const path& p1, const path& p2, error_code ec);
```

4 *Ensures:*

- (4.1) — `code() == ec`,
- (4.2) — `path1()` returns a reference to the stored copy of `p1`,
- (4.3) — `path2()` returns a reference to the stored copy of `p2`, and
- (4.4) — `string_view(what()).find(what_arg) != string_view::npos`.

```
const path& path1() const noexcept;
```

5 *Returns:* A reference to the copy of `p1` stored by the constructor, or, if none, an empty path.

```
const path& path2() const noexcept;
```

6 *Returns:* A reference to the copy of `p2` stored by the constructor, or, if none, an empty path.

```
const char* what() const noexcept override;
```

7 *Returns:* An NTBS that incorporates the `what_arg` argument supplied to the constructor. The exact format is unspecified. Implementations should include the `system_error::what()` string and the pathnames of `path1` and `path2` in the native format in the returned string.

31.11.9 Enumerations

[fs.enum]

31.11.9.1 Enum `path::format`

[fs.enum.path.format]

1 This enum specifies constants used to identify the format of the character sequence, with the meanings listed in Table 116.

Table 116 — Enum `path::format`

Name	Meaning
<code>native_format</code>	The native pathname format.
<code>generic_format</code>	The generic pathname format.
<code>auto_format</code>	The interpretation of the format of the character sequence is implementation-defined. The implementation may inspect the content of the character sequence to determine the format. [Note: For POSIX-based systems, native and generic formats are equivalent and the character sequence should always be interpreted in the same way. — end note]

31.11.9.2 Enum class `file_type`

[fs.enum.file_type]

1 This enum class specifies constants used to identify file types, with the meanings listed in Table 117. The values of the constants are distinct.

Table 117 — Enum class `file_type`

Constant	Meaning
<code>none</code>	The type of the file has not been determined or an error occurred while trying to determine the type.
<code>not_found</code>	Pseudo-type indicating the file was not found. [<i>Note: The file not being found is not considered an error while determining the type of a file. — end note</i>]
<code>regular</code>	Regular file
<code>directory</code>	Directory file
<code>symlink</code>	Symbolic link file
<code>block</code>	Block special file
<code>character</code>	Character special file
<code>fifo</code>	FIFO or pipe file
<code>socket</code>	Socket file
<i>implementation-defined</i>	Implementations that support file systems having file types in addition to the above <code>file_type</code> types shall supply implementation-defined <code>file_type</code> constants to separately identify each of those additional file types
<code>unknown</code>	The file exists but the type could not be determined

31.11.9.3 Enum class `copy_options`[`fs.enum.copy.opts`]

- ¹ The `enum class` type `copy_options` is a bitmask type (20.4.2.1.4) that specifies bitmask constants used to control the semantics of copy operations. The constants are specified in option groups with the meanings listed in Table 118. The constant `none` represents the empty bitmask, and is shown in each option group for purposes of exposition; implementations shall provide only a single definition. Every other constant in the table represents a distinct bitmask element.

Table 118 — Enum class `copy_options`

Option group controlling <code>copy_file</code> function effects for existing target files	
Constant	Meaning
<code>none</code>	(Default) Error; file already exists.
<code>skip_existing</code>	Do not overwrite existing file, do not report an error.
<code>overwrite_existing</code>	Overwrite the existing file.
<code>update_existing</code>	Overwrite the existing file if it is older than the replacement file.
Option group controlling copy function effects for sub-directories	
Constant	Meaning
<code>none</code>	(Default) Do not copy sub-directories.
<code>recursive</code>	Recursively copy sub-directories and their contents.
Option group controlling copy function effects for symbolic links	
Constant	Meaning
<code>none</code>	(Default) Follow symbolic links.
<code>copy_symlinks</code>	Copy symbolic links as symbolic links rather than copying the files that they point to.
<code>skip_symlinks</code>	Ignore symbolic links.
Option group controlling copy function effects for choosing the form of copying	
Constant	Meaning
<code>none</code>	(Default) Copy content.
<code>directories_only</code>	Copy directory structure only, do not copy non-directory files.
<code>create_symlinks</code>	Make symbolic links instead of copies of files. The source path shall be an absolute path unless the destination path is in the current directory.
<code>create_hard_links</code>	Make hard links instead of copies of files.

31.11.9.4 Enum class perms

[fs.enum.perms]

- ¹ The enum class type `perms` is a bitmask type (20.4.2.1.4) that specifies bitmask constants used to identify file permissions, with the meanings listed in Table 119.

Table 119 — Enum class perms

Name	Value (octal)	POSIX macro	Definition or notes
<code>none</code>	0		There are no permissions set for the file.
<code>owner_read</code>	0400	<code>S_IRUSR</code>	Read permission, owner
<code>owner_write</code>	0200	<code>S_IWUSR</code>	Write permission, owner
<code>owner_exec</code>	0100	<code>S_IXUSR</code>	Execute/search permission, owner
<code>owner_all</code>	0700	<code>S_IRWXU</code>	Read, write, execute/search by owner; <code>owner_read</code> <code>owner_write</code> <code>owner_exec</code>
<code>group_read</code>	040	<code>S_IRGRP</code>	Read permission, group
<code>group_write</code>	020	<code>S_IWGRP</code>	Write permission, group
<code>group_exec</code>	010	<code>S_IXGRP</code>	Execute/search permission, group
<code>group_all</code>	070	<code>S_IRWXG</code>	Read, write, execute/search by group; <code>group_read</code> <code>group_write</code> <code>group_exec</code>
<code>others_read</code>	04	<code>S_IROTH</code>	Read permission, others
<code>others_write</code>	02	<code>S_IWOTH</code>	Write permission, others
<code>others_exec</code>	01	<code>S_IXOTH</code>	Execute/search permission, others
<code>others_all</code>	07	<code>S_IRWXO</code>	Read, write, execute/search by others; <code>others_read</code> <code>others_write</code> <code>others_exec</code>
<code>all</code>	0777		<code>owner_all</code> <code>group_all</code> <code>others_all</code>
<code>set_uid</code>	04000	<code>S_ISUID</code>	Set-user-ID on execution
<code>set_gid</code>	02000	<code>S_ISGID</code>	Set-group-ID on execution
<code>sticky_bit</code>	01000	<code>S_ISVTX</code>	Operating system dependent.
<code>mask</code>	07777		<code>all</code> <code>set_uid</code> <code>set_gid</code> <code>sticky_bit</code>
<code>unknown</code>	0xFFFF		The permissions are not known, such as when a <code>file_status</code> object is created without specifying the permissions

31.11.9.5 Enum class perm_options

[fs.enum.perm.opts]

- ¹ The enum class type `perm_options` is a bitmask type (20.4.2.1.4) that specifies bitmask constants used to control the semantics of permissions operations, with the meanings listed in Table 120. The bitmask constants are bitmask elements. In Table 120 `perm` denotes a value of type `perms` passed to `permissions`.

Table 120 — Enum class perm_options

Name	Meaning
<code>replace</code>	<code>permissions</code> shall replace the file's permission bits with <code>perm</code>
<code>add</code>	<code>permissions</code> shall replace the file's permission bits with the bitwise OR of <code>perm</code> and the file's current permission bits.
<code>remove</code>	<code>permissions</code> shall replace the file's permission bits with the bitwise AND of the complement of <code>perm</code> and the file's current permission bits.
<code>nofollow</code>	<code>permissions</code> shall change the permissions of a symbolic link itself rather than the permissions of the file the link resolves to.

31.11.9.6 Enum class directory_options

[fs.enum.dir.opts]

- ¹ The enum class type `directory_options` is a bitmask type (20.4.2.1.4) that specifies bitmask constants used to identify directory traversal options, with the meanings listed in Table 121. The constant `none` represents the empty bitmask; every other constant in the table represents a distinct bitmask element.

Table 121 — Enum class `directory_options`

Name	Meaning
<code>none</code>	(Default) Skip directory symlinks, permission denied is an error.
<code>follow_directory_symlink</code>	Follow rather than skip directory symlinks.
<code>skip_permission_denied</code>	Skip directories that would otherwise result in permission denied.

31.11.10 Class `file_status`

[fs.class.file_status]

```

namespace std::filesystem {
    class file_status {
    public:
        // 31.11.10.1, constructors and destructor
        file_status() noexcept : file_status(file_type::none) {}
        explicit file_status(file_type ft,
                            perms prms = perms::unknown) noexcept;
        file_status(const file_status&) noexcept = default;
        file_status(file_status&&) noexcept = default;
        ~file_status();

        // assignments
        file_status& operator=(const file_status&) noexcept = default;
        file_status& operator=(file_status&&) noexcept = default;

        // 31.11.10.3, modifiers
        void type(file_type ft) noexcept;
        void permissions(perms prms) noexcept;

        // 31.11.10.2, observers
        file_type type() const noexcept;
        perms permissions() const noexcept;
    };
}

```

¹ An object of type `file_status` stores information about the type and permissions of a file.

31.11.10.1 `file_status` constructors

[fs.file_status.cons]

```
explicit file_status(file_type ft, perms prms = perms::unknown) noexcept;
```

¹ *Ensures:* `type() == ft` and `permissions() == prms`.

31.11.10.2 `file_status` observers

[fs.file_status.obs]

```
file_type type() const noexcept;
```

¹ *Returns:* The value of `type()` specified by the postconditions of the most recent call to a constructor, `operator=`, or `type(file_type)` function.

```
perms permissions() const noexcept;
```

² *Returns:* The value of `permissions()` specified by the postconditions of the most recent call to a constructor, `operator=`, or `permissions(perms)` function.

31.11.10.3 `file_status` modifiers

[fs.file_status.mods]

```
void type(file_type ft) noexcept;
```

¹ *Ensures:* `type() == ft`.

```
void permissions(perms prms) noexcept;
```

² *Ensures:* `permissions() == prms`.

31.11.11 Class `directory_entry`

[fs.class.directory_entry]

```

namespace std::filesystem {
    class directory_entry {
    public:
        // 31.11.11.1, constructors and destructor
        directory_entry() noexcept = default;
        directory_entry(const directory_entry&) = default;
        directory_entry(directory_entry&&) noexcept = default;
        explicit directory_entry(const filesystem::path& p);
        directory_entry(const filesystem::path& p, error_code& ec);
        ~directory_entry();

        // assignments
        directory_entry& operator=(const directory_entry&) = default;
        directory_entry& operator=(directory_entry&&) noexcept = default;

        // 31.11.11.2, modifiers
        void assign(const filesystem::path& p);
        void assign(const filesystem::path& p, error_code& ec);
        void replace_filename(const filesystem::path& p);
        void replace_filename(const filesystem::path& p, error_code& ec);
        void refresh();
        void refresh(error_code& ec) noexcept;

        // 31.11.11.3, observers
        const filesystem::path& path() const noexcept;
        operator const filesystem::path&() const noexcept;
        bool exists() const;
        bool exists(error_code& ec) const noexcept;
        bool is_block_file() const;
        bool is_block_file(error_code& ec) const noexcept;
        bool is_character_file() const;
        bool is_character_file(error_code& ec) const noexcept;
        bool is_directory() const;
        bool is_directory(error_code& ec) const noexcept;
        bool is_fifo() const;
        bool is_fifo(error_code& ec) const noexcept;
        bool is_other() const;
        bool is_other(error_code& ec) const noexcept;
        bool is_regular_file() const;
        bool is_regular_file(error_code& ec) const noexcept;
        bool is_socket() const;
        bool is_socket(error_code& ec) const noexcept;
        bool is_symlink() const;
        bool is_symlink(error_code& ec) const noexcept;
        uintmax_t file_size() const;
        uintmax_t file_size(error_code& ec) const noexcept;
        uintmax_t hard_link_count() const;
        uintmax_t hard_link_count(error_code& ec) const noexcept;
        file_time_type last_write_time() const;
        file_time_type last_write_time(error_code& ec) const noexcept;
        file_status status() const;
        file_status status(error_code& ec) const noexcept;
        file_status symlink_status() const;
        file_status symlink_status(error_code& ec) const noexcept;

        bool operator==(const directory_entry& rhs) const noexcept;
        bool operator!=(const directory_entry& rhs) const noexcept;
        bool operator< (const directory_entry& rhs) const noexcept;
        bool operator> (const directory_entry& rhs) const noexcept;
        bool operator<=(const directory_entry& rhs) const noexcept;
        bool operator>=(const directory_entry& rhs) const noexcept;
    };
}

```

```

private:
    filesystem::path pathobject;    // exposition only
    friend class directory_iterator; // exposition only
};
}

```

- 1 A `directory_entry` object stores a `path` object and may store additional objects for file attributes such as hard link count, status, symlink status, file size, and last write time.
- 2 Implementations should store such additional file attributes during directory iteration if their values are available and storing the values would allow the implementation to eliminate file system accesses by `directory_entry` observer functions (31.11.14). Such stored file attribute values are said to be *cached*.
- 3 [Note: For purposes of exposition, class `directory_iterator` (31.11.12) is shown above as a friend of class `directory_entry`. Friendship allows the `directory_iterator` implementation to cache already available attribute values directly into a `directory_entry` object without the cost of an unneeded call to `refresh()`. — end note]

- 4 [Example:

```

using namespace std::filesystem;

// use possibly cached last write time to minimize disk accesses
for (auto&& x : directory_iterator("."))
{
    std::cout << x.path() << " " << x.last_write_time() << std::endl;
}

// call refresh() to refresh a stale cache
for (auto&& x : directory_iterator("."))
{
    lengthy_function(x.path()); // cache becomes stale
    x.refresh();
    std::cout << x.path() << " " << x.last_write_time() << std::endl;
}

```

On implementations that do not cache the last write time, both loops will result in a potentially expensive call to the `std::filesystem::last_write_time` function. On implementations that do cache the last write time, the first loop will use the cached value and so will not result in a potentially expensive call to the `std::filesystem::last_write_time` function. The code is portable to any implementation, regardless of whether or not it employs caching. — end example]

31.11.11.1 `directory_entry` constructors

[fs.dir.entry.cons]

```

explicit directory_entry(const filesystem::path& p);
directory_entry(const filesystem::path& p, error_code& ec);

```

- 1 *Effects:* Constructs an object of type `directory_entry`, then `refresh()` or `refresh(ec)`, respectively.
- 2 *Ensures:* `path() == p` if no error occurs, otherwise `path() == filesystem::path()`.
- 3 *Throws:* As specified in 31.11.6.

31.11.11.2 `directory_entry` modifiers

[fs.dir.entry.mods]

```

void assign(const filesystem::path& p);
void assign(const filesystem::path& p, error_code& ec);

```

- 1 *Effects:* Equivalent to `pathobject = p`, then `refresh()` or `refresh(ec)`, respectively. If an error occurs, the values of any cached attributes are unspecified.
- 2 *Throws:* As specified in 31.11.6.

```

void replace_filename(const filesystem::path& p);
void replace_filename(const filesystem::path& p, error_code& ec);

```

- 3 *Effects:* Equivalent to `pathobject.replace_filename(p)`, then `refresh()` or `refresh(ec)`, respectively. If an error occurs, the values of any cached attributes are unspecified.
- Throws:* As specified in 31.11.6.

```
void refresh();
void refresh(error_code& ec) noexcept;
```

4 *Effects:* Stores the current values of any cached attributes of the file `p` resolves to. If an error occurs, an error is reported (31.11.6) and the values of any cached attributes are unspecified.

5 *Throws:* As specified in 31.11.6.

6 [*Note:* Implementations of `directory_iterator` (31.11.12) are prohibited from directly or indirectly calling the `refresh` function since it must access the external file system, and the objective of caching is to avoid unnecessary file system accesses. — *end note*]

31.11.11.3 `directory_entry` observers [fs.dir.entry.obs]

1 Unqualified function names in the *Returns:* elements of the `directory_entry` observers described below refer to members of the `std::filesystem` namespace.

```
const filesystem::path& path() const noexcept;
operator const filesystem::path&() const noexcept;
```

2 *Returns:* `pathobject`.

```
bool exists() const;
bool exists(error_code& ec) const noexcept;
```

3 *Returns:* `exists(this->status())` or `exists(this->status(ec))`, respectively.

4 *Throws:* As specified in 31.11.6.

```
bool is_block_file() const;
bool is_block_file(error_code& ec) const noexcept;
```

5 *Returns:* `is_block_file(this->status())` or `is_block_file(this->status(ec))`, respectively.

6 *Throws:* As specified in 31.11.6.

```
bool is_character_file() const;
bool is_character_file(error_code& ec) const noexcept;
```

7 *Returns:* `is_character_file(this->status())` or `is_character_file(this->status(ec))`, respectively.

8 *Throws:* As specified in 31.11.6.

```
bool is_directory() const;
bool is_directory(error_code& ec) const noexcept;
```

9 *Returns:* `is_directory(this->status())` or `is_directory(this->status(ec))`, respectively.

10 *Throws:* As specified in 31.11.6.

```
bool is_fifo() const;
bool is_fifo(error_code& ec) const noexcept;
```

11 *Returns:* `is_fifo(this->status())` or `is_fifo(this->status(ec))`, respectively.

12 *Throws:* As specified in 31.11.6.

```
bool is_other() const;
bool is_other(error_code& ec) const noexcept;
```

13 *Returns:* `is_other(this->status())` or `is_other(this->status(ec))`, respectively.

14 *Throws:* As specified in 31.11.6.

```
bool is_regular_file() const;
bool is_regular_file(error_code& ec) const noexcept;
```

15 *Returns:* `is_regular_file(this->status())` or `is_regular_file(this->status(ec))`, respectively.

16 *Throws:* As specified in 31.11.6.

```
bool is_socket() const;
```

```

bool is_socket(error_code& ec) const noexcept;
17     Returns: is_socket(this->status()) or is_socket(this->status(ec)), respectively.
18     Throws: As specified in 31.11.6.

bool is_symlink() const;
bool is_symlink(error_code& ec) const noexcept;
19     Returns: is_symlink(this->symlink_status()) or is_symlink(this->symlink_status(ec)), re-
    spectively.
20     Throws: As specified in 31.11.6.

uintmax_t file_size() const;
uintmax_t file_size(error_code& ec) const noexcept;
21     Returns: If cached, the file size attribute value. Otherwise, file_size(path()) or file_size(path(),
    ec), respectively.
22     Throws: As specified in 31.11.6.

uintmax_t hard_link_count() const;
uintmax_t hard_link_count(error_code& ec) const noexcept;
23     Returns: If cached, the hard link count attribute value. Otherwise, hard_link_count(path()) or
    hard_link_count(path(), ec), respectively.
24     Throws: As specified in 31.11.6.

file_time_type last_write_time() const;
file_time_type last_write_time(error_code& ec) const noexcept;
25     Returns: If cached, the last write time attribute value. Otherwise, last_write_time(path()) or
    last_write_time(path(), ec), respectively.
26     Throws: As specified in 31.11.6.

file_status status() const;
file_status status(error_code& ec) const noexcept;
27     Returns: If cached, the status attribute value. Otherwise, status(path()) or status(path(), ec),
    respectively.
28     Throws: As specified in 31.11.6.

file_status symlink_status() const;
file_status symlink_status(error_code& ec) const noexcept;
29     Returns: If cached, the symlink status attribute value. Otherwise, symlink_status(path()) or
    symlink_status(path(), ec), respectively.
30     Throws: As specified in 31.11.6.

bool operator==(const directory_entry& rhs) const noexcept;
31     Returns: pathobject == rhs.pathobject.

bool operator!=(const directory_entry& rhs) const noexcept;
32     Returns: pathobject != rhs.pathobject.

bool operator<(const directory_entry& rhs) const noexcept;
33     Returns: pathobject < rhs.pathobject.

bool operator>(const directory_entry& rhs) const noexcept;
34     Returns: pathobject > rhs.pathobject.

bool operator<=(const directory_entry& rhs) const noexcept;
35     Returns: pathobject <= rhs.pathobject.

```



```
bool operator>=(const directory_entry& rhs) const noexcept;
```

36 *Returns:* pathobject >= rhs.pathobject.

31.11.12 Class `directory_iterator`

[`fs.class.directory_iterator`]

- ¹ An object of type `directory_iterator` provides an iterator for a sequence of `directory_entry` elements representing the path and any cached attribute values (31.11.11) for each file in a directory or in an implementation-defined directory-like file type. [*Note:* For iteration into sub-directories, see class `recursive_directory_iterator` (31.11.13). — *end note*]

```
namespace std::filesystem {
    class directory_iterator {
    public:
        using iterator_category = input_iterator_tag;
        using value_type        = directory_entry;
        using difference_type    = ptrdiff_t;
        using pointer            = const directory_entry*;
        using reference          = const directory_entry&;

        // 31.11.12.1, member functions
        directory_iterator() noexcept;
        explicit directory_iterator(const path& p);
        directory_iterator(const path& p, directory_options options);
        directory_iterator(const path& p, error_code& ec);
        directory_iterator(const path& p, directory_options options,
                           error_code& ec);
        directory_iterator(const directory_iterator& rhs);
        directory_iterator(directory_iterator&& rhs) noexcept;
        ~directory_iterator();

        directory_iterator& operator=(const directory_iterator& rhs);
        directory_iterator& operator=(directory_iterator&& rhs) noexcept;

        const directory_entry& operator*() const;
        const directory_entry* operator->() const;
        directory_iterator& operator++();
        directory_iterator& increment(error_code& ec);

        // other members as required by 28.2.3, input iterators
    };
}
```

- ² `directory_iterator` satisfies the *Cpp17InputIterator* requirements (28.2.3).
- ³ If an iterator of type `directory_iterator` reports an error or is advanced past the last directory element, that iterator shall become equal to the end iterator value. The `directory_iterator` default constructor shall create an iterator equal to the end iterator value, and this shall be the only valid iterator for the end condition.
- ⁴ The end iterator is not dereferenceable.
- ⁵ Two end iterators are always equal. An end iterator shall not be equal to a non-end iterator.
- ⁶ The result of calling the `path()` member of the `directory_entry` object obtained by dereferencing a `directory_iterator` is a reference to a `path` object composed of the directory argument from which the iterator was constructed with filename of the directory entry appended as if by `operator/=`.
- ⁷ Directory iteration shall not yield directory entries for the current (`dot`) and parent (`dot-dot`) directories.
- ⁸ The order of directory entries obtained by dereferencing successive increments of a `directory_iterator` is unspecified.
- ⁹ Constructors and non-const `directory_iterator` member functions store the values of any cached attributes (31.11.11) in the `directory_entry` element returned by `operator*()`. `directory_iterator` member functions shall not directly or indirectly call any `directory_entry` `refresh` function. [*Note:* The exact mechanism for storing cached attribute values is not exposed to users. For exposition, class `directory_iterator` is shown in 31.11.11 as a friend of class `directory_entry`. — *end note*]

10 [Note: Programs performing directory iteration may wish to test if the path obtained by dereferencing a directory iterator actually exists. It could be a symbolic link to a non-existent file. Programs recursively walking directory trees for purposes of removing and renaming entries may wish to avoid following symbolic links. — end note]

11 [Note: If a file is removed from or added to a directory after the construction of a `directory_iterator` for the directory, it is unspecified whether or not subsequently incrementing the iterator will ever result in an iterator referencing the removed or added directory entry. See POSIX `readdir_r`. — end note]

31.11.12.1 `directory_iterator` members [fs.dir.itr.members]

```
directory_iterator() noexcept;
```

1 *Effects:* Constructs the end iterator.

```
explicit directory_iterator(const path& p);
directory_iterator(const path& p, directory_options options);
directory_iterator(const path& p, error_code& ec);
directory_iterator(const path& p, directory_options options, error_code& ec);
```

2 *Effects:* For the directory that `p` resolves to, constructs an iterator for the first element in a sequence of `directory_entry` elements representing the files in the directory, if any; otherwise the end iterator. However, if

```
(options & directory_options::skip_permission_denied) != directory_options::none
```

and construction encounters an error indicating that permission to access `p` is denied, constructs the end iterator and does not report an error.

3 *Throws:* As specified in 31.11.6.

4 [Note: To iterate over the current directory, use `directory_iterator(".")` rather than `directory_iterator("")`. — end note]

```
directory_iterator(const directory_iterator& rhs);
directory_iterator(directory_iterator&& rhs) noexcept;
```

5 *Effects:* Constructs an object of class `directory_iterator`.

6 *Ensures:* `*this` has the original value of `rhs`.

```
directory_iterator& operator=(const directory_iterator& rhs);
directory_iterator& operator=(directory_iterator&& rhs) noexcept;
```

7 *Effects:* If `*this` and `rhs` are the same object, the member has no effect.

8 *Ensures:* `*this` has the original value of `rhs`.

9 *Returns:* `*this`.

```
directory_iterator& operator++();
directory_iterator& increment(error_code& ec);
```

10 *Effects:* As specified for the prefix increment operation of Input iterators (28.2.3).

11 *Returns:* `*this`.

12 *Throws:* As specified in 31.11.6.

31.11.12.2 `directory_iterator` non-member functions [fs.dir.itr.nonmembers]

1 These functions enable range access for `directory_iterator`.

```
directory_iterator begin(directory_iterator iter) noexcept;
```

2 *Returns:* `iter`.

```
directory_iterator end(const directory_iterator&) noexcept;
```

3 *Returns:* `directory_iterator()`.

31.11.13 Class recursive_directory_iterator**[fs.class.rec.dir.itr]**

- ¹ An object of type `recursive_directory_iterator` provides an iterator for a sequence of `directory_entry` elements representing the files in a directory or in an implementation-defined directory-like file type, and its sub-directories.

```

namespace std::filesystem {
    class recursive_directory_iterator {
    public:
        using iterator_category = input_iterator_tag;
        using value_type        = directory_entry;
        using difference_type    = ptrdiff_t;
        using pointer            = const directory_entry*;
        using reference          = const directory_entry&;

        // 31.11.13.1, constructors and destructor
        recursive_directory_iterator() noexcept;
        explicit recursive_directory_iterator(const path& p);
        recursive_directory_iterator(const path& p, directory_options options);
        recursive_directory_iterator(const path& p, directory_options options,
                                    error_code& ec);
        recursive_directory_iterator(const path& p, error_code& ec);
        recursive_directory_iterator(const recursive_directory_iterator& rhs);
        recursive_directory_iterator(recursive_directory_iterator&& rhs) noexcept;
        ~recursive_directory_iterator();

        // 31.11.13.1, observers
        directory_options options() const;
        int                depth() const;
        bool               recursion_pending() const;

        const directory_entry& operator*() const;
        const directory_entry* operator->() const;

        // 31.11.13.1, modifiers
        recursive_directory_iterator&
            operator=(const recursive_directory_iterator& rhs);
        recursive_directory_iterator&
            operator=(recursive_directory_iterator&& rhs) noexcept;

        recursive_directory_iterator& operator++();
        recursive_directory_iterator& increment(error_code& ec);

        void pop();
        void pop(error_code& ec);
        void disable_recursion_pending();

        // other members as required by 28.2.3, input iterators
    };
}

```

- ² Calling `options`, `depth`, `recursion_pending`, `pop` or `disable_recursion_pending` on an iterator that is not dereferenceable results in undefined behavior.
- ³ The behavior of a `recursive_directory_iterator` is the same as a `directory_iterator` unless otherwise specified.
- ⁴ [Note: If the directory structure being iterated over contains cycles then the end iterator may be unreachable. — end note]

31.11.13.1 recursive_directory_iterator members**[fs.rec.dir.itr.members]**

```
recursive_directory_iterator() noexcept;
```

- ¹ *Effects:* Constructs the end iterator.

```
explicit recursive_directory_iterator(const path& p);
recursive_directory_iterator(const path& p, directory_options options);
recursive_directory_iterator(const path& p, directory_options options, error_code& ec);
recursive_directory_iterator(const path& p, error_code& ec);
```

2 *Effects:* Constructs an iterator representing the first entry in the directory to which `p` resolves, if any; otherwise, the end iterator. However, if

(`options & directory_options::skip_permission_denied`) != `directory_options::none`

and construction encounters an error indicating that permission to access `p` is denied, constructs the end iterator and does not report an error.

3 *Ensures:* `options()` == `options` for the signatures with a `directory_options` argument, otherwise `options()` == `directory_options::none`.

4 *Throws:* As specified in 31.11.6.

5 [*Note:* To iterate over the current directory, use `recursive_directory_iterator(".")` rather than `recursive_directory_iterator("")`. — *end note*]

6 [*Note:* By default, `recursive_directory_iterator` does not follow directory symlinks. To follow directory symlinks, specify `options` as `directory_options::follow_directory_symlink` — *end note*]

```
recursive_directory_iterator(const recursive_directory_iterator& rhs);
```

7 *Effects:* Constructs an object of class `recursive_directory_iterator`.

8 *Ensures:*

(8.1) — `options()` == `rhs.options()`

(8.2) — `depth()` == `rhs.depth()`

(8.3) — `recursion_pending()` == `rhs.recursion_pending()`

```
recursive_directory_iterator(recursive_directory_iterator&& rhs) noexcept;
```

9 *Effects:* Constructs an object of class `recursive_directory_iterator`.

10 *Ensures:* `options()`, `depth()`, and `recursion_pending()` have the values that `rhs.options()`, `rhs.depth()`, and `rhs.recursion_pending()`, respectively, had before the function call.

```
recursive_directory_iterator& operator=(const recursive_directory_iterator& rhs);
```

11 *Effects:* If `*this` and `rhs` are the same object, the member has no effect.

12 *Ensures:*

(12.1) — `options()` == `rhs.options()`

(12.2) — `depth()` == `rhs.depth()`

(12.3) — `recursion_pending()` == `rhs.recursion_pending()`

13 *Returns:* `*this`.

```
recursive_directory_iterator& operator=(recursive_directory_iterator&& rhs) noexcept;
```

14 *Effects:* If `*this` and `rhs` are the same object, the member has no effect.

15 *Ensures:* `options()`, `depth()`, and `recursion_pending()` have the values that `rhs.options()`, `rhs.depth()`, and `rhs.recursion_pending()`, respectively, had before the function call.

16 *Returns:* `*this`.

```
directory_options options() const;
```

17 *Returns:* The value of the argument passed to the constructor for the `options` parameter, if present, otherwise `directory_options::none`.

18 *Throws:* Nothing.

```
int depth() const;
```

19 *Returns:* The current depth of the directory tree being traversed. [*Note:* The initial directory is depth 0, its immediate subdirectories are depth 1, and so forth. — *end note*]

20 *Throws:* Nothing.

```
bool recursion_pending() const;
```

21 *Returns:* true if `disable_recursion_pending()` has not been called subsequent to the prior construction or increment operation, otherwise false.

22 *Throws:* Nothing.

```
recursive_directory_iterator& operator++();
recursive_directory_iterator& increment(error_code& ec);
```

23 *Effects:* As specified for the prefix increment operation of Input iterators (28.2.3), except that:

(23.1) — If there are no more entries at the current depth, then if `depth() != 0` iteration over the parent directory resumes; otherwise `*this = recursive_directory_iterator()`.

(23.2) — Otherwise if

```
recursion_pending() && is_directory((*this)->status()) &&
(!is_symlink((*this)->symlink_status()) ||
 options() & directory_options::follow_directory_symlink) != directory_options::none)
```

then either directory `(*this)->path()` is recursively iterated into or, if

```
(options() & directory_options::skip_permission_denied) != directory_options::none
```

and an error occurs indicating that permission to access directory `(*this)->path()` is denied, then directory `(*this)->path()` is treated as an empty directory and no error is reported.

24 *Returns:* `*this`.

25 *Throws:* As specified in 31.11.6.

```
void pop();
void pop(error_code& ec);
```

26 *Effects:* If `depth() == 0`, set `*this` to `recursive_directory_iterator()`. Otherwise, cease iteration of the directory currently being iterated over, and continue iteration over the parent directory.

27 *Ensures:* Any copies of the previous value of `*this` are no longer required to be dereferenceable nor to be in the domain of `==`.

28 *Throws:* As specified in 31.11.6.

```
void disable_recursion_pending();
```

29 *Ensures:* `recursion_pending() == false`.

30 [Note: `disable_recursion_pending()` is used to prevent unwanted recursion into a directory. — end note]

31.11.13.2 recursive_directory_iterator non-member functions [fs.rec.dir.itr.nonmembers]

1 These functions enable use of `recursive_directory_iterator` with range-based for statements.

```
recursive_directory_iterator begin(recursive_directory_iterator iter) noexcept;
```

2 *Returns:* `iter`.

```
recursive_directory_iterator end(const recursive_directory_iterator&) noexcept;
```

3 *Returns:* `recursive_directory_iterator()`.

31.11.14 Filesystem operation functions [fs.op.funcs]

1 Filesystem operation functions query or modify files, including directories, in external storage.

2 [Note: Because hardware failures, network failures, file system races (31.11.2.3), and many other kinds of errors occur frequently in file system operations, users should be aware that any filesystem operation function, no matter how apparently innocuous, may encounter an error; see 31.11.6. — end note]

31.11.14.1 Absolute [fs.op.absolute]

```
path absolute(const path& p);
```

```
path absolute(const path& p, error_code& ec);
```

1 *Effects:* Composes an absolute path referencing the same file system location as `p` according to the operating system (31.11.2.2).

2 *Returns:* The composed path. The signature with argument `ec` returns `path()` if an error occurs.

3 *[Note:* For the returned path, `rp`, `rp.is_absolute()` is `true` unless an error occurs. — *end note*]

4 *Throws:* As specified in 31.11.6.

5 *[Note:* To resolve symlinks, or perform other sanitization which might require queries to secondary storage, such as hard disks, consider `canonical` (31.11.14.2). — *end note*]

6 *[Note:* Implementations are strongly encouraged to not query secondary storage, and not consider `!exists(p)` an error. — *end note*]

7 *[Example:* For POSIX-based operating systems, `absolute(p)` is simply `current_path()/p`. For Windows-based operating systems, `absolute` might have the same semantics as `GetFullPathNameW`. — *end example*]

31.11.14.2 Canonical

[fs.op.canonical]

```
path canonical(const path& p);
path canonical(const path& p, error_code& ec);
```

1 *Effects:* Converts `p` to an absolute path that has no symbolic link, dot, or dot-dot elements in its pathname in the generic format.

2 *Returns:* A path that refers to the same file system object as `absolute(p)`. The signature with argument `ec` returns `path()` if an error occurs.

3 *Throws:* As specified in 31.11.6.

4 *Remarks:* `!exists(p)` is an error.

31.11.14.3 Copy

[fs.op.copy]

```
void copy(const path& from, const path& to);
```

1 *Effects:* Equivalent to `copy(from, to, copy_options::none)`.

```
void copy(const path& from, const path& to, error_code& ec);
```

2 *Effects:* Equivalent to `copy(from, to, copy_options::none, ec)`.

```
void copy(const path& from, const path& to, copy_options options);
```

```
void copy(const path& from, const path& to, copy_options options,
          error_code& ec);
```

3 *Requires:* At most one element from each option group (31.11.9.3) is set in `options`.

4 *Effects:* Before the first use of `f` and `t`:

(4.1) — If
 `(options & copy_options::create_symlinks) != copy_options::none ||`
 `(options & copy_options::skip_symlinks) != copy_options::none`
 then `auto f = symlink_status(from)` and if needed `auto t = symlink_status(to)`.

(4.2) — Otherwise, if
 `(options & copy_options::copy_symlinks) != copy_options::none`
 then `auto f = symlink_status(from)` and if needed `auto t = status(to)`.

(4.3) — Otherwise, `auto f = status(from)` and if needed `auto t = status(to)`.

Effects are then as follows:

(4.4) — If `f.type()` or `t.type()` is an implementation-defined file type (31.11.9.2), then the effects are implementation-defined.

(4.5) — Otherwise, an error is reported as specified in 31.11.6 if:

(4.5.1) — `exists(f)` is `false`, or

(4.5.2) — `equivalent(from, to)` is `true`, or

- (4.5.3) — `is_other(f) || is_other(t)` is true, or
- (4.5.4) — `is_directory(f) && is_regular_file(t)` is true.
- (4.6) — Otherwise, if `is_symlink(f)`, then:
- (4.6.1) — If `(options & copy_options::skip_symlinks) != copy_options::none` then return.
- (4.6.2) — Otherwise if
- ```
!exists(t) && (options & copy_options::copy_symlinks) != copy_options::none
then copy_symlink(from, to).
```
- (4.6.3) — Otherwise report an error as specified in 31.11.6.
- (4.7) — Otherwise, if `is_regular_file(f)`, then:
- (4.7.1) — If `(options & copy_options::directories_only) != copy_options::none`, then return.
- (4.7.2) — Otherwise, if `(options & copy_options::create_symlinks) != copy_options::none`, then create a symbolic link to the source file.
- (4.7.3) — Otherwise, if `(options & copy_options::create_hard_links) != copy_options::none`, then create a hard link to the source file.
- (4.7.4) — Otherwise, if `is_directory(t)`, then `copy_file(from, to/from.filename(), options)`.
- (4.7.5) — Otherwise, `copy_file(from, to, options)`.
- (4.8) — Otherwise, if
- ```
is_directory(f) &&
((options & copy_options::recursive) != copy_options::none ||
options == copy_options::none)
then:
```
- (4.8.1) — If `exists(t)` is false, then `create_directory(to, from)`.
- (4.8.2) — Then, iterate over the files in `from`, as if by
- ```
for (const directory_entry& x : directory_iterator(from))
 copy(x.path(), to/x.path().filename(),
 options | copy_options::in-recursive-copy);
```
- where *in-recursive-copy* is a bitmask element of `copy_options` that is not one of the elements in 31.11.9.3.
- (4.9) — Otherwise, for the signature with argument `ec`, `ec.clear()`.
- (4.10) — Otherwise, no effects.

5 *Throws:* As specified in 31.11.6.

6 *Remarks:* For the signature with argument `ec`, any library functions called by the implementation shall have an `error_code` argument if applicable.

7 *[Example:* Given this directory structure:

```
/dir1
 file1
 file2
 dir2
 file3
```

Calling `copy("/dir1", "/dir3")` would result in:

```
/dir1
 file1
 file2
 dir2
 file3
/dir3
 file1
 file2
```

Alternatively, calling `copy("/dir1", "/dir3", copy_options::recursive)` would result in:

```

 /dir1
 file1
 file2
 dir2
 file3
 /dir3
 file1
 file2
 dir2
 file3
 — end example]

```

#### 31.11.14.4 Copy file

[fs.op.copy\_file]

```

bool copy_file(const path& from, const path& to);
bool copy_file(const path& from, const path& to, error_code& ec);

```

1 *Returns:* `copy_file(from, to, copy_options::none)` or `copy_file(from, to, copy_options::none, ec)`, respectively.

2 *Throws:* As specified in 31.11.6.

```

bool copy_file(const path& from, const path& to, copy_options options);
bool copy_file(const path& from, const path& to, copy_options options,
 error_code& ec);

```

3 *Requires:* At most one element from each option group (31.11.9.3) is set in options.

4 *Effects:* As follows:

- (4.1) — Report an error as specified in 31.11.6 if:
  - (4.1.1) — `is_regular_file(from)` is false, or
  - (4.1.2) — `exists(to)` is true and `is_regular_file(to)` is false, or
  - (4.1.3) — `exists(to)` is true and `equivalent(from, to)` is true, or
  - (4.1.4) — `exists(to)` is true and
 

```

 (options & (copy_options::skip_existing |
 copy_options::overwrite_existing |
 copy_options::update_existing)) == copy_options::none

```
- (4.2) — Otherwise, copy the contents and attributes of the file `from` resolves to, to the file `to` resolves to, if:
  - (4.2.1) — `exists(to)` is false, or
  - (4.2.2) — `(options & copy_options::overwrite_existing) != copy_options::none`, or
  - (4.2.3) — `(options & copy_options::update_existing) != copy_options::none` and `from` is more recent than `to`, determined as if by use of the `last_write_time` function (31.11.14.25).
- (4.3) — Otherwise, no effects.

5 *Returns:* `true` if the `from` file was copied, otherwise `false`. The signature with argument `ec` returns `false` if an error occurs.

6 *Throws:* As specified in 31.11.6.

7 *Complexity:* At most one direct or indirect invocation of `status(to)`.

#### 31.11.14.5 Copy symlink

[fs.op.copy\_symlink]

```

void copy_symlink(const path& existing_symlink, const path& new_symlink);
void copy_symlink(const path& existing_symlink, const path& new_symlink,
 error_code& ec) noexcept;

```

1 *Effects:* Equivalent to `function(read_symlink(existing_symlink), new_symlink)` or `function(read_symlink(existing_symlink, ec), new_symlink, ec)`, respectively, where in each case `function` is `create_symlink` or `create_directory_symlink` as appropriate.

2 *Throws:* As specified in 31.11.6.



### 31.11.14.6 Create directories [fs.op.create\_directories]

```
bool create_directories(const path& p);
bool create_directories(const path& p, error_code& ec);
```

1 *Effects:* Calls `create_directory()` for each element of `p` that does not exist.

2 *Returns:* `true` if a new directory was created for the directory `p` resolves to, otherwise `false`. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

4 *Complexity:*  $\mathcal{O}(n)$  where  $n$  is the number of elements of `p`.

### 31.11.14.7 Create directory [fs.op.create\_directory]

```
bool create_directory(const path& p);
bool create_directory(const path& p, error_code& ec) noexcept;
```

1 *Effects:* Creates the directory `p` resolves to, as if by POSIX `mkdir()` with a second argument of `static_cast<int>(perms::all)`. Creation failure because `p` already exists is not an error.

2 *Returns:* `true` if a new directory was created, otherwise `false`. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

```
bool create_directory(const path& p, const path& existing_p);
bool create_directory(const path& p, const path& existing_p, error_code& ec) noexcept;
```

4 *Effects:* Creates the directory `p` resolves to, with attributes copied from directory `existing_p`. The set of attributes copied is operating system dependent. Creation failure because `p` already exists is not an error. [*Note:* For POSIX-based operating systems, the attributes are those copied by native API `stat(existing_p.c_str(), &attributes_stat)` followed by `mkdir(p.c_str(), attributes_stat.st_mode)`. For Windows-based operating systems, the attributes are those copied by native API `CreateDirectoryExW(existing_p.c_str(), p.c_str(), 0)`. — *end note*]

5 *Returns:* `true` if a new directory was created, otherwise `false`. The signature with argument `ec` returns `false` if an error occurs.

6 *Throws:* As specified in 31.11.6.

### 31.11.14.8 Create directory symlink [fs.op.create\_dir\_symlink]

```
void create_directory_symlink(const path& to, const path& new_symlink);
void create_directory_symlink(const path& to, const path& new_symlink,
 error_code& ec) noexcept;
```

1 *Effects:* Establishes the postcondition, as if by POSIX `symlink()`.

2 *Ensures:* `new_symlink` resolves to a symbolic link file that contains an unspecified representation of `to`.

3 *Throws:* As specified in 31.11.6.

4 [*Note:* Some operating systems require symlink creation to identify that the link is to a directory. Portable code should use `create_directory_symlink()` to create directory symlinks rather than `create_symlink()` — *end note*]

5 [*Note:* Some operating systems do not support symbolic links at all or support them only for regular files. Some file systems (such as the FAT file system) do not support symbolic links regardless of the operating system. — *end note*]

### 31.11.14.9 Create hard link [fs.op.create\_hard\_lk]

```
void create_hard_link(const path& to, const path& new_hard_link);
void create_hard_link(const path& to, const path& new_hard_link,
 error_code& ec) noexcept;
```

1 *Effects:* Establishes the postcondition, as if by POSIX `link()`.

2 *Ensures:*

(2.1) — `exists(to) && exists(new_hard_link) && equivalent(to, new_hard_link)`

(2.2) — The contents of the file or directory `to` resolves to are unchanged.

3 *Throws:* As specified in 31.11.6.

4 [*Note:* Some operating systems do not support hard links at all or support them only for regular files. Some file systems (such as the FAT file system) do not support hard links regardless of the operating system. Some file systems limit the number of links per file. — *end note*]

#### 31.11.14.10 Create symlink [fs.op.create\_symlink]

```
void create_symlink(const path& to, const path& new_symlink);
void create_symlink(const path& to, const path& new_symlink,
 error_code& ec) noexcept;
```

1 *Effects:* Establishes the postcondition, as if by POSIX `symlink()`.

2 *Ensures:* `new_symlink` resolves to a symbolic link file that contains an unspecified representation of `to`.

3 *Throws:* As specified in 31.11.6.

4 [*Note:* Some operating systems do not support symbolic links at all or support them only for regular files. Some file systems (such as the FAT file system) do not support symbolic links regardless of the operating system. — *end note*]

#### 31.11.14.11 Current path [fs.op.current\_path]

```
path current_path();
path current_path(error_code& ec);
```

1 *Returns:* The absolute path of the current working directory, whose pathname in the native format is obtained as if by POSIX `getcwd()`. The signature with argument `ec` returns `path()` if an error occurs.

2 *Throws:* As specified in 31.11.6.

3 *Remarks:* The current working directory is the directory, associated with the process, that is used as the starting location in pathname resolution for relative paths.

4 [*Note:* The `current_path()` name was chosen to emphasize that the returned value is a path, not just a single directory name. — *end note*]

5 [*Note:* The current path as returned by many operating systems is a dangerous global variable. It may be changed unexpectedly by third-party or system library functions, or by another thread. — *end note*]

```
void current_path(const path& p);
void current_path(const path& p, error_code& ec) noexcept;
```

6 *Effects:* Establishes the postcondition, as if by POSIX `chdir()`.

7 *Ensures:* `equivalent(p, current_path())`.

8 *Throws:* As specified in 31.11.6.

9 [*Note:* The current path for many operating systems is a dangerous global state. It may be changed unexpectedly by a third-party or system library functions, or by another thread. — *end note*]

#### 31.11.14.12 Equivalent [fs.op.equivalent]

```
bool equivalent(const path& p1, const path& p2);
bool equivalent(const path& p1, const path& p2, error_code& ec) noexcept;
```

1 *Returns:* `true`, if `p1` and `p2` resolve to the same file system entity, else `false`. The signature with argument `ec` returns `false` if an error occurs.

2 Two paths are considered to resolve to the same file system entity if two candidate entities reside on the same device at the same location. [*Note:* On POSIX platforms, this is determined as if by the values of the POSIX `stat` structure, obtained as if by `stat()` for the two paths, having equal `st_dev` values and equal `st_ino` values. — *end note*]

3 *Remarks:* `!exists(p1) || !exists(p2)` is an error.

4 *Throws:* As specified in 31.11.6.

**31.11.14.13 Exists**

[fs.op.exists]

```
bool exists(file_status s) noexcept;
```

1 *Returns:* `status_known(s) && s.type() != file_type::not_found`.

```
bool exists(const path& p);
```

```
bool exists(const path& p, error_code& ec) noexcept;
```

2 Let `s` be a `file_status`, determined as if by `status(p)` or `status(p, ec)`, respectively.

3 *Effects:* The signature with argument `ec` calls `ec.clear()` if `status_known(s)`.

4 *Returns:* `exists(s)`.

5 *Throws:* As specified in 31.11.6.

**31.11.14.14 File size**

[fs.op.file\_size]

```
uintmax_t file_size(const path& p);
```

```
uintmax_t file_size(const path& p, error_code& ec) noexcept;
```

1 *Effects:* If `exists(p)` is false, an error is reported (31.11.6).

2 *Returns:*

(2.1) — If `is_regular_file(p)`, the size in bytes of the file `p` resolves to, determined as if by the value of the POSIX `stat` structure member `st_size` obtained as if by POSIX `stat()`.

(2.2) — Otherwise, the result is implementation-defined.

The signature with argument `ec` returns `static_cast<uintmax_t>(-1)` if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.15 Hard link count**

[fs.op.hard\_lk\_ct]

```
uintmax_t hard_link_count(const path& p);
```

```
uintmax_t hard_link_count(const path& p, error_code& ec) noexcept;
```

1 *Returns:* The number of hard links for `p`. The signature with argument `ec` returns `static_cast<uintmax_t>(-1)` if an error occurs.

2 *Throws:* As specified in 31.11.6.

**31.11.14.16 Is block file**

[fs.op.is\_block\_file]

```
bool is_block_file(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::block`.

```
bool is_block_file(const path& p);
```

```
bool is_block_file(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_block_file(status(p))` or `is_block_file(status(p, ec))`, respectively. The signature with argument `ec` returns false if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.17 Is character file**

[fs.op.is\_char\_file]

```
bool is_character_file(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::character`.

```
bool is_character_file(const path& p);
```

```
bool is_character_file(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_character_file(status(p))` or `is_character_file(status(p, ec))`, respectively. The signature with argument `ec` returns false if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.18 Is directory** [fs.op.is\_directory]

```
bool is_directory(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::directory`.

```
bool is_directory(const path& p);
```

```
bool is_directory(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_directory(status(p))` or `is_directory(status(p, ec))`, respectively. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.19 Is empty** [fs.op.is\_empty]

```
bool is_empty(const path& p);
```

```
bool is_empty(const path& p, error_code& ec);
```

1 *Effects:*

(1.1) — Determine `file_status s`, as if by `status(p)` or `status(p, ec)`, respectively.

(1.2) — For the signature with argument `ec`, return `false` if an error occurred.

(1.3) — Otherwise, if `is_directory(s)`:

(1.3.1) — Create a variable `itr`, as if by `directory_iterator itr(p)` or `directory_iterator itr(p, ec)`, respectively.

(1.3.2) — For the signature with argument `ec`, return `false` if an error occurred.

(1.3.3) — Otherwise, return `itr == directory_iterator()`.

(1.4) — Otherwise:

(1.4.1) — Determine `uintmax_t sz`, as if by `file_size(p)` or `file_size(p, ec)`, respectively.

(1.4.2) — For the signature with argument `ec`, return `false` if an error occurred.

(1.4.3) — Otherwise, return `sz == 0`.

2 *Throws:* As specified in 31.11.6.

**31.11.14.20 Is fifo** [fs.op.is\_fifo]

```
bool is_fifo(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::fifo`.

```
bool is_fifo(const path& p);
```

```
bool is_fifo(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_fifo(status(p))` or `is_fifo(status(p, ec))`, respectively. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.21 Is other** [fs.op.is\_other]

```
bool is_other(file_status s) noexcept;
```

1 *Returns:* `exists(s) && !is_regular_file(s) && !is_directory(s) && !is_symlink(s)`.

```
bool is_other(const path& p);
```

```
bool is_other(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_other(status(p))` or `is_other(status(p, ec))`, respectively. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

**31.11.14.22 Is regular file** [fs.op.is\_regular\_file]

```
bool is_regular_file(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::regular`.

```
bool is_regular_file(const path& p);
```

2 *Returns:* `is_regular_file(status(p))`.

3 *Throws:* `filesystem_error` if `status(p)` would throw `filesystem_error`.

```
bool is_regular_file(const path& p, error_code& ec) noexcept;
```

4 *Effects:* Sets `ec` as if by `status(p, ec)`. [*Note:* `file_type::none`, `file_type::not_found` and `file_type::unknown` cases set `ec` to error values. To distinguish between cases, call the `status` function directly. — *end note*]

5 *Returns:* `is_regular_file(status(p, ec))`. Returns `false` if an error occurs.

### 31.11.14.23 Is socket [fs.op.is\_socket]

```
bool is_socket(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::socket`.

```
bool is_socket(const path& p);
```

```
bool is_socket(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_socket(status(p))` or `is_socket(status(p, ec))`, respectively. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

### 31.11.14.24 Is symlink [fs.op.is\_symlink]

```
bool is_symlink(file_status s) noexcept;
```

1 *Returns:* `s.type() == file_type::symlink`.

```
bool is_symlink(const path& p);
```

```
bool is_symlink(const path& p, error_code& ec) noexcept;
```

2 *Returns:* `is_symlink(symlink_status(p))` or `is_symlink(symlink_status(p, ec))`, respectively. The signature with argument `ec` returns `false` if an error occurs.

3 *Throws:* As specified in 31.11.6.

### 31.11.14.25 Last write time [fs.op.last\_write\_time]

```
file_time_type last_write_time(const path& p);
```

```
file_time_type last_write_time(const path& p, error_code& ec) noexcept;
```

1 *Returns:* The time of last data modification of `p`, determined as if by the value of the POSIX `stat` structure member `st_mtime` obtained as if by POSIX `stat()`. The signature with argument `ec` returns `file_time_type::min()` if an error occurs.

2 *Throws:* As specified in 31.11.6.

```
void last_write_time(const path& p, file_time_type new_time);
```

```
void last_write_time(const path& p, file_time_type new_time,
 error_code& ec) noexcept;
```

3 *Effects:* Sets the time of last data modification of the file resolved to by `p` to `new_time`, as if by POSIX `futimens()`.

4 *Throws:* As specified in 31.11.6.

5 [*Note:* A postcondition of `last_write_time(p) == new_time` is not specified since it might not hold for file systems with coarse time granularity. — *end note*]

### 31.11.14.26 Permissions [fs.op.permissions]

```
void permissions(const path& p, perms prms, perm_options opts=perm_options::replace);
```

```
void permissions(const path& p, perms prms, error_code& ec) noexcept;
```

```
void permissions(const path& p, perms prms, perm_options opts, error_code& ec);
```

1 *Requires:* Exactly one of the `perm_options` constants `replace`, `add`, or `remove` is present in `opts`.

2 *Remarks:* The second signature behaves as if it had an additional parameter `perm_options opts` with an argument of `perm_options::replace`.

- 3 *Effects:* Applies the action specified by `opts` to the file `p` resolves to, or to file `p` itself if `p` is a symbolic link and `perm_options::nofollow` is set in `opts`. The action is applied as if by POSIX `fchmodat()`.
- 4 [*Note:* Conceptually permissions are viewed as bits, but the actual implementation may use some other mechanism. — *end note*]
- 5 *Throws:* As specified in 31.11.6.

#### 31.11.14.27 Proximate [fs.op.proximate]

```
path proximate(const path& p, error_code& ec);
```

- 1 *Returns:* `proximate(p, current_path(), ec)`.

- 2 *Throws:* As specified in 31.11.6.

```
path proximate(const path& p, const path& base = current_path());
path proximate(const path& p, const path& base, error_code& ec);
```

- 3 *Returns:* For the first form:

```
weakly_canonical(p).lexically_proximate(weakly_canonical(base));
```

For the second form:

```
weakly_canonical(p, ec).lexically_proximate(weakly_canonical(base, ec));
```

or `path()` at the first error occurrence, if any.

- 4 *Throws:* As specified in 31.11.6.

#### 31.11.14.28 Read symlink [fs.op.read\_symlink]

```
path read_symlink(const path& p);
path read_symlink(const path& p, error_code& ec);
```

- 1 *Returns:* If `p` resolves to a symbolic link, a `path` object containing the contents of that symbolic link. The signature with argument `ec` returns `path()` if an error occurs.

- 2 *Throws:* As specified in 31.11.6. [*Note:* It is an error if `p` does not resolve to a symbolic link. — *end note*]

#### 31.11.14.29 Relative [fs.op.relative]

```
path relative(const path& p, error_code& ec);
```

- 1 *Returns:* `relative(p, current_path(), ec)`.

- 2 *Throws:* As specified in 31.11.6.

```
path relative(const path& p, const path& base = current_path());
path relative(const path& p, const path& base, error_code& ec);
```

- 3 *Returns:* For the first form:

```
weakly_canonical(p).lexically_relative(weakly_canonical(base));
```

For the second form:

```
weakly_canonical(p, ec).lexically_relative(weakly_canonical(base, ec));
```

or `path()` at the first error occurrence, if any.

- 4 *Throws:* As specified in 31.11.6.

#### 31.11.14.30 Remove [fs.op.remove]

```
bool remove(const path& p);
bool remove(const path& p, error_code& ec) noexcept;
```

- 1 *Effects:* If `exists(symlink_status(p, ec))`, the file `p` is removed as if by POSIX `remove()`. [*Note:* A symbolic link is itself removed, rather than the file it resolves to. — *end note*]

- 2 *Ensures:* `exists(symlink_status(p))` is false.

- 3 *Returns:* false if `p` did not exist, otherwise true. The signature with argument `ec` returns false if an error occurs.

4 *Throws:* As specified in 31.11.6.

### 31.11.14.31 Remove all [fs.op.remove\_all]

```
uintmax_t remove_all(const path& p);
uintmax_t remove_all(const path& p, error_code& ec);
```

1 *Effects:* Recursively deletes the contents of `p` if it exists, then deletes file `p` itself, as if by POSIX `remove()`. [*Note:* A symbolic link is itself removed, rather than the file it resolves to. — *end note*]

2 *Ensures:* `exists(symlink_status(p))` is false.

3 *Returns:* The number of files removed. The signature with argument `ec` returns `static_cast<uintmax_t>(-1)` if an error occurs.

4 *Throws:* As specified in 31.11.6.

### 31.11.14.32 Rename [fs.op.rename]

```
void rename(const path& old_p, const path& new_p);
void rename(const path& old_p, const path& new_p, error_code& ec) noexcept;
```

1 *Effects:* Renames `old_p` to `new_p`, as if by POSIX `rename()`.

[*Note:*

(1.1) — If `old_p` and `new_p` resolve to the same existing file, no action is taken.

(1.2) — Otherwise, the rename may include the following effects:

(1.2.1) — if `new_p` resolves to an existing non-directory file, `new_p` is removed; otherwise,

(1.2.2) — if `new_p` resolves to an existing directory, `new_p` is removed if empty on POSIX compliant operating systems but may be an error on other operating systems.

A symbolic link is itself renamed, rather than the file it resolves to. — *end note*]

2 *Throws:* As specified in 31.11.6.

### 31.11.14.33 Resize file [fs.op.resize\_file]

```
void resize_file(const path& p, uintmax_t new_size);
void resize_file(const path& p, uintmax_t new_size, error_code& ec) noexcept;
```

1 *Effects:* Causes the size that would be returned by `file_size(p)` to be equal to `new_size`, as if by POSIX `truncate()`.

2 *Throws:* As specified in 31.11.6.

### 31.11.14.34 Space [fs.op.space]

```
space_info space(const path& p);
space_info space(const path& p, error_code& ec) noexcept;
```

1 *Returns:* An object of type `space_info`. The value of the `space_info` object is determined as if by using POSIX `statvfs` to obtain a POSIX `struct statvfs`, and then multiplying its `f_blocks`, `f_bfree`, and `f_bavail` members by its `f_frsize` member, and assigning the results to the `capacity`, `free`, and `available` members respectively. Any members for which the value cannot be determined shall be set to `static_cast<uintmax_t>(-1)`. For the signature with argument `ec`, all members are set to `static_cast<uintmax_t>(-1)` if an error occurs.

2 *Throws:* As specified in 31.11.6.

3 *Remarks:* The value of member `space_info::available` is operating system dependent. [*Note:* `available` may be less than `free`. — *end note*]

### 31.11.14.35 Status [fs.op.status]

```
file_status status(const path& p);
```

1 *Effects:* As if:

```
error_code ec;
file_status result = status(p, ec);
```

```

 if (result.type() == file_type::none)
 throw filesystem_error(implementation-supplied-message, p, ec);
 return result;

```

2 *Returns:* See above.

3 *Throws:* `filesystem_error`. [*Note:* result values of `file_status(file_type::not_found)` and `file_status(file_type::unknown)` are not considered failures and do not cause an exception to be thrown. — *end note*]

```
file_status status(const path& p, error_code& ec) noexcept;
```

4 *Effects:* If possible, determines the attributes of the file `p` resolves to, as if by using POSIX `stat()` to obtain a POSIX `struct stat`. If, during attribute determination, the underlying file system API reports an error, sets `ec` to indicate the specific error reported. Otherwise, `ec.clear()`. [*Note:* This allows users to inspect the specifics of underlying API errors even when the value returned by `status()` is not `file_status(file_type::none)`. — *end note*]

5 Let `prms` denote the result of `(m & perms::mask)`, where `m` is determined as if by converting the `st_mode` member of the obtained `struct stat` to the type `perms`.

6 *Returns:*

(6.1) — If `ec != error_code()`:

(6.1.1) — If the specific error indicates that `p` cannot be resolved because some element of the path does not exist, returns `file_status(file_type::not_found)`.

(6.1.2) — Otherwise, if the specific error indicates that `p` can be resolved but the attributes cannot be determined, returns `file_status(file_type::unknown)`.

(6.1.3) — Otherwise, returns `file_status(file_type::none)`.

[*Note:* These semantics distinguish between `p` being known not to exist, `p` existing but not being able to determine its attributes, and there being an error that prevents even knowing if `p` exists. These distinctions are important to some use cases. — *end note*]

(6.2) — Otherwise,

(6.2.1) — If the attributes indicate a regular file, as if by POSIX `S_ISREG`, returns `file_status(file_type::regular, prms)`. [*Note:* `file_type::regular` implies appropriate `<fstream>` operations would succeed, assuming no hardware, permission, access, or file system race errors. Lack of `file_type::regular` does not necessarily imply `<fstream>` operations would fail on a directory. — *end note*]

(6.2.2) — Otherwise, if the attributes indicate a directory, as if by POSIX `S_ISDIR`, returns `file_status(file_type::directory, prms)`. [*Note:* `file_type::directory` implies that calling `directory_iterator(p)` would succeed. — *end note*]

(6.2.3) — Otherwise, if the attributes indicate a block special file, as if by POSIX `S_ISBLK`, returns `file_status(file_type::block, prms)`.

(6.2.4) — Otherwise, if the attributes indicate a character special file, as if by POSIX `S_ISCHR`, returns `file_status(file_type::character, prms)`.

(6.2.5) — Otherwise, if the attributes indicate a fifo or pipe file, as if by POSIX `S_ISFIFO`, returns `file_status(file_type::fifo, prms)`.

(6.2.6) — Otherwise, if the attributes indicate a socket, as if by POSIX `S_ISSOCK`, returns `file_status(file_type::socket, prms)`.

(6.2.7) — Otherwise, if the attributes indicate an implementation-defined file type (31.11.9.2), returns `file_status(file_type::A, prms)`, where `A` is the constant for the implementation-defined file type.

(6.2.8) — Otherwise, returns `file_status(file_type::unknown, prms)`.

7 *Remarks:* If a symbolic link is encountered during pathname resolution, pathname resolution continues using the contents of the symbolic link.



**31.11.14.36 Status known** [fs.op.status\_known]

```
bool status_known(file_status s) noexcept;
```

1 *Returns:* `s.type() != file_type::none`.

**31.11.14.37 Symlink status** [fs.op.symlink\_status]

```
file_status symlink_status(const path& p);
file_status symlink_status(const path& p, error_code& ec) noexcept;
```

1 *Effects:* Same as `status()`, above, except that the attributes of `p` are determined as if by using POSIX `lstat()` to obtain a POSIX struct `stat`.

2 Let `perms` denote the result of `(m & perms::mask)`, where `m` is determined as if by converting the `st_mode` member of the obtained struct `stat` to the type `perms`.

3 *Returns:* Same as `status()`, above, except that if the attributes indicate a symbolic link, as if by POSIX `S_ISLNK`, returns `file_status(file_type::symlink, perms)`. The signature with argument `ec` returns `file_status(file_type::none)` if an error occurs.

4 *Remarks:* Pathname resolution terminates if `p` names a symbolic link.

5 *Throws:* As specified in 31.11.6.

**31.11.14.38 Temporary directory path** [fs.op.temp\_dir\_path]

```
path temp_directory_path();
path temp_directory_path(error_code& ec);
```

1 Let `p` be an unspecified directory path suitable for temporary files.

2 *Effects:* If `exists(p)` is false or `is_directory(p)` is false, an error is reported (31.11.6).

3 *Returns:* The path `p`. The signature with argument `ec` returns `path()` if an error occurs.

4 *Throws:* As specified in 31.11.6.

5 [Example: For POSIX-based operating systems, an implementation might return the path supplied by the first environment variable found in the list `TMPDIR`, `TMP`, `TEMP`, `TEMPDIR`, or if none of these are found, `"/tmp"`.

For Windows-based operating systems, an implementation might return the path reported by the Windows `GetTempPath` API function. — end example]

**31.11.14.39 Weakly canonical** [fs.op.weakly\_canonical]

```
path weakly_canonical(const path& p);
path weakly_canonical(const path& p, error_code& ec);
```

1 *Returns:* `p` with symlinks resolved and the result normalized (31.11.7.1).

2 *Effects:* Using `status(p)` or `status(p, ec)`, respectively, to determine existence, return a path composed by `operator/=` from the result of calling `canonical()` with a path argument composed of the leading elements of `p` that exist, if any, followed by the elements of `p` that do not exist, if any. For the first form, `canonical()` is called without an `error_code` argument. For the second form, `canonical()` is called with `ec` as an `error_code` argument, and `path()` is returned at the first error occurrence, if any.

3 *Ensures:* The returned path is in normal form (31.11.7.1).

4 *Remarks:* Implementations should avoid unnecessary normalization such as when `canonical` has already been called on the entirety of `p`.

5 *Throws:* As specified in 31.11.6.

**31.12 C library files** [c.files]**31.12.1 Header <cstdio> synopsis** [cstdio.syn]

```
namespace std {
 using size_t = see 21.2.4;
 using FILE = see below;
 using fpos_t = see below;
}
```

```

#define NULL see 21.2.3
#define _IOFBF see below
#define _IOLBF see below
#define _IONBF see below
#define BUFSIZ see below
#define EOF see below
#define FOPEN_MAX see below
#define FILENAME_MAX see below
#define L_tmpnam see below
#define SEEK_CUR see below
#define SEEK_END see below
#define SEEK_SET see below
#define TMP_MAX see below
#define stderr see below
#define stdin see below
#define stdout see below

namespace std {
 int remove(const char* filename);
 int rename(const char* old, const char* new);
 FILE* tmpfile();
 char* tmpnam(char* s);
 int fclose(FILE* stream);
 int fflush(FILE* stream);
 FILE* fopen(const char* filename, const char* mode);
 FILE* freopen(const char* filename, const char* mode, FILE* stream);
 void setbuf(FILE* stream, char* buf);
 int setvbuf(FILE* stream, char* buf, int mode, size_t size);
 int fprintf(FILE* stream, const char* format, ...);
 int fscanf(FILE* stream, const char* format, ...);
 int printf(const char* format, ...);
 int scanf(const char* format, ...);
 int snprintf(char* s, size_t n, const char* format, ...);
 int sprintf(char* s, const char* format, ...);
 int sscanf(const char* s, const char* format, ...);
 int vfprintf(FILE* stream, const char* format, va_list arg);
 int vfscanf(FILE* stream, const char* format, va_list arg);
 int vprintf(const char* format, va_list arg);
 int vscanf(const char* format, va_list arg);
 int vsnprintf(char* s, size_t n, const char* format, va_list arg);
 int vsprintf(char* s, const char* format, va_list arg);
 int vsscanf(const char* s, const char* format, va_list arg);
 int fgetc(FILE* stream);
 char* fgets(char* s, int n, FILE* stream);
 int fputc(int c, FILE* stream);
 int fputs(const char* s, FILE* stream);
 int getc(FILE* stream);
 int getchar();
 int putc(int c, FILE* stream);
 int putchar(int c);
 int puts(const char* s);
 int ungetc(int c, FILE* stream);
 size_t fread(void* ptr, size_t size, size_t nmemb, FILE* stream);
 size_t fwrite(const void* ptr, size_t size, size_t nmemb, FILE* stream);
 int fgetpos(FILE* stream, fpos_t* pos);
 int fseek(FILE* stream, long int offset, int whence);
 int fsetpos(FILE* stream, const fpos_t* pos);
 long int ftell(FILE* stream);
 void rewind(FILE* stream);
 void clearerr(FILE* stream);
 int feof(FILE* stream);
 int ferror(FILE* stream);
 void perror(const char* s);
}

```

- <sup>1</sup> The contents and meaning of the header `<cstdio>` are the same as the C standard library header `<stdio.h>`.
- <sup>2</sup> Calls to the function `tmpnam` with an argument that is a null pointer value may introduce a data race (20.5.5.9) with other calls to `tmpnam` with an argument that is a null pointer value.

SEE ALSO: ISO C 7.21

### 31.12.2 Header `<cinttypes>` synopsis

[`cinttypes.syn`]

```
#include <cstdio> // see 21.4.1

namespace std {
 using imaxdiv_t = see below;

 intmax_t imaxabs(intmax_t j);
 imaxdiv_t imaxdiv(intmax_t numer, intmax_t denom);
 intmax_t strtoumax(const char* nptr, char** endptr, int base);
 uintmax_t strtoumax(const char* nptr, char** endptr, int base);
 intmax_t wcstoumax(const wchar_t* nptr, wchar_t** endptr, int base);
 uintmax_t wcstoumax(const wchar_t* nptr, wchar_t** endptr, int base);

 intmax_t abs(intmax_t); // optional, see below
 imaxdiv_t div(intmax_t, intmax_t); // optional, see below
}

#define PRIdN see below
#define PRIiN see below
#define PRIdN see below
#define PRIuN see below
#define PRIdN see below
#define PRIdN see below
#define SCNdN see below
#define SCNiN see below
#define SCNoN see below
#define SCNuN see below
#define SCNxN see below
#define PRIdLEASTN see below
#define PRIiLEASTN see below
#define PRIdLEASTN see below
#define PRIuLEASTN see below
#define PRIdLEASTN see below
#define PRIdLEASTN see below
#define SCNdLEASTN see below
#define SCNiLEASTN see below
#define SCNoLEASTN see below
#define SCNuLEASTN see below
#define SCNxLEASTN see below
#define PRIdFASTN see below
#define PRIiFASTN see below
#define PRIdFASTN see below
#define PRIuFASTN see below
#define PRIdFASTN see below
#define PRIdFASTN see below
#define SCNdFASTN see below
#define SCNiFASTN see below
#define SCNoFASTN see below
#define SCNuFASTN see below
#define SCNxFASTN see below
#define PRIdMAX see below
#define PRIiMAX see below
#define PRIdMAX see below
#define PRIuMAX see below
#define PRIdMAX see below
#define PRIdMAX see below
#define SCNdMAX see below
```

```
#define SCNiMAX see below
#define SCNoMAX see below
#define SCNuMAX see below
#define SCNxMAX see below
#define PRIdPTR see below
#define PRIiPTR see below
#define PRIoPTR see below
#define PRIuPTR see below
#define PRIxPTR see below
#define PRIXPTR see below
#define SCNdPTR see below
#define SCNiPTR see below
#define SCNoPTR see below
#define SCNuPTR see below
#define SCNxPTR see below
```

<sup>1</sup> The contents and meaning of the header `<inttypes>` are the same as the C standard library header `<inttypes.h>`, with the following changes:

- (1.1) — The header `<inttypes>` includes the header `<stdint>` instead of `<stdint.h>`, and
- (1.2) — if and only if the type `intmax_t` designates an extended integer type (6.7.1), the following function signatures are added:

```
intmax_t abs(intmax_t);
imaxdiv_t div(intmax_t, intmax_t);
```

which shall have the same semantics as the function signatures `intmax_t imaxabs(intmax_t)` and `imaxdiv_t imaxdiv(intmax_t, intmax_t)`, respectively.

SEE ALSO: ISO C 7.8

## 32 Regular expressions library [re]

### 32.1 General [re.general]

- <sup>1</sup> This Clause describes components that C++ programs may use to perform operations involving regular expression matching and searching.
- <sup>2</sup> The following subclauses describe a basic regular expression class template and its traits that can handle char-like (25.1) template arguments, two specializations of this class template that handle sequences of `char` and `wchar_t`, a class template that holds the result of a regular expression match, a series of algorithms that allow a character sequence to be operated upon by a regular expression, and two iterator types for enumerating regular expression matches, as summarized in Table 122.

Table 122 — Regular expressions library summary

| Subclause                                        | Header(s)                  |
|--------------------------------------------------|----------------------------|
| <a href="#">32.2</a> Definitions                 |                            |
| <a href="#">32.3</a> Requirements                |                            |
| <a href="#">32.5</a> Constants                   |                            |
| <a href="#">32.6</a> Exception type              |                            |
| <a href="#">32.7</a> Traits                      |                            |
| <a href="#">32.8</a> Regular expression template | <code>&lt;regex&gt;</code> |
| <a href="#">32.9</a> Submatches                  |                            |
| <a href="#">32.10</a> Match results              |                            |
| <a href="#">32.11</a> Algorithms                 |                            |
| <a href="#">32.12</a> Iterators                  |                            |
| <a href="#">32.13</a> Grammar                    |                            |

### 32.2 Definitions [re.def]

- <sup>1</sup> The following definitions shall apply to this Clause:

#### 32.2.1 [defns.regex.collating.element]

##### collating element

a sequence of one or more characters within the current locale that collate as if they were a single character.

#### 32.2.2 [defns.regex.finite.state.machine]

##### finite state machine

an unspecified data structure that is used to represent a regular expression, and which permits efficient matches against the regular expression to be obtained.

#### 32.2.3 [defns.regex.format.specifier]

##### format specifier

a sequence of one or more characters that is to be replaced with some part of a regular expression match.

#### 32.2.4 [defns.regex.matched]

##### matched

a sequence of zero or more characters is matched by a regular expression when the characters in the sequence correspond to a sequence of characters defined by the pattern.

#### 32.2.5 [defns.regex.primary.equivalence.class]

##### primary equivalence class

a set of one or more characters which share the same primary sort key: that is the sort key weighting that depends only upon character shape, and not accents, case, or locale specific tailorings.

### 32.2.6 [defns.regex.regular.expression] regular expression

a pattern that selects specific strings from a set of character strings.

### 32.2.7 [defns.regex.subexpression] sub-expression

a subset of a regular expression that has been marked by parenthesis.

## 32.3 Requirements [re.req]

- <sup>1</sup> This subclause defines requirements on classes representing regular expression traits. [*Note*: The class template `regex_traits`, defined in 32.7, satisfies these requirements. — *end note*]
- <sup>2</sup> The class template `basic_regex`, defined in 32.8, needs a set of related types and functions to complete the definition of its semantics. These types and functions are provided as a set of member *typedef-names* and functions in the template parameter `traits` used by the `basic_regex` class template. This subclause defines the semantics of these members.
- <sup>3</sup> To specialize class template `basic_regex` for a character container `CharT` and its related regular expression traits class `Traits`, use `basic_regex<CharT, Traits>`.
- <sup>4</sup> In Table 123 `X` denotes a traits class defining types and functions for the character container type `charT`; `u` is an object of type `X`; `v` is an object of type `const X`; `p` is a value of type `const charT*`; `I1` and `I2` are input iterators (28.2.3); `F1` and `F2` are forward iterators (28.2.5); `c` is a value of type `const charT`; `s` is an object of type `X::string_type`; `cs` is an object of type `const X::string_type`; `b` is a value of type `bool`; `I` is a value of type `int`; `cl` is an object of type `X::char_class_type`, and `loc` is an object of type `X::locale_type`.

Table 123 — Regular expression traits class requirements

| Expression                         | Return type                            | Assertion/note pre-/post-condition                                                                                                                                                                                                                                                        |
|------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>X::char_type</code>          | <code>charT</code>                     | The character container type used in the implementation of class template <code>basic_regex</code> .                                                                                                                                                                                      |
| <code>X::string_type</code>        | <code>basic_string&lt;charT&gt;</code> |                                                                                                                                                                                                                                                                                           |
| <code>X::locale_type</code>        | A copy constructible type              | A type that represents the locale used by the traits class.                                                                                                                                                                                                                               |
| <code>X::char_class_type</code>    | A bitmask type (20.4.2.1.4).           | A bitmask type representing a particular character classification.                                                                                                                                                                                                                        |
| <code>X::length(p)</code>          | <code>size_t</code>                    | Yields the smallest <code>i</code> such that <code>p[i] == 0</code> . Complexity is linear in <code>i</code> .                                                                                                                                                                            |
| <code>v.translate(c)</code>        | <code>X::char_type</code>              | Returns a character such that for any character <code>d</code> that is to be considered equivalent to <code>c</code> then <code>v.translate(c) == v.translate(d)</code> .                                                                                                                 |
| <code>v.translate_nocase(c)</code> | <code>X::char_type</code>              | For all characters <code>C</code> that are to be considered equivalent to <code>c</code> when comparisons are to be performed without regard to case, then <code>v.translate_nocase(c) == v.translate_nocase(C)</code> .                                                                  |
| <code>v.transform(F1, F2)</code>   | <code>X::string_type</code>            | Returns a sort key for the character sequence designated by the iterator range <code>[F1, F2)</code> such that if the character sequence <code>[G1, G2)</code> sorts before the character sequence <code>[H1, H2)</code> then <code>v.transform(G1, G2) &lt; v.transform(H1, H2)</code> . |

Table 123 — Regular expression traits class requirements (continued)

| Expression                                 | Return type                     | Assertion/note pre-/post-condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>v.transform_primary(F1, F2)</code>   | <code>X::string_type</code>     | Returns a sort key for the character sequence designated by the iterator range <code>[F1, F2)</code> such that if the character sequence <code>[G1, G2)</code> sorts before the character sequence <code>[H1, H2)</code> when character case is not considered then <code>v.transform_primary(G1, G2) &lt; v.transform_primary(H1, H2)</code> .                                                                                                                                                                                                                                                                                                                                              |
| <code>v.lookup_collatename(F1, F2)</code>  | <code>X::string_type</code>     | Returns a sequence of characters that represents the collating element consisting of the character sequence designated by the iterator range <code>[F1, F2)</code> . Returns an empty string if the character sequence is not a valid collating element.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <code>v.lookup_classname(F1, F2, b)</code> | <code>X::char_class_type</code> | Converts the character sequence designated by the iterator range <code>[F1, F2)</code> into a value of a bitmask type that can subsequently be passed to <code>isctype</code> . Values returned from <code>lookup_classname</code> can be bitwise or'ed together; the resulting value represents membership in either of the corresponding character classes. If <code>b</code> is <code>true</code> , the returned bitmask is suitable for matching characters without regard to their case. Returns 0 if the character sequence is not the name of a character class recognized by <code>X</code> . The value returned shall be independent of the case of the characters in the sequence. |
| <code>v.isctype(c, c1)</code>              | <code>bool</code>               | Returns <code>true</code> if character <code>c</code> is a member of one of the character classes designated by <code>c1</code> , <code>false</code> otherwise.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <code>v.value(c, I)</code>                 | <code>int</code>                | Returns the value represented by the digit <code>c</code> in base <code>I</code> if the character <code>c</code> is a valid digit in base <code>I</code> ; otherwise returns <code>-1</code> . [ <i>Note: The value of <code>I</code> will only be 8, 10, or 16. — end note</i> ]                                                                                                                                                                                                                                                                                                                                                                                                            |
| <code>u.imbue(loc)</code>                  | <code>X::locale_type</code>     | Imbues <code>u</code> with the locale <code>loc</code> and returns the previous locale used by <code>u</code> if any.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <code>v.getloc()</code>                    | <code>X::locale_type</code>     | Returns the current locale used by <code>v</code> , if any.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

<sup>5</sup> [*Note: Class template `regex_traits` satisfies the requirements for a regular expression traits class when it is specialized for `char` or `wchar_t`. This class template is described in the header `<regex>`, and is described in 32.7. — end note*]

### 32.4 Header `<regex>` synopsis

[re.syn]

```
#include <initializer_list>

namespace std {
 // 32.5, regex constants
 namespace regex_constants {
 using syntax_option_type = T1;
 using match_flag_type = T2;
 using error_type = T3;
 }

 // 32.6, class regex_error
 class regex_error;
```

```

// 32.7, class template regex_traits
template<class charT> struct regex_traits;

// 32.8, class template basic_regex
template<class charT, class traits = regex_traits<charT>> class basic_regex;

using regex = basic_regex<char>;
using wregex = basic_regex<wchar_t>;

// 32.8.5, basic_regex swap
template<class charT, class traits>
void swap(basic_regex<charT, traits>& e1, basic_regex<charT, traits>& e2);

// 32.9, class template sub_match
template<class BidirectionalIterator>
class sub_match;

using csub_match = sub_match<const char*>;
using wsub_match = sub_match<const wchar_t*>;
using ssub_match = sub_match<string::const_iterator>;
using wssub_match = sub_match<wstring::const_iterator>;

// 32.9.2, sub_match non-member operators
template<class BiIter>
bool operator==(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
template<class BiIter>
bool operator!=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
template<class BiIter>
bool operator<(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
template<class BiIter>
bool operator>(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
template<class BiIter>
bool operator<=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
template<class BiIter>
bool operator>=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);

template<class BiIter, class ST, class SA>
bool operator==(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter, class ST, class SA>
bool operator!=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter, class ST, class SA>
bool operator<(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter, class ST, class SA>
bool operator>(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter, class ST, class SA>
bool operator<=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter, class ST, class SA>
bool operator>=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);

```



```

template<class BiIter, class ST, class SA>
 bool operator==(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
template<class BiIter, class ST, class SA>
 bool operator!=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
template<class BiIter, class ST, class SA>
 bool operator<(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
template<class BiIter, class ST, class SA>
 bool operator>(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
template<class BiIter, class ST, class SA>
 bool operator<=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
template<class BiIter, class ST, class SA>
 bool operator>=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);

template<class BiIter>
 bool operator==(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator!=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator<(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator>(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator<=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator>=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);

template<class BiIter>
 bool operator==(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
template<class BiIter>
 bool operator!=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
template<class BiIter>
 bool operator<(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
template<class BiIter>
 bool operator>(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
template<class BiIter>
 bool operator<=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
template<class BiIter>
 bool operator>=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);

```

```

template<class BiIter>
 bool operator==(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator!=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator<(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator>(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator<=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
template<class BiIter>
 bool operator>=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);

template<class BiIter>
 bool operator==(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
template<class BiIter>
 bool operator!=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
template<class BiIter>
 bool operator<(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
template<class BiIter>
 bool operator>(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
template<class BiIter>
 bool operator<=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
template<class BiIter>
 bool operator>=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);

template<class charT, class ST, class BiIter>
 basic_ostream<charT, ST>&
 operator<<(basic_ostream<charT, ST>& os, const sub_match<BiIter>& m);

// 32.10, class template match_results
template<class BidirectionalIterator,
 class Allocator = allocator<sub_match<BidirectionalIterator>>>
 class match_results;

using cmatch = match_results<const char*>;
using wcmatch = match_results<const wchar_t*>;
using smatch = match_results<string::const_iterator>;
using wsmatch = match_results<wstring::const_iterator>;

// match_results comparisons
template<class BidirectionalIterator, class Allocator>
 bool operator==(const match_results<BidirectionalIterator, Allocator>& m1,
 const match_results<BidirectionalIterator, Allocator>& m2);
template<class BidirectionalIterator, class Allocator>
 bool operator!=(const match_results<BidirectionalIterator, Allocator>& m1,
 const match_results<BidirectionalIterator, Allocator>& m2);

// 32.10.7, match_results swap
template<class BidirectionalIterator, class Allocator>
 void swap(match_results<BidirectionalIterator, Allocator>& m1,
 match_results<BidirectionalIterator, Allocator>& m2);

```

```

// 32.11.2, function template regex_match
template<class BidirectionalIterator, class Allocator, class charT, class traits>
 bool regex_match(BidirectionalIterator first, BidirectionalIterator last,
 match_results<BidirectionalIterator, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class BidirectionalIterator, class charT, class traits>
 bool regex_match(BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class charT, class Allocator, class traits>
 bool regex_match(const charT* str, match_results<const charT*, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class ST, class SA, class Allocator, class charT, class traits>
 bool regex_match(const basic_string<charT, ST, SA>& s,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class ST, class SA, class Allocator, class charT, class traits>
 bool regex_match(const basic_string<charT, ST, SA>&&,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>&,
 const basic_regex<charT, traits>&,
 regex_constants::match_flag_type = regex_constants::match_default) = delete;
template<class charT, class traits>
 bool regex_match(const charT* str,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class ST, class SA, class charT, class traits>
 bool regex_match(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);

// 32.11.3, function template regex_search
template<class BidirectionalIterator, class Allocator, class charT, class traits>
 bool regex_search(BidirectionalIterator first, BidirectionalIterator last,
 match_results<BidirectionalIterator, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class BidirectionalIterator, class charT, class traits>
 bool regex_search(BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class charT, class Allocator, class traits>
 bool regex_search(const charT* str,
 match_results<const charT*, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class charT, class traits>
 bool regex_search(const charT* str,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class ST, class SA, class charT, class traits>
 bool regex_search(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class ST, class SA, class Allocator, class charT, class traits>
 bool regex_search(const basic_string<charT, ST, SA>& s,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);

```

```

template<class ST, class SA, class Allocator, class charT, class traits>
 bool regex_search(const basic_string<charT, ST, SA>&&,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>&,
 const basic_regex<charT, traits>&,
 regex_constants::match_flag_type
 = regex_constants::match_default) = delete;

// 32.11.4, function template regex_replace
template<class OutputIterator, class BidirectionalIterator,
 class traits, class charT, class ST, class SA>
 OutputIterator
 regex_replace(OutputIterator out,
 BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class OutputIterator, class BidirectionalIterator, class traits, class charT>
 OutputIterator
 regex_replace(OutputIterator out,
 BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class traits, class charT, class ST, class SA, class FST, class FSA>
 basic_string<charT, ST, SA>
 regex_replace(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, FST, FSA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class traits, class charT, class ST, class SA>
 basic_string<charT, ST, SA>
 regex_replace(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class traits, class charT, class ST, class SA>
 basic_string<charT>
 regex_replace(const charT* s,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
template<class traits, class charT>
 basic_string<charT>
 regex_replace(const charT* s,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);

// 32.12.1, class template regex_iterator
template<class BidirectionalIterator,
 class charT = typename iterator_traits<BidirectionalIterator>::value_type,
 class traits = regex_traits<charT>>
 class regex_iterator;

using cregex_iterator = regex_iterator<const char*>;
using wcregex_iterator = regex_iterator<const wchar_t*>;
using sregex_iterator = regex_iterator<string::const_iterator>;
using wsregex_iterator = regex_iterator<wstring::const_iterator>;

// 32.12.2, class template regex_token_iterator
template<class BidirectionalIterator,
 class charT = typename iterator_traits<BidirectionalIterator>::value_type,
 class traits = regex_traits<charT>>

```

```

class regex_token_iterator;

using cregex_token_iterator = regex_token_iterator<const char*>;
using wcregex_token_iterator = regex_token_iterator<const wchar_t*>;
using sregex_token_iterator = regex_token_iterator<string::const_iterator>;
using wsregex_token_iterator = regex_token_iterator<wstring::const_iterator>;

namespace pmr {
 template<class BidirectionalIterator>
 using match_results =
 std::match_results<BidirectionalIterator,
 polymorphic_allocator<sub_match<BidirectionalIterator>>>;

 using cmatch = match_results<const char*>;
 using wcmatch = match_results<const wchar_t*>;
 using smatch = match_results<string::const_iterator>;
 using wsmatch = match_results<wstring::const_iterator>;
 }
}

```

## 32.5 Namespace `std::regex_constants` [re.const]

- <sup>1</sup> The namespace `std::regex_constants` holds symbolic constants used by the regular expression library. This namespace provides three types, `syntax_option_type`, `match_flag_type`, and `error_type`, along with several constants of these types.

### 32.5.1 Bitmask type `syntax_option_type` [re.synopt]

```

namespace std::regex_constants {
 using syntax_option_type = T1;
 inline constexpr syntax_option_type icalse = unspecified;
 inline constexpr syntax_option_type nosubs = unspecified;
 inline constexpr syntax_option_type optimize = unspecified;
 inline constexpr syntax_option_type collate = unspecified;
 inline constexpr syntax_option_type ECMAScript = unspecified;
 inline constexpr syntax_option_type basic = unspecified;
 inline constexpr syntax_option_type extended = unspecified;
 inline constexpr syntax_option_type awk = unspecified;
 inline constexpr syntax_option_type grep = unspecified;
 inline constexpr syntax_option_type egrep = unspecified;
 inline constexpr syntax_option_type multiline = unspecified;
}

```

- <sup>1</sup> The type `syntax_option_type` is an implementation-defined bitmask type (20.4.2.1.4). Setting its elements has the effects listed in Table 124. A valid value of type `syntax_option_type` shall have at most one of the grammar elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep`, `set`. If no grammar element is set, the default grammar is `ECMAScript`.

### 32.5.2 Bitmask type `match_flag_type` [re.matchflag]

```

namespace std::regex_constants {
 using match_flag_type = T2;
 inline constexpr match_flag_type match_default = {};
 inline constexpr match_flag_type match_not_bol = unspecified;
 inline constexpr match_flag_type match_not_eol = unspecified;
 inline constexpr match_flag_type match_not_bow = unspecified;
 inline constexpr match_flag_type match_not_eow = unspecified;
 inline constexpr match_flag_type match_any = unspecified;
 inline constexpr match_flag_type match_not_null = unspecified;
 inline constexpr match_flag_type match_continuous = unspecified;
 inline constexpr match_flag_type match_prev_avail = unspecified;
 inline constexpr match_flag_type format_default = {};
 inline constexpr match_flag_type format_sed = unspecified;
 inline constexpr match_flag_type format_no_copy = unspecified;
 inline constexpr match_flag_type format_first_only = unspecified;
}

```

Table 124 — `syntax_option_type` effects

| Element                 | Effect(s) if set                                                                                                                                                                                                                                                          |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>icase</code>      | Specifies that matching of regular expressions against a character container sequence shall be performed without regard to case.                                                                                                                                          |
| <code>nosubs</code>     | Specifies that no sub-expressions shall be considered to be marked, so that when a regular expression is matched against a character container sequence, no sub-expression matches shall be stored in the supplied <code>match_results</code> structure.                  |
| <code>optimize</code>   | Specifies that the regular expression engine should pay more attention to the speed with which regular expressions are matched, and less to the speed with which regular expression objects are constructed. Otherwise it has no detectable effect on the program output. |
| <code>collate</code>    | Specifies that character ranges of the form "[a-b]" shall be locale sensitive.                                                                                                                                                                                            |
| <code>ECMAScript</code> | Specifies that the grammar recognized by the regular expression engine shall be that used by ECMAScript in ECMA-262, as modified in 32.13.<br>SEE ALSO: ECMA-262 15.10                                                                                                    |
| <code>basic</code>      | Specifies that the grammar recognized by the regular expression engine shall be that used by basic regular expressions in POSIX.<br>SEE ALSO: POSIX, Base Definitions and Headers, Section 9.3                                                                            |
| <code>extended</code>   | Specifies that the grammar recognized by the regular expression engine shall be that used by extended regular expressions in POSIX.<br>SEE ALSO: POSIX, Base Definitions and Headers, Section 9.4                                                                         |
| <code>awk</code>        | Specifies that the grammar recognized by the regular expression engine shall be that used by the utility <code>awk</code> in POSIX.                                                                                                                                       |
| <code>grep</code>       | Specifies that the grammar recognized by the regular expression engine shall be that used by the utility <code>grep</code> in POSIX.                                                                                                                                      |
| <code>egrep</code>      | Specifies that the grammar recognized by the regular expression engine shall be that used by the utility <code>grep</code> when given the <code>-E</code> option in POSIX.                                                                                                |
| <code>multiline</code>  | Specifies that <code>^</code> shall match the beginning of a line and <code>\$</code> shall match the end of a line, if the <code>ECMAScript</code> engine is selected.                                                                                                   |

- <sup>1</sup> The type `match_flag_type` is an implementation-defined bitmask type (20.4.2.1.4). The constants of that type, except for `match_default` and `format_default`, are bitmask elements. The `match_default` and `format_default` constants are empty bitmasks. Matching a regular expression against a sequence of characters [`first`, `last`) proceeds according to the rules of the grammar specified for the regular expression object, modified according to the effects listed in Table 125 for any bitmask elements set.

Table 125 — `regex_constants::match_flag_type` effects when obtaining a match against a character container sequence [`first`, `last`).

| Element                       | Effect(s) if set                                                                                                                                                                                                                                                       |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>match_not_bol</code>    | The first character in the sequence [ <code>first</code> , <code>last</code> ) shall be treated as though it is not at the beginning of a line, so the character <code>^</code> in the regular expression shall not match [ <code>first</code> , <code>first</code> ). |
| <code>match_not_eol</code>    | The last character in the sequence [ <code>first</code> , <code>last</code> ) shall be treated as though it is not at the end of a line, so the character <code>\$</code> in the regular expression shall not match [ <code>last</code> , <code>last</code> ).         |
| <code>match_not_bow</code>    | The expression "\\b" shall not match the sub-sequence [ <code>first</code> , <code>first</code> ).                                                                                                                                                                     |
| <code>match_not_eow</code>    | The expression "\\b" shall not match the sub-sequence [ <code>last</code> , <code>last</code> ).                                                                                                                                                                       |
| <code>match_any</code>        | If more than one match is possible then any match is an acceptable result.                                                                                                                                                                                             |
| <code>match_not_null</code>   | The expression shall not match an empty sequence.                                                                                                                                                                                                                      |
| <code>match_continuous</code> | The expression shall only match a sub-sequence that begins at <code>first</code> .                                                                                                                                                                                     |

Table 125 — `regex_constants::match_flag_type` effects when obtaining a match against a character container sequence [`first`, `last`). (continued)

| Element                        | Effect(s) if set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>match_prev_avail</code>  | <code>--first</code> is a valid iterator position. When this flag is set the flags <code>match_not_bol</code> and <code>match_not_bow</code> shall be ignored by the regular expression algorithms (32.11) and iterators (32.12).                                                                                                                                                                                                                                                                      |
| <code>format_default</code>    | When a regular expression match is to be replaced by a new string, the new string shall be constructed using the rules used by the ECMAScript <code>replace</code> function in ECMA-262, part 15.5.4.11 <code>String.prototype.replace</code> . In addition, during search and replace operations all non-overlapping occurrences of the regular expression shall be located and replaced, and sections of the input that did not match the expression shall be copied unchanged to the output string. |
| <code>format_sed</code>        | When a regular expression match is to be replaced by a new string, the new string shall be constructed using the rules used by the <code>sed</code> utility in POSIX.                                                                                                                                                                                                                                                                                                                                  |
| <code>format_no_copy</code>    | During a search and replace operation, sections of the character container sequence being searched that do not match the regular expression shall not be copied to the output string.                                                                                                                                                                                                                                                                                                                  |
| <code>format_first_only</code> | When specified during a search and replace operation, only the first occurrence of the regular expression shall be replaced.                                                                                                                                                                                                                                                                                                                                                                           |

### 32.5.3 Implementation-defined `error_type`

[re.err]

```
namespace std::regex_constants {
 using error_type = T3;
 inline constexpr error_type error_collate = unspecified;
 inline constexpr error_type error_ctype = unspecified;
 inline constexpr error_type error_escape = unspecified;
 inline constexpr error_type error_backref = unspecified;
 inline constexpr error_type error_brack = unspecified;
 inline constexpr error_type error_paren = unspecified;
 inline constexpr error_type error_brace = unspecified;
 inline constexpr error_type error_badbrace = unspecified;
 inline constexpr error_type error_range = unspecified;
 inline constexpr error_type error_space = unspecified;
 inline constexpr error_type error_badrepeat = unspecified;
 inline constexpr error_type error_complexity = unspecified;
 inline constexpr error_type error_stack = unspecified;
}
```

- <sup>1</sup> The type `error_type` is an implementation-defined enumerated type (20.4.2.1.3). Values of type `error_type` represent the error conditions described in Table 126:

Table 126 — `error_type` values in the C locale

| Value                       | Error condition                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------|
| <code>error_collate</code>  | The expression contained an invalid collating element name.                           |
| <code>error_ctype</code>    | The expression contained an invalid character class name.                             |
| <code>error_escape</code>   | The expression contained an invalid escaped character, or a trailing escape.          |
| <code>error_backref</code>  | The expression contained an invalid back reference.                                   |
| <code>error_brack</code>    | The expression contained mismatched [ and ].                                          |
| <code>error_paren</code>    | The expression contained mismatched ( and ).                                          |
| <code>error_brace</code>    | The expression contained mismatched { and }                                           |
| <code>error_badbrace</code> | The expression contained an invalid range in a { } expression.                        |
| <code>error_range</code>    | The expression contained an invalid character range, such as [b-a] in most encodings. |
| <code>error_space</code>    | There was insufficient memory to convert the expression into a finite state machine.  |

Table 126 — `error_type` values in the C locale (continued)

| Value                         | Error condition                                                                                                         |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <code>error_badrepeat</code>  | One of <code>*?+{</code> was not preceded by a valid regular expression.                                                |
| <code>error_complexity</code> | The complexity of an attempted match against a regular expression exceeded a pre-set level.                             |
| <code>error_stack</code>      | There was insufficient memory to determine whether the regular expression could match the specified character sequence. |

### 32.6 Class `regex_error`

[re.badexp]

```
class regex_error : public runtime_error {
public:
 explicit regex_error(regex_constants::error_type ecode);
 regex_constants::error_type code() const;
};
```

<sup>1</sup> The class `regex_error` defines the type of objects thrown as exceptions to report errors from the regular expression library.

```
regex_error(regex_constants::error_type ecode);
```

<sup>2</sup> *Effects:* Constructs an object of class `regex_error`.

<sup>3</sup> *Ensures:* `ecode == code()`.

```
regex_constants::error_type code() const;
```

<sup>4</sup> *Returns:* The error code that was passed to the constructor.

### 32.7 Class template `regex_traits`

[re.traits]

```
namespace std {
 template<class charT>
 struct regex_traits {
 using char_type = charT;
 using string_type = basic_string<char_type>;
 using locale_type = locale;
 using char_class_type = bitmask_type;

 regex_traits();
 static size_t length(const char_type* p);
 charT translate(charT c) const;
 charT translate_nocase(charT c) const;
 template<class ForwardIterator>
 string_type transform(ForwardIterator first, ForwardIterator last) const;
 template<class ForwardIterator>
 string_type transform_primary(
 ForwardIterator first, ForwardIterator last) const;
 template<class ForwardIterator>
 string_type lookup_collatename(
 ForwardIterator first, ForwardIterator last) const;
 template<class ForwardIterator>
 char_class_type lookup_classname(
 ForwardIterator first, ForwardIterator last, bool icase = false) const;
 bool isctype(charT c, char_class_type f) const;
 int value(charT ch, int radix) const;
 locale_type imbue(locale_type l);
 locale_type getloc() const;
 };
}
```

<sup>1</sup> The specializations `regex_traits<char>` and `regex_traits<wchar_t>` shall be valid and shall satisfy the requirements for a regular expression traits class (32.3).



```
using char_class_type = bitmask_type;
```

- 2 The type `char_class_type` is used to represent a character classification and is capable of holding an implementation specific set returned by `lookup_classname`.

```
static size_t length(const char_type* p);
```

- 3 *Returns:* `char_traits<charT>::length(p)`.

```
charT translate(charT c) const;
```

- 4 *Returns:* `c`.

```
charT translate_nocase(charT c) const;
```

- 5 *Returns:* `use_facet<ctype<charT>>(getloc()).tolower(c)`.

```
template<class ForwardIterator>
```

```
string_type transform(ForwardIterator first, ForwardIterator last) const;
```

- 6 *Effects:* As if by:

```
string_type str(first, last);
return use_facet<collate<charT>>(
 getloc()).transform(&*str.begin(), &*str.begin() + str.length());
```

```
template<class ForwardIterator>
```

```
string_type transform_primary(ForwardIterator first, ForwardIterator last) const;
```

- 7 *Effects:* If

```
typeid(use_facet<collate<charT>>) == typeid(collate_byname<charT>)
```

and the form of the sort key returned by `collate_byname<charT>::transform(first, last)` is known and can be converted into a primary sort key then returns that key, otherwise returns an empty string.

```
template<class ForwardIterator>
```

```
string_type lookup_collatename(ForwardIterator first, ForwardIterator last) const;
```

- 8 *Returns:* A sequence of one or more characters that represents the collating element consisting of the character sequence designated by the iterator range `[first, last)`. Returns an empty string if the character sequence is not a valid collating element.

```
template<class ForwardIterator>
```

```
char_class_type lookup_classname(
 ForwardIterator first, ForwardIterator last, bool icase = false) const;
```

- 9 *Returns:* An unspecified value that represents the character classification named by the character sequence designated by the iterator range `[first, last)`. If the parameter `icase` is `true` then the returned mask identifies the character classification without regard to the case of the characters being matched, otherwise it does honor the case of the characters being matched.<sup>331</sup> The value returned shall be independent of the case of the characters in the character sequence. If the name is not recognized then returns `char_class_type()`.

- 10 *Remarks:* For `regex_traits<char>`, at least the narrow character names in Table 127 shall be recognized. For `regex_traits<wchar_t>`, at least the wide character names in Table 127 shall be recognized.

```
bool isctype(charT c, char_class_type f) const;
```

- 11 *Effects:* Determines if the character `c` is a member of the character classification represented by `f`.

- 12 *Returns:* Given the following function declaration:

```
// for exposition only
template<class C>
ctype_base::mask convert(typename regex_traits<C>::char_class_type f);
```

that returns a value in which each `ctype_base::mask` value corresponding to a value in `f` named in Table 127 is set, then the result is determined as if by:

---

331) For example, if the parameter `icase` is `true` then `[[:lower:]]` is the same as `[[:alpha:]]`.

```

ctype_base::mask m = convert<charT>(f);
const ctype<charT>& ct = use_facet<ctype<charT>>(getloc());
if (ct.is(m, c)) {
 return true;
} else if (c == ct.widen('_')) {
 charT w[1] = { ct.widen('w') };
 char_class_type x = lookup_classname(w, w+1);
 return (f&x) == x;
} else {
 return false;
}

```

[*Example:*

```

regex_traits<char> t;
string d("d");
string u("upper");
regex_traits<char>::char_class_type f;
f = t.lookup_classname(d.begin(), d.end());
f |= t.lookup_classname(u.begin(), u.end());
ctype_base::mask m = convert<char>(f); // m == ctype_base::digit|ctype_base::upper

```

— *end example*] [*Example:*

```

regex_traits<char> t;
string w("w");
regex_traits<char>::char_class_type f;
f = t.lookup_classname(w.begin(), w.end());
t.isctype('A', f); // returns true
t.isctype('_', f); // returns true
t.isctype(' ', f); // returns false

```

— *end example*]

```
int value(charT ch, int radix) const;
```

13 *Requires:* The value of `radix` shall be 8, 10, or 16.

14 *Returns:* The value represented by the digit `ch` in base `radix` if the character `ch` is a valid digit in base `radix`; otherwise returns -1.

```
locale_type imbue(locale_type loc);
```

15 *Effects:* Imbues `this` with a copy of the locale `loc`. [*Note:* Calling `imbue` with a different locale than the one currently in use invalidates all cached data held by `*this`. — *end note*]

16 *Returns:* If no locale has been previously imbued then a copy of the global locale in effect at the time of construction of `*this`, otherwise a copy of the last argument passed to `imbue`.

17 *Ensures:* `getloc() == loc`.

```
locale_type getloc() const;
```

18 *Returns:* If no locale has been imbued then a copy of the global locale in effect at the time of construction of `*this`, otherwise a copy of the last argument passed to `imbue`.

## 32.8 Class template `basic_regex`

[**re.regex**]

<sup>1</sup> For a char-like type `charT`, specializations of class template `basic_regex` represent regular expressions constructed from character sequences of `charT` characters. In the rest of 32.8, `charT` denotes a given char-like type. Storage for a regular expression is allocated and freed as necessary by the member functions of class `basic_regex`.

<sup>2</sup> Objects of type specialization of `basic_regex` are responsible for converting the sequence of `charT` objects to an internal representation. It is not specified what form this representation takes, nor how it is accessed by algorithms that operate on regular expressions. [*Note:* Implementations will typically declare some function templates as friends of `basic_regex` to achieve this — *end note*]

<sup>3</sup> The functions described in this Clause report errors by throwing exceptions of type `regex_error`.

Table 127 — Character class names and corresponding ctype masks

| Narrow character name | Wide character name | Corresponding ctype_base::mask value |
|-----------------------|---------------------|--------------------------------------|
| "alnum"               | L"alnum"            | ctype_base::alnum                    |
| "alpha"               | L"alpha"            | ctype_base::alpha                    |
| "blank"               | L"blank"            | ctype_base::blank                    |
| "cntrl"               | L"cntrl"            | ctype_base::cntrl                    |
| "digit"               | L"digit"            | ctype_base::digit                    |
| "d"                   | L"d"                | ctype_base::digit                    |
| "graph"               | L"graph"            | ctype_base::graph                    |
| "lower"               | L"lower"            | ctype_base::lower                    |
| "print"               | L"print"            | ctype_base::print                    |
| "punct"               | L"punct"            | ctype_base::punct                    |
| "space"               | L"space"            | ctype_base::space                    |
| "s"                   | L"s"                | ctype_base::space                    |
| "upper"               | L"upper"            | ctype_base::upper                    |
| "w"                   | L"w"                | ctype_base::alnum                    |
| "xdigit"              | L"xdigit"           | ctype_base::xdigit                   |

```

namespace std {
 template<class charT, class traits = regex_traits<charT>>
 class basic_regex {
 public:
 // types
 using value_type = charT;
 using traits_type = traits;
 using string_type = typename traits::string_type;
 using flag_type = regex_constants::syntax_option_type;
 using locale_type = typename traits::locale_type;

 // 32.5.1, constants
 static constexpr flag_type icase = regex_constants::icase;
 static constexpr flag_type nosubs = regex_constants::nosubs;
 static constexpr flag_type optimize = regex_constants::optimize;
 static constexpr flag_type collate = regex_constants::collate;
 static constexpr flag_type ECMAScript = regex_constants::ECMAScript;
 static constexpr flag_type basic = regex_constants::basic;
 static constexpr flag_type extended = regex_constants::extended;
 static constexpr flag_type awk = regex_constants::awk;
 static constexpr flag_type grep = regex_constants::grep;
 static constexpr flag_type egrep = regex_constants::egrep;
 static constexpr flag_type multiline = regex_constants::multiline;

 // 32.8.1, construct/copy/destroy
 basic_regex();
 explicit basic_regex(const charT* p, flag_type f = regex_constants::ECMAScript);
 basic_regex(const charT* p, size_t len, flag_type f = regex_constants::ECMAScript);
 basic_regex(const basic_regex&);
 basic_regex(basic_regex&&) noexcept;
 template<class ST, class SA>
 explicit basic_regex(const basic_string<charT, ST, SA>& p,
 flag_type f = regex_constants::ECMAScript);
 template<class ForwardIterator>
 basic_regex(ForwardIterator first, ForwardIterator last,
 flag_type f = regex_constants::ECMAScript);
 basic_regex(initializer_list<charT>, flag_type = regex_constants::ECMAScript);

 ~basic_regex();

```

```

basic_regex& operator=(const basic_regex&);
basic_regex& operator=(basic_regex&&) noexcept;
basic_regex& operator=(const charT* ptr);
basic_regex& operator=(initializer_list<charT> il);
template<class ST, class SA>
 basic_regex& operator=(const basic_string<charT, ST, SA>& p);

// 32.8.2, assign
basic_regex& assign(const basic_regex& that);
basic_regex& assign(basic_regex&& that) noexcept;
basic_regex& assign(const charT* ptr, flag_type f = regex_constants::ECMAScript);
basic_regex& assign(const charT* p, size_t len, flag_type f);
template<class string_traits, class A>
 basic_regex& assign(const basic_string<charT, string_traits, A>& s,
 flag_type f = regex_constants::ECMAScript);
template<class InputIterator>
 basic_regex& assign(InputIterator first, InputIterator last,
 flag_type f = regex_constants::ECMAScript);
basic_regex& assign(initializer_list<charT>,
 flag_type = regex_constants::ECMAScript);

// 32.8.3, const operations
unsigned mark_count() const;
flag_type flags() const;

// 32.8.4, locale
locale_type imbue(locale_type loc);
locale_type getloc() const;

// 32.8.5, swap
void swap(basic_regex&);
};

template<class ForwardIterator>
 basic_regex(ForwardIterator, ForwardIterator,
 regex_constants::syntax_option_type = regex_constants::ECMAScript)
 -> basic_regex<typename iterator_traits<ForwardIterator>::value_type>;
}

```

### 32.8.1 basic\_regex constructors

[re.regex.construct]

```
basic_regex();
```

1 *Effects:* Constructs an object of class `basic_regex` that does not match any character sequence.

```
explicit basic_regex(const charT* p, flag_type f = regex_constants::ECMAScript);
```

2 *Requires:* `p` shall not be a null pointer.

3 *Throws:* `regex_error` if `p` is not a valid regular expression.

4 *Effects:* Constructs an object of class `basic_regex`; the object's internal finite state machine is constructed from the regular expression contained in the array of `charT` of length `char_traits<charT>::length(p)` whose first element is designated by `p`, and interpreted according to the flags `f`.

5 *Ensures:* `flags()` returns `f`. `mark_count()` returns the number of marked sub-expressions within the expression.

```
basic_regex(const charT* p, size_t len, flag_type f = regex_constants::ECMAScript);
```

6 *Requires:* `p` shall not be a null pointer.

7 *Throws:* `regex_error` if `p` is not a valid regular expression.

8 *Effects:* Constructs an object of class `basic_regex`; the object's internal finite state machine is constructed from the regular expression contained in the sequence of characters `[p, p+len)`, and interpreted according the flags specified in `f`.

9 *Ensures:* `flags()` returns `f`. `mark_count()` returns the number of marked sub-expressions within the expression.

```
basic_regex(const basic_regex& e);
```

10 *Effects:* Constructs an object of class `basic_regex` as a copy of the object `e`.

11 *Ensures:* `flags()` and `mark_count()` return `e.flags()` and `e.mark_count()`, respectively.

```
basic_regex(basic_regex&& e) noexcept;
```

12 *Effects:* Move constructs an object of class `basic_regex` from `e`.

13 *Ensures:* `flags()` and `mark_count()` return the values that `e.flags()` and `e.mark_count()`, respectively, had before construction. `e` is in a valid state with unspecified value.

```
template<class ST, class SA>
explicit basic_regex(const basic_string<charT, ST, SA>& s,
 flag_type f = regex_constants::ECMAScript);
```

14 *Throws:* `regex_error` if `s` is not a valid regular expression.

15 *Effects:* Constructs an object of class `basic_regex`; the object's internal finite state machine is constructed from the regular expression contained in the string `s`, and interpreted according to the flags specified in `f`.

16 *Ensures:* `flags()` returns `f`. `mark_count()` returns the number of marked sub-expressions within the expression.

```
template<class ForwardIterator>
basic_regex(ForwardIterator first, ForwardIterator last,
 flag_type f = regex_constants::ECMAScript);
```

17 *Throws:* `regex_error` if the sequence `[first, last)` is not a valid regular expression.

18 *Effects:* Constructs an object of class `basic_regex`; the object's internal finite state machine is constructed from the regular expression contained in the sequence of characters `[first, last)`, and interpreted according to the flags specified in `f`.

19 *Ensures:* `flags()` returns `f`. `mark_count()` returns the number of marked sub-expressions within the expression.

```
basic_regex(initializer_list<charT> il, flag_type f = regex_constants::ECMAScript);
```

20 *Effects:* Same as `basic_regex(il.begin(), il.end(), f)`.

### 32.8.2 `basic_regex` assign

[re.regex.assign]

```
basic_regex& operator=(const basic_regex& e);
```

1 *Effects:* Copies `e` into `*this` and returns `*this`.

2 *Ensures:* `flags()` and `mark_count()` return `e.flags()` and `e.mark_count()`, respectively.

```
basic_regex& operator=(basic_regex&& e) noexcept;
```

3 *Effects:* Move assigns from `e` into `*this` and returns `*this`.

4 *Ensures:* `flags()` and `mark_count()` return the values that `e.flags()` and `e.mark_count()`, respectively, had before assignment. `e` is in a valid state with unspecified value.

```
basic_regex& operator=(const charT* ptr);
```

5 *Requires:* `ptr` shall not be a null pointer.

6 *Effects:* Returns `assign(ptr)`.

```
basic_regex& operator=(initializer_list<charT> il);
```

7 *Effects:* Returns `assign(il.begin(), il.end())`.

```
template<class ST, class SA>
basic_regex& operator=(const basic_string<charT, ST, SA>& p);
```

8 *Effects:* Returns `assign(p)`.

```

basic_regex& assign(const basic_regex& that);
9 Effects: Equivalent to: return *this = that;

basic_regex& assign(basic_regex&& that) noexcept;
10 Effects: Equivalent to: return *this = std::move(that);

basic_regex& assign(const charT* ptr, flag_type f = regex_constants::ECMAScript);
11 Returns: assign(string_type(ptr), f).

basic_regex& assign(const charT* ptr, size_t len, flag_type f = regex_constants::ECMAScript);
12 Returns: assign(string_type(ptr, len), f).

template<class string_traits, class A>
 basic_regex& assign(const basic_string<charT, string_traits, A>& s,
 flag_type f = regex_constants::ECMAScript);
13 Throws: regex_error if s is not a valid regular expression.
14 Returns: *this.
15 Effects: Assigns the regular expression contained in the string s, interpreted according the flags specified
 in f. If an exception is thrown, *this is unchanged.
16 Ensures: If no exception is thrown, flags() returns f and mark_count() returns the number of marked
 sub-expressions within the expression.

template<class InputIterator>
 basic_regex& assign(InputIterator first, InputIterator last,
 flag_type f = regex_constants::ECMAScript);
17 Requires: InputIterator shall satisfy the Cpp17InputIterator requirements (28.2.3).
18 Returns: assign(string_type(first, last), f).

basic_regex& assign(initializer_list<charT> il,
 flag_type f = regex_constants::ECMAScript);
19 Effects: Same as assign(il.begin(), il.end(), f).
20 Returns: *this.

```

### 32.8.3 basic\_regex constant operations [re.regex.operations]

```

unsigned mark_count() const;
1 Effects: Returns the number of marked sub-expressions within the regular expression.

flag_type flags() const;
2 Effects: Returns a copy of the regular expression syntax flags that were passed to the object's constructor
 or to the last call to assign.

```

### 32.8.4 basic\_regex locale [re.regex.locale]

```

locale_type imbue(locale_type loc);
1 Effects: Returns the result of traits_inst.imbue(loc) where traits_inst is a (default-initialized)
 instance of the template type argument traits stored within the object. After a call to imbue the
 basic_regex object does not match any character sequence.

locale_type getloc() const;
2 Effects: Returns the result of traits_inst.getloc() where traits_inst is a (default-initialized)
 instance of the template parameter traits stored within the object.

```

### 32.8.5 basic\_regex swap [re.regex.swap]

```

void swap(basic_regex& e);
1 Effects: Swaps the contents of the two regular expressions.

```

2 *Ensures:* \*this contains the regular expression that was in e, e contains the regular expression that was in \*this.

3 *Complexity:* Constant time.

### 32.8.6 basic\_regex non-member functions [re.regex.nonmemb]

#### 32.8.6.1 basic\_regex non-member swap [re.regex.nmswap]

```
template<class charT, class traits>
void swap(basic_regex<charT, traits>& lhs, basic_regex<charT, traits>& rhs);
```

1 *Effects:* Calls lhs.swap(rhs).

### 32.9 Class template sub\_match [re.submatch]

1 Class template sub\_match denotes the sequence of characters matched by a particular marked sub-expression.

```
namespace std {
template<class BidirectionalIterator>
class sub_match : public pair<BidirectionalIterator, BidirectionalIterator> {
public:
using value_type =
typename iterator_traits<BidirectionalIterator>::value_type;
using difference_type =
typename iterator_traits<BidirectionalIterator>::difference_type;
using iterator = BidirectionalIterator;
using string_type = basic_string<value_type>;

bool matched;

constexpr sub_match();

difference_type length() const;
operator string_type() const;
string_type str() const;

int compare(const sub_match& s) const;
int compare(const string_type& s) const;
int compare(const value_type* s) const;
};
}
```

#### 32.9.1 sub\_match members [re.submatch.members]

```
constexpr sub_match();
```

1 *Effects:* Value-initializes the pair base class subobject and the member matched.

```
difference_type length() const;
```

2 *Returns:* matched ? distance(first, second) : 0.

```
operator string_type() const;
```

3 *Returns:* matched ? string\_type(first, second) : string\_type().

```
string_type str() const;
```

4 *Returns:* matched ? string\_type(first, second) : string\_type().

```
int compare(const sub_match& s) const;
```

5 *Returns:* str().compare(s.str()).

```
int compare(const string_type& s) const;
```

6 *Returns:* str().compare(s).

```
int compare(const value_type* s) const;
```

7 *Returns:* str().compare(s).

**32.9.2 sub\_match non-member operators**

[re.submatch.op]

```

template<class BiIter>
 bool operator==(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
1 Returns: lhs.compare(rhs) == 0.

template<class BiIter>
 bool operator!=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
2 Returns: lhs.compare(rhs) != 0.

template<class BiIter>
 bool operator<(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
3 Returns: lhs.compare(rhs) < 0.

template<class BiIter>
 bool operator>(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
4 Returns: lhs.compare(rhs) > 0.

template<class BiIter>
 bool operator<=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
5 Returns: lhs.compare(rhs) <= 0.

template<class BiIter>
 bool operator>=(const sub_match<BiIter>& lhs, const sub_match<BiIter>& rhs);
6 Returns: lhs.compare(rhs) >= 0.

template<class BiIter, class ST, class SA>
 bool operator==(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
7 Returns:
 rhs.compare(typename sub_match<BiIter>::string_type(lhs.data(), lhs.size())) == 0

template<class BiIter, class ST, class SA>
 bool operator!=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
8 Returns: !(lhs == rhs).

template<class BiIter, class ST, class SA>
 bool operator<(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
9 Returns:
 rhs.compare(typename sub_match<BiIter>::string_type(lhs.data(), lhs.size())) > 0

template<class BiIter, class ST, class SA>
 bool operator>(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
10 Returns: rhs < lhs.

template<class BiIter, class ST, class SA>
 bool operator<=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
11 Returns: !(rhs < lhs).

```



```

template<class BiIter, class ST, class SA>
 bool operator>=(
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& lhs,
 const sub_match<BiIter>& rhs);
12 Returns: !(lhs < rhs).

template<class BiIter, class ST, class SA>
 bool operator==(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
13 Returns:
 lhs.compare(typename sub_match<BiIter>::string_type(rhs.data(), rhs.size())) == 0

template<class BiIter, class ST, class SA>
 bool operator!=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
14 Returns: !(lhs == rhs).

template<class BiIter, class ST, class SA>
 bool operator<(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
15 Returns:
 lhs.compare(typename sub_match<BiIter>::string_type(rhs.data(), rhs.size())) < 0

template<class BiIter, class ST, class SA>
 bool operator>(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
16 Returns: rhs < lhs.

template<class BiIter, class ST, class SA>
 bool operator<=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
17 Returns: !(rhs < lhs).

template<class BiIter, class ST, class SA>
 bool operator>=(
 const sub_match<BiIter>& lhs,
 const basic_string<typename iterator_traits<BiIter>::value_type, ST, SA>& rhs);
18 Returns: !(lhs < rhs).

template<class BiIter>
 bool operator==(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
19 Returns: rhs.compare(lhs) == 0.

template<class BiIter>
 bool operator!=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
20 Returns: !(lhs == rhs).

template<class BiIter>
 bool operator<(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
21 Returns: rhs.compare(lhs) > 0.

```

```

template<class BiIter>
 bool operator>(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
22 Returns: rhs < lhs.

template<class BiIter>
 bool operator<=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
23 Returns: !(rhs < lhs).

template<class BiIter>
 bool operator>=(const typename iterator_traits<BiIter>::value_type* lhs,
 const sub_match<BiIter>& rhs);
24 Returns: !(lhs < rhs).

template<class BiIter>
 bool operator==(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
25 Returns: lhs.compare(rhs) == 0.

template<class BiIter>
 bool operator!=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
26 Returns: !(lhs == rhs).

template<class BiIter>
 bool operator<(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
27 Returns: lhs.compare(rhs) < 0.

template<class BiIter>
 bool operator>(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
28 Returns: rhs < lhs.

template<class BiIter>
 bool operator<=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
29 Returns: !(rhs < lhs).

template<class BiIter>
 bool operator>=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type* rhs);
30 Returns: !(lhs < rhs).

template<class BiIter>
 bool operator==(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
31 Returns: rhs.compare(typename sub_match<BiIter>::string_type(1, lhs)) == 0.

template<class BiIter>
 bool operator!=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
32 Returns: !(lhs == rhs).

template<class BiIter>
 bool operator<(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
33 Returns: rhs.compare(typename sub_match<BiIter>::string_type(1, lhs)) > 0.

```

```

template<class BiIter>
 bool operator>(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
34 Returns: rhs < lhs.

template<class BiIter>
 bool operator<=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
35 Returns: !(rhs < lhs).

template<class BiIter>
 bool operator>=(const typename iterator_traits<BiIter>::value_type& lhs,
 const sub_match<BiIter>& rhs);
36 Returns: !(lhs < rhs).

template<class BiIter>
 bool operator==(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
37 Returns: lhs.compare(typename sub_match<BiIter>::string_type(1, rhs)) == 0.

template<class BiIter>
 bool operator!=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
38 Returns: !(lhs == rhs).

template<class BiIter>
 bool operator<(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
39 Returns: lhs.compare(typename sub_match<BiIter>::string_type(1, rhs)) < 0.

template<class BiIter>
 bool operator>(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
40 Returns: rhs < lhs.

template<class BiIter>
 bool operator<=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
41 Returns: !(rhs < lhs).

template<class BiIter>
 bool operator>=(const sub_match<BiIter>& lhs,
 const typename iterator_traits<BiIter>::value_type& rhs);
42 Returns: !(lhs < rhs).

template<class charT, class ST, class BiIter>
 basic_ostream<charT, ST>&
 operator<<(basic_ostream<charT, ST>& os, const sub_match<BiIter>& m);
43 Returns: os << m.str().

```

### 32.10 Class template `match_results`

[re.results]

- 1 Class template `match_results` denotes a collection of character sequences representing the result of a regular expression match. Storage for the collection is allocated and freed as necessary by the member functions of class template `match_results`.
- 2 The class template `match_results` satisfies the requirements of an allocator-aware container and of a sequence container (27.2.1, 27.2.3) except that only operations defined for const-qualified sequence containers are supported and that the semantics of comparison functions are different from those required for a container.
- 3 A default-constructed `match_results` object has no fully established result state. A match result is *ready* when, as a consequence of a completed regular expression match modifying such an object, its result state

becomes fully established. The effects of calling most member functions from a `match_results` object that is not ready are undefined.

- 4 The `sub_match` object stored at index 0 represents sub-expression 0, i.e., the whole match. In this case the `sub_match` member `matched` is always `true`. The `sub_match` object stored at index `n` denotes what matched the marked sub-expression `n` within the matched expression. If the sub-expression `n` participated in a regular expression match then the `sub_match` member `matched` evaluates to `true`, and members `first` and `second` denote the range of characters `[first, second)` which formed that match. Otherwise `matched` is `false`, and members `first` and `second` point to the end of the sequence that was searched. [*Note: The `sub_match` objects representing different sub-expressions that did not participate in a regular expression match need not be distinct. — end note*]

```
namespace std {
 template<class BidirectionalIterator,
 class Allocator = allocator<sub_match<BidirectionalIterator>>>
 class match_results {
 public:
 using value_type = sub_match<BidirectionalIterator>;
 using const_reference = const value_type&;
 using reference = value_type&;
 using const_iterator = implementation-defined;
 using iterator = const_iterator;
 using difference_type =
 typename iterator_traits<BidirectionalIterator>::difference_type;
 using size_type = typename allocator_traits<Allocator>::size_type;
 using allocator_type = Allocator;
 using char_type =
 typename iterator_traits<BidirectionalIterator>::value_type;
 using string_type = basic_string<char_type>;

 // 32.10.1, construct/copy/destroy
 match_results() : match_results(Allocator()) {}
 explicit match_results(const Allocator&);
 match_results(const match_results& m);
 match_results(match_results&& m) noexcept;
 match_results& operator=(const match_results& m);
 match_results& operator=(match_results&& m);
 ~match_results();

 // 32.10.2, state
 bool ready() const;

 // 32.10.3, size
 size_type size() const;
 size_type max_size() const;
 [[nodiscard]] bool empty() const;

 // 32.10.4, element access
 difference_type length(size_type sub = 0) const;
 difference_type position(size_type sub = 0) const;
 string_type str(size_type sub = 0) const;
 const_reference operator[](size_type n) const;

 const_reference prefix() const;
 const_reference suffix() const;
 const_iterator begin() const;
 const_iterator end() const;
 const_iterator cbegin() const;
 const_iterator cend() const;

 // 32.10.5, format
 template<class OutputIter>
 OutputIter
 format(OutputIter out,
```

```

 const char_type* fmt_first, const char_type* fmt_last,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
template<class OutputIter, class ST, class SA>
OutputIter
 format(OutputIter out,
 const basic_string<char_type, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
template<class ST, class SA>
basic_string<char_type, ST, SA>
 format(const basic_string<char_type, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
string_type
 format(const char_type* fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;

// 32.10.6, allocator
allocator_type get_allocator() const;

// 32.10.7, swap
void swap(match_results& that);
};
}

```

### 32.10.1 match\_results constructors [re.results.const]

- <sup>1</sup> In all `match_results` constructors, a copy of the `Allocator` argument shall be used for any memory allocation performed by the constructor or member functions during the lifetime of the object.

```
explicit match_results(const Allocator& a);
```

- <sup>2</sup> *Effects:* Constructs an object of class `match_results`.

- <sup>3</sup> *Ensures:* `ready()` returns `false`. `size()` returns 0.

```
match_results(const match_results& m);
```

- <sup>4</sup> *Effects:* Constructs an object of class `match_results`, as a copy of `m`.

```
match_results(match_results&& m) noexcept;
```

- <sup>5</sup> *Effects:* Move constructs an object of class `match_results` from `m` satisfying the same postconditions as Table 128. Additionally, the stored `Allocator` value is move constructed from `m.get_allocator()`.

- <sup>6</sup> *Throws:* Nothing.

```
match_results& operator=(const match_results& m);
```

- <sup>7</sup> *Effects:* Assigns `m` to `*this`. The postconditions of this function are indicated in Table 128.

```
match_results& operator=(match_results&& m);
```

- <sup>8</sup> *Effects:* Move-assigns `m` to `*this`. The postconditions of this function are indicated in Table 128.

Table 128 — `match_results` assignment operator effects

| Element                  | Value                                                                    |
|--------------------------|--------------------------------------------------------------------------|
| <code>ready()</code>     | <code>m.ready()</code>                                                   |
| <code>size()</code>      | <code>m.size()</code>                                                    |
| <code>str(n)</code>      | <code>m.str(n)</code> for all integers <code>n &lt; m.size()</code>      |
| <code>prefix()</code>    | <code>m.prefix()</code>                                                  |
| <code>suffix()</code>    | <code>m.suffix()</code>                                                  |
| <code>(*this)[n]</code>  | <code>m[n]</code> for all integers <code>n &lt; m.size()</code>          |
| <code>length(n)</code>   | <code>m.length(n)</code> for all integers <code>n &lt; m.size()</code>   |
| <code>position(n)</code> | <code>m.position(n)</code> for all integers <code>n &lt; m.size()</code> |

**32.10.2 match\_results state** [re.results.state]

```
bool ready() const;
```

1 *Returns:* true if *\*this* has a fully established result state, otherwise false.

**32.10.3 match\_results size** [re.results.size]

```
size_type size() const;
```

1 *Returns:* One plus the number of marked sub-expressions in the regular expression that was matched if *\*this* represents the result of a successful match. Otherwise returns 0. [Note: The state of a *match\_results* object can be modified only by passing that object to *regex\_match* or *regex\_search*. Subclauses 32.11.2 and 32.11.3 specify the effects of those algorithms on their *match\_results* arguments. — end note]

```
size_type max_size() const;
```

2 *Returns:* The maximum number of *sub\_match* elements that can be stored in *\*this*.

```
[[nodiscard]] bool empty() const;
```

3 *Returns:* *size()* == 0.

**32.10.4 match\_results element access** [re.results.acc]

```
difference_type length(size_type sub = 0) const;
```

1 *Requires:* *ready()* == true.

2 *Returns:* *(\*this)[sub].length()*.

```
difference_type position(size_type sub = 0) const;
```

3 *Requires:* *ready()* == true.

4 *Returns:* The distance from the start of the target sequence to *(\*this)[sub].first*.

```
string_type str(size_type sub = 0) const;
```

5 *Requires:* *ready()* == true.

6 *Returns:* *string\_type((\*this)[sub])*.

```
const_reference operator[](size_type n) const;
```

7 *Requires:* *ready()* == true.

8 *Returns:* A reference to the *sub\_match* object representing the character sequence that matched marked sub-expression *n*. If *n* == 0 then returns a reference to a *sub\_match* object representing the character sequence that matched the whole regular expression. If *n* >= *size()* then returns a *sub\_match* object representing an unmatched sub-expression.

```
const_reference prefix() const;
```

9 *Requires:* *ready()* == true.

10 *Returns:* A reference to the *sub\_match* object representing the character sequence from the start of the string being matched/searched to the start of the match found.

```
const_reference suffix() const;
```

11 *Requires:* *ready()* == true.

12 *Returns:* A reference to the *sub\_match* object representing the character sequence from the end of the match found to the end of the string being matched/searched.

```
const_iterator begin() const;
```

```
const_iterator cbegin() const;
```

13 *Returns:* A starting iterator that enumerates over all the sub-expressions stored in *\*this*.

```
const_iterator end() const;
```

```
const_iterator cend() const;
```

14 *Returns:* A terminating iterator that enumerates over all the sub-expressions stored in *\*this*.

### 32.10.5 match\_results formatting [re.results.form]

```
template<class OutputIter>
```

```
OutputIter format(
 OutputIter out,
 const char_type* fmt_first, const char_type* fmt_last,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
```

1 *Requires:* `ready() == true` and `OutputIter` shall satisfy the requirements for a *Cpp17OutputIterator* (28.2.4).

2 *Effects:* Copies the character sequence `[fmt_first, fmt_last)` to `OutputIter out`. Replaces each format specifier or escape sequence in the copied range with either the character(s) it represents or the sequence of characters within *\*this* to which it refers. The bitmasks specified in `flags` determine which format specifiers and escape sequences are recognized.

3 *Returns:* `out`.

```
template<class OutputIter, class ST, class SA>
```

```
OutputIter format(
 OutputIter out,
 const basic_string<char_type, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
```

4 *Effects:* Equivalent to:

```
return format(out, fmt.data(), fmt.data() + fmt.size(), flags);
```

```
template<class ST, class SA>
```

```
basic_string<char_type, ST, SA> format(
 const basic_string<char_type, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
```

5 *Requires:* `ready() == true`.

6 *Effects:* Constructs an empty string result of type `basic_string<char_type, ST, SA>` and calls:

```
format(back_inserter(result), fmt, flags);
```

7 *Returns:* `result`.

```
string_type format(
```

```
const char_type* fmt,
 regex_constants::match_flag_type flags = regex_constants::format_default) const;
```

8 *Requires:* `ready() == true`.

9 *Effects:* Constructs an empty string result of type `string_type` and calls:

```
format(back_inserter(result), fmt, fmt + char_traits<char_type>::length(fmt), flags);
```

10 *Returns:* `result`.

### 32.10.6 match\_results allocator [re.results.all]

```
allocator_type get_allocator() const;
```

1 *Returns:* A copy of the Allocator that was passed to the object's constructor or, if that allocator has been replaced, a copy of the most recent replacement.

### 32.10.7 match\_results swap [re.results.swap]

```
void swap(match_results& that);
```

1 *Effects:* Swaps the contents of the two sequences.

2 *Ensures:* *\*this* contains the sequence of matched sub-expressions that were in *that*, *that* contains the sequence of matched sub-expressions that were in *\*this*.

3 *Complexity:* Constant time.

```
template<class BidirectionalIterator, class Allocator>
void swap(match_results<BidirectionalIterator, Allocator>& m1,
 match_results<BidirectionalIterator, Allocator>& m2);
```

4 *Effects:* As if by `m1.swap(m2)`.

### 32.10.8 match\_results non-member functions [re.results.nonmember]

```
template<class BidirectionalIterator, class Allocator>
bool operator==(const match_results<BidirectionalIterator, Allocator>& m1,
 const match_results<BidirectionalIterator, Allocator>& m2);
```

1 *Returns:* `true` if neither match result is ready, `false` if one match result is ready and the other is not. If both match results are ready, returns `true` only if:

- (1.1) — `m1.empty() && m2.empty()`, or
- (1.2) — `!m1.empty() && !m2.empty()`, and the following conditions are satisfied:
  - (1.2.1) — `m1.prefix() == m2.prefix()`,
  - (1.2.2) — `m1.size() == m2.size() && equal(m1.begin(), m1.end(), m2.begin())`, and
  - (1.2.3) — `m1.suffix() == m2.suffix()`.

[*Note:* The algorithm `equal` is defined in [Clause 29](#). — *end note*]

```
template<class BidirectionalIterator, class Allocator>
bool operator!=(const match_results<BidirectionalIterator, Allocator>& m1,
 const match_results<BidirectionalIterator, Allocator>& m2);
```

2 *Returns:* `!(m1 == m2)`.

### 32.11 Regular expression algorithms [re.alg]

#### 32.11.1 Exceptions [re.except]

1 The algorithms described in this subclause may throw an exception of type `regex_error`. If such an exception `e` is thrown, `e.code()` shall return either `regex_constants::error_complexity` or `regex_constants::error_stack`.

#### 32.11.2 regex\_match [re.alg.match]

```
template<class BidirectionalIterator, class Allocator, class charT, class traits>
bool regex_match(BidirectionalIterator first, BidirectionalIterator last,
 match_results<BidirectionalIterator, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

1 *Requires:* The type `BidirectionalIterator` shall satisfy the *Cpp17BidirectionalIterator* requirements ([28.2.6](#)).

2 *Effects:* Determines whether there is a match between the regular expression `e`, and all of the character sequence `[first, last)`. The parameter `flags` is used to control how the expression is matched against the character sequence. When determining if there is a match, only potential matches that match the entire character sequence are considered. Returns `true` if such a match exists, `false` otherwise. [*Example:*

```
std::regex re("Get|GetValue");
std::cmatch m;
regex_search("GetValue", m, re); // returns true, and m[0] contains "Get"
regex_match ("GetValue", m, re); // returns true, and m[0] contains "GetValue"
regex_search("GetValues", m, re); // returns true, and m[0] contains "Get"
regex_match ("GetValues", m, re); // returns false
```

— *end example*]

3 *Ensures:* `m.ready() == true` in all cases. If the function returns `false`, then the effect on parameter `m` is unspecified except that `m.size()` returns 0 and `m.empty()` returns `true`. Otherwise the effects on parameter `m` are given in [Table 129](#).



Table 129 — Effects of `regex_match` algorithm

| Element                         | Value                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>m.size()</code>           | <code>1 + e.mark_count()</code>                                                                                                                                                                   |
| <code>m.empty()</code>          | <code>false</code>                                                                                                                                                                                |
| <code>m.prefix().first</code>   | <code>first</code>                                                                                                                                                                                |
| <code>m.prefix().second</code>  | <code>first</code>                                                                                                                                                                                |
| <code>m.prefix().matched</code> | <code>false</code>                                                                                                                                                                                |
| <code>m.suffix().first</code>   | <code>last</code>                                                                                                                                                                                 |
| <code>m.suffix().second</code>  | <code>last</code>                                                                                                                                                                                 |
| <code>m.suffix().matched</code> | <code>false</code>                                                                                                                                                                                |
| <code>m[0].first</code>         | <code>first</code>                                                                                                                                                                                |
| <code>m[0].second</code>        | <code>last</code>                                                                                                                                                                                 |
| <code>m[0].matched</code>       | <code>true</code>                                                                                                                                                                                 |
| <code>m[n].first</code>         | For all integers $0 < n < m.size()$ , the start of the sequence that matched sub-expression $n$ . Alternatively, if sub-expression $n$ did not participate in the match, then <code>last</code> . |
| <code>m[n].second</code>        | For all integers $0 < n < m.size()$ , the end of the sequence that matched sub-expression $n$ . Alternatively, if sub-expression $n$ did not participate in the match, then <code>last</code> .   |
| <code>m[n].matched</code>       | For all integers $0 < n < m.size()$ , <code>true</code> if sub-expression $n$ participated in the match, <code>false</code> otherwise.                                                            |

```
template<class BidirectionalIterator, class charT, class traits>
bool regex_match(BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 4 *Effects:* Behaves “as if” by constructing an instance of `match_results<BidirectionalIterator>` `what`, and then returning the result of `regex_match(first, last, what, e, flags)`.

```
template<class charT, class Allocator, class traits>
bool regex_match(const charT* str,
 match_results<const charT*, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 5 *Returns:* `regex_match(str, str + char_traits<charT>::length(str), m, e, flags)`.

```
template<class ST, class SA, class Allocator, class charT, class traits>
bool regex_match(const basic_string<charT, ST, SA>& s,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 6 *Returns:* `regex_match(s.begin(), s.end(), m, e, flags)`.

```
template<class charT, class traits>
bool regex_match(const charT* str,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 7 *Returns:* `regex_match(str, str + char_traits<charT>::length(str), e, flags)`

```
template<class ST, class SA, class charT, class traits>
bool regex_match(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 8 *Returns:* `regex_match(s.begin(), s.end(), e, flags)`.

32.11.3 `regex_search`

[re.alg.search]

```
template<class BidirectionalIterator, class Allocator, class charT, class traits>
bool regex_search(BidirectionalIterator first, BidirectionalIterator last,
 match_results<BidirectionalIterator, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

1 *Requires:* Type `BidirectionalIterator` shall satisfy the *Cpp17BidirectionalIterator* requirements (28.2.6).

2 *Effects:* Determines whether there is some sub-sequence within `[first, last)` that matches the regular expression `e`. The parameter `flags` is used to control how the expression is matched against the character sequence. Returns `true` if such a sequence exists, `false` otherwise.

3 *Ensures:* `m.ready() == true` in all cases. If the function returns `false`, then the effect on parameter `m` is unspecified except that `m.size()` returns 0 and `m.empty()` returns `true`. Otherwise the effects on parameter `m` are given in Table 130.

Table 130 — Effects of `regex_search` algorithm

| Element                         | Value                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>m.size()</code>           | <code>1 + e.mark_count()</code>                                                                                                                                                                                         |
| <code>m.empty()</code>          | <code>false</code>                                                                                                                                                                                                      |
| <code>m.prefix().first</code>   | <code>first</code>                                                                                                                                                                                                      |
| <code>m.prefix().second</code>  | <code>m[0].first</code>                                                                                                                                                                                                 |
| <code>m.prefix().matched</code> | <code>m.prefix().first != m.prefix().second</code>                                                                                                                                                                      |
| <code>m.suffix().first</code>   | <code>m[0].second</code>                                                                                                                                                                                                |
| <code>m.suffix().second</code>  | <code>last</code>                                                                                                                                                                                                       |
| <code>m.suffix().matched</code> | <code>m.suffix().first != m.suffix().second</code>                                                                                                                                                                      |
| <code>m[0].first</code>         | The start of the sequence of characters that matched the regular expression                                                                                                                                             |
| <code>m[0].second</code>        | The end of the sequence of characters that matched the regular expression                                                                                                                                               |
| <code>m[0].matched</code>       | <code>true</code>                                                                                                                                                                                                       |
| <code>m[n].first</code>         | For all integers $0 < n < m.size()$ , the start of the sequence that matched sub-expression <code>n</code> . Alternatively, if sub-expression <code>n</code> did not participate in the match, then <code>last</code> . |
| <code>m[n].second</code>        | For all integers $0 < n < m.size()$ , the end of the sequence that matched sub-expression <code>n</code> . Alternatively, if sub-expression <code>n</code> did not participate in the match, then <code>last</code> .   |
| <code>m[n].matched</code>       | For all integers $0 < n < m.size()$ , <code>true</code> if sub-expression <code>n</code> participated in the match, <code>false</code> otherwise.                                                                       |

```
template<class charT, class Allocator, class traits>
bool regex_search(const charT* str, match_results<const charT*, Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

4 *Returns:* `regex_search(str, str + char_traits<charT>::length(str), m, e, flags)`.

```
template<class ST, class SA, class Allocator, class charT, class traits>
bool regex_search(const basic_string<charT, ST, SA>& s,
 match_results<typename basic_string<charT, ST, SA>::const_iterator,
 Allocator>& m,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

5 *Returns:* `regex_search(s.begin(), s.end(), m, e, flags)`.

```
template<class BidirectionalIterator, class charT, class traits>
bool regex_search(BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 6 *Effects:* Behaves “as if” by constructing an object what of type `match_results<BidirectionalIterator>` and returning `regex_search(first, last, what, e, flags)`.

```
template<class charT, class traits>
bool regex_search(const charT* str,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 7 *Returns:* `regex_search(str, str + char_traits<charT>::length(str), e, flags)`.

```
template<class ST, class SA, class charT, class traits>
bool regex_search(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 8 *Returns:* `regex_search(s.begin(), s.end(), e, flags)`.

### 32.11.4 regex\_replace

[re.alg.replace]

```
template<class OutputIterator, class BidirectionalIterator,
 class traits, class charT, class ST, class SA>
OutputIterator
regex_replace(OutputIterator out,
 BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

```
template<class OutputIterator, class BidirectionalIterator, class traits, class charT>
OutputIterator
regex_replace(OutputIterator out,
 BidirectionalIterator first, BidirectionalIterator last,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);
```

- 1 *Effects:* Constructs a `regex_iterator` object `i` as if by

```
regex_iterator<BidirectionalIterator, charT, traits> i(first, last, e, flags)
```

and uses `i` to enumerate through all of the matches `m` of type `match_results<BidirectionalIterator>` that occur within the sequence `[first, last)`. If no such matches are found and `!(flags & regex_constants::format_no_copy)`, then calls

```
out = copy(first, last, out)
```

If any matches are found then, for each such match:

- (1.1) — If `!(flags & regex_constants::format_no_copy)`, calls

```
out = copy(m.prefix().first, m.prefix().second, out)
```

- (1.2) — Then calls

```
out = m.format(out, fmt, flags)
```

for the first form of the function and

```
out = m.format(out, fmt, fmt + char_traits<charT>::length(fmt), flags)
```

for the second.

Finally, if such a match is found and `!(flags & regex_constants::format_no_copy)`, calls

```
out = copy(last_m.suffix().first, last_m.suffix().second, out)
```

where `last_m` is a copy of the last match found. If `flags & regex_constants::format_first_only` is nonzero, then only the first match found is replaced.

- 2 *Returns:* `out`.

```

template<class traits, class charT, class ST, class SA, class FST, class FSA>
 basic_string<charT, ST, SA>
 regex_replace(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, FST, FSA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);

```

```

template<class traits, class charT, class ST, class SA>
 basic_string<charT, ST, SA>
 regex_replace(const basic_string<charT, ST, SA>& s,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);

```

3 *Effects:* Constructs an empty string result of type `basic_string<charT, ST, SA>` and calls:

```

 regex_replace(back_inserter(result), s.begin(), s.end(), e, fmt, flags);

```

4 *Returns:* result.

```

template<class traits, class charT, class ST, class SA>
 basic_string<charT>
 regex_replace(const charT* s,
 const basic_regex<charT, traits>& e,
 const basic_string<charT, ST, SA>& fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);

```

```

template<class traits, class charT>
 basic_string<charT>
 regex_replace(const charT* s,
 const basic_regex<charT, traits>& e,
 const charT* fmt,
 regex_constants::match_flag_type flags = regex_constants::match_default);

```

5 *Effects:* Constructs an empty string result of type `basic_string<charT>` and calls:

```

 regex_replace(back_inserter(result), s, s + char_traits<charT>::length(s), e, fmt, flags);

```

6 *Returns:* result.

## 32.12 Regular expression iterators

[re.iter]

### 32.12.1 Class template `regex_iterator`

[re.regiter]

1 The class template `regex_iterator` is an iterator adaptor. It represents a new view of an existing iterator sequence, by enumerating all the occurrences of a regular expression within that sequence. A `regex_iterator` uses `regex_search` to find successive regular expression matches within the sequence from which it was constructed. After the iterator is constructed, and every time `operator++` is used, the iterator finds and stores a value of `match_results<BidirectionalIterator>`. If the end of the sequence is reached (`regex_search` returns `false`), the iterator becomes equal to the end-of-sequence iterator value. The default constructor constructs an end-of-sequence iterator object, which is the only legitimate iterator to be used for the end condition. The result of `operator*` on an end-of-sequence iterator is not defined. For any other iterator value a `const match_results<BidirectionalIterator>&` is returned. The result of `operator->` on an end-of-sequence iterator is not defined. For any other iterator value a `const match_results<BidirectionalIterator>*` is returned. It is impossible to store things into `regex_iterators`. Two end-of-sequence iterators are always equal. An end-of-sequence iterator is not equal to a non-end-of-sequence iterator. Two non-end-of-sequence iterators are equal when they are constructed from the same arguments.

```

namespace std {
 template<class BidirectionalIterator,
 class charT = typename iterator_traits<BidirectionalIterator>::value_type,
 class traits = regex_traits<charT>>
 class regex_iterator {
 public:
 using regex_type = basic_regex<charT, traits>;
 using iterator_category = forward_iterator_tag;
 using value_type = match_results<BidirectionalIterator>;
 using difference_type = ptrdiff_t;
 using pointer = const value_type*;
 using reference = const value_type&;

```

```

regex_iterator();
regex_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 regex_constants::match_flag_type m = regex_constants::match_default);
regex_iterator(BidirectionalIterator, BidirectionalIterator,
 const regex_type&&,
 regex_constants::match_flag_type = regex_constants::match_default) = delete;
regex_iterator(const regex_iterator&);
regex_iterator& operator=(const regex_iterator&);
bool operator==(const regex_iterator&) const;
bool operator!=(const regex_iterator&) const;
const value_type& operator*() const;
const value_type* operator->() const;
regex_iterator& operator++();
regex_iterator operator++(int);

```

```

private:
 BidirectionalIterator begin; // exposition only
 BidirectionalIterator end; // exposition only
 const regex_type* pregex; // exposition only
 regex_constants::match_flag_type flags; // exposition only
 match_results<BidirectionalIterator> match; // exposition only
};
}

```

- <sup>2</sup> An object of type `regex_iterator` that is not an end-of-sequence iterator holds a *zero-length match* if `match[0].matched == true` and `match[0].first == match[0].second`. [Note: For example, this can occur when the part of the regular expression that matched consists only of an assertion (such as `'^'`, `'$'`, `'\b'`, `'\B'`). — end note]

### 32.12.1.1 `regex_iterator` constructors

[re.regiter.cnstr]

```
regex_iterator();
```

- <sup>1</sup> *Effects:* Constructs an end-of-sequence iterator.

```

regex_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 regex_constants::match_flag_type m = regex_constants::match_default);

```

- <sup>2</sup> *Effects:* Initializes `begin` and `end` to `a` and `b`, respectively, sets `pregex` to `&re`, sets `flags` to `m`, then calls `regex_search(begin, end, match, *pregex, flags)`. If this call returns `false` the constructor sets `*this` to the end-of-sequence iterator.

### 32.12.1.2 `regex_iterator` comparisons

[re.regiter.comp]

```
bool operator==(const regex_iterator& right) const;
```

- <sup>1</sup> *Returns:* true if `*this` and `right` are both end-of-sequence iterators or if the following conditions all hold:

- (1.1) — `begin == right.begin`,
- (1.2) — `end == right.end`,
- (1.3) — `pregex == right.pregex`,
- (1.4) — `flags == right.flags`, and
- (1.5) — `match[0] == right.match[0]`;

otherwise false.

```
bool operator!=(const regex_iterator& right) const;
```

- <sup>2</sup> *Returns:* `!(*this == right)`.

**32.12.1.3 regex\_iterator indirection** [re.regiter.deref]

```
const value_type& operator*() const;
```

1 *Returns:* match.

```
const value_type* operator->() const;
```

2 *Returns:* &match.

**32.12.1.4 regex\_iterator increment** [re.regiter.incr]

```
regex_iterator& operator++();
```

1 *Effects:* Constructs a local variable `start` of type `BidirectionalIterator` and initializes it with the value of `match[0].second`.

2 If the iterator holds a zero-length match and `start == end` the operator sets `*this` to the end-of-sequence iterator and returns `*this`.

3 Otherwise, if the iterator holds a zero-length match, the operator calls:

```
 regex_search(start, end, match, *pregex,
 flags | regex_constants::match_not_null | regex_constants::match_continuous)
```

If the call returns `true` the operator returns `*this`. Otherwise the operator increments `start` and continues as if the most recent match was not a zero-length match.

4 If the most recent match was not a zero-length match, the operator sets `flags` to `flags | regex_constants::match_prev_avail` and calls `regex_search(start, end, match, *pregex, flags)`. If the call returns `false` the iterator sets `*this` to the end-of-sequence iterator. The iterator then returns `*this`.

5 In all cases in which the call to `regex_search` returns `true`, `match.prefix().first` shall be equal to the previous value of `match[0].second`, and for each index `i` in the half-open range `[0, match.size())` for which `match[i].matched` is `true`, `match.position(i)` shall return `distance(begin, match[i].first)`.

6 [Note: This means that `match.position(i)` gives the offset from the beginning of the target sequence, which is often not the same as the offset from the sequence passed in the call to `regex_search`. — end note]

7 It is unspecified how the implementation makes these adjustments.

8 [Note: This means that a compiler may call an implementation-specific search function, in which case a program-defined specialization of `regex_search` will not be called. — end note]

```
regex_iterator operator++(int);
```

9 *Effects:* As if by:

```
 regex_iterator tmp = *this;
 ++(*this);
 return tmp;
```

**32.12.2 Class template regex\_token\_iterator** [re.tokiter]

1 The class template `regex_token_iterator` is an iterator adaptor; that is to say it represents a new view of an existing iterator sequence, by enumerating all the occurrences of a regular expression within that sequence, and presenting one or more sub-expressions for each match found. Each position enumerated by the iterator is a `sub_match` class template instance that represents what matched a particular sub-expression within the regular expression.

2 When class `regex_token_iterator` is used to enumerate a single sub-expression with index `-1` the iterator performs field splitting: that is to say it enumerates one sub-expression for each section of the character container sequence that does not match the regular expression specified.

3 After it is constructed, the iterator finds and stores a value `regex_iterator<BidirectionalIterator> position` and sets the internal count `N` to zero. It also maintains a sequence `subs` which contains a list of the sub-expressions which will be enumerated. Every time `operator++` is used the count `N` is incremented; if `N` exceeds or equals `subs.size()`, then the iterator increments member `position` and sets count `N` to zero.

- 4 If the end of sequence is reached (`position` is equal to the end of sequence iterator), the iterator becomes equal to the end-of-sequence iterator value, unless the sub-expression being enumerated has index -1, in which case the iterator enumerates one last sub-expression that contains all the characters from the end of the last regular expression match to the end of the input sequence being enumerated, provided that this would not be an empty sub-expression.
- 5 The default constructor constructs an end-of-sequence iterator object, which is the only legitimate iterator to be used for the end condition. The result of `operator*` on an end-of-sequence iterator is not defined. For any other iterator value a `const sub_match<BidirectionalIterator>&` is returned. The result of `operator->` on an end-of-sequence iterator is not defined. For any other iterator value a `const sub_match<BidirectionalIterator>*` is returned.
- 6 It is impossible to store things into `regex_token_iterators`. Two end-of-sequence iterators are always equal. An end-of-sequence iterator is not equal to a non-end-of-sequence iterator. Two non-end-of-sequence iterators are equal when they are constructed from the same arguments.

```

namespace std {
 template<class BidirectionalIterator,
 class charT = typename iterator_traits<BidirectionalIterator>::value_type,
 class traits = regex_traits<charT>>
 class regex_token_iterator {
 public:
 using regex_type = basic_regex<charT, traits>;
 using iterator_category = forward_iterator_tag;
 using value_type = sub_match<BidirectionalIterator>;
 using difference_type = ptrdiff_t;
 using pointer = const value_type*;
 using reference = const value_type&;

 regex_token_iterator();
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 int submatch = 0,
 regex_constants::match_flag_type m =
 regex_constants::match_default);
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 const vector<int>& submatches,
 regex_constants::match_flag_type m =
 regex_constants::match_default);
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 initializer_list<int> submatches,
 regex_constants::match_flag_type m =
 regex_constants::match_default);

 template<size_t N>
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 const int (&submatches)[N],
 regex_constants::match_flag_type m =
 regex_constants::match_default);
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type&& re,
 int submatch = 0,
 regex_constants::match_flag_type m =
 regex_constants::match_default) = delete;
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type&& re,
 const vector<int>& submatches,
 regex_constants::match_flag_type m =
 regex_constants::match_default) = delete;
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type&& re,
 initializer_list<int> submatches,
 regex_constants::match_flag_type m =

```

```

 regex_constants::match_default) = delete;
template<size_t N>
regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type&& re,
 const int (&submatches)[N],
 regex_constants::match_flag_type m =
 regex_constants::match_default) = delete;
regex_token_iterator(const regex_token_iterator&);
regex_token_iterator& operator=(const regex_token_iterator&);
bool operator==(const regex_token_iterator&) const;
bool operator!=(const regex_token_iterator&) const;
const value_type& operator*() const;
const value_type* operator->() const;
regex_token_iterator& operator++();
regex_token_iterator operator++(int);

private:
 using position_iterator =
 regex_iterator<BidirectionalIterator, charT, traits>; // exposition only
 position_iterator position; // exposition only
 const value_type* result; // exposition only
 value_type suffix; // exposition only
 size_t N; // exposition only
 vector<int> subs; // exposition only
};
}

```

<sup>7</sup> A *suffix iterator* is a `regex_token_iterator` object that points to a final sequence of characters at the end of the target sequence. In a suffix iterator the member `result` holds a pointer to the data member `suffix`, the value of the member `suffix.match` is `true`, `suffix.first` points to the beginning of the final sequence, and `suffix.second` points to the end of the final sequence.

<sup>8</sup> [Note: For a suffix iterator, data member `suffix.first` is the same as the end of the last match found, and `suffix.second` is the same as the end of the target sequence — *end note*]

<sup>9</sup> The *current match* is `(*position).prefix()` if `subs[N] == -1`, or `(*position)[subs[N]]` for any other value of `subs[N]`.

### 32.12.2.1 `regex_token_iterator` constructors

[re.tokiter.cnstr]

```
regex_token_iterator();
```

<sup>1</sup> *Effects:* Constructs the end-of-sequence iterator.

```

regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 int submatch = 0,
 regex_constants::match_flag_type m = regex_constants::match_default);

```

```

regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 const vector<int>& submatches,
 regex_constants::match_flag_type m = regex_constants::match_default);

```

```

regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 initializer_list<int> submatches,
 regex_constants::match_flag_type m = regex_constants::match_default);

```

```

template<size_t N>
 regex_token_iterator(BidirectionalIterator a, BidirectionalIterator b,
 const regex_type& re,
 const int (&submatches)[N],
 regex_constants::match_flag_type m = regex_constants::match_default);

```

<sup>2</sup> *Requires:* Each of the initialization values of `submatches` shall be  $\geq -1$ .



3 *Effects:* The first constructor initializes the member `subs` to hold the single value `submatch`. The second constructor initializes the member `subs` to hold a copy of the argument `submatches`. The third and fourth constructors initialize the member `subs` to hold a copy of the sequence of integer values pointed to by the iterator range `[submatches.begin(), submatches.end())` and  `[&submatches, &submatches + N)`, respectively.

4 Each constructor then sets `N` to 0, and `position` to `position_iterator(a, b, re, m)`. If `position` is not an end-of-sequence iterator the constructor sets `result` to the address of the current match. Otherwise if any of the values stored in `subs` is equal to -1 the constructor sets `*this` to a suffix iterator that points to the range `[a, b)`, otherwise the constructor sets `*this` to an end-of-sequence iterator.

### 32.12.2.2 `regex_token_iterator` comparisons [re.tokiter.comp]

```
bool operator==(const regex_token_iterator& right) const;
```

1 *Returns:* `true` if `*this` and `right` are both end-of-sequence iterators, or if `*this` and `right` are both suffix iterators and `suffix == right.suffix`; otherwise returns `false` if `*this` or `right` is an end-of-sequence iterator or a suffix iterator. Otherwise returns `true` if `position == right.position`, `N == right.N`, and `subs == right.subs`. Otherwise returns `false`.

```
bool operator!=(const regex_token_iterator& right) const;
```

2 *Returns:* `!(*this == right)`.

### 32.12.2.3 `regex_token_iterator` indirection [re.tokiter.deref]

```
const value_type& operator*() const;
```

1 *Returns:* `*result`.

```
const value_type* operator->() const;
```

2 *Returns:* `result`.

### 32.12.2.4 `regex_token_iterator` increment [re.tokiter.incr]

```
regex_token_iterator& operator++();
```

1 *Effects:* Constructs a local variable `prev` of type `position_iterator`, initialized with the value of `position`.

2 If `*this` is a suffix iterator, sets `*this` to an end-of-sequence iterator.

3 Otherwise, if `N + 1 < subs.size()`, increments `N` and sets `result` to the address of the current match.

4 Otherwise, sets `N` to 0 and increments `position`. If `position` is not an end-of-sequence iterator the operator sets `result` to the address of the current match.

5 Otherwise, if any of the values stored in `subs` is equal to -1 and `prev->suffix().length()` is not 0 the operator sets `*this` to a suffix iterator that points to the range `[prev->suffix().first, prev->suffix().second)`.

6 Otherwise, sets `*this` to an end-of-sequence iterator.

7 *Returns:* `*this`

```
regex_token_iterator& operator++(int);
```

8 *Effects:* Constructs a copy `tmp` of `*this`, then calls `++(*this)`.

9 *Returns:* `tmp`.

## 32.13 Modified ECMAScript regular expression grammar [re.grammar]

1 The regular expression grammar recognized by `basic_regex` objects constructed with the ECMAScript flag is that specified by ECMA-262, except as specified below.

2 Objects of type specialization of `basic_regex` store within themselves a default-constructed instance of their `traits` template parameter, henceforth referred to as `traits_inst`. This `traits_inst` object is used to support localization of the regular expression; `basic_regex` member functions shall not call any locale dependent C or C++ API, including the formatted string input functions. Instead they shall call the appropriate `traits` member function to achieve the required effect.

- 3 The following productions within the ECMAScript grammar are modified as follows:

```

ClassAtom ::
-
 ClassAtomNoDash
 ClassAtomExClass
 ClassAtomCollatingElement
 ClassAtomEquivalence

IdentityEscape ::
 SourceCharacter but not c

```

- 4 The following new productions are then added:

```

ClassAtomExClass ::
 [: ClassName :]

ClassAtomCollatingElement ::
 [. ClassName .]

ClassAtomEquivalence ::
 [= ClassName =]

ClassName ::
 ClassNameCharacter
 ClassNameCharacter ClassName

ClassNameCharacter ::
 SourceCharacter but not one of "." "=" ":"

```

- 5 The productions `ClassAtomExClass`, `ClassAtomCollatingElement` and `ClassAtomEquivalence` provide functionality equivalent to that of the same features in regular expressions in POSIX.
- 6 The regular expression grammar may be modified by any `regex_constants::syntax_option_type` flags specified when constructing an object of type specialization of `basic_regex` according to the rules in Table 124.
- 7 A `ClassName` production, when used in `ClassAtomExClass`, is not valid if `traits_inst.lookup_classname` returns zero for that name. The names recognized as valid `ClassNames` are determined by the type of the traits class, but at least the following names shall be recognized: `alnum`, `alpha`, `blank`, `cntrl`, `digit`, `graph`, `lower`, `print`, `punct`, `space`, `upper`, `xdigit`, `d`, `s`, `w`. In addition the following expressions shall be equivalent:
- ```

\d and [[:digit:]]

\D and [^[:digit:]]

\s and [[:space:]]

\S and [^[:space:]]

\w and [_[:alnum:]]

\W and [^_[:alnum:]]

```
- 8 A `ClassName` production when used in a `ClassAtomCollatingElement` production is not valid if the value returned by `traits_inst.lookup_collatename` for that name is an empty string.
- 9 The results from multiple calls to `traits_inst.lookup_classname` can be bitwise OR'ed together and subsequently passed to `traits_inst.isctype`.
- 10 A `ClassName` production when used in a `ClassAtomEquivalence` production is not valid if the value returned by `traits_inst.lookup_collatename` for that name is an empty string or if the value returned by `traits_inst.transform_primary` for the result of the call to `traits_inst.lookup_collatename` is an empty string.
- 11 When the sequence of characters being transformed to a finite state machine contains an invalid class name the translator shall throw an exception object of type `regex_error`.

12 If the *CV* of a *UnicodeEscapeSequence* is greater than the largest value that can be held in an object of type `charT` the translator shall throw an exception object of type `regex_error`. [Note: This means that values of the form "uxxxx" that do not fit in a character are invalid. — *end note*]

13 Where the regular expression grammar requires the conversion of a sequence of characters to an integral value, this is accomplished by calling `traits_inst.value`.

14 The behavior of the internal finite state machine representation when used to match a sequence of characters is as described in ECMA-262. The behavior is modified according to any `match_flag_type` flags (32.5.2) specified when using the regular expression object in one of the regular expression algorithms (32.11). The behavior is also localized by interaction with the traits class template parameter as follows:

(14.1) — During matching of a regular expression finite state machine against a sequence of characters, two characters `c` and `d` are compared using the following rules:

(14.1.1) — if `(flags() & regex_constants::icase)` the two characters are equal if `traits_inst.translate_nocase(c) == traits_inst.translate_nocase(d)`;

(14.1.2) — otherwise, if `(flags() & regex_constants::collate)` the two characters are equal if `traits_inst.translate(c) == traits_inst.translate(d)`;

(14.1.3) — otherwise, the two characters are equal if `c == d`.

(14.2) — During matching of a regular expression finite state machine against a sequence of characters, comparison of a collating element range `c1-c2` against a character `c` is conducted as follows: if `(flags() & regex_constants::collate)` is false then the character `c` is matched if `c1 <= c && c <= c2`, otherwise `c` is matched in accordance with the following algorithm:

```
string_type str1 = string_type(1,
    flags() & icase ?
        traits_inst.translate_nocase(c1) : traits_inst.translate(c1);
string_type str2 = string_type(1,
    flags() & icase ?
        traits_inst.translate_nocase(c2) : traits_inst.translate(c2);
string_type str = string_type(1,
    flags() & icase ?
        traits_inst.translate_nocase(c) : traits_inst.translate(c);
return traits_inst.transform(str1.begin(), str1.end())
    <= traits_inst.transform(str.begin(), str.end())
    && traits_inst.transform(str.begin(), str.end())
    <= traits_inst.transform(str2.begin(), str2.end());
```

(14.3) — During matching of a regular expression finite state machine against a sequence of characters, testing whether a collating element is a member of a primary equivalence class is conducted by first converting the collating element and the equivalence class to sort keys using `traits::transform_primary`, and then comparing the sort keys for equality.

(14.4) — During matching of a regular expression finite state machine against a sequence of characters, a character `c` is a member of a character class designated by an iterator range `[first, last)` if `traits_inst.isctype(c, traits_inst.lookup_classname(first, last, flags() & icase))` is true.

SEE ALSO: ECMA-262 15.10

33 Atomic operations library [atomics]

33.1 General [atomics.general]

- ¹ This Clause describes components for fine-grained atomic access. This access is provided via operations on atomic objects.
- ² The following subclauses describe atomics requirements and components for types and operations, as summarized below.

Table 131 — Atomics library summary

Subclause	Header(s)
33.3	Type aliases
33.4	Order and consistency
33.5	Lock-free property
33.6	Class template <code>atomic_ref</code> <code><atomic></code>
33.7	Class template <code>atomic</code> <code><atomic></code>
33.8	Non-member functions <code><atomic></code>
33.9	Flag type and operations <code><atomic></code>
33.10	Fences <code><atomic></code>

33.2 Header `<atomic>` synopsis [atomics.syn]

```

namespace std {
    // 33.4, order and consistency
    enum class memory_order : unspecified;
    template<class T>
        T kill_dependency(T y) noexcept;

    // 33.5, lock-free property
    #define ATOMIC_BOOL_LOCK_FREE unspecified
    #define ATOMIC_CHAR_LOCK_FREE unspecified
    #define ATOMIC_CHAR16_T_LOCK_FREE unspecified
    #define ATOMIC_CHAR32_T_LOCK_FREE unspecified
    #define ATOMIC_WCHAR_T_LOCK_FREE unspecified
    #define ATOMIC_SHORT_LOCK_FREE unspecified
    #define ATOMIC_INT_LOCK_FREE unspecified
    #define ATOMIC_LONG_LOCK_FREE unspecified
    #define ATOMIC_LLONG_LOCK_FREE unspecified
    #define ATOMIC_POINTER_LOCK_FREE unspecified

    // 33.6, class template atomic_ref
    template<class T> struct atomic_ref;
    // 33.6.4, partial specialization for pointers
    template<class T> struct atomic_ref<T*>;

    // 33.7, class template atomic
    template<class T> struct atomic;
    // 33.7.4, partial specialization for pointers
    template<class T> struct atomic<T*>;

    // 33.8, non-member functions
    template<class T>
        bool atomic_is_lock_free(const volatile atomic<T*>) noexcept;
    template<class T>
        bool atomic_is_lock_free(const atomic<T*>) noexcept;
    template<class T>
        void atomic_init(volatile atomic<T*>, typename atomic<T*>::value_type) noexcept;

```

```

template<class T>
    void atomic_init(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    void atomic_store(volatile atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    void atomic_store(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    void atomic_store_explicit(volatile atomic<T>*, typename atomic<T>::value_type,
                               memory_order) noexcept;
template<class T>
    void atomic_store_explicit(atomic<T>*, typename atomic<T>::value_type,
                               memory_order) noexcept;
template<class T>
    T atomic_load(const volatile atomic<T>*) noexcept;
template<class T>
    T atomic_load(const atomic<T>*) noexcept;
template<class T>
    T atomic_load_explicit(const volatile atomic<T>*, memory_order) noexcept;
template<class T>
    T atomic_load_explicit(const atomic<T>*, memory_order) noexcept;
template<class T>
    T atomic_exchange(volatile atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_exchange(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_exchange_explicit(volatile atomic<T>*, typename atomic<T>::value_type,
                               memory_order) noexcept;
template<class T>
    T atomic_exchange_explicit(atomic<T>*, typename atomic<T>::value_type,
                               memory_order) noexcept;
template<class T>
    bool atomic_compare_exchange_weak(volatile atomic<T>*,
                                     typename atomic<T>::value_type*,
                                     typename atomic<T>::value_type) noexcept;
template<class T>
    bool atomic_compare_exchange_weak(atomic<T>*,
                                     typename atomic<T>::value_type*,
                                     typename atomic<T>::value_type) noexcept;
template<class T>
    bool atomic_compare_exchange_strong(volatile atomic<T>*,
                                       typename atomic<T>::value_type*,
                                       typename atomic<T>::value_type) noexcept;
template<class T>
    bool atomic_compare_exchange_strong(atomic<T>*,
                                       typename atomic<T>::value_type*,
                                       typename atomic<T>::value_type) noexcept;
template<class T>
    bool atomic_compare_exchange_weak_explicit(volatile atomic<T>*,
                                               typename atomic<T>::value_type*,
                                               typename atomic<T>::value_type,
                                               memory_order, memory_order) noexcept;
template<class T>
    bool atomic_compare_exchange_weak_explicit(atomic<T>*,
                                               typename atomic<T>::value_type*,
                                               typename atomic<T>::value_type,
                                               memory_order, memory_order) noexcept;
template<class T>
    bool atomic_compare_exchange_strong_explicit(volatile atomic<T>*,
                                                typename atomic<T>::value_type*,
                                                typename atomic<T>::value_type,
                                                memory_order, memory_order) noexcept;
template<class T>
    bool atomic_compare_exchange_strong_explicit(atomic<T>*,
                                                typename atomic<T>::value_type*,
                                                typename atomic<T>::value_type,
                                                memory_order, memory_order) noexcept;

```

```

        typename atomic<T>::value_type,
        memory_order, memory_order) noexcept;

template<class T>
    T atomic_fetch_add(volatile atomic<T>*, typename atomic<T>::difference_type) noexcept;
template<class T>
    T atomic_fetch_add(atomic<T>*, typename atomic<T>::difference_type) noexcept;
template<class T>
    T atomic_fetch_add_explicit(volatile atomic<T>*, typename atomic<T>::difference_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_add_explicit(atomic<T>*, typename atomic<T>::difference_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_sub(volatile atomic<T>*, typename atomic<T>::difference_type) noexcept;
template<class T>
    T atomic_fetch_sub(atomic<T>*, typename atomic<T>::difference_type) noexcept;
template<class T>
    T atomic_fetch_sub_explicit(volatile atomic<T>*, typename atomic<T>::difference_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_sub_explicit(atomic<T>*, typename atomic<T>::difference_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_and(volatile atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_and(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_and_explicit(volatile atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_and_explicit(atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_or(volatile atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_or(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_or_explicit(volatile atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_or_explicit(atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_xor(volatile atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_xor(atomic<T>*, typename atomic<T>::value_type) noexcept;
template<class T>
    T atomic_fetch_xor_explicit(volatile atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;
template<class T>
    T atomic_fetch_xor_explicit(atomic<T>*, typename atomic<T>::value_type,
        memory_order) noexcept;

// 33.7.1, initialization
#define ATOMIC_VAR_INIT(value) see below

// 33.3, type aliases
using atomic_bool      = atomic<bool>;
using atomic_char      = atomic<char>;
using atomic_schar     = atomic<signed char>;
using atomic_uchar     = atomic<unsigned char>;
using atomic_short     = atomic<short>;
using atomic_ushort    = atomic<unsigned short>;

```

```

using atomic_int           = atomic<int>;
using atomic_uint         = atomic<unsigned int>;
using atomic_long         = atomic<long>;
using atomic_ulong        = atomic<unsigned long>;
using atomic_llong        = atomic<long long>;
using atomic_ullong       = atomic<unsigned long long>;
using atomic_char16_t     = atomic<char16_t>;
using atomic_char32_t     = atomic<char32_t>;
using atomic_wchar_t      = atomic<wchar_t>;

using atomic_int8_t       = atomic<int8_t>;
using atomic_uint8_t      = atomic<uint8_t>;
using atomic_int16_t      = atomic<int16_t>;
using atomic_uint16_t     = atomic<uint16_t>;
using atomic_int32_t      = atomic<int32_t>;
using atomic_uint32_t     = atomic<uint32_t>;
using atomic_int64_t      = atomic<int64_t>;
using atomic_uint64_t     = atomic<uint64_t>;

using atomic_int_least8_t = atomic<int_least8_t>;
using atomic_uint_least8_t = atomic<uint_least8_t>;
using atomic_int_least16_t = atomic<int_least16_t>;
using atomic_uint_least16_t = atomic<uint_least16_t>;
using atomic_int_least32_t = atomic<int_least32_t>;
using atomic_uint_least32_t = atomic<uint_least32_t>;
using atomic_int_least64_t = atomic<int_least64_t>;
using atomic_uint_least64_t = atomic<uint_least64_t>;

using atomic_int_fast8_t  = atomic<int_fast8_t>;
using atomic_uint_fast8_t = atomic<uint_fast8_t>;
using atomic_int_fast16_t = atomic<int_fast16_t>;
using atomic_uint_fast16_t = atomic<uint_fast16_t>;
using atomic_int_fast32_t = atomic<int_fast32_t>;
using atomic_uint_fast32_t = atomic<uint_fast32_t>;
using atomic_int_fast64_t = atomic<int_fast64_t>;
using atomic_uint_fast64_t = atomic<uint_fast64_t>;

using atomic_intptr_t     = atomic<intptr_t>;
using atomic_uintptr_t    = atomic<uintptr_t>;
using atomic_size_t       = atomic<size_t>;
using atomic_ptrdiff_t    = atomic<ptrdiff_t>;
using atomic_intmax_t     = atomic<intmax_t>;
using atomic_uintmax_t    = atomic<uintmax_t>;

// 33.9, flag type and operations
struct atomic_flag;
bool atomic_flag_test_and_set(volatile atomic_flag*) noexcept;
bool atomic_flag_test_and_set(atomic_flag*) noexcept;
bool atomic_flag_test_and_set_explicit(volatile atomic_flag*, memory_order) noexcept;
bool atomic_flag_test_and_set_explicit(atomic_flag*, memory_order) noexcept;
void atomic_flag_clear(volatile atomic_flag*) noexcept;
void atomic_flag_clear(atomic_flag*) noexcept;
void atomic_flag_clear_explicit(volatile atomic_flag*, memory_order) noexcept;
void atomic_flag_clear_explicit(atomic_flag*, memory_order) noexcept;
#define ATOMIC_FLAG_INIT see below

// 33.10, fences
extern "C" void atomic_thread_fence(memory_order) noexcept;
extern "C" void atomic_signal_fence(memory_order) noexcept;
}

```

33.3 Type aliases [atomics.alias]

- ¹ The type aliases `atomic_intN_t`, `atomic_uintN_t`, `atomic_intptr_t`, and `atomic_uintptr_t` are defined if and only if `intN_t`, `uintN_t`, `intptr_t`, and `uintptr_t` are defined, respectively.

33.4 Order and consistency [atomics.order]

```
namespace std {
    enum class memory_order : unspecified {
        relaxed, consume, acquire, release, acq_rel, seq_cst
    };
    inline constexpr memory_order memory_order_relaxed = memory_order::relaxed;
    inline constexpr memory_order memory_order_consume = memory_order::consume;
    inline constexpr memory_order memory_order_acquire = memory_order::acquire;
    inline constexpr memory_order memory_order_release = memory_order::release;
    inline constexpr memory_order memory_order_acq_rel = memory_order::acq_rel;
    inline constexpr memory_order memory_order_seq_cst = memory_order::seq_cst;
}
```

- ¹ The enumeration `memory_order` specifies the detailed regular (non-atomic) memory synchronization order as defined in 6.8.2 and may provide for operation ordering. Its enumerated values and their meanings are as follows:

- (1.1) — `memory_order::relaxed`: no operation orders memory.
- (1.2) — `memory_order::release`, `memory_order::acq_rel`, and `memory_order::seq_cst`: a store operation performs a release operation on the affected memory location.
- (1.3) — `memory_order::consume`: a load operation performs a consume operation on the affected memory location. [*Note*: Prefer `memory_order::acquire`, which provides stronger guarantees than `memory_order::consume`. Implementations have found it infeasible to provide performance better than that of `memory_order::acquire`. Specification revisions are under consideration. — *end note*]
- (1.4) — `memory_order::acquire`, `memory_order::acq_rel`, and `memory_order::seq_cst`: a load operation performs an acquire operation on the affected memory location.

[*Note*: Atomic operations specifying `memory_order::relaxed` are relaxed with respect to memory ordering. Implementations must still guarantee that any given atomic access to a particular atomic object be indivisible with respect to all other atomic accesses to that object. — *end note*]

- ² An atomic operation *A* that performs a release operation on an atomic object *M* synchronizes with an atomic operation *B* that performs an acquire operation on *M* and takes its value from any side effect in the release sequence headed by *A*.

- ³ There shall be a single total order *S* on all `memory_order::seq_cst` operations, consistent with the “happens before” order and modification orders for all affected locations, such that each `memory_order::seq_cst` operation *B* that loads a value from an atomic object *M* observes one of the following values:

- (3.1) — the result of the last modification *A* of *M* that precedes *B* in *S*, if it exists, or
- (3.2) — if *A* exists, the result of some modification of *M* that is not `memory_order::seq_cst` and that does not happen before *A*, or
- (3.3) — if *A* does not exist, the result of some modification of *M* that is not `memory_order::seq_cst`.

[*Note*: Although it is not explicitly required that *S* include locks, it can always be extended to an order that does include lock and unlock operations, since the ordering between those is already included in the “happens before” ordering. — *end note*]

- ⁴ For an atomic operation *B* that reads the value of an atomic object *M*, if there is a `memory_order::seq_cst` fence *X* sequenced before *B*, then *B* observes either the last `memory_order::seq_cst` modification of *M* preceding *X* in the total order *S* or a later modification of *M* in its modification order.

- ⁵ For atomic operations *A* and *B* on an atomic object *M*, where *A* modifies *M* and *B* takes its value, if there is a `memory_order::seq_cst` fence *X* such that *A* is sequenced before *X* and *B* follows *X* in *S*, then *B* observes either the effects of *A* or a later modification of *M* in its modification order.

- ⁶ For atomic operations *A* and *B* on an atomic object *M*, where *A* modifies *M* and *B* takes its value, if there are `memory_order::seq_cst` fences *X* and *Y* such that *A* is sequenced before *X*, *Y* is sequenced before *B*, and *X* precedes *Y* in *S*, then *B* observes either the effects of *A* or a later modification of *M* in its modification order.

7 For atomic modifications A and B of an atomic object M , B occurs later than A in the modification order of M if:

- (7.1) — there is a `memory_order::seq_cst` fence X such that A is sequenced before X , and X precedes B in S , or
- (7.2) — there is a `memory_order::seq_cst` fence Y such that Y is sequenced before B , and A precedes Y in S , or
- (7.3) — there are `memory_order::seq_cst` fences X and Y such that A is sequenced before X , Y is sequenced before B , and X precedes Y in S .

8 [Note: `memory_order::seq_cst` ensures sequential consistency only for a program that is free of data races and uses exclusively `memory_order::seq_cst` operations. Any use of weaker ordering will invalidate this guarantee unless extreme care is used. In particular, `memory_order::seq_cst` fences ensure a total order only for the fences themselves. Fences cannot, in general, be used to restore sequential consistency for atomic operations with weaker ordering specifications. — end note]

9 Implementations should ensure that no “out-of-thin-air” values are computed that circularly depend on their own computation.

[Note: For example, with x and y initially zero,

```
// Thread 1:
r1 = y.load(memory_order::relaxed);
x.store(r1, memory_order::relaxed);

// Thread 2:
r2 = x.load(memory_order::relaxed);
y.store(r2, memory_order::relaxed);
```

should not produce `r1 == r2 == 42`, since the store of 42 to y is only possible if the store to x stores 42, which circularly depends on the store to y storing 42. Note that without this restriction, such an execution is possible. — end note]

10 [Note: The recommendation similarly disallows `r1 == r2 == 42` in the following example, with x and y again initially zero:

```
// Thread 1:
r1 = x.load(memory_order::relaxed);
if (r1 == 42) y.store(42, memory_order::relaxed);

// Thread 2:
r2 = y.load(memory_order::relaxed);
if (r2 == 42) x.store(42, memory_order::relaxed);
```

— end note]

11 Atomic read-modify-write operations shall always read the last value (in the modification order) written before the write associated with the read-modify-write operation.

12 Implementations should make atomic stores visible to atomic loads within a reasonable amount of time.

```
template<class T>
T kill_dependency(T y) noexcept;
```

13 *Effects:* The argument does not carry a dependency to the return value (6.8.2).

14 *Returns:* y .

33.5 Lock-free property

[`atomics.lockfree`]

```
#define ATOMIC_BOOL_LOCK_FREE unspecified
#define ATOMIC_CHAR_LOCK_FREE unspecified
#define ATOMIC_CHAR16_T_LOCK_FREE unspecified
#define ATOMIC_CHAR32_T_LOCK_FREE unspecified
#define ATOMIC_WCHAR_T_LOCK_FREE unspecified
#define ATOMIC_SHORT_LOCK_FREE unspecified
#define ATOMIC_INT_LOCK_FREE unspecified
#define ATOMIC_LONG_LOCK_FREE unspecified
#define ATOMIC_LLONG_LOCK_FREE unspecified
#define ATOMIC_POINTER_LOCK_FREE unspecified
```

- ¹ The `ATOMIC_..._LOCK_FREE` macros indicate the lock-free property of the corresponding atomic types, with the signed and unsigned variants grouped together. The properties also apply to the corresponding (partial) specializations of the `atomic` template. A value of 0 indicates that the types are never lock-free. A value of 1 indicates that the types are sometimes lock-free. A value of 2 indicates that the types are always lock-free.
- ² The function `atomic_is_lock_free` (33.7.1) indicates whether the object is lock-free. In any given program execution, the result of the lock-free query shall be consistent for all pointers of the same type.
- ³ Atomic operations that are not lock-free are considered to potentially block (6.8.2.2).
- ⁴ [Note: Operations that are lock-free should also be address-free. That is, atomic operations on the same memory location via two different addresses will communicate atomically. The implementation should not depend on any per-process state. This restriction enables communication by memory that is mapped into a process more than once and by memory that is shared between two processes. — end note]

33.6 Class template `atomic_ref`

[`atomics.ref.generic`]

```

namespace std {
    template<class T> struct atomic_ref {
    private:
        T* ptr;           // exposition only
    public:
        using value_type = T;
        static constexpr bool is_always_lock_free = implementation-defined;
        static constexpr size_t required_alignment = implementation-defined;

        atomic_ref() = delete;
        atomic_ref& operator=(const atomic_ref&) = delete;

        explicit atomic_ref(T&);
        atomic_ref(const atomic_ref&) noexcept;

        T operator=(T) const noexcept;
        operator T() const noexcept;

        bool is_lock_free() const noexcept;
        void store(T, memory_order = memory_order_seq_cst) const noexcept;
        T load(memory_order = memory_order_seq_cst) const noexcept;
        T exchange(T, memory_order = memory_order_seq_cst) const noexcept;
        bool compare_exchange_weak(T&, T,
                                   memory_order, memory_order) const noexcept;
        bool compare_exchange_strong(T&, T,
                                     memory_order, memory_order) const noexcept;
        bool compare_exchange_weak(T&, T,
                                   memory_order = memory_order_seq_cst) const noexcept;
        bool compare_exchange_strong(T&, T,
                                     memory_order = memory_order_seq_cst) const noexcept;
    };
}

```

- ¹ An `atomic_ref` object applies atomic operations (33.1) to the object referenced by `*ptr` such that, for the lifetime (6.6.3) of the `atomic_ref` object, the object referenced by `*ptr` is an atomic object (6.8.2.1).
- ² The template argument for `T` shall be trivially copyable (6.7).
- ³ The lifetime (6.6.3) of an object referenced by `*ptr` shall exceed the lifetime of all `atomic_refs` that reference the object. While any `atomic_ref` instances exist that reference the `*ptr` object, all accesses to that object shall exclusively occur through those `atomic_ref` instances. No subobject of the object referenced by `atomic_ref` shall be concurrently referenced by any other `atomic_ref` object.
- ⁴ Atomic operations applied to an object through a referencing `atomic_ref` are atomic with respect to atomic operations applied through any other `atomic_ref` referencing the same object. [Note: Atomic operations or the `atomic_ref` constructor could acquire a shared resource, such as a lock associated with the referenced object, to enable atomic operations to be applied to the referenced object. — end note]

33.6.1 Operations

[atomics.ref.operations]

```
static constexpr bool is_always_lock_free;
```

- 1 The static data member `is_always_lock_free` is `true` if the `atomic_ref` type's operations are always lock-free, and `false` otherwise.

```
static constexpr size_t required_alignment;
```

- 2 The alignment required for an object to be referenced by an atomic reference, which is at least `alignof(T)`.

- 3 [Note: Hardware could require an object referenced by an `atomic_ref` to have stricter alignment (6.6.5) than other objects of type T. Further, whether operations on an `atomic_ref` are lock-free could depend on the alignment of the referenced object. For example, lock-free operations on `std::complex<double>` could be supported only if aligned to `2*alignof(double)`. — end note]

```
atomic_ref(T& obj);
```

- 4 *Requires:* The referenced object shall be aligned to `required_alignment`.

- 5 *Effects:* Constructs an atomic reference that references the object.

- 6 *Throws:* Nothing.

```
atomic_ref(const atomic_ref& ref) noexcept;
```

- 7 *Effects:* Constructs an atomic reference that references the object referenced by `ref`.

```
T operator=(T desired) const noexcept;
```

- 8 *Effects:* Equivalent to:

```
store(desired);
return desired;
```

```
operator T() const noexcept;
```

- 9 *Effects:* Equivalent to: `return load();`

```
bool is_lock_free() const noexcept;
```

- 10 *Returns:* `true` if the object's operations are lock-free, `false` otherwise.

```
void store(T desired, memory_order order = memory_order_seq_cst) const noexcept;
```

- 11 *Requires:* The `order` argument shall not be `memory_order_consume`, `memory_order_acquire`, nor `memory_order_acq_rel`.

- 12 *Effects:* Atomically replaces the value referenced by `*ptr` with the value of `desired`. Memory is affected according to the value of `order`.

```
T load(memory_order order = memory_order_seq_cst) const noexcept;
```

- 13 *Requires:* The `order` argument shall not be `memory_order_release` nor `memory_order_acq_rel`.

- 14 *Effects:* Memory is affected according to the value of `order`.

- 15 *Returns:* Atomically returns the value referenced by `*ptr`.

```
T exchange(T desired, memory_order order = memory_order_seq_cst) const noexcept;
```

- 16 *Effects:* Atomically replaces the value referenced by `*ptr` with `desired`. Memory is affected according to the value of `order`. This operation is an atomic read-modify-write operation (6.8.2).

- 17 *Returns:* Atomically returns the value referenced by `*ptr` immediately before the effects.

```
bool compare_exchange_weak(T& expected, T desired,
                           memory_order success, memory_order failure) const noexcept;
```

```
bool compare_exchange_strong(T& expected, T desired,
                              memory_order success, memory_order failure) const noexcept;
```

```
bool compare_exchange_weak(T& expected, T desired,
                           memory_order order = memory_order_seq_cst) const noexcept;
```

```
bool compare_exchange_strong(T& expected, T desired,
                             memory_order order = memory_order_seq_cst) const noexcept;
```

18 *Requires:* The failure argument shall not be `memory_order_release` nor `memory_order_acq_rel`.

19 *Effects:* Retrieves the value in `expected`. It then atomically compares the value referenced by `*ptr` for equality with that previously retrieved from `expected`, and if `true`, replaces the value referenced by `*ptr` with that in `desired`. If and only if the comparison is `true`, memory is affected according to the value of `success`, and if the comparison is `false`, memory is affected according to the value of `failure`. When only one `memory_order` argument is supplied, the value of `success` is `order`, and the value of `failure` is `order` except that a value of `memory_order_acq_rel` shall be replaced by the value `memory_order_acquire` and a value of `memory_order_release` shall be replaced by the value `memory_order_relaxed`. If and only if the comparison is `false` then, after the atomic operation, the contents of the memory in `expected` are replaced by the value read from the value referenced by `*ptr` during the atomic comparison. If the operation returns `true`, these operations are atomic read-modify-write operations (6.8.2.1) on the value referenced by `*ptr`. Otherwise, these operations are atomic load operations on that memory.

20 *Returns:* The result of the comparison.

21 *Remarks:* A weak compare-and-exchange operation may fail spuriously. That is, even when the contents of memory referred to by `expected` and `ptr` are equal, it may return `false` and store back to `expected` the same memory contents that were originally there. [Note: This spurious failure enables implementation of compare-and-exchange on a broader class of machines, e.g., load-locked store-conditional machines. A consequence of spurious failure is that nearly all uses of weak compare-and-exchange will be in a loop. When a compare-and-exchange is in a loop, the weak version will yield better performance on some platforms. When a weak compare-and-exchange would require a loop and a strong one would not, the strong one is preferable. — end note]

33.6.2 Specializations for integral types [atomics.ref.int]

1 There are specializations of the `atomic_ref` class template for the integral types `char`, `signed char`, `unsigned char`, `short`, `unsigned short`, `int`, `unsigned int`, `long`, `unsigned long`, `long long`, `unsigned long long`, `char16_t`, `char32_t`, `wchar_t`, and any other types needed by the typedefs in the header `<cstdint>`. For each such type `integral`, the specialization `atomic_ref<integral>` provides additional atomic operations appropriate to integral types. [Note: For the specialization `atomic_ref<bool>`, see 33.6. — end note]

```
namespace std {
    template<> struct atomic_ref<integral> {
    private:
        integral* ptr;           // exposition only
    public:
        using value_type = integral;
        using difference_type = value_type;
        static constexpr bool is_always_lock_free = implementation-defined;
        static constexpr size_t required_alignment = implementation-defined;

        atomic_ref() = delete;
        atomic_ref& operator=(const atomic_ref&) = delete;

        explicit atomic_ref(integral&);
        atomic_ref(const atomic_ref&) noexcept;

        integral operator=(integral) const noexcept;
        operator integral() const noexcept;

        bool is_lock_free() const noexcept;
        void store(integral, memory_order = memory_order_seq_cst) const noexcept;
        integral load(memory_order = memory_order_seq_cst) const noexcept;
        integral exchange(integral,
                          memory_order = memory_order_seq_cst) const noexcept;
        bool compare_exchange_weak(integral&, integral,
                                   memory_order, memory_order) const noexcept;
```

```

bool compare_exchange_strong(integral&, integral,
                             memory_order, memory_order) const noexcept;
bool compare_exchange_weak(integral&, integral,
                             memory_order = memory_order_seq_cst) const noexcept;
bool compare_exchange_strong(integral&, integral,
                             memory_order = memory_order_seq_cst) const noexcept;

integral fetch_add(integral,
                  memory_order = memory_order_seq_cst) const noexcept;
integral fetch_sub(integral,
                  memory_order = memory_order_seq_cst) const noexcept;
integral fetch_and(integral,
                  memory_order = memory_order_seq_cst) const noexcept;
integral fetch_or(integral,
                  memory_order = memory_order_seq_cst) const noexcept;
integral fetch_xor(integral,
                  memory_order = memory_order_seq_cst) const noexcept;

integral operator++(int) const noexcept;
integral operator--(int) const noexcept;
integral operator++() const noexcept;
integral operator--() const noexcept;
integral operator+=(integral) const noexcept;
integral operator-=(integral) const noexcept;
integral operator&=(integral) const noexcept;
integral operator|=(integral) const noexcept;
integral operator^=(integral) const noexcept;
};
}

```

2 Descriptions are provided below only for members that differ from the primary template.

3 The following operations perform arithmetic computations. The key, operator, and computation correspondence is identified in Table 132.

```
integral fetch_key(integral operand, memory_order order = memory_order_seq_cst) const noexcept;
```

4 *Effects:* Atomically replaces the value referenced by **ptr* with the result of the computation applied to the value referenced by **ptr* and the given operand. Memory is affected according to the value of *order*. These operations are atomic read-modify-write operations (6.8.2.1).

5 *Returns:* Atomically, the value referenced by **ptr* immediately before the effects.

6 *Remarks:* For signed integer types, arithmetic is defined to use two's complement representation. There are no undefined results.

```
integral operator op=(integral operand) const noexcept;
```

7 *Effects:* Equivalent to: `return fetch_key(operand) op operand;`

33.6.3 Specializations for floating-point types [atomics.ref.float]

1 There are specializations of the `atomic_ref` class template for the floating-point types `float`, `double`, and `long double`. For each such type *floating-point*, the specialization `atomic_ref<floating-point>` provides additional atomic operations appropriate to floating-point types.

```

namespace std {
    template<> struct atomic_ref<floating-point> {
    private:
        floating-point* ptr; // exposition only
    public:
        using value_type = floating-point;
        using difference_type = value_type;
        static constexpr bool is_always_lock_free = implementation-defined;
        static constexpr size_t required_alignment = implementation-defined;

        atomic_ref() = delete;
        atomic_ref& operator=(const atomic_ref&) = delete;
    };
}

```

```

explicit atomic_ref(floating-point&);
atomic_ref(const atomic_ref&) noexcept;

floating-point operator=(floating-point) noexcept;
operator floating-point() const noexcept;

bool is_lock_free() const noexcept;
void store(floating-point, memory_order = memory_order_seq_cst) const noexcept;
floating-point load(memory_order = memory_order_seq_cst) const noexcept;
floating-point exchange(floating-point,
    memory_order = memory_order_seq_cst) const noexcept;
bool compare_exchange_weak(floating-point&, floating-point,
    memory_order, memory_order) const noexcept;
bool compare_exchange_strong(floating-point&, floating-point,
    memory_order, memory_order) const noexcept;
bool compare_exchange_weak(floating-point&, floating-point,
    memory_order = memory_order_seq_cst) const noexcept;
bool compare_exchange_strong(floating-point&, floating-point,
    memory_order = memory_order_seq_cst) const noexcept;

floating-point fetch_add(floating-point,
    memory_order = memory_order_seq_cst) const noexcept;
floating-point fetch_sub(floating-point,
    memory_order = memory_order_seq_cst) const noexcept;

floating-point operator+=(floating-point) const noexcept;
floating-point operator-=(floating-point) const noexcept;
};
}

```

² Descriptions are provided below only for members that differ from the primary template.

³ The following operations perform arithmetic computations. The key, operator, and computation correspondence are identified in Table 132.

```

floating-point fetch_key(floating-point operand,
    memory_order order = memory_order_seq_cst) const noexcept;

```

⁴ *Effects:* Atomically replaces the value referenced by *ptr with the result of the computation applied to the value referenced by *ptr and the given operand. Memory is affected according to the value of order. These operations are atomic read-modify-write operations (6.8.2.1).

⁵ *Returns:* Atomically, the value referenced by *ptr immediately before the effects.

⁶ *Remarks:* If the result is not a representable value for its type (8.1), the result is unspecified, but the operations otherwise have no undefined behavior. Atomic arithmetic operations on *floating-point* should conform to the std::numeric_limits<*floating-point*> traits associated with the floating-point type (21.3.2). The floating-point environment (30.4) for atomic arithmetic operations on *floating-point* may be different than the calling thread's floating-point environment.

```

floating-point operator op=(floating-point operand) const noexcept;

```

Effects: Equivalent to: return fetch_key(operand) op operand;

33.6.4 Partial specialization for pointers

[atomics.ref.pointer]

```

namespace std {
    template<class T> struct atomic_ref<T*> {
    private:
        T** ptr;           // exposition only
    public:
        using value_type = T*;
        using difference_type = ptrdiff_t;
        static constexpr bool is_always_lock_free = implementation-defined;
        static constexpr size_t required_alignment = implementation-defined;
    };
}

```

```

atomic_ref() = delete;
atomic_ref& operator=(const atomic_ref&) = delete;

explicit atomic_ref(T*&);
atomic_ref(const atomic_ref&) noexcept;

T* operator=(T*) const noexcept;
operator T*() const noexcept;

bool is_lock_free() const noexcept;
void store(T*, memory_order = memory_order_seq_cst) const noexcept;
T* load(memory_order = memory_order_seq_cst) const noexcept;
T* exchange(T*, memory_order = memory_order_seq_cst) const noexcept;
bool compare_exchange_weak(T*&, T*,
                           memory_order, memory_order) const noexcept;
bool compare_exchange_strong(T*&, T*,
                             memory_order, memory_order) const noexcept;
bool compare_exchange_weak(T*&, T*,
                           memory_order = memory_order_seq_cst) const noexcept;
bool compare_exchange_strong(T*&, T*,
                             memory_order = memory_order_seq_cst) const noexcept;

T* fetch_add(difference_type, memory_order = memory_order_seq_cst) const noexcept;
T* fetch_sub(difference_type, memory_order = memory_order_seq_cst) const noexcept;

T* operator++(int) const noexcept;
T* operator--(int) const noexcept;
T* operator++() const noexcept;
T* operator--() const noexcept;
T* operator+=(difference_type) const noexcept;
T* operator-=(difference_type) const noexcept;
};
}

```

¹ Descriptions are provided below only for members that differ from the primary template.

² The following operations perform arithmetic computations. The key, operator, and computation correspondence is identified in Table 133.

```
T* fetch_key(difference_type operand, memory_order order = memory_order_seq_cst) const noexcept;
```

³ *Requires:* T shall be an object type, otherwise the program is ill-formed.

⁴ *Effects:* Atomically replaces the value referenced by *ptr with the result of the computation applied to the value referenced by *ptr and the given operand. Memory is affected according to the value of order. These operations are atomic read-modify-write operations (6.8.2.1).

⁵ *Returns:* Atomically, the value referenced by *ptr immediately before the effects.

⁶ *Remarks:* The result may be an undefined address, but the operations otherwise have no undefined behavior.

```
T* operator op=(difference_type operand) const noexcept;
```

⁷ *Effects:* Equivalent to: return fetch_key(operand) op operand;

33.6.5 Member operators common to integers and pointers to objects [atomics.ref.memop]

```
T* operator++(int) const noexcept;
```

¹ *Effects:* Equivalent to: return fetch_add(1);

```
T* operator--(int) const noexcept;
```

² *Effects:* Equivalent to: return fetch_sub(1);

```
T* operator++() const noexcept;
```

³ *Effects:* Equivalent to: return fetch_add(1) + 1;

T* operator--(int) const noexcept;

4 *Effects:* Equivalent to: return fetch_sub(1) - 1;

33.7 Class template atomic

[atomics.types.generic]

```
namespace std {
    template<class T> struct atomic {
        using value_type = T;
        static constexpr bool is_always_lock_free = implementation-defined;
        bool is_lock_free() const volatile noexcept;
        bool is_lock_free() const noexcept;
        void store(T, memory_order = memory_order::seq_cst) volatile noexcept;
        void store(T, memory_order = memory_order::seq_cst) noexcept;
        T load(memory_order = memory_order::seq_cst) const volatile noexcept;
        T load(memory_order = memory_order::seq_cst) const noexcept;
        operator T() const volatile noexcept;
        operator T() const noexcept;
        T exchange(T, memory_order = memory_order::seq_cst) volatile noexcept;
        T exchange(T, memory_order = memory_order::seq_cst) noexcept;
        bool compare_exchange_weak(T&, T, memory_order, memory_order) volatile noexcept;
        bool compare_exchange_weak(T&, T, memory_order, memory_order) noexcept;
        bool compare_exchange_strong(T&, T, memory_order, memory_order) volatile noexcept;
        bool compare_exchange_strong(T&, T, memory_order, memory_order) noexcept;
        bool compare_exchange_weak(T&, T, memory_order = memory_order::seq_cst) volatile noexcept;
        bool compare_exchange_weak(T&, T, memory_order = memory_order::seq_cst) noexcept;
        bool compare_exchange_strong(T&, T, memory_order = memory_order::seq_cst) volatile noexcept;
        bool compare_exchange_strong(T&, T, memory_order = memory_order::seq_cst) noexcept;

        atomic() noexcept = default;
        constexpr atomic(T) noexcept;
        atomic(const atomic&) = delete;
        atomic& operator=(const atomic&) = delete;
        atomic& operator=(const atomic&) volatile = delete;
        T operator=(T) volatile noexcept;
        T operator=(T) noexcept;
    };
}
```

- 1 The template argument for T shall be trivially copyable (6.7). [*Note:* Type arguments that are not also statically initializable may be difficult to use. — *end note*]
- 2 The specialization `atomic<bool>` is a standard-layout struct.
- 3 [*Note:* The representation of an atomic specialization need not have the same size as its corresponding argument type. Specializations should have the same size whenever possible, as this reduces the effort required to port existing code. — *end note*]

33.7.1 Operations on atomic types

[atomics.types.operations]

- 1 [*Note:* Many operations are volatile-qualified. The “volatile as device register” semantics have not changed in the standard. This qualification means that volatility is preserved when applying these operations to volatile objects. It does not mean that operations on non-volatile objects become volatile. — *end note*]

atomic() noexcept = default;

- 2 *Effects:* Leaves the atomic object in an uninitialized state. [*Note:* These semantics ensure compatibility with C. — *end note*]

constexpr atomic(T desired) noexcept;

- 3 *Effects:* Initializes the object with the value `desired`. Initialization is not an atomic operation (6.8.2). [*Note:* It is possible to have an access to an atomic object A race with its construction, for example by communicating the address of the just-constructed object A to another thread via `memory_order::relaxed` operations on a suitable atomic pointer variable, and then immediately accessing A in the receiving thread. This results in undefined behavior. — *end note*]


```
#define ATOMIC_VAR_INIT(value) see below
```

- 4 The macro expands to a token sequence suitable for constant initialization of an atomic variable of static storage duration of a type that is initialization-compatible with `value`. [*Note:* This operation may need to initialize locks. — *end note*] Concurrent access to the variable being initialized, even via an atomic operation, constitutes a data race. [*Example:*

```
    atomic<int> v = ATOMIC_VAR_INIT(5);
    — end example]
```

```
static constexpr bool is_always_lock_free = implementation-defined;
```

- 5 The static data member `is_always_lock_free` is true if the atomic type's operations are always lock-free, and false otherwise. [*Note:* The value of `is_always_lock_free` is consistent with the value of the corresponding `ATOMIC_..._LOCK_FREE` macro, if defined. — *end note*]

```
bool is_lock_free() const volatile noexcept;
bool is_lock_free() const noexcept;
```

- 6 *Returns:* true if the object's operations are lock-free, false otherwise. [*Note:* The return value of the `is_lock_free` member function is consistent with the value of `is_always_lock_free` for the same type. — *end note*]

```
void store(T desired, memory_order order = memory_order::seq_cst) volatile noexcept;
void store(T desired, memory_order order = memory_order::seq_cst) noexcept;
```

- 7 *Requires:* The `order` argument shall not be `memory_order::consume`, `memory_order::acquire`, nor `memory_order::acq_rel`.

- 8 *Effects:* Atomically replaces the value pointed to by `this` with the value of `desired`. Memory is affected according to the value of `order`.

```
T operator=(T desired) volatile noexcept;
T operator=(T desired) noexcept;
```

- 9 *Effects:* Equivalent to `store(desired)`.

- 10 *Returns:* `desired`.

```
T load(memory_order order = memory_order::seq_cst) const volatile noexcept;
T load(memory_order order = memory_order::seq_cst) const noexcept;
```

- 11 *Requires:* The `order` argument shall not be `memory_order::release` nor `memory_order::acq_rel`.

- 12 *Effects:* Memory is affected according to the value of `order`.

- 13 *Returns:* Atomically returns the value pointed to by `this`.

```
operator T() const volatile noexcept;
operator T() const noexcept;
```

- 14 *Effects:* Equivalent to: `return load();`

```
T exchange(T desired, memory_order order = memory_order::seq_cst) volatile noexcept;
T exchange(T desired, memory_order order = memory_order::seq_cst) noexcept;
```

- 15 *Effects:* Atomically replaces the value pointed to by `this` with `desired`. Memory is affected according to the value of `order`. These operations are atomic read-modify-write operations (6.8.2).

- 16 *Returns:* Atomically returns the value pointed to by `this` immediately before the effects.

```
bool compare_exchange_weak(T& expected, T desired,
                           memory_order success, memory_order failure) volatile noexcept;
bool compare_exchange_weak(T& expected, T desired,
                           memory_order success, memory_order failure) noexcept;
bool compare_exchange_strong(T& expected, T desired,
                             memory_order success, memory_order failure) volatile noexcept;
bool compare_exchange_strong(T& expected, T desired,
                             memory_order success, memory_order failure) noexcept;
bool compare_exchange_weak(T& expected, T desired,
                           memory_order order = memory_order::seq_cst) volatile noexcept;
```

```

bool compare_exchange_weak(T& expected, T desired,
                           memory_order order = memory_order::seq_cst) noexcept;
bool compare_exchange_strong(T& expected, T desired,
                             memory_order order = memory_order::seq_cst) volatile noexcept;
bool compare_exchange_strong(T& expected, T desired,
                             memory_order order = memory_order::seq_cst) noexcept;

```

17 *Requires:* The `failure` argument shall not be `memory_order::release` nor `memory_order::acq_rel`.

18 *Effects:* Retrieves the value in `expected`. It then atomically compares the value representation of the value pointed to by `this` for equality with that previously retrieved from `expected`, and if true, replaces the value pointed to by `this` with that in `desired`. If and only if the comparison is true, memory is affected according to the value of `success`, and if the comparison is false, memory is affected according to the value of `failure`. When only one `memory_order` argument is supplied, the value of `success` is `order`, and the value of `failure` is `order` except that a value of `memory_order::acq_rel` shall be replaced by the value `memory_order::acquire` and a value of `memory_order::release` shall be replaced by the value `memory_order::relaxed`. If and only if the comparison is false then, after the atomic operation, the value in `expected` is replaced by the value pointed to by `this` during the atomic comparison. If the operation returns `true`, these operations are atomic read-modify-write operations (6.8.2) on the memory pointed to by `this`. Otherwise, these operations are atomic load operations on that memory.

19 *Returns:* The result of the comparison.

20 [Note: For example, the effect of `compare_exchange_strong` on objects without padding bits (6.7) is

```

    if (memcmp(this, &expected, sizeof(*this)) == 0)
        memcpy(this, &desired, sizeof(*this));
    else
        memcpy(expected, this, sizeof(*this));

```

— *end note*] [Example: The expected use of the compare-and-exchange operations is as follows. The compare-and-exchange operations will update `expected` when another iteration of the loop is needed.

```

    expected = current.load();
    do {
        desired = function(expected);
    } while (!current.compare_exchange_weak(expected, desired));

```

— *end example*] [Example: Because the expected value is updated only on failure, code releasing the memory containing the `expected` value on success will work. E.g. list head insertion will act atomically and would not introduce a data race in the following code:

```

    do {
        p->next = head; // make new list node point to the current head
    } while (!head.compare_exchange_weak(p->next, p)); // try to insert

```

— *end example*]

21 Implementations should ensure that weak compare-and-exchange operations do not consistently return `false` unless either the atomic object has value different from `expected` or there are concurrent modifications to the atomic object.

22 *Remarks:* A weak compare-and-exchange operation may fail spuriously. That is, even when the contents of memory referred to by `expected` and `this` are equal, it may return `false` and store back to `expected` the same memory contents that were originally there. [Note: This spurious failure enables implementation of compare-and-exchange on a broader class of machines, e.g., load-locked store-conditional machines. A consequence of spurious failure is that nearly all uses of weak compare-and-exchange will be in a loop. When a compare-and-exchange is in a loop, the weak version will yield better performance on some platforms. When a weak compare-and-exchange would require a loop and a strong one would not, the strong one is preferable. — *end note*]

23 [Note: Under cases where the `memcpy` and `memcmp` semantics of the compare-and-exchange operations apply, the outcome might be failed comparisons for values that compare equal with `operator==` if the value representation has trap bits or alternate representations of the same value. Notably, on implementations conforming to ISO/IEC/IEEE 60559, floating-point `-0.0` and `+0.0` will not compare equal with `memcmp` but will compare equal with `operator==`, and NaNs with the same payload will compare equal with `memcmp` but will not compare equal with `operator==`. — *end note*] [Note: Because

compare-and-exchange acts on an object's value representation, padding bits that never participate in the object's value representation are ignored. As a consequence, the following code is guaranteed to avoid spurious failure:

```
struct padded {
    char clank = 0x42;
    // Padding here.
    unsigned biff = 0xCODEFEFE;
};
atomic<padded> pad = ATOMIC_VAR_INIT({});

bool zap() {
    padded expected, desired{0, 0};
    return pad.compare_exchange_strong(expected, desired);
}
```

— end note] [Note: For a union with bits that participate in the value representation of some members but not others, compare-and-exchange might always fail. This is because such padding bits have an indeterminate value when they do not participate in the value representation of the active member. As a consequence, the following code is not guaranteed to ever succeed:

```
union pony {
    double celestia = 0.;
    short luna; // padded
};
atomic<pony> princesses = ATOMIC_VAR_INIT({});

bool party(pony desired) {
    pony expected;
    return princesses.compare_exchange_strong(expected, desired);
}
```

— end note]

33.7.2 Specializations for integers

[atomics.types.int]

- ¹ There are specializations of the atomic class template for the integral types char, signed char, unsigned char, short, unsigned short, int, unsigned int, long, unsigned long, long long, unsigned long long, char16_t, char32_t, wchar_t, and any other types needed by the typedefs in the header <cstdint>. For each such type *integral*, the specialization atomic<*integral*> provides additional atomic operations appropriate to integral types. [Note: For the specialization atomic<bool>, see 33.7. — end note]

```
namespace std {
    template<> struct atomic<integral> {
        using value_type = integral;
        using difference_type = value_type;
        static constexpr bool is_always_lock_free = implementation-defined;
        bool is_lock_free() const volatile noexcept;
        bool is_lock_free() const noexcept;
        void store(integral, memory_order = memory_order::seq_cst) volatile noexcept;
        void store(integral, memory_order = memory_order::seq_cst) noexcept;
        integral load(memory_order = memory_order::seq_cst) const volatile noexcept;
        integral load(memory_order = memory_order::seq_cst) const noexcept;
        operator integral() const volatile noexcept;
        operator integral() const noexcept;
        integral exchange(integral, memory_order = memory_order::seq_cst) volatile noexcept;
        integral exchange(integral, memory_order = memory_order::seq_cst) noexcept;
        bool compare_exchange_weak(integral&, integral,
                                   memory_order, memory_order) volatile noexcept;
        bool compare_exchange_weak(integral&, integral,
                                   memory_order, memory_order) noexcept;
        bool compare_exchange_strong(integral&, integral,
                                     memory_order, memory_order) volatile noexcept;
        bool compare_exchange_strong(integral&, integral,
                                     memory_order, memory_order) noexcept;
    };
}
```

```

bool compare_exchange_weak(integral&, integral,
                           memory_order = memory_order::seq_cst) volatile noexcept;
bool compare_exchange_weak(integral&, integral,
                           memory_order = memory_order::seq_cst) noexcept;
bool compare_exchange_strong(integral&, integral,
                             memory_order = memory_order::seq_cst) volatile noexcept;
bool compare_exchange_strong(integral&, integral,
                              memory_order = memory_order::seq_cst) noexcept;
integral fetch_add(integral, memory_order = memory_order::seq_cst) volatile noexcept;
integral fetch_add(integral, memory_order = memory_order::seq_cst) noexcept;
integral fetch_sub(integral, memory_order = memory_order::seq_cst) volatile noexcept;
integral fetch_sub(integral, memory_order = memory_order::seq_cst) noexcept;
integral fetch_and(integral, memory_order = memory_order::seq_cst) volatile noexcept;
integral fetch_and(integral, memory_order = memory_order::seq_cst) noexcept;
integral fetch_or(integral, memory_order = memory_order::seq_cst) volatile noexcept;
integral fetch_or(integral, memory_order = memory_order::seq_cst) noexcept;
integral fetch_xor(integral, memory_order = memory_order::seq_cst) volatile noexcept;
integral fetch_xor(integral, memory_order = memory_order::seq_cst) noexcept;

atomic() noexcept = default;
constexpr atomic(integral) noexcept;
atomic(const atomic&) = delete;
atomic& operator=(const atomic&) = delete;
atomic& operator=(const atomic&) volatile = delete;
integral operator=(integral) volatile noexcept;
integral operator=(integral) noexcept;

integral operator++(int) volatile noexcept;
integral operator++(int) noexcept;
integral operator--(int) volatile noexcept;
integral operator--(int) noexcept;
integral operator++() volatile noexcept;
integral operator++() noexcept;
integral operator--() volatile noexcept;
integral operator--() noexcept;
integral operator+=(integral) volatile noexcept;
integral operator+=(integral) noexcept;
integral operator-=(integral) volatile noexcept;
integral operator-=(integral) noexcept;
integral operator&=(integral) volatile noexcept;
integral operator&=(integral) noexcept;
integral operator|=(integral) volatile noexcept;
integral operator|=(integral) noexcept;
integral operator^=(integral) volatile noexcept;
integral operator^=(integral) noexcept;
};
}

```

- ² The atomic integral specializations are standard-layout structs. They each have a trivial default constructor and a trivial destructor.
- ³ Descriptions are provided below only for members that differ from the primary template.
- ⁴ The following operations perform arithmetic computations. The key, operator, and computation correspondence is:

Table 132 — Atomic arithmetic computations

key	Op	Computation	key	Op	Computation
add	+	addition	sub	-	subtraction
or		bitwise inclusive or	xor	^	bitwise exclusive or
and	&	bitwise and			

```
T fetch_key(T operand, memory_order order = memory_order::seq_cst) volatile noexcept;
```

```
T fetch_key(T operand, memory_order order = memory_order::seq_cst) noexcept;
```

5 *Effects:* Atomically replaces the value pointed to by `this` with the result of the computation applied to the value pointed to by `this` and the given `operand`. Memory is affected according to the value of `order`. These operations are atomic read-modify-write operations (6.8.2).

6 *Returns:* Atomically, the value pointed to by `this` immediately before the effects.

7 *Remarks:* For signed integer types, arithmetic is defined to use two's complement representation. There are no undefined results.

```
T operator op=(T operand) volatile noexcept;
```

```
T operator op=(T operand) noexcept;
```

8 *Effects:* Equivalent to: `return fetch_key(operand) op operand;`

33.7.3 Specializations for floating-point types [atomics.types.float]

1 There are specializations of the atomic class template for the floating-point types `float`, `double`, and `long double`. For each such type *floating-point*, the specialization `atomic<floating-point>` provides additional atomic operations appropriate to floating-point types.

```
namespace std {
  template<> struct atomic<floating-point> {
    using value_type = floating-point;
    using difference_type = value_type;
    static constexpr bool is_always_lock_free = implementation-defined;
    bool is_lock_free() const volatile noexcept;
    bool is_lock_free() const noexcept;
    void store(floating-point, memory_order = memory_order_seq_cst) volatile noexcept;
    void store(floating-point, memory_order = memory_order_seq_cst) noexcept;
    floating-point load(memory_order = memory_order_seq_cst) volatile noexcept;
    floating-point load(memory_order = memory_order_seq_cst) noexcept;
    operator floating-point() volatile noexcept;
    operator floating-point() noexcept;
    floating-point exchange(floating-point,
                           memory_order = memory_order_seq_cst) volatile noexcept;
    floating-point exchange(floating-point,
                           memory_order = memory_order_seq_cst) noexcept;
    bool compare_exchange_weak(floating-point&, floating-point,
                              memory_order, memory_order) volatile noexcept;
    bool compare_exchange_weak(floating-point&, floating-point,
                              memory_order, memory_order) noexcept;
    bool compare_exchange_strong(floating-point&, floating-point,
                                 memory_order, memory_order) volatile noexcept;
    bool compare_exchange_strong(floating-point&, floating-point,
                                 memory_order, memory_order) noexcept;
    bool compare_exchange_weak(floating-point&, floating-point,
                              memory_order = memory_order_seq_cst) volatile noexcept;
    bool compare_exchange_weak(floating-point&, floating-point,
                              memory_order = memory_order_seq_cst) noexcept;
    bool compare_exchange_strong(floating-point&, floating-point,
                                 memory_order = memory_order_seq_cst) volatile noexcept;
    bool compare_exchange_strong(floating-point&, floating-point,
                                 memory_order = memory_order_seq_cst) noexcept;

    floating-point fetch_add(floating-point,
                           memory_order = memory_order_seq_cst) volatile noexcept;
    floating-point fetch_add(floating-point,
                           memory_order = memory_order_seq_cst) noexcept;
    floating-point fetch_sub(floating-point,
                           memory_order = memory_order_seq_cst) volatile noexcept;
    floating-point fetch_sub(floating-point,
                           memory_order = memory_order_seq_cst) noexcept;

    atomic() noexcept = default;
    constexpr atomic(floating-point) noexcept;
```

```

    atomic(const atomic&) = delete;
    atomic& operator=(const atomic&) = delete;
    atomic& operator=(const atomic&) volatile = delete;
    floating-point operator=(floating-point) volatile noexcept;
    floating-point operator=(floating-point) noexcept;

    floating-point operator+=(floating-point) volatile noexcept;
    floating-point operator+=(floating-point) noexcept;
    floating-point operator-=(floating-point) volatile noexcept;
    floating-point operator-=(floating-point) noexcept;
};
}

```

2 The atomic floating-point specializations are standard-layout structs. They each have a trivial default constructor and a trivial destructor.

3 Descriptions are provided below only for members that differ from the primary template.

4 The following operations perform arithmetic addition and subtraction computations. The key, operator, and computation correspondence are identified in Table 132.

```

T A::fetch_key(T operand, memory_order order = memory_order_seq_cst) volatile noexcept;
T A::fetch_key(T operand, memory_order order = memory_order_seq_cst) noexcept;

```

5 *Effects:* Atomically replaces the value pointed to by **this** with the result of the computation applied to the value pointed to by **this** and the given **operand**. Memory is affected according to the value of **order**. These operations are atomic read-modify-write operations (6.8.2).

6 *Returns:* Atomically, the value pointed to by **this** immediately before the effects.

7 *Remarks:* If the result is not a representable value for its type (8.1) the result is unspecified, but the operations otherwise have no undefined behavior. Atomic arithmetic operations on *floating-point* should conform to the `std::numeric_limits<floating-point>` traits associated with the floating-point type (21.3.2). The floating-point environment (30.4) for atomic arithmetic operations on *floating-point* may be different than the calling thread's floating-point environment.

```

T operator op=(T operand) volatile noexcept;
T operator op=(T operand) noexcept;

```

8 *Effects:* Equivalent to: `return fetch_key(operand) op operand;`

9 *Remarks:* If the result is not a representable value for its type (8.1) the result is unspecified, but the operations otherwise have no undefined behavior. Atomic arithmetic operations on *floating-point* should conform to the `std::numeric_limits<floating-point>` traits associated with the floating-point type (21.3.2). The floating-point environment (30.4) for atomic arithmetic operations on *floating-point* may be different than the calling thread's floating-point environment.

33.7.4 Partial specialization for pointers

[atomics.types.pointer]

```

namespace std {
    template<class T> struct atomic<T*> {
        using value_type = T*;
        using difference_type = ptrdiff_t;
        static constexpr bool is_always_lock_free = implementation-defined;
        bool is_lock_free() const volatile noexcept;
        bool is_lock_free() const noexcept;
        void store(T*, memory_order = memory_order::seq_cst) volatile noexcept;
        void store(T*, memory_order = memory_order::seq_cst) noexcept;
        T* load(memory_order = memory_order::seq_cst) const volatile noexcept;
        T* load(memory_order = memory_order::seq_cst) const noexcept;
        operator T*() const volatile noexcept;
        operator T*() const noexcept;
        T* exchange(T*, memory_order = memory_order::seq_cst) volatile noexcept;
        T* exchange(T*, memory_order = memory_order::seq_cst) noexcept;
        bool compare_exchange_weak(T*&, T*, memory_order, memory_order) volatile noexcept;
        bool compare_exchange_weak(T*&, T*, memory_order, memory_order) noexcept;
        bool compare_exchange_strong(T*&, T*, memory_order, memory_order) volatile noexcept;
        bool compare_exchange_strong(T*&, T*, memory_order, memory_order) noexcept;
    };
}

```

```

bool compare_exchange_weak(T*&, T*,
                           memory_order = memory_order::seq_cst) volatile noexcept;
bool compare_exchange_weak(T*&, T*,
                           memory_order = memory_order::seq_cst) noexcept;
bool compare_exchange_strong(T*&, T*,
                             memory_order = memory_order::seq_cst) volatile noexcept;
bool compare_exchange_strong(T*&, T*,
                             memory_order = memory_order::seq_cst) noexcept;
T* fetch_add(ptrdiff_t, memory_order = memory_order::seq_cst) volatile noexcept;
T* fetch_add(ptrdiff_t, memory_order = memory_order::seq_cst) noexcept;
T* fetch_sub(ptrdiff_t, memory_order = memory_order::seq_cst) volatile noexcept;
T* fetch_sub(ptrdiff_t, memory_order = memory_order::seq_cst) noexcept;

atomic() noexcept = default;
constexpr atomic(T*) noexcept;
atomic(const atomic&) = delete;
atomic& operator=(const atomic&) = delete;
atomic& operator=(const atomic&) volatile = delete;
T* operator=(T*) volatile noexcept;
T* operator=(T*) noexcept;

T* operator++(int) volatile noexcept;
T* operator++(int) noexcept;
T* operator--(int) volatile noexcept;
T* operator--(int) noexcept;
T* operator++() volatile noexcept;
T* operator++() noexcept;
T* operator--() volatile noexcept;
T* operator--() noexcept;
T* operator+=(ptrdiff_t) volatile noexcept;
T* operator+=(ptrdiff_t) noexcept;
T* operator-=(ptrdiff_t) volatile noexcept;
T* operator-=(ptrdiff_t) noexcept;
};
}

```

- 1 There is a partial specialization of the `atomic` class template for pointers. Specializations of this partial specialization are standard-layout structs. They each have a trivial default constructor and a trivial destructor.
- 2 Descriptions are provided below only for members that differ from the primary template.
- 3 The following operations perform pointer arithmetic. The key, operator, and computation correspondence is:

Table 133 — Atomic pointer computations

Key	Op	Computation	Key	Op	Computation
add	+	addition	sub	-	subtraction

```

T* fetch_key(ptrdiff_t operand, memory_order order = memory_order::seq_cst) volatile noexcept;
T* fetch_key(ptrdiff_t operand, memory_order order = memory_order::seq_cst) noexcept;

```

- 4 *Requires:* `T` shall be an object type, otherwise the program is ill-formed. [*Note:* Pointer arithmetic on `void*` or function pointers is ill-formed. — *end note*]
- 5 *Effects:* Atomically replaces the value pointed to by `this` with the result of the computation applied to the value pointed to by `this` and the given `operand`. Memory is affected according to the value of `order`. These operations are atomic read-modify-write operations (6.8.2).
- 6 *Returns:* Atomically, the value pointed to by `this` immediately before the effects.
- 7 *Remarks:* The result may be an undefined address, but the operations otherwise have no undefined behavior.

```

T* operator op=(ptrdiff_t operand) volatile noexcept;
T* operator op=(ptrdiff_t operand) noexcept;

```

- 8 *Effects:* Equivalent to: `return fetch_key(operand) op operand;`

33.7.5 Member operators common to integers and pointers to objects [atomics.types.memop]

```
T operator++(int) volatile noexcept;
```

```
T operator++(int) noexcept;
```

1 *Effects:* Equivalent to: `return fetch_add(1);`

```
T operator--(int) volatile noexcept;
```

```
T operator--(int) noexcept;
```

2 *Effects:* Equivalent to: `return fetch_sub(1);`

```
T operator++() volatile noexcept;
```

```
T operator++() noexcept;
```

3 *Effects:* Equivalent to: `return fetch_add(1) + 1;`

```
T operator--() volatile noexcept;
```

```
T operator--() noexcept;
```

4 *Effects:* Equivalent to: `return fetch_sub(1) - 1;`

33.8 Non-member functions [atomics.nonmembers]

1 A non-member function template whose name matches the pattern `atomic_f` or the pattern `atomic_f_`-`explicit` invokes the member function `f`, with the value of the first parameter as the object expression and the values of the remaining parameters (if any) as the arguments of the member function call, in order. An argument for a parameter of type `atomic<T>::value_type*` is dereferenced when passed to the member function call. If no such member function exists, the program is ill-formed.

```
template<class T>
```

```
void atomic_init(volatile atomic<T>* object, typename atomic<T>::value_type desired) noexcept;
```

```
template<class T>
```

```
void atomic_init(atomic<T>* object, typename atomic<T>::value_type desired) noexcept;
```

2 *Effects:* Non-atomically initializes `*object` with value `desired`. This function shall only be applied to objects that have been default constructed, and then only once. [Note: These semantics ensure compatibility with C. — end note] [Note: Concurrent access from another thread, even via an atomic operation, constitutes a data race. — end note]

3 [Note: The non-member functions enable programmers to write code that can be compiled as either C or C++, for example in a shared header file. — end note]

33.9 Flag type and operations [atomics.flag]

```
namespace std {
```

```
struct atomic_flag {
```

```
bool test_and_set(memory_order = memory_order::seq_cst) volatile noexcept;
```

```
bool test_and_set(memory_order = memory_order::seq_cst) noexcept;
```

```
void clear(memory_order = memory_order::seq_cst) volatile noexcept;
```

```
void clear(memory_order = memory_order::seq_cst) noexcept;
```

```
atomic_flag() noexcept = default;
```

```
atomic_flag(const atomic_flag&) = delete;
```

```
atomic_flag& operator=(const atomic_flag&) = delete;
```

```
atomic_flag& operator=(const atomic_flag&) volatile = delete;
```

```
};
```

```
bool atomic_flag_test_and_set(volatile atomic_flag*) noexcept;
```

```
bool atomic_flag_test_and_set(atomic_flag*) noexcept;
```

```
bool atomic_flag_test_and_set_explicit(volatile atomic_flag*, memory_order) noexcept;
```

```
bool atomic_flag_test_and_set_explicit(atomic_flag*, memory_order) noexcept;
```

```
void atomic_flag_clear(volatile atomic_flag*) noexcept;
```

```
void atomic_flag_clear(atomic_flag*) noexcept;
```

```
void atomic_flag_clear_explicit(volatile atomic_flag*, memory_order) noexcept;
```

```
void atomic_flag_clear_explicit(atomic_flag*, memory_order) noexcept;
```



```
#define ATOMIC_FLAG_INIT see below
}
```

- 1 The `atomic_flag` type provides the classic test-and-set functionality. It has two states, set and clear.
- 2 Operations on an object of type `atomic_flag` shall be lock-free. [*Note:* Hence the operations should also be address-free. — *end note*]
- 3 The `atomic_flag` type is a standard-layout struct. It has a trivial default constructor and a trivial destructor.
- 4 The macro `ATOMIC_FLAG_INIT` shall be defined in such a way that it can be used to initialize an object of type `atomic_flag` to the clear state. The macro can be used in the form:

```
atomic_flag guard = ATOMIC_FLAG_INIT;
```

It is unspecified whether the macro can be used in other initialization contexts. For a complete static-duration object, that initialization shall be static. Unless initialized with `ATOMIC_FLAG_INIT`, it is unspecified whether an `atomic_flag` object has an initial state of set or clear.

```
bool atomic_flag_test_and_set(volatile atomic_flag* object) noexcept;
bool atomic_flag_test_and_set(atomic_flag* object) noexcept;
bool atomic_flag_test_and_set_explicit(volatile atomic_flag* object, memory_order order) noexcept;
bool atomic_flag_test_and_set_explicit(atomic_flag* object, memory_order order) noexcept;
bool atomic_flag::test_and_set(memory_order order = memory_order::seq_cst) volatile noexcept;
bool atomic_flag::test_and_set(memory_order order = memory_order::seq_cst) noexcept;
```

- 5 *Effects:* Atomically sets the value pointed to by `object` or by `this` to true. Memory is affected according to the value of `order`. These operations are atomic read-modify-write operations (6.8.2).
- 6 *Returns:* Atomically, the value of the object immediately before the effects.

```
void atomic_flag_clear(volatile atomic_flag* object) noexcept;
void atomic_flag_clear(atomic_flag* object) noexcept;
void atomic_flag_clear_explicit(volatile atomic_flag* object, memory_order order) noexcept;
void atomic_flag_clear_explicit(atomic_flag* object, memory_order order) noexcept;
void atomic_flag::clear(memory_order order = memory_order::seq_cst) volatile noexcept;
void atomic_flag::clear(memory_order order = memory_order::seq_cst) noexcept;
```

- 7 *Requires:* The `order` argument shall not be `memory_order::consume`, `memory_order::acquire`, nor `memory_order::acq_rel`.
- 8 *Effects:* Atomically sets the value pointed to by `object` or by `this` to false. Memory is affected according to the value of `order`.

33.10 Fences

[atomics.fences]

- 1 This subclause introduces synchronization primitives called *fences*. Fences can have acquire semantics, release semantics, or both. A fence with acquire semantics is called an *acquire fence*. A fence with release semantics is called a *release fence*.
- 2 A release fence *A* synchronizes with an acquire fence *B* if there exist atomic operations *X* and *Y*, both operating on some atomic object *M*, such that *A* is sequenced before *X*, *X* modifies *M*, *Y* is sequenced before *B*, and *Y* reads the value written by *X* or a value written by any side effect in the hypothetical release sequence *X* would head if it were a release operation.
- 3 A release fence *A* synchronizes with an atomic operation *B* that performs an acquire operation on an atomic object *M* if there exists an atomic operation *X* such that *A* is sequenced before *X*, *X* modifies *M*, and *B* reads the value written by *X* or a value written by any side effect in the hypothetical release sequence *X* would head if it were a release operation.
- 4 An atomic operation *A* that is a release operation on an atomic object *M* synchronizes with an acquire fence *B* if there exists some atomic operation *X* on *M* such that *X* is sequenced before *B* and reads the value written by *A* or a value written by any side effect in the release sequence headed by *A*.

```
extern "C" void atomic_thread_fence(memory_order order) noexcept;
```

- 5 *Effects:* Depending on the value of `order`, this operation:
 - (5.1) — has no effects, if `order == memory_order::relaxed`;
 - (5.2) — is an acquire fence, if `order == memory_order::acquire` or `order == memory_order::consume`;

- (5.3) — is a release fence, if `order == memory_order::release`;
- (5.4) — is both an acquire fence and a release fence, if `order == memory_order::acq_rel`;
- (5.5) — is a sequentially consistent acquire and release fence, if `order == memory_order::seq_cst`.

```
extern "C" void atomic_signal_fence(memory_order order) noexcept;
```

⁶ *Effects:* Equivalent to `atomic_thread_fence(order)`, except that the resulting ordering constraints are established only between a thread and a signal handler executed in the same thread.

⁷ [*Note:* `atomic_signal_fence` can be used to specify the order in which actions performed by the thread become visible to the signal handler. Compiler optimizations and reorderings of loads and stores are inhibited in the same way as with `atomic_thread_fence`, but the hardware fence instructions that `atomic_thread_fence` would have inserted are not emitted. — *end note*]

34 Thread support library

[thread]

34.1 General

[thread.general]

- ¹ The following subclauses describe components to create and manage threads (6.8.2), perform mutual exclusion, and communicate conditions and values between threads, as summarized in Table 134.

Table 134 — Thread support library summary

Subclause	Header(s)
34.2	Requirements
34.3	Threads <thread>
34.4	Mutual exclusion <mutex> <shared_mutex>
34.5	Condition variables <condition_variable>
34.6	Futures <future>

34.2 Requirements

[thread.req]

34.2.1 Template parameter names

[thread.req.paramname]

- ¹ Throughout this Clause, the names of template parameters are used to express type requirements. If a template parameter is named `Predicate`, `operator()` applied to the template argument shall return a value that is convertible to `bool`. If a template parameter is named `Clock`, the corresponding template argument shall be a type `C` for which `is_clock_v<C>` is `true`; otherwise the program is ill-formed.

34.2.2 Exceptions

[thread.req.exception]

- ¹ Some functions described in this Clause are specified to throw exceptions of type `system_error` (23.5.7). Such exceptions shall be thrown if any of the function's error conditions is detected or a call to an operating system or other underlying API results in an error that prevents the library function from meeting its specifications. Failure to allocate storage shall be reported as described in 20.5.5.12.

[*Example:* Consider a function in this clause that is specified to throw exceptions of type `system_error` and specifies error conditions that include `operation_not_permitted` for a thread that does not have the privilege to perform the operation. Assume that, during the execution of this function, an `errno` of `EPERM` is reported by a POSIX API call used by the implementation. Since POSIX specifies an `errno` of `EPERM` when “the caller does not have the privilege to perform the operation”, the implementation maps `EPERM` to an `error_condition` of `operation_not_permitted` (23.5) and an exception of type `system_error` is thrown. — *end example*]

- ² The `error_code` reported by such an exception's `code()` member function shall compare equal to one of the conditions specified in the function's error condition element.

34.2.3 Native handles

[thread.req.native]

- ¹ Several classes described in this Clause have members `native_handle_type` and `native_handle`. The presence of these members and their semantics is implementation-defined. [*Note:* These members allow implementations to provide access to implementation details. Their names are specified to facilitate portable compile-time detection. Actual use of these members is inherently non-portable. — *end note*]

34.2.4 Timing specifications

[thread.req.timing]

- ¹ Several functions described in this Clause take an argument to specify a timeout. These timeouts are specified as either a `duration` or a `time_point` type as specified in 24.17.
- ² Implementations necessarily have some delay in returning from a timeout. Any overhead in interrupt response, function return, and scheduling induces a “quality of implementation” delay, expressed as duration D_i . Ideally, this delay would be zero. Further, any contention for processor and memory resources induces a “quality of

management” delay, expressed as duration D_m . The delay durations may vary from timeout to timeout, but in all cases shorter is better.

- 3 The functions whose names end in `_for` take an argument that specifies a duration. These functions produce relative timeouts. Implementations should use a steady clock to measure time for these functions.³³² Given a duration argument D_t , the real-time duration of the timeout is $D_t + D_i + D_m$.
- 4 The functions whose names end in `_until` take an argument that specifies a time point. These functions produce absolute timeouts. Implementations should use the clock specified in the time point to measure time for these functions. Given a clock time point argument C_t , the clock time point of the return from timeout should be $C_t + D_i + D_m$ when the clock is not adjusted during the timeout. If the clock is adjusted to the time C_a during the timeout, the behavior should be as follows:
 - (4.1) — if $C_a > C_t$, the waiting function should wake as soon as possible, i.e., $C_a + D_i + D_m$, since the timeout is already satisfied. [Note: This specification may result in the total duration of the wait decreasing when measured against a steady clock. — end note]
 - (4.2) — if $C_a \leq C_t$, the waiting function should not time out until `Clock::now()` returns a time $C_n \geq C_t$, i.e., waking at $C_t + D_i + D_m$. [Note: When the clock is adjusted backwards, this specification may result in the total duration of the wait increasing when measured against a steady clock. When the clock is adjusted forwards, this specification may result in the total duration of the wait decreasing when measured against a steady clock. — end note]

An implementation shall return from such a timeout at any point from the time specified above to the time it would return from a steady-clock relative timeout on the difference between C_t and the time point of the call to the `_until` function. [Note: Implementations should decrease the duration of the wait when the clock is adjusted forwards. — end note]

- 5 [Note: If the clock is not synchronized with a steady clock, e.g., a CPU time clock, these timeouts might not provide useful functionality. — end note]
- 6 The resolution of timing provided by an implementation depends on both operating system and hardware. The finest resolution provided by an implementation is called the *native resolution*.
- 7 Implementation-provided clocks that are used for these functions shall satisfy the *Cpp17TrivialClock* requirements (24.17.3).
- 8 A function that takes an argument which specifies a timeout will throw if, during its execution, a clock, time point, or time duration throws an exception. Such exceptions are referred to as *timeout-related exceptions*. [Note: Instantiations of clock, time point and duration types supplied by the implementation as specified in 24.17.7 do not throw exceptions. — end note]

34.2.5 Requirements for *Cpp17Lockable* types [thread.req.lockable]

34.2.5.1 In general [thread.req.lockable.general]

- 1 An *execution agent* is an entity such as a thread that may perform work in parallel with other execution agents. [Note: Implementations or users may introduce other kinds of agents such as processes or thread-pool tasks. — end note] The calling agent is determined by context, e.g., the calling thread that contains the call, and so on.
- 2 [Note: Some lockable objects are “agent oblivious” in that they work for any execution agent model because they do not determine or store the agent’s ID (e.g., an ordinary spin lock). — end note]
- 3 The standard library templates `unique_lock` (34.4.4.3), `shared_lock` (34.4.4.4), `scoped_lock` (34.4.4.2), `lock_guard` (34.4.4.1), `lock`, `try_lock` (34.4.5), and `condition_variable_any` (34.5.4) all operate on user-supplied lockable objects. The *Cpp17BasicLockable* requirements, the *Cpp17Lockable* requirements, and the *Cpp17TimedLockable* requirements list the requirements imposed by these library types in order to acquire or release ownership of a lock by a given execution agent. [Note: The nature of any lock ownership and any synchronization it may entail are not part of these requirements. — end note]

34.2.5.2 *Cpp17BasicLockable* requirements [thread.req.lockable.basic]

- 1 A type L meets the *Cpp17BasicLockable* requirements if the following expressions are well-formed and have the specified semantics (`m` denotes a value of type L).

³³²) All implementations for which standard time units are meaningful must necessarily have a steady clock within their hardware implementation.

`m.lock()`

- 2 *Effects:* Blocks until a lock can be acquired for the current execution agent. If an exception is thrown then a lock shall not have been acquired for the current execution agent.

`m.unlock()`

- 3 *Requires:* The current execution agent shall hold a lock on `m`.
 4 *Effects:* Releases a lock on `m` held by the current execution agent.
 5 *Throws:* Nothing.

34.2.5.3 *Cpp17Lockable* requirements [thread.req.lockable.req]

- 1 A type `L` meets the *Cpp17Lockable* requirements if it meets the *Cpp17BasicLockable* requirements and the following expressions are well-formed and have the specified semantics (`m` denotes a value of type `L`).

`m.try_lock()`

- 2 *Effects:* Attempts to acquire a lock for the current execution agent without blocking. If an exception is thrown then a lock shall not have been acquired for the current execution agent.
 3 *Return type:* `bool`.
 4 *Returns:* `true` if the lock was acquired, `false` otherwise.

34.2.5.4 *Cpp17TimedLockable* requirements [thread.req.lockable.timed]

- 1 A type `L` meets the *Cpp17TimedLockable* requirements if it meets the *Cpp17Lockable* requirements and the following expressions are well-formed and have the specified semantics (`m` denotes a value of type `L`, `rel_time` denotes a value of an instantiation of `duration` (24.17.5), and `abs_time` denotes a value of an instantiation of `time_point` (24.17.6)).

`m.try_lock_for(rel_time)`

- 2 *Effects:* Attempts to acquire a lock for the current execution agent within the relative timeout (34.2.4) specified by `rel_time`. The function shall not return within the timeout specified by `rel_time` unless it has obtained a lock on `m` for the current execution agent. If an exception is thrown then a lock shall not have been acquired for the current execution agent.
 3 *Return type:* `bool`.
 4 *Returns:* `true` if the lock was acquired, `false` otherwise.

`m.try_lock_until(abs_time)`

- 5 *Effects:* Attempts to acquire a lock for the current execution agent before the absolute timeout (34.2.4) specified by `abs_time`. The function shall not return before the timeout specified by `abs_time` unless it has obtained a lock on `m` for the current execution agent. If an exception is thrown then a lock shall not have been acquired for the current execution agent.
 6 *Return type:* `bool`.
 7 *Returns:* `true` if the lock was acquired, `false` otherwise.

34.2.6 `decay_copy` [thread.decaycopy]

- 1 In several places in this Clause the operation `DECAY_COPY(x)` is used. All such uses mean call the function `decay_copy(x)` and use the result, where `decay_copy` is defined as follows:

```
template<class T> decay_t<T> decay_copy(T&& v)
{ return std::forward<T>(v); }
```

34.3 Threads [thread.threads]

- 1 34.3 describes components that can be used to create and manage threads. [*Note:* These threads are intended to map one-to-one with operating system threads. — *end note*]

34.3.1 Header `<thread>` synopsis [thread.syn]

```
namespace std {
  class thread;
```

```

void swap(thread& x, thread& y) noexcept;

namespace this_thread {
    thread::id get_id() noexcept;

    void yield() noexcept;
    template<class Clock, class Duration>
        void sleep_until(const chrono::time_point<Clock, Duration>& abs_time);
    template<class Rep, class Period>
        void sleep_for(const chrono::duration<Rep, Period>& rel_time);
}
}

```

34.3.2 Class thread

[thread.thread.class]

- ¹ The class `thread` provides a mechanism to create a new thread of execution, to join with a thread (i.e., wait for a thread to complete), and to perform other operations that manage and query the state of a thread. A `thread` object uniquely represents a particular thread of execution. That representation may be transferred to other `thread` objects in such a way that no two `thread` objects simultaneously represent the same thread of execution. A thread of execution is *detached* when no `thread` object represents that thread. Objects of class `thread` can be in a state that does not represent a thread of execution. [Note: A `thread` object does not represent a thread of execution after default construction, after being moved from, or after a successful call to `detach` or `join`. — end note]

```

namespace std {
    class thread {
    public:
        // types
        class id;
        using native_handle_type = implementation-defined; // see 34.2.3

        // construct/copy/destroy
        thread() noexcept;
        template<class F, class... Args> explicit thread(F&& f, Args&&... args);
        ~thread();
        thread(const thread&) = delete;
        thread(thread&&) noexcept;
        thread& operator=(const thread&) = delete;
        thread& operator=(thread&&) noexcept;

        // members
        void swap(thread&) noexcept;
        bool joinable() const noexcept;
        void join();
        void detach();
        id get_id() const noexcept;
        native_handle_type native_handle(); // see 34.2.3

        // static members
        static unsigned int hardware_concurrency() noexcept;
    };
}

```

34.3.2.1 Class thread::id

[thread.thread.id]

```

namespace std {
    class thread::id {
    public:
        id() noexcept;
    };

    bool operator==(thread::id x, thread::id y) noexcept;
    bool operator!=(thread::id x, thread::id y) noexcept;
    bool operator<(thread::id x, thread::id y) noexcept;
    bool operator>(thread::id x, thread::id y) noexcept;
}

```

```

bool operator==(thread::id x, thread::id y) noexcept;
bool operator!=(thread::id x, thread::id y) noexcept;

template<class charT, class traits>
    basic_ostream<charT, traits>&
        operator<<(basic_ostream<charT, traits>& out, thread::id id);

// hash support
template<class T> struct hash;
template<> struct hash<thread::id>;
}

```

1 An object of type `thread::id` provides a unique identifier for each thread of execution and a single distinct value for all `thread` objects that do not represent a thread of execution (34.3.2). Each thread of execution has an associated `thread::id` object that is not equal to the `thread::id` object of any other thread of execution and that is not equal to the `thread::id` object of any `thread` object that does not represent threads of execution.

2 `thread::id` is a trivially copyable class (Clause 12). The library may reuse the value of a `thread::id` of a terminated thread that can no longer be joined.

3 [Note: Relational operators allow `thread::id` objects to be used as keys in associative containers. — end note]

```
id() noexcept;
```

4 *Effects:* Constructs an object of type `id`.

5 *Ensures:* The constructed object does not represent a thread of execution.

```
bool operator==(thread::id x, thread::id y) noexcept;
```

6 *Returns:* true only if `x` and `y` represent the same thread of execution or neither `x` nor `y` represents a thread of execution.

```
bool operator!=(thread::id x, thread::id y) noexcept;
```

7 *Returns:* `!(x == y)`

```
bool operator<(thread::id x, thread::id y) noexcept;
```

8 *Returns:* A value such that `operator<` is a total ordering as described in 29.7.

```
bool operator>(thread::id x, thread::id y) noexcept;
```

9 *Returns:* `y < x`.

```
bool operator<=(thread::id x, thread::id y) noexcept;
```

10 *Returns:* `!(y < x)`.

```
bool operator>=(thread::id x, thread::id y) noexcept;
```

11 *Returns:* `!(x < y)`.

```

template<class charT, class traits>
    basic_ostream<charT, traits>&
        operator<<(basic_ostream<charT, traits>& out, thread::id id);

```

12 *Effects:* Inserts an unspecified text representation of `id` into `out`. For two objects of type `thread::id` `x` and `y`, if `x == y` the `thread::id` objects have the same text representation and if `x != y` the `thread::id` objects have distinct text representations.

13 *Returns:* `out`.

```
template<> struct hash<thread::id>;
```

14 The specialization is enabled (24.14.16).

34.3.2.2 thread constructors [thread.thread.constr]

```
thread() noexcept;
```

1 *Effects:* Constructs a `thread` object that does not represent a thread of execution.

2 *Ensures:* `get_id() == id()`.

```
template<class F, class... Args> explicit thread(F&& f, Args&&... args);
```

3 *Requires:* `F` and each `Ti` in `Args` shall satisfy the *Cpp17MoveConstructible* requirements. `INVOKE(DECAY_COPY(std::forward<F>(f)), DECAY_COPY(std::forward<Args>(args))...)` (24.14.3) shall be a valid expression.

4 *Remarks:* This constructor shall not participate in overload resolution if `remove_cvref_t<F>` is the same type as `std::thread`.

5 *Effects:* Constructs an object of type `thread`. The new thread of execution executes `INVOKE(DECAY_COPY(std::forward<F>(f)), DECAY_COPY(std::forward<Args>(args))...)` with the calls to `DECAY_COPY` being evaluated in the constructing thread. Any return value from this invocation is ignored. *[Note: This implies that any exceptions not thrown from the invocation of the copy of `f` will be thrown in the constructing thread, not the new thread. *end note*]* If the invocation of `INVOKE(DECAY_COPY(std::forward<F>(f)), DECAY_COPY(std::forward<Args>(args))...)` terminates with an uncaught exception, `terminate` shall be called.

6 *Synchronization:* The completion of the invocation of the constructor synchronizes with the beginning of the invocation of the copy of `f`.

7 *Ensures:* `get_id() != id()`. `*this` represents the newly started thread.

8 *Throws:* `system_error` if unable to start the new thread.

9 *Error conditions:*

- (9.1) — `resource_unavailable_try_again` — the system lacked the necessary resources to create another thread, or the system-imposed limit on the number of threads in a process would be exceeded.

```
thread(thread&& x) noexcept;
```

10 *Effects:* Constructs an object of type `thread` from `x`, and sets `x` to a default constructed state.

11 *Ensures:* `x.get_id() == id()` and `get_id()` returns the value of `x.get_id()` prior to the start of construction.

34.3.2.3 thread destructor [thread.thread.destr]

```
~thread();
```

1 If `joinable()`, calls `terminate()`. Otherwise, has no effects. *[Note: Either implicitly detaching or joining a `joinable()` thread in its destructor could result in difficult to debug correctness (for `detach`) or performance (for `join`) bugs encountered only when an exception is thrown. Thus the programmer must ensure that the destructor is never executed while the thread is still `joinable`. — end note]*

34.3.2.4 thread assignment [thread.thread.assign]

```
thread& operator=(thread&& x) noexcept;
```

1 *Effects:* If `joinable()`, calls `terminate()`. Otherwise, assigns the state of `x` to `*this` and sets `x` to a default constructed state.

2 *Ensures:* `x.get_id() == id()` and `get_id()` returns the value of `x.get_id()` prior to the assignment.

3 *Returns:* `*this`.

34.3.2.5 thread members [thread.thread.member]

```
void swap(thread& x) noexcept;
```

1 *Effects:* Swaps the state of `*this` and `x`.

```
bool joinable() const noexcept;
```

2 *Returns:* `get_id() != id()`.


```
void join();
```

3 *Effects:* Blocks until the thread represented by `*this` has completed.

4 *Synchronization:* The completion of the thread represented by `*this` synchronizes with (6.8.2) the corresponding successful `join()` return. [*Note:* Operations on `*this` are not synchronized. — *end note*]

5 *Ensures:* The thread represented by `*this` has completed. `get_id() == id()`.

6 *Throws:* `system_error` when an exception is required (34.2.2).

7 *Error conditions:*

(7.1) — `resource_deadlock_would_occur` — if deadlock is detected or `get_id() == this_thread::get_id()`.

(7.2) — `no_such_process` — if the thread is not valid.

(7.3) — `invalid_argument` — if the thread is not joinable.

```
void detach();
```

8 *Effects:* The thread represented by `*this` continues execution without the calling thread blocking. When `detach()` returns, `*this` no longer represents the possibly continuing thread of execution. When the thread previously represented by `*this` ends execution, the implementation shall release any owned resources.

9 *Ensures:* `get_id() == id()`.

10 *Throws:* `system_error` when an exception is required (34.2.2).

11 *Error conditions:*

(11.1) — `no_such_process` — if the thread is not valid.

(11.2) — `invalid_argument` — if the thread is not joinable.

```
id get_id() const noexcept;
```

12 *Returns:* A default constructed `id` object if `*this` does not represent a thread, otherwise `this_thread::get_id()` for the thread of execution represented by `*this`.

34.3.2.6 thread static members

[`thread.thread.static`]

```
unsigned hardware_concurrency() noexcept;
```

1 *Returns:* The number of hardware thread contexts. [*Note:* This value should only be considered to be a hint. — *end note*] If this value is not computable or well-defined, an implementation should return 0.

34.3.2.7 thread specialized algorithms

[`thread.thread.algorithm`]

```
void swap(thread& x, thread& y) noexcept;
```

1 *Effects:* As if by `x.swap(y)`.

34.3.3 Namespace `this_thread`

[`thread.thread.this`]

```
namespace std::this_thread {
    thread::id get_id() noexcept;
```

```
    void yield() noexcept;
```

```
    template<class Clock, class Duration>
```

```
        void sleep_until(const chrono::time_point<Clock, Duration>& abs_time);
```

```
    template<class Rep, class Period>
```

```
        void sleep_for(const chrono::duration<Rep, Period>& rel_time);
```

```
};
```

```
thread::id this_thread::get_id() noexcept;
```

1 *Returns:* An object of type `thread::id` that uniquely identifies the current thread of execution. No other thread of execution shall have this id and this thread of execution shall always have this id. The object returned shall not compare equal to a default constructed `thread::id`.

```
void this_thread::yield() noexcept;
```

2 *Effects:* Offers the implementation the opportunity to reschedule.

3 *Synchronization:* None.

```
template<class Clock, class Duration>
void sleep_until(const chrono::time_point<Clock, Duration>& abs_time);
```

4 *Effects:* Blocks the calling thread for the absolute timeout (34.2.4) specified by `abs_time`.

5 *Synchronization:* None.

6 *Throws:* Timeout-related exceptions (34.2.4).

```
template<class Rep, class Period>
void sleep_for(const chrono::duration<Rep, Period>& rel_time);
```

7 *Effects:* Blocks the calling thread for the relative timeout (34.2.4) specified by `rel_time`.

8 *Synchronization:* None.

9 *Throws:* Timeout-related exceptions (34.2.4).

34.4 Mutual exclusion

[thread.mutex]

¹ This subclause provides mechanisms for mutual exclusion: mutexes, locks, and call once. These mechanisms ease the production of race-free programs (6.8.2).

34.4.1 Header <mutex> synopsis

[mutex.syn]

```
namespace std {
    class mutex;
    class recursive_mutex;
    class timed_mutex;
    class recursive_timed_mutex;

    struct defer_lock_t { explicit defer_lock_t() = default; };
    struct try_to_lock_t { explicit try_to_lock_t() = default; };
    struct adopt_lock_t { explicit adopt_lock_t() = default; };

    inline constexpr defer_lock_t defer_lock { };
    inline constexpr try_to_lock_t try_to_lock { };
    inline constexpr adopt_lock_t adopt_lock { };

    template<class Mutex> class lock_guard;
    template<class... MutexTypes> class scoped_lock;
    template<class Mutex> class unique_lock;

    template<class Mutex>
        void swap(unique_lock<Mutex>& x, unique_lock<Mutex>& y) noexcept;

    template<class L1, class L2, class... L3> int try_lock(L1&, L2&, L3&...);
    template<class L1, class L2, class... L3> void lock(L1&, L2&, L3&...);

    struct once_flag;

    template<class Callable, class... Args>
        void call_once(once_flag& flag, Callable&& func, Args&&... args);
}

```

34.4.2 Header <shared_mutex> synopsis

[shared_mutex.syn]

```
namespace std {
    class shared_mutex;
    class shared_timed_mutex;
    template<class Mutex> class shared_lock;
    template<class Mutex>
        void swap(shared_lock<Mutex>& x, shared_lock<Mutex>& y) noexcept;
}

```

34.4.3 Mutex requirements

[thread.mutex.requirements]

34.4.3.1 In general

[thread.mutex.requirements.general]

¹ A mutex object facilitates protection against data races and allows safe synchronization of data between execution agents (34.2.5). An execution agent *owns* a mutex from the time it successfully calls one of the lock functions until it calls `unlock`. Mutexes can be either recursive or non-recursive, and can grant simultaneous ownership to one or many execution agents. Both recursive and non-recursive mutexes are supplied.

34.4.3.2 Mutex types

[thread.mutex.requirements.mutex]

¹ The *mutex types* are the standard library types `mutex`, `recursive_mutex`, `timed_mutex`, `recursive_timed_mutex`, `shared_mutex`, and `shared_timed_mutex`. They shall satisfy the requirements set out in this subclause. In this description, `m` denotes an object of a mutex type.

² The mutex types shall satisfy the *Cpp17Lockable* requirements (34.2.5.3).

³ The mutex types shall be *Cpp17DefaultConstructible* and *Cpp17Destructible*. If initialization of an object of a mutex type fails, an exception of type `system_error` shall be thrown. The mutex types shall not be copyable or movable.

⁴ The error conditions for error codes, if any, reported by member functions of the mutex types shall be:

- (4.1) — `resource_unavailable_try_again` — if any native handle type manipulated is not available.
- (4.2) — `operation_not_permitted` — if the thread does not have the privilege to perform the operation.
- (4.3) — `invalid_argument` — if any native handle type manipulated as part of mutex construction is incorrect.

⁵ The implementation shall provide lock and unlock operations, as described below. For purposes of determining the existence of a data race, these behave as atomic operations (6.8.2). The lock and unlock operations on a single mutex shall appear to occur in a single total order. [*Note*: This can be viewed as the modification order (6.8.2) of the mutex. — *end note*] [*Note*: Construction and destruction of an object of a mutex type need not be thread-safe; other synchronization should be used to ensure that mutex objects are initialized and visible to other threads. — *end note*]

⁶ The expression `m.lock()` shall be well-formed and have the following semantics:

⁷ *Requires*: If `m` is of type `mutex`, `timed_mutex`, `shared_mutex`, or `shared_timed_mutex`, the calling thread does not own the mutex.

⁸ *Effects*: Blocks the calling thread until ownership of the mutex can be obtained for the calling thread.

⁹ *Ensures*: The calling thread owns the mutex.

¹⁰ *Return type*: `void`.

¹¹ *Synchronization*: Prior `unlock()` operations on the same object shall *synchronize with* (6.8.2) this operation.

¹² *Throws*: `system_error` when an exception is required (34.2.2).

¹³ *Error conditions*:

- (13.1) — `operation_not_permitted` — if the thread does not have the privilege to perform the operation.
- (13.2) — `resource_deadlock_would_occur` — if the implementation detects that a deadlock would occur.

¹⁴ The expression `m.try_lock()` shall be well-formed and have the following semantics:

¹⁵ *Requires*: If `m` is of type `mutex`, `timed_mutex`, `shared_mutex`, or `shared_timed_mutex`, the calling thread does not own the mutex.

¹⁶ *Effects*: Attempts to obtain ownership of the mutex for the calling thread without blocking. If ownership is not obtained, there is no effect and `try_lock()` immediately returns. An implementation may fail to obtain the lock even if it is not held by any other thread. [*Note*: This spurious failure is normally uncommon, but allows interesting implementations based on a simple compare and exchange (Clause 33). — *end note*] An implementation should ensure that `try_lock()` does not consistently return `false` in the absence of contending mutex acquisitions.

¹⁷ *Return type*: `bool`.

¹⁸ *Returns*: `true` if ownership of the mutex was obtained for the calling thread, otherwise `false`.

¹⁹ *Synchronization*: If `try_lock()` returns `true`, prior `unlock()` operations on the same object *synchronize with* (6.8.2) this operation. [*Note*: Since `lock()` does not synchronize with a failed subsequent `try_`

`lock()`, the visibility rules are weak enough that little would be known about the state after a failure, even in the absence of spurious failures. — *end note*]

20 *Throws:* Nothing.

21 The expression `m.unlock()` shall be well-formed and have the following semantics:

22 *Requires:* The calling thread shall own the mutex.

23 *Effects:* Releases the calling thread's ownership of the mutex.

24 *Return type:* `void`.

25 *Synchronization:* This operation synchronizes with (6.8.2) subsequent lock operations that obtain ownership on the same object.

26 *Throws:* Nothing.

34.4.3.2.1 Class `mutex`

[`thread.mutex.class`]

```
namespace std {
  class mutex {
  public:
    constexpr mutex() noexcept;
    ~mutex();

    mutex(const mutex&) = delete;
    mutex& operator=(const mutex&) = delete;

    void lock();
    bool try_lock();
    void unlock();

    using native_handle_type = implementation-defined;           // see 34.2.3
    native_handle_type native_handle();                             // see 34.2.3
  };
}
```

1 The class `mutex` provides a non-recursive mutex with exclusive ownership semantics. If one thread owns a mutex object, attempts by another thread to acquire ownership of that object will fail (for `try_lock()`) or block (for `lock()`) until the owning thread has released ownership with a call to `unlock()`.

2 [Note: After a thread A has called `unlock()`, releasing a mutex, it is possible for another thread B to lock the same mutex, observe that it is no longer in use, unlock it, and destroy it, before thread A appears to have returned from its unlock call. Implementations are required to handle such scenarios correctly, as long as thread A doesn't access the mutex after the unlock call returns. These cases typically occur when a reference-counted object contains a mutex that is used to protect the reference count. — *end note*]

3 The class `mutex` shall satisfy all of the mutex requirements (34.4.3). It shall be a standard-layout class (Clause 12).

4 [Note: A program may deadlock if the thread that owns a `mutex` object calls `lock()` on that object. If the implementation can detect the deadlock, a `resource_deadlock_would_occur` error condition may be observed. — *end note*]

5 The behavior of a program is undefined if it destroys a `mutex` object owned by any thread or a thread terminates while owning a `mutex` object.

34.4.3.2.2 Class `recursive_mutex`

[`thread.mutex.recursive`]

```
namespace std {
  class recursive_mutex {
  public:
    recursive_mutex();
    ~recursive_mutex();

    recursive_mutex(const recursive_mutex&) = delete;
    recursive_mutex& operator=(const recursive_mutex&) = delete;
  };
}
```

```

void lock();
bool try_lock() noexcept;
void unlock();

using native_handle_type = implementation-defined;           // see 34.2.3
native_handle_type native_handle();                          // see 34.2.3
};
}

```

- 1 The class `recursive_mutex` provides a recursive mutex with exclusive ownership semantics. If one thread owns a `recursive_mutex` object, attempts by another thread to acquire ownership of that object will fail (for `try_lock()`) or block (for `lock()`) until the first thread has completely released ownership.
- 2 The class `recursive_mutex` shall satisfy all of the mutex requirements (34.4.3). It shall be a standard-layout class (Clause 12).
- 3 A thread that owns a `recursive_mutex` object may acquire additional levels of ownership by calling `lock()` or `try_lock()` on that object. It is unspecified how many levels of ownership may be acquired by a single thread. If a thread has already acquired the maximum level of ownership for a `recursive_mutex` object, additional calls to `try_lock()` shall fail, and additional calls to `lock()` shall throw an exception of type `system_error`. A thread shall call `unlock()` once for each level of ownership acquired by calls to `lock()` and `try_lock()`. Only when all levels of ownership have been released may ownership be acquired by another thread.
- 4 The behavior of a program is undefined if:
 - (4.1) — it destroys a `recursive_mutex` object owned by any thread or
 - (4.2) — a thread terminates while owning a `recursive_mutex` object.

34.4.3.3 Timed mutex types

[thread.timedmutex.requirements]

- 1 The *timed mutex types* are the standard library types `timed_mutex`, `recursive_timed_mutex`, and `shared_timed_mutex`. They shall meet the requirements set out below. In this description, `m` denotes an object of a mutex type, `rel_time` denotes an object of an instantiation of `duration` (24.17.5), and `abs_time` denotes an object of an instantiation of `time_point` (24.17.6).
- 2 The timed mutex types shall satisfy the *Cpp17TimedLockable* requirements (34.2.5.4).
- 3 The expression `m.try_lock_for(rel_time)` shall be well-formed and have the following semantics:
 - 4 *Requires:* If `m` is of type `timed_mutex` or `shared_timed_mutex`, the calling thread does not own the mutex.
 - 5 *Effects:* The function attempts to obtain ownership of the mutex within the relative timeout (34.2.4) specified by `rel_time`. If the time specified by `rel_time` is less than or equal to `rel_time.zero()`, the function attempts to obtain ownership without blocking (as if by calling `try_lock()`). The function shall return within the timeout specified by `rel_time` only if it has obtained ownership of the mutex object. [Note: As with `try_lock()`, there is no guarantee that ownership will be obtained if the lock is available, but implementations are expected to make a strong effort to do so. — end note]
 - 6 *Return type:* `bool`.
 - 7 *Returns:* `true` if ownership was obtained, otherwise `false`.
 - 8 *Synchronization:* If `try_lock_for()` returns `true`, prior `unlock()` operations on the same object *synchronize with* (6.8.2) this operation.
 - 9 *Throws:* Timeout-related exceptions (34.2.4).
- 10 The expression `m.try_lock_until(abs_time)` shall be well-formed and have the following semantics:
 - 11 *Requires:* If `m` is of type `timed_mutex` or `shared_timed_mutex`, the calling thread does not own the mutex.
 - 12 *Effects:* The function attempts to obtain ownership of the mutex. If `abs_time` has already passed, the function attempts to obtain ownership without blocking (as if by calling `try_lock()`). The function shall return before the absolute timeout (34.2.4) specified by `abs_time` only if it has obtained ownership of the mutex object. [Note: As with `try_lock()`, there is no guarantee that ownership will be obtained if the lock is available, but implementations are expected to make a strong effort to do so. — end note]
 - 13 *Return type:* `bool`.

- 14 *Returns:* true if ownership was obtained, otherwise false.
- 15 *Synchronization:* If `try_lock_until()` returns true, prior `unlock()` operations on the same object synchronize with (6.8.2) this operation.
- 16 *Throws:* Timeout-related exceptions (34.2.4).

34.4.3.3.1 Class `timed_mutex` [thread.timedmutex.class]

```
namespace std {
  class timed_mutex {
  public:
    timed_mutex();
    ~timed_mutex();

    timed_mutex(const timed_mutex&) = delete;
    timed_mutex& operator=(const timed_mutex&) = delete;

    void lock();    // blocking
    bool try_lock();
    template<class Rep, class Period>
      bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
    template<class Clock, class Duration>
      bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
    void unlock();

    using native_handle_type = implementation-defined;    // see 34.2.3
    native_handle_type native_handle();                    // see 34.2.3
  };
}
```

- 1 The class `timed_mutex` provides a non-recursive mutex with exclusive ownership semantics. If one thread owns a `timed_mutex` object, attempts by another thread to acquire ownership of that object will fail (for `try_lock()`) or block (for `lock()`, `try_lock_for()`, and `try_lock_until()`) until the owning thread has released ownership with a call to `unlock()` or the call to `try_lock_for()` or `try_lock_until()` times out (having failed to obtain ownership).
- 2 The class `timed_mutex` shall satisfy all of the timed mutex requirements (34.4.3.3). It shall be a standard-layout class (Clause 12).
- 3 The behavior of a program is undefined if:
- (3.1) — it destroys a `timed_mutex` object owned by any thread,
 - (3.2) — a thread that owns a `timed_mutex` object calls `lock()`, `try_lock()`, `try_lock_for()`, or `try_lock_until()` on that object, or
 - (3.3) — a thread terminates while owning a `timed_mutex` object.

34.4.3.3.2 Class `recursive_timed_mutex` [thread.timedmutex.recursive]

```
namespace std {
  class recursive_timed_mutex {
  public:
    recursive_timed_mutex();
    ~recursive_timed_mutex();

    recursive_timed_mutex(const recursive_timed_mutex&) = delete;
    recursive_timed_mutex& operator=(const recursive_timed_mutex&) = delete;

    void lock();    // blocking
    bool try_lock() noexcept;
    template<class Rep, class Period>
      bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
    template<class Clock, class Duration>
      bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
    void unlock();
  };
}
```

```

    using native_handle_type = implementation-defined;           // see 34.2.3
    native_handle_type native_handle();                          // see 34.2.3
};
}

```

- 1 The class `recursive_timed_mutex` provides a recursive mutex with exclusive ownership semantics. If one thread owns a `recursive_timed_mutex` object, attempts by another thread to acquire ownership of that object will fail (for `try_lock()`) or block (for `lock()`, `try_lock_for()`, and `try_lock_until()`) until the owning thread has completely released ownership or the call to `try_lock_for()` or `try_lock_until()` times out (having failed to obtain ownership).
- 2 The class `recursive_timed_mutex` shall satisfy all of the timed mutex requirements (34.4.3.3). It shall be a standard-layout class (Clause 12).
- 3 A thread that owns a `recursive_timed_mutex` object may acquire additional levels of ownership by calling `lock()`, `try_lock()`, `try_lock_for()`, or `try_lock_until()` on that object. It is unspecified how many levels of ownership may be acquired by a single thread. If a thread has already acquired the maximum level of ownership for a `recursive_timed_mutex` object, additional calls to `try_lock()`, `try_lock_for()`, or `try_lock_until()` shall fail, and additional calls to `lock()` shall throw an exception of type `system_error`. A thread shall call `unlock()` once for each level of ownership acquired by calls to `lock()`, `try_lock()`, `try_lock_for()`, and `try_lock_until()`. Only when all levels of ownership have been released may ownership of the object be acquired by another thread.
- 4 The behavior of a program is undefined if:
 - (4.1) — it destroys a `recursive_timed_mutex` object owned by any thread, or
 - (4.2) — a thread terminates while owning a `recursive_timed_mutex` object.

34.4.3.4 Shared mutex types

[`thread.sharedmutex.requirements`]

- 1 The standard library types `shared_mutex` and `shared_timed_mutex` are *shared mutex types*. Shared mutex types shall satisfy the requirements of mutex types (34.4.3.2), and additionally shall satisfy the requirements set out below. In this description, `m` denotes an object of a shared mutex type.
- 2 In addition to the exclusive lock ownership mode specified in 34.4.3.2, shared mutex types provide a *shared lock* ownership mode. Multiple execution agents can simultaneously hold a shared lock ownership of a shared mutex type. But no execution agent shall hold a shared lock while another execution agent holds an exclusive lock on the same shared mutex type, and vice-versa. The maximum number of execution agents which can share a shared lock on a single shared mutex type is unspecified, but shall be at least 10000. If more than the maximum number of execution agents attempt to obtain a shared lock, the excess execution agents shall block until the number of shared locks are reduced below the maximum amount by other execution agents releasing their shared lock.
- 3 The expression `m.lock_shared()` shall be well-formed and have the following semantics:
 - 4 *Requires:* The calling thread has no ownership of the mutex.
 - 5 *Effects:* Blocks the calling thread until shared ownership of the mutex can be obtained for the calling thread. If an exception is thrown then a shared lock shall not have been acquired for the current thread.
 - 6 *Ensures:* The calling thread has a shared lock on the mutex.
 - 7 *Return type:* `void`.
 - 8 *Synchronization:* Prior `unlock()` operations on the same object shall synchronize with (6.8.2) this operation.
 - 9 *Throws:* `system_error` when an exception is required (34.2.2).
 - 10 *Error conditions:*
 - (10.1) — `operation_not_permitted` — if the thread does not have the privilege to perform the operation.
 - (10.2) — `resource_deadlock_would_occur` — if the implementation detects that a deadlock would occur.
- 11 The expression `m.unlock_shared()` shall be well-formed and have the following semantics:
 - 12 *Requires:* The calling thread shall hold a shared lock on the mutex.
 - 13 *Effects:* Releases a shared lock on the mutex held by the calling thread.
 - 14 *Return type:* `void`.

15 *Synchronization:* This operation synchronizes with (6.8.2) subsequent `lock()` operations that obtain ownership on the same object.

16 *Throws:* Nothing.

17 The expression `m.try_lock_shared()` shall be well-formed and have the following semantics:

18 *Requires:* The calling thread has no ownership of the mutex.

19 *Effects:* Attempts to obtain shared ownership of the mutex for the calling thread without blocking. If shared ownership is not obtained, there is no effect and `try_lock_shared()` immediately returns. An implementation may fail to obtain the lock even if it is not held by any other thread.

20 *Return type:* `bool`.

21 *Returns:* `true` if the shared ownership lock was acquired, `false` otherwise.

22 *Synchronization:* If `try_lock_shared()` returns `true`, prior `unlock()` operations on the same object synchronize with (6.8.2) this operation.

23 *Throws:* Nothing.

34.4.3.4.1 Class `shared_mutex`

[`thread.sharedmutex.class`]

```
namespace std {
  class shared_mutex {
  public:
    shared_mutex();
    ~shared_mutex();

    shared_mutex(const shared_mutex&) = delete;
    shared_mutex& operator=(const shared_mutex&) = delete;

    // exclusive ownership
    void lock();           // blocking
    bool try_lock();
    void unlock();

    // shared ownership
    void lock_shared();   // blocking
    bool try_lock_shared();
    void unlock_shared();

    using native_handle_type = implementation-defined; // see 34.2.3
    native_handle_type native_handle();               // see 34.2.3
  };
}
```

1 The class `shared_mutex` provides a non-recursive mutex with shared ownership semantics.

2 The class `shared_mutex` shall satisfy all of the shared mutex requirements (34.4.3.4). It shall be a standard-layout class (Clause 12).

3 The behavior of a program is undefined if:

- (3.1) — it destroys a `shared_mutex` object owned by any thread,
- (3.2) — a thread attempts to recursively gain any ownership of a `shared_mutex`, or
- (3.3) — a thread terminates while possessing any ownership of a `shared_mutex`.

4 `shared_mutex` may be a synonym for `shared_timed_mutex`.

34.4.3.5 Shared timed mutex types

[`thread.sharedtimedmutex.requirements`]

1 The standard library type `shared_timed_mutex` is a *shared timed mutex type*. Shared timed mutex types shall satisfy the requirements of timed mutex types (34.4.3.3), shared mutex types (34.4.3.4), and additionally shall satisfy the requirements set out below. In this description, `m` denotes an object of a shared timed mutex type, `rel_type` denotes an object of an instantiation of `duration` (24.17.5), and `abs_time` denotes an object of an instantiation of `time_point` (24.17.6).

2 The expression `m.try_lock_shared_for(rel_time)` shall be well-formed and have the following semantics:

3 *Requires:* The calling thread has no ownership of the mutex.

4 *Effects:* Attempts to obtain shared lock ownership for the calling thread within the relative timeout (34.2.4) specified by `rel_time`. If the time specified by `rel_time` is less than or equal to `rel_time.zero()`, the function attempts to obtain ownership without blocking (as if by calling `try_lock_shared()`). The function shall return within the timeout specified by `rel_time` only if it has obtained shared ownership of the mutex object. [*Note:* As with `try_lock()`, there is no guarantee that ownership will be obtained if the lock is available, but implementations are expected to make a strong effort to do so. — *end note*] If an exception is thrown then a shared lock shall not have been acquired for the current thread.

5 *Return type:* `bool`.

6 *Returns:* `true` if the shared lock was acquired, `false` otherwise.

7 *Synchronization:* If `try_lock_shared_for()` returns `true`, prior `unlock()` operations on the same object synchronize with (6.8.2) this operation.

8 *Throws:* Timeout-related exceptions (34.2.4).

9 The expression `m.try_lock_shared_until(abs_time)` shall be well-formed and have the following semantics:

10 *Requires:* The calling thread has no ownership of the mutex.

11 *Effects:* The function attempts to obtain shared ownership of the mutex. If `abs_time` has already passed, the function attempts to obtain shared ownership without blocking (as if by calling `try_lock_shared()`). The function shall return before the absolute timeout (34.2.4) specified by `abs_time` only if it has obtained shared ownership of the mutex object. [*Note:* As with `try_lock()`, there is no guarantee that ownership will be obtained if the lock is available, but implementations are expected to make a strong effort to do so. — *end note*] If an exception is thrown then a shared lock shall not have been acquired for the current thread.

12 *Return type:* `bool`.

13 *Returns:* `true` if the shared lock was acquired, `false` otherwise.

14 *Synchronization:* If `try_lock_shared_until()` returns `true`, prior `unlock()` operations on the same object synchronize with (6.8.2) this operation.

15 *Throws:* Timeout-related exceptions (34.2.4).

34.4.3.5.1 Class `shared_timed_mutex`

[`thread.sharedtimedmutex.class`]

```
namespace std {
    class shared_timed_mutex {
    public:
        shared_timed_mutex();
        ~shared_timed_mutex();

        shared_timed_mutex(const shared_timed_mutex&) = delete;
        shared_timed_mutex& operator=(const shared_timed_mutex&) = delete;

        // exclusive ownership
        void lock(); // blocking
        bool try_lock();
        template<class Rep, class Period>
            bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
        template<class Clock, class Duration>
            bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
        void unlock();

        // shared ownership
        void lock_shared(); // blocking
        bool try_lock_shared();
        template<class Rep, class Period>
            bool try_lock_shared_for(const chrono::duration<Rep, Period>& rel_time);
        template<class Clock, class Duration>
            bool try_lock_shared_until(const chrono::time_point<Clock, Duration>& abs_time);
    };
};
```

```

    void unlock_shared();
};
}

```

- 1 The class `shared_timed_mutex` provides a non-recursive mutex with shared ownership semantics.
- 2 The class `shared_timed_mutex` shall satisfy all of the shared timed mutex requirements (34.4.3.5). It shall be a standard-layout class (Clause 12).
- 3 The behavior of a program is undefined if:
 - (3.1) — it destroys a `shared_timed_mutex` object owned by any thread,
 - (3.2) — a thread attempts to recursively gain any ownership of a `shared_timed_mutex`, or
 - (3.3) — a thread terminates while possessing any ownership of a `shared_timed_mutex`.

34.4.4 Locks

[thread.lock]

- 1 A *lock* is an object that holds a reference to a lockable object and may unlock the lockable object during the lock's destruction (such as when leaving block scope). An execution agent may use a lock to aid in managing ownership of a lockable object in an exception safe manner. A lock is said to *own* a lockable object if it is currently managing the ownership of that lockable object for an execution agent. A lock does not manage the lifetime of the lockable object it references. [*Note: Locks are intended to ease the burden of unlocking the lockable object under both normal and exceptional circumstances. — end note*]
- 2 Some lock constructors take tag types which describe what should be done with the lockable object during the lock's construction.

```

namespace std {
    struct defer_lock_t { };           // do not acquire ownership of the mutex
    struct try_to_lock_t { };         // try to acquire ownership of the mutex
                                      // without blocking
    struct adopt_lock_t { };          // assume the calling thread has already
                                      // obtained mutex ownership and manage it

    inline constexpr defer_lock_t  defer_lock { };
    inline constexpr try_to_lock_t  try_to_lock { };
    inline constexpr adopt_lock_t   adopt_lock { };
}

```

34.4.4.1 Class template `lock_guard`

[thread.lock.guard]

```

namespace std {
    template<class Mutex>
    class lock_guard {
    public:
        using mutex_type = Mutex;

        explicit lock_guard(mutex_type& m);
        lock_guard(mutex_type& m, adopt_lock_t);
        ~lock_guard();

        lock_guard(const lock_guard&) = delete;
        lock_guard& operator=(const lock_guard&) = delete;

    private:
        mutex_type& pm;           // exposition only
    };
}

```

- 1 An object of type `lock_guard` controls the ownership of a lockable object within a scope. A `lock_guard` object maintains ownership of a lockable object throughout the `lock_guard` object's lifetime (6.6.3). The behavior of a program is undefined if the lockable object referenced by `pm` does not exist for the entire lifetime of the `lock_guard` object. The supplied `Mutex` type shall satisfy the *Cpp17BasicLockable* requirements (34.2.5.2).

```
explicit lock_guard(mutex_type& m);
```

- 2 *Requires:* If `mutex_type` is not a recursive mutex, the calling thread does not own the mutex `m`.

3 *Effects:* As if by `m.lock()`.
 4 *Ensures:* `&pm == &m`

```
lock_guard(mutex_type& m, adopt_lock_t);
```

5 *Requires:* The calling thread owns the mutex `m`.
 6 *Ensures:* `&pm == &m`
 7 *Throws:* Nothing.

```
~lock_guard();
```

8 *Effects:* As if by `pm.unlock()`.

34.4.4.2 Class template `scoped_lock`

[thread.lock.scoped]

```
namespace std {
  template<class... MutexTypes>
  class scoped_lock {
  public:
    using mutex_type = Mutex;    // If MutexTypes... consists of the single type Mutex

    explicit scoped_lock(MutexTypes&... m);
    explicit scoped_lock(adopt_lock_t, MutexTypes&... m);
    ~scoped_lock();

    scoped_lock(const scoped_lock&) = delete;
    scoped_lock& operator=(const scoped_lock&) = delete;

  private:
    tuple<MutexTypes&...> pm;    // exposition only
  };
}
```

1 An object of type `scoped_lock` controls the ownership of lockable objects within a scope. A `scoped_lock` object maintains ownership of lockable objects throughout the `scoped_lock` object's lifetime (6.6.3). The behavior of a program is undefined if the lockable objects referenced by `pm` do not exist for the entire lifetime of the `scoped_lock` object. When `sizeof...(MutexTypes)` is 1, the supplied `Mutex` type shall satisfy the *Cpp17BasicLockable* requirements (34.2.5.2). Otherwise, each of the mutex types shall satisfy the *Cpp17Lockable* requirements (34.2.5.3).

```
explicit scoped_lock(MutexTypes&... m);
```

2 *Requires:* If a `MutexTypes` type is not a recursive mutex, the calling thread does not own the corresponding mutex element of `m`.
 3 *Effects:* Initializes `pm` with `tie(m...)`. Then if `sizeof...(MutexTypes)` is 0, no effects. Otherwise if `sizeof...(MutexTypes)` is 1, then `m.lock()`. Otherwise, `lock(m...)`.

```
explicit scoped_lock(adopt_lock_t, MutexTypes&... m);
```

4 *Requires:* The calling thread owns all the mutexes in `m`.
 5 *Effects:* Initializes `pm` with `tie(m...)`.
 6 *Throws:* Nothing.

```
~scoped_lock();
```

7 *Effects:* For all `i` in `[0, sizeof...(MutexTypes))`, `get<i>(pm).unlock()`.

34.4.4.3 Class template `unique_lock`

[thread.lock.unique]

```
namespace std {
  template<class Mutex>
  class unique_lock {
  public:
    using mutex_type = Mutex;
```

```

// 34.4.4.3.1, construct/copy/destroy
unique_lock() noexcept;
explicit unique_lock(mutex_type& m);
unique_lock(mutex_type& m, defer_lock_t) noexcept;
unique_lock(mutex_type& m, try_to_lock_t);
unique_lock(mutex_type& m, adopt_lock_t);
template<class Clock, class Duration>
    unique_lock(mutex_type& m, const chrono::time_point<Clock, Duration>& abs_time);
template<class Rep, class Period>
    unique_lock(mutex_type& m, const chrono::duration<Rep, Period>& rel_time);
~unique_lock();

unique_lock(const unique_lock&) = delete;
unique_lock& operator=(const unique_lock&) = delete;

unique_lock(unique_lock&& u) noexcept;
unique_lock& operator=(unique_lock&& u);

// 34.4.4.3.2, locking
void lock();
bool try_lock();

template<class Rep, class Period>
    bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
template<class Clock, class Duration>
    bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);

void unlock();

// 34.4.4.3.3, modifiers
void swap(unique_lock& u) noexcept;
mutex_type* release() noexcept;

// 34.4.4.3.4, observers
bool owns_lock() const noexcept;
explicit operator bool () const noexcept;
mutex_type* mutex() const noexcept;

private:
    mutex_type* pm;           // exposition only
    bool owns;               // exposition only
};

template<class Mutex>
    void swap(unique_lock<Mutex>& x, unique_lock<Mutex>& y) noexcept;
}

```

- ¹ An object of type `unique_lock` controls the ownership of a lockable object within a scope. Ownership of the lockable object may be acquired at construction or after construction, and may be transferred, after acquisition, to another `unique_lock` object. Objects of type `unique_lock` are not copyable but are movable. The behavior of a program is undefined if the contained pointer `pm` is not null and the lockable object pointed to by `pm` does not exist for the entire remaining lifetime (6.6.3) of the `unique_lock` object. The supplied `Mutex` type shall satisfy the *Cpp17BasicLockable* requirements (34.2.5.2).
- ² [Note: `unique_lock<Mutex>` meets the *Cpp17BasicLockable* requirements. If `Mutex` meets the *Cpp17Lockable* requirements (34.2.5.3), `unique_lock<Mutex>` also meets the *Cpp17Lockable* requirements; if `Mutex` meets the *Cpp17TimedLockable* requirements (34.2.5.4), `unique_lock<Mutex>` also meets the *Cpp17TimedLockable* requirements. — end note]

34.4.4.3.1 `unique_lock` constructors, destructor, and assignment [thread.lock.unique.cons]

```
unique_lock() noexcept;
```

- ¹ *Effects:* Constructs an object of type `unique_lock`.

- ² *Ensures:* `pm == 0` and `owns == false`.

```

explicit unique_lock(mutex_type& m);
3     Requires: If mutex_type is not a recursive mutex the calling thread does not own the mutex.
4     Effects: Constructs an object of type unique_lock and calls m.lock().
5     Ensures: pm == addressof(m) and owns == true.

unique_lock(mutex_type& m, defer_lock_t) noexcept;
6     Effects: Constructs an object of type unique_lock.
7     Ensures: pm == addressof(m) and owns == false.

unique_lock(mutex_type& m, try_to_lock_t);
8     Requires: The supplied Mutex type shall satisfy the Cpp17Lockable requirements (34.2.5.3). If mutex_
    type is not a recursive mutex the calling thread does not own the mutex.
9     Effects: Constructs an object of type unique_lock and calls m.try_lock().
10    Ensures: pm == addressof(m) and owns == res, where res is the value returned by the call to
    m.try_lock().

unique_lock(mutex_type& m, adopt_lock_t);
11    Requires: The calling thread owns the mutex.
12    Effects: Constructs an object of type unique_lock.
13    Ensures: pm == addressof(m) and owns == true.
14    Throws: Nothing.

template<class Clock, class Duration>
    unique_lock(mutex_type& m, const chrono::time_point<Clock, Duration>& abs_time);
15    Requires: If mutex_type is not a recursive mutex the calling thread does not own the mutex. The
    supplied Mutex type shall satisfy the Cpp17TimedLockable requirements (34.2.5.4).
16    Effects: Constructs an object of type unique_lock and calls m.try_lock_until(abs_time).
17    Ensures: pm == addressof(m) and owns == res, where res is the value returned by the call to
    m.try_lock_until(abs_time).

template<class Rep, class Period>
    unique_lock(mutex_type& m, const chrono::duration<Rep, Period>& rel_time);
18    Requires: If mutex_type is not a recursive mutex the calling thread does not own the mutex. The
    supplied Mutex type shall satisfy the Cpp17TimedLockable requirements (34.2.5.4).
19    Effects: Constructs an object of type unique_lock and calls m.try_lock_for(rel_time).
20    Ensures: pm == addressof(m) and owns == res, where res is the value returned by the call to
    m.try_lock_for(rel_time).

unique_lock(unique_lock&& u) noexcept;
21    Ensures: pm == u.p.pm and owns == u.p.owns (where u.p is the state of u just prior to this con-
    struction), u.pm == 0 and u.owns == false.

unique_lock& operator=(unique_lock&& u);
22    Effects: If owns calls pm->unlock().
23    Ensures: pm == u.p.pm and owns == u.p.owns (where u.p is the state of u just prior to this con-
    struction), u.pm == 0 and u.owns == false.
24    [Note: With a recursive mutex it is possible for both *this and u to own the same mutex before the
    assignment. In this case, *this will own the mutex after the assignment and u will not. — end note]
25    Throws: Nothing.

~unique_lock();
26    Effects: If owns calls pm->unlock().

```

34.4.4.3.2 unique_lock locking**[thread.lock.unique.locking]**

```

void lock();
1     Effects: As if by pm->lock().
2     Ensures: owns == true.
3     Throws: Any exception thrown by pm->lock(). system_error when an exception is required (34.2.2).
4     Error conditions:
(4.1) — operation_not_permitted — if pm is nullptr.
(4.2) — resource_deadlock_would_occur — if on entry owns is true.

bool try_lock();
5     Requires: The supplied Mutex shall satisfy the Cpp17Lockable requirements (34.2.5.3).
6     Effects: As if by pm->try_lock().
7     Returns: The value returned by the call to try_lock().
8     Ensures: owns == res, where res is the value returned by the call to try_lock().
9     Throws: Any exception thrown by pm->try_lock(). system_error when an exception is required
(34.2.2).
10    Error conditions:
(10.1) — operation_not_permitted — if pm is nullptr.
(10.2) — resource_deadlock_would_occur — if on entry owns is true.

template<class Clock, class Duration>
    bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
11    Requires: The supplied Mutex type shall satisfy the Cpp17TimedLockable requirements (34.2.5.4).
12    Effects: As if by pm->try_lock_until(abs_time).
13    Returns: The value returned by the call to try_lock_until(abs_time).
14    Ensures: owns == res, where res is the value returned by the call to try_lock_until(abs_time).
15    Throws: Any exception thrown by pm->try_lock_until(). system_error when an exception is
required (34.2.2).
16    Error conditions:
(16.1) — operation_not_permitted — if pm is nullptr.
(16.2) — resource_deadlock_would_occur — if on entry owns is true.

template<class Rep, class Period>
    bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
17    Requires: The supplied Mutex type shall satisfy the Cpp17TimedLockable requirements (34.2.5.4).
18    Effects: As if by pm->try_lock_for(rel_time).
19    Returns: The value returned by the call to try_lock_for(rel_time).
20    Ensures: owns == res, where res is the value returned by the call to try_lock_for(rel_time).
21    Throws: Any exception thrown by pm->try_lock_for(). system_error when an exception is required
(34.2.2).
22    Error conditions:
(22.1) — operation_not_permitted — if pm is nullptr.
(22.2) — resource_deadlock_would_occur — if on entry owns is true.

void unlock();
23    Effects: As if by pm->unlock().
24    Ensures: owns == false.
25    Throws: system_error when an exception is required (34.2.2).

```

26 *Error conditions:*

(26.1) — `operation_not_permitted` — if on entry `owns` is false.

34.4.4.3.3 `unique_lock` modifiers

[thread.lock.unique.mod]

```
void swap(unique_lock& u) noexcept;
```

1 *Effects:* Swaps the data members of `*this` and `u`.

```
mutex_type* release() noexcept;
```

2 *Returns:* The previous value of `pm`.

3 *Ensures:* `pm == 0` and `owns == false`.

```
template<class Mutex>
```

```
void swap(unique_lock<Mutex>& x, unique_lock<Mutex>& y) noexcept;
```

4 *Effects:* As if by `x.swap(y)`.

34.4.4.3.4 `unique_lock` observers

[thread.lock.unique.obs]

```
bool owns_lock() const noexcept;
```

1 *Returns:* `owns`.

```
explicit operator bool() const noexcept;
```

2 *Returns:* `owns`.

```
mutex_type *mutex() const noexcept;
```

3 *Returns:* `pm`.

34.4.4.4 Class template `shared_lock`

[thread.lock.shared]

```
namespace std {
```

```
template<class Mutex>
```

```
class shared_lock {
```

```
public:
```

```
using mutex_type = Mutex;
```

```
// 34.4.4.4.1, construct/copy/destroy
```

```
shared_lock() noexcept;
```

```
explicit shared_lock(mutex_type& m); // blocking
```

```
shared_lock(mutex_type& m, defer_lock_t) noexcept;
```

```
shared_lock(mutex_type& m, try_to_lock_t);
```

```
shared_lock(mutex_type& m, adopt_lock_t);
```

```
template<class Clock, class Duration>
```

```
shared_lock(mutex_type& m, const chrono::time_point<Clock, Duration>& abs_time);
```

```
template<class Rep, class Period>
```

```
shared_lock(mutex_type& m, const chrono::duration<Rep, Period>& rel_time);
```

```
~shared_lock();
```

```
shared_lock(const shared_lock&) = delete;
```

```
shared_lock& operator=(const shared_lock&) = delete;
```

```
shared_lock(shared_lock&& u) noexcept;
```

```
shared_lock& operator=(shared_lock&& u) noexcept;
```

```
// 34.4.4.4.2, locking
```

```
void lock(); // blocking
```

```
bool try_lock();
```

```
template<class Rep, class Period>
```

```
bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
```

```
template<class Clock, class Duration>
```

```
bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
```

```
void unlock();
```

```

// 34.4.4.4.3, modifiers
void swap(shared_lock& u) noexcept;
mutex_type* release() noexcept;

// 34.4.4.4.4, observers
bool owns_lock() const noexcept;
explicit operator bool () const noexcept;
mutex_type* mutex() const noexcept;

private:
    mutex_type* pm;                // exposition only
    bool owns;                    // exposition only
};

template<class Mutex>
    void swap(shared_lock<Mutex>& x, shared_lock<Mutex>& y) noexcept;
}

```

¹ An object of type `shared_lock` controls the shared ownership of a lockable object within a scope. Shared ownership of the lockable object may be acquired at construction or after construction, and may be transferred, after acquisition, to another `shared_lock` object. Objects of type `shared_lock` are not copyable but are movable. The behavior of a program is undefined if the contained pointer `pm` is not null and the lockable object pointed to by `pm` does not exist for the entire remaining lifetime (6.6.3) of the `shared_lock` object. The supplied `Mutex` type shall satisfy the shared mutex requirements (34.4.3.5).

² [Note: `shared_lock<Mutex>` meets the *Cpp17TimedLockable* requirements (34.2.5.4). — end note]

34.4.4.4.1 `shared_lock` constructors, destructor, and assignment [thread.lock.shared.cons]

```
shared_lock() noexcept;
```

¹ *Effects:* Constructs an object of type `shared_lock`.

² *Ensures:* `pm == nullptr` and `owns == false`.

```
explicit shared_lock(mutex_type& m);
```

³ *Requires:* The calling thread does not own the mutex for any ownership mode.

⁴ *Effects:* Constructs an object of type `shared_lock` and calls `m.lock_shared()`.

⁵ *Ensures:* `pm == addressof(m)` and `owns == true`.

```
shared_lock(mutex_type& m, defer_lock_t) noexcept;
```

⁶ *Effects:* Constructs an object of type `shared_lock`.

⁷ *Ensures:* `pm == addressof(m)` and `owns == false`.

```
shared_lock(mutex_type& m, try_to_lock_t);
```

⁸ *Requires:* The calling thread does not own the mutex for any ownership mode.

⁹ *Effects:* Constructs an object of type `shared_lock` and calls `m.try_lock_shared()`.

¹⁰ *Ensures:* `pm == addressof(m)` and `owns == res` where `res` is the value returned by the call to `m.try_lock_shared()`.

```
shared_lock(mutex_type& m, adopt_lock_t);
```

¹¹ *Requires:* The calling thread has shared ownership of the mutex.

¹² *Effects:* Constructs an object of type `shared_lock`.

¹³ *Ensures:* `pm == addressof(m)` and `owns == true`.

```
template<class Clock, class Duration>
    shared_lock(mutex_type& m,
               const chrono::time_point<Clock, Duration>& abs_time);
```

¹⁴ *Requires:* The calling thread does not own the mutex for any ownership mode.

¹⁵ *Effects:* Constructs an object of type `shared_lock` and calls `m.try_lock_shared_until(abs_time)`.

16 *Ensures:* `pm == addressof(m)` and `owns == res` where `res` is the value returned by the call to `m.try_lock_shared_until(abs_time)`.

```
template<class Rep, class Period>
  shared_lock(mutex_type& m,
             const chrono::duration<Rep, Period>& rel_time);
```

17 *Requires:* The calling thread does not own the mutex for any ownership mode.

18 *Effects:* Constructs an object of type `shared_lock` and calls `m.try_lock_shared_for(rel_time)`.

19 *Ensures:* `pm == addressof(m)` and `owns == res` where `res` is the value returned by the call to `m.try_lock_shared_for(rel_time)`.

```
~shared_lock();
```

20 *Effects:* If `owns` calls `pm->unlock_shared()`.

```
shared_lock(shared_lock&& sl) noexcept;
```

21 *Ensures:* `pm == sl_p.pm` and `owns == sl_p.owns` (where `sl_p` is the state of `sl` just prior to this construction), `sl.pm == nullptr` and `sl.owns == false`.

```
shared_lock& operator=(shared_lock&& sl) noexcept;
```

22 *Effects:* If `owns` calls `pm->unlock_shared()`.

23 *Ensures:* `pm == sl_p.pm` and `owns == sl_p.owns` (where `sl_p` is the state of `sl` just prior to this assignment), `sl.pm == nullptr` and `sl.owns == false`.

34.4.4.4.2 `shared_lock` locking

[thread.lock.shared.locking]

```
void lock();
```

1 *Effects:* As if by `pm->lock_shared()`.

2 *Ensures:* `owns == true`.

3 *Throws:* Any exception thrown by `pm->lock_shared()`. `system_error` when an exception is required (34.2.2).

4 *Error conditions:*

(4.1) — `operation_not_permitted` — if `pm` is `nullptr`.

(4.2) — `resource_deadlock_would_occur` — if on entry `owns` is `true`.

```
bool try_lock();
```

5 *Effects:* As if by `pm->try_lock_shared()`.

6 *Returns:* The value returned by the call to `pm->try_lock_shared()`.

7 *Ensures:* `owns == res`, where `res` is the value returned by the call to `pm->try_lock_shared()`.

8 *Throws:* Any exception thrown by `pm->try_lock_shared()`. `system_error` when an exception is required (34.2.2).

9 *Error conditions:*

(9.1) — `operation_not_permitted` — if `pm` is `nullptr`.

(9.2) — `resource_deadlock_would_occur` — if on entry `owns` is `true`.

```
template<class Clock, class Duration>
```

```
  bool try_lock_until(const chrono::time_point<Clock, Duration>& abs_time);
```

10 *Effects:* As if by `pm->try_lock_shared_until(abs_time)`.

11 *Returns:* The value returned by the call to `pm->try_lock_shared_until(abs_time)`.

12 *Ensures:* `owns == res`, where `res` is the value returned by the call to `pm->try_lock_shared_until(abs_time)`.

13 *Throws:* Any exception thrown by `pm->try_lock_shared_until(abs_time)`. `system_error` when an exception is required (34.2.2).

14 *Error conditions:*

- (14.1) — `operation_not_permitted` — if `pm` is `nullptr`.
 (14.2) — `resource_deadlock_would_occur` — if on entry `owns` is true.

```
template<class Rep, class Period>
```

```
bool try_lock_for(const chrono::duration<Rep, Period>& rel_time);
```

15 *Effects:* As if by `pm->try_lock_shared_for(rel_time)`.

16 *Returns:* The value returned by the call to `pm->try_lock_shared_for(rel_time)`.

17 *Ensures:* `owns == res`, where `res` is the value returned by the call to `pm->try_lock_shared_for(rel_time)`.

18 *Throws:* Any exception thrown by `pm->try_lock_shared_for(rel_time)`. `system_error` when an exception is required (34.2.2).

19 *Error conditions:*

- (19.1) — `operation_not_permitted` — if `pm` is `nullptr`.
 (19.2) — `resource_deadlock_would_occur` — if on entry `owns` is true.

```
void unlock();
```

20 *Effects:* As if by `pm->unlock_shared()`.

21 *Ensures:* `owns == false`.

22 *Throws:* `system_error` when an exception is required (34.2.2).

23 *Error conditions:*

- (23.1) — `operation_not_permitted` — if on entry `owns` is false.

34.4.4.4.3 shared_lock modifiers

[thread.lock.shared.mod]

```
void swap(shared_lock& sl) noexcept;
```

1 *Effects:* Swaps the data members of `*this` and `sl`.

```
mutex_type* release() noexcept;
```

2 *Returns:* The previous value of `pm`.

3 *Ensures:* `pm == nullptr` and `owns == false`.

```
template<class Mutex>
```

```
void swap(shared_lock<Mutex>& x, shared_lock<Mutex>& y) noexcept;
```

4 *Effects:* As if by `x.swap(y)`.

34.4.4.4.4 shared_lock observers

[thread.lock.shared.obs]

```
bool owns_lock() const noexcept;
```

1 *Returns:* `owns`.

```
explicit operator bool() const noexcept;
```

2 *Returns:* `owns`.

```
mutex_type* mutex() const noexcept;
```

3 *Returns:* `pm`.

34.4.5 Generic locking algorithms

[thread.lock.algorithm]

```
template<class L1, class L2, class... L3> int try_lock(L1&, L2&, L3&...);
```

1 *Requires:* Each template parameter type shall satisfy the *Cpp17Lockable* requirements. [Note: The `unique_lock` class template meets these requirements when suitably instantiated. — end note]

2 *Effects:* Calls `try_lock()` for each argument in order beginning with the first until all arguments have been processed or a call to `try_lock()` fails, either by returning `false` or by throwing an exception. If a call to `try_lock()` fails, `unlock()` is called for all prior arguments with no further calls to `try_lock()`.

3 *Returns:* -1 if all calls to `try_lock()` returned `true`, otherwise a zero-based index value that indicates the argument for which `try_lock()` returned `false`.

```
template<class L1, class L2, class... L3> void lock(L1&, L2&, L3&...);
```

4 *Requires:* Each template parameter type shall satisfy the *Cpp17Lockable* requirements, [Note: The `unique_lock` class template meets these requirements when suitably instantiated. — *end note*]

5 *Effects:* All arguments are locked via a sequence of calls to `lock()`, `try_lock()`, or `unlock()` on each argument. The sequence of calls does not result in deadlock, but is otherwise unspecified. [Note: A deadlock avoidance algorithm such as try-and-back-off must be used, but the specific algorithm is not specified to avoid over-constraining implementations. — *end note*] If a call to `lock()` or `try_lock()` throws an exception, `unlock()` is called for any argument that had been locked by a call to `lock()` or `try_lock()`.

34.4.6 Call once

[thread.once]

34.4.6.1 Struct `once_flag`

[thread.once.onceflag]

```
namespace std {
    struct once_flag {
        constexpr once_flag() noexcept;

        once_flag(const once_flag&) = delete;
        once_flag& operator=(const once_flag&) = delete;
    };
}
```

1 The class `once_flag` is an opaque data structure that `call_once` uses to initialize data without causing a data race or deadlock.

```
constexpr once_flag() noexcept;
```

2 *Effects:* Constructs an object of type `once_flag`.

3 *Synchronization:* The construction of a `once_flag` object is not synchronized.

4 *Ensures:* The object's internal state is set to indicate to an invocation of `call_once` with the object as its initial argument that no function has been called.

34.4.6.2 Function `call_once`

[thread.once.callonce]

```
template<class Callable, class... Args>
    void call_once(once_flag& flag, Callable&& func, Args&&... args);
```

1 *Requires:*

```
    INVOKE(std::forward<Callable>(func), std::forward<Args>(args)...)

```

(see 24.14.3) shall be a valid expression.

2 *Effects:* An execution of `call_once` that does not call its `func` is a *passive* execution. An execution of `call_once` that calls its `func` is an *active* execution. An active execution shall call `INVOKE(std::forward<Callable>(func), std::forward<Args>(args)...)...`. If such a call to `func` throws an exception the execution is *exceptional*, otherwise it is *returning*. An exceptional execution shall propagate the exception to the caller of `call_once`. Among all executions of `call_once` for any given `once_flag`: at most one shall be a returning execution; if there is a returning execution, it shall be the last active execution; and there are passive executions only if there is a returning execution. [Note: Passive executions allow other threads to reliably observe the results produced by the earlier returning execution. — *end note*]

3 *Synchronization:* For any given `once_flag`: all active executions occur in a total order; completion of an active execution synchronizes with (6.8.2) the start of the next one in this total order; and the returning execution synchronizes with the return from all passive executions.

4 *Throws:* `system_error` when an exception is required (34.2.2), or any exception thrown by `func`.

5 [Example:

```
    // global flag, regular function
    void init();
    std::once_flag flag;
```

```

void f() {
    std::call_once(flag, init);
}

// function static flag, function object
struct initializer {
    void operator()();
};

void g() {
    static std::once_flag flag2;
    std::call_once(flag2, initializer());
}

// object flag, member function
class information {
    std::once_flag verified;
    void verifier();
public:
    void verify() { std::call_once(verified, &information::verifier, *this); }
};
— end example]

```

34.5 Condition variables [thread.condition]

- ¹ Condition variables provide synchronization primitives used to block a thread until notified by some other thread that some condition is met or until a system time is reached. Class `condition_variable` provides a condition variable that can only wait on an object of type `unique_lock<mutex>`, allowing maximum efficiency on some platforms. Class `condition_variable_any` provides a general condition variable that can wait on objects of user-supplied lock types.
- ² Condition variables permit concurrent invocation of the `wait`, `wait_for`, `wait_until`, `notify_one` and `notify_all` member functions.
- ³ The execution of `notify_one` and `notify_all` shall be atomic. The execution of `wait`, `wait_for`, and `wait_until` shall be performed in three atomic parts:
 1. the release of the mutex and entry into the waiting state;
 2. the unblocking of the wait; and
 3. the reacquisition of the lock.
- ⁴ The implementation shall behave as if all executions of `notify_one`, `notify_all`, and each part of the `wait`, `wait_for`, and `wait_until` executions are executed in a single unspecified total order consistent with the "happens before" order.
- ⁵ Condition variable construction and destruction need not be synchronized.

34.5.1 Header `<condition_variable>` synopsis [condition_variable.syn]

```

namespace std {
    class condition_variable;
    class condition_variable_any;

    void notify_all_at_thread_exit(condition_variable& cond, unique_lock<mutex> lk);

    enum class cv_status { no_timeout, timeout };
}

```

34.5.2 Non-member functions [thread.condition.nonmember]

```
void notify_all_at_thread_exit(condition_variable& cond, unique_lock<mutex> lk);
```

- ¹ *Requires:* `lk` is locked by the calling thread and either
- (1.1) — no other thread is waiting on `cond`, or

(1.2) — `lk.mutex()` returns the same value for each of the lock arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

2 *Effects:* Transfers ownership of the lock associated with `lk` into internal storage and schedules `cond` to be notified when the current thread exits, after all objects of thread storage duration associated with the current thread have been destroyed. This notification shall be as if:

```
lk.unlock();
cond.notify_all();
```

3 *Synchronization:* The implied `lk.unlock()` call is sequenced after the destruction of all objects with thread storage duration associated with the current thread.

4 [*Note:* The supplied lock will be held until the thread exits, and care should be taken to ensure that this does not cause deadlock due to lock ordering issues. After calling `notify_all_at_thread_exit` it is recommended that the thread should be exited as soon as possible, and that no blocking or time-consuming tasks are run on that thread. — *end note*]

5 [*Note:* It is the user's responsibility to ensure that waiting threads do not erroneously assume that the thread has finished if they experience spurious wakeups. This typically requires that the condition being waited for is satisfied while holding the lock on `lk`, and that this lock is not released and reacquired prior to calling `notify_all_at_thread_exit`. — *end note*]

34.5.3 Class `condition_variable`

[`thread.condition.condvar`]

```
namespace std {
class condition_variable {
public:
condition_variable();
~condition_variable();

condition_variable(const condition_variable&) = delete;
condition_variable& operator=(const condition_variable&) = delete;

void notify_one() noexcept;
void notify_all() noexcept;
void wait(unique_lock<mutex>& lock);
template<class Predicate>
void wait(unique_lock<mutex>& lock, Predicate pred);
template<class Clock, class Duration>
cv_status wait_until(unique_lock<mutex>& lock,
                    const chrono::time_point<Clock, Duration>& abs_time);
template<class Clock, class Duration, class Predicate>
bool wait_until(unique_lock<mutex>& lock,
               const chrono::time_point<Clock, Duration>& abs_time,
               Predicate pred);
template<class Rep, class Period>
cv_status wait_for(unique_lock<mutex>& lock,
                  const chrono::duration<Rep, Period>& rel_time);
template<class Rep, class Period, class Predicate>
bool wait_for(unique_lock<mutex>& lock,
              const chrono::duration<Rep, Period>& rel_time,
              Predicate pred);

using native_handle_type = implementation-defined; // see 34.2.3
native_handle_type native_handle(); // see 34.2.3
};
}
```

1 The class `condition_variable` shall be a standard-layout class (Clause 12).

```
condition_variable();
```

2 *Effects:* Constructs an object of type `condition_variable`.

3 *Throws:* `system_error` when an exception is required (34.2.2).

4 *Error conditions:*

- (4.1) — `resource_unavailable_try_again` — if some non-memory resource limitation prevents initialization.

```
~condition_variable();
```

- 5 *Requires:* There shall be no thread blocked on `*this`. [*Note:* That is, all threads shall have been notified; they may subsequently block on the lock specified in the wait. This relaxes the usual rules, which would have required all wait calls to happen before destruction. Only the notification to unblock the wait needs to happen before destruction. The user should take care to ensure that no threads wait on `*this` once the destructor has been started, especially when the waiting threads are calling the wait functions in a loop or using the overloads of `wait`, `wait_for`, or `wait_until` that take a predicate. — *end note*]

- 6 *Effects:* Destroys the object.

```
void notify_one() noexcept;
```

- 7 *Effects:* If any threads are blocked waiting for `*this`, unblocks one of those threads.

```
void notify_all() noexcept;
```

- 8 *Effects:* Unblocks all threads that are blocked waiting for `*this`.

```
void wait(unique_lock<mutex>& lock);
```

- 9 *Requires:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread, and either
- (9.1) — no other thread is waiting on this `condition_variable` object or
- (9.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

10 *Effects:*

- (10.1) — Atomically calls `lock.unlock()` and blocks on `*this`.
- (10.2) — When unblocked, calls `lock.lock()` (possibly blocking on the lock), then returns.
- (10.3) — The function will unblock when signaled by a call to `notify_one()` or a call to `notify_all()`, or spuriously.

11 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

12 *Ensures:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread.

13 *Throws:* Nothing.

```
template<class Predicate>
void wait(unique_lock<mutex>& lock, Predicate pred);
```

- 14 *Requires:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread, and either
- (14.1) — no other thread is waiting on this `condition_variable` object or
- (14.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

15 *Effects:* Equivalent to:

```
while (!pred())
    wait(lock);
```

16 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

17 *Ensures:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread.

18 *Throws:* Any exception thrown by `pred`.

```
template<class Clock, class Duration>
cv_status wait_until(unique_lock<mutex>& lock,
                    const chrono::time_point<Clock, Duration>& abs_time);
```

- 19 *Requires:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread, and either
- (19.1) — no other thread is waiting on this `condition_variable` object or

- (19.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

20 *Effects:*

- (20.1) — Atomically calls `lock.unlock()` and blocks on `*this`.
- (20.2) — When unblocked, calls `lock.lock()` (possibly blocking on the lock), then returns.
- (20.3) — The function will unblock when signaled by a call to `notify_one()`, a call to `notify_all()`, expiration of the absolute timeout (34.2.4) specified by `abs_time`, or spuriously.
- (20.4) — If the function exits via an exception, `lock.lock()` shall be called prior to exiting the function.

21 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

22 *Ensures:* `lock.owns_lock()` is `true` and `lock.mutex()` is locked by the calling thread.

23 *Returns:* `cv_status::timeout` if the absolute timeout (34.2.4) specified by `abs_time` expired, otherwise `cv_status::no_timeout`.

24 *Throws:* Timeout-related exceptions (34.2.4).

```
template<class Rep, class Period>
cv_status wait_for(unique_lock<mutex>& lock,
                  const chrono::duration<Rep, Period>& rel_time);
```

25 *Requires:* `lock.owns_lock()` is `true` and `lock.mutex()` is locked by the calling thread, and either

- (25.1) — no other thread is waiting on this `condition_variable` object or
- (25.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

26 *Effects:* Equivalent to:

```
return wait_until(lock, chrono::steady_clock::now() + rel_time);
```

27 *Returns:* `cv_status::timeout` if the relative timeout (34.2.4) specified by `rel_time` expired, otherwise `cv_status::no_timeout`.

28 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

29 *Ensures:* `lock.owns_lock()` is `true` and `lock.mutex()` is locked by the calling thread.

30 *Throws:* Timeout-related exceptions (34.2.4).

```
template<class Clock, class Duration, class Predicate>
bool wait_until(unique_lock<mutex>& lock,
               const chrono::time_point<Clock, Duration>& abs_time,
               Predicate pred);
```

31 *Requires:* `lock.owns_lock()` is `true` and `lock.mutex()` is locked by the calling thread, and either

- (31.1) — no other thread is waiting on this `condition_variable` object or
- (31.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently waiting (via `wait`, `wait_for`, or `wait_until`) threads.

32 *Effects:* Equivalent to:

```
while (!pred())
    if (wait_until(lock, abs_time) == cv_status::timeout)
        return pred();
return true;
```

33 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

34 *Ensures:* `lock.owns_lock()` is `true` and `lock.mutex()` is locked by the calling thread.

35 [*Note:* The returned value indicates whether the predicate evaluated to `true` regardless of whether the timeout was triggered. — *end note*]

36 *Throws:* Timeout-related exceptions (34.2.4) or any exception thrown by `pred`.

```
template<class Rep, class Period, class Predicate>
bool wait_for(unique_lock<mutex>& lock,
             const chrono::duration<Rep, Period>& rel_time,
             Predicate pred);
```

- 37 *Requires:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread, and either
 (37.1) — no other thread is waiting on this `condition_variable` object or
 (37.2) — `lock.mutex()` returns the same value for each of the `lock` arguments supplied by all concurrently
 waiting (via `wait`, `wait_for`, or `wait_until`) threads.

38 *Effects:* Equivalent to:

```
return wait_until(lock, chrono::steady_clock::now() + rel_time, std::move(pred));
```

39 [*Note:* There is no blocking if `pred()` is initially true, even if the timeout has already expired. — *end note*]

40 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

41 *Ensures:* `lock.owns_lock()` is true and `lock.mutex()` is locked by the calling thread.

42 [*Note:* The returned value indicates whether the predicate evaluates to true regardless of whether the timeout was triggered. — *end note*]

43 *Throws:* Timeout-related exceptions (34.2.4) or any exception thrown by `pred`.

34.5.4 Class `condition_variable_any` [thread.condition.condvarany]

- ¹ A Lock type shall satisfy the *Cpp17BasicLockable* requirements (34.2.5.2). [*Note:* All of the standard mutex types meet this requirement. If a Lock type other than one of the standard mutex types or a `unique_lock` wrapper for a standard mutex type is used with `condition_variable_any`, the user should ensure that any necessary synchronization is in place with respect to the predicate associated with the `condition_variable_any` instance. — *end note*]

```
namespace std {
class condition_variable_any {
public:
condition_variable_any();
~condition_variable_any();

condition_variable_any(const condition_variable_any&) = delete;
condition_variable_any& operator=(const condition_variable_any&) = delete;

void notify_one() noexcept;
void notify_all() noexcept;
template<class Lock>
void wait(Lock& lock);
template<class Lock, class Predicate>
void wait(Lock& lock, Predicate pred);

template<class Lock, class Clock, class Duration>
cv_status wait_until(Lock& lock, const chrono::time_point<Clock, Duration>& abs_time);
template<class Lock, class Clock, class Duration, class Predicate>
bool wait_until(Lock& lock, const chrono::time_point<Clock, Duration>& abs_time,
               Predicate pred);
template<class Lock, class Rep, class Period>
cv_status wait_for(Lock& lock, const chrono::duration<Rep, Period>& rel_time);
template<class Lock, class Rep, class Period, class Predicate>
bool wait_for(Lock& lock, const chrono::duration<Rep, Period>& rel_time, Predicate pred);
};
}
```

```
condition_variable_any();
```

- ² *Effects:* Constructs an object of type `condition_variable_any`.

- ³ *Throws:* `bad_alloc` or `system_error` when an exception is required (34.2.2).

4 *Error conditions:*

- (4.1) — `resource_unavailable_try_again` — if some non-memory resource limitation prevents initialization.
- (4.2) — `operation_not_permitted` — if the thread does not have the privilege to perform the operation.

`~condition_variable_any();`

5 *Requires:* There shall be no thread blocked on `*this`. [*Note:* That is, all threads shall have been notified; they may subsequently block on the lock specified in the wait. This relaxes the usual rules, which would have required all wait calls to happen before destruction. Only the notification to unblock the wait needs to happen before destruction. The user should take care to ensure that no threads wait on `*this` once the destructor has been started, especially when the waiting threads are calling the wait functions in a loop or using the overloads of `wait`, `wait_for`, or `wait_until` that take a predicate. — *end note*]

6 *Effects:* Destroys the object.

`void notify_one() noexcept;`

7 *Effects:* If any threads are blocked waiting for `*this`, unblocks one of those threads.

`void notify_all() noexcept;`

8 *Effects:* Unblocks all threads that are blocked waiting for `*this`.

`template<class Lock>`
`void wait(Lock& lock);`

9 *Effects:*

- (9.1) — Atomically calls `lock.unlock()` and blocks on `*this`.
- (9.2) — When unblocked, calls `lock.lock()` (possibly blocking on the lock) and returns.
- (9.3) — The function will unblock when signaled by a call to `notify_one()`, a call to `notify_all()`, or spuriously.

10 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

11 *Ensures:* `lock` is locked by the calling thread.

12 *Throws:* Nothing.

`template<class Lock, class Predicate>`
`void wait(Lock& lock, Predicate pred);`

13 *Effects:* Equivalent to:

```
while (!pred())
    wait(lock);
```

`template<class Lock, class Clock, class Duration>`
`cv_status wait_until(Lock& lock, const chrono::time_point<Clock, Duration>& abs_time);`

14 *Effects:*

- (14.1) — Atomically calls `lock.unlock()` and blocks on `*this`.
- (14.2) — When unblocked, calls `lock.lock()` (possibly blocking on the lock) and returns.
- (14.3) — The function will unblock when signaled by a call to `notify_one()`, a call to `notify_all()`, expiration of the absolute timeout (34.2.4) specified by `abs_time`, or spuriously.
- (14.4) — If the function exits via an exception, `lock.lock()` shall be called prior to exiting the function.

15 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

16 *Ensures:* `lock` is locked by the calling thread.

17 *Returns:* `cv_status::timeout` if the absolute timeout (34.2.4) specified by `abs_time` expired, otherwise `cv_status::no_timeout`.

18 *Throws:* Timeout-related exceptions (34.2.4).

```
template<class Lock, class Rep, class Period>
    cv_status wait_for(Lock& lock, const chrono::duration<Rep, Period>& rel_time);
```

19 *Effects:* Equivalent to:

```
    return wait_until(lock, chrono::steady_clock::now() + rel_time);
```

20 *Returns:* `cv_status::timeout` if the relative timeout (34.2.4) specified by `rel_time` expired, otherwise `cv_status::no_timeout`.

21 *Remarks:* If the function fails to meet the postcondition, `terminate()` shall be called (18.5.1). [*Note:* This can happen if the re-locking of the mutex throws an exception. — *end note*]

22 *Ensures:* `lock` is locked by the calling thread.

23 *Throws:* Timeout-related exceptions (34.2.4).

```
template<class Lock, class Clock, class Duration, class Predicate>
    bool wait_until(Lock& lock, const chrono::time_point<Clock, Duration>& abs_time, Predicate pred);
```

24 *Effects:* Equivalent to:

```
    while (!pred())
        if (wait_until(lock, abs_time) == cv_status::timeout)
            return pred();
    return true;
```

25 [*Note:* There is no blocking if `pred()` is initially `true`, or if the timeout has already expired. — *end note*]

26 [*Note:* The returned value indicates whether the predicate evaluates to `true` regardless of whether the timeout was triggered. — *end note*]

```
template<class Lock, class Rep, class Period, class Predicate>
    bool wait_for(Lock& lock, const chrono::duration<Rep, Period>& rel_time, Predicate pred);
```

27 *Effects:* Equivalent to:

```
    return wait_until(lock, chrono::steady_clock::now() + rel_time, std::move(pred));
```

34.6 Futures

[futures]

34.6.1 Overview

[futures.overview]

1 34.6 describes components that a C++ program can use to retrieve in one thread the result (value or exception) from a function that has run in the same thread or another thread. [*Note:* These components are not restricted to multi-threaded programs but can be useful in single-threaded programs as well. — *end note*]

34.6.2 Header <future> synopsis

[future.syn]

```
namespace std {
    enum class future_errc {
        broken_promise = implementation-defined,
        future_already_retrieved = implementation-defined,
        promise_already_satisfied = implementation-defined,
        no_state = implementation-defined
    };

    enum class launch : unspecified {
        async = unspecified,
        deferred = unspecified,
        implementation-defined
    };

    enum class future_status {
        ready,
        timeout,
        deferred
    };
};
```

```

template<> struct is_error_code_enum<future_errc> : public true_type { };
error_code make_error_code(future_errc e) noexcept;
error_condition make_error_condition(future_errc e) noexcept;

const error_category& future_category() noexcept;

class future_error;

template<class R> class promise;
template<class R> class promise<R&&>;
template<> class promise<void>;

template<class R>
    void swap(promise<R>& x, promise<R>& y) noexcept;

template<class R, class Alloc>
    struct uses_allocator<promise<R>, Alloc>;

template<class R> class future;
template<class R> class future<R&&>;
template<> class future<void>;

template<class R> class shared_future;
template<class R> class shared_future<R&&>;
template<> class shared_future<void>;

template<class> class packaged_task; // not defined
template<class R, class... ArgTypes>
    class packaged_task<R(ArgTypes...)>;

template<class R, class... ArgTypes>
    void swap(packaged_task<R(ArgTypes...)>&, packaged_task<R(ArgTypes...)>&) noexcept;

template<class F, class... Args>
    [[nodiscard]] future<invoke_result_t<decay_t<F>, decay_t<Args>...>>
        async(F&& f, Args&&... args);
template<class F, class... Args>
    [[nodiscard]] future<invoke_result_t<decay_t<F>, decay_t<Args>...>>
        async(launch_policy, F&& f, Args&&... args);
}

```

¹ The enum type `launch` is a bitmask type (20.4.2.1.4) with elements `launch::async` and `launch::deferred`. [Note: Implementations can provide bitmasks to specify restrictions on task interaction by functions launched by `async()` applicable to a corresponding subset of available launch policies. Implementations can extend the behavior of the first overload of `async()` by adding their extensions to the launch policy under the “as if” rule. — end note]

² The enum values of `future_errc` are distinct and not zero.

34.6.3 Error handling

[futures.errors]

```
const error_category& future_category() noexcept;
```

¹ *Returns:* A reference to an object of a type derived from class `error_category`.

² The object’s `default_error_condition` and equivalent virtual functions shall behave as specified for the class `error_category`. The object’s `name` virtual function shall return a pointer to the string “future”.

```
error_code make_error_code(future_errc e) noexcept;
```

³ *Returns:* `error_code(static_cast<int>(e), future_category())`.

```
error_condition make_error_condition(future_errc e) noexcept;
```

⁴ *Returns:* `error_condition(static_cast<int>(e), future_category())`.

34.6.4 Class `future_error`**[`futures.future_error`]**

```

namespace std {
    class future_error : public logic_error {
    public:
        explicit future_error(future_errc e);

        const error_code& code() const noexcept;
        const char* what() const noexcept;

    private:
        error_code ec_;           // exposition only
    };
}

```

```
explicit future_error(future_errc e);
```

1 *Effects:* Constructs an object of class `future_error` and initializes `ec_` with `make_error_code(e)`.

```
const error_code& code() const noexcept;
```

2 *Returns:* `ec_`.

```
const char* what() const noexcept;
```

3 *Returns:* An NTBS incorporating `code().message()`.

34.6.5 Shared state**[`futures.state`]**

1 Many of the classes introduced in this subclause use some state to communicate results. This *shared state* consists of some state information and some (possibly not yet evaluated) *result*, which can be a (possibly void) value or an exception. [*Note:* Futures, promises, and tasks defined in this clause reference such shared state. — *end note*]

2 [*Note:* The result can be any kind of object including a function to compute that result, as used by `async` when `policy` is `launch::deferred`. — *end note*]

3 An *asynchronous return object* is an object that reads results from a shared state. A *waiting function* of an asynchronous return object is one that potentially blocks to wait for the shared state to be made ready. If a waiting function can return before the state is made ready because of a timeout (34.2.5), then it is a *timed waiting function*, otherwise it is a *non-timed waiting function*.

4 An *asynchronous provider* is an object that provides a result to a shared state. The result of a shared state is set by respective functions on the asynchronous provider. [*Note:* Such as promises or tasks. — *end note*] The means of setting the result of a shared state is specified in the description of those classes and functions that create such a state object.

5 When an asynchronous return object or an asynchronous provider is said to release its shared state, it means:

(5.1) — if the return object or provider holds the last reference to its shared state, the shared state is destroyed; and

(5.2) — the return object or provider gives up its reference to its shared state; and

(5.3) — these actions will not block for the shared state to become ready, except that it may block if all of the following are true: the shared state was created by a call to `std::async`, the shared state is not yet ready, and this was the last reference to the shared state.

6 When an asynchronous provider is said to make its shared state ready, it means:

(6.1) — first, the provider marks its shared state as ready; and

(6.2) — second, the provider unblocks any execution agents waiting for its shared state to become ready.

7 When an asynchronous provider is said to abandon its shared state, it means:

(7.1) — first, if that state is not ready, the provider

(7.1.1) — stores an exception object of type `future_error` with an error condition of `broken_promise` within its shared state; and then

(7.1.2) — makes its shared state ready;

(7.2) — second, the provider releases its shared state.

- 8 A shared state is *ready* only if it holds a value or an exception ready for retrieval. Waiting for a shared state to become ready may invoke code to compute the result on the waiting thread if so specified in the description of the class or function that creates the state object.
- 9 Calls to functions that successfully set the stored result of a shared state synchronize with (6.8.2) calls to functions successfully detecting the ready state resulting from that setting. The storage of the result (whether normal or exceptional) into the shared state synchronizes with (6.8.2) the successful return from a call to a waiting function on the shared state.
- 10 Some functions (e.g., `promise::set_value_at_thread_exit`) delay making the shared state ready until the calling thread exits. The destruction of each of that thread's objects with thread storage duration (6.6.4.2) is sequenced before making that shared state ready.
- 11 Access to the result of the same shared state may conflict (6.8.2). [*Note*: This explicitly specifies that the result of the shared state is visible in the objects that reference this state in the sense of data race avoidance (20.5.5.9). For example, concurrent accesses through references returned by `shared_future::get()` (34.6.8) must either use read-only operations or provide additional synchronization. — *end note*]

34.6.6 Class template promise

[`futures.promise`]

```
namespace std {
    template<class R>
    class promise {
    public:
        promise();
        template<class Allocator>
            promise(allocator_arg_t, const Allocator& a);
        promise(promise&& rhs) noexcept;
        promise(const promise& rhs) = delete;
        ~promise();

        // assignment
        promise& operator=(promise&& rhs) noexcept;
        promise& operator=(const promise& rhs) = delete;
        void swap(promise& other) noexcept;

        // retrieving the result
        future<R> get_future();

        // setting the result
        void set_value(see below);
        void set_exception(exception_ptr p);

        // setting the result with deferred notification
        void set_value_at_thread_exit(see below);
        void set_exception_at_thread_exit(exception_ptr p);
    };

    template<class R>
        void swap(promise<R>& x, promise<R>& y) noexcept;

    template<class R, class Alloc>
        struct uses_allocator<promise<R>, Alloc>;
}
```

- 1 The implementation shall provide the template `promise` and two specializations, `promise<R&&>` and `promise<void>`. These differ only in the argument type of the member functions `set_value` and `set_value_at_thread_exit`, as set out in their descriptions, below.
- 2 The `set_value`, `set_exception`, `set_value_at_thread_exit`, and `set_exception_at_thread_exit` member functions behave as though they acquire a single mutex associated with the promise object while updating the promise object.

```
template<class R, class Alloc>
    struct uses_allocator<promise<R>, Alloc>
```

```
: true_type { };
```

3 *Requires:* Alloc shall satisfy the *Cpp17Allocator* requirements (Table 33).

```
promise();
template<class Allocator>
  promise(allocator_arg_t, const Allocator& a);
```

4 *Effects:* Constructs a `promise` object and a shared state. The second constructor uses the allocator `a` to allocate memory for the shared state.

```
promise(promise&& rhs) noexcept;
```

5 *Effects:* Constructs a new `promise` object and transfers ownership of the shared state of `rhs` (if any) to the newly-constructed object.

6 *Ensures:* `rhs` has no shared state.

```
~promise();
```

7 *Effects:* Abandons any shared state (34.6.5).

```
promise& operator=(promise&& rhs) noexcept;
```

8 *Effects:* Abandons any shared state (34.6.5) and then as if `promise(std::move(rhs)).swap(*this)`.

9 *Returns:* `*this`.

```
void swap(promise& other) noexcept;
```

10 *Effects:* Exchanges the shared state of `*this` and `other`.

11 *Ensures:* `*this` has the shared state (if any) that `other` had prior to the call to `swap`. `other` has the shared state (if any) that `*this` had prior to the call to `swap`.

```
future<R> get_future();
```

12 *Returns:* A `future<R>` object with the same shared state as `*this`.

13 *Throws:* `future_error` if `*this` has no shared state or if `get_future` has already been called on a `promise` with the same shared state as `*this`.

14 *Error conditions:*

(14.1) — `future_already_retrieved` if `get_future` has already been called on a `promise` with the same shared state as `*this`.

(14.2) — `no_state` if `*this` has no shared state.

```
void promise::set_value(const R& r);
void promise::set_value(R&& r);
void promise<R&&>::set_value(R& r);
void promise<void>::set_value();
```

15 *Effects:* Atomically stores the value `r` in the shared state and makes that state ready (34.6.5).

16 *Throws:*

(16.1) — `future_error` if its shared state already has a stored value or exception, or

(16.2) — for the first version, any exception thrown by the constructor selected to copy an object of `R`, or

(16.3) — for the second version, any exception thrown by the constructor selected to move an object of `R`.

17 *Error conditions:*

(17.1) — `promise_already_satisfied` if its shared state already has a stored value or exception.

(17.2) — `no_state` if `*this` has no shared state.

```
void set_exception(exception_ptr p);
```

18 *Requires:* `p` is not null.

19 *Effects:* Atomically stores the exception pointer `p` in the shared state and makes that state ready (34.6.5).

20 *Throws:* `future_error` if its shared state already has a stored value or exception.

21 *Error conditions:*

- (21.1) — `promise_already_satisfied` if its shared state already has a stored value or exception.
 (21.2) — `no_state` if `*this` has no shared state.

```
void promise::set_value_at_thread_exit(const R& r);
void promise::set_value_at_thread_exit(R&& r);
void promise<R>::set_value_at_thread_exit(R& r);
void promise<void>::set_value_at_thread_exit();
```

22 *Effects:* Stores the value `r` in the shared state without making that state ready immediately. Schedules that state to be made ready when the current thread exits, after all objects of thread storage duration associated with the current thread have been destroyed.

23 *Throws:*

- (23.1) — `future_error` if its shared state already has a stored value or exception, or
 (23.2) — for the first version, any exception thrown by the constructor selected to copy an object of `R`, or
 (23.3) — for the second version, any exception thrown by the constructor selected to move an object of `R`.

24 *Error conditions:*

- (24.1) — `promise_already_satisfied` if its shared state already has a stored value or exception.
 (24.2) — `no_state` if `*this` has no shared state.

```
void set_exception_at_thread_exit(exception_ptr p);
```

25 *Requires:* `p` is not null.

26 *Effects:* Stores the exception pointer `p` in the shared state without making that state ready immediately. Schedules that state to be made ready when the current thread exits, after all objects of thread storage duration associated with the current thread have been destroyed.

27 *Throws:* `future_error` if an error condition occurs.

28 *Error conditions:*

- (28.1) — `promise_already_satisfied` if its shared state already has a stored value or exception.
 (28.2) — `no_state` if `*this` has no shared state.

```
template<class R>
void swap(promise<R>& x, promise<R>& y) noexcept;
```

29 *Effects:* As if by `x.swap(y)`.

34.6.7 Class template future

[`futures.unique_future`]

- 1 The class template `future` defines a type for asynchronous return objects which do not share their shared state with other asynchronous return objects. A default-constructed `future` object has no shared state. A `future` object with shared state can be created by functions on asynchronous providers (34.6.5) or by the move constructor and shares its shared state with the original asynchronous provider. The result (value or exception) of a `future` object can be set by calling a respective function on an object that shares the same shared state.
- 2 [*Note:* Member functions of `future` do not synchronize with themselves or with member functions of `shared_future`. — *end note*]
- 3 The effect of calling any member function other than the destructor, the move-assignment operator, `share`, or `valid` on a `future` object for which `valid() == false` is undefined. [*Note:* It is valid to move from a `future` object for which `valid() == false`. — *end note*] [*Note:* Implementations should detect this case and throw an object of type `future_error` with an error condition of `future_errc::no_state`. — *end note*]

```
namespace std {
  template<class R>
  class future {
  public:
    future() noexcept;
    future(future&&) noexcept;
    future(const future& rhs) = delete;
    ~future();
```

```

future& operator=(const future& rhs) = delete;
future& operator=(future&&) noexcept;
shared_future<R> share() noexcept;

// retrieving the value
see below get();

// functions to check state
bool valid() const noexcept;

void wait() const;
template<class Rep, class Period>
    future_status wait_for(const chrono::duration<Rep, Period>& rel_time) const;
template<class Clock, class Duration>
    future_status wait_until(const chrono::time_point<Clock, Duration>& abs_time) const;
};
}

```

- 4 The implementation shall provide the template `future` and two specializations, `future<R>` and `future<void>`. These differ only in the return type and return value of the member function `get`, as set out in its description, below.

```
future() noexcept;
```

- 5 *Effects:* Constructs an *empty* `future` object that does not refer to a shared state.

- 6 *Ensures:* `valid() == false`.

```
future(future&& rhs) noexcept;
```

- 7 *Effects:* Move constructs a `future` object that refers to the shared state that was originally referred to by `rhs` (if any).

- 8 *Ensures:*

- (8.1) — `valid()` returns the same value as `rhs.valid()` prior to the constructor invocation.

- (8.2) — `rhs.valid() == false`.

```
~future();
```

- 9 *Effects:*

- (9.1) — Releases any shared state (34.6.5);

- (9.2) — destroys `*this`.

```
future& operator=(future&& rhs) noexcept;
```

- 10 *Effects:*

- (10.1) — Releases any shared state (34.6.5).

- (10.2) — move assigns the contents of `rhs` to `*this`.

- 11 *Ensures:*

- (11.1) — `valid()` returns the same value as `rhs.valid()` prior to the assignment.

- (11.2) — `rhs.valid() == false`.

```
shared_future<R> share() noexcept;
```

- 12 *Returns:* `shared_future<R>(std::move(*this))`.

- 13 *Ensures:* `valid() == false`.

```

R future::get();
R& future<R&>::get();
void future<void>::get();

```

- 14 [Note: As described above, the template and its two required specializations differ only in the return type and return value of the member function `get`. — *end note*]

- 15 *Effects:*

(15.1) — `wait()`s until the shared state is ready, then retrieves the value stored in the shared state;

(15.2) — releases any shared state (34.6.5).

16 *Returns:*

(16.1) — `future::get()` returns the value `v` stored in the object's shared state as `std::move(v)`.

(16.2) — `future<R&>::get()` returns the reference stored as value in the object's shared state.

(16.3) — `future<void>::get()` returns nothing.

17 *Throws:* The stored exception, if an exception was stored in the shared state.

18 *Ensures:* `valid() == false`.

```
bool valid() const noexcept;
```

19 *Returns:* true only if `*this` refers to a shared state.

```
void wait() const;
```

20 *Effects:* Blocks until the shared state is ready.

```
template<class Rep, class Period>
future_status wait_for(const chrono::duration<Rep, Period>& rel_time) const;
```

21 *Effects:* None if the shared state contains a deferred function (34.6.9), otherwise blocks until the shared state is ready or until the relative timeout (34.2.4) specified by `rel_time` has expired.

22 *Returns:*

(22.1) — `future_status::deferred` if the shared state contains a deferred function.

(22.2) — `future_status::ready` if the shared state is ready.

(22.3) — `future_status::timeout` if the function is returning because the relative timeout (34.2.4) specified by `rel_time` has expired.

23 *Throws:* timeout-related exceptions (34.2.4).

```
template<class Clock, class Duration>
future_status wait_until(const chrono::time_point<Clock, Duration>& abs_time) const;
```

24 *Effects:* None if the shared state contains a deferred function (34.6.9), otherwise blocks until the shared state is ready or until the absolute timeout (34.2.4) specified by `abs_time` has expired.

25 *Returns:*

(25.1) — `future_status::deferred` if the shared state contains a deferred function.

(25.2) — `future_status::ready` if the shared state is ready.

(25.3) — `future_status::timeout` if the function is returning because the absolute timeout (34.2.4) specified by `abs_time` has expired.

26 *Throws:* timeout-related exceptions (34.2.4).

34.6.8 Class template `shared_future` [futures.shared_future]

- 1 The class template `shared_future` defines a type for asynchronous return objects which may share their shared state with other asynchronous return objects. A default-constructed `shared_future` object has no shared state. A `shared_future` object with shared state can be created by conversion from a `future` object and shares its shared state with the original asynchronous provider (34.6.5) of the shared state. The result (value or exception) of a `shared_future` object can be set by calling a respective function on an object that shares the same shared state.
- 2 [Note: Member functions of `shared_future` do not synchronize with themselves, but they synchronize with the shared state. — end note]
- 3 The effect of calling any member function other than the destructor, the move-assignment operator, the copy-assignment operator, or `valid()` on a `shared_future` object for which `valid() == false` is undefined. [Note: It is valid to copy or move from a `shared_future` object for which `valid()` is `false`. — end note] [Note: Implementations should detect this case and throw an object of type `future_error` with an error condition of `future_errc::no_state`. — end note]

```

namespace std {
  template<class R>
  class shared_future {
  public:
    shared_future() noexcept;
    shared_future(const shared_future& rhs) noexcept;
    shared_future(future<R>&&) noexcept;
    shared_future(shared_future&& rhs) noexcept;
    ~shared_future();
    shared_future& operator=(const shared_future& rhs) noexcept;
    shared_future& operator=(shared_future&& rhs) noexcept;

    // retrieving the value
    see below get() const;

    // functions to check state
    bool valid() const noexcept;

    void wait() const;
    template<class Rep, class Period>
      future_status wait_for(const chrono::duration<Rep, Period>& rel_time) const;
    template<class Clock, class Duration>
      future_status wait_until(const chrono::time_point<Clock, Duration>& abs_time) const;
  };
}

```

- 4 The implementation shall provide the template `shared_future` and two specializations, `shared_future<R>` and `shared_future<void>`. These differ only in the return type and return value of the member function `get`, as set out in its description, below.

```
shared_future() noexcept;
```

- 5 *Effects:* Constructs an *empty* `shared_future` object that does not refer to a shared state.

- 6 *Ensures:* `valid() == false`.

```
shared_future(const shared_future& rhs) noexcept;
```

- 7 *Effects:* Constructs a `shared_future` object that refers to the same shared state as `rhs` (if any).

- 8 *Ensures:* `valid()` returns the same value as `rhs.valid()`.

```
shared_future(future<R>&& rhs) noexcept;
shared_future(shared_future&& rhs) noexcept;
```

- 9 *Effects:* Move constructs a `shared_future` object that refers to the shared state that was originally referred to by `rhs` (if any).

- 10 *Ensures:*

(10.1) — `valid()` returns the same value as `rhs.valid()` returned prior to the constructor invocation.

(10.2) — `rhs.valid() == false`.

```
~shared_future();
```

- 11 *Effects:*

(11.1) — Releases any shared state (34.6.5);

(11.2) — destroys `*this`.

```
shared_future& operator=(shared_future&& rhs) noexcept;
```

- 12 *Effects:*

(12.1) — Releases any shared state (34.6.5);

(12.2) — move assigns the contents of `rhs` to `*this`.

- 13 *Ensures:*

(13.1) — `valid()` returns the same value as `rhs.valid()` returned prior to the assignment.

(13.2) — `rhs.valid() == false`.

```
shared_future& operator=(const shared_future& rhs) noexcept;
```

14 *Effects:*

(14.1) — Releases any shared state (34.6.5);

(14.2) — assigns the contents of `rhs` to `*this`. [*Note:* As a result, `*this` refers to the same shared state as `rhs` (if any). — *end note*]

15 *Ensures:* `valid() == rhs.valid()`.

```
const R& shared_future::get() const;
R& shared_future<R&>::get() const;
void shared_future<void>::get() const;
```

16 [*Note:* As described above, the template and its two required specializations differ only in the return type and return value of the member function `get`. — *end note*]

17 [*Note:* Access to a value object stored in the shared state is unsynchronized, so programmers should apply only those operations on `R` that do not introduce a data race (6.8.2). — *end note*]

18 *Effects:* `wait()`s until the shared state is ready, then retrieves the value stored in the shared state.

19 *Returns:*

(19.1) — `shared_future::get()` returns a `const` reference to the value stored in the object's shared state. [*Note:* Access through that reference after the shared state has been destroyed produces undefined behavior; this can be avoided by not storing the reference in any storage with a greater lifetime than the `shared_future` object that returned the reference. — *end note*]

(19.2) — `shared_future<R&>::get()` returns the reference stored as value in the object's shared state.

(19.3) — `shared_future<void>::get()` returns nothing.

20 *Throws:* The stored exception, if an exception was stored in the shared state.

```
bool valid() const noexcept;
```

21 *Returns:* `true` only if `*this` refers to a shared state.

```
void wait() const;
```

22 *Effects:* Blocks until the shared state is ready.

```
template<class Rep, class Period>
future_status wait_for(const chrono::duration<Rep, Period>& rel_time) const;
```

23 *Effects:* None if the shared state contains a deferred function (34.6.9), otherwise blocks until the shared state is ready or until the relative timeout (34.2.4) specified by `rel_time` has expired.

24 *Returns:*

(24.1) — `future_status::deferred` if the shared state contains a deferred function.

(24.2) — `future_status::ready` if the shared state is ready.

(24.3) — `future_status::timeout` if the function is returning because the relative timeout (34.2.4) specified by `rel_time` has expired.

25 *Throws:* timeout-related exceptions (34.2.4).

```
template<class Clock, class Duration>
future_status wait_until(const chrono::time_point<Clock, Duration>& abs_time) const;
```

26 *Effects:* None if the shared state contains a deferred function (34.6.9), otherwise blocks until the shared state is ready or until the absolute timeout (34.2.4) specified by `abs_time` has expired.

27 *Returns:*

(27.1) — `future_status::deferred` if the shared state contains a deferred function.

(27.2) — `future_status::ready` if the shared state is ready.

(27.3) — `future_status::timeout` if the function is returning because the absolute timeout (34.2.4) specified by `abs_time` has expired.

28 *Throws*: timeout-related exceptions (34.2.4).

34.6.9 Function template `async` [futures.async]

1 The function template `async` provides a mechanism to launch a function potentially in a new thread and provides the result of the function in a `future` object with which it shares a shared state.

```
template<class F, class... Args>
  [[nodiscard]] future<invoke_result_t<decay_t<F>, decay_t<Args>...>>
    async(F&& f, Args&&... args);
template<class F, class... Args>
  [[nodiscard]] future<invoke_result_t<decay_t<F>, decay_t<Args>...>>
    async(launch_policy, F&& f, Args&&... args);
```

2 *Requires*: `F` and each `Ti` in `Args` shall satisfy the *Cpp17MoveConstructible* requirements, and

```
INVOKE(DECAY_COPY(std::forward<F>(f)),
       DECAY_COPY(std::forward<Args>(args))...) // see 24.14.3, 34.3.2.2
```

shall be a valid expression.

3 *Effects*: The first function behaves the same as a call to the second function with a `policy` argument of `launch::async` | `launch::deferred` and the same arguments for `F` and `Args`. The second function creates a shared state that is associated with the returned `future` object. The further behavior of the second function depends on the `policy` argument as follows (if more than one of these conditions applies, the implementation may choose any of the corresponding policies):

- (3.1) — If `launch::async` is set in `policy`, calls `INVOKE(DECAY_COPY(std::forward<F>(f)), DECAY_COPY(std::forward<Args>(args))...)` (24.14.3, 34.3.2.2) as if in a new thread of execution represented by a `thread` object with the calls to `DECAY_COPY` being evaluated in the thread that called `async`. Any return value is stored as the result in the shared state. Any exception propagated from the execution of `INVOKE(DECAY_COPY(std::forward<F>(f)), DECAY_COPY(std::forward<Args>(args))...)` is stored as the exceptional result in the shared state. The `thread` object is stored in the shared state and affects the behavior of any asynchronous return objects that reference that state.
- (3.2) — If `launch::deferred` is set in `policy`, stores `DECAY_COPY(std::forward<F>(f))` and `DECAY_COPY(std::forward<Args>(args))...` in the shared state. These copies of `f` and `args` constitute a *deferred function*. Invocation of the deferred function evaluates `INVOKE(std::move(g), std::move(xyz))` where `g` is the stored value of `DECAY_COPY(std::forward<F>(f))` and `xyz` is the stored copy of `DECAY_COPY(std::forward<Args>(args))...`. Any return value is stored as the result in the shared state. Any exception propagated from the execution of the deferred function is stored as the exceptional result in the shared state. The shared state is not made ready until the function has completed. The first call to a non-timed waiting function (34.6.5) on an asynchronous return object referring to this shared state shall invoke the deferred function in the thread that called the waiting function. Once evaluation of `INVOKE(std::move(g), std::move(xyz))` begins, the function is no longer considered deferred. [Note: If this policy is specified together with other policies, such as when using a `policy` value of `launch::async` | `launch::deferred`, implementations should defer invocation or the selection of the policy when no more concurrency can be effectively exploited. — end note]
- (3.3) — If no value is set in the launch policy, or a value is set that is neither specified in this document nor by the implementation, the behavior is undefined.

4 *Returns*: An object of type `future<invoke_result_t<decay_t<F>, decay_t<Args>...>>` that refers to the shared state created by this call to `async`. [Note: If a future obtained from `async` is moved outside the local scope, other code that uses the future should be aware that the future's destructor may block for the shared state to become ready. — end note]

5 *Synchronization*: Regardless of the provided `policy` argument,

- (5.1) — the invocation of `async` synchronizes with (6.8.2) the invocation of `f`. [Note: This statement applies even when the corresponding `future` object is moved to another thread. — end note]; and
- (5.2) — the completion of the function `f` is sequenced before (6.8.2) the shared state is made ready. [Note: `f` might not be called at all, so its completion might never happen. — end note]

If the implementation chooses the `launch::async` policy,

- (5.3) — a call to a waiting function on an asynchronous return object that shares the shared state created by this `async` call shall block until the associated thread has completed, as if joined, or else time out (34.3.2.5);
 - (5.4) — the associated thread completion synchronizes with (6.8.2) the return from the first function that successfully detects the ready status of the shared state or with the return from the last function that releases the shared state, whichever happens first.
- 6 *Throws:* `system_error` if `policy == launch::async` and the implementation is unable to start a new thread, or `std::bad_alloc` if memory for the internal data structures could not be allocated.
- 7 *Error conditions:*
- (7.1) — `resource_unavailable_try_again` — if `policy == launch::async` and the system is unable to start a new thread.

8 *[Example:*

```
int work1(int value);
int work2(int value);
int work(int value) {
    auto handle = std::async( [= ] { return work2(value); });
    int tmp = work1(value);
    return tmp + handle.get();    // #1
}
```

[Note: Line #1 might not result in concurrency because the `async` call uses the default policy, which may use `launch::deferred`, in which case the lambda might not be invoked until the `get()` call; in that case, `work1` and `work2` are called on the same thread and there is no concurrency. — end note] — end example]

34.6.10 Class template `packaged_task`

[futures.task]

- 1 The class template `packaged_task` defines a type for wrapping a function or callable object so that the return value of the function or callable object is stored in a future when it is invoked.
- 2 When the `packaged_task` object is invoked, its stored task is invoked and the result (whether normal or exceptional) stored in the shared state. Any futures that share the shared state will then be able to access the stored result.

```
namespace std {
    template<class> class packaged_task; // not defined

    template<class R, class... ArgTypes>
    class packaged_task<R(ArgTypes...)> {
    public:
        // construction and destruction
        packaged_task() noexcept;
        template<class F>
            explicit packaged_task(F&& f);
        ~packaged_task();

        // no copy
        packaged_task(const packaged_task&) = delete;
        packaged_task& operator=(const packaged_task&) = delete;

        // move support
        packaged_task(packaged_task&& rhs) noexcept;
        packaged_task& operator=(packaged_task&& rhs) noexcept;
        void swap(packaged_task& other) noexcept;

        bool valid() const noexcept;

        // result retrieval
        future<R> get_future();

        // execution
        void operator()(ArgTypes... );
    };
}
```

```

    void make_ready_at_thread_exit(ArgTypes...);

    void reset();
};

template<class R, class... ArgTypes>
    void swap(packaged_task<R(ArgTypes...)>& x, packaged_task<R(ArgTypes...)>& y) noexcept;
}

```

34.6.10.1 packaged_task member functions

[futures.task.members]

```
packaged_task() noexcept;
```

1 *Effects:* Constructs a `packaged_task` object with no shared state and no stored task.

```
template<class F>
    packaged_task(F&& f);
```

2 *Requires:* `INVOKE<R>(f, t1, t2, ..., tN)` (24.14.3), where `t1`, `t2`, ..., `tN` are values of the corresponding types in `ArgTypes...`, shall be a valid expression. Invoking a copy of `f` shall behave the same as invoking `f`.

3 *Remarks:* This constructor shall not participate in overload resolution if `remove_cvref_t<F>` is the same type as `packaged_task<R(ArgTypes...)>`.

4 *Effects:* Constructs a new `packaged_task` object with a shared state and initializes the object's stored task with `std::forward<F>(f)`.

5 *Throws:* Any exceptions thrown by the copy or move constructor of `f`, or `bad_alloc` if memory for the internal data structures could not be allocated.

```
packaged_task(packaged_task&& rhs) noexcept;
```

6 *Effects:* Constructs a new `packaged_task` object and transfers ownership of `rhs`'s shared state to `*this`, leaving `rhs` with no shared state. Moves the stored task from `rhs` to `*this`.

7 *Ensures:* `rhs` has no shared state.

```
packaged_task& operator=(packaged_task&& rhs) noexcept;
```

8 *Effects:*

(8.1) — Releases any shared state (34.6.5);

(8.2) — calls `packaged_task(std::move(rhs)).swap(*this)`.

```
~packaged_task();
```

9 *Effects:* Abandons any shared state (34.6.5).

```
void swap(packaged_task& other) noexcept;
```

10 *Effects:* Exchanges the shared states and stored tasks of `*this` and `other`.

11 *Ensures:* `*this` has the same shared state and stored task (if any) as `other` prior to the call to `swap`. `other` has the same shared state and stored task (if any) as `*this` prior to the call to `swap`.

```
bool valid() const noexcept;
```

12 *Returns:* `true` only if `*this` has a shared state.

```
future<R> get_future();
```

13 *Returns:* A `future` object that shares the same shared state as `*this`.

14 *Throws:* A `future_error` object if an error occurs.

15 *Error conditions:*

(15.1) — `future_already_retrieved` if `get_future` has already been called on a `packaged_task` object with the same shared state as `*this`.

(15.2) — `no_state` if `*this` has no shared state.

```
void operator()(ArgTypes... args);
```

16 *Effects:* As if by `INVOKE<R>(f, t1, t2, ..., tN)` (24.14.3), where `f` is the stored task of `*this` and `t1, t2, ..., tN` are the values in `args...`. If the task returns normally, the return value is stored as the asynchronous result in the shared state of `*this`, otherwise the exception thrown by the task is stored. The shared state of `*this` is made ready, and any threads blocked in a function waiting for the shared state of `*this` to become ready are unblocked.

17 *Throws:* A `future_error` exception object if there is no shared state or the stored task has already been invoked.

18 *Error conditions:*

(18.1) — `promise_already_satisfied` if the stored task has already been invoked.

(18.2) — `no_state` if `*this` has no shared state.

```
void make_ready_at_thread_exit(ArgTypes... args);
```

19 *Effects:* As if by `INVOKE<R>(f, t1, t2, ..., tN)` (24.14.3), where `f` is the stored task and `t1, t2, ..., tN` are the values in `args...`. If the task returns normally, the return value is stored as the asynchronous result in the shared state of `*this`, otherwise the exception thrown by the task is stored. In either case, this shall be done without making that state ready (34.6.5) immediately. Schedules the shared state to be made ready when the current thread exits, after all objects of thread storage duration associated with the current thread have been destroyed.

20 *Throws:* `future_error` if an error condition occurs.

21 *Error conditions:*

(21.1) — `promise_already_satisfied` if the stored task has already been invoked.

(21.2) — `no_state` if `*this` has no shared state.

```
void reset();
```

22 *Effects:* As if `*this = packaged_task(std::move(f))`, where `f` is the task stored in `*this`. [Note: This constructs a new shared state for `*this`. The old state is abandoned (34.6.5). — end note]

23 *Throws:*

(23.1) — `bad_alloc` if memory for the new shared state could not be allocated.

(23.2) — any exception thrown by the move constructor of the task stored in the shared state.

(23.3) — `future_error` with an error condition of `no_state` if `*this` has no shared state.

34.6.10.2 packaged_task globals

[futures.task.nonmembers]

```
template<class R, class... ArgTypes>
```

```
void swap(packaged_task<R(ArgTypes...)>& x, packaged_task<R(ArgTypes...)>& y) noexcept;
```

1 *Effects:* As if by `x.swap(y)`.

Annex A (informative)

Grammar summary

[gram]

- ¹ This summary of C++ grammar is intended to be an aid to comprehension. It is not an exact statement of the language. In particular, the grammar described here accepts a superset of valid C++ constructs. Disambiguation rules (9.8, 10.1, 13.2) must be applied to distinguish expressions from declarations. Further, access control, ambiguity, and type rules must be used to weed out syntactically valid but meaningless constructs.

A.1 Keywords

[gram.key]

- ¹ New context-dependent keywords are introduced into a program by `typedef` (10.1.3), `namespace` (10.3.1), `class` (Clause 12), `enumeration` (10.2), and `template` (Clause 17) declarations.

typedef-name:

identifier

namespace-name:

identifier

namespace-alias

namespace-alias:

identifier

class-name:

identifier

simple-template-id

enum-name:

identifier

template-name:

identifier

Note that a *typedef-name* naming a class is also a *class-name* (12.1).

A.2 Lexical conventions

[gram.lex]

hex-quad:

hexadecimal-digit hexadecimal-digit hexadecimal-digit hexadecimal-digit

universal-character-name:

\u hex-quad

\U hex-quad hex-quad

preprocessing-token:

header-name

identifier

pp-number

character-literal

user-defined-character-literal

string-literal

user-defined-string-literal

preprocessing-op-or-punc

each non-white-space character that cannot be one of the above

token:

identifier

keyword

literal

operator

punctuator

header-name:

< h-char-sequence >

" q-char-sequence "

h-char-sequence:

h-char
h-char-sequence h-char

h-char:

any member of the source character set except new-line and >

q-char-sequence:

q-char
q-char-sequence q-char

q-char:

any member of the source character set except new-line and "

pp-number:

digit
. digit
pp-number digit
pp-number identifier-nondigit
pp-number ' digit
pp-number ' nondigit
pp-number e sign
pp-number E sign
pp-number p sign
pp-number P sign
pp-number .

identifier:

identifier-nondigit
identifier identifier-nondigit
identifier digit

identifier-nondigit:

nondigit
universal-character-name

nondigit: one of

a b c d e f g h i j k l m
n o p q r s t u v w x y z
A B C D E F G H I J K L M
N O P Q R S T U V W X Y Z _

digit: one of

0 1 2 3 4 5 6 7 8 9

preprocessing-op-or-punc: one of

{	}	[]	#	##	()	
<:	>:	<%	%>	%:	%::	;	:	...
new	delete	?	::	.	.*	->	->*	~
!	+	-	*	/	%	^	&	
=	+=	--	**	/=	%=	^=	&=	=
==	!=	<	>	<=	>=	<=>	&&	
<<	>>	<<=	>>=	++	--	,		
and	or	xor	not	bitand	bitor	compl		
and_eq	or_eq	xor_eq	not_eq					

literal:

integer-literal
character-literal
floating-literal
string-literal
boolean-literal
pointer-literal
user-defined-literal

integer-literal:

binary-literal integer-suffix_{opt}
octal-literal integer-suffix_{opt}
decimal-literal integer-suffix_{opt}
hexadecimal-literal integer-suffix_{opt}

binary-literal:

0b *binary-digit*
 0B *binary-digit*
binary-literal ' *opt* *binary-digit*

octal-literal:

0
octal-literal ' *opt* *octal-digit*

decimal-literal:

nonzero-digit
decimal-literal ' *opt* *digit*

hexadecimal-literal:

hexadecimal-prefix *hexadecimal-digit-sequence*

binary-digit: one of

0 1

octal-digit: one of

0 1 2 3 4 5 6 7

nonzero-digit: one of

1 2 3 4 5 6 7 8 9

hexadecimal-prefix: one of

0x 0X

hexadecimal-digit-sequence:

hexadecimal-digit
hexadecimal-digit-sequence ' *opt* *hexadecimal-digit*

hexadecimal-digit: one of

0 1 2 3 4 5 6 7 8 9
 a b c d e f
 A B C D E F

integer-suffix:

unsigned-suffix *long-suffix*_{*opt*}
unsigned-suffix *long-long-suffix*_{*opt*}
long-suffix *unsigned-suffix*_{*opt*}
long-long-suffix *unsigned-suffix*_{*opt*}

unsigned-suffix: one of

u U

long-suffix: one of

l L

long-long-suffix: one of

ll LL

character-literal:

*encoding-prefix*_{*opt*} ' *c-char-sequence* '

encoding-prefix: one of

u8 u U L

c-char-sequence:

c-char
c-char-sequence *c-char*

c-char:

any member of the source character set except the single-quote ', backslash \, or new-line character
escape-sequence
universal-character-name

escape-sequence:

simple-escape-sequence
octal-escape-sequence
hexadecimal-escape-sequence

simple-escape-sequence: one of

\' \" \? \\
 \a \b \f \n \r \t \v

octal-escape-sequence:
 \ *octal-digit*
 \ *octal-digit octal-digit*
 \ *octal-digit octal-digit octal-digit*

hexadecimal-escape-sequence:
 \x *hexadecimal-digit*
hexadecimal-escape-sequence hexadecimal-digit

floating-literal:
decimal-floating-literal
hexadecimal-floating-literal

decimal-floating-literal:
fractional-constant exponent-part_{opt} floating-suffix_{opt}
digit-sequence exponent-part floating-suffix_{opt}

hexadecimal-floating-literal:
hexadecimal-prefix hexadecimal-fractional-constant binary-exponent-part floating-suffix_{opt}
hexadecimal-prefix hexadecimal-digit-sequence binary-exponent-part floating-suffix_{opt}

fractional-constant:
digit-sequence_{opt} . digit-sequence
digit-sequence .

hexadecimal-fractional-constant:
hexadecimal-digit-sequence_{opt} . hexadecimal-digit-sequence
hexadecimal-digit-sequence .

exponent-part:
 e *sign_{opt} digit-sequence*
 E *sign_{opt} digit-sequence*

binary-exponent-part:
 p *sign_{opt} digit-sequence*
 P *sign_{opt} digit-sequence*

sign: one of
 + -

digit-sequence:
digit
digit-sequence ' _{opt} digit

floating-suffix: one of
 f l F L

string-literal:
encoding-prefix_{opt} " s-char-sequence_{opt} "
encoding-prefix_{opt} R raw-string

s-char-sequence:
s-char
s-char-sequence s-char

s-char:
 any member of the source character set except the double-quote ", backslash \, or new-line character
escape-sequence
universal-character-name

raw-string:
 " *d-char-sequence_{opt} (r-char-sequence_{opt}) d-char-sequence_{opt} "*

r-char-sequence:
r-char
r-char-sequence r-char

r-char:
 any member of the source character set, except a right parenthesis) followed by
 the initial *d-char-sequence* (which may be empty) followed by a double quote ".

d-char-sequence:
d-char
d-char-sequence d-char

d-char:

any member of the basic source character set except:
space, the left parenthesis (, the right parenthesis), the backslash \, and the control characters representing horizontal tab, vertical tab, form feed, and newline.

boolean-literal:

false
true

pointer-literal:

nullptr

user-defined-literal:

user-defined-integer-literal
user-defined-floating-literal
user-defined-string-literal
user-defined-character-literal

user-defined-integer-literal:

decimal-literal ud-suffix
octal-literal ud-suffix
hexadecimal-literal ud-suffix
binary-literal ud-suffix

user-defined-floating-literal:

fractional-constant exponent-part_{opt} ud-suffix
digit-sequence exponent-part ud-suffix
hexadecimal-prefix hexadecimal-fractional-constant binary-exponent-part ud-suffix
hexadecimal-prefix hexadecimal-digit-sequence binary-exponent-part ud-suffix

user-defined-string-literal:

string-literal ud-suffix

user-defined-character-literal:

character-literal ud-suffix

ud-suffix:

identifier

A.3 Basics

[gram.basic]

translation-unit:

declaration-seq_{opt}

A.4 Expressions

[gram.expr]

primary-expression:

literal
this
(*expression*)
id-expression
lambda-expression
fold-expression
requires-expression

id-expression:

unqualified-id
qualified-id

unqualified-id:

identifier
operator-function-id
conversion-function-id
literal-operator-id
~ *class-name*
~ *decltype-specifier*
template-id

qualified-id:

nested-name-specifier **template_{opt}** *unqualified-id*

nested-name-specifier:

```

::
type-name ::
namespace-name ::
decltype-specifier ::
nested-name-specifier identifier ::
nested-name-specifier templateopt simple-template-id ::

```

lambda-expression:

```

lambda-introducer compound-statement
lambda-introducer lambda-declarator requires-clauseopt compound-statement
lambda-introducer < template-parameter-list > requires-clauseopt compound-statement
lambda-introducer < template-parameter-list > requires-clauseopt
lambda-declarator requires-clauseopt compound-statement

```

lambda-introducer:

```

[ lambda-captureopt ]

```

lambda-declarator:

```

( parameter-declaration-clause ) decl-specifier-seqopt
noexcept-specifieropt attribute-specifier-seqopt trailing-return-typeopt

```

lambda-capture:

```

capture-default
capture-list
capture-default , capture-list

```

capture-default:

```

&
=

```

capture-list:

```

capture
capture-list , capture

```

capture:

```

simple-capture ...opt
...opt init-capture

```

simple-capture:

```

identifier
& identifier
this
* this

```

init-capture:

```

identifier initializer
& identifier initializer

```

fold-expression:

```

( cast-expression fold-operator ... )
( ... fold-operator cast-expression )
( cast-expression fold-operator ... fold-operator cast-expression )

```

fold-operator: one of

```

+ - * / % ^ & | << >>
+= -= *= /= %= ^= &= |= <<= >>= =
== != < > <= >= && || , .* ->*

```

requires-expression:

```

requires requirement-parameter-listopt requirement-body

```

requirement-parameter-list:

```

( parameter-declaration-clauseopt )

```

requirement-body:

```

{ requirement-seq }

```

requirement-seq:

```

requirement
requirement-seq requirement

```

requirement:

- simple-requirement*
- type-requirement*
- compound-requirement*
- nested-requirement*

simple-requirement:

- expression* ;

type-requirement:

- typename** *nested-name-specifier*_{opt} *type-name* ;

compound-requirement:

- { *expression* } **noexcept**_{opt} *return-type-requirement*_{opt} ;

return-type-requirement:

- trailing-return-type*
- > *cv-qualifier-seq*_{opt} *constrained-parameter* *cv-qualifier-seq*_{opt} *abstract-declarator*_{opt}

nested-requirement:

- requires** *constraint-expression* ;

postfix-expression:

- primary-expression*
- postfix-expression* [*expr-or-braced-init-list*]
- postfix-expression* (*expression-list*_{opt})
- simple-type-specifier* (*expression-list*_{opt})
- typename-specifier* (*expression-list*_{opt})
- simple-type-specifier* *braced-init-list*
- typename-specifier* *braced-init-list*
- postfix-expression* . **template**_{opt} *id-expression*
- postfix-expression* -> **template**_{opt} *id-expression*
- postfix-expression* . *pseudo-destructor-name*
- postfix-expression* -> *pseudo-destructor-name*
- postfix-expression* ++
- postfix-expression* --
- dynamic_cast** < *type-id* > (*expression*)
- static_cast** < *type-id* > (*expression*)
- reinterpret_cast** < *type-id* > (*expression*)
- const_cast** < *type-id* > (*expression*)
- typeid** (*expression*)
- typeid** (*type-id*)

expression-list:

- initializer-list*

pseudo-destructor-name:

- nested-name-specifier*_{opt} *type-name* :: ~ *type-name*
- nested-name-specifier* **template** *simple-template-id* :: ~ *type-name*
- ~ *type-name*
- ~ *decltype-specifier*

unary-expression:

- postfix-expression*
- ++ *cast-expression*
- *cast-expression*
- unary-operator* *cast-expression*
- sizeof** *unary-expression*
- sizeof** (*type-id*)
- sizeof** ... (*identifier*)
- alignof** (*type-id*)
- noexcept-expression*
- new-expression*
- delete-expression*

unary-operator: one of

- * & + - ! ~

new-expression:

::_{opt} new new-placement_{opt} new-type-id new-initializer_{opt}
::_{opt} new new-placement_{opt} (type-id) new-initializer_{opt}

new-placement:

(expression-list)

new-type-id:

type-specifier-seq new-declarator_{opt}

new-declarator:

ptr-operator new-declarator_{opt}
noptr-new-declarator

noptr-new-declarator:

[expression] attribute-specifier-seq_{opt}
noptr-new-declarator [constant-expression] attribute-specifier-seq_{opt}

new-initializer:

(expression-list_{opt})
braced-init-list

delete-expression:

::_{opt} delete cast-expression
::_{opt} delete [] cast-expression

noexcept-expression:

noexcept (expression)

cast-expression:

unary-expression
(type-id) cast-expression

pm-expression:

cast-expression
pm-expression . cast-expression*
pm-expression -> cast-expression*

multiplicative-expression:

pm-expression
*multiplicative-expression * pm-expression*
multiplicative-expression / pm-expression
multiplicative-expression % pm-expression

additive-expression:

multiplicative-expression
additive-expression + multiplicative-expression
additive-expression - multiplicative-expression

shift-expression:

additive-expression
shift-expression << additive-expression
shift-expression >> additive-expression

compare-expression:

shift-expression
compare-expression <=> shift-expression

relational-expression:

compare-expression
relational-expression < compare-expression
relational-expression > compare-expression
relational-expression <= compare-expression
relational-expression >= compare-expression

equality-expression:

relational-expression
equality-expression == relational-expression
equality-expression != relational-expression

and-expression:

equality-expression
and-expression & equality-expression

exclusive-or-expression:
and-expression
exclusive-or-expression \wedge *and-expression*

inclusive-or-expression:
exclusive-or-expression
inclusive-or-expression | *exclusive-or-expression*

logical-and-expression:
inclusive-or-expression
logical-and-expression && *inclusive-or-expression*

logical-or-expression:
logical-and-expression
logical-or-expression || *logical-and-expression*

conditional-expression:
logical-or-expression
logical-or-expression ? *expression* : *assignment-expression*

throw-expression:
throw *assignment-expression*_{opt}

assignment-expression:
conditional-expression
logical-or-expression *assignment-operator* *initializer-clause*
throw-expression

assignment-operator: one of
= *= /= %= += -= >>= <<= &= ^= |=

expression:
assignment-expression
expression , *assignment-expression*

constant-expression:
conditional-expression

A.5 Statements

[gram.stmt]

statement:
labeled-statement
*attribute-specifier-seq*_{opt} *expression-statement*
*attribute-specifier-seq*_{opt} *compound-statement*
*attribute-specifier-seq*_{opt} *selection-statement*
*attribute-specifier-seq*_{opt} *iteration-statement*
*attribute-specifier-seq*_{opt} *jump-statement*
declaration-statement
*attribute-specifier-seq*_{opt} *try-block*

init-statement:
expression-statement
simple-declaration

condition:
expression
*attribute-specifier-seq*_{opt} *decl-specifier-seq* *declarator* *brace-or-equal-initializer*

labeled-statement:
*attribute-specifier-seq*_{opt} *identifier* : *statement*
*attribute-specifier-seq*_{opt} **case** *constant-expression* : *statement*
*attribute-specifier-seq*_{opt} **default** : *statement*

expression-statement:
*expression*_{opt} ;

compound-statement:
{ *statement-seq*_{opt} }

statement-seq:
statement
statement-seq *statement*

selection-statement:

```

if constexpropt ( init-statementopt condition ) statement
if constexpropt ( init-statementopt condition ) statement else statement
switch ( init-statementopt condition ) statement

```

iteration-statement:

```

while ( condition ) statement
do statement while ( expression ) ;
for ( init-statement conditionopt ; expressionopt ) statement
for ( init-statementopt for-range-declaration : for-range-initializer ) statement

```

for-range-declaration:

```

attribute-specifier-seqopt decl-specifier-seq declarator
attribute-specifier-seqopt decl-specifier-seq ref-qualifieropt [ identifier-list ]

```

for-range-initializer:

```

expr-or-braced-init-list

```

jump-statement:

```

break ;
continue ;
return expr-or-braced-init-listopt ;
goto identifier ;

```

declaration-statement:

```

block-declaration

```

A.6 Declarations

[gram.dcl]

declaration-seq:

```

declaration
declaration-seq declaration

```

declaration:

```

block-declaration
nodeclspec-function-declaration
function-definition
template-declaration
deduction-guide
explicit-instantiation
explicit-specialization
linkage-specification
namespace-definition
empty-declaration
attribute-declaration

```

block-declaration:

```

simple-declaration
asm-definition
namespace-alias-definition
using-declaration
using-directive
static_assert-declaration
alias-declaration
opaque-enum-declaration

```

nodeclspec-function-declaration:

```

attribute-specifier-seqopt declarator ;

```

alias-declaration:

```

using identifier attribute-specifier-seqopt = defining-type-id ;

```

simple-declaration:

```

decl-specifier-seq init-declarator-listopt ;
attribute-specifier-seq decl-specifier-seq init-declarator-list ;
attribute-specifier-seqopt decl-specifier-seq ref-qualifieropt [ identifier-list ] initializer ;

```

static_assert-declaration:

```

static_assert ( constant-expression ) ;
static_assert ( constant-expression , string-literal ) ;

```

empty-declaration:
;

attribute-declaration:
 attribute-specifier-seq ;

decl-specifier:
 storage-class-specifier
 defining-type-specifier
 function-specifier
 friend
 typedef
 constexpr
 inline

decl-specifier-seq:
 decl-specifier *attribute-specifier-seq*_{opt}
 decl-specifier *decl-specifier-seq*

storage-class-specifier:
 static
 thread_local
 extern
 mutable

function-specifier:
 virtual
 explicit-specifier

explicit-specifier:
 explicit (*constant-expression*)
 explicit

typedef-name:
 identifier

type-specifier:
 simple-type-specifier
 elaborated-type-specifier
 typename-specifier
 cv-qualifier

type-specifier-seq:
 type-specifier *attribute-specifier-seq*_{opt}
 type-specifier *type-specifier-seq*

defining-type-specifier:
 type-specifier
 class-specifier
 enum-specifier

defining-type-specifier-seq:
 defining-type-specifier *attribute-specifier-seq*_{opt}
 defining-type-specifier *defining-type-specifier-seq*

simple-type-specifier:

*nested-name-specifier*_{opt} *type-name*
nested-name-specifier **template** *simple-template-id*
*nested-name-specifier*_{opt} *template-name*
char
char16_t
char32_t
wchar_t
bool
short
int
long
signed
unsigned
float
double
void
auto
decltype-specifier

type-name:

class-name
enum-name
typedef-name
simple-template-id

decltype-specifier:

decltype (*expression*)
decltype (**auto**)

elaborated-type-specifier:

class-key *attribute-specifier-seq*_{opt} *nested-name-specifier*_{opt} *identifier*
class-key *simple-template-id*
class-key *nested-name-specifier* **template**_{opt} *simple-template-id*
enum *nested-name-specifier*_{opt} *identifier*

enum-name:

identifier

enum-specifier:

enum-head { *enumerator-list*_{opt} }
enum-head { *enumerator-list* , }

enum-head:

enum-key *attribute-specifier-seq*_{opt} *enum-head-name*_{opt} *enum-base*_{opt}

enum-head-name:

*nested-name-specifier*_{opt} *identifier*

opaque-enum-declaration:

enum-key *attribute-specifier-seq*_{opt} *nested-name-specifier*_{opt} *identifier* *enum-base*_{opt} ;

enum-key:

enum
enum class
enum struct

enum-base:

: *type-specifier-seq*

enumerator-list:

enumerator-definition
enumerator-list , *enumerator-definition*

enumerator-definition:

enumerator
enumerator = *constant-expression*

enumerator:

identifier *attribute-specifier-seq*_{opt}

namespace-name:
identifier
namespace-alias

namespace-definition:
named-namespace-definition
unnamed-namespace-definition
nested-namespace-definition

named-namespace-definition:
inline_{opt} **namespace** *attribute-specifier-seq*_{opt} *identifier* { *namespace-body* }

unnamed-namespace-definition:
inline_{opt} **namespace** *attribute-specifier-seq*_{opt} { *namespace-body* }

nested-namespace-definition:
namespace *enclosing-namespace-specifier* :: *identifier* { *namespace-body* }

enclosing-namespace-specifier:
identifier
enclosing-namespace-specifier :: *identifier*

namespace-body:
*declaration-seq*_{opt}

namespace-alias:
identifier

namespace-alias-definition:
namespace *identifier* = *qualified-namespace-specifier* ;

qualified-namespace-specifier:
*nested-name-specifier*_{opt} *namespace-name*

using-declaration:
using *using-declarator-list* ;

using-declarator-list:
using-declarator ..._{opt}
using-declarator-list , *using-declarator* ..._{opt}

using-declarator:
typename_{opt} *nested-name-specifier* *unqualified-id*

using-directive:
*attribute-specifier-seq*_{opt} **using namespace** *nested-name-specifier*_{opt} *namespace-name* ;

asm-definition:
*attribute-specifier-seq*_{opt} **asm** (*string-literal*) ;

linkage-specification:
extern *string-literal* { *declaration-seq*_{opt} }
extern *string-literal* *declaration*

attribute-specifier-seq:
*attribute-specifier-seq*_{opt} *attribute-specifier*

attribute-specifier:
[[*attribute-using-prefix*_{opt} *attribute-list*]]
contract-attribute-specifier
alignment-specifier

alignment-specifier:
alignas (*type-id* ..._{opt})
alignas (*constant-expression* ..._{opt})

attribute-using-prefix:
using *attribute-namespace* :

attribute-list:
*attribute*_{opt}
attribute-list , *attribute*_{opt}
attribute ...
attribute-list , *attribute* ...

attribute:
attribute-token *attribute-argument-clause*_{opt}

attribute-token:
identifier
attribute-scoped-token

attribute-scoped-token:
attribute-namespace :: *identifier*

attribute-namespace:
identifier

attribute-argument-clause:
 (*balanced-token-seq_{opt}*)

balanced-token-seq:
balanced-token
balanced-token-seq *balanced-token*

balanced-token:
 (*balanced-token-seq_{opt}*)
 [*balanced-token-seq_{opt}*]
 { *balanced-token-seq_{opt}* }
 any *token* other than a parenthesis, a bracket, or a brace

contract-attribute-specifier:
 [[**expects** *contract-level_{opt}* : *conditional-expression*]]
 [[**ensures** *contract-level_{opt}* *identifier_{opt}* : *conditional-expression*]]
 [[**assert** *contract-level_{opt}* : *conditional-expression*]]

contract-level:
default
audit
axiom

A.7 Declarators

[gram.decl]

init-declarator-list:
init-declarator
init-declarator-list , *init-declarator*

init-declarator:
declarator *initializer_{opt}*
declarator *requires-clause*

declarator:
ptr-declarator
noptr-declarator *parameters-and-qualifiers* *trailing-return-type*

ptr-declarator:
noptr-declarator
ptr-operator *ptr-declarator*

noptr-declarator:
declarator-id *attribute-specifier-seq_{opt}*
noptr-declarator *parameters-and-qualifiers*
noptr-declarator [*constant-expression_{opt}*] *attribute-specifier-seq_{opt}*
 (*ptr-declarator*)

parameters-and-qualifiers:
 (*parameter-declaration-clause*) *cv-qualifier-seq_{opt}*
ref-qualifier_{opt} *noexcept-specifier_{opt}* *attribute-specifier-seq_{opt}*

trailing-return-type:
 -> *type-id*

ptr-operator:
 * *attribute-specifier-seq_{opt}* *cv-qualifier-seq_{opt}*
 & *attribute-specifier-seq_{opt}*
 && *attribute-specifier-seq_{opt}*
nested-name-specifier * *attribute-specifier-seq_{opt}* *cv-qualifier-seq_{opt}*

cv-qualifier-seq:
cv-qualifier *cv-qualifier-seq_{opt}*

cv-qualifier:
 const
 volatile

ref-qualifier:
 &
 &&

declarator-id:
 ..._{opt} *id-expression*

type-id:
type-specifier-seq *abstract-declarator*_{opt}

defining-type-id:
defining-type-specifier-seq *abstract-declarator*_{opt}

abstract-declarator:
ptr-abstract-declarator
*noptr-abstract-declarator*_{opt} *parameters-and-qualifiers* *trailing-return-type*
abstract-pack-declarator

ptr-abstract-declarator:
noptr-abstract-declarator
ptr-operator *ptr-abstract-declarator*_{opt}

noptr-abstract-declarator:
*noptr-abstract-declarator*_{opt} *parameters-and-qualifiers*
*noptr-abstract-declarator*_{opt} [*constant-expression*_{opt}] *attribute-specifier-seq*_{opt}
 (*ptr-abstract-declarator*)

abstract-pack-declarator:
noptr-abstract-pack-declarator
ptr-operator *abstract-pack-declarator*

noptr-abstract-pack-declarator:
noptr-abstract-pack-declarator *parameters-and-qualifiers*
noptr-abstract-pack-declarator [*constant-expression*_{opt}] *attribute-specifier-seq*_{opt}
 ...

parameter-declaration-clause:
*parameter-declaration-list*_{opt} ..._{opt}
parameter-declaration-list , ...

parameter-declaration-list:
parameter-declaration
parameter-declaration-list , *parameter-declaration*

parameter-declaration:
*attribute-specifier-seq*_{opt} *decl-specifier-seq* *declarator*
*attribute-specifier-seq*_{opt} *decl-specifier-seq* *declarator* = *initializer-clause*
*attribute-specifier-seq*_{opt} *decl-specifier-seq* *abstract-declarator*_{opt}
*attribute-specifier-seq*_{opt} *decl-specifier-seq* *abstract-declarator*_{opt} = *initializer-clause*

function-definition:
*attribute-specifier-seq*_{opt} *decl-specifier-seq*_{opt} *declarator* *virt-specifier-seq*_{opt} *function-body*
*attribute-specifier-seq*_{opt} *decl-specifier-seq*_{opt} *declarator* *requires-clause* *function-body*

function-body:
*ctor-initializer*_{opt} *compound-statement*
function-try-block
 = **default** ;
 = **delete** ;

initializer:
brace-or-equal-initializer
 (*expression-list*)

brace-or-equal-initializer:
 = *initializer-clause*
braced-init-list

initializer-clause:
assignment-expression
braced-init-list

braced-init-list:
{ *initializer-list* ,_{opt} }
{ *designated-initializer-list* ,_{opt} }
{ }

initializer-list:
initializer-clause . . ._{opt}
initializer-list , *initializer-clause* . . ._{opt}

designated-initializer-list:
designated-initializer-clause
designated-initializer-list , *designated-initializer-clause*

designated-initializer-clause:
designator *brace-or-equal-initializer*

designator:
. *identifier*

expr-or-braced-init-list:
expression
braced-init-list

A.8 Classes

[gram.class]

class-name:
identifier
simple-template-id

class-specifier:
class-head { *member-specification*_{opt} }

class-head:
class-key *attribute-specifier-seq*_{opt} *class-head-name* *class-virt-specifier*_{opt} *base-clause*_{opt}
class-key *attribute-specifier-seq*_{opt} *base-clause*_{opt}

class-head-name:
*nested-name-specifier*_{opt} *class-name*

class-virt-specifier:
final

class-key:
class
struct
union

member-specification:
member-declaration *member-specification*_{opt}
access-specifier : *member-specification*_{opt}

member-declaration:
*attribute-specifier-seq*_{opt} *decl-specifier-seq*_{opt} *member-declarator-list*_{opt} ;
function-definition
using-declaration
static_assert-declaration
template-declaration
deduction-guide
alias-declaration
empty-declaration

member-declarator-list:
member-declarator
member-declarator-list , *member-declarator*

member-declarator:
declarator *virt-specifier-seq*_{opt} *pure-specifier*_{opt}
declarator *requires-clause*
declarator *brace-or-equal-initializer*_{opt}
*identifier*_{opt} *attribute-specifier-seq*_{opt} : *constant-expression* *brace-or-equal-initializer*_{opt}

virt-specifier-seq:
virt-specifier
virt-specifier-seq virt-specifier

virt-specifier:
override
final

pure-specifier:
= 0

A.9 Derived classes

[gram.derived]

base-clause:
: *base-specifier-list*

base-specifier-list:
base-specifier ... *opt*
base-specifier-list , *base-specifier* ... *opt*

base-specifier:
*attribute-specifier-seq*_{opt} *class-or-decltype*
*attribute-specifier-seq*_{opt} **virtual** *access-specifier*_{opt} *class-or-decltype*
*attribute-specifier-seq*_{opt} *access-specifier* **virtual**_{opt} *class-or-decltype*

class-or-decltype:
*nested-name-specifier*_{opt} *class-name*
nested-name-specifier **template** *simple-template-id*
decltype-specifier

access-specifier:
private
protected
public

A.10 Special member functions

[gram.special]

conversion-function-id:
operator *conversion-type-id*

conversion-type-id:
type-specifier-seq *conversion-declarator*_{opt}

conversion-declarator:
ptr-operator *conversion-declarator*_{opt}

ctor-initializer:
: *mem-initializer-list*

mem-initializer-list:
mem-initializer ... *opt*
mem-initializer-list , *mem-initializer* ... *opt*

mem-initializer:
mem-initializer-id (*expression-list*_{opt})
mem-initializer-id *braced-init-list*

mem-initializer-id:
class-or-decltype
identifier

A.11 Overloading

[gram.over]

operator-function-id:
operator *operator*

operator: one of

new	delete	new []	delete []	()	[]	->	->*	~
!	+	-	*	/	%	^	&	
=	+=	-=	*=	/=	%=	^=	&=	 =
==	!=	<	>	<=	>=	<=>	&&	
<<	>>	<<=	>>=	++	--	,		

literal-operator-id:
operator *string-literal identifier*
operator *user-defined-string-literal*

A.12 Templates

[gram.temp]

template-declaration:
template-head declaration
template-head concept-definition

template-head:
template < *template-parameter-list* > *requires-clause*_{opt}

template-parameter-list:
template-parameter
template-parameter-list , *template-parameter*

requires-clause:
requires *constraint-logical-or-expression*

constraint-logical-or-expression:
constraint-logical-and-expression
constraint-logical-or-expression || *constraint-logical-and-expression*

constraint-logical-and-expression:
primary-expression
constraint-logical-and-expression && *primary-expression*

concept-definition:
concept *concept-name* = *constraint-expression* ;

concept-name:
identifier

template-parameter:
type-parameter
parameter-declaration
constrained-parameter

type-parameter:
type-parameter-key . . . _{opt} *identifier*_{opt}
type-parameter-key *identifier*_{opt} = *type-id*
template-head *type-parameter-key* . . . _{opt} *identifier*_{opt}
template-head *type-parameter-key* *identifier*_{opt} = *id-expression*

type-parameter-key:
class
typename

constrained-parameter:
qualified-concept-name . . . *identifier*_{opt}
qualified-concept-name *identifier*_{opt} *default-template-argument*_{opt}

qualified-concept-name:
*nested-name-specifier*_{opt} *concept-name*
*nested-name-specifier*_{opt} *partial-concept-id*

partial-concept-id:
concept-name < *template-argument-list*_{opt} >

default-template-argument:
= *type-id*
= *id-expression*
= *initializer-clause*

simple-template-id:
template-name < *template-argument-list*_{opt} >

template-id:
simple-template-id
operator-function-id < *template-argument-list*_{opt} >
literal-operator-id < *template-argument-list*_{opt} >

template-name:
identifier

template-argument-list:
template-argument ... *opt*
template-argument-list , *template-argument* ... *opt*

template-argument:
constant-expression
type-id
id-expression

constraint-expression:
logical-or-expression

typename-specifier:
typename *nested-name-specifier* *identifier*
typename *nested-name-specifier* **template**_{*opt*} *simple-template-id*

explicit-instantiation:
extern_{*opt*} **template** *declaration*

explicit-specialization:
template < > *declaration*

deduction-guide:
explicit_{*opt*} *template-name* (*parameter-declaration-clause*) -> *simple-template-id* ;

A.13 Exception handling

[gram.exception]

try-block:
try *compound-statement* *handler-seq*

function-try-block:
try *ctor-initializer*_{*opt*} *compound-statement* *handler-seq*

handler-seq:
handler *handler-seq*_{*opt*}

handler:
catch (*exception-declaration*) *compound-statement*

exception-declaration:
*attribute-specifier-seq*_{*opt*} *type-specifier-seq* *declarator*
*attribute-specifier-seq*_{*opt*} *type-specifier-seq* *abstract-declarator*_{*opt*}
...

noexcept-specifier:
noexcept (*constant-expression*)
noexcept

A.14 Preprocessing directives

[gram.cpp]

preprocessing-file:
*group*_{*opt*}

group:
group-part
group *group-part*

group-part:
control-line
if-section
text-line
*conditionally-supported-directive*

control-line:

```
# include pp-tokens new-line
# define identifier replacement-list new-line
# define identifier lparen identifier-listopt ) replacement-list new-line
# define identifier lparen ... ) replacement-list new-line
# define identifier lparen identifier-list , ... ) replacement-list new-line
# undef identifier new-line
# line pp-tokens new-line
# error pp-tokensopt new-line
# pragma pp-tokensopt new-line
# new-line
```

if-section:

```
if-group elif-groupsopt else-groupopt endif-line
```

if-group:

```
# if constant-expression new-line groupopt
# ifdef identifier new-line groupopt
# ifndef identifier new-line groupopt
```

elif-groups:

```
elif-group
elif-groups elif-group
```

elif-group:

```
# elif constant-expression new-line groupopt
```

else-group:

```
# else new-line groupopt
```

endif-line:

```
# endif new-line
```

text-line:

```
pp-tokensopt new-line
```

conditionally-supported-directive:

```
pp-tokens new-line
```

lparen:

a (character not immediately preceded by white-space

identifier-list:

```
identifier
identifier-list , identifier
```

replacement-list:

```
pp-tokensopt
```

pp-tokens:

```
preprocessing-token
pp-tokens preprocessing-token
```

new-line:

the new-line character

defined-macro-expression:

```
defined identifier
defined ( identifier )
```

h-preprocessing-token:

any preprocessing-token other than >

h-pp-tokens:

```
h-preprocessing-token
h-pp-tokens h-preprocessing-token
```

has-include-expression:

```
__has_include ( < h-char-sequence > )
__has_include ( " q-char-sequence " )
__has_include ( string-literal )
__has_include ( < h-pp-tokens > )
```

has-attribute-expression:

```
__has_cpp_attribute ( pp-tokens )
```

Annex B (informative)

Implementation quantities [implimits]

¹ Because computers are finite, C++ implementations are inevitably limited in the size of the programs they can successfully process. Every implementation shall document those limitations where known. This documentation may cite fixed limits where they exist, say how to compute variable limits as a function of available resources, or say that fixed limits do not exist or are unknown.

² The limits may constrain quantities that include those described below or others. The bracketed number following each quantity is recommended as the minimum for that quantity. However, these quantities are only guidelines and do not determine compliance.

- (2.1) — Nesting levels of compound statements (9.3), iteration control structures (9.5), and selection control structures (9.4) [256].
- (2.2) — Nesting levels of conditional inclusion (19.1) [256].
- (2.3) — Pointer (11.3.1), array (11.3.4), and function (11.3.5) declarators (in any combination) modifying a class, arithmetic, or incomplete type in a declaration [256].
- (2.4) — Nesting levels of parenthesized expressions (8.4.3) within a full-expression [256].
- (2.5) — Number of characters in an internal identifier (5.10) or macro name (19.3) [1 024].
- (2.6) — Number of characters in an external identifier (5.10, 6.5) [1 024].
- (2.7) — External identifiers (6.5) in one translation unit [65 536].
- (2.8) — Identifiers with block scope declared in one block (6.3.3) [1 024].
- (2.9) — Structured bindings (11.5) introduced in one declaration [256].
- (2.10) — Macro identifiers (19.3) simultaneously defined in one translation unit [65 536].
- (2.11) — Parameters in one function definition (11.4.1) [256].
- (2.12) — Arguments in one function call (8.5.1.2) [256].
- (2.13) — Parameters in one macro definition (19.3) [256].
- (2.14) — Arguments in one macro invocation (19.3) [256].
- (2.15) — Characters in one logical source line (5.2) [65 536].
- (2.16) — Characters in a string literal (5.13.5) (after concatenation (5.2)) [65 536].
- (2.17) — Size of an object (6.6.2) [262 144].
- (2.18) — Nesting levels for `#include` files (19.2) [256].
- (2.19) — Case labels for a `switch` statement (9.4.2) (excluding those for any nested `switch` statements) [16 384].
- (2.20) — Non-static data members (including inherited ones) in a single class (12.2) [16 384].
- (2.21) — Lambda-captures in one *lambda-expression* (8.4.5.2) [256].
- (2.22) — Enumeration constants in a single enumeration (10.2) [4 096].
- (2.23) — Levels of nested class definitions (12.2.5) in a single *member-specification* [256].
- (2.24) — Functions registered by `atexit()` (21.5) [32].
- (2.25) — Functions registered by `at_quick_exit()` (21.5) [32].
- (2.26) — Direct and indirect base classes (Clause 13) [16 384].
- (2.27) — Direct base classes for a single class (Clause 13) [1 024].
- (2.28) — Class members declared in a single *member-specification* (including member functions) (12.2) [4 096].
- (2.29) — Final overriding virtual functions in a class, accessible or not (13.3) [16 384].
- (2.30) — Direct and indirect virtual bases of a class (13.1) [1 024].

- (2.31) — Static data members of a class (12.2.3.2) [1 024].
- (2.32) — Friend declarations in a class (14.3) [4 096].
- (2.33) — Access control declarations in a class (14.1) [4 096].
- (2.34) — Member initializers in a constructor definition (15.6.2) [6 144].
- (2.35) — *initializer-clauses* in one *braced-init-list* (11.6) [16 384].
- (2.36) — Scope qualifications of one identifier (8.4.4.2) [256].
- (2.37) — Nested *linkage-specifications* (10.5) [1 024].
- (2.38) — Recursive constexpr function invocations (10.1.5) [512].
- (2.39) — Full-expressions evaluated within a core constant expression (8.6) [1 048 576].
- (2.40) — Template parameters in a template declaration (17.1) [1 024].
- (2.41) — Recursively nested template instantiations (17.8.1), including substitution during template argument deduction (17.9.2) [1 024].
- (2.42) — Handlers per try block (18.3) [256].
- (2.43) — Number of placeholders (24.14.12.4) [10].

Annex C (informative)

Compatibility

[diff]

C.1 C++ and ISO C

[diff.iso]

- ¹ This subclause lists the differences between C++ and ISO C, by the chapters of this document.

C.1.1 Clause 5: lexical conventions

[diff.lex]

- ¹ **Affected subclause:** 5.11

Change: New Keywords

New keywords are added to C++; see 5.11.

Rationale: These keywords were added in order to implement the new semantics of C++.

Effect on original feature: Change to semantics of well-defined feature. Any ISO C programs that used any of these keywords as identifiers are not valid C++ programs.

Difficulty of converting: Syntactic transformation. Converting one specific program is easy. Converting a large collection of related programs takes more work.

How widely used: Common.

- ² **Affected subclause:** 5.13.3

Change: Type of character literal is changed from `int` to `char`.

Rationale: This is needed for improved overloaded function argument type matching. For example:

```
int function( int i );
int function( char c );

function( 'x' );
```

It is preferable that this call match the second version of function rather than the first.

Effect on original feature: Change to semantics of well-defined feature. ISO C programs which depend on

```
sizeof('x') == sizeof(int)
```

will not work the same as C++ programs.

Difficulty of converting: Simple.

How widely used: Programs which depend upon `sizeof('x')` are probably rare.

- ³ **Affected subclause:** 5.13.5

Change: String literals made `const`.

The type of a string literal is changed from “array of `char`” to “array of `const char`”. The type of a `char16_t` string literal is changed from “array of *some-integer-type*” to “array of `const char16_t`”. The type of a `char32_t` string literal is changed from “array of *some-integer-type*” to “array of `const char32_t`”. The type of a wide string literal is changed from “array of `wchar_t`” to “array of `const wchar_t`”.

Rationale: This avoids calling an inappropriate overloaded function, which might expect to be able to modify its argument.

Effect on original feature: Change to semantics of well-defined feature.

Difficulty of converting: Syntactic transformation. The fix is to add a cast:

```
char* p = "abc";           // valid in C, invalid in C++
void f(char*) {
    char* p = (char*)"abc"; // OK: cast added
    f(p);
    f((char*)"def");       // OK: cast added
}
```

How widely used: Programs that have a legitimate reason to treat string literals as pointers to potentially modifiable memory are probably rare.

C.1.2 Clause 6: basic concepts

[diff.basic]

¹ **Affected subclause: 6.1****Change:** C++ does not have “tentative definitions” as in C.

E.g., at file scope,

```
int i;
int i;
```

is valid in C, invalid in C++. This makes it impossible to define mutually referential file-local static objects, if initializers are restricted to the syntactic forms of C. For example,

```
struct X { int i; struct X* next; };

static struct X a;
static struct X b = { 0, &a };
static struct X a = { 1, &b };
```

Rationale: This avoids having different initialization rules for fundamental types and user-defined types.**Effect on original feature:** Deletion of semantically well-defined feature.**Difficulty of converting:** Semantic transformation. In C++, the initializer for one of a set of mutually-referential file-local static objects must invoke a function call to achieve the initialization.**How widely used:** Seldom.² **Affected subclause: 6.3****Change:** A `struct` is a scope in C++, not in C.**Rationale:** Class scope is crucial to C++, and a `struct` is a class.**Effect on original feature:** Change to semantics of well-defined feature.**Difficulty of converting:** Semantic transformation.**How widely used:** C programs use `struct` extremely frequently, but the change is only noticeable when `struct`, enumeration, or enumerator names are referred to outside the `struct`. The latter is probably rare.³ **Affected subclause: 6.5 [also 10.1.7]****Change:** A name of file scope that is explicitly declared `const`, and not explicitly declared `extern`, has internal linkage, while in C it would have external linkage.**Rationale:** Because `const` objects may be used as values during translation in C++, this feature urges programmers to provide an explicit initializer for each `const` object. This feature allows the user to put `const` objects in source files that are included in more than one translation unit.**Effect on original feature:** Change to semantics of well-defined feature.**Difficulty of converting:** Semantic transformation.**How widely used:** Seldom.⁴ **Affected subclause: 6.8.3.1****Change:** The `main` function cannot be called recursively and cannot have its address taken.**Rationale:** The `main` function may require special actions.**Effect on original feature:** Deletion of semantically well-defined feature.**Difficulty of converting:** Trivial: create an intermediary function such as `mymain(argc, argv)`.**How widely used:** Seldom.⁵ **Affected subclause: 6.7****Change:** C allows “compatible types” in several places, C++ does not.For example, otherwise-identical `struct` types with different tag names are “compatible” in C but are distinctly different types in C++.**Rationale:** Stricter type checking is essential for C++.**Effect on original feature:** Deletion of semantically well-defined feature.**Difficulty of converting:** Semantic transformation. The “typesafe linkage” mechanism will find many, but not all, of such problems. Those problems not found by typesafe linkage will continue to function properly, according to the “layout compatibility rules” of this document.**How widely used:** Common.**C.1.3 Clause 7: standard conversions**

[diff.conv]

¹ **Affected subclause: 7.11****Change:** Converting `void*` to a pointer-to-object type requires casting.

```
char a[10];
```

```
void* b=a;
void foo() {
    char* c=b;
}
```

ISO C will accept this usage of pointer to void being assigned to a pointer to object type. C++ will not.

Rationale: C++ tries harder than C to enforce compile-time type safety.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Could be automated. Violations will be diagnosed by the C++ translator. The fix is to add a cast. For example:

```
char* c = (char*) b;
```

How widely used: This is fairly widely used but it is good programming practice to add the cast when assigning pointer-to-void to pointer-to-object. Some ISO C translators will give a warning if the cast is not used.

C.1.4 Clause 8: expressions

[diff.expr]

1 Affected subclause: 8.5.1.2

Change: Implicit declaration of functions is not allowed.

Rationale: The type-safe nature of C++.

Effect on original feature: Deletion of semantically well-defined feature. Note: the original feature was labeled as “obsolescent” in ISO C.

Difficulty of converting: Syntactic transformation. Facilities for producing explicit function declarations are fairly widespread commercially.

How widely used: Common.

2 Affected subclauses: 8.5.1.6, 8.5.2.2

Change: Decrement operator is not allowed with `bool` operand.

Rationale: Feature with surprising semantics.

Effect on original feature: A valid ISO C expression utilizing the decrement operator on a `bool` lvalue (for instance, via the C typedef in `<stdbool.h>`) is ill-formed in this International Standard.

3 Affected subclauses: 8.5.2.3, 8.5.3

Change: Types must be defined in declarations, not in expressions.

In C, a `sizeof` expression or cast expression may define a new type. For example,

```
p = (void*)(struct x {int i;} *)0;
```

defines a new type, `struct x`.

Rationale: This prohibition helps to clarify the location of definitions in the source code.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation.

How widely used: Seldom.

4 Affected subclauses: 8.5.16, 8.5.18, 8.5.19

Change: The result of a conditional expression, an assignment expression, or a comma expression may be an lvalue.

Rationale: C++ is an object-oriented language, placing relatively more emphasis on lvalues. For example, function calls may yield lvalues.

Effect on original feature: Change to semantics of well-defined feature. Some C expressions that implicitly rely on lvalue-to-rvalue conversions will yield different results. For example,

```
char arr[100];
sizeof(0, arr)
```

yields 100 in C++ and `sizeof(char*)` in C.

Difficulty of converting: Programs must add explicit casts to the appropriate rvalue.

How widely used: Rare.

C.1.5 Clause 9: statements

[diff.stat]

1 Affected subclauses: 9.4.2, 9.6.4

Change: It is now invalid to jump past a declaration with explicit or implicit initializer (except across entire block not entered).

Rationale: Constructors used in initializers may allocate resources which need to be de-allocated upon leaving the block. Allowing jump past initializers would require complicated runtime determination of allocation. Furthermore, any use of the uninitialized object could be a disaster. With this simple compile-time rule, C++ assures that if an initialized variable is in scope, then it has assuredly been initialized.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation.

How widely used: Seldom.

² **Affected subclause:** 9.6.3

Change: It is now invalid to return (explicitly or implicitly) from a function which is declared to return a value without actually returning a value.

Rationale: The caller and callee may assume fairly elaborate return-value mechanisms for the return of class objects. If some flow paths execute a return without specifying any value, the implementation must embody many more complications. Besides, promising to return a value of a given type, and then not returning such a value, has always been recognized to be a questionable practice, tolerated only because very-old C had no distinction between void functions and int functions.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. Add an appropriate return value to the source code, such as zero.

How widely used: Seldom. For several years, many existing C implementations have produced warnings in this case.

C.1.6 Clause 10: declarations

[diff.dcl]

¹ **Affected subclause:** 10.1.1

Change: In C++, the `static` or `extern` specifiers can only be applied to names of objects or functions. Using these specifiers with type declarations is illegal in C++. In C, these specifiers are ignored when used on type declarations.

Example:

```
static struct S {                // valid C, invalid in C++
    int i;
};
```

Rationale: Storage class specifiers don't have any meaning when associated with a type. In C++, class members can be declared with the `static` storage class specifier. Allowing storage class specifiers on type declarations could render the code confusing for users.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation.

How widely used: Seldom.

² **Affected subclause:** 10.1.1

Change: In C++, `register` is not a storage class specifier.

Rationale: The storage class specifier had no effect in C++.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation.

How widely used: Common.

³ **Affected subclause:** 10.1.3

Change: A C++ typedef name must be different from any class type name declared in the same scope (except if the typedef is a synonym of the class name with the same name). In C, a typedef name and a struct tag name declared in the same scope can have the same name (because they have different name spaces).

Example:

```
typedef struct name1 { /* ... */ } name1;        // valid C and C++
struct name { /* ... */ };
typedef int name;                               // valid C, invalid C++
```

Rationale: For ease of use, C++ doesn't require that a type name be prefixed with the keywords `class`, `struct` or `union` when used in object declarations or type casts.

Example:

```
class name { /* ... */ };
name i;           // i has type class name
```

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. One of the 2 types has to be renamed.

How widely used: Seldom.

4 **Affected subclause:** 10.1.7 [see also 6.5]

Change: `const` objects must be initialized in C++ but can be left uninitialized in C.

Rationale: A `const` object cannot be assigned to so it must be initialized to hold a useful value.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation.

How widely used: Seldom.

5 **Affected subclause:** 10.1.7

Change: Banning implicit `int`.

In C++ a *decl-specifier-seq* must contain a *type-specifier*, unless it is followed by a declarator for a constructor, a destructor, or a conversion function. In the following example, the left-hand column presents valid C; the right-hand column presents equivalent C++ :

```
void f(const parm);           void f(const int parm);
const n = 3;                  const int n = 3;
main()                         int main()
/* ... */                      /* ... */
```

Rationale: In C++, implicit `int` creates several opportunities for ambiguity between expressions involving function-like casts and declarations. Explicit declaration is increasingly considered to be proper style. Liaison with WG14 (C) indicated support for (at least) deprecating implicit `int` in the next revision of C.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation. Could be automated.

How widely used: Common.

6 **Affected subclause:** 10.1.7.4

Change: The keyword `auto` cannot be used as a storage class specifier.

```
void f() {
    auto int x;    // valid C, invalid C++
}
```

Rationale: Allowing the use of `auto` to deduce the type of a variable from its initializer results in undesired interpretations of `auto` as a storage class specifier in certain contexts.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation.

How widely used: Rare.

7 **Affected subclause:** 10.2

Change: C++ objects of enumeration type can only be assigned values of the same enumeration type. In C, objects of enumeration type can be assigned values of any integral type.

Example:

```
enum color { red, blue, green };
enum color c = 1;           // valid C, invalid C++
```

Rationale: The type-safe nature of C++.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation. (The type error produced by the assignment can be automatically corrected by applying an explicit cast.)

How widely used: Common.

8 **Affected subclause:** 10.2

Change: In C++, the type of an enumerator is its enumeration. In C, the type of an enumerator is `int`.

Example:

```
enum e { A };
sizeof(A) == sizeof(int)      // in C
sizeof(A) == sizeof(e)       // in C++
/* and sizeof(int) is not necessarily equal to sizeof(e) */
```

Rationale: In C++, an enumeration is a distinct type.

Effect on original feature: Change to semantics of well-defined feature.

Difficulty of converting: Semantic transformation.

How widely used: Seldom. The only time this affects existing C code is when the size of an enumerator is taken. Taking the size of an enumerator is not a common C coding practice.

C.1.7 Clause 11: declarators

[diff.decl]

¹ Affected subclause: 11.3.5

Change: In C++, a function declared with an empty parameter list takes no arguments. In C, an empty parameter list means that the number and type of the function arguments are unknown.

Example:

```
int f();           // means int f(void) in C++
                  // int f( unknown ) in C
```

Rationale: This is to avoid erroneous function calls (i.e., function calls with the wrong number or type of arguments).

Effect on original feature: Change to semantics of well-defined feature. This feature was marked as “obsolescent” in C.

Difficulty of converting: Syntactic transformation. The function declarations using C incomplete declaration style must be completed to become full prototype declarations. A program may need to be updated further if different calls to the same (non-prototype) function have different numbers of arguments or if the type of corresponding arguments differed.

How widely used: Common.

² Affected subclause: 11.3.5 [see 8.5.2.3]

Change: In C++, types may not be defined in return or parameter types. In C, these type definitions are allowed.

Example:

```
void f( struct S { int a; } arg ) {} // valid C, invalid C++
enum E { A, B, C } f() {}          // valid C, invalid C++
```

Rationale: When comparing types in different translation units, C++ relies on name equivalence when C relies on structural equivalence. Regarding parameter types: since the type defined in a parameter list would be in the scope of the function, the only legal calls in C++ would be from within the function itself.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. The type definitions must be moved to file scope, or in header files.

How widely used: Seldom. This style of type definition is seen as poor coding style.

³ Affected subclause: 11.4

Change: In C++, the syntax for function definition excludes the “old-style” C function. In C, “old-style” syntax is allowed, but deprecated as “obsolescent”.

Rationale: Prototypes are essential to type safety.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Syntactic transformation.

How widely used: Common in old programs, but already known to be obsolescent.

⁴ Affected subclause: 11.6.1

Change: In C++, designated initialization support is restricted compared to the corresponding functionality in C. In C++, designators for non-static data members must be specified in declaration order, designators for array elements and nested designators are not supported, and designated and non-designated initializers cannot be mixed in the same initializer list.

Example:

```

struct A { int x, y; };
struct B { struct A a; };
struct A a = {.y = 1, .x = 2}; // valid C, invalid C++
int arr[3] = {[1] = 5}; // valid C, invalid C++
struct B b = {.a.x = 0}; // valid C, invalid C++
struct A c = {.x = 1, 2}; // valid C, invalid C++

```

Rationale: In C++, members are destroyed in reverse construction order and the elements of an initializer list are evaluated in lexical order, so field initializers must be specified in order. Array designators conflict with *lambda-expression* syntax. Nested designators are seldom used.

Effect on original feature: Deletion of feature that is incompatible with C++.

Difficulty of converting: Syntactic transformation.

How widely used: Out-of-order initializers are common. The other features are seldom used.

⁵ **Affected subclause:** 11.6.2

Change: In C++, when initializing an array of character with a string, the number of characters in the string (including the terminating '\0') must not exceed the number of elements in the array. In C, an array can be initialized with a string even if the array is not large enough to contain the string-terminating '\0'.

Example:

```
char array[4] = "abcd"; // valid C, invalid C++
```

Rationale: When these non-terminated arrays are manipulated by standard string functions, there is potential for major catastrophe.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. The arrays must be declared one element bigger to contain the string terminating '\0'.

How widely used: Seldom. This style of array initialization is seen as poor coding style.

C.1.8 Clause 12: classes

[diff.class]

¹ **Affected subclause:** 12.1 [see also 10.1.3]

Change: In C++, a class declaration introduces the class name into the scope where it is declared and hides any object, function or other declaration of that name in an enclosing scope. In C, an inner scope declaration of a struct tag name never hides the name of an object or function in an outer scope.

Example:

```

int x[99];
void f() {
    struct x { int a; };
    sizeof(x); /* size of the array in C */
    /* size of the struct in C++ */
}

```

Rationale: This is one of the few incompatibilities between C and C++ that can be attributed to the new C++ name space definition where a name can be declared as a type and as a non-type in a single scope causing the non-type name to hide the type name and requiring that the keywords **class**, **struct**, **union** or **enum** be used to refer to the type name. This new name space definition provides important notational conveniences to C++ programmers and helps making the use of the user-defined types as similar as possible to the use of fundamental types. The advantages of the new name space definition were judged to outweigh by far the incompatibility with C described above.

Effect on original feature: Change to semantics of well-defined feature.

Difficulty of converting: Semantic transformation. If the hidden name that needs to be accessed is at global scope, the :: C++ operator can be used. If the hidden name is at block scope, either the type or the struct tag has to be renamed.

How widely used: Seldom.

² **Affected subclause:** 12.2.4

Change: Bit-fields of type plain **int** are signed.

Rationale: Leaving the choice of signedness to implementations could lead to inconsistent definitions of template specializations. For consistency, the implementation freedom was eliminated for non-dependent

types, too.

Effect on original feature: The choice is implementation-defined in C, but not so in C++.

Difficulty of converting: Syntactic transformation.

How widely used: Seldom.

³ **Affected subclause:** 12.2.5

Change: In C++, the name of a nested class is local to its enclosing class. In C the name of the nested class belongs to the same scope as the name of the outermost enclosing class.

Example:

```
struct X {
    struct Y { /* ... */ } y;
};
struct Y yy;                // valid C, invalid C++
```

Rationale: C++ classes have member functions which require that classes establish scopes. The C rule would leave classes as an incomplete scope mechanism which would prevent C++ programmers from maintaining locality within a class. A coherent set of scope rules for C++ based on the C rule would be very complicated and C++ programmers would be unable to predict reliably the meanings of nontrivial examples involving nested or local functions.

Effect on original feature: Change to semantics of well-defined feature.

Difficulty of converting: Semantic transformation. To make the struct type name visible in the scope of the enclosing struct, the struct tag could be declared in the scope of the enclosing struct, before the enclosing struct is defined. Example:

```
struct Y;                    // struct Y and struct X are at the same scope
struct X {
    struct Y { /* ... */ } y;
};
```

All the definitions of C struct types enclosed in other struct definitions and accessed outside the scope of the enclosing struct could be exported to the scope of the enclosing struct. Note: this is a consequence of the difference in scope rules, which is documented in 6.3.

How widely used: Seldom.

⁴ **Affected subclause:** 12.2.6

Change: In C++, a typedef name may not be redeclared in a class definition after being used in that definition.

Example:

```
typedef int I;
struct S {
    I i;
    int I;                // valid C, invalid C++
};
```

Rationale: When classes become complicated, allowing such a redefinition after the type has been used can create confusion for C++ programmers as to what the meaning of I really is.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. Either the type or the struct member has to be renamed.

How widely used: Seldom.

C.1.9 Clause 15: special member functions

[diff.special]

¹ **Affected subclause:** 15.8

Change: Copying volatile objects.

The implicitly-declared copy constructor and implicitly-declared copy assignment operator cannot make a copy of a volatile lvalue. For example, the following is valid in ISO C:

```
struct X { int i; };
volatile struct X x1 = {0};
struct X x2 = x1;          // invalid C++
struct X x3;
```

```
x3 = x1;           // also invalid C++
```

Rationale: Several alternatives were debated at length. Changing the parameter to `volatile const X&` would greatly complicate the generation of efficient code for class objects. Discussion of providing two alternative signatures for these implicitly-defined operations raised unanswered concerns about creating ambiguities and complicating the rules that specify the formation of these operators according to the bases and members.

Effect on original feature: Deletion of semantically well-defined feature.

Difficulty of converting: Semantic transformation. If volatile semantics are required for the copy, a user-declared constructor or assignment must be provided. If non-volatile semantics are required, an explicit `const_cast` can be used.

How widely used: Seldom.

C.1.10 Clause 19: preprocessing directives [diff.cpp]

¹ Affected subclause: 19.8

Change: Whether `__STDC__` is defined and if so, what its value is, are implementation-defined.

Rationale: C++ is not identical to ISO C. Mandating that `__STDC__` be defined would require that translators make an incorrect claim. Each implementation must choose the behavior that will be most useful to its marketplace.

Effect on original feature: Change to semantics of well-defined feature.

Difficulty of converting: Semantic transformation.

How widely used: Programs and headers that reference `__STDC__` are quite common.

C.2 C++ and ISO C++ 2003 [diff.cpp03]

¹ This subclause lists the differences between C++ and ISO C++ 2003 (ISO/IEC 14882:2003, *Programming Languages — C++*), by the chapters of this document.

C.2.1 Clause 5: lexical conventions [diff.cpp03.lex]

¹ Affected subclause: 5.4

Change: New kinds of string literals.

Rationale: Required for new features.

Effect on original feature: Valid C++ 2003 code may fail to compile or produce different results in this International Standard. Specifically, macros named `R`, `u8`, `u8R`, `u`, `uR`, `U`, `UR`, or `LR` will not be expanded when adjacent to a string literal but will be interpreted as part of the string literal. For example:

```
#define u8 "abc"
const char* s = u8"def";           // Previously "abcdef", now "def"
```

² Affected subclause: 5.4

Change: User-defined literal string support.

Rationale: Required for new features.

Effect on original feature: Valid C++ 2003 code may fail to compile or produce different results in this International Standard. For example:

```
#define _x "there"
"hello"_x           // #1
```

Previously, `#1` would have consisted of two separate preprocessing tokens and the macro `_x` would have been expanded. In this International Standard, `#1` consists of a single preprocessing token, so the macro is not expanded.

³ Affected subclause: 5.11

Change: New keywords.

Rationale: Required for new features.

Effect on original feature: Added to Table 5, the following identifiers are new keywords: `alignas`, `alignof`, `char16_t`, `char32_t`, `constexpr`, `decltype`, `noexcept`, `nullptr`, `static_assert`, and `thread_local`. Valid C++ 2003 code using these identifiers is invalid in this International Standard.

⁴ Affected subclause: 5.13.2

Change: Type of integer literals.

Rationale: C99 compatibility.

Effect on original feature: Certain integer literals larger than can be represented by `long` could change from an unsigned integer type to `signed long long`.

C.2.2 Clause 7: standard conversions [diff.cpp03.conv]

¹ **Affected subclause:** 7.11

Change: Only literals are integer null pointer constants.

Rationale: Removing surprising interactions with templates and constant expressions.

Effect on original feature: Valid C++ 2003 code may fail to compile or produce different results in this International Standard. For example:

```
void f(void *); // #1
void f(...); // #2
template<int N> void g() {
    f(0*N); // calls #2; used to call #1
}
```

C.2.3 Clause 8: expressions [diff.cpp03.expr]

¹ **Affected subclause:** 8.5.5

Change: Specify rounding for results of integer `/` and `%`.

Rationale: Increase portability, C99 compatibility.

Effect on original feature: Valid C++ 2003 code that uses integer division rounds the result toward 0 or toward negative infinity, whereas this International Standard always rounds the result toward 0.

² **Affected subclause:** 8.5.14

Change: `&&` is valid in a *type-name*.

Rationale: Required for new features.

Effect on original feature: Valid C++ 2003 code may fail to compile or produce different results in this International Standard. For example:

```
bool b1 = new int && false; // previously false, now ill-formed
struct S { operator int(); };
bool b2 = &S::operator int && false; // previously false, now ill-formed
```

C.2.4 Clause 10: declarations [diff.cpp03.dcl.dcl]

¹ **Affected subclause:** 10.1

Change: Remove `auto` as a storage class specifier.

Rationale: New feature.

Effect on original feature: Valid C++ 2003 code that uses the keyword `auto` as a storage class specifier may be invalid in this International Standard. In this International Standard, `auto` indicates that the type of a variable is to be deduced from its initializer expression.

C.2.5 Clause 11: declarators [diff.cpp03.dcl.decl]

¹ **Affected subclause:** 11.6.4

Change: Narrowing restrictions in aggregate initializers.

Rationale: Catches bugs.

Effect on original feature: Valid C++ 2003 code may fail to compile in this International Standard. For example, the following code is valid in C++ 2003 but invalid in this International Standard because `double` to `int` is a narrowing conversion:

```
int x[] = { 2.0 };
```

C.2.6 Clause 15: special member functions [diff.cpp03.special]

¹ **Affected subclauses:** 15.1, 15.4, 15.8

Change: Implicitly-declared special member functions are defined as deleted when the implicit definition would have been ill-formed.

Rationale: Improves template argument deduction failure.

Effect on original feature: A valid C++ 2003 program that uses one of these special member functions in a context where the definition is not required (e.g., in an expression that is not potentially evaluated) becomes ill-formed.

² **Affected subclause:** 15.4

Change: User-declared destructors have an implicit exception specification.

Rationale: Clarification of destructor requirements.

Effect on original feature: Valid C++ 2003 code may execute differently in this International Standard. In particular, destructors that throw exceptions will call `std::terminate` (without calling `std::unexpected`) if their exception specification is non-throwing.

C.2.7 Clause 17: templates

[diff.cpp03.temp]

1 **Affected subclause:** 17.1

Change: Remove `export`.

Rationale: No implementation consensus.

Effect on original feature: A valid C++ 2003 declaration containing `export` is ill-formed in this International Standard.

2 **Affected subclause:** 17.3

Change: Remove whitespace requirement for nested closing template right angle brackets.

Rationale: Considered a persistent but minor annoyance. Template aliases representing non-class types would exacerbate whitespace issues.

Effect on original feature: Change to semantics of well-defined expression. A valid C++ 2003 expression containing a right angle bracket (“>”) followed immediately by another right angle bracket may now be treated as closing two templates. For example, the following code is valid in C++ 2003 because “>>” is a right-shift operator, but invalid in this International Standard because “>>” closes two templates.

```
template <class T> struct X { };
template <int N> struct Y { };
X< Y< 1 >> 2 > > x;
```

3 **Affected subclause:** 17.7.4.2

Change: Allow dependent calls of functions with internal linkage.

Rationale: Overly constrained, simplify overload resolution rules.

Effect on original feature: A valid C++ 2003 program could get a different result than this International Standard.

C.2.8 Clause 20: library introduction

[diff.cpp03.library]

1 **Affected:** Clause 20 – Clause 34

Change: New reserved identifiers.

Rationale: Required by new features.

Effect on original feature: Valid C++ 2003 code that uses any identifiers added to the C++ standard library by this International Standard may fail to compile or produce different results in this International Standard. A comprehensive list of identifiers used by the C++ standard library can be found in the Index of Library Names in this International Standard.

2 **Affected subclause:** 20.5.1.2

Change: New headers.

Rationale: New functionality.

Effect on original feature: The following C++ headers are new: `<array>`, `<atomic>`, `<chrono>`, `<codecvt>`, `<condition_variable>`, `<forward_list>`, `<future>`, `<initializer_list>`, `<mutex>`, `<random>`, `<ratio>`, `<regex>`, `<scoped_allocator>`, `<system_error>`, `<thread>`, `<tuple>`, `<typeindex>`, `<type_traits>`, `<unordered_map>`, and `<unordered_set>`. In addition the following C compatibility headers are new: `<cfenv>`, `< cinttypes>`, `< cstdint>`, and `< cuchar>`. Valid C++ 2003 code that `#includes` headers with these names may be invalid in this International Standard.

3 **Affected subclause:** 20.5.3.2

Effect on original feature: Function `swap` moved to a different header

Rationale: Remove dependency on `<algorithm>` for `swap`.

Effect on original feature: Valid C++ 2003 code that has been compiled expecting `swap` to be in `<algorithm>` may have to instead include `<utility>`.

4 **Affected subclause:** 20.5.4.2.2

Change: New reserved namespace.

Rationale: New functionality.

Effect on original feature: The global namespace `posix` is now reserved for standardization. Valid C++ 2003 code that uses a top-level namespace `posix` may be invalid in this International Standard.

⁵ **Affected subclause:** [20.5.5.3](#)

Change: Additional restrictions on macro names.

Rationale: Avoid hard to diagnose or non-portable constructs.

Effect on original feature: Names of attribute identifiers may not be used as macro names. Valid C++ 2003 code that defines `override`, `final`, `carries_dependency`, or `noreturn` as macros is invalid in this International Standard.

C.2.9 [Clause 21: language support library](#) [diff.cpp03.language.support]

¹ **Affected subclause:** [21.6.2.1](#)

Change: `operator new` may throw exceptions other than `std::bad_alloc`.

Rationale: Consistent application of `noexcept`.

Effect on original feature: Valid C++ 2003 code that assumes that global `operator new` only throws `std::bad_alloc` may execute differently in this International Standard. Valid C++ 2003 code that replaces the global replaceable `operator new` is ill-formed in this International Standard, because the exception specification of `throw(std::bad_alloc)` was removed.

C.2.10 [Clause 23: diagnostics library](#) [diff.cpp03.diagnostics]

¹ **Affected subclause:** [23.4](#)

Change: Thread-local error numbers.

Rationale: Support for new thread facilities.

Effect on original feature: Valid but implementation-specific C++ 2003 code that relies on `errno` being the same across threads may change behavior in this International Standard.

C.2.11 [Clause 24: general utilities library](#) [diff.cpp03.utilities]

¹ **Affected subclause:** [24.10.5](#)

Change: Minimal support for garbage-collected regions.

Rationale: Required by new feature.

Effect on original feature: Valid C++ 2003 code, compiled without traceable pointer support, that interacts with newer C++ code using regions declared reachable may have different runtime behavior.

² **Affected subclauses:** [24.14.5](#), [24.14.6](#), [24.14.7](#), [24.14.8](#), [24.14.9](#)

Change: Standard function object types no longer derived from `std::unary_function` or `std::binary_function`.

Rationale: Superseded by new feature; `unary_function` and `binary_function` are no longer defined.

Effect on original feature: Valid C++ 2003 code that depends on function object types being derived from `unary_function` or `binary_function` may fail to compile in this International Standard.

C.2.12 [Clause 25: strings library](#) [diff.cpp03.strings]

¹ **Affected subclause:** [25.3](#)

Change: `basic_string` requirements no longer allow reference-counted strings.

Rationale: Invalidation is subtly different with reference-counted strings. This change regularizes behavior for this International Standard.

Effect on original feature: Valid C++ 2003 code may execute differently in this International Standard.

² **Affected subclause:** [25.3.2.1](#)

Change: Loosen `basic_string` invalidation rules.

Rationale: Allow small-string optimization.

Effect on original feature: Valid C++ 2003 code may execute differently in this International Standard. Some `const` member functions, such as `data` and `c_str`, no longer invalidate iterators.

C.2.13 [Clause 27: containers library](#) [diff.cpp03.containers]

¹ **Affected subclause:** [27.2](#)

Change: Complexity of `size()` member functions now constant.

Rationale: Lack of specification of complexity of `size()` resulted in divergent implementations with inconsistent performance characteristics.

Effect on original feature: Some container implementations that conform to C++ 2003 may not conform to the specified `size()` requirements in this International Standard. Adjusting containers such as `std::list` to the stricter requirements may require incompatible changes.

2 **Affected subclause:** 27.2

Change: Requirements change: relaxation.

Rationale: Clarification.

Effect on original feature: Valid C++ 2003 code that attempts to meet the specified container requirements may now be over-specified. Code that attempted to be portable across containers may need to be adjusted as follows:

- (2.1) — not all containers provide `size()`; use `empty()` instead of `size() == 0`;
- (2.2) — not all containers are empty after construction (`array`);
- (2.3) — not all containers have constant complexity for `swap()` (`array`).

3 **Affected subclause:** 27.2

Change: Requirements change: default constructible.

Rationale: Clarification of container requirements.

Effect on original feature: Valid C++ 2003 code that attempts to explicitly instantiate a container using a user-defined type with no default constructor may fail to compile.

4 **Affected subclauses:** 27.2.3, 27.2.6

Change: Signature changes: from `void` return types.

Rationale: Old signature threw away useful information that may be expensive to recalculate.

Effect on original feature: The following member functions have changed:

- (4.1) — `erase(iter)` for `set`, `multiset`, `map`, `multimap`
- (4.2) — `erase(begin, end)` for `set`, `multiset`, `map`, `multimap`
- (4.3) — `insert(pos, num, val)` for `vector`, `deque`, `list`, `forward_list`
- (4.4) — `insert(pos, beg, end)` for `vector`, `deque`, `list`, `forward_list`

Valid C++ 2003 code that relies on these functions returning `void` (e.g., code that creates a pointer to member function that points to one of these functions) will fail to compile with this International Standard.

5 **Affected subclauses:** 27.2.3, 27.2.6

Change: Signature changes: from `iterator` to `const_iterator` parameters.

Rationale: Overspecification.

Effect on original feature: The signatures of the following member functions changed from taking an `iterator` to taking a `const_iterator`:

- (5.1) — `insert(iter, val)` for `vector`, `deque`, `list`, `set`, `multiset`, `map`, `multimap`
- (5.2) — `insert(pos, beg, end)` for `vector`, `deque`, `list`, `forward_list`
- (5.3) — `erase(begin, end)` for `set`, `multiset`, `map`, `multimap`
- (5.4) — all forms of `list::splice`
- (5.5) — all forms of `list::merge`

Valid C++ 2003 code that uses these functions may fail to compile with this International Standard.

6 **Affected subclauses:** 27.2.3, 27.2.6

Change: Signature changes: `resize`.

Rationale: Performance, compatibility with move semantics.

Effect on original feature: For `vector`, `deque`, and `list` the fill value passed to `resize` is now passed by reference instead of by value, and an additional overload of `resize` has been added. Valid C++ 2003 code that uses this function may fail to compile with this International Standard.

C.2.14 **Clause 29:** algorithms library

[diff.cpp03.algorithms]

1 **Affected subclause:** 29.1

Change: Result state of inputs after application of some algorithms.

Rationale: Required by new feature.

Effect on original feature: A valid C++ 2003 program may detect that an object with a valid but unspecified state has a different valid but unspecified state with this International Standard. For example, `std::remove` and `std::remove_if` may leave the tail of the input sequence with a different set of values than previously.

C.2.15 Clause 30: numerics library [diff.cpp03.numerics]¹ **Affected subclause: 30.5****Change:** Specified representation of complex numbers.**Rationale:** Compatibility with C99.**Effect on original feature:** Valid C++ 2003 code that uses implementation-specific knowledge about the binary representation of the required template specializations of `std::complex` may not be compatible with this International Standard.**C.2.16 Clause 31: input/output library** [diff.cpp03.input.output]¹ **Affected subclauses: 31.7.4.1.3, 31.7.5.1.3, 31.5.5.4****Change:** Specify use of `explicit` in existing boolean conversion functions.**Rationale:** Clarify intentions, avoid workarounds.**Effect on original feature:** Valid C++ 2003 code that relies on implicit boolean conversions will fail to compile with this International Standard. Such conversions occur in the following conditions:

- (1.1) — passing a value to a function that takes an argument of type `bool`;
- (1.2) — using `operator==` to compare to `false` or `true`;
- (1.3) — returning a value from a function with a return type of `bool`;
- (1.4) — initializing members of type `bool` via aggregate initialization;
- (1.5) — initializing a `const bool&` which would bind to a temporary object.

² **Affected subclause: 31.5.3.1.1****Change:** Change base class of `std::ios_base::failure`.**Rationale:** More detailed error messages.**Effect on original feature:** `std::ios_base::failure` is no longer derived directly from `std::exception`, but is now derived from `std::system_error`, which in turn is derived from `std::runtime_error`. Valid C++ 2003 code that assumes that `std::ios_base::failure` is derived directly from `std::exception` may execute differently in this International Standard.³ **Affected subclause: 31.5.3****Change:** Flag types in `std::ios_base` are now bitmasks with values defined as `constexpr` static members.**Rationale:** Required for new features.**Effect on original feature:** Valid C++ 2003 code that relies on `std::ios_base` flag types being represented as `std::bitset` or as an integer type may fail to compile with this International Standard. For example:

```
#include <iostream>

int main() {
    int flag = std::ios_base::hex;
    std::cout.setf(flag);          // error: setf does not take argument of type int
}
```

C.3 C++ and ISO C++ 2011 [diff.cpp11]¹ This subclause lists the differences between C++ and ISO C++ 2011 (ISO/IEC 14882:2011, *Programming Languages — C++*), by the chapters of this document.**C.3.1 Clause 5: lexical conventions** [diff.cpp11.lex]¹ **Affected subclause: 5.9****Change:** *pp-number* can contain one or more single quotes.**Rationale:** Necessary to enable single quotes as digit separators.**Effect on original feature:** Valid C++ 2011 code may fail to compile or may change meaning in this International Standard. For example, the following code is valid both in C++ 2011 and in this International Standard, but the macro invocation produces different outcomes because the single quotes delimit a character literal in C++ 2011, whereas they are digit separators in this International Standard:

```
#define M(x, ...) __VA_ARGS__
int x[2] = { M(1'2,3'4, 5) };
// int x[2] = { 5 };          — C++ 2011
// int x[2] = { 3'4, 5 };    — this International Standard
```

C.3.2 Clause 6: basic concepts

[diff.cpp11.basic]

¹ **Affected subclause: 6.6.4.4.2****Change:** New usual (non-placement) deallocator.**Rationale:** Required for sized deallocation.**Effect on original feature:** Valid C++ 2011 code could declare a global placement allocation function and deallocation function as follows:

```
void* operator new(std::size_t, std::size_t);
void operator delete(void*, std::size_t) noexcept;
```

In this International Standard, however, the declaration of `operator delete` might match a predefined usual (non-placement) `operator delete` (6.6.4.4). If so, the program is ill-formed, as it was for class member allocation functions and deallocation functions (8.5.2.4).

C.3.3 Clause 8: expressions

[diff.cpp11.expr]

¹ **Affected subclause: 8.5.16****Change:** A conditional expression with a throw expression as its second or third operand keeps the type and value category of the other operand.**Rationale:** Formerly mandated conversions (lvalue-to-rvalue (7.1), array-to-pointer (7.2), and function-to-pointer (7.3) standard conversions), especially the creation of the temporary due to lvalue-to-rvalue conversion, were considered gratuitous and surprising.**Effect on original feature:** Valid C++ 2011 code that relies on the conversions may behave differently in this International Standard:

```
struct S {
    int x = 1;
    void mf() { x = 2; }
};
int f(bool cond) {
    S s;
    (cond ? s : throw 0).mf();
    return s.x;
}
```

In C++ 2011, `f(true)` returns 1. In this International Standard, it returns 2.

```
sizeof(true ? "" : throw 0)
```

In C++ 2011, the expression yields `sizeof(const char*)`. In this International Standard, it yields `sizeof(const char[1])`.

C.3.4 Clause 10: declarations

[diff.cpp11.dcl.dcl]

¹ **Affected subclause: 10.1.5****Change:** `constexpr` non-static member functions are not implicitly `const` member functions.**Rationale:** Necessary to allow `constexpr` member functions to mutate the object.**Effect on original feature:** Valid C++ 2011 code may fail to compile in this International Standard. For example, the following code is valid in C++ 2011 but invalid in this International Standard because it declares the same member function twice with different return types:

```
struct S {
    constexpr const int &f();
    int &f();
};
```

C.3.5 Clause 11: declarators

[diff.cpp11.dcl.decl]

¹ **Affected subclause: 11.6.1****Change:** Classes with default member initializers can be aggregates.**Rationale:** Necessary to allow default member initializers to be used by aggregate initialization.**Effect on original feature:** Valid C++ 2011 code may fail to compile or may change meaning in this International Standard. For example:

```
struct S { // Aggregate in C++ 2014 onwards.
    int m = 1;
};
```

```

struct X {
    operator int();
    operator S();
};
X a{};
S b{a}; // uses copy constructor in C++ 2011,
        // performs aggregate initialization in this International Standard

```

C.3.6 Clause 20: library introduction [diff.cpp11.library]

¹ Affected subclause: 20.5.1.2

Change: New header.

Rationale: New functionality.

Effect on original feature: The C++ header `<shared_mutex>` is new. Valid C++ 2011 code that `#includes` a header with that name may be invalid in this International Standard.

C.3.7 Clause 31: input/output library [diff.cpp11.input.output]

¹ Affected subclause: 31.12

Change: `gets` is not defined.

Rationale: Use of `gets` is considered dangerous.

Effect on original feature: Valid C++ 2011 code that uses the `gets` function may fail to compile in this International Standard.

C.4 C++ and ISO C++ 2014 [diff.cpp14]

¹ This subclause lists the differences between C++ and ISO C++ 2014 (ISO/IEC 14882:2014, *Programming Languages — C++*), by the chapters of this document.

C.4.1 Clause 5: lexical conventions [diff.cpp14.lex]

¹ Affected subclause: 5.2

Change: Removal of trigraph support as a required feature.

Rationale: Prevents accidental uses of trigraphs in non-raw string literals and comments.

Effect on original feature: Valid C++ 2014 code that uses trigraphs may not be valid or may have different semantics in this International Standard. Implementations may choose to translate trigraphs as specified in C++ 2014 if they appear outside of a raw string literal, as part of the implementation-defined mapping from physical source file characters to the basic source character set.

² Affected subclause: 5.9

Change: *pp-number* can contain *p sign* and *P sign*.

Rationale: Necessary to enable hexadecimal floating literals.

Effect on original feature: Valid C++ 2014 code may fail to compile or produce different results in this International Standard. Specifically, character sequences like `0p+0` and `0e1_p+0` are three separate tokens each in C++ 2014, but one single token in this International Standard. For example:

```

#define F(a) b ## a
int b0p = F(0p+0); // ill-formed; equivalent to "int b0p = b0p + 0;" in C++ 2014

```

C.4.2 Clause 8: expressions [diff.cpp14.expr]

¹ Affected subclauses: 8.5.1.6, 8.5.2.2

Change: Remove increment operator with `bool` operand.

Rationale: Obsolete feature with occasionally surprising semantics.

Effect on original feature: A valid C++ 2014 expression utilizing the increment operator on a `bool` lvalue is ill-formed in this International Standard. Note that this might occur when the lvalue has a type given by a template parameter.

² Affected subclauses: 8.5.2.4, 8.5.2.5

Change: Dynamic allocation mechanism for over-aligned types.

Rationale: Simplify use of over-aligned types.

Effect on original feature: In C++ 2014 code that uses a *new-expression* to allocate an object with an over-aligned class type, where that class has no allocation functions of its own, `::operator new(std::size_t)` is used to allocate the memory. In this International Standard, `::operator new(std::size_t, std::align_val_t)` is used instead.

C.4.3 Clause 10: declarations [diff.cpp14.dcl.dcl]

¹ Affected subclause: 10.1.1

Change: Removal of `register storage-class-specifier`.

Rationale: Enable repurposing of deprecated keyword in future revisions of this International Standard.

Effect on original feature: A valid C++ 2014 declaration utilizing the `register storage-class-specifier` is ill-formed in this International Standard. The specifier can simply be removed to retain the original meaning.

² Affected subclause: 10.1.7.4

Change: auto deduction from *braced-init-list*.

Rationale: More intuitive deduction behavior.

Effect on original feature: Valid C++ 2014 code may fail to compile or may change meaning in this International Standard. For example:

```
auto x1{1};    // was std::initializer_list<int>, now int
auto x2{1, 2}; // was std::initializer_list<int>, now ill-formed
```

C.4.4 Clause 11: declarators [diff.cpp14.decl]

¹ Affected subclause: 11.3.5

Change: Make exception specifications be part of the type system.

Rationale: Improve type-safety.

Effect on original feature: Valid C++ 2014 code may fail to compile or change meaning in this International Standard. For example:

```
void g1() noexcept;
void g2();
template<class T> int f(T *, T *);
int x = f(g1, g2);    // ill-formed; previously well-formed
```

² Affected subclause: 11.6.1

Change: Definition of an aggregate is extended to apply to user-defined types with base classes.

Rationale: To increase convenience of aggregate initialization.

Effect on original feature: Valid C++ 2014 code may fail to compile or produce different results in this International Standard; initialization from an empty initializer list will perform aggregate initialization instead of invoking a default constructor for the affected types. For example:

```
struct derived;
struct base {
    friend struct derived;
private:
    base();
};
struct derived : base {};

derived d1{};    // error; the code was well-formed in C++ 2014
derived d2;     // still OK
```

C.4.5 Clause 15: special member functions [diff.cpp14.special]

¹ Affected subclause: 15.6.3

Change: Inheriting a constructor no longer injects a constructor into the derived class.

Rationale: Better interaction with other language features.

Effect on original feature: Valid C++ 2014 code that uses inheriting constructors may not be valid or may have different semantics. A *using-declaration* that names a constructor now makes the corresponding base class constructors visible to initializations of the derived class rather than declaring additional derived class constructors.

```
struct A {
    template<typename T> A(T, typename T::type = 0);
    A(int);
};
struct B : A {
    using A::A;
    B(int);
};
B b(42L); // now calls B(int), used to call B<long>(long),
```

```
// which called A(int) due to substitution failure
// in A<long>(long).
```

C.4.6 Clause 17: templates

[diff.cpp14.temp]

¹ Affected subclause: 17.9.2.5

Change: Allowance to deduce from the type of a non-type template argument.

Rationale: In combination with the ability to declare non-type template arguments with placeholder types, allows partial specializations to decompose from the type deduced for the non-type template argument.

Effect on original feature: Valid C++ 2014 code may fail to compile or produce different results in this International Standard. For example:

```
template <int N> struct A;
template <typename T, T N> int foo(A<N> *) = delete;
void foo(void *);
void bar(A<0> *p) {
    foo(p); // ill-formed; previously well-formed
}
```

C.4.7 Clause 18: exception handling

[diff.cpp14.except]

¹ Affected subclause: 18.4

Change: Remove dynamic exception specifications.

Rationale: Dynamic exception specifications were a deprecated feature that was complex and brittle in use. They interacted badly with the type system, which became a more significant issue in this International Standard where (non-dynamic) exception specifications are part of the function type.

Effect on original feature: A valid C++ 2014 function declaration, member function declaration, function pointer declaration, or function reference declaration, if it has a potentially throwing dynamic exception specification, will be rejected as ill-formed in this International Standard. Violating a non-throwing dynamic exception specification will call `terminate` rather than `unexpected` and might not perform stack unwinding prior to such a call.

C.4.8 Clause 20: library introduction

[diff.cpp14.library]

¹ Affected subclause: 20.5.1.2

Change: New headers.

Rationale: New functionality.

Effect on original feature: The following C++ headers are new: `<any>`, `<charconv>`, `<execution>`, `<filesystem>`, `<memory_resource>`, `<optional>`, `<string_view>`, and `<variant>`. Valid C++ 2014 code that `#includes` headers with these names may be invalid in this International Standard.

² Affected subclause: 20.5.4.2.3

Change: New reserved namespaces.

Rationale: Reserve namespaces for future revisions of the standard library that might otherwise be incompatible with existing programs.

Effect on original feature: The global namespaces `std` followed by an arbitrary sequence of digits is reserved for future standardization. Valid C++ 2014 code that uses such a top-level namespace, e.g., `std2`, may be invalid in this International Standard.

C.4.9 Clause 24: general utilities library

[diff.cpp14.utilities]

¹ Affected subclause: 24.14.14

Change: Constructors taking allocators removed.

Rationale: No implementation consensus.

Effect on original feature: Valid C++ 2014 code may fail to compile or may change meaning in this International Standard. Specifically, constructing a `std::function` with an allocator is ill-formed and uses-allocator construction will not pass an allocator to `std::function` constructors in this International Standard.

² Affected subclause: 24.11.3

Change: Different constraint on conversions from `unique_ptr`.

Rationale: Adding array support to `shared_ptr`, via the syntax `shared_ptr<T[]>` and `shared_ptr<T[N]>`.

Effect on original feature: Valid C++ 2014 code may fail to compile or may change meaning in this International Standard. For example:

```
#include <memory>
std::unique_ptr<int[]> arr(new int[1]);
std::shared_ptr<int> ptr(std::move(arr)); // error: int(*)[] is not compatible with int*
```

C.4.10 **Clause 25: strings library** [diff.cpp14.string]

¹ **Affected subclause:** 25.3.2

Change: Non-const `.data()` member added.

Rationale: The lack of a non-const `.data()` differed from the similar member of `std::vector`. This change regularizes behavior for this International Standard.

Effect on original feature: Overloaded functions which have differing code paths for `char*` and `const char*` arguments will execute differently when called with a non-const string's `.data()` member in this International Standard.

```
int f(char *) = delete;
int f(const char *);
string s;
int x = f(s.data()); // ill-formed; previously well-formed
```

C.4.11 **Clause 27: containers library** [diff.cpp14.containers]

¹ **Affected subclause:** 27.2.6

Change: Requirements change:

Rationale: Increase portability, clarification of associative container requirements.

Effect on original feature: Valid C++ 2014 code that attempts to use associative containers having a comparison object with non-const function call operator may fail to compile in this International Standard:

```
#include <set>

struct compare
{
    bool operator()(int a, int b)
    {
        return a < b;
    }
};

int main() {
    const std::set<int, compare> s;
    s.find(0);
}
```

C.4.12 **Annex D: compatibility features** [diff.cpp14.depr]

¹ **Change:** The class templates `auto_ptr`, `unary_function`, and `binary_function`, the function templates `random_shuffle`, and the function templates (and their return types) `ptr_fun`, `mem_fun`, `mem_fun_ref`, `bind1st`, and `bind2nd` are not defined.

Rationale: Superseded by new features.

Effect on original feature: Valid C++ 2014 code that uses these class templates and function templates may fail to compile in this International Standard.

² **Change:** Remove old `iostreams` members [depr.ios.members].

Rationale: Redundant feature for compatibility with pre-standard code has served its time.

Effect on original feature: A valid C++ 2014 program using these identifiers may be ill-formed in this International Standard.

C.5 **C++ and ISO C++ 2017** [diff.cpp17]

¹ This subclause lists the differences between C++ and ISO C++ 2017 (ISO/IEC 14882:2017, *Programming Languages — C++*), by the chapters of this document.

C.5.1 **Clause 5: lexical conventions** [diff.cpp17.lex]

¹ **Affected subclause:** 5.11

Change: New keywords.

Rationale: Required for new features. The `requires` keyword is added to introduce constraints through a *requires-clause* or a *requires-expression*. The `concept` keyword is added to enable the definition of

concepts (17.6.8).

Effect on original feature: Valid ISO C++ 2017 code using `concept` or `requires` as an identifier is not valid in this International Standard.

² **Affected subclause:** 5.12

Change: New operator `<=>`.

Rationale: Necessary for new functionality.

Effect on original feature: Valid C++ 2017 code that contains a `<=` token immediately followed by a `>` token may be ill-formed or have different semantics in this International Standard:

```
namespace N {
    struct X {};
    bool operator<=(X, X);
    template<bool(X, X)> struct Y {};
    Y<operator<=> y;           // ill-formed; previously well-formed
}
```

C.5.2 Clause 8: expressions

[diff.cpp17.expr]

¹ **Affected subclause:** 8.4.5.2

Change: Implicit lambda capture may capture additional entities.

Rationale: Rule simplification, necessary to resolve interactions with `constexpr` if.

Effect on original feature: Lambdas with a *capture-default* may capture local entities that were not captured in C++ 2017 if those entities are only referenced in contexts that do not result in an odr-use.

C.5.3 Clause 11: declarators

[diff.cpp17.dcl.decl]

¹ **Affected subclause:** 11.6.1

Change: A class that has user-declared constructors is never an aggregate.

Rationale: Remove potentially error-prone aggregate initialization which may apply notwithstanding the declared constructors of a class.

Effect on original feature: Valid C++ 2017 code that aggregate-initializes a type with a user-declared constructor may be ill-formed or have different semantics in this International Standard.

```
struct A {           // not an aggregate; previously an aggregate
    A() = delete;
};

struct B {           // not an aggregate; previously an aggregate
    B() = default;
    int i = 0;
};

struct C {           // not an aggregate; previously an aggregate
    C(C&&) = default;
    int a, b;
};

A a{};               // ill-formed; previously well-formed
B b = {1};           // ill-formed; previously well-formed
auto* c = new C{2, 3}; // ill-formed; previously well-formed

struct Y;

struct X {
    operator Y();
};

struct Y {           // not an aggregate; previously an aggregate
    Y(const Y&) = default;
    X x;
};

Y y{X{}};           // copy constructor call; previously aggregate-initialization
```

C.5.4 Clause 15: special member functions [diff.cpp17.special]

¹ Affected subclauses: 15.1, 15.3.2

Change: The class name can no longer be used parenthesized immediately after an `explicit decl-specifier` in a constructor declaration. The *conversion-function-id* can no longer be used parenthesized immediately after an `explicit decl-specifier` in a conversion function declaration.

Rationale: Necessary for new functionality.

Effect on original feature: Valid C++ 2017 code may fail to compile in this International Standard. For example:

```
struct S {
    explicit (S)(const S&);           // ill-formed; previously well-formed
    explicit (operator int)();       // ill-formed; previously well-formed
    explicit(true) (S)(int);        // OK
};
```

² Affected subclauses: 15.1, 15.4

Change: A *simple-template-id* is no longer valid as the *declarator-id* of a constructor or destructor.

Rationale: Remove potentially error-prone option for redundancy.

Effect on original feature: Valid C++ 2017 code may fail to compile in this International Standard. For example:

```
template<class T>
struct A {
    A<T>();           // error: simple-template-id not allowed for constructor
    A(int);          // OK, injected-class-name used
    ~A<T>();         // error: simple-template-id not allowed for destructor
};
```

C.5.5 Clause 17: templates [diff.cpp17.temp]

¹ Affected subclause: 17.2

Change: An *unqualified-id* that is followed by a `<` and for which name lookup finds nothing or finds a function will be treated as a *template-name* in order to potentially cause argument dependent lookup to be performed.

Rationale: It was problematic to call a function template with an explicit template argument list via argument dependent lookup because of the need to have a template with the same name visible via normal lookup.

Effect on original feature: Previously valid code that uses a function name as the left operand of a `<` operator would become ill-formed.

```
struct A {};
bool operator<(void (*fp)(), A);
void f() {}
int main() {
    A a;
    f < a;    // ill-formed; previously well-formed
    (f) < a;  // still well formed
}
```

C.5.6 Clause 18: exception handling [diff.cpp17.except]

¹ Affected subclause: 18.4

Change: Remove `throw()` exception specification.

Rationale: Removal of obsolete feature that has been replaced by `noexcept`.

Effect on original feature: A valid C++ 2017 function declaration, member function declaration, function pointer declaration, or function reference declaration that uses `throw()` for its exception specification will be rejected as ill-formed in this International Standard. It should simply be replaced with `noexcept` for no change of meaning since C++ 2017. [Note: There is no way to write a function declaration that is non-throwing in this International Standard and is also non-throwing in C++ 2003 except by using the preprocessor to generate a different token sequence in each case. — end note]

C.5.7 Clause 20: library introduction [diff.cpp17.library]

¹ Affected subclause: 20.5.1.2

Change: New headers.

Rationale: New functionality.

Effect on original feature: The following C++ headers are new: `<bit>`, `<compare>`, `<concepts>`, `<contract>`, ``, `<syncstream>`, and `<version>`. Valid C++ 2017 code that `#includes` headers with these names may be invalid in this International Standard.

² **Affected subclause:** 20.5.1.2

Change: Remove vacuous C++ header files.

Rationale: The empty headers implied a false requirement to achieve C compatibility with the C++ headers.

Effect on original feature: A valid C++ 2017 program that `#includes` any of the following headers may fail to compile: `<ccomplex>`, `<ciso646>`, `<cstdalign>`, `<cstdbool>`, and `<ctgmath>`. To retain the same behavior:

- (2.1) — a `#include` of `<ccomplex>` can be replaced by a `#include` of `<complex>` (30.5.1),
- (2.2) — a `#include` of `<ctgmath>` can be replaced by a `#include` of `<cmath>` (30.10.1) and a `#include` of `<complex>`, and
- (2.3) — a `#include` of `<ciso646>`, `<cstdalign>`, or `<cstdbool>` can simply be removed.

C.5.8 Clause 27: containers library [diff.cpp17.containers]

¹ **Affected subclauses:** 27.3.9, 27.3.10

Change: Return types of `remove`, `remove_if`, and `unique` changed from `void` to `container::size_type`.

Rationale: Improve efficiency and convenience of finding number of removed elements.

Effect on original feature: Code that depends on the return types might have different semantics in this International Standard. Translation units compiled against this version of C++ may be incompatible with translation units compiled against C++ 2017, either failing to link or having undefined behavior.

C.5.9 Annex D: compatibility features [diff.cpp17.depr]

¹ **Change:** Remove `uncaught_exception`.

Rationale: The function did not have a clear specification when multiple exceptions were active, and has been superseded by `uncaught_exceptions`.

Effect on original feature: A valid C++ 2017 program that calls `std::uncaught_exception` may fail to compile. It might be revised to use `std::uncaught_exceptions` instead, for clear and portable semantics.

² **Change:** Remove support for adaptable function API.

Rationale: The deprecated support relied on a limited convention that could not be extended to support the general case or new language features. It has been superseded by direct language support with `decltype`, and by the `std::bind` and `std::not_fn` function templates.

Effect on original feature: A valid C++ 2017 program that relies on the presence of `result_type`, `argument_type`, `first_argument_type`, or `second_argument_type` in a standard library class may fail to compile. A valid C++ 2017 program that calls `not1` or `not2`, or uses the class templates `unary_negate` or `binary_negate`, may fail to compile.

³ **Change:** Remove redundant members from `std::allocator`.

Rationale: `std::allocator` was overspecified, encouraging direct usage in user containers rather than relying on `std::allocator_traits`, leading to poor containers.

Effect on original feature: A valid C++ 2017 program that directly makes use of the `pointer`, `const_pointer`, `reference`, `const_reference`, `rebind`, `address`, `construct`, `destroy`, or `max_size` members of `std::allocator`, or that directly calls `allocate` with an additional hint argument, may fail to compile.

⁴ **Change:** Remove `raw_storage_iterator`.

Rationale: The iterator encouraged use of algorithms that might throw exceptions, but did not return the number of elements successfully constructed that might need to be destroyed in order to avoid leaks.

Effect on original feature: A valid C++ 2017 program that uses this iterator class may fail to compile.

⁵ **Change:** Remove temporary buffers API.

Rationale: The temporary buffer facility was intended to provide an efficient optimization for small memory requests, but there is little evidence this was achieved in practice, while requiring the user to provide their own exception-safe wrappers to guard use of the facility in many cases.

Effect on original feature: A valid C++ 2017 program that calls `get_temporary_buffer` or `return_temporary_buffer` may fail to compile.

⁶ **Change:** Remove `shared_ptr::unique`.

Rationale: The result of a call to this member function is not reliable in the presence of multiple threads

and weak pointers. The member function `use_count` is similarly unreliable, but has a clearer contract in such cases, and remains available for well defined use in single-threaded cases.

Effect on original feature: A valid C++ 2017 program that calls `unique` on a `shared_ptr` object may fail to compile.

⁷ **Affected subclause:** D.9

Change: Remove deprecated type traits.

Rationale: The traits had unreliable or awkward interfaces. The `is_literal_type` trait provided no way to detect which subset of constructors and member functions of a type were declared `constexpr`. The `result_of` trait had a surprising syntax that could not report the result of a regular function type. It has been superseded by the `invoke_result` trait.

Effect on original feature: A valid C++ 2017 program that relies on the `is_literal_type` or `result_of` type traits, on the `is_literal_type_v` variable template, or on the `result_of_t` alias template may fail to compile.

C.6 C standard library [diff.library]

- ¹ This subclause summarizes the explicit changes in headers, definitions, declarations, or behavior between the C standard library in the C standard and the parts of the C++ standard library that were included from the C standard library.

C.6.1 Modifications to headers [diff.mods.to.headers]

- ¹ For compatibility with the C standard library, the C++ standard library provides the C headers enumerated in D.6, but their use is deprecated in C++.
- ² There are no C++ headers for the C standard library's headers `<stdatomic.h>`, `<stdnoreturn.h>`, and `<threads.h>`, nor are these headers from the C standard library headers themselves part of C++.
- ³ The C headers `<complex.h>` and `<tgmath.h>` do not contain any of the content from the C standard library and instead merely include other headers from the C++ standard library.

C.6.2 Modifications to definitions [diff.mods.to.definitions]

C.6.2.1 Types `char16_t` and `char32_t` [diff.char16]

- ¹ The types `char16_t` and `char32_t` are distinct types rather than typedefs to existing integral types. The tokens `char16_t` and `char32_t` are keywords in this International Standard (5.11). They do not appear as macro names defined in `<cuchar>` (25.5.5).

C.6.2.2 Type `wchar_t` [diff.wchar.t]

- ¹ The type `wchar_t` is a distinct type rather than a typedef to an existing integral type. The token `wchar_t` is a keyword in this International Standard (5.11). It does not appear as a type name defined in any of `<cstddef>` (21.2.1), `<cstdlib>` (21.2.2), or `<wchar>` (25.5.4).

C.6.2.3 Header `<assert.h>` [diff.header.assert.h]

- ¹ The token `static_assert` is a keyword in this International Standard (5.11). It does not appear as a macro name defined in `<cassert>` (23.3.1).

C.6.2.4 Header `<iso646.h>` [diff.header.iso646.h]

- ¹ The tokens `and`, `and_eq`, `bitand`, `bitor`, `compl`, `not_eq`, `not`, `or`, `or_eq`, `xor`, and `xor_eq` are keywords in this International Standard (5.11), and are not introduced as macros by `<iso646.h>` (D.6.2).

C.6.2.5 Header `<stdalign.h>` [diff.header.stdalign.h]

- ¹ The token `alignas` is a keyword in this International Standard (5.11), and is not introduced as a macro by `<stdalign.h>` (D.6.3).

C.6.2.6 Header `<stdbool.h>` [diff.header.stdbool.h]

- ¹ The tokens `bool`, `true`, and `false` are keywords in this International Standard (5.11), and are not introduced as macros by `<stdbool.h>` (D.6.4).

C.6.2.7 Macro NULL [diff.null]

- ¹ The macro NULL, defined in any of `<locale>` (26.5), `<stddef>` (21.2.1), `<stdio>` (31.12.1), `<stdlib>` (21.2.2), `<string>` (25.5.3), `<time>` (24.17.13), or `<wchar>` (25.5.4), is an implementation-defined C++ null pointer constant in this International Standard (21.2).

C.6.3 Modifications to declarations [diff.mods.to.declarations]

- ¹ Header `<string>` (25.5.3): The following functions have different declarations:

- (1.1) — `strchr`
- (1.2) — `strpbrk`
- (1.3) — `strrchr`
- (1.4) — `strstr`
- (1.5) — `memchr`

Subclause 25.5.3 describes the changes.

- ² Header `<wchar>` (25.5.4): The following functions have different declarations:

- (2.1) — `wcschr`
- (2.2) — `wcspbrk`
- (2.3) — `wcsrchr`
- (2.4) — `wcsstr`
- (2.5) — `wmemchr`

Subclause 25.5.4 describes the changes.

- ³ Header `<stddef>` (21.2.1) declares the name `nullptr_t` in addition to the names declared in `<stddef.h>` in the C standard library.

C.6.4 Modifications to behavior [diff.mods.to.behavior]

- ¹ Header `<stdlib>` (21.2.2): The following functions have different behavior:

- (1.1) — `atexit`
- (1.2) — `exit`
- (1.3) — `abort`

Subclause 21.5 describes the changes.

- ² Header `<setjmp>` (21.12.2): The following functions have different behavior:

- (2.1) — `longjmp`

Subclause 21.12.2 describes the changes.

C.6.4.1 Macro `offsetof(type, member-designator)` [diff.offsetof]

- ¹ The macro `offsetof`, defined in `<stddef>` (21.2.1), accepts a restricted set of *type* arguments in this International Standard. Subclause 21.2.4 describes the change.

C.6.4.2 Memory allocation functions [diff.malloc]

- ¹ The functions `aligned_alloc`, `calloc`, `malloc`, and `realloc` are restricted in this International Standard. Subclause 24.10.12 describes the changes.

Annex D (normative)

Compatibility features [depr]

- ¹ This Clause describes features of the C++ Standard that are specified for compatibility with existing implementations.
- ² These are deprecated features, where *deprecated* is defined as: Normative for the current edition of this International Standard, but having been identified as a candidate for removal from future revisions. An implementation may declare library names and entities described in this Clause with the `deprecated` attribute (10.6.5).

D.1 Arithmetic conversion on enumerations [depr.arith.conv.enum]

- ¹ The ability to apply the usual arithmetic conversions (8.3) on operands where one is of enumeration type and the other is of a different enumeration type or a floating-point type is deprecated. [Note: Three-way comparisons (8.5.8) between such operands are ill-formed. — end note] [Example:

```
enum E1 { e };
enum E2 { f };
bool b = e <= 3.7;           // deprecated
int k = f - e;              // deprecated
auto cmp = e <=> f;         // ill-formed
```

— end example]

D.2 Implicit capture of `*this` by reference [depr.capture.this]

- ¹ For compatibility with prior C++ International Standards, a *lambda-expression* with *capture-default* = (8.4.5.2) may implicitly capture `*this` by reference. [Example:

```
struct X {
    int x;
    void foo(int n) {
        auto f = [=]() { x = n; };           // deprecated: x means this->x, not a copy thereof
        auto g = [=, this]() { x = n; };    // recommended replacement
    }
};
```

— end example]

D.3 Array comparisons [depr.array.comp]

- ¹ Equality and relational comparisons (8.5.10, 8.5.9) between two operands of array type are deprecated. [Note: Three-way comparisons (8.5.8) between such operands are ill-formed. — end note] [Example:

```
int arr1[5];
int arr2[5];
bool same = arr1 == arr2;           // deprecated, same as &arr[0] == &arr[1],
                                     // does not compare array contents
auto cmp = arr1 <=> arr2;           // ill-formed
```

— end example]

D.4 Redeclaration of `static constexpr` data members [depr.static_constexpr]

- ¹ For compatibility with prior C++ International Standards, a `constexpr` static data member may be redundantly redeclared outside the class with no initializer. This usage is deprecated. [Example:

```
struct A {
    static constexpr int n = 5; // definition (declaration in C++ 2014)
};

constexpr int A::n; // redundant declaration (definition in C++ 2014)
```

— end example]

D.5 Implicit declaration of copy functions [depr.impldec]

- ¹ The implicit definition of a copy constructor as defaulted is deprecated if the class has a user-declared copy assignment operator or a user-declared destructor. The implicit definition of a copy assignment operator as defaulted is deprecated if the class has a user-declared copy constructor or a user-declared destructor (15.4, 15.8). In a future revision of this International Standard, these implicit definitions could become deleted (11.4).

D.6 C standard library headers [depr.c.headers]

- ¹ For compatibility with the C standard library, the C++ standard library provides the *C headers* shown in Table 135.

Table 135 — C headers

<assert.h>	<inttypes.h>	<signal.h>	<stdio.h>	<wchar.h>
<complex.h>	<iso646.h>	<stdalign.h>	<stdlib.h>	<wctype.h>
<ctype.h>	<limits.h>	<stdarg.h>	<string.h>	
<errno.h>	<locale.h>	<stdbool.h>	<tgmath.h>	
<fenv.h>	<math.h>	<stddef.h>	<time.h>	
<float.h>	<setjmp.h>	<stdint.h>	<uchar.h>	

D.6.1 Header <complex.h> synopsis [depr.complex.h.syn]

```
#include <complex>
```

- ¹ The header <complex.h> behaves as if it simply includes the header <complex> (30.5.1).
- ² [Note: Names introduced by <complex> in namespace `std` are not placed into the global namespace scope by <complex.h>. — end note]

D.6.2 Header <iso646.h> synopsis [depr.iso646.h.syn]

- ¹ The C++ header <iso646.h> is empty. [Note: `and`, `and_eq`, `bitand`, `bitor`, `compl`, `not_eq`, `not`, `or`, `or_eq`, `xor`, and `xor_eq` are keywords in this International Standard (5.11). — end note]

D.6.3 Header <stdalign.h> synopsis [depr.stdalign.h.syn]

```
#define __alignas_is_defined 1
```

- ¹ The contents of the C++ header <stdalign.h> are the same as the C standard library header <stdalign.h>, with the following changes: The header <stdalign.h> does not define a macro named `alignas`.

SEE ALSO: ISO C 7.15

D.6.4 Header <stdbool.h> synopsis [depr.stdbool.h.syn]

```
#define __bool_true_false_are_defined 1
```

- ¹ The contents of the C++ header <stdbool.h> are the same as the C standard library header <stdbool.h>, with the following changes: The header <stdbool.h> does not define macros named `bool`, `true`, or `false`.

SEE ALSO: ISO C 7.18

D.6.5 Header <tgmath.h> synopsis [depr.tgmath.h.syn]

```
#include <cmath>
#include <complex>
```

- ¹ The header <tgmath.h> behaves as if it simply includes the headers <cmath> (30.10.1) and <complex> (30.5.1).
- ² [Note: The overloads provided in C by type-generic macros are already provided in <complex> and <cmath> by “sufficient” additional overloads. — end note]
- ³ [Note: Names introduced by <cmath> or <complex> in namespace `std` are not placed into the global namespace scope by <tgmath.h>. — end note]

D.6.6 Other C headers

[depr.c.headers.other]

- ¹ Every C header other than `<complex.h>`, `<iso646.h>`, `<stdalign.h>`, `<stdbool.h>`, and `<tgmath.h>`, each of which has a name of the form `<name.h>`, behaves as if each name placed in the standard library namespace by the corresponding `<name>` header is placed within the global namespace scope, except for the functions described in 30.10.5, the declaration of `std::byte` (21.2.1), and the functions and function templates described in 21.2.5. It is unspecified whether these names are first declared or defined within namespace scope (6.3.6) of the namespace `std` and are then injected into the global namespace scope by explicit *using-declarations* (10.3.3).
- ² [Example: The header `<cstdlib>` assuredly provides its declarations and definitions within the namespace `std`. It may also provide these names within the global namespace. The header `<stdlib.h>` assuredly provides the same declarations and definitions within the global namespace, much as in the C Standard. It may also provide these names within the namespace `std`. — end example]

D.7 Relational operators

[depr.relops]

- ¹ The header `<utility>` has the following additions:

```
namespace std::rel_ops {
    template<class T> bool operator!=(const T&, const T&);
    template<class T> bool operator>(const T&, const T&);
    template<class T> bool operator<=(const T&, const T&);
    template<class T> bool operator>=(const T&, const T&);
}
```

- ² To avoid redundant definitions of `operator!=` out of `operator==` and operators `>`, `<=`, and `>=` out of `operator<`, the library provides the following:

```
template<class T> bool operator!=(const T& x, const T& y);
```

- ³ *Requires:* Type `T` is *Cpp17EqualityComparable* (Table 22).

- ⁴ *Returns:* `!(x == y)`.

```
template<class T> bool operator>(const T& x, const T& y);
```

- ⁵ *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

- ⁶ *Returns:* `y < x`.

```
template<class T> bool operator<=(const T& x, const T& y);
```

- ⁷ *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

- ⁸ *Returns:* `!(y < x)`.

```
template<class T> bool operator>=(const T& x, const T& y);
```

- ⁹ *Requires:* Type `T` is *Cpp17LessThanComparable* (Table 23).

- ¹⁰ *Returns:* `!(x < y)`.

D.8 char* streams

[depr.str.strstreams]

D.8.1 Header `<strstream>` synopsis

[depr.strstream.syn]

- ¹ The header `<strstream>` defines types that associate stream buffers with character array objects and assist reading and writing such objects.

```
namespace std {
    class strstreambuf;
    class istrstream;
    class ostrstream;
    class strstream;
}
```

D.8.2 Class `strstreambuf`

[depr.strstreambuf]

```
namespace std {
    class strstreambuf : public basic_streambuf<char> {
    public:
        strstreambuf() : strstreambuf(0) {}
    }
```



```

explicit strstreambuf(streamsize a_size_arg);
strstreambuf(void* (*palloc_arg)(size_t), void (*pfree_arg)(void*));
strstreambuf(char* gnext_arg, streamsize n, char* pbeg_arg = nullptr);
strstreambuf(const char* gnext_arg, streamsize n);

strstreambuf(signed char* gnext_arg, streamsize n,
             signed char* pbeg_arg = nullptr);
strstreambuf(const signed char* gnext_arg, streamsize n);
strstreambuf(unsigned char* gnext_arg, streamsize n,
             unsigned char* pbeg_arg = nullptr);
strstreambuf(const unsigned char* gnext_arg, streamsize n);

virtual ~strstreambuf();

void freeze(bool freeze_fl = true);
char* str();
int pcount();

protected:
int_type overflow(int_type c = EOF) override;
int_type pbackfail(int_type c = EOF) override;
int_type underflow() override;
pos_type seekoff(off_type off, ios_base::seekdir way,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
pos_type seekpos(pos_type sp,
                ios_base::openmode which
                = ios_base::in | ios_base::out) override;
streambuf* setbuf(char* s, streamsize n) override;

private:
using strstate = T1; // exposition only
static const strstate allocated; // exposition only
static const strstate constant; // exposition only
static const strstate dynamic; // exposition only
static const strstate frozen; // exposition only
strstate strmode; // exposition only
streamsize a_size; // exposition only
void* (*palloc)(size_t); // exposition only
void (*pfree)(void*); // exposition only
};
}

```

¹ The class `strstreambuf` associates the input sequence, and possibly the output sequence, with an object of some *character* array type, whose elements store arbitrary values. The array object has several attributes.

² [Note: For the sake of exposition, these are represented as elements of a bitmask type (indicated here as T1) called `strstate`. The elements are:

- (2.1) — `allocated`, set when a dynamic array object has been allocated, and hence should be freed by the destructor for the `strstreambuf` object;
 - (2.2) — `constant`, set when the array object has `const` elements, so the output sequence cannot be written;
 - (2.3) — `dynamic`, set when the array object is allocated (or reallocated) as necessary to hold a character sequence that can change in length;
 - (2.4) — `frozen`, set when the program has requested that the array object not be altered, reallocated, or freed.
- end note]

³ [Note: For the sake of exposition, the maintained data is presented here as:

- (3.1) — `strstate strmode`, the attributes of the array object associated with the `strstreambuf` object;
- (3.2) — `int a_size`, the suggested minimum size for a dynamic array object;
- (3.3) — `void* (*palloc)(size_t)`, points to the function to call to allocate a dynamic array object;
- (3.4) — `void (*pfree)(void*)`, points to the function to call to free a dynamic array object.

— *end note*]

- ⁴ Each object of class `strstreambuf` has a *seekable area*, delimited by the pointers `seeklow` and `seekhigh`. If `gnext` is a null pointer, the seekable area is undefined. Otherwise, `seeklow` equals `gbeg` and `seekhigh` is either `pend`, if `pend` is not a null pointer, or `gend`.

D.8.2.1 `strstreambuf` constructors

[`depr.strstreambuf.cons`]

```
explicit strstreambuf(streamsize a_size_arg);
```

- ¹ *Effects:* Constructs an object of class `strstreambuf`, initializing the base class with `streambuf()`. The postconditions of this function are indicated in Table 136.

Table 136 — `strstreambuf(streamsize)` effects

Element	Value
<code>strmode</code>	dynamic
<code>a_size</code>	<code>a_size_arg</code>
<code>palloc</code>	a null pointer
<code>pfree</code>	a null pointer

```
strstreambuf(void* (*palloc_arg)(size_t), void (*pfree_arg)(void*));
```

- ² *Effects:* Constructs an object of class `strstreambuf`, initializing the base class with `streambuf()`. The postconditions of this function are indicated in Table 137.

Table 137 — `strstreambuf(void* (*)(size_t), void (*)(void*))` effects

Element	Value
<code>strmode</code>	dynamic
<code>a_size</code>	an unspecified value
<code>palloc</code>	<code>palloc_arg</code>
<code>pfree</code>	<code>pfree_arg</code>

```
strstreambuf(char* gnext_arg, streamsize n, char* pbeg_arg = nullptr);
```

```
strstreambuf(signed char* gnext_arg, streamsize n,  
             signed char* pbeg_arg = nullptr);
```

```
strstreambuf(unsigned char* gnext_arg, streamsize n,  
             unsigned char* pbeg_arg = nullptr);
```

- ³ *Effects:* Constructs an object of class `strstreambuf`, initializing the base class with `streambuf()`. The postconditions of this function are indicated in Table 138.

Table 138 — `strstreambuf(charT*, streamsize, charT*)` effects

Element	Value
<code>strmode</code>	0
<code>a_size</code>	an unspecified value
<code>palloc</code>	a null pointer
<code>pfree</code>	a null pointer

- ⁴ `gnext_arg` shall point to the first element of an array object whose number of elements `N` is determined as follows:

(4.1) — If `n > 0`, `N` is `n`.

(4.2) — If `n == 0`, `N` is `std::strlen(gnext_arg)`.

(4.3) — If `n < 0`, `N` is `INT_MAX`.³³³

³³³ The function signature `strlen(const char*)` is declared in `<cstring>` (25.5.3). The macro `INT_MAX` is defined in `<climits>` (21.3.5).

5 If `pbeg_arg` is a null pointer, the function executes:

```
setg(gnext_arg, gnext_arg, gnext_arg + N);
```

6 Otherwise, the function executes:

```
setg(gnext_arg, gnext_arg, pbeg_arg);
setp(pbeg_arg, pbeg_arg + N);
```

```
strstreambuf(const char* gnext_arg, streamsize n);
strstreambuf(const signed char* gnext_arg, streamsize n);
strstreambuf(const unsigned char* gnext_arg, streamsize n);
```

7 *Effects:* Behaves the same as `strstreambuf((char*)gnext_arg,n)`, except that the constructor also sets constant in `strmode`.

```
virtual ~strstreambuf();
```

8 *Effects:* Destroys an object of class `strstreambuf`. The function frees the dynamically allocated array object only if `(strmode & allocated) != 0` and `(strmode & frozen) == 0`. (D.8.2.3 describes how a dynamically allocated array object is freed.)

D.8.2.2 Member functions

[depr.strstreambuf.members]

```
void freeze(bool freezefl = true);
```

1 *Effects:* If `strmode & dynamic` is nonzero, alters the freeze status of the dynamic array object as follows:

- (1.1) — If `freezefl` is true, the function sets `frozen` in `strmode`.
- (1.2) — Otherwise, it clears `frozen` in `strmode`.

```
char* str();
```

2 *Effects:* Calls `freeze()`, then returns the beginning pointer for the input sequence, `gbeg`.

3 *Remarks:* The return value can be a null pointer.

```
int pcount() const;
```

4 *Effects:* If the next pointer for the output sequence, `pnext`, is a null pointer, returns zero. Otherwise, returns the current effective length of the array object as the next pointer minus the beginning pointer for the output sequence, `pnext - pbeg`.

D.8.2.3 `strstreambuf` overridden virtual functions

[depr.strstreambuf.virtuals]

```
int_type overflow(int_type c = EOF) override;
```

1 *Effects:* Appends the character designated by `c` to the output sequence, if possible, in one of two ways:

- (1.1) — If `c != EOF` and if either the output sequence has a write position available or the function makes a write position available (as described below), assigns `c` to `*pnext++`.

Returns `(unsigned char)c`.

- (1.2) — If `c == EOF`, there is no character to append.

Returns a value other than EOF.

2 Returns EOF to indicate failure.

3 *Remarks:* The function can alter the number of write positions available as a result of any call.

4 To make a write position available, the function reallocates (or initially allocates) an array object with a sufficient number of elements `n` to hold the current array object (if any), plus at least one additional write position. How many additional write positions are made available is otherwise unspecified.³³⁴ If `palloc` is not a null pointer, the function calls `(*palloc)(n)` to allocate the new dynamic array object. Otherwise, it evaluates the expression `new charT[n]`. In either case, if the allocation fails, the function returns EOF. Otherwise, it sets `allocated` in `strmode`.

5 To free a previously existing dynamic array object whose first element address is `p`: If `pfree` is not a null pointer, the function calls `(*pfree)(p)`. Otherwise, it evaluates the expression `delete []p`.

334) An implementation should consider `alsize` in making this decision.

6 If `(strmode & dynamic) == 0`, or if `(strmode & frozen) != 0`, the function cannot extend the array (reallocate it with greater length) to make a write position available.

`int_type pbackfail(int_type c = EOF) override;`

7 Puts back the character designated by `c` to the input sequence, if possible, in one of three ways:

(7.1) — If `c != EOF`, if the input sequence has a putback position available, and if `(char)c == gnext[-1]`, assigns `gnext - 1` to `gnext`.

Returns `c`.

(7.2) — If `c != EOF`, if the input sequence has a putback position available, and if `strmode & constant` is zero, assigns `c` to `*--gnext`.

Returns `c`.

(7.3) — If `c == EOF` and if the input sequence has a putback position available, assigns `gnext - 1` to `gnext`.

Returns a value other than `EOF`.

8 Returns `EOF` to indicate failure.

9 *Remarks:* If the function can succeed in more than one of these ways, it is unspecified which way is chosen. The function can alter the number of putback positions available as a result of any call.

`int_type underflow() override;`

10 *Effects:* Reads a character from the *input sequence*, if possible, without moving the stream position past it, as follows:

(10.1) — If the input sequence has a read position available, the function signals success by returning `(unsigned char)*gnext`.

(10.2) — Otherwise, if the current write next pointer `pnext` is not a null pointer and is greater than the current read end pointer `gend`, makes a *read position* available by assigning to `gend` a value greater than `gnext` and no greater than `pnext`.

Returns `(unsigned char)*gnext`.

11 Returns `EOF` to indicate failure.

12 *Remarks:* The function can alter the number of read positions available as a result of any call.

`pos_type seekoff(off_type off, seekdir way, openmode which = in | out) override;`

13 *Effects:* Alters the stream position within one of the controlled sequences, if possible, as indicated in Table 139.

Table 139 — `seekoff` positioning

Conditions	Result
<code>(which & ios::in) != 0</code>	positions the input sequence
<code>(which & ios::out) != 0</code>	positions the output sequence
<code>(which & (ios::in ios::out)) == (ios::in ios::out)</code> and <code>way == either</code> <code>ios::beg</code> or <code>ios::end</code>	positions both the input and the output sequences
Otherwise	the positioning operation fails.

14 For a sequence to be positioned, if its next pointer is a null pointer, the positioning operation fails. Otherwise, the function determines `newoff` as indicated in Table 140.

15 If `(newoff + off) < (seeklow - xbeg)` or `(seekhigh - xbeg) < (newoff + off)`, the positioning operation fails. Otherwise, the function assigns `xbeg + newoff + off` to the next pointer `xnext`.

Table 140 — `newoff` values

Condition	<code>newoff</code> Value
<code>way == ios::beg</code>	0
<code>way == ios::cur</code>	the next pointer minus the beginning pointer (<code>xnext - xbeg</code>).
<code>way == ios::end</code>	<code>seekhigh</code> minus the beginning pointer (<code>seekhigh - xbeg</code>).

16 *Returns:* `pos_type(newoff)`, constructed from the resultant offset `newoff` (of type `off_type`), that stores the resultant stream position, if possible. If the positioning operation fails, or if the constructed object cannot represent the resultant stream position, the return value is `pos_type(off_type(-1))`.

```
pos_type seekpos(pos_type sp, ios_base::openmode which
                = ios_base::in | ios_base::out) override;
```

17 *Effects:* Alters the stream position within one of the controlled sequences, if possible, to correspond to the stream position stored in `sp` (as described below).

(17.1) — If `(which & ios::in) != 0`, positions the input sequence.

(17.2) — If `(which & ios::out) != 0`, positions the output sequence.

(17.3) — If the function positions neither sequence, the positioning operation fails.

18 For a sequence to be positioned, if its next pointer is a null pointer, the positioning operation fails. Otherwise, the function determines `newoff` from `sp.offset()`:

(18.1) — If `newoff` is an invalid stream position, has a negative value, or has a value greater than `(seekhigh - seeklow)`, the positioning operation fails

(18.2) — Otherwise, the function adds `newoff` to the beginning pointer `xbeg` and stores the result in the next pointer `xnext`.

19 *Returns:* `pos_type(newoff)`, constructed from the resultant offset `newoff` (of type `off_type`), that stores the resultant stream position, if possible. If the positioning operation fails, or if the constructed object cannot represent the resultant stream position, the return value is `pos_type(off_type(-1))`.

```
streambuf<char*> setbuf(char* s, streamsize n) override;
```

20 *Effects:* Implementation defined, except that `setbuf(0, 0)` has no effect.

D.8.3 Class `istream`

[depr.istream]

```
namespace std {
class istream : public basic_istream<char> {
public:
    explicit istream(const char* s);
    explicit istream(char* s);
    istream(const char* s, streamsize n);
    istream(char* s, streamsize n);
    virtual ~istream();

    strstreambuf* rdbuf() const;
    char* str();
private:
    strstreambuf sb; // exposition only
};
}
```

¹ The class `istream` supports the reading of objects of class `strstreambuf`. It supplies a `strstreambuf` object to control the associated array object. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the `strstreambuf` object.

D.8.3.1 istrstream constructors

[depr.istrstream.cons]

```
explicit istrstream(const char* s);
explicit istrstream(char* s);
```

- 1 *Effects:* Constructs an object of class `istrstream`, initializing the base class with `istream(&sb)` and initializing `sb` with `strstreambuf(s,0)`. `s` shall designate the first element of an NTBS.

```
istrstream(const char* s, streamsize n);
istrstream(char* s, streamsize n);
```

- 2 *Effects:* Constructs an object of class `istrstream`, initializing the base class with `istream(&sb)` and initializing `sb` with `strstreambuf(s,n)`. `s` shall designate the first element of an array whose length is `n` elements, and `n` shall be greater than zero.

D.8.3.2 Member functions

[depr.istrstream.members]

```
strstreambuf* rdbuf() const;
```

- 1 *Returns:* `const_cast<strstreambuf*>(&sb)`.

```
char* str();
```

- 2 *Returns:* `rdbuf()->str()`.

D.8.4 Class ostrstream

[depr.ostrstream]

```
namespace std {
    class ostrstream : public basic_ostream<char> {
    public:
        ostrstream();
        ostrstream(char* s, int n, ios_base::openmode mode = ios_base::out);
        virtual ~ostrstream();

        strstreambuf* rdbuf() const;
        void freeze(bool freezeFl = true);
        char* str();
        int pcount() const;
    private:
        strstreambuf sb; // exposition only
    };
}
```

- 1 The class `ostrstream` supports the writing of objects of class `strstreambuf`. It supplies a `strstreambuf` object to control the associated array object. For the sake of exposition, the maintained data is presented here as:

- (1.1) — `sb`, the `strstreambuf` object.

D.8.4.1 ostrstream constructors

[depr.ostrstream.cons]

```
ostrstream();
```

- 1 *Effects:* Constructs an object of class `ostrstream`, initializing the base class with `ostream(&sb)` and initializing `sb` with `strstreambuf()`.

```
ostrstream(char* s, int n, ios_base::openmode mode = ios_base::out);
```

- 2 *Effects:* Constructs an object of class `ostrstream`, initializing the base class with `ostream(&sb)`, and initializing `sb` with one of two constructors:

- (2.1) — If `(mode & app) == 0`, then `s` shall designate the first element of an array of `n` elements. The constructor is `strstreambuf(s, n, s)`.
- (2.2) — If `(mode & app) != 0`, then `s` shall designate the first element of an array of `n` elements that contains an NTBS whose first element is designated by `s`. The constructor is `strstreambuf(s, n, s + std::strlen(s))`.³³⁵

335) The function signature `strlen(const char*)` is declared in `<cstring>` (25.5.3).

D.8.4.2 Member functions

[depr.ostream.members]

```
strstreambuf* rdbuf() const;
```

1 *Returns:* (strstreambuf*)&sb.

```
void freeze(bool freezefl = true);
```

2 *Effects:* Calls rdbuf()->freeze(freezefl).

```
char* str();
```

3 *Returns:* rdbuf()->str().

```
int pcount() const;
```

4 *Returns:* rdbuf()->pcount().

D.8.5 Class strstream

[depr.strstream]

```
namespace std {
  class strstream
  : public basic_ostream<char> {
  public:
    // types
    using char_type = char;
    using int_type = char_traits<char>::int_type;
    using pos_type = char_traits<char>::pos_type;
    using off_type = char_traits<char>::off_type;

    // constructors/destructor
    strstream();
    strstream(char* s, int n,
              ios_base::openmode mode = ios_base::in|ios_base::out);
    virtual ~strstream();

    // members
    strstreambuf* rdbuf() const;
    void freeze(bool freezefl = true);
    int pcount() const;
    char* str();

  private:
    strstreambuf sb; // exposition only
  };
}
```

1 The class `strstream` supports reading and writing from objects of class `strstreambuf`. It supplies a `strstreambuf` object to control the associated array object. For the sake of exposition, the maintained data is presented here as:

(1.1) — `sb`, the `strstreambuf` object.

D.8.5.1 strstream constructors

[depr.strstream.cons]

```
strstream();
```

1 *Effects:* Constructs an object of class `strstream`, initializing the base class with `ostream(&sb)`.

```
strstream(char* s, int n,
          ios_base::openmode mode = ios_base::in|ios_base::out);
```

2 *Effects:* Constructs an object of class `strstream`, initializing the base class with `ostream(&sb)` and initializing `sb` with one of the two constructors:

(2.1) — If `(mode & app) == 0`, then `s` shall designate the first element of an array of `n` elements. The constructor is `strstreambuf(s,n,s)`.

(2.2) — If `(mode & app) != 0`, then `s` shall designate the first element of an array of `n` elements that contains an NTBS whose first element is designated by `s`. The constructor is `strstreambuf(s,n,s + std::strlen(s))`.

D.8.5.2 `stringstream` destructor [depr stringstream.dest]

```
virtual ~stringstream();
```

- 1 *Effects:* Destroys an object of class `stringstream`.

D.8.5.3 `stringstream` operations [depr stringstream.oper]

```
stringstreambuf* rdbuf() const;
```

- 1 *Returns:* `&sb`.

```
void freeze(bool freezefl = true);
```

- 2 *Effects:* Calls `rdbuf()->freeze(freezefl)`.

```
char* str();
```

- 3 *Returns:* `rdbuf()->str()`.

```
int pcount() const;
```

- 4 *Returns:* `rdbuf()->pcount()`.

D.9 Deprecated type traits [depr meta.types]

- 1 The header `<type_traits>` has the following addition:

```
namespace std {
    template<class T> struct is_pod;
    template<class T> inline constexpr bool is_pod_v = is_pod<T>::value;
}
```

- 2 The behavior of a program that adds specializations for any of the templates defined in this subclause is undefined, unless explicitly permitted by the specification of the corresponding template.

```
template<class T> struct is_pod;
```

- 3 *Requires:* `remove_all_extents_t<T>` shall be a complete type or *cv void*.

- 4 `is_pod<T>` is a *Cpp17UnaryTypeTrait* (24.15.1) with a base characteristic of `true_type` if `T` is a POD type, and `false_type` otherwise. A POD class is a class that is both a trivial class and a standard-layout class, and has no non-static data members of type non-POD class (or array thereof). A POD type is a scalar type, a POD class, an array of such a type, or a cv-qualified version of one of these types.

- 5 [Note: It is unspecified whether a closure type (8.4.5.1) is a POD type. — end note]

D.10 Deprecated iterator primitives [depr iterator.primitives]**D.10.1 Basic iterator** [depr iterator.basic]

- 1 The header `<iterator>` has the following addition:

```
namespace std {
    template<class Category, class T, class Distance = ptrdiff_t,
            class Pointer = T*, class Reference = T&>
    struct iterator {
        using iterator_category = Category;
        using value_type = T;
        using difference_type = Distance;
        using pointer = Pointer;
        using reference = Reference;
    };
}
```

- 2 The `iterator` template may be used as a base class to ease the definition of required types for new iterators.

- 3 [Note: If the new iterator type is a class template, then these aliases will not be visible from within the iterator class's template definition, but only to callers of that class. — end note]

- 4 [Example: If a C++ program wants to define a bidirectional iterator for some data structure containing `double` and such that it works on a large memory model of the implementation, it can do so with:


```

class MyIterator :
  public iterator<bidirectional_iterator_tag, double, long, T*, T&> {
  // code implementing ++, etc.
};

```

— end example]

D.11 Deprecated `shared_ptr` atomic access [depr.util.smartptr.shared.atomic]

- ¹ The header `<memory>` has the following additions:

```

namespace std {
  template<class T>
    bool atomic_is_lock_free(const shared_ptr<T>* p);

  template<class T>
    shared_ptr<T> atomic_load(const shared_ptr<T>* p);
  template<class T>
    shared_ptr<T> atomic_load_explicit(const shared_ptr<T>* p, memory_order mo);

  template<class T>
    void atomic_store(shared_ptr<T>* p, shared_ptr<T> r);
  template<class T>
    void atomic_store_explicit(shared_ptr<T>* p, shared_ptr<T> r, memory_order mo);

  template<class T>
    shared_ptr<T> atomic_exchange(shared_ptr<T>* p, shared_ptr<T> r);
  template<class T>
    shared_ptr<T> atomic_exchange_explicit(shared_ptr<T>* p, shared_ptr<T> r, memory_order mo);

  template<class T>
    bool atomic_compare_exchange_weak(shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w);
  template<class T>
    bool atomic_compare_exchange_strong(shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w);
  template<class T>
    bool atomic_compare_exchange_weak_explicit(
      shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w,
      memory_order success, memory_order failure);
  template<class T>
    bool atomic_compare_exchange_strong_explicit(
      shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w,
      memory_order success, memory_order failure);
}

```

- ² Concurrent access to a `shared_ptr` object from multiple threads does not introduce a data race if the access is done exclusively via the functions in this subclause and the instance is passed as their first argument.
- ³ The meaning of the arguments of type `memory_order` is explained in [33.4](#).

```

template<class T> bool atomic_is_lock_free(const shared_ptr<T>* p);

```

- ⁴ *Requires:* `p` shall not be null.

- ⁵ *Returns:* `true` if atomic access to `*p` is lock-free, `false` otherwise.

- ⁶ *Throws:* Nothing.

```

template<class T> shared_ptr<T> atomic_load(const shared_ptr<T>* p);

```

- ⁷ *Requires:* `p` shall not be null.

- ⁸ *Returns:* `atomic_load_explicit(p, memory_order_seq_cst)`.

- ⁹ *Throws:* Nothing.

```

template<class T> shared_ptr<T> atomic_load_explicit(const shared_ptr<T>* p, memory_order mo);

```

- ¹⁰ *Requires:* `p` shall not be null.

- ¹¹ *Requires:* `mo` shall not be `memory_order_release` or `memory_order_acq_rel`.

- ¹² *Returns:* `*p`.

13 *Throws:* Nothing.

```
template<class T> void atomic_store(shared_ptr<T>* p, shared_ptr<T> r);
```

14 *Requires:* p shall not be null.

15 *Effects:* As if by `atomic_store_explicit(p, r, memory_order_seq_cst)`.

16 *Throws:* Nothing.

```
template<class T> void atomic_store_explicit(shared_ptr<T>* p, shared_ptr<T> r, memory_order mo);
```

17 *Requires:* p shall not be null.

18 *Requires:* mo shall not be `memory_order_acquire` or `memory_order_acq_rel`.

19 *Effects:* As if by `p->swap(r)`.

20 *Throws:* Nothing.

```
template<class T> shared_ptr<T> atomic_exchange(shared_ptr<T>* p, shared_ptr<T> r);
```

21 *Requires:* p shall not be null.

22 *Returns:* `atomic_exchange_explicit(p, r, memory_order_seq_cst)`.

23 *Throws:* Nothing.

```
template<class T>
```

```
    shared_ptr<T> atomic_exchange_explicit(shared_ptr<T>* p, shared_ptr<T> r, memory_order mo);
```

24 *Requires:* p shall not be null.

25 *Effects:* As if by `p->swap(r)`.

26 *Returns:* The previous value of `*p`.

27 *Throws:* Nothing.

```
template<class T>
```

```
    bool atomic_compare_exchange_weak(shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w);
```

28 *Requires:* p shall not be null and v shall not be null.

29 *Returns:*

```
    atomic_compare_exchange_weak_explicit(p, v, w, memory_order_seq_cst, memory_order_seq_cst)
```

30 *Throws:* Nothing.

```
template<class T>
```

```
    bool atomic_compare_exchange_strong(shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w);
```

31 *Returns:*

```
    atomic_compare_exchange_strong_explicit(p, v, w, memory_order_seq_cst, memory_order_seq_cst)
```

```
template<class T>
```

```
    bool atomic_compare_exchange_weak_explicit(
        shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w,
        memory_order success, memory_order failure);
```

```
template<class T>
```

```
    bool atomic_compare_exchange_strong_explicit(
        shared_ptr<T>* p, shared_ptr<T>* v, shared_ptr<T> w,
        memory_order success, memory_order failure);
```

32 *Requires:* p shall not be null and v shall not be null. The failure argument shall not be `memory_order_release` nor `memory_order_acq_rel`.

33 *Effects:* If `*p` is equivalent to `*v`, assigns w to `*p` and has synchronization semantics corresponding to the value of `success`, otherwise assigns `*p` to `*v` and has synchronization semantics corresponding to the value of `failure`.

34 *Returns:* true if `*p` was equivalent to `*v`, false otherwise.

35 *Throws:* Nothing.

- 36 *Remarks:* Two `shared_ptr` objects are equivalent if they store the same pointer value and share ownership. The weak form may fail spuriously. See 33.7.1.

D.12 Deprecated `basic_string` capacity [depr.string.capacity]

- 1 The following member is declared in addition to those members specified in 25.3.2.4:

```
namespace std {
    template<class charT, class traits = char_traits<charT>,
            class Allocator = allocator<charT>>
    class basic_string {
    public:
        void reserve();
    };
}
```

```
void reserve();
```

- 2 *Effects:* After this call, `capacity()` has an unspecified value greater than or equal to `size()`. [*Note:* This is a non-binding shrink to fit request. — *end note*]

D.13 Deprecated standard code conversion facets [depr.locale.stdcvvt]

- 1 The header `<codecvt>` provides code conversion facets for various character encodings.

D.13.1 Header `<codecvt>` synopsis [depr.codecvt.syn]

```
namespace std {
    enum codecvt_mode {
        consume_header = 4,
        generate_header = 2,
        little_endian = 1
    };

    template<class Elem, unsigned long Maxcode = 0x10ffff, codecvt_mode Mode = (codecvt_mode)0>
    class codecvt_utf8 : public codecvt<Elem, char, mbstate_t> {
    public:
        explicit codecvt_utf8(size_t refs = 0);
        ~codecvt_utf8();
    };

    template<class Elem, unsigned long Maxcode = 0x10ffff, codecvt_mode Mode = (codecvt_mode)0>
    class codecvt_utf16 : public codecvt<Elem, char, mbstate_t> {
    public:
        explicit codecvt_utf16(size_t refs = 0);
        ~codecvt_utf16();
    };

    template<class Elem, unsigned long Maxcode = 0x10ffff, codecvt_mode Mode = (codecvt_mode)0>
    class codecvt_utf8_utf16 : public codecvt<Elem, char, mbstate_t> {
    public:
        explicit codecvt_utf8_utf16(size_t refs = 0);
        ~codecvt_utf8_utf16();
    };
}
```

D.13.2 Requirements [depr.locale.stdcvvt.req]

- 1 For each of the three code conversion facets `codecvt_utf8`, `codecvt_utf16`, and `codecvt_utf8_utf16`:
- (1.1) — `Elem` is the wide-character type, such as `wchar_t`, `char16_t`, or `char32_t`.
 - (1.2) — `Maxcode` is the largest wide-character code that the facet will read or write without reporting a conversion error.
 - (1.3) — If (`Mode & consume_header`), the facet shall consume an initial header sequence, if present, when reading a multibyte sequence to determine the endianness of the subsequent multibyte sequence to be read.

- (1.4) — If (`Mode & generate_header`), the facet shall generate an initial header sequence when writing a multibyte sequence to advertise the endianness of the subsequent multibyte sequence to be written.
- (1.5) — If (`Mode & little_endian`), the facet shall generate a multibyte sequence in little-endian order, as opposed to the default big-endian order.
- 2 For the facet `codecvt_utf8`:
 - (2.1) — The facet shall convert between UTF-8 multibyte sequences and UCS-2 or UTF-32 (depending on the size of `Elem`) within the program.
 - (2.2) — Endianness shall not affect how multibyte sequences are read or written.
 - (2.3) — The multibyte sequences may be written as either a text or a binary file.
- 3 For the facet `codecvt_utf16`:
 - (3.1) — The facet shall convert between UTF-16 multibyte sequences and UCS-2 or UTF-32 (depending on the size of `Elem`) within the program.
 - (3.2) — Multibyte sequences shall be read or written according to the `Mode` flag, as set out above.
 - (3.3) — The multibyte sequences may be written only as a binary file. Attempting to write to a text file produces undefined behavior.
- 4 For the facet `codecvt_utf8_utf16`:
 - (4.1) — The facet shall convert between UTF-8 multibyte sequences and UTF-16 (one or two 16-bit codes) within the program.
 - (4.2) — Endianness shall not affect how multibyte sequences are read or written.
 - (4.3) — The multibyte sequences may be written as either a text or a binary file.
- 5 The encoding forms UTF-8, UTF-16, and UTF-32 are specified in ISO/IEC 10646. The encoding form UCS-2 is specified in ISO/IEC 10646-1:1993.

D.14 Deprecated convenience conversion interfaces

[depr.conversions]

- 1 The header `<locale>` has the following additions:

```
namespace std {
    template<class Codecvt, class Elem = wchar_t,
            class Wide_alloc = allocator<Elem>,
            class Byte_alloc = allocator<char>>
        class wstring_convert;

    template<class Codecvt, class Elem = wchar_t,
            class Tr = char_traits<Elem>>
        class wbuffer_convert;
}
```

D.14.1 Class template `wstring_convert`

[depr.conversions.string]

- 1 Class template `wstring_convert` performs conversions between a wide string and a byte string. It lets you specify a code conversion facet (like class template `codecvt`) to perform the conversions, without affecting any streams or locales. [Example: If you want to use the code conversion facet `codecvt_utf8` to output to `cout` a UTF-8 multibyte sequence corresponding to a wide string, but you don't want to alter the locale for `cout`, you can write something like:

```
wstring_convert<std::codecvt_utf8<wchar_t>> myconv;
std::string mbstring = myconv.to_bytes(L"Hello\n");
std::cout << mbstring;
```

— end example]

```
namespace std {
    template<class Codecvt, class Elem = wchar_t,
            class Wide_alloc = allocator<Elem>,
            class Byte_alloc = allocator<char>>
        class wstring_convert {
    public:
        using byte_string = basic_string<char, char_traits<char>, Byte_alloc>;
        using wide_string = basic_string<Elem, char_traits<Elem>, Wide_alloc>;
```

```

using state_type = typename Codecvt::state_type;
using int_type   = typename wide_string::traits_type::int_type;

wstring_convert() : wstring_convert(new Codecvt) {}
explicit wstring_convert(Codecvt* pcvt);
wstring_convert(Codecvt* pcvt, state_type state);
explicit wstring_convert(const byte_string& byte_err,
                        const wide_string& wide_err = wide_string());
~wstring_convert();

wstring_convert(const wstring_convert&) = delete;
wstring_convert& operator=(const wstring_convert&) = delete;

wide_string from_bytes(char byte);
wide_string from_bytes(const char* ptr);
wide_string from_bytes(const byte_string& str);
wide_string from_bytes(const char* first, const char* last);

byte_string to_bytes(Elem wchar);
byte_string to_bytes(const Elem* wptr);
byte_string to_bytes(const wide_string& wstr);
byte_string to_bytes(const Elem* first, const Elem* last);

size_t converted() const noexcept;
state_type state() const;

private:
    byte_string byte_err_string; // exposition only
    wide_string wide_err_string; // exposition only
    Codecvt* cvtptr;           // exposition only
    state_type cvtstate;      // exposition only
    size_t cvtcount;         // exposition only
};
}

```

² The class template describes an object that controls conversions between wide string objects of class `basic_string<Elem, char_traits<Elem>, Wide_alloc>` and byte string objects of class `basic_string<char, char_traits<char>, Byte_alloc>`. The class template defines the types `wide_string` and `byte_string` as synonyms for these two types. Conversion between a sequence of `Elem` values (stored in a `wide_string` object) and multibyte sequences (stored in a `byte_string` object) is performed by an object of class `Codecvt`, which meets the requirements of the standard code-conversion facet `codecvt<Elem, char, mbstate_t>`.

³ An object of this class template stores:

- (3.1) — `byte_err_string` — a byte string to display on errors
- (3.2) — `wide_err_string` — a wide string to display on errors
- (3.3) — `cvtptr` — a pointer to the allocated conversion object (which is freed when the `wstring_convert` object is destroyed)
- (3.4) — `cvtstate` — a conversion state object
- (3.5) — `cvtcount` — a conversion count

```
using byte_string = basic_string<char, char_traits<char>, Byte_alloc>;
```

⁴ The type shall be a synonym for `basic_string<char, char_traits<char>, Byte_alloc>`.

```
size_t converted() const noexcept;
```

⁵ *Returns:* `cvtcount`.

```

wide_string from_bytes(char byte);
wide_string from_bytes(const char* ptr);
wide_string from_bytes(const byte_string& str);

```

```
wide_string from_bytes(const char* first, const char* last);
```

6 *Effects:* The first member function shall convert the single-element sequence `byte` to a wide string. The second member function shall convert the null-terminated sequence beginning at `ptr` to a wide string. The third member function shall convert the sequence stored in `str` to a wide string. The fourth member function shall convert the sequence defined by the range `[first, last)` to a wide string.

7 In all cases:

(7.1) — If the `cvtstate` object was not constructed with an explicit value, it shall be set to its default value (the initial conversion state) before the conversion begins. Otherwise it shall be left unchanged.

(7.2) — The number of input elements successfully converted shall be stored in `cvtcount`.

8 *Returns:* If no conversion error occurs, the member function shall return the converted wide string. Otherwise, if the object was constructed with a wide-error string, the member function shall return the wide-error string. Otherwise, the member function throws an object of class `range_error`.

```
using int_type = typename wide_string::traits_type::int_type;
```

9 The type shall be a synonym for `wide_string::traits_type::int_type`.

```
state_type state() const;
```

10 returns `cvtstate`.

```
using state_type = typename Codecvt::state_type;
```

11 The type shall be a synonym for `Codecvt::state_type`.

```
byte_string to_bytes(Elem wchar);
```

```
byte_string to_bytes(const Elem* wptr);
```

```
byte_string to_bytes(const wide_string& wstr);
```

```
byte_string to_bytes(const Elem* first, const Elem* last);
```

12 *Effects:* The first member function shall convert the single-element sequence `wchar` to a byte string. The second member function shall convert the null-terminated sequence beginning at `wptr` to a byte string. The third member function shall convert the sequence stored in `wstr` to a byte string. The fourth member function shall convert the sequence defined by the range `[first, last)` to a byte string.

13 In all cases:

(13.1) — If the `cvtstate` object was not constructed with an explicit value, it shall be set to its default value (the initial conversion state) before the conversion begins. Otherwise it shall be left unchanged.

(13.2) — The number of input elements successfully converted shall be stored in `cvtcount`.

14 *Returns:* If no conversion error occurs, the member function shall return the converted byte string. Otherwise, if the object was constructed with a byte-error string, the member function shall return the byte-error string. Otherwise, the member function shall throw an object of class `range_error`.

```
using wide_string = basic_string<Elem, char_traits<Elem>, Wide_alloc>;
```

15 The type shall be a synonym for `basic_string<Elem, char_traits<Elem>, Wide_alloc>`.

```
explicit wstring_convert(Codecvt* pcvt);
```

```
wstring_convert(Codecvt* pcvt, state_type state);
```

```
explicit wstring_convert(const byte_string& byte_err,
```

```
const wide_string& wide_err = wide_string());
```

16 *Requires:* For the first and second constructors, `pcvt != nullptr`.

17 *Effects:* The first constructor shall store `pcvt` in `cvtptr` and default values in `cvtstate`, `byte_err_string`, and `wide_err_string`. The second constructor shall store `pcvt` in `cvtptr`, `state` in `cvtstate`, and default values in `byte_err_string` and `wide_err_string`; moreover the stored state shall be retained between calls to `from_bytes` and `to_bytes`. The third constructor shall store `new Codecvt` in `cvtptr`, `state_type()` in `cvtstate`, `byte_err` in `byte_err_string`, and `wide_err` in `wide_err_string`.

```
~wstring_convert();
```

18 *Effects:* The destructor shall delete `cvtptr`.

D.14.2 Class template `wbuffer_convert` [depr.conversions.buffer]

1 Class template `wbuffer_convert` looks like a wide stream buffer, but performs all its I/O through an underlying byte stream buffer that you specify when you construct it. Like class template `wstring_convert`, it lets you specify a code conversion facet to perform the conversions, without affecting any streams or locales.

```
namespace std {
    template<class Codecvt, class Elem = wchar_t, class Tr = char_traits<Elem>>
        class wbuffer_convert : public basic_streambuf<Elem, Tr> {
        public:
            using state_type = typename Codecvt::state_type;

            wbuffer_convert() : wbuffer_convert(nullptr) {}
            explicit wbuffer_convert(streambuf* bytebuf,
                                    Codecvt* pcvt = new Codecvt,
                                    state_type state = state_type());

            ~wbuffer_convert();

            wbuffer_convert(const wbuffer_convert&) = delete;
            wbuffer_convert& operator=(const wbuffer_convert&) = delete;

            streambuf* rdbuf() const;
            streambuf* rdbuf(streambuf* bytebuf);

            state_type state() const;

        private:
            streambuf* bufptr;           // exposition only
            Codecvt* cvtptr;            // exposition only
            state_type cvtstate;        // exposition only
        };
    }
```

2 The class template describes a stream buffer that controls the transmission of elements of type `Elem`, whose character traits are described by the class `Tr`, to and from a byte stream buffer of type `streambuf`. Conversion between a sequence of `Elem` values and multibyte sequences is performed by an object of class `Codecvt`, which shall satisfy the requirements of the standard code-conversion facet `codecvt<Elem, char, mbstate_t>`.

3 An object of this class template stores:

- (3.1) — `bufptr` — a pointer to its underlying byte stream buffer
- (3.2) — `cvtptr` — a pointer to the allocated conversion object (which is freed when the `wbuffer_convert` object is destroyed)
- (3.3) — `cvtstate` — a conversion state object

```
state_type state() const;
```

4 *Returns:* `cvtstate`.

```
streambuf* rdbuf() const;
```

5 *Returns:* `bufptr`.

```
streambuf* rdbuf(streambuf* bytebuf);
```

6 *Effects:* Stores `bytebuf` in `bufptr`.

7 *Returns:* The previous value of `bufptr`.

```
using state_type = typename Codecvt::state_type;
```

8 The type shall be a synonym for `Codecvt::state_type`.

```
explicit wbuffer_convert(  
    streambuf* bytebuf,  
    Codecvt* pcvt = new Codecvt,  
    state_type state = state_type());
```

9 *Requires:* pcvt != nullptr.

10 *Effects:* The constructor constructs a stream buffer object, initializes bufptr to bytebuf, initializes cvtptr to pcvt, and initializes cvtstate to state.

```
~wbuffer_convert();
```

11 *Effects:* The destructor shall delete cvtptr.

Bibliography

The following documents are cited informatively in this document.

- ISO/IEC 10967-1:2012, *Information technology — Language independent arithmetic — Part 1: Integer and floating point arithmetic*
- ISO 4217:2015, *Codes for the representation of currencies*

The arithmetic specification described in ISO/IEC 10967-1:2012 is called *LIA-1* in this document.

Cross references

This annex lists each clause or subclause label and the corresponding clause or subclause number and page number, in alphabetical order by label.

accumulate (30.9.2) 1126
 adjacent.difference (30.9.11) 1133
 adjustfield.manip (31.5.6.2) 1169
 alg.3way (29.7.11) 1052
 alg.adjacent.find (29.5.8) 1022
 alg.all_of (29.5.1) 1019
 alg.any_of (29.5.2) 1019
 alg.binary.search (29.7.3) 1040
 alg.c.library (29.8) 1053
 alg.clamp (29.7.9) 1051
 alg.copy (29.6.1) 1027
 alg.count (29.5.9) 1023
 alg.equal (29.5.11) 1024
 alg.fill (29.6.6) 1030
 alg.find (29.5.5) 1021
 alg.find.end (29.5.6) 1021
 alg.find.first.of (29.5.7) 1022
 alg.foreach (29.5.4) 1020
 alg.generate (29.6.7) 1031
 alg.heap.operations (29.7.7) 1047
 alg.is_permutation (29.5.12) 1025
 alg.lex.comparison (29.7.10) 1051
 alg.merge (29.7.5) 1043
 alg.min.max (29.7.8) 1049
 alg.modifying.operations (29.6) 1027
 alg.move (29.6.2) 1028
 alg.none_of (29.5.3) 1019
 alg.nonmodifying (29.5) 1019
 alg.nth.element (29.7.2) 1039
 alg.partitions (29.7.4) 1041
 alg.permutation.generators (29.7.12) 1053
 alg.random.sample (29.6.12) 1034
 alg.random.shuffle (29.6.13) 1035
 alg.remove (29.6.8) 1031
 alg.replace (29.6.5) 1030
 alg.reverse (29.6.10) 1033
 alg.rotate (29.6.11) 1034
 alg.search (29.5.13) 1025
 alg.set.operations (29.7.6) 1044
 alg.shift (29.6.14) 1035
 alg.sort (29.7.1) 1037
 alg.sorting (29.7) 1036
 alg.swap (29.6.3) 1028
 alg.transform (29.6.4) 1029
 alg.unique (29.6.9) 1032
 algorithm.stable (20.5.5.7) 447
 algorithm.syn (29.2) 998
 algorithms (Clause 29) 998
 algorithms.general (29.1) 998
 algorithms.parallel (29.4) 1016
 algorithms.parallel.defns (29.4.1) 1017
 algorithms.parallel.exceptions (29.4.4) 1019
 algorithms.parallel.exec (29.4.3) 1017
 algorithms.parallel.overloads (29.4.5) 1019
 algorithms.parallel.user (29.4.2) 1017
 algorithms.requirements (29.3) 1015
 alloc.errors (21.6.3) 471
 allocator.adaptor (24.13) 619
 allocator.adaptor.cnstr (24.13.3) 621
 allocator.adaptor.members (24.13.4) 622
 allocator.adaptor.syn (24.13.1) 619
 allocator.adaptor.types (24.13.2) 621
 allocator.globals (24.10.10.2) 581
 allocator.members (24.10.10.1) 581
 allocator.requirements (20.5.3.5) 436
 allocator.requirements.completeness (20.5.3.5.1) 441
 allocator.tag (24.10.7) 578
 allocator.traits (24.10.9) 578
 allocator.traits.members (24.10.9.2) 580
 allocator.traits.types (24.10.9.1) 579
 allocator.uses (24.10.8) 578
 allocator.uses.construction (24.10.8.2) 578
 allocator.uses.trait (24.10.8.1) 578
 alt.headers (20.5.4.4) 444
 any (24.8) 560
 any.assign (24.8.3.2) 562
 any.bad_any_cast (24.8.2) 560
 any.class (24.8.3) 560
 any.cons (24.8.3.1) 561
 any.modifiers (24.8.3.3) 563
 any.nonmembers (24.8.4) 563
 any.observers (24.8.3.4) 563
 any.synop (24.8.1) 560
 arithmetic.operations (24.14.6) 629
 arithmetic.operations.divides (24.14.6.4) 630
 arithmetic.operations.minus (24.14.6.2) 629
 arithmetic.operations.modulus (24.14.6.5) 630
 arithmetic.operations.multiplies (24.14.6.3) 630
 arithmetic.operations.negate (24.14.6.6) 631
 arithmetic.operations.plus (24.14.6.1) 629
 array (27.3.7) 895
 array.cons (27.3.7.2) 897
 array.members (27.3.7.3) 897
 array.overview (27.3.7.1) 895
 array.special (27.3.7.4) 897
 array.syn (27.3.2) 893
 array.tuple (27.3.7.6) 897
 array.zero (27.3.7.5) 897
 assertions (23.3) 506

- assertions.assert (23.3.2) 506
- associative (27.4) 919
- associative.general (27.4.1) 919
- associative.map.syn (27.4.2) 919
- associative.reqmts (27.2.6) 873
- associative.reqmts.except (27.2.6.1) 882
- associative.set.syn (27.4.3) 920
- atomics (Clause 33) 1316
- atomics.alias (33.3) 1320
- atomics.fences (33.10) 1337
- atomics.flag (33.9) 1336
- atomics.general (33.1) 1316
- atomics.lockfree (33.5) 1321
- atomics.nonmembers (33.8) 1336
- atomics.order (33.4) 1320
- atomics.ref.float (33.6.3) 1325
- atomics.ref.generic (33.6) 1322
- atomics.ref.int (33.6.2) 1324
- atomics.ref.memop (33.6.5) 1327
- atomics.ref.operations (33.6.1) 1323
- atomics.ref.pointer (33.6.4) 1326
- atomics.syn (33.2) 1316
- atomics.types.float (33.7.3) 1333
- atomics.types.generic (33.7) 1328
- atomics.types.int (33.7.2) 1331
- atomics.types.memop (33.7.5) 1336
- atomics.types.operations (33.7.1) 1328
- atomics.types.pointer (33.7.4) 1334

- back.insert.iter.ops (28.5.2.1.1) 984
- back.insert.iterator (28.5.2.1) 984
- back.inserter (28.5.2.1.2) 985
- bad.alloc (21.6.3.1) 471
- bad.cast (21.7.3) 474
- bad.exception (21.9.3) 477
- bad.typeid (21.7.4) 475
- basefield.manip (31.5.6.3) 1169
- basic (Clause 6) 24
- basic.align (6.6.5) 57
- basic.compound (6.7.2) 61
- basic.def (6.1) 24
- basic.def.odr (6.2) 26
- basic.exec (6.8) 63
- basic.fundamental (6.7.1) 60
- basic.funscope (6.3.5) 32
- basic.ios.cons (31.5.5.2) 1165
- basic.ios.members (31.5.5.3) 1165
- basic.life (6.6.3) 51
- basic.link (6.5) 46
- basic.lookup (6.4) 34
- basic.lookup.argdep (6.4.2) 38
- basic.lookup.classref (6.4.5) 45
- basic.lookup.elab (6.4.4) 44
- basic.lookup.qual (6.4.3) 39
- basic.lookup.udir (6.4.6) 46
- basic.lookup.unqual (6.4.1) 35
- basic.lval (8.2.1) 80
- basic.memobj (6.6) 48
- basic.namespace (10.3) 160

- basic.scope (6.3) 29
- basic.scope.block (6.3.3) 31
- basic.scope.class (6.3.7) 32
- basic.scope.declarative (6.3.1) 29
- basic.scope.enum (6.3.8) 33
- basic.scope.hiding (6.3.10) 34
- basic.scope.namespace (6.3.6) 32
- basic.scope.param (6.3.4) 31
- basic.scope.pdecl (6.3.2) 30
- basic.scope.temp (6.3.9) 33
- basic.start (6.8.3) 71
- basic.start.dynamic (6.8.3.3) 72
- basic.start.main (6.8.3.1) 71
- basic.start.static (6.8.3.2) 71
- basic.start.term (6.8.3.4) 73
- basic.stc (6.6.4) 53
- basic.stc.auto (6.6.4.3) 54
- basic.stc.dynamic (6.6.4.4) 54
- basic.stc.dynamic.allocation (6.6.4.4.1) 55
- basic.stc.dynamic.deallocation (6.6.4.4.2) 56
- basic.stc.dynamic.safety (6.6.4.4.3) 56
- basic.stc.inherit (6.6.4.5) 57
- basic.stc.static (6.6.4.1) 54
- basic.stc.thread (6.6.4.2) 54
- basic.string (25.3.2) 779
- basic.string.hash (25.3.5) 805
- basic.string.literals (25.3.6) 806
- basic.type.qualifier (6.7.3) 62
- basic.types (6.7) 58
- bidirectional.iterators (28.2.6) 974
- binary.search (29.7.3.4) 1041
- bit (30.6) 1065
- bit.cast (30.6.3) 1066
- bit.general (30.6.1) 1065
- bit.pow.two (30.6.4) 1066
- bit.syn (30.6.2) 1065
- bitmask.types (20.4.2.1.4) 427
- bitset (24.9) 565
- bitset.cons (24.9.2.1) 566
- bitset.hash (24.9.3) 570
- bitset.members (24.9.2.2) 567
- bitset.operators (24.9.4) 570
- bitset.syn (24.9.1) 565
- bitwise.operations (24.14.9) 634
- bitwise.operations.and (24.14.9.1) 634
- bitwise.operations.not (24.14.9.4) 635
- bitwise.operations.or (24.14.9.2) 635
- bitwise.operations.xor (24.14.9.3) 635
- byte.strings (20.4.2.1.5.1) 428

- c.files (31.12) 1273
- c.locales (26.5) 858
- c.malloc (24.10.12) 583
- c.math (30.10) 1135
- c.math.abs (30.10.2) 1143
- c.math.fpclass (30.10.4) 1144
- c.math.hypot3 (30.10.3) 1144
- c.math.rand (30.7.9) 1104
- c.mb.wcs (25.5.6) 818

- c.strings (25.5) 815
- cassert.syn (23.3.1) 506
- category.collate (26.4.4) 845
- category ctype (26.4.1) 828
- category.messages (26.4.7) 857
- category.monetary (26.4.6) 852
- category.numeric (26.4.2) 837
- category.time (26.4.5) 847
- cctype.syn (25.5.1) 815
- cerrno.syn (23.4.1) 507
- cfenv (30.4) 1056
- cfenv.syn (30.4.1) 1056
- cfloat.syn (21.3.6) 463
- char.traits (25.2) 770
- char.traits.require (25.2.1) 770
- char.traits.specializations (25.2.3) 772
- char.traits.specializations.char (25.2.3.1) 773
- char.traits.specializations.char16_t (25.2.3.2) 773
- char.traits.specializations.char32_t (25.2.3.3) 774
- char.traits.specializations.wchar_t (25.2.3.4) 774
- char.traits.typedefs (25.2.2) 772
- character.seq (20.4.2.1.5) 428
- charconv (24.20) 767
- charconv.from.chars (24.20.3) 769
- charconv.syn (24.20.1) 767
- charconv.to.chars (24.20.2) 768
- cinttypes.syn (31.12.2) 1275
- class (Clause 12) 218
- class.abstract (13.4) 244
- class.access (Clause 14) 246
- class.access.base (14.2) 248
- class.access.nest (14.7) 254
- class.access.spec (14.1) 247
- class.access.virt (14.5) 253
- class.base.init (15.6.2) 268
- class.bit (12.2.4) 229
- class.ctor (15.7) 273
- class.compare (15.9) 282
- class.compare.default (15.9.1) 282
- class.conv (15.3) 260
- class.conv.ctor (15.3.1) 261
- class.conv.fct (15.3.2) 261
- class.copy (15.8) 275
- class.copy.assign (15.8.2) 278
- class.copy.ctor (15.8.1) 275
- class.copy.elision (15.8.3) 280
- class.ctor (15.1) 255
- class.derived (Clause 13) 235
- class.dtor (15.4) 263
- class.expl.init (15.6.1) 267
- class.free (15.5) 265
- class.friend (14.3) 250
- class.gslice (30.8.6) 1118
- class.gslice.overview (30.8.6.1) 1118
- class.inhctor.init (15.6.3) 272
- class.init (15.6) 267
- class.local (12.4) 233
- class.mem (12.2) 221
- class.member.lookup (13.2) 237
- class.mfct (12.2.1) 225
- class.mfct.non-static (12.2.2) 226
- class.mi (13.1) 236
- class.name (12.1) 220
- class.nest (12.2.5) 230
- class.nested.type (12.2.6) 231
- class.paths (14.6) 254
- class.protected (14.4) 253
- class.qual (6.4.3.1) 40
- class.rel.eq (15.9.3) 283
- class.slice (30.8.4) 1116
- class.slice.overview (30.8.4.1) 1116
- class.spaceship (15.9.2) 282
- class.static (12.2.3) 227
- class.static.data (12.2.3.2) 228
- class.static.mfct (12.2.3.1) 228
- class.temporary (15.2) 257
- class.this (12.2.2.1) 227
- class.union (12.3) 231
- class.union.anon (12.3.1) 232
- class.virtual (13.3) 240
- classification (26.3.3.1) 827
- climits.syn (21.3.5) 463
- locale.syn (26.5.1) 858
- cmath.syn (30.10.1) 1135
- cmp (21.11) 481
- cmp.alg (21.11.4) 487
- cmp.categories (21.11.2) 481
- cmp.categories.pre (21.11.2.1) 481
- cmp.common (21.11.3) 487
- cmp.partialord (21.11.2.4) 483
- cmp.strongeq (21.11.2.3) 482
- cmp.strongord (21.11.2.6) 486
- cmp.weakeq (21.11.2.2) 482
- cmp.weakord (21.11.2.5) 484
- cmplx.over (30.5.9) 1064
- compare.syn (21.11.1) 481
- comparisons (24.14.7) 631
- comparisons.equal_to (24.14.7.1) 631
- comparisons.greater (24.14.7.3) 632
- comparisons.greater_equal (24.14.7.5) 632
- comparisons.less (24.14.7.4) 632
- comparisons.less_equal (24.14.7.6) 633
- comparisons.not_equal_to (24.14.7.2) 632
- complex (30.5.2) 1059
- complex.literals (30.5.10) 1065
- complex.member.ops (30.5.5) 1061
- complex.members (30.5.4) 1061
- complex.numbers (30.5) 1057
- complex.ops (30.5.6) 1062
- complex.special (30.5.3) 1059
- complex.syn (30.5.1) 1057
- complex.transcendentals (30.5.8) 1063
- complex.value.ops (30.5.7) 1063
- compliance (20.5.1.3) 431
- concept.assignable (22.4.8) 496
- concept.boolean (22.5.2) 498
- concept.common (22.4.6) 495
- concept.commonref (22.4.5) 495

- concept.constructible (22.4.11) 498
- concept.convertibleto (22.4.4) 494
- concept.copyconstructible (22.4.14) 498
- concept.defaultconstructible (22.4.12) 498
- concept.derivedfrom (22.4.3) 494
- concept.destructible (22.4.10) 497
- concept.equalitycomparable (22.5.3) 499
- concept.invocable (22.7.2) 501
- concept.moveconstructible (22.4.13) 498
- concept.predicate (22.7.4) 501
- concept.regularinvocable (22.7.3) 501
- concept.relation (22.7.5) 501
- concept.same (22.4.2) 494
- concept.stricttotallyordered (22.5.4) 500
- concept.strictweakorder (22.7.6) 502
- concept.swappable (22.4.9) 496
- concepts (Clause 22) 491
- concepts.callable (22.7) 501
- concepts.callable.general (22.7.1) 501
- concepts.compare (22.5) 498
- concepts.compare.general (22.5.1) 498
- concepts.equality (22.2) 491
- concepts.general (22.1) 491
- concepts.integral (22.4.7) 495
- concepts.lang (22.4) 494
- concepts.lang.general (22.4.1) 494
- concepts.object (22.6) 500
- concepts.syn (22.3) 492
- condition_variable.syn (34.5.1) 1364
- conforming (20.5.5) 446
- conforming.overview (20.5.5.1) 446
- cons.slice (30.8.4.2) 1116
- constexpr.functions (20.5.5.6) 447
- constraints (20.5.4) 441
- constraints.overview (20.5.4.1) 441
- container.adaptors (27.6) 956
- container.adaptors.general (27.6.1) 956
- container.insert.return (27.2.5) 873
- container.node (27.2.4) 870
- container.node.cons (27.2.4.2) 872
- container.node.dtor (27.2.4.3) 872
- container.node.modifiers (27.2.4.5) 873
- container.node.observers (27.2.4.4) 872
- container.node.overview (27.2.4.1) 870
- container.requirements (27.2) 860
- container.requirements.dataraces (27.2.2) 866
- container.requirements.general (27.2.1) 860
- containers (Clause 27) 860
- containers.general (27.1) 860
- contents (20.5.1.1) 430
- contract.syn (21.8.1) 475
- conv (Clause 7) 75
- conv.array (7.2) 76
- conv.bool (7.14) 79
- conv.double (7.9) 78
- conv.fctptr (7.13) 79
- conv.fpint (7.10) 78
- conv.fpprom (7.7) 78
- conv.func (7.3) 76
- conv.integral (7.8) 78
- conv.lval (7.1) 76
- conv.mem (7.12) 79
- conv.prom (7.6) 77
- conv.ptr (7.11) 78
- conv.qual (7.5) 77
- conv.rank (6.7.4) 63
- conv.rval (7.4) 76
- conventions (20.4.2) 426
- conversions (26.3.3.2) 827
- conversions.character (26.3.3.2.1) 827
- cpp (Clause 19) 406
- cpp.concat (19.3.3) 413
- cpp.cond (19.1) 407
- cpp.error (19.5) 416
- cpp.include (19.2) 409
- cpp.line (19.4) 416
- cpp.null (19.7) 416
- cpp.pragma (19.6) 416
- cpp.pragma.op (19.9) 419
- cpp.predefined (19.8) 416
- cpp.replace (19.3) 410
- cpp.rescan (19.3.4) 413
- cpp.scope (19.3.5) 414
- cpp.stringize (19.3.2) 413
- cpp.subst (19.3.1) 411
- csetjmp.syn (21.12.2) 489
- csignal.syn (21.12.3) 489
- cstdarg.syn (21.12.1) 489
- cstddef.syn (21.2.1) 450
- cstdint (21.4) 464
- cstdint.syn (21.4.1) 464
- cstdio.syn (31.12.1) 1273
- cstdlib.syn (21.2.2) 451
- cstring.syn (25.5.3) 816
- ctime.syn (24.17.13) 764
- uchar.syn (25.5.5) 818
- customization.point.object (20.4.2.1.6) 428
- wchar.syn (25.5.4) 817
- wcctype.syn (25.5.2) 816
- dcl.align (10.6.2) 176
- dcl.ambiguous (11.2) 187
- dcl.array (11.3.4) 191
- dcl.asm (10.4) 172
- dcl.attr (10.6) 174
- dcl.attr.contract (10.6.4) 177
- dcl.attr.contract.check (10.6.4.3) 180
- dcl.attr.contract.cond (10.6.4.2) 179
- dcl.attr.contract.syn (10.6.4.1) 177
- dcl.attr.depend (10.6.3) 177
- dcl.attr.deprecated (10.6.5) 182
- dcl.attr.fallthrough (10.6.6) 182
- dcl.attr.grammar (10.6.1) 174
- dcl.attr.likelihood (10.6.7) 182
- dcl.attr.nodiscard (10.6.9) 183
- dcl.attr.noreturn (10.6.10) 184
- dcl.attr.nouniqueaddr (10.6.11) 184
- dcl.attr.unused (10.6.8) 183

- dcl.constexpr (10.1.5) 146
- dcl.dcl (Clause 10) 140
- dcl.decl (Clause 11) 185
- dcl.enum (10.2) 157
- dcl.fct (11.3.5) 192
- dcl.fct.def (11.4) 198
- dcl.fct.def.default (11.4.2) 199
- dcl.fct.def.delete (11.4.3) 200
- dcl.fct.def.general (11.4.1) 198
- dcl.fct.default (11.3.6) 195
- dcl.fct.spec (10.1.2) 144
- dcl.friend (10.1.4) 146
- dcl.init (11.6) 202
- dcl.init.aggr (11.6.1) 206
- dcl.init.list (11.6.4) 212
- dcl.init.ref (11.6.3) 210
- dcl.init.string (11.6.2) 210
- dcl.inline (10.1.6) 148
- dcl.link (10.5) 172
- dcl.meaning (11.3) 188
- dcl.mptr (11.3.3) 191
- dcl.name (11.1) 186
- dcl.ptr (11.3.1) 189
- dcl.ref (11.3.2) 189
- dcl.spec (10.1) 141
- dcl.spec.auto (10.1.7.4) 154
- dcl.stc (10.1.1) 142
- dcl.struct.bind (11.5) 201
- dcl.type (10.1.7) 149
- dcl.type.auto.deduct (10.1.7.4.1) 156
- dcl.type.class.deduct (10.1.7.5) 157
- dcl.type.cv (10.1.7.1) 149
- dcl.type.elab (10.1.7.3) 153
- dcl.type.simple (10.1.7.2) 150
- dcl.typedef (10.1.3) 144
- declval (24.2.6) 522
- default allocator (24.10.10) 580
- definitions (20.3) 421
- defns.access (3.1) 3
- defns.arbitrary.stream (20.3.1) 421
- defns.argument (3.2) 3
- defns.argument.macro (3.3) 3
- defns.argument.templ (3.5) 3
- defns.argument.throw (3.4) 3
- defns.block (3.6) 3
- defns.character (20.3.2) 421
- defns.character.container (20.3.3) 421
- defns.comparison (20.3.4) 421
- defns.component (20.3.5) 421
- defns.cond.supp (3.7) 3
- defns.const.subexpr (20.3.6) 421
- defns.deadlock (20.3.7) 421
- defns.default.behavior.func (20.3.9) 421
- defns.default.behavior.impl (20.3.8) 421
- defns.diagnostic (3.8) 3
- defns.direct-non-list-init (20.3.10) 422
- defns.dynamic.type (3.9) 3
- defns.dynamic.type.prvalue (3.10) 3
- defns.expression-equivalent (20.3.11) 422
- defns.handler (20.3.12) 422
- defns.ill.formed (3.11) 4
- defns.impl.defined (3.12) 4
- defns.impl.limits (3.13) 4
- defns.iostream.templates (20.3.13) 422
- defns.locale.specific (3.14) 4
- defns.modifier (20.3.14) 422
- defns.move.assign (20.3.15) 422
- defns.move.constr (20.3.16) 422
- defns.multibyte (3.15) 4
- defns.ntcts (20.3.17) 422
- defns.observer (20.3.18) 422
- defns.parameter (3.16) 4
- defns.parameter.macro (3.17) 4
- defns.parameter.templ (3.18) 4
- defns.prog.def.spec (20.3.19) 422
- defns.prog.def.type (20.3.20) 422
- defns.referenceable (20.3.21) 423
- defns.regex.collating.element (32.2.1) 1277
- defns.regex.finite.state.machine (32.2.2) 1277
- defns.regex.format.specifier (32.2.3) 1277
- defns.regex.matched (32.2.4) 1277
- defns.regex.primary.equivalence.class (32.2.5) 1277
- defns.regex.regular.expression (32.2.6) 1277
- defns.regex.subexpression (32.2.7) 1278
- defns.replacement (20.3.22) 423
- defns.repositional.stream (20.3.23) 423
- defns.required.behavior (20.3.24) 423
- defns.reserved.function (20.3.25) 423
- defns.signature (3.19) 4
- defns.signature.member (3.22) 4
- defns.signature.member.spec (3.24) 5
- defns.signature.member.templ (3.23) 5
- defns.signature.spec (3.21) 4
- defns.signature.templ (3.20) 4
- defns.stable (20.3.26) 423
- defns.static.type (3.25) 5
- defns.traits (20.3.27) 423
- defns.unlock (3.26) 5
- defns.undefined (3.27) 5
- defns.unspecified (3.28) 5
- defns.valid (20.3.28) 423
- defns.well.formed (3.29) 5
- denorm.style (21.3.3.2) 457
- depr (Annex D) 1430
- depr.arith.conv.enum (D.1) 1430
- depr.array.comp (D.3) 1430
- depr.c.headers (D.6) 1431
- depr.c.headers.other (D.6.6) 1432
- depr.capture.this (D.2) 1430
- depr.codecvt.syn (D.13.1) 1443
- depr.complex.h.syn (D.6.1) 1431
- depr.conversions (D.14) 1444
- depr.conversions.buffer (D.14.2) 1447
- depr.conversions.string (D.14.1) 1444
- depr.impldec (D.5) 1431
- depr.iso646.h.syn (D.6.2) 1431
- depr.istrstream (D.8.3) 1437

- depr.istrstream.cons (D.8.3.1) 1438
- depr.istrstream.members (D.8.3.2) 1438
- depr.iterator.basic (D.10.1) 1440
- depr.iterator.primitives (D.10) 1440
- depr.locale.stdcvt (D.13) 1443
- depr.locale.stdcvt.req (D.13.2) 1443
- depr.meta.types (D.9) 1440
- depr.ostrstream (D.8.4) 1438
- depr.ostrstream.cons (D.8.4.1) 1438
- depr.ostrstream.members (D.8.4.2) 1439
- depr.relops (D.7) 1432
- depr.static_constexpr (D.4) 1430
- depr.stdalign.h.syn (D.6.3) 1431
- depr.stdbool.h.syn (D.6.4) 1431
- depr.str.strstreams (D.8) 1432
- depr.string.capacity (D.12) 1443
- depr.strstream (D.8.5) 1439
- depr.strstream.cons (D.8.5.1) 1439
- depr.strstream.dest (D.8.5.2) 1440
- depr.strstream.oper (D.8.5.3) 1440
- depr.strstream.syn (D.8.1) 1432
- depr.strstreambuf (D.8.2) 1432
- depr.strstreambuf.cons (D.8.2.1) 1434
- depr.strstreambuf.members (D.8.2.2) 1435
- depr.strstreambuf.virtuals (D.8.2.3) 1435
- depr.tgmath.h.syn (D.6.5) 1431
- depr.util.smartptr.shared.atomic (D.11) 1441
- deque (27.3.8) 898
- deque.capacity (27.3.8.3) 900
- deque.cons (27.3.8.2) 900
- deque.modifiers (27.3.8.4) 900
- deque.overview (27.3.8.1) 898
- deque.syn (27.3.3) 893
- derivation (20.5.5.11) 448
- derived.classes (20.5.4.5) 444
- description (20.4) 424
- diagnostics (Clause 23) 503
- diagnostics.general (23.1) 503
- diff (Annex C) 1406
- diff.basic (C.1.2) 1407
- diff.char16 (C.6.2.1) 1428
- diff.class (C.1.8) 1412
- diff.conv (C.1.3) 1407
- diff.cpp (C.1.10) 1414
- diff.cpp03 (C.2) 1414
- diff.cpp03.algorithms (C.2.14) 1418
- diff.cpp03.containers (C.2.13) 1417
- diff.cpp03.conv (C.2.2) 1415
- diff.cpp03.dcl.dcl (C.2.4) 1415
- diff.cpp03.dcl.decl (C.2.5) 1415
- diff.cpp03.diagnostics (C.2.10) 1417
- diff.cpp03.expr (C.2.3) 1415
- diff.cpp03.input.output (C.2.16) 1419
- diff.cpp03.language.support (C.2.9) 1417
- diff.cpp03.lex (C.2.1) 1414
- diff.cpp03.library (C.2.8) 1416
- diff.cpp03.numerics (C.2.15) 1419
- diff.cpp03.special (C.2.6) 1415
- diff.cpp03.strings (C.2.12) 1417
- diff.cpp03.temp (C.2.7) 1416
- diff.cpp03.utilities (C.2.11) 1417
- diff.cpp11 (C.3) 1419
- diff.cpp11.basic (C.3.2) 1420
- diff.cpp11.dcl.dcl (C.3.4) 1420
- diff.cpp11.dcl.decl (C.3.5) 1420
- diff.cpp11.expr (C.3.3) 1420
- diff.cpp11.input.output (C.3.7) 1421
- diff.cpp11.lex (C.3.1) 1419
- diff.cpp11.library (C.3.6) 1421
- diff.cpp14 (C.4) 1421
- diff.cpp14.containers (C.4.11) 1424
- diff.cpp14.dcl.dcl (C.4.3) 1422
- diff.cpp14.decl (C.4.4) 1422
- diff.cpp14.depr (C.4.12) 1424
- diff.cpp14.except (C.4.7) 1423
- diff.cpp14.expr (C.4.2) 1421
- diff.cpp14.lex (C.4.1) 1421
- diff.cpp14.library (C.4.8) 1423
- diff.cpp14.special (C.4.5) 1422
- diff.cpp14.string (C.4.10) 1424
- diff.cpp14.temp (C.4.6) 1423
- diff.cpp14.utilities (C.4.9) 1423
- diff.cpp17 (C.5) 1424
- diff.cpp17.containers (C.5.8) 1427
- diff.cpp17.dcl.decl (C.5.3) 1425
- diff.cpp17.depr (C.5.9) 1427
- diff.cpp17.except (C.5.6) 1426
- diff.cpp17.expr (C.5.2) 1425
- diff.cpp17.lex (C.5.1) 1424
- diff.cpp17.library (C.5.7) 1426
- diff.cpp17.special (C.5.4) 1426
- diff.cpp17.temp (C.5.5) 1426
- diff.dcl (C.1.6) 1409
- diff.decl (C.1.7) 1411
- diff.expr (C.1.4) 1408
- diff.header.assert.h (C.6.2.3) 1428
- diff.header.iso646.h (C.6.2.4) 1428
- diff.header.stdalign.h (C.6.2.5) 1428
- diff.header.stdbool.h (C.6.2.6) 1428
- diff.iso (C.1) 1406
- diff.lex (C.1.1) 1406
- diff.library (C.6) 1428
- diff.malloc (C.6.4.2) 1429
- diff.mods.to.behavior (C.6.4) 1429
- diff.mods.to.declarations (C.6.3) 1429
- diff.mods.to.definitions (C.6.2) 1428
- diff.mods.to.headers (C.6.1) 1428
- diff.null (C.6.2.7) 1429
- diff.offsetof (C.6.4.1) 1429
- diff.special (C.1.9) 1413
- diff.stat (C.1.5) 1408
- diff.wchar.t (C.6.2.2) 1428
- domain.error (23.2.3) 504
- enumerated.types (20.4.2.1.3) 427
- equal.range (29.7.3.3) 1041
- errno (23.4) 507
- error.reporting (31.5.7) 1170

- except (Clause 18) 397
- except.ctor (18.2) 399
- except.handle (18.3) 400
- except.nested (21.9.7) 479
- except.spec (18.4) 401
- except.special (18.5) 404
- except.terminate (18.5.1) 404
- except.throw (18.1) 398
- except.uncaught (18.5.2) 405
- exception (21.9.2) 476
- exception.syn (21.9.1) 476
- exception.terminate (21.9.4) 477
- exclusive.scan (30.9.7) 1130
- execpol (24.19) 765
- execpol.general (24.19.1) 765
- execpol.objects (24.19.7) 767
- execpol.par (24.19.5) 766
- execpol.parunseq (24.19.6) 766
- execpol.seq (24.19.4) 766
- execpol.type (24.19.3) 766
- execution.syn (24.19.2) 766
- expos.only.types (20.4.2.1.2) 426
- expr (Clause 8) 80
- expr.add (8.5.6) 119
- expr.alignof (8.5.2.6) 117
- expr.arith.conv (8.3) 83
- expr.ass (8.5.18) 125
- expr.bit.and (8.5.11) 123
- expr.call (8.5.1.2) 100
- expr.cast (8.5.3) 117
- expr.comma (8.5.19) 126
- expr.compound (8.5) 99
- expr.cond (8.5.16) 124
- expr.const (8.6) 126
- expr.const.cast (8.5.1.11) 108
- expr.context (8.2.3) 83
- expr.delete (8.5.2.5) 115
- expr.dynamic.cast (8.5.1.7) 103
- expr.eq (8.5.10) 122
- expr.log.and (8.5.14) 123
- expr.log.or (8.5.15) 123
- expr.mptr.oper (8.5.4) 118
- expr.mul (8.5.5) 119
- expr.new (8.5.2.4) 111
- expr.or (8.5.13) 123
- expr.post (8.5.1) 99
- expr.post.incr (8.5.1.6) 103
- expr.pre (8.1) 80
- expr.pre.incr (8.5.2.2) 110
- expr.prim (8.4) 84
- expr.prim.fold (8.4.6) 95
- expr.prim.id (8.4.4) 85
- expr.prim.id.qual (8.4.4.2) 86
- expr.prim.id.unqual (8.4.4.1) 86
- expr.prim.lambda (8.4.5) 87
- expr.prim.lambda.capture (8.4.5.2) 91
- expr.prim.lambda.closure (8.4.5.1) 87
- expr.prim.literal (8.4.1) 84
- expr.prim.paren (8.4.3) 85
- expr.prim.req (8.4.7) 96
- expr.prim.req.compound (8.4.7.3) 98
- expr.prim.req.nested (8.4.7.4) 98
- expr.prim.req.simple (8.4.7.1) 97
- expr.prim.req.type (8.4.7.2) 97
- expr.prim.this (8.4.2) 84
- expr.prop (8.2) 80
- expr.pseudo (8.5.1.4) 102
- expr.ref (8.5.1.5) 102
- expr.reinterpret.cast (8.5.1.10) 107
- expr.rel (8.5.9) 121
- expr.shift (8.5.7) 120
- expr.sizeof (8.5.2.3) 110
- expr.spaceship (8.5.8) 120
- expr.static.cast (8.5.1.9) 105
- expr.sub (8.5.1.1) 99
- expr.throw (8.5.17) 125
- expr.type (8.2.2) 82
- expr.type.conv (8.5.1.3) 101
- expr.typeid (8.5.1.8) 104
- expr.unary (8.5.2) 109
- expr.unary.noexcept (8.5.2.7) 117
- expr.unary.op (8.5.2.1) 109
- expr.xor (8.5.12) 123
- ext.manip (31.7.7) 1199
- extern.names (20.5.4.3.3) 443
- extern.types (20.5.4.3.4) 444
- facet ctype.char.dtor (26.4.1.3.1) 832
- facet ctype.char.members (26.4.1.3.2) 832
- facet ctype.char.statics (26.4.1.3.3) 833
- facet ctype.char.virtuals (26.4.1.3.4) 833
- facet ctype.special (26.4.1.3) 831
- facet.num.get.members (26.4.2.1.1) 838
- facet.num.get.virtuals (26.4.2.1.2) 838
- facet.num.put.members (26.4.2.2.1) 841
- facet.num.put.virtuals (26.4.2.2.2) 841
- facet.numpunct (26.4.3) 844
- facet.numpunct.members (26.4.3.1.1) 844
- facet.numpunct.virtuals (26.4.3.1.2) 845
- file.streams (31.9) 1210
- filebuf (31.9.2) 1211
- filebuf.assign (31.9.2.2) 1213
- filebuf.cons (31.9.2.1) 1212
- filebuf.members (31.9.2.3) 1213
- filebuf.virtuals (31.9.2.4) 1214
- filesystems (31.11) 1228
- floatfield.manip (31.5.6.4) 1169
- fmtflags.manip (31.5.6.1) 1168
- fmtflags.state (31.5.3.2) 1160
- forward (24.2.4) 521
- forward.iterators (28.2.5) 973
- forward_list.syn (27.3.4) 894
- forwardlist (27.3.9) 901
- forwardlist.access (27.3.9.4) 904
- forwardlist.cons (27.3.9.2) 903
- forwardlist.iter (27.3.9.3) 904
- forwardlist.modifiers (27.3.9.5) 904
- forwardlist.ops (27.3.9.6) 905

- forwardlist.overview (27.3.9.1) 901
- fp.style (21.3.3) 456
- fpos (31.5.4) 1162
- fpos.members (31.5.4.1) 1163
- fpos.operations (31.5.4.2) 1163
- front.insert.iter.ops (28.5.2.2.1) 985
- front.insert.iterator (28.5.2.2) 985
- front.inserter (28.5.2.2.2) 986
- fs.class.directory_entry (31.11.11) 1253
- fs.class.directory_iterator (31.11.12) 1257
- fs.class.file_status (31.11.10) 1252
- fs.class.filesystem_error (31.11.8) 1248
- fs.class.path (31.11.7) 1233
- fs.class.rec.dir.itr (31.11.13) 1259
- fs.conform.9945 (31.11.2.1) 1228
- fs.conform.os (31.11.2.2) 1228
- fs.conformance (31.11.2) 1228
- fs.dir.entry.cons (31.11.11.1) 1254
- fs.dir.entry.mods (31.11.11.2) 1254
- fs.dir.entry.obs (31.11.11.3) 1255
- fs.dir.itr.members (31.11.12.1) 1258
- fs.dir.itr.nonmembers (31.11.12.2) 1258
- fs.enum (31.11.9) 1249
- fs.enum.copy.opts (31.11.9.3) 1250
- fs.enum.dir.opts (31.11.9.6) 1251
- fs.enum.file_type (31.11.9.2) 1249
- fs.enum.path.format (31.11.9.1) 1249
- fs.enum.perm.opts (31.11.9.5) 1251
- fs.enum.perms (31.11.9.4) 1251
- fs.err.report (31.11.6) 1232
- fs.file_status.cons (31.11.10.1) 1252
- fs.file_status.mods (31.11.10.3) 1252
- fs.file_status.obs (31.11.10.2) 1252
- fs.filesystem.syn (31.11.5) 1229
- fs.filesystem_error.members (31.11.8.1) 1248
- fs.general (31.11.1) 1228
- fs.norm.ref (31.11.3) 1229
- fs.op.absolute (31.11.14.1) 1261
- fs.op.canonical (31.11.14.2) 1262
- fs.op.copy (31.11.14.3) 1262
- fs.op.copy_file (31.11.14.4) 1264
- fs.op.copy_symlink (31.11.14.5) 1264
- fs.op.create_dir_symlk (31.11.14.8) 1265
- fs.op.create_directories (31.11.14.6) 1265
- fs.op.create_directory (31.11.14.7) 1265
- fs.op.create_hard_lk (31.11.14.9) 1265
- fs.op.create_symlink (31.11.14.10) 1266
- fs.op.current_path (31.11.14.11) 1266
- fs.op.equivalent (31.11.14.12) 1266
- fs.op.exists (31.11.14.13) 1267
- fs.op.file_size (31.11.14.14) 1267
- fs.op.funcs (31.11.14) 1261
- fs.op.hard_lk_ct (31.11.14.15) 1267
- fs.op.is_block_file (31.11.14.16) 1267
- fs.op.is_char_file (31.11.14.17) 1267
- fs.op.is_directory (31.11.14.18) 1268
- fs.op.is_empty (31.11.14.19) 1268
- fs.op.is_fifo (31.11.14.20) 1268
- fs.op.is_other (31.11.14.21) 1268
- fs.op.is_regular_file (31.11.14.22) 1268
- fs.op.is_socket (31.11.14.23) 1269
- fs.op.is_symlink (31.11.14.24) 1269
- fs.op.last_write_time (31.11.14.25) 1269
- fs.op.permissions (31.11.14.26) 1269
- fs.op.proximate (31.11.14.27) 1270
- fs.op.read_symlink (31.11.14.28) 1270
- fs.op.relative (31.11.14.29) 1270
- fs.op.remove (31.11.14.30) 1270
- fs.op.remove_all (31.11.14.31) 1271
- fs.op.rename (31.11.14.32) 1271
- fs.op.resize_file (31.11.14.33) 1271
- fs.op.space (31.11.14.34) 1271
- fs.op.status (31.11.14.35) 1271
- fs.op.status_known (31.11.14.36) 1273
- fs.op.symlink_status (31.11.14.37) 1273
- fs.op.temp_dir_path (31.11.14.38) 1273
- fs.op.weakly_canonical (31.11.14.39) 1273
- fs.path.append (31.11.7.4.3) 1240
- fs.path.assign (31.11.7.4.2) 1240
- fs.path.compare (31.11.7.4.8) 1243
- fs.path.concat (31.11.7.4.4) 1241
- fs.path.construct (31.11.7.4.1) 1239
- fs.path.cvt (31.11.7.2) 1237
- fs.path.decompose (31.11.7.4.9) 1244
- fs.path.factory (31.11.7.7.1) 1248
- fs.path.fmt.cvt (31.11.7.2.1) 1237
- fs.path.gen (31.11.7.4.11) 1245
- fs.path.generic (31.11.7.1) 1236
- fs.path.generic.obs (31.11.7.4.7) 1243
- fs.path.io (31.11.7.6) 1247
- fs.path.itr (31.11.7.5) 1246
- fs.path.member (31.11.7.4) 1239
- fs.path.modifiers (31.11.7.4.5) 1241
- fs.path.native.obs (31.11.7.4.6) 1242
- fs.path.nonmember (31.11.7.7) 1247
- fs.path.query (31.11.7.4.10) 1245
- fs.path.req (31.11.7.3) 1238
- fs.path.type.cvt (31.11.7.2.2) 1238
- fs.race.behavior (31.11.2.3) 1228
- fs.rec.dir.itr.members (31.11.13.1) 1259
- fs.rec.dir.itr.nonmembers (31.11.13.2) 1261
- fs.req (31.11.4) 1229
- fs.req.namespace (31.11.4.1) 1229
- fstream (31.9.5) 1220
- fstream.assign (31.9.5.2) 1222
- fstream.cons (31.9.5.1) 1221
- fstream.members (31.9.5.3) 1222
- fstream.syn (31.9.1) 1210
- func.bind (24.14.12) 637
- func.bind.bind (24.14.12.3) 637
- func.bind.isbind (24.14.12.1) 637
- func.bind.isplace (24.14.12.2) 637
- func.bind.place (24.14.12.4) 638
- func.def (24.14.2) 627
- func.identity (24.14.10) 635
- func.invoke (24.14.4) 628
- func.memfn (24.14.13) 639
- func.not_fn (24.14.11) 636

- func.require (24.14.3) 627
- func.search (24.14.15) 642
- func.search.bm (24.14.15.2) 643
- func.search.bmh (24.14.15.3) 644
- func.search.default (24.14.15.1) 643
- func.wrap (24.14.14) 639
- func.wrap.badcall (24.14.14.1) 639
- func.wrap.badcall.const (24.14.14.1.1) 639
- func.wrap.func (24.14.14.2) 639
- func.wrap.func.alg (24.14.14.2.7) 642
- func.wrap.func.cap (24.14.14.2.3) 642
- func.wrap.func.con (24.14.14.2.1) 640
- func.wrap.func.inv (24.14.14.2.4) 642
- func.wrap.func.mod (24.14.14.2.2) 642
- func.wrap.func.nullptr (24.14.14.2.6) 642
- func.wrap.func.targ (24.14.14.2.5) 642
- function.objects (24.14) 624
- functional.syn (24.14.1) 625
- functions.within.classes (20.4.2.2) 429
- future.syn (34.6.2) 1370
- futures (34.6) 1370
- futures.async (34.6.9) 1380
- futures.errors (34.6.3) 1371
- futures.future_error (34.6.4) 1372
- futures.overview (34.6.1) 1370
- futures.promise (34.6.6) 1373
- futures.shared_future (34.6.8) 1377
- futures.state (34.6.5) 1372
- futures.task (34.6.10) 1381
- futures.task.members (34.6.10.1) 1382
- futures.task.nonmembers (34.6.10.2) 1383
- futures.unique_future (34.6.7) 1375

- get.new.handler (21.6.3.5) 472
- get.terminate (21.9.4.3) 478
- global.functions (20.5.5.4) 446
- gram (Annex A) 1384
- gram.basic (A.3) 1388
- gram.class (A.8) 1399
- gram.cpp (A.14) 1402
- gram.dcl (A.6) 1393
- gram.decl (A.7) 1397
- gram.derived (A.9) 1400
- gram.except (A.13) 1402
- gram.expr (A.4) 1388
- gram.key (A.1) 1384
- gram.lex (A.2) 1384
- gram.over (A.11) 1400
- gram.special (A.10) 1400
- gram.stmt (A.5) 1392
- gram.temp (A.12) 1401
- gslice.access (30.8.6.3) 1119
- gslice.array.assign (30.8.7.2) 1120
- gslice.array.comp.assign (30.8.7.3) 1120
- gslice.array.fill (30.8.7.4) 1120
- gslice.cons (30.8.6.2) 1119

- handler.functions (20.5.4.7) 444
- hardware.interference (21.6.5) 473

- hash.requirements (20.5.3.4) 435
- headers (20.5.1.2) 430

- ifstream (31.9.3) 1216
- ifstream.assign (31.9.3.2) 1218
- ifstream.cons (31.9.3.1) 1217
- ifstream.members (31.9.3.3) 1218
- implimits (Annex B) 1404
- includes (29.7.6.1) 1044
- inclusive.scan (30.9.8) 1131
- indirect.array.assign (30.8.9.2) 1122
- indirect.array.comp.assign (30.8.9.3) 1122
- indirect.array.fill (30.8.9.4) 1122
- initializer_list.syn (21.10.1) 480
- inner.product (30.9.4) 1128
- input.iterators (28.2.3) 972
- input.output (Clause 31) 1150
- input.output.general (31.1) 1150
- input.streams (31.7.4) 1179
- insert.iter.ops (28.5.2.3.1) 986
- insert.iterator (28.5.2.3) 986
- insert.iterators (28.5.2) 984
- inserter (28.5.2.3.2) 987
- intro (Clause 4) 6
- intro.abstract (4.1.1) 6
- intro.ack (4.4) 8
- intro.compliance (4.1) 6
- intro.defs (Clause 3) 3
- intro.execution (6.8.1) 63
- intro.memory (6.6.1) 48
- intro.multithread (6.8.2) 66
- intro.object (6.6.2) 49
- intro.progress (6.8.2.2) 69
- intro.races (6.8.2.1) 66
- intro.refs (Clause 2) 2
- intro.scope (Clause 1) 1
- intro.structure (4.2) 8
- intseq (24.3) 522
- intseq.general (24.3.1) 522
- intseq.intseq (24.3.2) 522
- intseq.make (24.3.3) 522
- invalid.argument (23.2.4) 504
- iomanip.syn (31.7.3) 1179
- ios (31.5.5) 1164
- ios.base (31.5.3) 1156
- ios.base.callback (31.5.3.6) 1162
- ios.base.cons (31.5.3.7) 1162
- ios.base.locales (31.5.3.3) 1161
- ios.base.storage (31.5.3.5) 1161
- ios.members.static (31.5.3.4) 1161
- ios.overview (31.5.5.1) 1164
- ios.syn (31.5.1) 1155
- ios.types (31.5.3.1) 1158
- ios::failure (31.5.3.1.1) 1158
- ios::fmtflags (31.5.3.1.2) 1158
- ios::Init (31.5.3.1.6) 1160
- ios::iostate (31.5.3.1.3) 1158
- ios::openmode (31.5.3.1.4) 1158
- ios::seekdir (31.5.3.1.5) 1158

- iosfwd.syn (31.3.1) 1151
- iostate.flags (31.5.5.4) 1167
- iostream.assign (31.7.4.6.3) 1190
- iostream.cons (31.7.4.6.1) 1189
- iostream.dest (31.7.4.6.2) 1189
- iostream.format (31.7) 1178
- iostream.forward (31.3) 1151
- iostream.forward.overview (31.3.2) 1153
- iostream.limits.imbue (31.2.1) 1150
- iostream.objects (31.4) 1153
- iostream.objects.overview (31.4.2) 1153
- iostream.syn (31.4.1) 1153
- iostreamclass (31.7.4.6) 1189
- iostreams.base (31.5) 1155
- iostreams.limits.pos (31.2.2) 1151
- iostreams.requirements (31.2) 1150
- iostreams.threadsafety (31.2.3) 1151
- is.heap (29.7.7.5) 1048
- is.sorted (29.7.1.5) 1039
- istream (31.7.4.1) 1179
- istream.assign (31.7.4.1.2) 1181
- istream.cons (31.7.4.1.1) 1181
- istream.extractors (31.7.4.2.3) 1183
- istream.formatted (31.7.4.2) 1182
- istream.formatted.arithmetic (31.7.4.2.2) 1182
- istream.formatted.reqmts (31.7.4.2.1) 1182
- istream.iterator (28.6.1) 990
- istream.iterator.cons (28.6.1.1) 991
- istream.iterator.ops (28.6.1.2) 992
- istream.manip (31.7.4.4) 1188
- istream.rvalue (31.7.4.5) 1189
- istream.syn (31.7.1) 1178
- istream.unformatted (31.7.4.3) 1185
- istream::sentry (31.7.4.1.3) 1181
- istreambuf.iterator (28.6.3) 993
- istreambuf.iterator.cons (28.6.3.2) 994
- istreambuf.iterator.ops (28.6.3.3) 995
- istreambuf.iterator.proxy (28.6.3.1) 994
- istringstream (31.8.3) 1206
- istringstream.assign (31.8.3.2) 1207
- istringstream.cons (31.8.3.1) 1207
- istringstream.members (31.8.3.3) 1207
- iterator.container (28.8) 997
- iterator.iterators (28.2.2) 971
- iterator.operations (28.4.3) 980
- iterator.primitives (28.4) 978
- iterator.range (28.7) 996
- iterator.requirements (28.2) 970
- iterator.requirements.general (28.2.1) 970
- iterator.synopsis (28.3) 975
- iterator.traits (28.4.1) 978
- iterators (Clause 28) 970
- iterators.general (28.1) 970
- language.support (Clause 21) 450
- length.error (23.2.5) 504
- lex (Clause 5) 9
- lex.bool (5.13.6) 21
- lex.ccon (5.13.3) 17
- lex.charset (5.3) 10
- lex.comment (5.7) 12
- lex.digraph (5.5) 12
- lex.ext (5.13.8) 21
- lex.fcon (5.13.4) 18
- lex.header (5.8) 12
- lex.icon (5.13.2) 15
- lex.key (5.11) 14
- lex.literal (5.13) 15
- lex.literal.kinds (5.13.1) 15
- lex.name (5.10) 13
- lex.nullptr (5.13.7) 21
- lex.operators (5.12) 15
- lex.phases (5.2) 9
- lex.pppnumber (5.9) 13
- lex.pptoken (5.4) 11
- lex.separate (5.1) 9
- lex.string (5.13.5) 19
- lex.token (5.6) 12
- lib.types.movedfrom (20.5.5.15) 449
- library (Clause 20) 420
- library.c (20.2) 421
- library.general (20.1) 420
- limits.syn (21.3.2) 456
- list (27.3.10) 907
- list.capacity (27.3.10.3) 910
- list.cons (27.3.10.2) 909
- list.modifiers (27.3.10.4) 910
- list.ops (27.3.10.5) 911
- list.overview (27.3.10.1) 907
- list.syn (27.3.5) 894
- locale (26.3.1) 821
- locale.categories (26.4) 828
- locale.category (26.3.1.1.1) 823
- locale.codecvt (26.4.1.4) 833
- locale.codecvt.byname (26.4.1.5) 836
- locale.codecvt.members (26.4.1.4.1) 834
- locale.codecvt.virtuals (26.4.1.4.2) 835
- locale.collate (26.4.4.1) 845
- locale.collate.byname (26.4.4.2) 846
- locale.collate.members (26.4.4.1.1) 846
- locale.collate.virtuals (26.4.4.1.2) 846
- locale.cons (26.3.1.2) 825
- locale.convenience (26.3.3) 827
- locale.cctype (26.4.1.1) 828
- locale.cctype.byname (26.4.1.2) 831
- locale.cctype.members (26.4.1.1.1) 829
- locale.cctype.virtuals (26.4.1.1.2) 829
- locale.facet (26.3.1.1.2) 824
- locale.global.templates (26.3.2) 827
- locale.id (26.3.1.1.3) 825
- locale.members (26.3.1.3) 826
- locale.messages (26.4.7.1) 857
- locale.messages.byname (26.4.7.2) 858
- locale.messages.members (26.4.7.1.1) 857
- locale.messages.virtuals (26.4.7.1.2) 857
- locale.money.get (26.4.6.1) 852
- locale.money.get.members (26.4.6.1.1) 852
- locale.money.get.virtuals (26.4.6.1.2) 852

- locale.money.put (26.4.6.2) 853
- locale.money.put.members (26.4.6.2.1) 854
- locale.money.put.virtuals (26.4.6.2.2) 854
- locale.money.punct (26.4.6.3) 854
- locale.money.punct.byname (26.4.6.4) 856
- locale.money.punct.members (26.4.6.3.1) 856
- locale.money.punct.virtuals (26.4.6.3.2) 856
- locale.nm.put (26.4.2.2) 841
- locale.num.get (26.4.2.1) 837
- locale.numpunct (26.4.3.1) 844
- locale.numpunct.byname (26.4.3.2) 845
- locale.operators (26.3.1.4) 826
- locale.statics (26.3.1.5) 827
- locale.syn (26.2) 820
- locale.time.get (26.4.5.1) 847
- locale.time.get.byname (26.4.5.2) 850
- locale.time.get.members (26.4.5.1.1) 848
- locale.time.get.virtuals (26.4.5.1.2) 849
- locale.time.put (26.4.5.3) 850
- locale.time.put.byname (26.4.5.4) 851
- locale.time.put.members (26.4.5.3.1) 851
- locale.time.put.virtuals (26.4.5.3.2) 851
- locale.types (26.3.1.1) 823
- locales (26.3) 821
- localization (Clause 26) 820
- localization.general (26.1) 820
- logic.error (23.2.2) 503
- logical.operations (24.14.8) 633
- logical.operations.and (24.14.8.1) 633
- logical.operations.not (24.14.8.3) 634
- logical.operations.or (24.14.8.2) 634
- lower.bound (29.7.3.1) 1040

- macro.names (20.5.4.3.2) 443
- make.heap (29.7.7.3) 1048
- map (27.4.4) 921
- map.access (27.4.4.3) 925
- map.cons (27.4.4.2) 925
- map.modifiers (27.4.4.4) 925
- map.overview (27.4.4.1) 921
- mask.array.assign (30.8.8.2) 1121
- mask.array.comp.assign (30.8.8.3) 1121
- mask.array.fill (30.8.8.4) 1121
- mem.poly.allocator.class (24.12.3) 611
- mem.poly.allocator.ctor (24.12.3.1) 612
- mem.poly.allocator.eq (24.12.3.3) 614
- mem.poly.allocator.mem (24.12.3.2) 613
- mem.res (24.12) 610
- mem.res.class (24.12.2) 610
- mem.res.eq (24.12.2.3) 611
- mem.res.global (24.12.4) 614
- mem.res.monotonic.buffer (24.12.6) 618
- mem.res.monotonic.buffer.ctor (24.12.6.1) 618
- mem.res.monotonic.buffer.mem (24.12.6.2) 619
- mem.res.pool (24.12.5) 615
- mem.res.pool.ctor (24.12.5.3) 617
- mem.res.pool.mem (24.12.5.4) 617
- mem.res.pool.options (24.12.5.2) 616
- mem.res.pool.overview (24.12.5.1) 615

- mem.res.private (24.12.2.2) 611
- mem.res.public (24.12.2.1) 611
- mem.res.syn (24.12.1) 610
- member.functions (20.5.5.5) 447
- memory (24.10) 570
- memory.general (24.10.1) 570
- memory.syn (24.10.2) 570
- meta (24.15) 646
- meta.endian (24.15.9) 669
- meta.help (24.15.3) 652
- meta.logical (24.15.8) 668
- meta.rel (24.15.6) 661
- meta.rqmts (24.15.1) 646
- meta.trans (24.15.7) 662
- meta.trans.arr (24.15.7.4) 664
- meta.trans.cv (24.15.7.1) 662
- meta.trans.other (24.15.7.6) 664
- meta.trans.ptr (24.15.7.5) 664
- meta.trans.ref (24.15.7.2) 663
- meta.trans.sign (24.15.7.3) 663
- meta.type.synop (24.15.2) 646
- meta.unary (24.15.4) 653
- meta.unary.cat (24.15.4.1) 653
- meta.unary.comp (24.15.4.2) 654
- meta.unary.prop (24.15.4.3) 654
- meta.unary.prop.query (24.15.5) 660
- mismatch (29.5.10) 1023
- move.iter.cons (28.5.3.3) 988
- move.iter.elem (28.5.3.5) 989
- move.iter.nav (28.5.3.6) 989
- move.iter.nonmember (28.5.3.8) 990
- move.iter.op.comp (28.5.3.7) 989
- move.iter.op.conv (28.5.3.4) 988
- move.iter.requirements (28.5.3.2) 988
- move.iterator (28.5.3.1) 987
- move.iterators (28.5.3) 987
- multibyte.strings (20.4.2.1.5.2) 428
- multimap (27.4.5) 926
- multimap.cons (27.4.5.2) 929
- multimap.modifiers (27.4.5.3) 930
- multimap.overview (27.4.5.1) 926
- multiset (27.4.7) 933
- multiset.cons (27.4.7.2) 936
- multiset.overview (27.4.7.1) 933
- mutex.syn (34.4.1) 1346

- namespace.alias (10.3.2) 163
- namespace.constraints (20.5.4.2) 441
- namespace.def (10.3.1) 160
- namespace.future (20.5.4.2.3) 442
- namespace.memdef (10.3.1.2) 162
- namespace.posix (20.5.4.2.2) 442
- namespace.qual (6.4.3.2) 41
- namespace.std (20.5.4.2.1) 441
- namespace.udecl (10.3.3) 164
- namespace.udir (10.3.4) 169
- namespace.unnamed (10.3.1.1) 162
- narrow.stream.objects (31.4.3) 1154
- new.badlength (21.6.3.2) 472

- new.delete (21.6.2) 467
- new.delete.array (21.6.2.2) 469
- new.delete.dataraces (21.6.2.4) 471
- new.delete.placement (21.6.2.3) 470
- new.delete.single (21.6.2.1) 467
- new.handler (21.6.3.3) 472
- new.syn (21.6.1) 466
- nullablepointer.requirements (20.5.3.3) 435
- numarray (30.8) 1104
- numeric.iota (30.9.12) 1134
- numeric.limits (21.3.4) 457
- numeric.limits.members (21.3.4.1) 458
- numeric.ops (30.9) 1123
- numeric.ops.gcd (30.9.13) 1134
- numeric.ops.lcm (30.9.14) 1134
- numeric.ops.overview (30.9.1) 1123
- numeric.requirements (30.3) 1055
- numeric.special (21.3.4.2) 461
- numerics (Clause 30) 1055
- numerics.defns (30.2) 1055
- numerics.general (30.1) 1055

- objects.within.classes (20.4.2.4) 429
- ofstream (31.9.4) 1218
- ofstream.assign (31.9.4.2) 1220
- ofstream.cons (31.9.4.1) 1219
- ofstream.members (31.9.4.3) 1220
- operators (20.4.2.3) 429
- optional (24.6) 536
- optional.assign (24.6.3.3) 541
- optional.bad.access (24.6.5) 546
- optional.comp_with_t (24.6.8) 547
- optional.ctor (24.6.3.1) 539
- optional.dtor (24.6.3.2) 541
- optional.general (24.6.1) 536
- optional.hash (24.6.10) 549
- optional.mod (24.6.3.6) 546
- optional.nullops (24.6.7) 547
- optional.nullopt (24.6.4) 546
- optional.observe (24.6.3.5) 545
- optional.optional (24.6.3) 538
- optional.relops (24.6.6) 546
- optional.specalg (24.6.9) 548
- optional.swap (24.6.3.4) 544
- optional.syn (24.6.2) 537
- organization (20.5.1) 430
- ostream (31.7.5.1) 1190
- ostream.assign (31.7.5.1.2) 1192
- ostream.cons (31.7.5.1.1) 1191
- ostream.formatted (31.7.5.2) 1193
- ostream.formatted.reqmts (31.7.5.2.1) 1193
- ostream.inserters (31.7.5.2.3) 1194
- ostream.inserters.arithmetic (31.7.5.2.2) 1193
- ostream.inserters.character (31.7.5.2.4) 1195
- ostream.iterator (28.6.2) 992
- ostream.iterator.cons.des (28.6.2.1) 993
- ostream.iterator.ops (28.6.2.2) 993
- ostream.manip (31.7.5.4) 1196
- ostream.rvalue (31.7.5.5) 1197
- ostream.seek (31.7.5.1.4) 1192
- ostream.syn (31.7.2) 1178
- ostream.unformatted (31.7.5.3) 1196
- ostream::sentry (31.7.5.1.3) 1192
- ostreambuf.iter.cons (28.6.4.1) 996
- ostreambuf.iter.ops (28.6.4.2) 996
- ostreambuf.iterator (28.6.4) 995
- ostreamstring (31.8.4) 1207
- ostreamstring.assign (31.8.4.2) 1208
- ostreamstring.cons (31.8.4.1) 1208
- ostreamstring.members (31.8.4.3) 1209
- out.of.range (23.2.6) 505
- output.iterators (28.2.4) 973
- output.streams (31.7.5) 1190
- over (Clause 16) 284
- over.ass (16.5.3) 309
- over.best.ics (16.3.3.1) 298
- over.binary (16.5.2) 309
- over.built (16.6) 311
- over.call (16.5.4) 309
- over.call.func (16.3.1.1.1) 289
- over.call.object (16.3.1.1.2) 290
- over.dcl (16.2) 286
- over.ics.ellipsis (16.3.3.1.3) 301
- over.ics.list (16.3.3.1.5) 301
- over.ics.rank (16.3.3.2) 304
- over.ics.ref (16.3.3.1.4) 301
- over.ics.scs (16.3.3.1.1) 300
- over.ics.user (16.3.3.1.2) 300
- over.inc (16.5.7) 310
- over.literal (16.5.8) 310
- over.load (16.1) 284
- over.match (16.3) 287
- over.match.best (16.3.3) 296
- over.match.call (16.3.1.1) 289
- over.match.class.deduct (16.3.1.8) 294
- over.match.conv (16.3.1.5) 293
- over.match.copy (16.3.1.4) 293
- over.match.ctor (16.3.1.3) 293
- over.match.funcs (16.3.1) 287
- over.match.list (16.3.1.7) 294
- over.match.oper (16.3.1.2) 290
- over.match.ref (16.3.1.6) 294
- over.match.viable (16.3.2) 295
- over.oper (16.5) 308
- over.over (16.4) 306
- over.ref (16.5.6) 310
- over.sub (16.5.5) 309
- over.unary (16.5.1) 308
- overflow.error (23.2.9) 506

- pair.astuple (24.4.4) 526
- pair.piecewise (24.4.5) 526
- pairs (24.4) 523
- pairs.general (24.4.1) 523
- pairs.pair (24.4.2) 523
- pairs.spec (24.4.3) 525
- partial.sort (29.7.1.3) 1037
- partial.sort.copy (29.7.1.4) 1038

- partial.sum (30.9.6) 1129
- pointer.conversion (24.10.4) 576
- pointer.traits (24.10.3) 575
- pointer.traits.functions (24.10.3.2) 576
- pointer.traits.optmem (24.10.3.3) 576
- pointer.traits.types (24.10.3.1) 576
- pop.heap (29.7.7.2) 1048
- predef.iterators (28.5) 980
- priority.queue (27.6.5) 959
- priqueue.cons (27.6.5.2) 960
- priqueue.cons.alloc (27.6.5.3) 961
- priqueue.members (27.6.5.4) 961
- priqueue.overview (27.6.5.1) 959
- priqueue.special (27.6.5.5) 961
- propagation (21.9.6) 478
- protection.within.classes (20.5.5.10) 448
- ptr.align (24.10.6) 577
- ptr.laundry (21.6.4) 472
- push.heap (29.7.7.1) 1047

- queue (27.6.4) 957
- queue.cons (27.6.4.2) 958
- queue.cons.alloc (27.6.4.3) 958
- queue.defn (27.6.4.1) 957
- queue.ops (27.6.4.4) 958
- queue.special (27.6.4.5) 959
- queue.syn (27.6.2) 956
- quoted.manip (31.7.8) 1200

- rand (30.7) 1066
- rand.adapt (30.7.4) 1080
- rand.adapt.disc (30.7.4.2) 1080
- rand.adapt.general (30.7.4.1) 1080
- rand.adapt.ibits (30.7.4.3) 1081
- rand.adapt.shuf (30.7.4.4) 1082
- rand.device (30.7.6) 1084
- rand.dist (30.7.8) 1087
- rand.dist.bern (30.7.8.3) 1089
- rand.dist.bern.bernoulli (30.7.8.3.1) 1089
- rand.dist.bern.bin (30.7.8.3.2) 1089
- rand.dist.bern.geo (30.7.8.3.3) 1090
- rand.dist.bern.negbin (30.7.8.3.4) 1091
- rand.dist.general (30.7.8.1) 1087
- rand.dist.norm (30.7.8.5) 1095
- rand.dist.norm.cauchy (30.7.8.5.4) 1098
- rand.dist.norm.chisq (30.7.8.5.3) 1097
- rand.dist.norm.f (30.7.8.5.5) 1098
- rand.dist.norm.lognormal (30.7.8.5.2) 1096
- rand.dist.norm.normal (30.7.8.5.1) 1095
- rand.dist.norm.t (30.7.8.5.6) 1099
- rand.dist.pois (30.7.8.4) 1092
- rand.dist.pois.exp (30.7.8.4.2) 1092
- rand.dist.pois.extreme (30.7.8.4.5) 1095
- rand.dist.pois.gamma (30.7.8.4.3) 1093
- rand.dist.pois.poisson (30.7.8.4.1) 1092
- rand.dist.pois.weibull (30.7.8.4.4) 1094
- rand.dist.samp (30.7.8.6) 1100
- rand.dist.samp.discrete (30.7.8.6.1) 1100
- rand.dist.samp.pconst (30.7.8.6.2) 1101
- rand.dist.samp.plinear (30.7.8.6.3) 1102
- rand.dist.uni (30.7.8.2) 1087
- rand.dist.uni.int (30.7.8.2.1) 1087
- rand.dist.uni.real (30.7.8.2.2) 1088
- rand.eng (30.7.3) 1076
- rand.eng.lcong (30.7.3.1) 1077
- rand.eng.mers (30.7.3.2) 1078
- rand.eng.sub (30.7.3.3) 1079
- rand.predef (30.7.5) 1083
- rand.req (30.7.2) 1069
- rand.req.adapt (30.7.2.5) 1073
- rand.req.dist (30.7.2.6) 1074
- rand.req.eng (30.7.2.4) 1071
- rand.req.genl (30.7.2.1) 1069
- rand.req.seedseq (30.7.2.2) 1070
- rand.req.urng (30.7.2.3) 1071
- rand.synopsis (30.7.1) 1067
- rand.util (30.7.7) 1085
- rand.util.canonical (30.7.7.2) 1087
- rand.util.seedseq (30.7.7.1) 1085
- random.access.iterators (28.2.7) 974
- range.error (23.2.8) 505
- ratio (24.16) 669
- ratio.arithmetic (24.16.4) 671
- ratio.comparison (24.16.5) 671
- ratio.general (24.16.1) 669
- ratio.ratio (24.16.3) 670
- ratio.si (24.16.6) 672
- ratio.syn (24.16.2) 669
- re (Clause 32) 1277
- re.alg (32.11) 1304
- re.alg.match (32.11.2) 1304
- re.alg.replace (32.11.4) 1307
- re.alg.search (32.11.3) 1306
- re.badexp (32.6) 1288
- re.const (32.5) 1285
- re.def (32.2) 1277
- re.err (32.5.3) 1287
- re.except (32.11.1) 1304
- re.general (32.1) 1277
- re.grammar (32.13) 1313
- re.iter (32.12) 1308
- re.matchflag (32.5.2) 1285
- re.regex (32.8) 1290
- re.regex.assign (32.8.2) 1293
- re.regex.construct (32.8.1) 1292
- re.regex.locale (32.8.4) 1294
- re.regex.nmswap (32.8.6.1) 1295
- re.regex.nonmemb (32.8.6) 1295
- re.regex.operations (32.8.3) 1294
- re.regex.swap (32.8.5) 1294
- re.regiter (32.12.1) 1308
- re.regiter.cnstr (32.12.1.1) 1309
- re.regiter.comp (32.12.1.2) 1309
- re.regiter.deref (32.12.1.3) 1310
- re.regiter.incr (32.12.1.4) 1310
- re.req (32.3) 1278
- re.results (32.10) 1299
- re.results.acc (32.10.4) 1302

- re.results.all (32.10.6) 1303
- re.results.const (32.10.1) 1301
- re.results.form (32.10.5) 1303
- re.results.nonmember (32.10.8) 1304
- re.results.size (32.10.3) 1302
- re.results.state (32.10.2) 1302
- re.results.swap (32.10.7) 1303
- re.submatch (32.9) 1295
- re.submatch.members (32.9.1) 1295
- re.submatch.op (32.9.2) 1296
- re.syn (32.4) 1279
- re.synopt (32.5.1) 1285
- re.tokiter (32.12.2) 1310
- re.tokiter.cnstr (32.12.2.1) 1312
- re.tokiter.comp (32.12.2.2) 1313
- re.tokiter.deref (32.12.2.3) 1313
- re.tokiter.incr (32.12.2.4) 1313
- re.traits (32.7) 1288
- reduce (30.9.3) 1127
- reentrancy (20.5.5.8) 447
- refwrap (24.14.5) 628
- refwrap.access (24.14.5.3) 629
- refwrap.assign (24.14.5.2) 628
- refwrap.const (24.14.5.1) 628
- refwrap.helpers (24.14.5.5) 629
- refwrap.invoke (24.14.5.4) 629
- replacement.functions (20.5.4.6) 444
- requirements (20.5) 429
- res.on.arguments (20.5.4.9) 445
- res.on.data.races (20.5.5.9) 447
- res.on.exception.handling (20.5.5.12) 448
- res.on.functions (20.5.4.8) 445
- res.on.headers (20.5.5.2) 446
- res.on.macro.definitions (20.5.5.3) 446
- res.on.objects (20.5.4.10) 445
- res.on.pointer.storage (20.5.5.13) 448
- res.on.required (20.5.4.11) 446
- res.on.requirements (20.5.4.12) 446
- reserved.names (20.5.4.3) 442
- reverse.iter.cmp (28.5.1.7) 983
- reverse.iter.cons (28.5.1.3) 981
- reverse.iter.conv (28.5.1.4) 982
- reverse.iter.elem (28.5.1.5) 982
- reverse.iter.nav (28.5.1.6) 982
- reverse.iter.nonmember (28.5.1.8) 983
- reverse.iter.requirements (28.5.1.2) 981
- reverse.iterator (28.5.1.1) 980
- reverse.iterators (28.5.1) 980
- round.style (21.3.3.1) 456
- runtime.error (23.2.7) 505

- scoped.adaptor.operators (24.13.5) 624
- sequence.reqmts (27.2.3) 866
- sequences (27.3) 893
- sequences.general (27.3.1) 893
- set (27.4.6) 930
- set.cons (27.4.6.2) 933
- set.difference (29.7.6.4) 1046
- set.intersection (29.7.6.3) 1045
- set.new.handler (21.6.3.4) 472
- set.overview (27.4.6.1) 930
- set.symmetric.difference (29.7.6.5) 1047
- set.terminate (21.9.4.2) 477
- set.union (29.7.6.2) 1045
- sf.cmath (30.10.5) 1144
- sf.cmath.assoc_laguerre (30.10.5.1) 1144
- sf.cmath.assoc_legendre (30.10.5.2) 1144
- sf.cmath.beta (30.10.5.3) 1145
- sf.cmath.comp_ellint_1 (30.10.5.4) 1145
- sf.cmath.comp_ellint_2 (30.10.5.5) 1145
- sf.cmath.comp_ellint_3 (30.10.5.6) 1145
- sf.cmath.cyl_bessel_i (30.10.5.7) 1145
- sf.cmath.cyl_bessel_j (30.10.5.8) 1146
- sf.cmath.cyl_bessel_k (30.10.5.9) 1146
- sf.cmath.cyl_neumann (30.10.5.10) 1146
- sf.cmath.ellint_1 (30.10.5.11) 1147
- sf.cmath.ellint_2 (30.10.5.12) 1147
- sf.cmath.ellint_3 (30.10.5.13) 1147
- sf.cmath.expint (30.10.5.14) 1147
- sf.cmath.hermite (30.10.5.15) 1147
- sf.cmath.laguerre (30.10.5.16) 1148
- sf.cmath.legendre (30.10.5.17) 1148
- sf.cmath.riemann_zeta (30.10.5.18) 1148
- sf.cmath.sph_bessel (30.10.5.19) 1148
- sf.cmath.sph_legendre (30.10.5.20) 1149
- sf.cmath.sph_neumann (30.10.5.21) 1149
- shared_mutex.syn (34.4.2) 1346
- slice.access (30.8.4.3) 1117
- slice.arr.assign (30.8.5.2) 1117
- slice.arr.comp.assign (30.8.5.3) 1117
- slice.arr.fill (30.8.5.4) 1118
- smartptr (24.11) 584
- sort (29.7.1.1) 1037
- sort.heap (29.7.7.4) 1048
- span.comparison (27.7.3.7) 968
- span.cons (27.7.3.2) 966
- span.elem (27.7.3.5) 968
- span.iterators (27.7.3.6) 968
- span.objectrep (27.7.3.8) 969
- span.obs (27.7.3.4) 968
- span.overview (27.7.3.1) 964
- span.sub (27.7.3.3) 967
- span.syn (27.7.2) 964
- special (Clause 15) 255
- specialized.addressof (24.10.11.1) 581
- specialized.algorithms (24.10.11) 581
- specialized.destroy (24.10.11.7) 583
- sstream.syn (31.8.1) 1201
- stable.sort (29.7.1.2) 1037
- stack (27.6.6) 962
- stack.cons (27.6.6.2) 962
- stack.cons.alloc (27.6.6.3) 963
- stack.defn (27.6.6.1) 962
- stack.ops (27.6.6.4) 963
- stack.special (27.6.6.5) 963
- stack.syn (27.6.3) 957
- std.exceptions (23.2) 503
- std.ios.manip (31.5.6) 1168

- std.iterator.tags (28.4.2) 979
- std.manip (31.7.6) 1197
- stdexcept.syn (23.2.1) 503
- stmt.ambig (9.8) 138
- stmt.block (9.3) 132
- stmt.break (9.6.1) 137
- stmt.cont (9.6.2) 137
- stmt.dcl (9.7) 138
- stmt.do (9.5.2) 135
- stmt.expr (9.2) 132
- stmt.for (9.5.3) 135
- stmt.goto (9.6.4) 137
- stmt.if (9.4.1) 132
- stmt.iter (9.5) 134
- stmt.jump (9.6) 136
- stmt.label (9.1) 131
- stmt.ranged (9.5.4) 136
- stmt.return (9.6.3) 137
- stmt.select (9.4) 132
- stmt.stmt (Clause 9) 131
- stmt.switch (9.4.2) 133
- stmt.while (9.5.1) 135
- stream.buffer (31.6) 1170
- stream.iterators (28.6) 990
- stream.types (31.5.2) 1156
- streambuf (31.6.3) 1171
- streambuf.assign (31.6.3.3.1) 1174
- streambuf.buffer (31.6.3.2.2) 1173
- streambuf.cons (31.6.3.1) 1172
- streambuf.get.area (31.6.3.3.2) 1174
- streambuf.locales (31.6.3.2.1) 1173
- streambuf.members (31.6.3.2) 1173
- streambuf.protected (31.6.3.3) 1174
- streambuf.pub.get (31.6.3.2.3) 1173
- streambuf.pub.pback (31.6.3.2.4) 1174
- streambuf.pub.put (31.6.3.2.5) 1174
- streambuf.put.area (31.6.3.3.3) 1175
- streambuf.reqts (31.6.2) 1170
- streambuf.syn (31.6.1) 1170
- streambuf.virt.buffer (31.6.3.4.2) 1175
- streambuf.virt.get (31.6.3.4.3) 1176
- streambuf.virt.locales (31.6.3.4.1) 1175
- streambuf.virt.pback (31.6.3.4.4) 1177
- streambuf.virt.put (31.6.3.4.5) 1177
- streambuf.virtuals (31.6.3.4) 1175
- string.access (25.3.2.5) 788
- string.accessors (25.3.2.7.1) 795
- string.append (25.3.2.6.2) 789
- string.assign (25.3.2.6.3) 790
- string.capacity (25.3.2.4) 787
- string.classes (25.3) 775
- string.compare (25.3.2.7.9) 799
- string.cons (25.3.2.2) 784
- string.conversions (25.3.4) 804
- string.copy (25.3.2.6.7) 795
- string.ends.with (25.3.2.7.11) 800
- string.erase (25.3.2.6.5) 792
- string.find (25.3.2.7.2) 796
- string.find.first.not.of (25.3.2.7.6) 798
- string.find.first.of (25.3.2.7.4) 797
- string.find.last.not.of (25.3.2.7.7) 798
- string.find.last.of (25.3.2.7.5) 797
- string.insert (25.3.2.6.4) 791
- string.io (25.3.3.9) 803
- string.iterators (25.3.2.3) 786
- string.modifiers (25.3.2.6) 788
- string.nonmembers (25.3.3) 800
- string.op!= (25.3.3.3) 802
- string.op+ (25.3.3.1) 800
- string.op+= (25.3.2.6.1) 788
- string.op< (25.3.3.4) 802
- string.op<= (25.3.3.6) 802
- string.op> (25.3.3.5) 802
- string.op>= (25.3.3.7) 803
- string.operator== (25.3.3.2) 801
- string.ops (25.3.2.7) 795
- string.replace (25.3.2.6.6) 793
- string.require (25.3.2.1) 783
- string.rfind (25.3.2.7.3) 796
- string.special (25.3.3.8) 803
- string.starts.with (25.3.2.7.10) 800
- string.streams (31.8) 1201
- string.substr (25.3.2.7.8) 799
- string.swap (25.3.2.6.8) 795
- string.syn (25.3.1) 775
- string.view (25.4) 806
- string.view.access (25.4.2.4) 810
- string.view.capacity (25.4.2.3) 810
- string.view.comparison (25.4.3) 814
- string.view.cons (25.4.2.1) 809
- string.view.find (25.4.2.7) 812
- string.view.hash (25.4.5) 815
- string.view.io (25.4.4) 815
- string.view.iterators (25.4.2.2) 809
- string.view.literals (25.4.6) 815
- string.view.modifiers (25.4.2.5) 811
- string.view.ops (25.4.2.6) 811
- string.view.synop (25.4.1) 806
- string.view.template (25.4.2) 807
- stringbuf (31.8.2) 1202
- stringbuf.assign (31.8.2.2) 1204
- stringbuf.cons (31.8.2.1) 1203
- stringbuf.members (31.8.2.3) 1204
- stringbuf.virtuals (31.8.2.4) 1204
- strings (Clause 25) 770
- strings.general (25.1) 770
- stringstream (31.8.5) 1209
- stringstream.assign (31.8.5.2) 1210
- stringstream.cons (31.8.5.1) 1210
- stringstream.members (31.8.5.3) 1210
- structure (20.4.1) 424
- structure.elements (20.4.1.1) 424
- structure.requirements (20.4.1.3) 424
- structure.see.also (20.4.1.5) 426
- structure.specifications (20.4.1.4) 425
- structure.summary (20.4.1.2) 424
- support.contract (21.8) 475
- support.contract.cviol (21.8.2) 475

- support.dynamic (21.6) 466
- support.exception (21.9) 476
- support.general (21.1) 450
- support.initlist (21.10) 480
- support.initlist.access (21.10.3) 480
- support.initlist.cons (21.10.2) 480
- support.initlist.range (21.10.4) 480
- support.limits (21.3) 454
- support.limits.general (21.3.1) 454
- support.rtti (21.7) 473
- support.runtime (21.12) 488
- support.signal (21.12.4) 490
- support.start.term (21.5) 465
- support.types (21.2) 450
- support.types.byteops (21.2.5) 453
- support.types.layout (21.2.4) 453
- support.types.nullptr (21.2.3) 452
- swappable.requirements (20.5.3.2) 434
- syncstream (31.10) 1223
- syncstream.osyncstream (31.10.3) 1225
- syncstream.osyncstream.assign (31.10.3.3) 1227
- syncstream.osyncstream.cons (31.10.3.2) 1226
- syncstream.osyncstream.members (31.10.3.4) 1227
- syncstream.osyncstream.overview (31.10.3.1) 1225
- syncstream.syn (31.10.1) 1223
- syncstream.syncbuf (31.10.2) 1223
- syncstream.syncbuf.assign (31.10.2.3) 1224
- syncstream.syncbuf.cons (31.10.2.2) 1224
- syncstream.syncbuf.members (31.10.2.4) 1225
- syncstream.syncbuf.overview (31.10.2.1) 1223
- syncstream.syncbuf.special (31.10.2.6) 1225
- syncstream.syncbuf.virtuals (31.10.2.5) 1225
- syntax (4.3) 8
- syserr (23.5) 508
- syserr.compare (23.5.5) 515
- syserr.errcat (23.5.2) 510
- syserr.errcat.derived (23.5.2.4) 511
- syserr.errcat.nonvirtuals (23.5.2.3) 511
- syserr.errcat.objects (23.5.2.5) 512
- syserr.errcat.overview (23.5.2.1) 510
- syserr.errcat.virtuals (23.5.2.2) 511
- syserr.errcode (23.5.3) 512
- syserr.errcode.constructors (23.5.3.2) 513
- syserr.errcode.modifiers (23.5.3.3) 513
- syserr.errcode.nonmembers (23.5.3.5) 514
- syserr.errcode.observers (23.5.3.4) 513
- syserr.errcode.overview (23.5.3.1) 512
- syserr.errcondition (23.5.4) 514
- syserr.errcondition.constructors (23.5.4.2) 514
- syserr.errcondition.modifiers (23.5.4.3) 515
- syserr.errcondition.nonmembers (23.5.4.5) 515
- syserr.errcondition.observers (23.5.4.4) 515
- syserr.errcondition.overview (23.5.4.1) 514
- syserr.hash (23.5.6) 516
- syserr.syserr (23.5.7) 516
- syserr.syserr.members (23.5.7.2) 516
- syserr.syserr.overview (23.5.7.1) 516
- system_error.syn (23.5.1) 508
- temp (Clause 17) 315
- temp.alias (17.6.7) 350
- temp.arg (17.3) 323
- temp.arg.explicit (17.9.1) 377
- temp.arg.nontype (17.3.2) 325
- temp.arg.template (17.3.3) 327
- temp.arg.type (17.3.1) 325
- temp.class (17.6.1) 333
- temp.class.order (17.6.5.2) 344
- temp.class.spec (17.6.5) 341
- temp.class.spec.match (17.6.5.1) 343
- temp.class.spec.mfunc (17.6.5.3) 345
- temp.concept (17.6.8) 350
- temp.constr (17.4) 328
- temp.constr.atomic (17.4.1.2) 329
- temp.constr.constr (17.4.1) 329
- temp.constr.decl (17.4.2) 330
- temp.constr.normal (17.4.3) 330
- temp.constr.op (17.4.1.1) 329
- temp.constr.order (17.4.4) 331
- temp.decls (17.6) 333
- temp.deduct (17.9.2) 379
- temp.deduct.call (17.9.2.1) 383
- temp.deduct.conv (17.9.2.3) 386
- temp.deduct.decl (17.9.2.6) 394
- temp.deduct.funcaddr (17.9.2.2) 386
- temp.deduct.guide (17.10) 395
- temp.deduct.partial (17.9.2.4) 387
- temp.deduct.type (17.9.2.5) 388
- temp.dep (17.7.2) 357
- temp.dep.candidate (17.7.4.2) 364
- temp.dep.constexpr (17.7.2.3) 362
- temp.dep.expr (17.7.2.2) 361
- temp.dep.res (17.7.4) 363
- temp.dep.temp (17.7.2.4) 363
- temp.dep.type (17.7.2.1) 358
- temp.expl.spec (17.8.3) 372
- temp.explicit (17.8.2) 370
- temp.fct (17.6.6) 346
- temp.fct.spec (17.9) 377
- temp.friend (17.6.4) 340
- temp.func.order (17.6.6.2) 348
- temp.inject (17.7.5) 364
- temp.inst (17.8.1) 366
- temp.local (17.7.1) 355
- temp.mem (17.6.2) 335
- temp.mem.class (17.6.1.2) 335
- temp.mem.enum (17.6.1.4) 335
- temp.mem.func (17.6.1.1) 334
- temp.names (17.2) 321
- temp.nondep (17.7.3) 363
- temp.over (17.9.3) 394
- temp.over.link (17.6.6.1) 346
- temp.param (17.1) 316
- temp.point (17.7.4.1) 363
- temp.res (17.7) 351
- temp.spec (17.8) 365

- temp.static (17.6.1.3) 335
- temp.type (17.5) 332
- temp.variadic (17.6.3) 337
- template.bitset (24.9.2) 565
- template.gslice.array (30.8.7) 1119
- template.gslice.array.overview (30.8.7.1) 1119
- template.indirect.array (30.8.9) 1121
- template.indirect.array.overview (30.8.9.1) 1121
- template.mask.array (30.8.8) 1120
- template.mask.array.overview (30.8.8.1) 1120
- template.slice.array (30.8.5) 1117
- template.slice.array.overview (30.8.5.1) 1117
- template.valarray (30.8.2) 1107
- template.valarray.overview (30.8.2.1) 1107
- terminate (21.9.4.4) 478
- terminate.handler (21.9.4.1) 477
- thread (Clause 34) 1339
- thread.condition (34.5) 1364
- thread.condition.condvar (34.5.3) 1365
- thread.condition.condvarany (34.5.4) 1368
- thread.condition.nonmember (34.5.2) 1364
- thread.decaycopy (34.2.6) 1341
- thread.general (34.1) 1339
- thread.lock (34.4.4) 1354
- thread.lock.algorithm (34.4.5) 1362
- thread.lock.guard (34.4.4.1) 1354
- thread.lock.scoped (34.4.4.2) 1355
- thread.lock.shared (34.4.4.4) 1359
- thread.lock.shared.cons (34.4.4.4.1) 1360
- thread.lock.shared.locking (34.4.4.4.2) 1361
- thread.lock.shared.mod (34.4.4.4.3) 1362
- thread.lock.shared.obs (34.4.4.4.4) 1362
- thread.lock.unique (34.4.4.3) 1355
- thread.lock.unique.cons (34.4.4.3.1) 1356
- thread.lock.unique.locking (34.4.4.3.2) 1358
- thread.lock.unique.mod (34.4.4.3.3) 1359
- thread.lock.unique.obs (34.4.4.3.4) 1359
- thread.mutex (34.4) 1346
- thread.mutex.class (34.4.3.2.1) 1348
- thread.mutex.recursive (34.4.3.2.2) 1348
- thread.mutex.requirements (34.4.3) 1347
- thread.mutex.requirements.general (34.4.3.1) 1347
- thread.mutex.requirements.mutex (34.4.3.2) 1347
- thread.once (34.4.6) 1363
- thread.once.callonce (34.4.6.2) 1363
- thread.once.onceflag (34.4.6.1) 1363
- thread.req (34.2) 1339
- thread.req.exception (34.2.2) 1339
- thread.req.lockable (34.2.5) 1340
- thread.req.lockable.basic (34.2.5.2) 1340
- thread.req.lockable.general (34.2.5.1) 1340
- thread.req.lockable.req (34.2.5.3) 1341
- thread.req.lockable.timed (34.2.5.4) 1341
- thread.req.native (34.2.3) 1339
- thread.req.paramname (34.2.1) 1339
- thread.req.timing (34.2.4) 1339
- thread.sharedmutex.class (34.4.3.4.1) 1352
- thread.sharedmutex.requirements (34.4.3.4) 1351
- thread.sharedtimedmutex.class (34.4.3.5.1) 1353
- thread.sharedtimedmutex.requirements (34.4.3.5) 1352
- thread.syn (34.3.1) 1341
- thread.thread.algorithm (34.3.2.7) 1345
- thread.thread.assign (34.3.2.4) 1344
- thread.thread.class (34.3.2) 1342
- thread.thread.constr (34.3.2.2) 1344
- thread.thread.destr (34.3.2.3) 1344
- thread.thread.id (34.3.2.1) 1342
- thread.thread.member (34.3.2.5) 1344
- thread.thread.static (34.3.2.6) 1345
- thread.thread.this (34.3.3) 1345
- thread.threads (34.3) 1341
- thread.timedmutex.class (34.4.3.3.1) 1350
- thread.timedmutex.recursive (34.4.3.3.2) 1350
- thread.timedmutex.requirements (34.4.3.3) 1349
- time (24.17) 672
- time.cal (24.17.8) 711
- time.cal.day (24.17.8.3) 711
- time.cal.day.members (24.17.8.3.2) 712
- time.cal.day.nonmembers (24.17.8.3.3) 713
- time.cal.day.overview (24.17.8.3.1) 711
- time.cal.general (24.17.8.1) 711
- time.cal.last (24.17.8.2) 711
- time.cal.md (24.17.8.9) 722
- time.cal.md.members (24.17.8.9.2) 722
- time.cal.md.nonmembers (24.17.8.9.3) 722
- time.cal.md.overview (24.17.8.9.1) 722
- time.cal.mdlast (24.17.8.10) 723
- time.cal.month (24.17.8.4) 713
- time.cal.month.members (24.17.8.4.2) 714
- time.cal.month.nonmembers (24.17.8.4.3) 715
- time.cal.month.overview (24.17.8.4.1) 713
- time.cal.mwd (24.17.8.11) 724
- time.cal.mwd.members (24.17.8.11.2) 724
- time.cal.mwd.nonmembers (24.17.8.11.3) 724
- time.cal.mwd.overview (24.17.8.11.1) 724
- time.cal.mwdlast (24.17.8.12) 725
- time.cal.mwdlast.members (24.17.8.12.2) 725
- time.cal.mwdlast.nonmembers (24.17.8.12.3) 725
- time.cal.mwdlast.overview (24.17.8.12.1) 725
- time.cal.operators (24.17.8.18) 736
- time.cal.wd (24.17.8.6) 718
- time.cal.wd.members (24.17.8.6.2) 718
- time.cal.wd.nonmembers (24.17.8.6.3) 719
- time.cal.wd.overview (24.17.8.6.1) 718
- time.cal.wdidx (24.17.8.7) 720
- time.cal.wdidx.members (24.17.8.7.2) 721
- time.cal.wdidx.nonmembers (24.17.8.7.3) 721
- time.cal.wdidx.overview (24.17.8.7.1) 720
- time.cal.wdlast (24.17.8.8) 721
- time.cal.wdlast.members (24.17.8.8.2) 722
- time.cal.wdlast.nonmembers (24.17.8.8.3) 722
- time.cal.wdlast.overview (24.17.8.8.1) 721
- time.cal.year (24.17.8.5) 715
- time.cal.year.members (24.17.8.5.2) 716
- time.cal.year.nonmembers (24.17.8.5.3) 717
- time.cal.year.overview (24.17.8.5.1) 715

- time.cal.ym (24.17.8.13) 725
- time.cal.ym.members (24.17.8.13.2) 726
- time.cal.ym.nonmembers (24.17.8.13.3) 726
- time.cal.ym.overview (24.17.8.13.1) 725
- time.cal.ymd (24.17.8.14) 727
- time.cal.ymd.members (24.17.8.14.2) 728
- time.cal.ymd.nonmembers (24.17.8.14.3) 729
- time.cal.ymd.overview (24.17.8.14.1) 727
- time.cal.ymdlast (24.17.8.15) 730
- time.cal.ymdlast.members (24.17.8.15.2) 731
- time.cal.ymdlast.nonmembers (24.17.8.15.3) 732
- time.cal.ymdlast.overview (24.17.8.15.1) 730
- time.cal.ymwd (24.17.8.16) 732
- time.cal.ymwd.members (24.17.8.16.2) 733
- time.cal.ymwd.nonmembers (24.17.8.16.3) 734
- time.cal.ymwd.overview (24.17.8.16.1) 732
- time.cal.ymwdlast (24.17.8.17) 734
- time.cal.ymwdlast.members (24.17.8.17.2) 735
- time.cal.ymwdlast.nonmembers (24.17.8.17.3) 736
- time.cal.ymwdlast.overview (24.17.8.17.1) 734
- time.clock (24.17.7) 699
- time.clock.cast (24.17.7.9) 708
- time.clock.cast.fn (24.17.7.9.6) 711
- time.clock.cast.id (24.17.7.9.2) 709
- time.clock.cast.sys (24.17.7.9.4) 710
- time.clock.cast.sys.utc (24.17.7.9.3) 709
- time.clock.cast.utc (24.17.7.9.5) 710
- time.clock.conv (24.17.7.9.1) 708
- time.clock.file (24.17.7.5) 706
- time.clock.file.members (24.17.7.5.2) 706
- time.clock.file.nonmembers (24.17.7.5.3) 707
- time.clock.file.overview (24.17.7.5.1) 706
- time.clock.gps (24.17.7.4) 704
- time.clock.gps.members (24.17.7.4.2) 705
- time.clock.gps.nonmembers (24.17.7.4.3) 705
- time.clock.gps.overview (24.17.7.4.1) 704
- time.clock.hires (24.17.7.7) 707
- time.clock.local (24.17.7.8) 708
- time.clock.req (24.17.3) 687
- time.clock.steady (24.17.7.6) 707
- time.clock.system (24.17.7.1) 699
- time.clock.system.members (24.17.7.1.2) 700
- time.clock.system.nonmembers (24.17.7.1.3) 700
- time.clock.system.overview (24.17.7.1.1) 699
- time.clock.tai (24.17.7.3) 703
- time.clock.tai.members (24.17.7.3.2) 703
- time.clock.tai.nonmembers (24.17.7.3.3) 703
- time.clock.tai.overview (24.17.7.3.1) 703
- time.clock.utc (24.17.7.2) 701
- time.clock.utc.members (24.17.7.2.2) 701
- time.clock.utc.nonmembers (24.17.7.2.3) 702
- time.clock.utc.overview (24.17.7.2.1) 701
- time.duration (24.17.5) 689
- time.duration.alg (24.17.5.9) 695
- time.duration.arithmetic (24.17.5.3) 691
- time.duration.cast (24.17.5.7) 693
- time.duration.comparisons (24.17.5.6) 693
- time.duration.cons (24.17.5.1) 690
- time.duration.io (24.17.5.10) 695
- time.duration.literals (24.17.5.8) 694
- time.duration.nonmember (24.17.5.5) 692
- time.duration.observer (24.17.5.2) 691
- time.duration.special (24.17.5.4) 692
- time.format (24.17.11) 758
- time.general (24.17.1) 672
- time.parse (24.17.12) 761
- time.point (24.17.6) 696
- time.point.arithmetic (24.17.6.3) 697
- time.point.cast (24.17.6.7) 699
- time.point.comparisons (24.17.6.6) 698
- time.point.cons (24.17.6.1) 697
- time.point.nonmember (24.17.6.5) 698
- time.point.observer (24.17.6.2) 697
- time.point.special (24.17.6.4) 698
- time.syn (24.17.2) 672
- time.tod (24.17.9) 740
- time.tod.hours (24.17.9.2) 740
- time.tod.io (24.17.9.6) 743
- time.tod.minutes (24.17.9.3) 741
- time.tod.overview (24.17.9.1) 740
- time.tod.seconds (24.17.9.4) 741
- time.tod.subsecond (24.17.9.5) 742
- time.traits (24.17.4) 688
- time.traits.duration_values (24.17.4.2) 688
- time.traits.is_clock (24.17.4.4) 689
- time.traits.is_fp (24.17.4.1) 688
- time.traits.specializations (24.17.4.3) 688
- time.zone (24.17.10) 745
- time.zone.db (24.17.10.2) 745
- time.zone.db.access (24.17.10.2.3) 746
- time.zone.db.list (24.17.10.2.2) 745
- time.zone.db.remote (24.17.10.2.4) 747
- time.zone.db.tzdb (24.17.10.2.1) 745
- time.zone.exception (24.17.10.3) 747
- time.zone.exception.ambiguous (24.17.10.3.2) 748
- time.zone.exception.nonexist (24.17.10.3.1) 747
- time.zone.general (24.17.10.1) 745
- time.zone.info (24.17.10.4) 748
- time.zone.info.local (24.17.10.4.2) 749
- time.zone.info.sys (24.17.10.4.1) 748
- time.zone.leap (24.17.10.8) 755
- time.zone.leap.members (24.17.10.8.2) 756
- time.zone.leap.nonmembers (24.17.10.8.3) 756
- time.zone.leap.overview (24.17.10.8.1) 755
- time.zone.link (24.17.10.9) 757
- time.zone.link.members (24.17.10.9.2) 758
- time.zone.link.nonmembers (24.17.10.9.3) 758
- time.zone.link.overview (24.17.10.9.1) 757
- time.zone.members (24.17.10.5.2) 750
- time.zone.nonmembers (24.17.10.5.3) 751
- time.zone.overview (24.17.10.5.1) 750
- time.zone.timezone (24.17.10.5) 750
- time.zone.zonedtime (24.17.10.7) 751
- time.zone.zonedtime.ctor (24.17.10.7.2) 753
- time.zone.zonedtime.members (24.17.10.7.3) 754
- time.zone.zonedtime.nonmembers (24.17.10.7.4) 755

- time.zone.zonedtime.overview (24.17.10.7.1) 751
- time.zone.zonedtraits (24.17.10.6) 751
- transform.exclusive.scan (30.9.9) 1131
- transform.inclusive.scan (30.9.10) 1132
- transform.reduce (30.9.5) 1128
- tuple (24.5) 527
- tuple.apply (24.5.3.5) 533
- tuple.assign (24.5.3.2) 531
- tuple.cnstr (24.5.3.1) 529
- tuple.creation (24.5.3.4) 532
- tuple.elem (24.5.3.7) 535
- tuple.general (24.5.1) 527
- tuple.helper (24.5.3.6) 534
- tuple.rel (24.5.3.8) 535
- tuple.special (24.5.3.10) 536
- tuple.swap (24.5.3.3) 532
- tuple.syn (24.5.2) 527
- tuple.traits (24.5.3.9) 536
- tuple.tuple (24.5.3) 528
- type.descriptions (20.4.2.1) 426
- type.descriptions.general (20.4.2.1.1) 426
- type.index (24.18) 764
- type.index.hash (24.18.4) 765
- type.index.members (24.18.3) 765
- type.index.overview (24.18.2) 764
- type.index.synopsis (24.18.1) 764
- type.info (21.7.2) 473
- typeinfo.syn (21.7.1) 473

- uncaught.exceptions (21.9.5) 478
- underflow.error (23.2.10) 506
- uninitialized.construct.default (24.10.11.2) 581
- uninitialized.construct.value (24.10.11.3) 582
- uninitialized.copy (24.10.11.4) 582
- uninitialized.fill (24.10.11.6) 583
- uninitialized.move (24.10.11.5) 582
- unique.ptr (24.11.1) 584
- unique.ptr.create (24.11.1.4) 591
- unique.ptr.dltr (24.11.1.1) 584
- unique.ptr.dltr.dfft (24.11.1.1.2) 584
- unique.ptr.dltr.dfft1 (24.11.1.1.3) 585
- unique.ptr.dltr.general (24.11.1.1.1) 584
- unique.ptr.io (24.11.1.6) 593
- unique.ptr.runtime (24.11.1.3) 589
- unique.ptr.runtime.asgn (24.11.1.3.2) 590
- unique.ptr.runtime.ctor (24.11.1.3.1) 590
- unique.ptr.runtime.modifiers (24.11.1.3.4) 591
- unique.ptr.runtime.observers (24.11.1.3.3) 591
- unique.ptr.single (24.11.1.2) 585
- unique.ptr.single.asgn (24.11.1.2.3) 588
- unique.ptr.single.ctor (24.11.1.2.1) 586
- unique.ptr.single.dtor (24.11.1.2.2) 587
- unique.ptr.single.modifiers (24.11.1.2.5) 589
- unique.ptr.single.observers (24.11.1.2.4) 588
- unique.ptr.special (24.11.1.5) 591
- unord (27.5) 936
- unord.general (27.5.1) 936
- unord.hash (24.14.16) 645
- unord.map (27.5.4) 938
- unord.map.cnstr (27.5.4.2) 942
- unord.map.elem (27.5.4.3) 942
- unord.map.modifiers (27.5.4.4) 943
- unord.map.overview (27.5.4.1) 938
- unord.map.syn (27.5.2) 936
- unord.multimap (27.5.5) 944
- unord.multimap.cnstr (27.5.5.2) 947
- unord.multimap.modifiers (27.5.5.3) 948
- unord.multimap.overview (27.5.5.1) 944
- unord.multiset (27.5.7) 952
- unord.multiset.cnstr (27.5.7.2) 955
- unord.multiset.overview (27.5.7.1) 952
- unord.req (27.2.7) 882
- unord.req.except (27.2.7.1) 892
- unord.set (27.5.6) 948
- unord.set.cnstr (27.5.6.2) 951
- unord.set.overview (27.5.6.1) 948
- unord.set.syn (27.5.3) 937
- upper.bound (29.7.3.2) 1040
- using (20.5.2) 432
- using.headers (20.5.2.2) 432
- using.linkage (20.5.2.3) 432
- using.overview (20.5.2.1) 432
- usrlit.suffix (20.5.4.3.5) 444
- util.dynamic.safety (24.10.5) 576
- util.smartptr.atomic (24.11.8) 606
- util.smartptr.atomic.shared (24.11.8.1) 606
- util.smartptr.atomic.weak (24.11.8.2) 608
- util.smartptr.enab (24.11.6) 605
- util.smartptr.getdeleter (24.11.3.10) 602
- util.smartptr.hash (24.11.7) 606
- util.smartptr.ownerless (24.11.5) 604
- util.smartptr.shared (24.11.3) 593
- util.smartptr.shared.assign (24.11.3.3) 596
- util.smartptr.shared.cast (24.11.3.9) 601
- util.smartptr.shared.cmp (24.11.3.7) 600
- util.smartptr.shared.const (24.11.3.1) 594
- util.smartptr.shared.create (24.11.3.6) 598
- util.smartptr.shared.dest (24.11.3.2) 596
- util.smartptr.shared.io (24.11.3.11) 602
- util.smartptr.shared.mod (24.11.3.4) 597
- util.smartptr.shared.obs (24.11.3.5) 597
- util.smartptr.shared.spec (24.11.3.8) 601
- util.smartptr.weak (24.11.4) 602
- util.smartptr.weak.assign (24.11.4.3) 604
- util.smartptr.weak.bad (24.11.2) 593
- util.smartptr.weak.const (24.11.4.1) 603
- util.smartptr.weak.dest (24.11.4.2) 603
- util.smartptr.weak.mod (24.11.4.4) 604
- util.smartptr.weak.obs (24.11.4.5) 604
- util.smartptr.weak.spec (24.11.4.6) 604
- utilities (Clause 24) 518
- utilities.general (24.1) 518
- utility (24.2) 518
- utility.arg.requirements (20.5.3.1) 432
- utility.as_const (24.2.5) 522
- utility.exchange (24.2.3) 521
- utility.requirements (20.5.3) 432
- utility.swap (24.2.2) 520

utility.syn (24.2.1) 518

valarray.access (30.8.2.4) 1110
valarray.assign (30.8.2.3) 1109
valarray.binary (30.8.3.1) 1114
valarray.cassign (30.8.2.7) 1112
valarray.comparison (30.8.3.2) 1115
valarray.cons (30.8.2.2) 1109
valarray.members (30.8.2.8) 1113
valarray.nonmembers (30.8.3) 1114
valarray.range (30.8.10) 1122
valarray.special (30.8.3.4) 1116
valarray.sub (30.8.2.5) 1110
valarray.syn (30.8.1) 1104
valarray.transcend (30.8.3.3) 1116
valarray.unary (30.8.2.6) 1112
value.error.codes (20.5.5.14) 448
variant (24.7) 549
variant.assign (24.7.3.3) 553
variant.bad.access (24.7.11) 559
variant.ctor (24.7.3.1) 552
variant.dtor (24.7.3.2) 553
variant.general (24.7.1) 549
variant.get (24.7.5) 557
variant.hash (24.7.12) 559
variant.helper (24.7.4) 556
variant.mod (24.7.3.4) 555
variant.monostate (24.7.8) 559
variant.monostate.relops (24.7.9) 559
variant.relops (24.7.6) 558
variant.specalg (24.7.10) 559
variant.status (24.7.3.5) 556
variant.swap (24.7.3.6) 556
variant.syn (24.7.2) 549
variant.variant (24.7.3) 551
variant.visit (24.7.7) 558
vector (27.3.11) 913
vector.bool (27.3.12) 917
vector.capacity (27.3.11.3) 915
vector.cons (27.3.11.2) 915
vector.data (27.3.11.4) 916
vector.modifiers (27.3.11.5) 916
vector.overview (27.3.11.1) 913
vector.syn (27.3.6) 895
views (27.7) 963
views.general (27.7.1) 963
views.span (27.7.3) 964

wide.stream.objects (31.4.4) 1154

zombie.names (20.5.4.3.1) 442

Cross references from ISO C++ 2017

All clause and subclause labels from ISO C++ 2017 (ISO/IEC 14882:2017, *Programming Languages — C++*) are present in this document, with the exceptions described below.

array.data *see* [array.members](#)
 array.fill *see* [array.members](#)
 array.size *see* [array.members](#)
 array.swap *see* [array.members](#)

back.insert.iter.cons *see* [back.insert.iter.ops](#)
 back.insert.iter.op* *see* [back.insert.iter.ops](#)
 back.insert.iter.op++ *see* [back.insert.iter.ops](#)
 back.insert.iter.op= *see* [back.insert.iter.ops](#)
 basic.scope.proto *see* [basic.scope.param](#)

depr.ccomplex.syn *see* [depr.complex.h.syn](#)
 depr.cpp.headers *removed*
 depr.cstdalign.syn *see* [depr.stdalign.h.syn](#)
 depr.cstdbool.syn *see* [depr.stdbool.h.syn](#)
 depr.ctgmath.syn *see* [depr.tgmath.h.syn](#)
 depr.default.allocator *removed*
 depr.except.spec *removed*
 depr.func.adaptor.binding *removed*
 depr.func.adaptor.typedefs *removed*
 depr.negators *removed*
 depr.storage.iterator *removed*
 depr.temporary.buffer *removed*
 depr.uncaught *removed*
 depr.util.smartptr.shared.obs *removed*
 depr.weak.result_type *removed*
 deque.special *removed*

facets.examples *removed*
 forwardlist.special *removed*
 front.insert.iter.cons *see* [front.insert.iter.ops](#)
 front.insert.iter.op* *see* [front.insert.iter.ops](#)
 front.insert.iter.op++ *see* [front.insert.iter.ops](#)
 front.insert.iter.op= *see* [front.insert.iter.ops](#)
 fs.definitions *see* [fs.class.path](#), [fs.conform.os](#),
 [fs.general](#), [fs.path.fmt.cvt](#),
 [fs.path.generic](#), [fs.race.behavior](#)

insert.iter.cons *see* [insert.iter.ops](#)
 insert.iter.op* *see* [insert.iter.ops](#)
 insert.iter.op++ *see* [insert.iter.ops](#)
 insert.iter.op= *see* [insert.iter.ops](#)

list.special *removed*

map.special *removed*
 move.iter.op.+ *see* [move.iter.nav](#)
 move.iter.op.+= *see* [move.iter.nav](#)
 move.iter.op.- *see* [move.iter.nav](#)
 move.iter.op.-= *see* [move.iter.nav](#)
 move.iter.op.const *see* [move.iter.cons](#)

move.iter.op.decr *see* [move.iter.nav](#)
 move.iter.op.incr *see* [move.iter.nav](#)
 move.iter.op.index *see* [move.iter.elem](#)
 move.iter.op.ref *see* [move.iter.elem](#)
 move.iter.op.star *see* [move.iter.elem](#)
 move.iter.op= *see* [move.iter.cons](#)
 move.iter.ops *removed*
 multimap.special *removed*
 multiset.special *removed*

re.regex.const *see* [re.regex](#)
 reverse.iter.make *see* [reverse.iter.nonmember](#)
 reverse.iter.op!= *see* [reverse.iter.cmp](#)
 reverse.iter.op+ *see* [reverse.iter.nav](#)
 reverse.iter.op++ *see* [reverse.iter.nav](#)
 reverse.iter.op+= *see* [reverse.iter.nav](#)
 reverse.iter.op- *see* [reverse.iter.nav](#)
 reverse.iter.op-= *see* [reverse.iter.nav](#)
 reverse.iter.op-- *see* [reverse.iter.nav](#)
 reverse.iter.op.star *see* [reverse.iter.elem](#)
 reverse.iter.op< *see* [reverse.iter.cmp](#)
 reverse.iter.op<= *see* [reverse.iter.cmp](#)
 reverse.iter.op= *see* [reverse.iter.cons](#)
 reverse.iter.op== *see* [reverse.iter.cmp](#)
 reverse.iter.op> *see* [reverse.iter.cmp](#)
 reverse.iter.op>= *see* [reverse.iter.cmp](#)
 reverse.iter.opdiff *see* [reverse.iter.nonmember](#)
 reverse.iter.opindex *see* [reverse.iter.elem](#)
 reverse.iter.opref *see* [reverse.iter.elem](#)
 reverse.iter.ops *removed*
 reverse.iter.opsum *see* [reverse.iter.nonmember](#)

set.special *removed*

unord.map.swap *removed*
 unord.multimap.swap *removed*
 unord.multiset.swap *removed*
 unord.set.swap *removed*
 util.smartptr *removed*
 util.smartptr.shared.atomic *see*
 [depr.util.smartptr.shared.atomic](#)
 utility.from.chars *see* [charconv.from.chars](#)
 utility.to.chars *see* [charconv.to.chars](#)

variant.traits *removed*
 vector.special *removed*

Index

- !, *see* operator, logical negation
- !=, *see* operator, inequality
- () , *see* operator, function call, *see* declarator, function
- *, *see* operator, indirection, *see* operator, multiplication, *see* declarator, pointer
- +, *see* operator, unary plus, *see* operator, addition
- ++, *see* operator, increment
- , , *see* operator, comma
- , *see* operator, unary minus, *see* operator, subtraction
- >, *see* operator, class member access
- >*, *see* operator, pointer to member
- , *see* operator, decrement
- ., *see* operator, class member access
- .*, *see* operator, pointer to member
- ..., *see* ellipsis
- /, *see* operator, division
- :
- bit-field declaration, 229
- label specifier, 131
- ::, *see* operator, scope resolution
- ::*, *see* declarator, pointer-to-member
- <, *see* operator, less than
- template and, 320, 321
- <<, *see* operator, left shift
- <=, *see* operator, less than or equal to
- <=>, *see* operator, three-way comparison
- =, *see* assignment operator
- ==, *see* operator, equality
- >, *see* operator, greater than
- >=, *see* operator, greater than or equal to
- >>, *see* operator, right shift
- ?:, *see* operator, conditional expression
- [], *see* operator, subscripting, *see* declarator, array
- # operator, 411, 413
- ## operator, 413
- #define, 411
- #elif, 408
- #else, 409
- #endif, 409
- #error, *see* preprocessing directives, error
- #if, 408, 446
- #ifdef, 409
- #ifndef, 409
- #include, 409, 432
- #line, *see* preprocessing directives, line control
- #pragma, *see* preprocessing directives, pragma
- #undef, 414, 443
- %, *see* operator, remainder
- &, *see* operator, address-of, *see* operator, bitwise AND, *see* declarator, reference
- &&, *see* operator, logical AND
- ^, *see* operator, bitwise exclusive OR
- \, *see* backslash character
- Cpp17CopyInsertable* into X, 864
- Cpp17DefaultInsertable* into X, 864
- Cpp17EmplaceConstructible* into X from args, 865
- Cpp17Erasable* from X, 865
- Cpp17MoveInsertable* into X, 864
- { }
- block statement, 132
- class declaration, 218
- class definition, 218
- enum declaration, 157
- initializer list, 206
- _, *see* character, underscore
- __cplusplus, 416
- __DATE__, 417
- __FILE__, 417
- __LINE__, 417
- __STDCPP_DEFAULT_NEW_ALIGNMENT__, 417
- __STDCPP_STRICT_POINTER_SAFETY__, 418
- __STDCPP_THREADS__, 418
- __STDC_HOSTED__, 417
- __STDC_ISO_10646__, 418
- __STDC_MB_MIGHT_NEQ_WC__, 418
- __STDC_VERSION__, 418
- __STDC__, 418
- __TIME__, 417
- __VA_ARGS__, 411, 412
- __VA_OPT__, 411, 412
- __cpp_aggregate_bases, 417
- __cpp_aggregate_nsdmi, 417
- __cpp_alias_templates, 417
- __cpp_aligned_new, 417
- __cpp_attributes, 417
- __cpp_binary_literals, 417
- __cpp_capture_star_this, 417
- __cpp_constexpr, 417
- __cpp_decltype, 417
- __cpp_decltype_auto, 417
- __cpp_deduction_guides, 417
- __cpp_delegating_constructors, 417
- __cpp_enumerator_attributes, 417
- __cpp_explicit_bool, 417
- __cpp_fold_expressions, 417
- __cpp_generic_lambdas, 417
- __cpp_guaranteed_copy_elision, 417
- __cpp_hex_float, 417
- __cpp_if_constexpr, 417
- __cpp_inheriting_constructors, 418
- __cpp_init_captures, 418
- __cpp_initializer_lists, 418
- __cpp_inline_variables, 418

- `__cpp_lambdas`, 418
- `__cpp_namespace_attributes`, 418
- `__cpp_noexcept_function_type`, 418
- `__cpp_nontype_template_args`, 418
- `__cpp_nontype_template_parameter_auto`, 418
- `__cpp_nontype_template_parameter_class`, 418
- `__cpp_nsdmi`, 418
- `__cpp_range_based_for`, 418
- `__cpp_raw_strings`, 418
- `__cpp_ref_qualifiers`, 418
- `__cpp_return_type_deduction`, 418
- `__cpp_rvalue_references`, 418
- `__cpp_sized_deallocation`, 418
- `__cpp_static_assert`, 418
- `__cpp_structured_bindings`, 418
- `__cpp_template_template_args`, 418
- `__cpp_threadsafe_static_init`, 418
- `__cpp_unicode_characters`, 418
- `__cpp_unicode_literals`, 418
- `__cpp_user_defined_literals`, 418
- `__cpp_variable_templates`, 418
- `__cpp_variadic_templates`, 418
- `__cpp_variadic_using`, 418
- `__has_cpp_attribute`, 407
- `__has_include`, 407
- `|`, *see* operator, bitwise inclusive OR
- `||`, *see* operator, logical OR
- `~`, *see* operator, ones' complement, *see* destructor
- 0, *see also* zero, null
 - null character, *see* character, null
 - string terminator, 21
- abort, 74, 137
- absolute path, 1233
- abstract-declarator*, 186, 1398
- abstract-pack-declarator*, 186, 1398
- access, 3
- access control, 246–254
 - anonymous union, 233
 - base class, 248
 - base class member, 235
 - class member, 102
 - default, 246
 - default argument, 247
 - friend function, 250
 - member function and, 255
 - member name, 246
 - multiple access, 254
 - nested class, 254
 - overload resolution and, 238
 - overloading and, 287
 - private, 246
 - protected, 246, 253
 - public, 246
 - using-declaration and, 168
 - virtual function, 253
- access specifier, 247, 248
- access-specifier*, 235, 1400
- accessible, 249
- active
 - union member, 231
- addition operator, *see* operator, addition
- additive-expression*, 119, 1391
- address, 62, 122
- addressable function, 441
- aggregate, 206
 - elements, 206
- aggregate initialization, 206
- algorithm
 - stable, 423, 447
- `<algorithm>`, 998
- alias
 - namespace, 163
- alias template, 350
- alias-declaration*, 140, 1393
- alignas, 176
- alignment, 57
 - extended, 57
 - fundamental, 57
 - new-extended, 57
 - stricter, 57
 - stronger, 57
 - weaker, 57
- alignment requirement
 - implementation-defined, 57
- alignment-specifier*, 174, 1396
- alignof, 117
- allocation
 - alignment storage, 113
 - implementation-defined bit-field, 229
 - unspecified, 224
- allocation functions, 54
- alternative token, *see* token, alternative
- ambiguity
 - base class member, 237
 - class conversion, 240
 - declaration type, 142
 - declaration versus cast, 187
 - declaration versus expression, 138
 - function declaration, 203
 - member access, 237
 - overloaded function, 287
 - parentheses and, 111
- Amendment 1, 444
- and-expression*, 123, 1391
- anonymous union, 232
- anonymous union object, 232
- `<any>`, 560
- appertain, 175
- argc, 71
- argument, 3, 445, 446, 505
 - access checking and default, 247
 - binding of default, 196
 - evaluation of default, 196, 197
 - example of default, 196
 - function call expression, 3

- function-like macro, 3
- overloaded operator and default, 308
- reference, 101
- scope of default, 197
- template, 323
- template instantiation, 3
- throw expression, 3
- type checking of default, 196
- argument and name hiding
 - default, 197
- argument and virtual function
 - default, 198
- argument list
 - empty, 193
 - variable, 193
- argument passing, 101
 - reference and, 210
- argument substitution, *see* macro, argument substitution
- argument type
 - unknown, 193
- argv, 71
- arithmetic
 - pointer, 119
 - unsigned, 60
- array
 - bound, 191
 - const, 62
 - delete, 115
 - handler of type, 400
 - new, 112
 - overloading and pointer versus, 285
 - parameter of type, 193
 - sizeof, 110
 - template parameter of type, 318
- <array>, 893
- array
 - as aggregate, 895
 - contiguous storage, 895
 - initialization, 895, 897
 - tuple interface to, 897
 - zero sized, 897
- array size
 - default, 192
- arrow operator, *see* operator, class member access
- as-if rule, 6
- asm
 - implementation-defined, 172
- asm-definition*, 172, 1396
- assembler, 172
- <assert.h>, 432, 506, 1428
- assertion, 178
- assignment
 - and lvalue, 125
 - conversion by, 126
 - copy, *see* assignment operator, copy
 - move, *see* assignment operator, move, 422
 - reference, 210
- assignment operator
 - copy, 255, 278–280
 - hidden, 279
 - implicitly declared, 278
 - implicitly defined, 279
 - inaccessible, 275
 - non-trivial, 279
 - trivial, 279
 - virtual bases and, 280
 - move, 255, 278–280
 - hidden, 279
 - implicitly declared, 278
 - implicitly defined, 279
 - inaccessible, 275
 - non-trivial, 279
 - trivial, 279
 - overloaded, 309
- assignment-expression*, 125, 1392
- assignment-operator*, 125, 1392
- associated constraints, 330
- associative containers
 - exception safety, 882
 - requirements, 882
 - unordered, *see* unordered associative containers
- asynchronous provider, 1372
- asynchronous return object, 1372
- at least as constrained, 332
- at least as specialized as, *see* more specialized
- atexit, 74
- <atomic>, 1316
- atomic constraint, 329
 - identical, 329
- atomic operations, *see* operation, atomic
- atomic smart pointers, 606–610
- attribute, 174–177
 - alignment, 176
 - carries dependency, 177
 - contracts, 177–181
 - deprecated, 182
 - fallthrough, 182
 - likely, 182
 - maybe unused, 183
 - no unique address, 184
 - nodiscard, 183
 - noreturn, 184
 - syntax and semantics, 174
 - unlikely, 182
- attribute*, 175, 1396
- attribute-argument-clause*, 175, 1397
- attribute-declaration*, 140, 1394
- attribute-list*, 174, 1396
- attribute-namespace*, 175, 1397
- attribute-scoped-token*, 175, 1397
- attribute-specifier*, 174, 1396
- attribute-specifier-seq*, 174, 1396
- attribute-token*, 175, 1397
- attribute-using-prefix*, 174, 1396
- automatic storage duration, 54
- awk, 1286

- backslash character, 18
 - `bad_alloc`, 114
 - `bad_cast`, 104
 - `bad_typeid`, 104
 - balanced-token*, 175, 1397
 - balanced-token-seq*, 175, 1397
 - base characteristic, 646
 - base class, 235, 236
 - dependent, 359
 - direct, 235
 - indirect, 235
 - non-virtual, 236
 - overloading and, 286
 - private, 248
 - protected, 248
 - public, 248
 - virtual, 236
 - base class subobject, 49
 - base-clause*, 235, 1400
 - base-specifier*, 235, 1400
 - base-specifier-list*, 235, 1400
 - behavior
 - conditionally-supported, 3, 6
 - default, 421, 422, 426
 - implementation-defined, 4, 7
 - locale-specific, 4
 - observable, 6, 7
 - on receipt of signal, 66
 - required, 423, 426
 - undefined, 5–7, 993
 - unspecified, 5, 7
 - Ben, 286
 - Bernoulli distributions, 1089–1092
 - `bernoulli_distribution`
 - discrete probability function, 1089
 - Bessel functions
 - I_ν , 1145
 - J_ν , 1146
 - K_ν , 1146
 - N_ν , 1146
 - j_n , 1148
 - n_n , 1149
 - beta functions B, 1145
 - binary fold, 96
 - binary left fold, 96
 - binary operator
 - interpretation of, 309
 - overloaded, 309
 - binary right fold, 96
 - binary-digit*, 15, 1386
 - binary-exponent-part*, 19, 1387
 - binary-literal*, 15, 1386
 - bind directly, 212
 - binding
 - reference, 211
 - `binomial_distribution`
 - discrete probability function, 1089
 - `<bit>`, 1065
 - bit-field, 229
 - address of, 229
 - alignment of, 229
 - implementation-defined alignment of, 229
 - implementation-defined sign of, 1412
 - type of, 229
 - unnamed, 229
 - zero width of, 229
 - bitmask
 - element, 428
 - empty, 428
 - value
 - clear, 428
 - is set, 428
 - set, 428
 - `<bitset>`, 565
 - block, 3
 - initialization in, 138
 - block scope, 31
 - block statement, *see* statement, compound
 - block structure, 138
 - block with forward progress guarantee delegation, 70
 - block-declaration*, 140, 1393
 - body
 - function, 198
 - Bond
 - James Bond, 93
 - Boolean, 229
 - Boolean literal, 21
 - boolean literal, *see* literal, boolean
 - Boolean type, 60
 - boolean-literal*, 21, 1388
 - bound arguments, 638
 - bound, of array, 191
 - brace-or-equal-initializer*, 202, 1398
 - braced-init-list*, 202, 1399
 - brains
 - names that want to eat your, 442
 - buckets, 883
 - build level, 181
 - built-in candidate, 291
 - byte, 48, 110
- ## C
- linkage to, 172
 - standard, 1
 - standard library, 2
 - c-char*, 17, 1386
 - c-char-sequence*, 17, 1386
 - call
 - operator function, 308
 - pseudo destructor, 102
 - call signature, 627
 - call wrapper, 627
 - forwarding, 627
 - simple, 627
 - type, 627
 - callable object, 627
 - callable type, 627, 640

- candidate function, 287
- capture
 - implicit, 92
- capture*, 91, 1389
- capture-default*, 91, 1389
- capture-list*, 91, 1389
- captured, 93
 - by copy, 94
 - by reference, 94
- carries a dependency, 67
- carry
 - `subtract_with_carry_engine`, 1079
- `<cassert>`, 432, 506, 858, 1428
- cast
 - base class, 106
 - const, 108, 117
 - derived class, 106
 - dynamic, 103, 474
 - construction and, 275
 - destruction and, 275
 - integer to pointer, 107
 - lvalue, 105, 107
 - pointer to integer, 107
 - pointer-to-function, 107
 - pointer-to-member, 106, 107
 - reference, 105, 108
 - reinterpret, 107, 117
 - integer to pointer, 107
 - lvalue, 107
 - pointer to integer, 107
 - pointer-to-function, 107
 - pointer-to-member, 107
 - reference, 108
 - static, 105, 117
 - lvalue, 105
 - reference, 105
 - undefined pointer-to-function, 107
- cast-expression*, 117, 1391
- casting, 101
- casting away constness, 108
- catch, 397
- cats
 - interfering with canines, 473
- `cauchy_distribution`
 - probability density function, 1098
- `<cctype>`, 815
- `<cerrno>`, 443, 507
- `<cfenv>`, 1056
- char
 - implementation-defined sign of, 60
- char-like object, 770
- char-like type, 770
- `char16_t`, *see* type, `char16_t`
- `char16_t` character, 17
- `char32_t`, *see* type, `char32_t`
- `char32_t` character, 17
- `char_class_type`
 - regular expression traits, 1278
- character, 421
 - decimal-point, 428
 - multibyte, 4
 - null, 10
 - signed, 60
 - source file, 9
 - terminating null, 428
 - underscore, 14
 - in identifier, 13
- character literal, *see* literal, character
- character sequence, 428
- character set, 10–11
 - basic execution, 10, 48
 - basic source, 9, 10
 - execution, 10
- character string, 20
- character string literal, 413
- character-literal*, 17, 1386
- `<charconv>`, 767
- checking
 - point of error, 353
 - syntax, 353
- `chi_squared_distribution`
 - probability density function, 1097
- `<chrono>`, 672
- chunks, 615
- `<cinttypes>`, 1275, 1276
- class, 61, 218–231
 - abstract, 245
 - associated, 38
 - base, 444, 448
 - cast to incomplete, 118
 - constructor and abstract, 245
 - definition, 26
 - derived, 448
 - linkage of, 46
 - linkage specification, 173
 - local, *see* local class
 - member function, *see* member function, class
 - nested, *see* nested class
 - polymorphic, 240
 - scope of enumerator, 159
 - standard-layout, 59, 219
 - trivial, 59, 219
 - trivially copyable, 59, 219
 - union-like, 233
 - unnamed, 145
 - variant member of, 233
- class name
 - elaborated, 153, 221
 - point of declaration, 221
 - scope of, 220
 - `typedef`, 145, 221
- class object
 - assignment to, 126
 - member, 224
 - `sizeof`, 110
- class object copy, *see* constructor, copy
- class object initialization, *see* constructor
- class-head*, 218, 1399

- class-head-name*, 218, 1399
- class-key*, 218, 1399
- class-name*, 218, 1399
- class-or-decltype*, 235, 1400
- class-specifier*, 218, 1399
- class-virt-specifier*, 218, 1399
- <climits>, 1434
- <locale>, 428, 1429
- closure object, 87
- closure type, 87
- <cmath>, 1135, 1143
- <codecvt>, 1443
- coherence
 - read-read, 68
 - read-write, 68
 - write-read, 68
 - write-write, 68
- collating element, 1277
- comma operator, *see* operator, comma
- comment, 11–12
 - /* */, 12
 - //, 12
- common comparison type, 282
- common initial sequence, 224
- <compare>, 121, 481
- compare-expression*, 120, 1391
- comparison
 - pointer, 122
 - pointer to function, 122
 - undefined pointer, 119
- comparison category types, 481
- compatible with
 - shared_ptr, 594
- compilation
 - separate, 9
- compiler control line, *see* preprocessing directive
- complete object, 49
- complete object of, 50
- complete-class context, 223
- completely defined, 223
- <complex>, 1057
- <complex.h>, 1428, 1431
- component, 421
- composite pointer type, 82
- compound-requirement*, 98, 1390
- compound-statement*, 132, 1392
- concatenation
 - macro argument, *see* ## operator
 - string, 20
- concept, 350
 - variadic, 351
- concept-definition*, 315, 1401
- concept-name*, 315, 1401
- concurrent forward progress guarantees, 70
- condition*, 131, 1392
- conditions*
 - rules for, 131
- <condition_variable>, 1364
- conditional-expression
 - throw-expression in, 124
- conditional-expression*, 124, 1392
- conditionally-supported behavior, *see* behavior,
 - conditionally-supported
- conditionally-supported-directive*, 406, 1403
- conflict, 66
- conformance requirements, 6–7
 - class templates, 6
 - classes, 6
 - general, 6
 - library, 6
 - method of description, 6
- conjunction, 329
- consistency
 - linkage, 143
 - linkage specification, 173
 - type declaration, 48
- const, 62
 - cast away, 108
 - constructor and, 227, 256
 - destructor and, 227, 263
 - linkage of, 46
 - overloading and, 285
- const member function, 227
- const object
 - undefined change to, 150
- const volatile member function, 227
- const-default-constructible, 203
- const-qualified, 62
- const-volatile-qualified, 62
- const_cast, *see* cast, const
- const_local_iterator, 883
- constant, 15, 84
 - enumeration, 158
 - null pointer, 78, 79
- constant expression, 126
 - permitted result of, 130
- constant initialization, 71
- constant initializer, 71
- constant iterator, 970
- constant subexpression, 421
- constant-expression*, 127, 1392
- constexpr function, 146
- constexpr if, 133
- constexpr iterators, 971
- constituent expression, 64
- constrained-parameter*, 317, 1401
- constraint, 329
 - associated, *see* associated constraints
 - normalization, 330–331
 - satisfaction
 - atomic, 329
 - conjunction, 329
 - disjunction, 329
 - subsumption, 331
- constraint-expression*, 330, 1402
- constraint-logical-and-expression*, 315, 1401
- constraint-logical-or-expression*, 315, 1401
- construction, 273–275

- dynamic cast and, 275
- member access, 273
- move, 422
- pointer to member or base, 274
- `typeid` operator, 275
- virtual function call, 274
- constructor, 255
 - address of, 256
 - array of class objects and, 267
 - converting, 261
 - copy, 255, 258, 275–277, 429
 - elision, 280
 - implicitly declared, 276
 - implicitly defined, 277
 - inaccessible, 275
 - nontrivial, 277
 - trivial, 277
 - default, 255, 256
 - non-trivial, 256
 - trivial, 256
 - exception handling, *see* exception handling,
 - constructors and destructors
 - explicit call, 257
 - implicitly called, 256
 - implicitly defined, 256
 - inheritance of, 256
 - inherited, 164
 - move, 255, 275–277
 - elision, 280
 - implicitly declared, 277
 - implicitly defined, 277
 - inaccessible, 275
 - non-trivial, 277
 - trivial, 277
 - non-trivial, 256
 - random number distribution requirement, 1075
 - random number engine requirement, 1071, 1072
 - union, 231
- constructor, conversion by, *see* conversion,
 - user-defined
- contained value
 - any, 561
 - optional, 539
 - variant, 551
- container
 - contiguous, 864
- contains a value
 - optional, 539
- context
 - non-deduced, 389
- contextually converted constant expression of type
 - `bool`, *see* conversion, contextual
- contextually converted to `bool`, *see* conversion,
 - contextual
- contextually implicitly converted, 75
- contiguous container, 864
- contiguous iterators, 970
- `continue`
 - and handler, 397
 - and try block, 397
- contract, 178
 - predicate, 178
- contract condition, 179
- contract violation, 181
- contract-attribute-specifier*, 178, 1397
- contract-level*, 178, 1397
- control line, *see* preprocessing directive
- control-line*, 406, 1403
- conventions, 426
 - lexical, 9–23
- conversion
 - argument, 193
 - array-to-pointer, 76
 - better, 304
 - `bool`, 78
 - boolean, 79
 - class, 260
 - contextual, 75
 - contextual to `bool`, 75
 - contextual to constant expression of type
 - `bool`, 129
 - deduced return type of user-defined, 263
 - derived-to-base, 299
 - floating to integral, 78
 - floating-point, 78
 - function pointer, 79
 - function-to-pointer, 76
 - implementation-defined pointer integer, 107
 - implicit, 75, 260
 - implicit user-defined, 260
 - inheritance of user-defined, 262
 - integer rank, 63
 - integral, 78
 - integral to floating, 78
 - lvalue-to-rvalue, 76, 1408
 - narrowing, 216
 - null member pointer, 79
 - null pointer, 78
 - overload resolution and, 296
 - overload resolution and pointer, 307
 - pointer, 78
 - pointer-to-member, 79
 - `void*`, 79
 - qualification, 77
 - return type, 137
 - standard, 75–79
 - temporary materialization, 76
 - to signed, 78
 - to unsigned, 78
 - type of, 262
 - user-defined, 260, 261
 - usual arithmetic, 83
 - virtual user-defined, 262
- conversion explicit type, *see* casting
- conversion function, *see* conversion, user-defined, 262

- conversion rank, 300
- conversion sequence
 - ambiguous, 299
 - better, 304
 - implicit, 298
 - indistinguishable, 304
 - standard, 75
 - worse, 304
- conversion-declarator*, 262, 1400
- conversion-function-id*, 261, 1400
- conversion-type-id*, 261, 1400
- copy
 - class object, *see* constructor, copy, *see*
 - assignment operator, copy
 - copy constructor
 - random number engine requirement, 1072
 - copy deduction candidate, 294
 - copy elision, *see* constructor, copy, elision
 - copy-initialization, 204
 - copy-list-initialization, 212
 - Cpp17BinaryTypeTrait, 646
 - Cpp17TransformationTrait, 646
 - Cpp17UnaryTypeTrait, 646
 - <csignal>, 443, 488, 489, 1429
 - <csignal>, 488, 489
 - <csdarg>, 193, 443, 488, 489
 - <csddef>, 111, 119, 1428, 1429
 - <csdint>, 464
 - <csdio>, 1153, 1154, 1213, 1273, 1275, 1429
 - <csdlib>, 74, 431, 451, 465, 488, 583, 818, 1053,
 - 1104, 1143, 1428, 1429, 1432
 - <cstring>, 428, 816, 1429, 1434, 1438
 - <ctime>, 488, 764, 821, 1429
 - ctor-initializer*, 268, 1400
 - <ctype.h>, 816
 - <cuchar>, 444, 818, 1428
 - current instantiation, 358
 - dependent member of the, 360
 - member of the, 359
 - currently handled exception, *see* exception
 - handling, currently handled exception
 - customization point, 441
 - cv-decomposition, 77
 - cv-qualification signature, 77
 - cv-qualifier, 62
 - top-level, 63
 - cv-qualifier*, 186, 1398
 - cv-qualifier-seq*, 186, 1397
 - <wchar>, 444, 817, 818, 1428, 1429
 - <wctype>, 444, 816
- d-char*, 20, 1388
- d-char-sequence*, 19, 1387
- DAG
 - multiple inheritance, 237
 - non-virtual base class, 237
 - virtual base class, 237
- data member, *see* member, 222
 - static, 222
- data race, 69
- deadlock, 421
- deallocation function
 - usual, 56
- deallocation functions, 54
- decay
 - array, *see* conversion, array-to-pointer
 - function, *see* conversion, function-to-pointer
- DECAY_COPY**, 1341
- decimal-floating-literal*, 18, 1387
- decimal-literal*, 15, 1386
- decl-specifier*, 142, 1394
- decl-specifier-seq*, 142, 1394
- declaration, 24, 140–177
 - array, 191
 - asm, 172
 - bit-field, 229
 - class name, 25
 - constant pointer, 189
 - default argument, 195–198
 - definition versus, 24
 - ellipsis in function, 101, 193
 - enumerator point of, 30
 - extern, 24
 - extern reference, 210
 - forward, 143
 - forward class, 221
 - function, 24, 141, 193
 - local class, 233
 - member, 221
 - multiple, 48
 - name, 24
 - object, 141
 - opaque enum, 25
 - overloaded, 284
 - overloaded name and friend, 251
 - parameter, 25, 193
 - parentheses in, 187, 188
 - pointer, 189
 - reference, 190
 - static member, 25
 - storage class, 142
 - structured binding, *see* structured binding
 - declaration
 - type, 188
 - typedef, 141
 - typedef, 25
 - typedef as type, 144
 - declaration*, 140, 1393
 - declaration hiding, *see* name hiding
 - declaration-seq*, 140, 1393
 - declaration-statement*, 138, 1393
 - declarative region, 29
 - declarator, 25, 141, 185–217
 - array, 191
 - function, 192–195
 - meaning of, 188–198
 - multidimensional array, 192
 - pointer, 189

- pointer-to-member, 191
 - reference, 189
- declarator*, 186, 1397
- declarator-id*, 186, 1398
- decltype-specifier*, 151, 1395
- decrement operator
 - overloaded, *see* overloading, decrement operator
- deduction
 - class template argument, 395
 - class template arguments, 101, 151, 157, 294
 - placeholder type, 156
- deduction-guide*, 395, 1402
- default access control, *see* access control, default
- default argument
 - overload resolution and, 295
- default argument instantiation, 369
- default constructor
 - random number distribution requirement, 1074
 - seed sequence requirement, 1070
- default initializers
 - overloading and, 286
- default member initializer, 223
- default memory resource pointer, 615
- default-initialization, 203
- default-inserted, 864
- default-template-argument*, 317, 1401
- defaulted, 200
- deferred function, 1380
- define, 24
- defined**, 407
- defined-macro-expression*, 407, 1403
- defining-type-id*, 186, 1398
- defining-type-specifier*, 149, 1394
- defining-type-specifier-seq*, 149, 1394
- definition, 24, 25
 - alternate, 444
 - class, 218, 222
 - class name as type, 220
 - constructor, 199
 - declaration as, 141
 - function, 198–201
 - deleted, 200
 - explicitly-defaulted, 199
 - local class, 233
 - member function, 225
 - namespace, 160
 - nested class, 230
 - program semantics affected by, 368
 - pure virtual function, 245
 - scope of class, 220
 - static member, 228
 - virtual function, 243
- definitions, 3–5
- delete
 - array, 115
 - single-object, 115
- delete**, 54, 115, 265
 - destructor and, 116, 264
- operator**
 - replaceable, 444
 - overloading and, 56
 - single-object, 115
 - type of, 266
 - undefined, 115
- delete-expression*, 115, 1391
- deleter, 584
- denormalized value, *see* number, subnormal
- dependency-ordered before, 67
- dependent base class, *see* base class, dependent
- dependent member of the current instantiation, *see* current instantiation, dependent member of the
- dependent name, *see* name, dependent
- <deque>**, 893
- dereferencing, *see also* indirection
- derivation, *see* inheritance
- derived class, 235–245
 - most, *see* most derived class
- derived object
 - most, *see* most derived object
- designated-initializer-clause*, 202, 1399
- designated-initializer-list*, 202, 1399
- designator*, 202, 1399
- destringization, 419
- destroying operator delete, 56
- destruction, 273–275
 - dynamic cast and, 275
 - member access, 273
 - pointer to member or base, 274
 - typeid** operator, 275
 - virtual function call, 274
- destructor, 263, 429
 - default, 263
 - exception handling, *see* exception handling, constructors and destructors
 - explicit call, 264
 - implicit call, 264
 - implicitly defined, 263
 - non-trivial, 263
 - program termination and, 264
 - pure virtual, 264
 - union**, 231
 - virtual, 264
- diagnosable rules, 6
- diagnostic message, *see* message, diagnostic
- digit*, 13, 1385
- digit-sequence*, 19, 1387
- digraph, *see* token, alternative, 12
- direct member, 222
- direct-initialization, 205
- direct-list-initialization, 212
- direct-non-list-initialization, 422
- directed acyclic graph, *see* DAG
- directive, preprocessing, *see* preprocessing directive
- directory, 1228

- directory-separator*, 1236
- discard**
 - random number engine requirement, 1072
- discard_block_engine**
 - generation algorithm, 1081
 - state, 1080
 - textual representation, 1081
 - transition algorithm, 1081
- discarded statement, 133
- discarded-value expression, 83
- discrete probability function
 - bernoulli_distribution**, 1089
 - binomial_distribution**, 1089
 - discrete_distribution**, 1100
 - geometric_distribution**, 1090
 - negative_binomial_distribution**, 1091
 - poisson_distribution**, 1092
 - uniform_int_distribution**, 1087
- discrete_distribution**
 - discrete probability function, 1100
 - weights, 1100
- disjunction, 329
- distribution, *see* random number distribution
- dogs
 - obliviousness to interference, 473
- domain error, 1144
- dominance
 - virtual base class, 239
- dot
 - filename, 1236
- dot operator, *see* operator, class member access
- dot-dot
 - filename, 1236
- dynamic binding, *see* function, virtual
- dynamic initialization, 72
- dynamic type, *see* type, dynamic
- dynamic_cast**, *see* cast, dynamic

- E (complete elliptic integrals), 1145
- E (incomplete elliptic integrals), 1147
- ECMA-262, 2
- ECMAScript, 1286, 1313
- egrep**, 1286
- Ei (exponential integrals), 1147
- elaborated type specifier, *see* class name,
 - elaborated
- elaborated-type-specifier*, 153, 1395
- element access functions, 1017
- elif-group*, 406, 1403
- elif-groups*, 406, 1403
- elision
 - copy, *see* constructor, copy, elision
 - copy constructor, *see* constructor, copy, elision
 - move constructor, *see* constructor, move, elision
- ellipsis
 - conversion sequence, 101, 301
 - overload resolution and, 295
- elliptic integrals
 - complete Π , 1145
 - complete E, 1145
 - complete K, 1145
 - incomplete Π , 1147
 - incomplete E, 1147
 - incomplete F, 1147
- else-group*, 406, 1403
- empty **future** object, 1376
- empty **shared_future** object, 1378
- empty-declaration*, 140, 1394
- enclosing namespace set, 161
- enclosing-namespace-specifier*, 160, 1396
- encoded character type, 1229
- encoding
 - multibyte, 21
- encoding-prefix*, 17, 1386
- end-of-file, 570
- endif-line*, 406, 1403
- engine, *see* random number engine
- engine adaptor, *see* random number engine adaptor
- engines with predefined parameters
 - default_random_engine**, 1084
 - knuth_b**, 1084
 - minstd_rand**, 1083
 - minstd_rand0**, 1083
 - mt19937**, 1083
 - mt19937_64**, 1083
 - ranlux24**, 1084
 - ranlux24_base**, 1084
 - ranlux48**, 1084
 - ranlux48_base**, 1084
- entity, 24
 - templated, 316
- enum**, 61
 - overloading and, 285
 - type of, 157, 158
 - underlying type, *see* type, underlying
- enum name
 - typedef**, 145
- enum-base*, 157, 1395
- enum-head*, 157, 1395
- enum-head-name*, 157, 1395
- enum-key*, 157, 1395
- enum-name*, 157, 1395
- enum-specifier*, 157, 1395
- enumerated element, 427
- enumeration, 157, 158
 - linkage of, 46
 - scoped, 158
 - unscoped, 158
- enumeration scope, 33
- enumeration type
 - conversion to, 106
 - static_cast**
 - conversion to, 106
- enumerator
 - definition, 26

- scoped, 158
 - unscoped, 158
 - value of, 158
- enumerator*, 157, 1395
- enumerator-definition*, 157, 1395
- enumerator-list*, 157, 1395
- environment
 - program, 71
- epoch, 687
- equality
 - strong structural, 282
- equality-expression*, 122, 1391
- equivalence
 - template type, 332
 - type, 144, 220
- equivalent
 - expressions, 347
 - function templates, 347
 - functionally, *see* functionally equivalent
 - template-heads*, 347
 - template-parameters*, 347
- equivalent parameter declarations, 285
 - overloading and, 285
- equivalent-key group, 882
- equivalently-valued, 440
- `<errno.h>`, 507
- escape character, *see* backslash character
- escape sequence
 - undefined, 18
- escape-sequence*, 17, 1386
- Eulerian integral of the first kind, *see* beta
- evaluation, 65
 - order of argument, 100
 - signal-safe, 490
 - unspecified order of, 65, 72
 - unspecified order of argument, 100
 - unspecified order of function call, 100
- exception
 - arithmetic, 80
 - undefined arithmetic, 80
- `<exception>`, 476
- exception handling, 397–405
 - constructors and destructors, 399
 - currently handled exception, 401
 - exception object, 398, 399
 - constructor, 399
 - destructor, 399
 - function try block, 397
 - `goto`, 397
 - handler, 397, 398, 400–401, 448
 - active, 401
 - array in, 400
 - incomplete type in, 400
 - match, 400–401
 - pointer to function in, 400
 - rvalue reference in, 400
 - memory, 399
 - nearest handler, 398
 - rethrow, 125, 399
 - rethrowing, 399
 - `switch`, 397
 - `terminate` called, 125, 399, 402
 - throwing, 125, 398
 - try block, 397
- exception object, *see* exception handling,
 - exception object
- exception specification, 401–404
 - `noexcept`
 - constant expression and, 402
 - non-throwing, 401
 - potentially-throwing, 401
 - virtual function and, 402
- exception-declaration*, 397, 1402
- exclusive-or-expression*, 123, 1392
- `<execution>`, 766
- execution agent, 1340
- execution policy, 765
- execution step, 70
- `exit`, 71, 73, 137
- explicit type conversion, *see* casting
- explicit-instantiation*, 370, 1402
- explicit-specialization*, 373, 1402
- explicit-specifier*, 144, 1394
- explicitly captured, 92
- explicitly initialized elements
 - aggregate, 206
- exponent-part*, 19, 1387
- exponential integrals E_i , 1147
- `exponential_distribution`
 - probability density function, 1092
- expr-or-braced-init-list*, 202, 1399
- expression, 80–130
 - additive operators, 119
 - `alignof`, 117
 - assignment and compound assignment, 125
 - bitwise AND, 123
 - bitwise exclusive OR, 123
 - bitwise inclusive OR, 123
 - cast, 101, 117–118
 - class member access, 102
 - comma, 126
 - conditional operator, 124
 - const cast, 108
 - constant, 126, 129
 - converted constant, 129
 - core constant, 127
 - decrement, 103, 110
 - `delete`, 115
 - dynamic cast, 103
 - equality operators, 122
 - equality-preserving, 491
 - equivalent, *see* equivalent, expressions
 - fold, 95–96
 - function call, 100
 - functionally equivalent, *see* functionally
 - equivalent, expressions
 - increment, 103, 110
 - integral constant, 129

- lambda, 87–95
- left-shift-operator, 120
- logical AND, 123
- logical OR, 123
- multiplicative operators, 119
- new**, 111
- noexcept**, 117
- order of evaluation of, 7
- parenthesized, 85
- pointer-to-member, 118
- pointer-to-member constant, 109
- postfix, 99–109
- potentially constant evaluated, 130
- potentially evaluated, 26
- primary, 84–99
- pseudo-destructor call, 102
- reference, 82
- reinterpret cast, 107
- relational operators, 121
- requires, 96–99
- right-shift-operator, 120
- rvalue reference, 81
- sizeof**, 110
- spaceship, 120
- static cast, 105
- three-way comparison, 120
- throw**, 125
- type identification, 104
- type-dependent, 357
- unary, 109–117
- unary operator, 109
- value-dependent, 357
- expression*, 126, 1392
- expression-equivalent, 422
- expression-list*, 99, 1390
- expression-statement*, 132, 1392
- extend, *see* namespace, extend
- extended alignment, 57
- extended integer type, 60
- extended signed integer type, 60
- extended unsigned integer type, 60
- extern**, 142
 - linkage of, 143
- extern "C"**, 432, 443, 444
- extern "C++"**, 432, 444
- external linkage, 46
- extreme_value_distribution**
 - probability density function, 1095
- F (incomplete elliptic integrals), 1147
- facet, 824
- fallback-separator*, 1236
- file, 1228
- file attributes, 1254
 - cached, 1254
- file system, 1228
- file system race, 1228
- file, source, *see* source file
- filename, 1236
 - filename*, 1236
- <filesystem>**, 1229
- final overrider, 241
- finite state machine, 1277
- fisher_f_distribution**
 - probability density function, 1098
- floating literal, *see* literal, floating
- floating-literal*, 18, 1387
- floating-point literal, *see* literal, floating
- floating-point promotion, 78
- floating-point type, *see* type, floating-point
 - implementation-defined, 61
- floating-suffix*, 19, 1387
- fold
 - binary, 96
 - unary, 96
- fold-expression*, 95, 1389
- fold-operator*, 96, 1389
- for**
 - scope of declaration in, 136
- for-range-declaration*, 134, 1393
- for-range-initializer*, 134, 1393
- format specifier, 1277
- forward**, 521
- forward progress guarantees
 - concurrent, 70
 - delegation of, 70
 - parallel, 70
 - weakly parallel, 70
- <forward_list>**, 894
- forwarding call wrapper, 627
- forwarding reference, 384
- fractional-constant*, 18, 1387
- free store, *see also* **new**, **delete**, 265
- freestanding implementation, 6
- friend
 - virtual and**, 243
 - access specifier and, 252
 - class access and, 250
 - inheritance and, 252
 - local class and, 252
 - template and, 340
- friend function
 - access and, 250
 - inline, 252
 - linkage of, 251
 - member function and, 250
 - nested class, 231
- <fstream>**, 1210
- full-expression, 64
- function, *see also* friend function; member
 - function; inline function; virtual function
 - allocation, 55, 112
 - comparison, 421
 - conversion, 261
 - deallocation, 56, 265
 - definition, 26
 - global, 443, 446
 - handler, 422

- handler of type, 400
- inline, 148
- linkage specification overloaded, 173
- modifier, 422
- named by an expression, 26
- needed for constant evaluation, 130
- observer, 422
- operator, 308
 - template, 308
- overload resolution and, 288
- overloaded, *see* overloading
- overloading and pointer versus, 285
- parameter of type, 193
- pointer to member, 118
- program semantics affected by the existence
 - of a function definition, 368
- replacement, 423
- reserved, 423
- template parameter of type, 318
- viable, 287
- virtual, 240–244
 - pure, 245
- virtual function call, 100
- virtual member, 444
- function argument, *see* argument
- function call, 101
 - recursive, 101
 - undefined, 107
- function call operator
 - overloaded, 309
- function object, 624
 - binders, 637–638
 - mem_fn, 639
 - reference_wrapper, 628
 - type, 624
 - wrapper, 639–642
- function parameter, *see* parameter
- function parameter pack, 337
- function parameter scope, 31
- function pointer type, 61
- function return, *see* return
- function return type, *see* return type
- function try block, *see* exception handling,
 - function try block
- function-body*, 198, 1398
- function-definition*, 198, 1398
- function-like macro, *see* macro, function-like
- function-specifier*, 144, 1394
- function-try-block*, 397, 1402
- <functional>, 625
- functionally equivalent
 - expressions, 347
 - function templates, 347
 - template-heads, 347
- functions
 - candidate, 364
- fundamental alignment, 57
- fundamental type, 61
 - destructor and, 265
 - fundamental type conversion, *see* conversion,
 - user-defined
 - future
 - shared state, 1372
 - <future>, 1370
 - gamma_distribution
 - probability density function, 1093
 - generate
 - seed sequence requirement, 1070
 - generated destructor, *see* destructor, default
 - generation algorithm
 - discard_block_engine, 1081
 - independent_bits_engine, 1082
 - linear_congruential_engine, 1077
 - mersenne_twister_engine, 1078
 - shuffle_order_engine, 1082
 - subtract_with_carry_engine, 1079
 - generic lambda, 87
 - geometric_distribution
 - discrete probability function, 1090
 - global, 32
 - global namespace, 32
 - global namespace scope, 32
 - global scope, 32
 - gvalue, 80
 - goto
 - and handler, 397
 - and try block, 397
 - initialization and, 138
 - grammar, 1384
 - regular expression, 1313
 - grep, 1286
 - group, 406, 1402
 - group-part, 406, 1402
 - H_n (Hermite polynomials), 1147
 - h-char*, 12, 1385
 - h-char-sequence*, 12, 1385
 - h-pp-tokens*, 407, 1403
 - h-preprocessing-token*, 407, 1403
 - handler, *see* exception handling, handler
 - handler, 397, 1402
 - handler-seq, 397, 1402
 - happens after, 68
 - happens before, 68
 - hard link, 1228
 - has-attribute-expression*, 407, 1403
 - has-include-expression*, 407, 1403
 - hash
 - instantiation restrictions, 645
 - hash code, 883
 - hash function, 882
 - hash tables, *see* unordered associative containers
 - header, 430
 - C, 443, 446, 1432
 - C library, 432
 - C++ library, 430
 - name, 12–13

- header-name*, 12, 1384
- headers
 - C library, 1431
- Hermite polynomials H_n , 1147
- hex-quad*, 10, 1384
- hexadecimal-digit*, 16, 1386
- hexadecimal-digit-sequence*, 15, 1386
- hexadecimal-escape-sequence*, 17, 1387
- hexadecimal-floating-literal*, 18, 1387
- hexadecimal-fractional-constant*, 19, 1387
- hexadecimal-literal*, 15, 1386
- hexadecimal-prefix*, 15, 1386
- hiding, *see* name hiding
- high-order bit, 48
- hosted implementation, 6

- I_ν (Bessel functions), 1145
- id
 - qualified, 86, 87
- id-expression, 85
- id-expression*, 85, 1388
- identical
 - atomic constraints, *see* atomic constraint, identical
- identifier, 13–14, 86, 141
- identifier*, 13, 1385
- identifier label, 132
- identifier-list*, 407, 1403
- identifier-nondigit*, 13, 1385
- if-group*, 406, 1403
- if-section*, 406, 1403
- ill-formed program, *see* program, ill-formed
- immediate subexpression, 64
- implementation
 - freestanding, 431
 - hosted, 431
- implementation limits, *see* limits, implementation
- implementation-defined behavior, *see* behavior, implementation-defined
- implementation-dependent, 372, 454, 1182, 1192
- implementation-generated, 25
- implicit conversion, *see* conversion, implicit
- implicit conversion sequence, *see* conversion sequence, implicit
- implicit object parameter, 288
- implicitly-declared default constructor, *see* constructor, default, 256
- implied object argument, 288
 - implicit conversion sequences, 288
 - non-static member function and, 288
- inclusion
 - conditional, *see* preprocessing directive, conditional inclusion
 - source file, *see* preprocessing directives, source-file inclusion
 - source-file inclusion
- inclusive-or-expression*, 123, 1392
- incomplete, 119
- increment operator
 - overloaded, *see* overloading, increment operator
- independent_bits_engine*
 - generation algorithm, 1082
 - state, 1081
 - textual representation, 1082
 - transition algorithm, 1081
- indeterminate value, 203
- indeterminately sequenced, 65
- indirection, 109
- inheritance, 235
 - using-declaration* and, 164
- init-capture*, 91, 1389
- init-capture* pack, 95, 337
- init-declarator*, 185, 1397
- init-declarator-list*, 185, 1397
- init-statement*, 131, 1392
- initialization, 71, 202–217
 - aggregate, 206
 - array, 206
 - array of class objects, 209, 267
 - automatic, 138
 - automatic object, 202
 - base class, 268
 - by inherited constructor, 272
 - character array, 210
 - class member, 204
 - class object, *see also* constructor, 206, 267–273
 - const, 149, 205
 - const member, 269
 - constant, 71
 - constructor and, 267
 - copy, 204
 - default, 203
 - default constructor and, 267
 - definition and, 141
 - direct, 204
 - dynamic, 72
 - dynamic block-scope, 138
 - dynamic non-local, 72
 - explicit, 267
 - jump past, 138
 - list-initialization, 212–217
 - local **static**, 138
 - local **thread_local**, 138
 - member, 268
 - member function call during, 271
 - member object, 268
 - non-vacuous, 51
 - order of, 72, 236
 - order of base class, 270
 - order of member, 270
 - order of virtual base class, 270
 - overloaded assignment and, 267
 - parameter, 100
 - reference, 190, 210
 - reference member, 269
 - runtime, 72

- static and thread, 71
- static member, 228
- static** object, 71, 202, 203
- union**, 210, 232
- virtual base class, 277
- zero-initialization, 203
- initializer
 - base class, 199
 - member, 199
 - pack expansion, 271
 - scope of member, 271
 - temporary and declarator, 258
- initializer*, 202, 1398
- initializer-clause*, 202, 1399
- initializer-list*, 202, 1399
- initializer-list constructor, 213
 - seed sequence requirement, 1070
- <initializer_list>, 480
- initializing declaration, 206
- injected-class-name, 218
- inline, 446
- inline**
 - linkage of, 46
- inline function, 148
- inline namespace set, 161
- instantiation
 - explicit, 370
 - point of, 363
 - template implicit, 366
- instantiation units, 10
- integer literal, *see* literal, integer
- integer representation, 56
- integer type, 60
- integer-literal*, 15, 1385
- integer-suffix*, 16, 1386
- integral promotion, 78
- integral type, 60
 - implementation-defined **sizeof**, 60
- inter-thread happens before, 67
- internal linkage, 46
- interval boundaries
 - piecewise_constant_distribution*, 1101
 - piecewise_linear_distribution*, 1103
- <inttypes.h>, 1276
- invalid pointer value, *see* value, invalid pointer
- invocation
 - macro, 411
- <iomanip>, 1179
- <ios>, 1155
- <iosfwd>, 1151
- <iostream>, 1153
- isctype
 - regular expression traits, 1279
- <iso646.h>, 1428, 1431
- <istream>, 1178
- iteration-statement*, 134, 137, 1393
- iterator
 - constexpr, 971
- <iterator>, 975, 1440
- j_n (spherical Bessel functions), 1148
- J_ν (Bessel functions), 1146
- Jessie, 261
- jump-statement*, 137, 1393
- K (complete elliptic integrals), 1145
- K_ν (Bessel functions), 1146
- keyword, 14, 1384
- L_n (Laguerre polynomials), 1148
- L_n^m (associated Laguerre polynomials), 1144
- label, 137
 - case**, 132–134
 - default**, 132–134
 - scope of, 32, 132
- labeled-statement*, 131, 1392
- Laguerre polynomials
 - L_n , 1148
 - L_n^m , 1144
- lambda-capture*, 91, 1389
- lambda-declarator*, 87, 1389
- lambda-expression*, 87, 1389
- lambda-introducer*, 87, 151, 1389
- language linkage, 172
- lattice, *see* DAG, subobject
- layout
 - bit-field, 229
 - class object, 224, 236
- layout-compatible, 59
 - class, 224
 - enumeration, 159
- layout-compatible type, 59
- left shift
 - undefined, 120
- left shift operator, *see* operator, left shift
- Legendre functions Y_ℓ^m , 1149
- Legendre polynomials
 - P_ℓ , 1148
 - P_ℓ^m , 1144
- letter, 428
- lexical conventions, *see* conventions, lexical
- LIA-1, 1449
- library
 - C standard, 421, 428, 430, 432, 1428, 1431
 - C++ standard, 420, 444, 445, 448
- library clauses, 8
- lifetime, 51
- limits
 - implementation, 4
- <limits>, 456
- line number, 416
- line splicing, 9
- linear_congruential_engine*
 - generation algorithm, 1077
 - modulus, 1077
 - state, 1077
 - textual representation, 1077
 - transition algorithm, 1077
- link, 1228

- linkage, 24, 46–48
 - const and, 46
 - external, 46, 432, 443, 444
 - implementation-defined object, 174
 - inline and, 46
 - internal, 46
 - no, 46, 47
 - static and, 46
- linkage specification, *see* specification, linkage
- linkage-specification*, 172, 1396
- <list>, 894
- list-initialization, 212
- literal, 15–23, 84
 - base of integer, 16
 - binary, 16
 - boolean, 21
 - char16_t, 17
 - char32_t, 17
 - character, 17
 - char16_t, 17
 - char32_t, 17
 - ordinary, 17
 - UTF-8, 17
 - wide, 17
 - complex, 1065
 - constant, 15
 - decimal, 16
 - decimal floating, 19
 - double, 19
 - float, 19
 - floating, 18, 19
 - hexadecimal, 16
 - hexadecimal floating, 19
 - implementation-defined value of char, 18
 - integer, 15, 16
 - long, 16
 - long double, 19
 - multicharacter, 17
 - implementation-defined value of, 17
 - narrow-character, 17
 - octal, 16
 - operator, 311
 - raw, 311
 - template, 311
 - template numeric, 311
 - template string, 311
 - pointer, 21
 - string, 19, 20
 - char16_t, 20
 - char32_t, 20
 - narrow, 20
 - raw, 11, 20
 - type of, 20
 - undefined change to, 21
 - UTF-8, 20
 - wide, 20
 - suffix identifier, 310
 - type of character, 17
 - type of floating-point, 19
 - type of integer, 16
 - unsigned, 16
 - user-defined, 21
- literal*, 15, 1385
- literal type, 59
- literal-operator-id*, 310, 1401
- living dead
 - name of, 442
- local class, 233
 - friend, 252
 - member function in, 225
 - scope of, 233
- local entity, 24
- local scope, *see* block scope
- local variable, 31
 - destruction of, 137, 138
- local_iterator, 883
- locale, 1277–1279, 1286
- <locale>, 820, 821
- locale-specific behavior, *see* behavior, locale-specific
- <locale.h>, 858
- lock-free execution, 69
- logical-and-expression*, 123, 1392
- logical-or-expression*, 123, 1392
- lognormal_distribution
 - probability density function, 1096
- long
 - typedef and, 142
- long-long-suffix*, 16, 1386
- long-suffix*, 16, 1386
- lookup
 - argument-dependent, 38
 - class member, 40, 45
 - elaborated type specifier, 44–45
 - member name, 237
 - name, 24, 34–46
 - namespace aliases and, 46
 - namespace member, 41
 - qualified name, 39–44
 - template name, 351
 - unqualified name, 35
 - using-directives and, 46
- lookup_classname
 - regular expression traits, 1279, 1315
- lookup_collatename
 - regular expression traits, 1279
- low-order bit, 48
- lowercase, 428
- lparen*, 406, 1403
- lvalue, 80, 1408
- lvalue reference, 61, 190
- Lvalue-Callable, 640
- macro
 - argument substitution, 411
 - function-like, 410, 411
 - arguments, 411
 - masking, 446

- name, 411
- object-like, 410, 411
- pragma operator, 419
- predefined, 416
- replacement, 410–416
- replacement list, 410, 411
- rescanning and replacement, 413
- scope of definition, 414
- main** function, 71
 - implementation-defined linkage of, 71
 - implementation-defined parameters to, 71
 - parameters to, 71
 - return from, 71, 73
- make progress
 - thread, 70
- `<map>`, 919
- `match_results`
 - as sequence, 1299
- matched, 1277
- mathematical special functions, 1144–1149
- max**
 - random number distribution requirement, 1075
- mean
 - `normal_distribution`, 1095
 - `poisson_distribution`, 1092
- mem-initializer*, 268, 1400
- mem-initializer-id*, 268, 1400
- mem-initializer-list*, 268, 1400
- member
 - class **static**, 54
 - default initializer, 223
 - enumerator, 159
 - static, 222, 227
 - template and **static**, 335
- member access operator
 - overloaded, 310
- member candidate, 291
- member data
 - static, 228
- member function, 222
 - call undefined, 226
 - class, 225
 - const, 227
 - const volatile, 227
 - constructor and, 257
 - destructor and, 264
 - friend, 251
 - inline, 225
 - local class, 234
 - nested class, 254
 - non-static, 226
 - overload resolution and, 288
 - static, 222, 228
 - this**, 227
 - union**, 231
 - volatile, 227
- member names, 32
- member of an unknown specialization, 360
- member of the current instantiation, *see* current instantiation, member of the
- member pointer to, *see* pointer to member
- member subobject, 49
- member-declaration*, 222, 1399
- member-declarator*, 222, 1399
- member-declarator-list*, 222, 1399
- member-specification*, 221, 1399
- members, 32
- `<memory>`, 570
- memory location, 48
- memory management, *see also* **new**, **delete**
- memory model, 48–49
- `<memory_resource>`, 610
- `mersenne_twister_engine`
 - generation algorithm, 1078
 - state, 1078
 - textual representation, 1079
 - transition algorithm, 1078
- message
 - diagnostic, 3, 6
- min**
 - random number distribution requirement, 1075
- modifiable, 82
- modification order, 66
- more constrained, 332
- more cv-qualified, 62
- more specialized, 344, 388
 - class template, 344
 - function template, 388
- most derived class, 50
- most derived object, 50
 - bit-field, 50
 - zero size subobject, 50
- move
 - class object, *see* constructor, move, *see* assignment operator, move
- move**, 521
- multi-pass guarantee, 973
- multibyte character, *see* character, multibyte
- multicharacter literal, *see* literal, multicharacter
- multiline**, 1286
- multiple inheritance, 235, 236
 - virtual** and, 243
- multiple threads, *see* threads, multiple
- multiplicative-expression*, 119, 1391
- mutable**, 142
- mutable iterator, 970
- `<mutex>`, 1346
- mutex types, 1347
- n_n (spherical Neumann functions), 1149
- N_ν (Neumann functions), 1146
- name, 13, 24, 85
 - address of cv-qualified, 109
 - dependent, 357, 363
 - elaborated
 - enum**, 153

- global, 32
- length of, 13
- macro, *see* macro, name
- point of declaration, 30
- predefined macro, *see* macro, predefined
- qualified, 39
- reserved, 442
- same, 24
- scope of, 29
- unqualified, 35
- zombie, 442
- name class, *see* class name
- name hiding, 30, 34, 86, 138
 - class definition, 220
 - function, 286
 - overloading versus, 286
 - user-defined conversion and, 260
 - using-declaration and, 167
- name space
 - label, 132
- named by an expression, 26
- named-namespace-definition*, 160, 1396
- namespace, 430, 1432
 - alias, 163
 - associated, 38
 - definition, 160
 - enclosing, 161
 - extend, 160
 - global, 14
 - inline, 161
 - member definition, 162
 - unnamed, 162
- namespace-alias*, 163, 1396
- namespace-alias-definition*, 164, 1396
- namespace-body*, 160, 1396
- namespace-definition*, 160, 1396
- namespace-name*, 160, 1396
- namespaces, 160–172
- NaN, 1144
- narrowing conversion, 216
- native encoding, 1238
- native pathname format, 1233
- NDEBUG, 432
- needed
 - exception specification, 403
- needed for constant evaluation, 130
- negative_binomial_distribution**
 - discrete probability function, 1091
- nested class, 230
 - local class, 234
 - scope of, 230
- nested within, 50
- nested-name-specifier*, 86, 1389
- nested-namespace-definition*, 160, 1396
- nested-requirement*, 98, 1390
- Neumann functions
 - N_ν , 1146
 - n_n , 1149
- <new>**, 466
 - new**, 54, 111, 112
 - array of class objects and, 114
 - constructor and, 114
 - default constructor and, 114
 - exception and, 114
 - initialization and, 114
 - operator
 - replaceable, 444
 - scoping and, 111
 - storage allocation, 111
 - type of, 265
 - unspecified constructor and, 114
 - unspecified order of evaluation, 114
 - new-declarator*, 111, 1391
 - new-expression*, 111, 1391
 - placement, 113
 - new-extended alignment, 57
 - new-initializer*, 111, 1391
 - new-line*, 407, 1403
 - new-placement*, 111, 1391
 - new-type-id*, 111, 1391
 - new_handler**, 55
 - no linkage, 46
 - node handle, 870
 - nodeclspec-function-declaration*, 140, 1393
 - noexcept**, 117
 - noexcept-expression*, 117, 1391
 - noexcept-specifier*, 402, 1402
 - non-initialization odr-use, *see* odr-use,
 - non-initialization
 - non-member candidate, 291
 - non-static data member, 222
 - non-static member, 222
 - non-static member function, 222
 - non-throwing exception specification, 401
 - nondigit*, 13, 1385
 - nonzero-digit*, 15, 1386
 - noptr-abstract-declarator*, 186, 1398
 - noptr-abstract-pack-declarator*, 187, 1398
 - noptr-declarator*, 186, 1397
 - noptr-new-declarator*, 111, 1391
 - normal distributions, 1095–1100
 - normal form
 - constraint, 330
 - path, 1237
 - normal_distribution**
 - mean, 1095
 - probability density function, 1095
 - standard deviation, 1095
 - normalization
 - constraint, *see* constraint, normalization
 - path, *see* path, normalization
 - normative references, *see* references, normative
 - notation
 - syntax, 8
 - NTBS, 1213, 1438
 - NTBS, 428
 - empty, 428
 - length, 428

- static, 428
- value, 428
- NTCTS, 422
- NTMBS, 428
 - static, 428
- null character, *see* character, null
- null member pointer conversion, *see* conversion,
 - null member pointer
- null pointer conversion, *see* conversion, null
 - pointer
- null pointer value, *see* value, null pointer
- null statement, 132
- null wide character, *see* wide-character, null
- number
 - hex, 18
 - octal, 18
 - preprocessing, 13
 - subnormal, 457, 458, 460
- <numeric>, 1123
- numeric_limits, 456
 - specializations for arithmetic types, 61
- object, *see also* object model, 24, 49
 - byte copying and, 58
 - complete, 49
 - const, 62
 - const volatile, 62
 - definition, 26
 - destructor and placement of, 264
 - destructor static, 73
 - exception, *see* exception handling, exception
 - object
 - linkage specification, 174
 - local **static**, 54
 - nested within, 50
 - nonzero size, 50
 - providing storage for, 49
 - unnamed, 257
 - volatile, 62
 - zero size, 50
- object class, *see also* class object
- object expression, 102, 118
- object lifetime, 51–53
- object model, 49–51
- object pointer type, 61
- object representation, 58
- object temporary, *see* temporary
- object type, 59
 - incompletely-defined, 58
- object-like macro, *see* macro, object-like
- observable behavior, *see* behavior, observable
- octal-digit, 15, 1386
- octal-escape-sequence, 17, 1387
- octal-literal, 15, 1386
- odr-usable, 27
- odr-use
 - non-initialization, 72
- odr-used, 27
- one-definition rule, 26–29
- opaque-enum-declaration, 157, 1395
- operating system dependent, 1228
- operation
 - atomic, 66–71
- operator, 15, 308
 - *=, 125
 - +=, 110, 125
 - =, 125
 - /=, 125
 - <<=, 125
 - >>=, 125
 - %=, 125
 - &=, 125
 - ^=, 125
 - |=, 125
 - addition, 119
 - additive, 119
 - address-of, 109
 - assignment, 125, 429
 - bitwise, 123
 - bitwise AND, 123
 - bitwise exclusive OR, 123
 - bitwise inclusive OR, 123
 - cast, 109, 186
 - class member access, 102
 - comma, 126
 - conditional expression, 124
 - copy assignment, *see* assignment operator,
 - copy
 - decrement, 103, 109, 110
 - division, 119
 - equality, 122
 - defaulted, 283
 - function call, 100, 308
 - greater than, 121
 - greater than or equal to, 121
 - implementation, 308
 - increment, 103, 109, 110
 - indirection, 109
 - inequality, 122
 - defaulted, 283
 - left shift, 120
 - less than, 121
 - less than or equal to, 121
 - logical AND, 123
 - logical negation, 109, 110
 - logical OR, 123
 - move assignment, *see* assignment operator,
 - move
 - multiplication, 119
 - multiplicative, 119
 - ones' complement, 109, 110
 - overloaded, 80, 308
 - pointer to member, 118
 - pragma, *see* macro, pragma operator
 - precedence of, 7
 - relational, 121
 - defaulted, 283
 - remainder, 119

- right shift, 120
- scope resolution, 40, 86, 112, 225, 235, 244
- side effects and comma, 126
- side effects and logical AND, 123
- side effects and logical OR, 123
- `sizeof`, 109, 110
- spaceship, 120
- structural comparison, 282
- subscripting, 99, 308
- subtraction, 119
- three-way comparison, 120
 - defaulted, 282
- unary, 109
- unary minus, 109, 110
- unary plus, 109, 110
- operator*, 308, 1400
- `operator delete`, *see also delete*, 112, 116, 265
- `operator new`, *see also new*, 112
- operator overloading, *see overloading*, operator use
 - scope resolution, 228
- `operator!=`
 - random number distribution requirement, 1075
 - random number engine requirement, 1072
- `operator()`
 - random number distribution requirement, 1075
 - random number engine requirement, 1072
- operator-function-id*, 308, 1400
- `operator<<`
 - random number distribution requirement, 1075
 - random number engine requirement, 1072
- `operator==`
 - random number distribution requirement, 1075
 - random number engine requirement, 1072
- `operator>>`
 - random number distribution requirement, 1076
 - random number engine requirement, 1073
- operators
 - built-in, 80
- optimization of temporary, *see temporary*,
 - elimination of
- `<optional>`, 537
- optional object, 536
- order of evaluation in expression, *see expression*,
 - order of evaluation of
- order of execution
 - base class constructor, 256
 - base class destructor, 263
 - constructor and `static` objects, 267
 - constructor and array, 267
 - destructor, 263
 - destructor and array, 264
 - member constructor, 256
 - member destructor, 263
- ordering
 - function template partial, *see template*,
 - function, partial ordering
- ordinary character literal, 17
- ordinary string literal, 20
- `<ostream>`, 1178
- over-aligned type, *see type*, over-aligned
- overflow, 80
 - undefined, 80
- overload resolution, 284
- overloaded function, *see overloading*
 - address of, 109, 306
- overloaded operator, *see overloading*, operator
 - inheritance of, 308
- overloading, 194, 220, 284–314, 346
 - access control and, 287
 - address of overloaded function, 306
 - argument lists, 287–295
 - array versus pointer, 285
 - assignment operator, 309
 - binary operator, 309
 - built-in operators and, 311
 - candidate functions, 287–295
 - declaration matching, 286
 - declarations, 284
 - example of, 284
 - function call operator, 309
 - function versus pointer, 285
 - member access operator, 310
 - operator, 308–311
 - prohibited, 284
 - resolution, 287–306
 - best viable function, 296–308
 - better viable function, 296
 - contexts, 287
 - function call syntax, 289–290
 - function template, 394
 - implicit conversions and, 298–306
 - initialization, 293, 294
 - operators, 290
 - scoping ambiguity, 238
 - template, 348
 - template name, 351
 - viable functions, 295–308
 - subscripting operator, 309
 - unary operator, 308
 - user-defined literal, 310
 - using directive and, 171
 - using-declaration and, 168
- overloads
 - floating-point, 1065
- overrider
 - final, 241
- own, 584
- P_ℓ (Legendre polynomials), 1148
- P_ℓ^m (associated Legendre polynomials), 1144
- pack, 337
 - unexpanded, 338

- pack expansion, 338
 - pattern, 338
- padding bits, 58
- pair
 - tuple interface to, 523
- parallel algorithm, 1017
- parallel forward progress guarantees, 70
- param
 - random number distribution requirement, 1075
 - seed sequence requirement, 1070
- param_type
 - random number distribution requirement, 1074
- parameter, 4
 - catch clause, 4
 - function, 4
 - function-like macro, 4
 - macro, 411
 - reference, 190
 - scope of, 31
 - template, 4, 25
 - void, 193
- parameter declaration, 25
- parameter list
 - variable, 101, 193
- parameter mapping, 329
- parameter-declaration*, 193, 1398
- parameter-declaration-clause*, 193, 1398
- parameter-declaration-list*, 193, 1398
- parameter-type-list, 193
- parameterized type, *see* template
- parameters-and-qualifiers*, 186, 1397
- parent directory, 1228
- partial-concept-id*, 317, 1401
- path, 1233
 - normalization, 1237
- path equality, 1247
- pathname, 1233
- pathname*, 1236
- pathname resolution, 1233
- pattern, *see* pack expansion, pattern
- period, 428
- phases of translation, *see* translation, phases
- Π (complete elliptic integrals), 1145
- Π (incomplete elliptic integrals), 1147
- piecewise construction, 524
- piecewise_constant_distribution
 - interval boundaries, 1101
 - probability density function, 1101
 - weights, 1101
- piecewise_linear_distribution
 - interval boundaries, 1103
 - probability density function, 1102
 - weights at boundaries, 1103
- placeholder type deduction, 156
- placement *new-expression*, *see new-expression*, placement
- plain lock-free atomic operation, 490
- pm-expression*, 118, 1391
- POD, 1440
- point, 62
- point of declaration, 30
- pointer, *see also void**
 - composite pointer type, 82
 - integer representation of safely-derived, 56
 - safely-derived, 56–57
 - to traceable object, 56, 448
 - zero, *see* value, null pointer
- pointer literal, *see* literal, pointer
- pointer past the end of, 62
- pointer to, 62
- pointer to member, 61, 118, 191
- pointer-interconvertible, 62
- pointer-literal*, 21, 1388
- Poisson distributions, 1092–1095
- poisson_distribution
 - discrete probability function, 1092
 - mean, 1092
- pool resource classes, 615
- pools, 615
- population, 1035
- POSIX, 2
 - extended regular expressions, 1286
 - regular expressions, 1286
- postcondition, 178
- postfix ++ and --
 - overloading, 310
- postfix ++, 103
- postfix --, 103
- postfix-expression*, 99, 1390
- potential results, 26
- potential scope, 29
- potentially concurrent, 68
- potentially constant evaluated, 130
- potentially evaluated, 26
- potentially-overlapping subobject, 50
- potentially-throwing
 - exception specification, 401
 - expression, 402
- pp-number*, 13, 1385
- pp-tokens*, 407, 1403
- precedence of operator, *see* operator, precedence of
- precondition, 178
- preferred-separator*, 1236
- prefix
 - L, 17, 20
 - R, 20
 - U, 17, 20
 - u, 17, 20
 - u8, 17, 20
- prefix ++ and --
 - overloading, 310
- prefix ++, 110
- prefix --, 110
- preprocessing, 407
- preprocessing directive, 406–419

- conditional inclusion, 407
- error, 416
- header inclusion, 409
- line control, 416
- macro replacement, *see* macro, replacement
- null, 416
- pragma, 416
- source-file inclusion, 409
- preprocessing-file*, 406, 1402
- preprocessing-op-or-punc*, 15, 1385
- preprocessing-token*, 11, 1384
- primary class template, *see* template, primary
- primary equivalence class, 1277
- primary-expression*, 84, 1388
- private**, *see* access control, **private**
- probability density function
 - cauchy_distribution, 1098
 - chi_squared_distribution, 1097
 - exponential_distribution, 1092
 - extreme_value_distribution, 1095
 - fisher_f_distribution, 1098
 - gamma_distribution, 1093
 - lognormal_distribution, 1096
 - normal_distribution, 1095
 - piecewise_constant_distribution, 1101
 - piecewise_linear_distribution, 1102
 - student_t_distribution, 1099
 - uniform_real_distribution, 1088
 - weibull_distribution, 1094
- program, 46
 - ill-formed, 4
 - start, 71–73
 - termination, 73–74
 - well-formed, 5, 7
- program execution, 6–66
 - abstract machine, 6
 - as-if rule, *see* as-if rule
- program semantics
 - affected by the existence of a variable or function definition, 368
- promoted arithmetic type, 312
- promoted integral type, 312
- promotion
 - bool to int, 78
 - default argument promotion, 101
 - floating-point, 78
 - integral, 77
- protected**, *see* access control, **protected**
- protection, *see* access control, 448
- prototype parameter
 - concept, 351
- provides storage, 49
- pvalue, 80
- pseudo-destructor-name, 102
- pseudo-destructor-name*, 99, 1390
- ptr-abstract-declarator*, 186, 1398
- ptr-declarator*, 186, 1397
- ptr-operator*, 186, 1397
- ptrdiff_t*, 119
- implementation-defined type of, 119
- public**, *see* access control, **public**
- punctuator, 15
- pure-specifier*, 222, 1400
- q-char*, 12, 1385
- q-char-sequence*, 12, 1385
- qualification
 - explicit, 39
- qualified-concept-name*, 317, 1401
- qualified-id*, 86, 1388
- qualified-namespace-specifier*, 164, 1396
- <queue>, 956
- r-char*, 19, 1387
- r-char-sequence*, 19, 1387
- <random>, 1067
- random number distribution
 - bernoulli_distribution, 1089
 - binomial_distribution, 1089
 - cauchy_distribution, 1098
 - chi_squared_distribution, 1097
 - discrete_distribution, 1100
 - exponential_distribution, 1092
 - extreme_value_distribution, 1095
 - fisher_f_distribution, 1098
 - gamma_distribution, 1093
 - geometric_distribution, 1090
 - lognormal_distribution, 1096
 - negative_binomial_distribution, 1091
 - normal_distribution, 1095
 - piecewise_constant_distribution, 1101
 - piecewise_linear_distribution, 1102
 - poisson_distribution, 1092
 - requirements, 1074–1076
 - student_t_distribution, 1099
 - uniform_int_distribution, 1087
 - uniform_real_distribution, 1088
 - weibull_distribution, 1094
- random number distributions
 - Bernoulli, 1089–1092
 - normal, 1095–1100
 - Poisson, 1092–1095
 - sampling, 1100–1104
 - uniform, 1087–1089
- random number engine
 - linear_congruential_engine, 1077
 - mersenne_twister_engine, 1078
 - requirements, 1071–1073
 - subtract_with_carry_engine, 1079
 - with predefined parameters, 1083–1084
- random number engine adaptor
 - discard_block_engine, 1080
 - independent_bits_engine, 1081
 - shuffle_order_engine, 1082
 - with predefined parameters, 1083–1084
- random number generation, 1066–1104
 - distributions, 1087–1104
 - engines, 1076–1083

- predefined engines and adaptors, 1083–1084
- requirements, 1069–1076
- synopsis, 1067–1069
- utilities, 1085–1087
- random number generator, *see* uniform random bit generator
- random_device
 - implementation leeway, 1084
- <ratio>, 669
- raw string literal, 20
- raw-string*, 19, 1387
- ready, 1299, 1373
- redefinition
 - typedef, 145
- ref-qualifier*, 186, 1398
- reference, 61
 - assignment to, 126
 - call by, 101
 - forwarding, 384
 - lvalue, 61
 - null, 190
 - rvalue, 61
 - sizeof, 110
- reference collapsing, 190
- reference-compatible, 210
- reference-related, 210
- references
 - normative, 2
- <regex>, 1279
- regex_iterator
 - end-of-sequence, 1309
- regex_token_iterator
 - end-of-sequence, 1311
- regex_traits
 - specializations, 1288
- region
 - declarative, 24, 29
 - intervening, 30
- register storage class, 1422
- regular expression, 1277–1315
 - grammar, 1313
 - matched, 1277
 - requirements, 1278
- regular expression traits, 1313
 - char_class_type, 1278
 - isctype, 1279
 - lookup_classname, 1279, 1315
 - lookup_collatename, 1279
 - requirements, 1278, 1288
 - transform, 1278, 1315
 - transform_primary, 1279, 1315
 - translate, 1278, 1315
 - translate_nocase, 1278, 1315
- reinterpret_cast, *see* cast, reinterpret
- relational-expression*, 121, 1391
- relative path, 1233
- relative-path*, 1236
- relaxed pointer safety, 57
- release sequence, 67
- remainder operator, *see* operator, remainder
- remote time zone database, 747
- replacement
 - macro, *see* macro, replacement
- replacement-list*, 407, 1403
- representation
 - object, 58
 - value, 58
- represents the address, 62
- requirement, 97
 - compound, 98
 - nested, 98
 - simple, 97
 - type, 97
- requirement*, 96, 1390
- requirement-body*, 96, 1389
- requirement-parameter-list*, 96, 1389
- requirement-seq*, 96, 1389
- requirements, 424
 - container, 860, 883, 895, 897, 1299
 - not required for unordered associated containers, 882
 - Cpp17Allocator*, 436
 - Cpp17CopyAssignable*, 433
 - Cpp17CopyConstructible*, 433
 - Cpp17DefaultConstructible*, 433
 - Cpp17Destructible*, 433
 - Cpp17EqualityComparable*, 433
 - Cpp17Hash*, 435
 - Cpp17LessThanComparable*, 433
 - Cpp17MoveAssignable*, 433
 - Cpp17MoveConstructible*, 433
 - Cpp17NullablePointer*, 435
- iterator, 970
- numeric type, 1055
- random number distribution, 1074–1076
- random number engine, 1071–1073
- regular expression traits, 1278, 1288
- seed sequence, 1070
- sequence, 1299
 - uniform random bit generator, 1071
 - unordered associative container, 883
- requires-clause*, 315, 1401
 - trailing, 185
- requires-expression*, 96, 1389
- rescanning and replacement, *see* macro, rescanning and replacement
- reserved identifier, 13
- reset, 584
- reset
 - random number distribution requirement, 1075
- resolution, *see* overloading, resolution
- restriction, 445, 446, 448
 - address of bit-field, 229
 - anonymous union, 233
 - bit-field, 229
 - constructor, 256
 - destructor, 263

- extern**, 143
- local class, 234
- operator overloading, 308
- overloading, 308
- pointer to bit-field, 229
- reference, 190
- static**, 143
- static member local class, 234
- union**, 231
- result
 - glvalue, 81
 - prvalue, 81
- result object, 81
- result_type**
 - entity characterization based on, 1067
 - random number distribution requirement, 1074
 - seed sequence requirement, 1070
- rethrow, *see* exception handling, rethrow
- return**, 136, 137
 - and handler, 397
 - and try block, 397
 - constructor and, 137
 - reference and, 210
- return statement**, *see* **return**
- return type, 194
 - covariant, 242
 - overloading and, 284
- return-type-requirement*, 98, 1390
- rewritten candidate, 291
- right shift
 - implementation-defined, 120
- right shift operator, *see* operator, right shift
- root-directory*, 1236
- root-name*, 1236
- rounding, 78
- rvalue, 80
 - lvalue conversion to, *see* conversion, lvalue-to-rvalue, 1408
- rvalue reference, 61, 190
- s-char*, 19, 1387
- s-char-sequence*, 19, 1387
- safely-derived pointer, 56
 - integer representation, 56
- sample, 1035
- sampling distributions, 1100–1104
- scalar type, 59
- scope, 1, 24, 29–34, 141
 - anonymous union at namespace, 233
 - block, 31
 - class, 32
 - declarations and, 29–31
 - destructor and exit from, 137
 - enumeration, 33
 - exception declaration, 31
 - function, 32
 - function parameter, 31
 - function prototype, *see* scope, function parameter
 - global, 32
 - global namespace, 32
 - iteration-statement*, 134
 - macro definition, *see* macro, scope of definition
 - name lookup and, 34–46
 - namespace, 32
 - overloading and, 286
 - potential, 29
 - selection-statement*, 132
 - template parameter, 33
 - scope name hiding and, 34
 - scope resolution operator, *see* operator, scope resolution
 - <scoped_allocator>**, 619
 - seed**
 - random number engine requirement, 1072
 - seed sequence, 1070
 - requirements, 1070
 - selection-statement*, 132, 1393
 - semantics
 - class member, 102
 - separate compilation, *see* compilation, separate
 - separate translation, *see* compilation, separate
 - sequence constructor
 - seed sequence requirement, 1070
 - sequenced after, 65
 - sequenced before, 65
 - sequencing operator, *see* operator, comma
 - <set>**, 920
 - <setjmp.h>**, 489
 - setlocale**, 428
 - shared lock, 1351
 - shared mutex types, 1351
 - shared state, *see* future, shared state
 - shared timed mutex type, 1352
 - <shared_mutex>**, 1346
 - shift operator
 - left, *see* operator, left shift
 - right, *see* operator, right shift
 - shift-expression*, 120, 1391
 - short**
 - typedef and, 142
 - shuffle_order_engine**
 - generation algorithm, 1082
 - state, 1082
 - textual representation, 1083
 - transition algorithm, 1082
 - side effects, 6, 65–69, 123, 132, 258, 270, 280, 414, 447
 - visible, 68
 - sign*, 19, 1387
 - signal, 66
 - signal-safe
 - _Exit**, 465
 - abort**, 465
 - evaluation, *see* evaluation, signal-safe

- forward, 521
- initializer_list functions, 480
- memcpy, 817
- memmove, 817
- move, 521
- move_if_noexcept, 521
- numeric_limits members, 458
- quick_exit, 466
- signal, 490
- type traits, 646
- <signal.h>, 490
- signature, 4, 5
- signed
 - typedef and, 142
- signed integer representation
 - ones' complement, 60, 110, 159
 - signed magnitude, 60, 159
 - two's complement, 60, 78, 159, 670, 1325, 1333
- signed integer type, 60
- significand, 19
- similar types, 77
- simple call wrapper, 627
- simple-capture*, 91, 1389
- simple-declaration*, 140, 1393
- simple-escape-sequence*, 17, 1386
- simple-requirement*, 97, 1390
- simple-template-id*, 321, 1401
- simple-type-specifier*, 151, 1395
- size
 - seed sequence requirement, 1070
- size_t, 111
- smart pointers, 593–606
- source file, 9, 432, 444
- source file character, *see* character, source file space
 - white, 11
- , 964
- special member function, *see* constructor, *see* destructor, *see* assignment operator
- specialization
 - class template, 322
 - class template partial, 341
 - program-defined, 422
 - template, 365
 - template explicit, 372
- specification
 - linkage, 172–174
 - extern, 172
 - implementation-defined, 172
 - nesting, 172
 - template argument, 377
- specifications
 - C standard library exception, 448
 - C++, 448
- specifier, 141–157
 - constexpr, 146
 - constructor, 146, 147
 - function, 146
 - cv-qualifier, 149
 - declaration, 141
 - explicit, 144
 - friend, 146, 448
 - function, 144
 - inline, 148
 - static, 142
 - storage class, 142
 - type, *see* type specifier
 - typedef, 144
 - virtual, 144
- specifier access, *see* access specifier
- spherical harmonics Y_ℓ^m , 1149
- <sstream>, 1201
- stable algorithm, 423, 447
- <stack>, 957
- stack unwinding, 399
- standard
 - structure of, 8
- standard deviation
 - normal_distribution, 1095
- standard integer type, 60
- standard signed integer type, 60
- standard unsigned integer type, 60
- standard-layout, *see* class, standard-layout
- standard-layout types, 59
- start
 - program, 72
- startup
 - program, 432, 444
- state, 561
 - discard_block_engine, 1080
 - independent_bits_engine, 1081
 - linear_congruential_engine, 1077
 - mersenne_twister_engine, 1078
 - shuffle_order_engine, 1082
 - subtract_with_carry_engine, 1079
- statement, 131–139
 - continue in for, 135
 - break, 136, 137
 - compound, 132
 - continue, 136, 137
 - declaration, 138
 - declaration in for, 136
 - declaration in if, 131
 - declaration in switch, 131, 134
 - declaration in while, 135
 - do, 134, 135
 - empty, 132
 - expression, 132
 - fallthrough, 182
 - for, 134, 135
 - goto, 132, 136, 137
 - if, 132
 - iteration, 134–136
 - jump, 136
 - labeled, 131
 - null, 132
 - range based for, 136

- selection, [132–134](#)
- switch, [132, 133, 137](#)
- while, [134, 135](#)
- statement, [131, 1392](#)
- statement-seq, [132, 1392](#)
- static, [142](#)
 - destruction of local, [138](#)
 - linkage of, [46, 143](#)
 - overloading and, [284](#)
- static data member, [222](#)
- static initialization, [72](#)
- static member, [222](#)
- static member function, [222](#)
- static storage duration, [54](#)
- static type, *see* type, static
- static_assert*, [141](#)
- static_assert*
 - not macro, [506](#)
- static_assert-declaration*, [140, 1393](#)
- static_cast*, *see* cast, static
- <stdalign.h>*, [1428, 1431](#)
- <stdarg.h>*, [489](#)
- <stdatomic.h>*
 - absence thereof, [430, 1428](#)
- <stdbool.h>*, [1428, 1431](#)
- <stddef.h>*, [17, 20](#)
- <stdexcept>*, [503](#)
- <stdio.h>*, [1275](#)
- <stdlib.h>*, [1432](#)
- <stdnoreturn.h>*
 - absence thereof, [430, 1428](#)
- storage class, [24](#)
- storage duration, [53–57](#)
 - automatic, [54](#)
 - class member, [57](#)
 - dynamic, [54–57, 111](#)
 - local object, [54](#)
 - static, [54](#)
 - thread, [54](#)
- storage management, *see* new, delete
- storage-class-specifier*, [142, 1394](#)
- stream
 - arbitrary-positional, [421](#)
 - repositional, [423](#)
- <streambuf>*, [1170](#)
- strict pointer safety, [57](#)
- string
 - distinct, [21](#)
 - null terminator, [779](#)
 - null-terminated byte, *see* NTBS
 - null-terminated character type, [422](#)
 - null-terminated multibyte, *see* NTMBS
 - sizeof, [21](#)
 - type of, [20](#)
- <string>*, [775](#)
- string literal, *see* literal, string
- string-literal*, [19, 1387](#)
- <string.h>*, [817](#)
- <string_view>*, [806](#)
- stringize, *see* # operator
- stringizing argument, [413](#)
- strong structural equality, *see* equality, strong
 - structural
- strongly happens before, [68](#)
- <strstream>*, [1432](#)
- struct
 - standard-layout, [219](#)
- structural comparison operator, *see* operator,
 - structural comparison
- structure tag, *see* class name
- structured binding, [201](#)
- structured binding declaration, [141, 201](#)
- student_t_distribution*
 - probability density function, [1099](#)
- sub-expression
 - regular expression, [1278](#)
- subexpression, [64](#)
- subnormal number, *see* number, subnormal
- subobject, *see also* object model, [49](#)
- subscripting operator
 - overloaded, [309](#)
- subsequence rule
 - overloading, [304](#)
- substitutability, [481](#)
- subsume, *see* constraint, subsumption
- subtract_with_carry_engine*
 - carry, [1079](#)
 - generation algorithm, [1079](#)
 - state, [1079](#)
 - textual representation, [1080](#)
 - transition algorithm, [1079](#)
- subtraction
 - implementation-defined pointer, [119](#)
- subtraction operator, *see* operator, subtraction
- suffix
 - E, [19](#)
 - e, [19](#)
 - F, [19](#)
 - f, [19](#)
 - L, [16, 19](#)
 - l, [16, 19](#)
 - P, [19](#)
 - p, [19](#)
 - U, [16](#)
 - u, [16](#)
- summary
 - compatibility with ISO C, [1406](#)
 - compatibility with ISO C++ 2003, [1414](#)
 - compatibility with ISO C++ 2011, [1419](#)
 - compatibility with ISO C++ 2014, [1421](#)
 - compatibility with ISO C++ 2017, [1424](#)
 - syntax, [1384](#)
- surrogate call function, [290](#)
- swappable, [434](#)
- swappable with, [434](#)
- switch
 - and handler, [397](#)
 - and try block, [397](#)

- symbolic link, 1228
- synchronize with, 67
- <syncstream>, 1223
- synonym, 163
 - type name as, 144
- syntax
 - class member, 102
- <system_error>, 508

- target object, 627
- template, 315–396
 - class, 333
 - definition of, 315
 - function, 377
 - equivalent, *see* equivalent, function
 - template
 - functionally equivalent, *see* functionally equivalent, function template
 - partial ordering, 348
 - member function, 334
 - primary, 341
 - static data member, 315
 - variable, 315
- template, 315
- template instantiation, 365
- template name
 - linkage of, 316
- template parameter, 25
- template parameter object, 318
- template parameter pack, 337
- template parameter scope, 33
- template-argument*, 321, 1402
 - default, 319
- template-argument-list*, 321, 1402
- template-declaration*, 315, 1401
- template-head*, 315, 1401
- template-id*, 321, 1401
 - valid, 322
- template-name*, 321, 1401
- template-parameter*, 316, 1401
- template-parameter-list*, 315, 1401
- templated entity, 316
- temporary, 257
 - constructor for, 258
 - destruction of, 258
 - destructor for, 258
 - elimination of, 257, 280
 - implementation-defined generation of, 257
 - order of destruction of, 258
- terminate, 404
 - called, 125, 399, 402, 404
- termination
 - program, 71, 74
- terminology
 - pointer, 61
- text-line*, 406, 1403
- textual representation
 - discard_block_engine, 1081
 - independent_bits_engine, 1082
 - shuffle_order_engine, 1083
 - subtract_with_carry_engine, 1080
- <tgmath.h>, 1428, 1431
- this, 84, 227
 - type of, 227
- this pointer, *see* this
- thread, 66
- <thread>, 1341
- thread of execution, 66
- thread storage duration, 54
- thread_local, 142
- threads
 - multiple, 66–71
- <threads.h>
 - absence thereof, 430, 1428
- throw, 125
- throw-expression*, 125, 1392
- throwing, *see* exception handling, throwing
- <time.h>, 764
- timed mutex types, 1349
- token, 12
 - alternative, 12
 - preprocessing, 11
- token*, 12, 1384
- traceable pointer object, 56, 448
- trailing *requires-clause*, *see* *requires-clause*, trailing *trailing-return-type*, 186, 1397
- traits, 423
- transform
 - regular expression traits, 1278, 1315
- transform_primary
 - regular expression traits, 1279, 1314, 1315
- transition algorithm
 - discard_block_engine, 1081
 - independent_bits_engine, 1081
 - linear_congruential_engine, 1077
 - mersenne_twister_engine, 1078
 - shuffle_order_engine, 1082
 - subtract_with_carry_engine, 1079
- translate
 - regular expression traits, 1278, 1315
- translate_nocase
 - regular expression traits, 1278, 1315
- translation
 - phases, 9–10
 - separate, *see* compilation, separate
- translation unit, 9, 46
 - name and, 24
- translation-unit*, 46, 1388
- trigraph sequence, 1421
- trivial class, *see* class, trivial
- trivial types, 59
- trivially copyable class, *see* class, trivially copyable
- trivially copyable types, 59
- truncation, 78
- try, 397
- try block, *see* exception handling, try block
- try-block*, 397, 1402
- <tuple>, 527

- tuple
 - and pair, 523
- type, 24, 58–63
 - allocated, 111
 - arithmetic, 61
 - promoted, 312
 - array, 61
 - bitmask, 427, 428
 - Boolean, 60
 - char, 60
 - char16_t, 17, 20, 60, 63
 - char32_t, 17, 20, 60, 63
 - character, 60
 - character container, 421
 - class and, 218
 - compound, 61
 - const, 149
 - cv-combined, 82
 - cv-unqualified, 62
 - destination, 205
 - double, 61
 - dynamic, 3
 - enumerated, 61, 427
 - example of incomplete, 58
 - extended integer, 60
 - extended signed integer, 60
 - extended unsigned integer, 60
 - float, 61
 - floating-point, 61
 - function, 61, 192, 193
 - fundamental, 61
 - implementation-defined sizeof, 60
 - incomplete, 26, 27, 30, 58, 76, 99–103, 109–111, 115, 126, 235
 - incompletely-defined object, 58
 - int, 60
 - integral, 60
 - promoted, 312
 - long, 60
 - long double, 61
 - long long, 60
 - narrow character, 60
 - over-aligned, 57
 - pointer, 61
 - polymorphic, 240
 - program-defined, 423
 - referenceable, 423
 - short, 60
 - signed char, 60
 - signed integer, 60
 - similar, *see* similar types
 - standard integer, 60
 - standard signed integer, 60
 - standard unsigned integer, 60
 - static, 5
 - trivially copyable, 58
 - underlying
 - char16_t, 60, 77
 - char32_t, 60, 77
 - enumeration, 77, 158
 - fixed, 158
 - wchar_t, 60, 77
 - unsigned, 60
 - unsigned char, 60
 - unsigned int, 60
 - unsigned integer, 60
 - unsigned long, 60
 - unsigned long long, 60
 - unsigned short, 60
 - void, 61
 - volatile, 149
 - wchar_t, 17, 20, 60, 63
- type checking
 - argument, 101
- type conversion, explicit, *see* casting
- type generator, *see* template
- type name, 186
 - nested, 231
 - scope of, 231
- type pun, 108
- type specifier
 - auto, 151, 154
 - bool, 151
 - char, 151
 - char16_t, 151
 - char32_t, 151
 - const, 149
 - decltype, 151
 - double, 151
 - elaborated, 44, 153
 - enum, 153
 - float, 151
 - int, 151
 - long, 151
 - short, 151
 - signed, 151
 - simple, 150
 - unsigned, 151
 - void, 151
 - volatile, 149, 150
 - wchar_t, 151
- type-id*, 186, 1398
- type-id-only context, 352
- type-name*, 151, 1395
- type-parameter*, 317, 1401
- type-parameter-key*, 317, 1401
- type-requirement*, 97, 1390
- type-specifier*, 149, 1394
- type-specifier-seq*, 149, 1394
- type_info, 104
- <type_traits>, 646, 1440
- typedef
 - function, 194
- typedef
 - overloading and, 285
- typedef-name*, 144, 1394
- typeid, 104
 - construction and, 275

- destruction and, 275
- `<typeindex>`, 764
- `<typeinfo>`, 473
- typename, 153
- typename-specifier*, 351, 1402
- types
 - implementation-defined, 426
- `<uchar.h>`, 818
- ud-suffix*, 22, 1388
- unary fold, 96
- unary left fold, 96
- unary operator
 - interpretation of, 308
 - overloaded, 308
- unary right fold, 96
- unary-expression*, 109, 1390
- unary-operator*, 109, 1390
- unblock, 5
- undefined, 423, 442, 444, 445, 1115, 1119, 1122, 1163
- undefined behavior, *see* behavior, undefined
- underlying type, *see* type, underlying
- unevaluated operand, 83
- Unicode required set, 418
- uniform distributions, 1087–1089
- uniform random bit generator
 - requirements, 1071
- `uniform_int_distribution`
 - discrete probability function, 1087
- `uniform_real_distribution`
 - probability density function, 1088
- union, 218
 - standard-layout, 219
- `union`, 61, 231
 - anonymous, 232
 - global anonymous, 233
- union-like class, 233
- unique pointer, 584
- unit
 - translation, 432, 443
- universal character name, 9
- universal-character-name*, 10, 1384
- Unix time, 699
- unnamed bit-field, 229
- unnamed-namespace-definition*, 160, 1396
- unordered associative containers, 883
 - complexity, 882
 - equality function, 882
 - equivalent keys, 882, 883, 944, 952
 - exception safety, 892
 - hash function, 882
 - iterator invalidation, 892
 - iterators, 892
 - lack of comparison functions, 882
 - requirements, 882, 883, 892
 - unique keys, 882, 883, 938, 948
- `<unordered_map>`, 936
- `unordered_map`
 - element access, 942
 - unique keys, 938
- `unordered_multimap`
 - equivalent keys, 944
- `unordered_multiset`
 - equivalent keys, 952
- `<unordered_set>`, 937
- `unordered_set`
 - unique keys, 948
- unqualified-id*, 86, 1388
- unsequenced, 65
- unsigned
 - `typedef` and, 142
- unsigned integer type, 60
- unsigned-suffix*, 16, 1386
- unspecified, 467, 469, 474, 1038, 1205, 1434–1436
- unspecified behavior, *see* behavior, unspecified
- unwinding
 - stack, 399
- uppercase, 14, 428
- upstream, 618
- upstream allocator, 615
- user-defined literal, *see* literal, user-defined
 - overloaded, 310
 - user-defined-character-literal*, 22, 1388
 - user-defined-floating-literal*, 22, 1388
 - user-defined-integer-literal*, 22, 1388
 - user-defined-literal*, 21, 1388
 - user-defined-string-literal*, 22, 1388
- user-provided, 200
- uses-allocator construction, 578
- using-declaration, 164–169
 - using-declaration*, 164, 1396
 - using-declarator*, 164, 1396
 - using-declarator-list*, 164, 1396
- using-directive, 169–172
 - using-directive*, 169, 1396
- usual arithmetic conversions, *see* conversion, usual
 - arithmetic
- usual deallocation function, 56
- UTF-8 character literal, 17
- UTF-8 string literal, 20
- `<utility>`, 518, 1432
- `<valarray>`, 1104
- valid but unspecified state, 423
- value, 58
 - call by, 101
 - denormalized, *see* number, subnormal
 - indeterminate, 203
 - invalid pointer, 62
 - null member pointer, 79
 - null pointer, 62, 78
 - undefined unrepresentable integral, 78
- value category, 81
- value computation, 65–66, 68, 69, 103, 114, 123–126, 258
- value representation, 58
- value-initialization, 203

- variable, 24
 - function-local predefined, 199
 - indeterminate uninitialized, 203
 - inline, 148
 - needed for constant evaluation, 130
 - program semantics affected by the existence of a variable definition, 368
- variable arguments, 411
- variable template
 - definition of, 315
- variadic concept, *see* concept, variadic
- <variant>, 549
- variant member, 233
- <vector>, 895
- vectorization-unsafe, 1018
- violation continuation mode, 181
- violation handler, 181
- virt-specifier*, 222, 1400
- virt-specifier-seq*, 222, 1400
- virtual base class, *see* base class, virtual
- virtual function, *see* function, virtual
- virtual function call, 244
 - constructor and, 274
 - destructor and, 274
 - undefined pure, 245
- visibility, 34
- visible, 34
- void*
 - type, 62
- void&, 189
- volatile, 62
 - constructor and, 227, 256
 - destructor and, 227, 263
 - implementation-defined, 150
 - overloading and, 285
- volatile member function, 227
- volatile-qualified, 62

- waiting function, 1372
- <wchar.h>, 818
- wchar_t, *see* type, wchar_t
- <wctype.h>, 816
- weakly parallel forward progress guarantees, 70
- weibull_distribution
 - probability density function, 1094
- weights
 - discrete_distribution, 1100
 - piecewise_constant_distribution, 1101
- weights at boundaries
 - piecewise_linear_distribution, 1103
- well-formed program, *see* program, well-formed
- white space, 12
- wide string literal, 20
- wide-character, 17
 - null, 10
- wide-character literal, 17
- wide-character set
 - basic execution, 10
 - execution, 10
- writable, 970
- X(X&), *see* constructor, copy
- xvalue, 80
- Y_{ℓ}^m (spherical associated Legendre functions), 1149
- zero
 - division by undefined, 80
 - remainder undefined, 80
 - undefined division by, 119
- zero-initialization, 203
- zeta functions ζ , 1148

Index of grammar productions

The first bold page number for each entry is the page in the general text where the grammar production is defined. The second bold page number is the corresponding page in the Grammar summary ([Annex A](#)). Other page numbers refer to pages where the grammar production is mentioned in the general text.

- abstract-declarator*, 98, **186**, 187, 193, 195, 196, **1398**
- abstract-pack-declarator*, **186**, **1398**
- access-specifier*, 235, **235**, 247, 248, **1400**
- additive-expression*, **119**, **1391**
- alias-declaration*, 25, **140**, 144, 145, 194, 222, 315, 333, 350, **1393**
- alignment-specifier*, **174**, 175, 176, 338, **1396**
- and-expression*, **123**, **1391**
- asm-definition*, 140, 146, 172, **172**, **1396**
- assertion-level*, 476
- assignment-expression*, **125**, 141, 154, 156, 196, 201, 206, 209, 229, 267, 293, **1392**
- assignment-operator*, **125**, **1392**
- attribute*, 175, **175**, 338, **1396**
- attribute-argument-clause*, 175, **175**, 177, 182–184, **1397**
- attribute-declaration*, 25, **140**, 141, **1394**
- attribute-list*, **174**, 175, 177, 182–184, 338, **1396**
- attribute-namespace*, 175, **175**, **1397**
- attribute-scoped-token*, 175, **175**, **1397**
- attribute-specifier*, **174**, 175, **1396**
- attribute-specifier-seq*, 88, 112, 131, 132, 134, 140, 142, 144, 149, 153, 157, 158, 161, 162, 169, 172, **174**, 175, 182, 188, 189, 191, 193, 198, 218, 223, 229, 235, 255, 263, 397, **1396**
- attribute-token*, 14, 175, **175**, 177, 182–184, 408, 443, **1397**
- attribute-using-prefix*, **174**, 175, **1396**
- balanced-token*, **175**, **1397**
- balanced-token-seq*, 175, **175**, **1397**
- base-clause*, 218, **235**, **1400**
- base-specifier*, 36, 41, 235, **235**, 238, 247, 250, 338, **1400**
- base-specifier-list*, 235, **235**, 247, 270, 271, 279, 282, 338, 339, **1400**
- binary-digit*, **15**, **1386**
- binary-exponent-part*, **19**, **1387**
- binary-literal*, **15**, **1386**
- block-declaration*, **140**, **1393**
- boolean-literal*, **21**, **1388**
- brace-or-equal-initializer*, 64, 192, 202, **202**, 204, 206, 223, 229, 256, 361, **1398**
- braced-init-list*, 64, 100, 101, 112, 126, 130, 156, **202**, 204, 205, 212, 213, 215, 257, 267, 268, 271, 357, 362, 376, **1399**, 1405, 1422
- c-char*, 17, **17**, 18, 20, **1386**
- c-char-sequence*, 10, **17**, **1386**
- capture*, **91**, 338, **1389**
- capture-default*, 27, 91, **91**, 92, 94, **1389**, 1425, 1430
- capture-list*, **91**, 338, **1389**
- cast-expression*, 96, 115, 117, **117**, 118, 130, 266, 338, 339, 362, 363, **1391**
- character-literal*, **17**, **1386**
- class-head*, 30, 176, 218, **218**, 221, **1399**
- class-head-name*, 162, 218, **218**, 220, 322, **1399**
- class-key*, 44, 141, 153, 154, 162, 218, **218**, 219, 221, 248, 334, **1399**
- class-name*, 8, 31, 34, 40, 44, 45, 86, 110, 141, 145, 153, 218, **218**, 221, 235, 255, 263, 322, 1384, **1399**
- class-or-decltype*, 218, 235, **235**, 268, 322, 352, **1400**
- class-specifier*, 30, 141, 149, 218, **218**, 220, 223, 255, **1399**
- class-virt-specifier*, 218, **218**, 655, **1399**
- compare-expression*, **120**, **1391**
- compound-requirement*, 98, **98**, **1390**
- compound-statement*, 64, 71, 90–92, 94, 95, 132, **132**, 134, 146, 147, 256, 269, 270, 368, 397, 398, 400, 401, **1392**
- concept-definition*, 315, **315**, 350, 351, **1401**
- concept-name*, **315**, 318, 319, 350, **1401**
- condition*, 31, 131, **131**, 133–136, 138, 204, 205, 397, **1392**
- conditional-expression*, 124, **124**, 178, 421, **1392**
- conditionally-supported-directive*, **406**, 407, 411, **1403**
- constant-expression*, 3, 37, 64, 112, **127**, 133, 141, 144, 158, 176, 191, 223, 229, 288, 402, 425, **1392**
- constrained-parameter*, 89, 98, **317**, 318, 319, 330, **1401**
- constraint-expression*, 85, 98, 99, 130, 185, 316, 318, 319, 330, **330**, 331, 347, 425, **1402**
- constraint-logical-and-expression*, **315**, **1401**
- constraint-logical-or-expression*, 130, 185, **315**, 316, **1401**
- contract-attribute-specifier*, 178, **178**, 179, 180, **1397**
- contract-level*, 178, **178**, 180, **1397**
- control-line*, **406**, **1403**
- conversion-declarator*, **262**, **1400**
- conversion-function-id*, 24, 41, 45, 86, 87, 154, **261**, 262, 316, 361, **1400**, 1426

- conversion-type-id*, 41, 45, 87, **261**, 262, 290, **1400**
- ctor-initializer*, 37, 180, 199, 216, 256, 268, **268**, 269, 271, 397, 398, **1400**
- cv-qualifier*, 62, 117, 125, 141, 142, 149, **186**, 189, 191, 193, 201, 223, 227, 290, 318, 400, **1398**
- cv-qualifier-seq*, 84, 98, 118, 149, **186**, 189, 191–194, 199, 533, **1397**
- d-char*, 11, **20**, **1388**
- d-char-sequence*, 19, **19**, 20, 1387, **1387**
- decimal-floating-literal*, **18**, **1387**
- decimal-literal*, **15**, **1386**
- decl-specifier*, 87, 88, 131, 136, 140, 142, **142**, 144, 151, 154, 157, 185, 255, 262, 263, 352, **1394**, 1426
- decl-specifier-seq*, 31, 62, 87, 131, 136, 140–142, **142**, 143, 144, 149, 154, 157, 185, 188, 193, 199, 201, 223, 252, 255, 262, 263, 352, **1394**, 1410
- declaration*, 24, 25, 33, 138, 139, **140**, 145, 149, 160, 164, 166, 221, 251, 315, 350, 370, 371, **1393**
- declaration-seq*, 8, 24, **140**, **1393**
- declaration-statement*, 138, **138**, **1393**
- declarator*, 25, 62, 84, 131, 138, 140, 141, 144, 154, 157, 185, **186**, 188, 193, 196, 198, 199, 223, 255, 263, 352, 370, **1397**
- declarator-id*, 33, 35–38, 40, 41, 44, 86, 92, 140, 141, 162, 177, 183, 184, **186**, 188, 193, 195, 201, 223, 228, 311, 316, 322, 352, 353, 383, 387, 391, 394, **1398**, 1426
- decltype-specifier*, 39, 81, 86, 89, 102, 110, **151**, 152, 160, 188–190, 220, 257, 264, 322, 332, 389, **1395**
- deduction-guide*, 25, 140, 294, 295, 297, 315, **395**, 396, **1402**
- default-template-argument*, **317**, **1401**
- defined-macro-expression*, 407, **407**, 408, **1403**
- defining-type-id*, 30, 145, **186**, 352, **1398**
- defining-type-specifier*, 141, 142, 144, 149, **149**, 262, **1394**
- defining-type-specifier-seq*, 145, 149, **149**, **1394**
- delete-expression*, 51, 54, 55, 113, 115, **115**, 116, 128, 264–266, 468, 470, **1391**
- designated-initializer-clause*, **202**, 206, 212, **1399**
- designated-initializer-list*, **202**, 205, 206, 212, 213, 301, **1399**
- designator*, **202**, 205, 206, 213, **1399**
- digit*, **13**, 410, **1385**
- digit-sequence*, 19, **19**, **1387**
- directory-separator*, 1236, **1236**, 1237, 1241, 1243, 1245, 1246
- elaborated-type-specifier*, 25, 26, 30, 31, 41, 44, 141, 145, 153, **153**, 162, 163, 176, 218, 220, 221, 238, 322, 340, 352, 355, 370, **1395**
- elif-group*, **406**, **1403**
- elif-groups*, **406**, **1403**
- else-group*, **406**, **1403**
- empty-declaration*, 24, 25, **140**, 141, 222, **1394**
- enclosing-namespace-specifier*, **160**, 161, **1396**
- encoding-prefix*, **17**, 20, 310, **1386**
- endif-line*, **406**, **1403**
- enum-base*, 157, **157**, 158, **1395**
- enum-head*, 157, **157**, 160, 176, **1395**
- enum-head-name*, **157**, 162, 322, **1395**
- enum-key*, **157**, 158, **1395**
- enum-name*, 44, 141, 153, 157, **157**, 159, **1395**
- enum-specifier*, 30, 33, 37, 141, 149, **157**, 158–160, 222, 223, **1395**
- enumerator*, 37, 40, 141, **157**, 158, 159, **1395**
- enumerator-definition*, 30, 37, **157**, 158, **1395**
- enumerator-list*, **157**, 158, 159, **1395**
- equality-expression*, **122**, **1391**
- escape-sequence*, **17**, **1386**
- exception-declaration*, 28, 31, 38, 176, 280, 397, **397**, 399–401, **1402**
- exclusive-or-expression*, **123**, **1392**
- explicit-instantiation*, 141, 143, **370**, 371, **1402**
- explicit-specialization*, 141, **373**, **1402**
- explicit-specifier*, 144, **144**, 188, 255, 288, 295, 381, **1394**
- exponent-part*, **19**, **1387**
- expr-or-braced-init-list*, 137, **202**, **1399**
- expression*, 37, 49, 83, 97, 98, 100, 105, 112, 117, **126**, 131, 135, 136, 152, 259, 280, 281, 329, 330, 332, 361, 362, 389, 662, **1392**
- expression-list*, 64, **99**, 100–102, 113, 154, 204, 205, 267, 268, 271, 289, 290, 293, 309, 339, 357, **1390**
- expression-statement*, **132**, 138, 179, **1392**
- fallback-separator*, **1236**
- filename*, 1233, 1236, **1236**, 1244, 1246
- floating-literal*, **18**, **1387**
- floating-suffix*, **19**, **1387**
- fold-expression*, **95**, 319, 338, 339, 362, **1389**
- fold-operator*, 96, **96**, 339, **1389**
- for-range-declaration*, 31, 134, **134**, 136, **1393**
- for-range-initializer*, 31, **134**, 136, 213, **1393**
- fractional-constant*, **18**, **1387**
- function-body*, 24, 31, 90, 146, 147, 198, **198**, 199, 200, 400, **1398**
- function-definition*, 25, 84, 140, 141, 144, 198, **198**, 352, **1398**
- function-specifier*, 144, **144**, **1394**
- function-try-block*, 32, 38, 100, 147, 180, 397, **397**, 398, 400, 401, 490, **1402**
- group*, **406**, **1402**
- group-part*, **406**, **1402**
- h-char*, **12**, **1385**
- h-char-sequence*, **12**, 13, **1385**
- h-pp-tokens*, **407**, **1403**
- h-preprocessing-token*, **407**, **1403**
- handler*, 31, 280, **397**, 398, 400, 401, **1402**

- handler-seq*, 397, **397**, **1402**
has-attribute-expression, 407, **407**, 408, **1403**
has-include-expression, 407, **407**, 408, **1403**
header-name, 9, 11, **12**, 13, **1384**
hex-quad, **10**, **1384**
hexadecimal-digit, **16**, **1386**
hexadecimal-digit-sequence, **15**, 19, **1386**
hexadecimal-escape-sequence, **17**, **1387**
hexadecimal-floating-literal, **18**, **1387**
hexadecimal-fractional-constant, **19**, **1387**
hexadecimal-literal, **15**, **1386**
hexadecimal-prefix, **15**, **1386**
- id-expression*, 3, 26, 45, 83, 85, **85**, 86, 90, 92, 94, 100, 102, 127, 151, 197, 201, 202, 226, 237, 255, 263, 281, 289, 318, 319, 327, 328, 331, 339, 351, 359–362, **1388**
- identifier*, 13, **13**, 24, 30, 31, 41, 44, 45, 86, 91, 92, 94, 144, 153, 157, 158, 160–162, 164, 175, 178, 188, 201, 205, 206, 213, 218, 221, 229, 268, 310, 316, 317, 320, 338, 350, 352, 358, 361, 396, 409, **1385**
- identifier-list*, 8, 31, 141, 201, 202, **407**, 411, **1403**
identifier-nondigit, **13**, **1385**
if-group, **406**, **1403**
if-section, **406**, **1403**
inclusive-or-expression, **123**, **1392**
init-capture, 64, 91, **91**, 92, 95, 337, 339, **1389**
init-declarator, 64, 136, 141, 142, 154, 185, **185**, 370, **1397**
init-declarator-list, 140–142, 149, 154, 157, 185, **185**, 188, 316, 370, **1397**
init-statement, 31, **131**, 132–136, 138, **1392**
initializer, 24, 30, 64, 91, 94, 95, 138, 141, 154, 158, 190, 192, 201, 202, **202**, 203, 204, 228, 229, 267, 293, 337, 370, **1398**
initializer-clause, 64, 100, 113, 195, 196, **202**, 205–210, 212, 215, 216, 229, 338, **1399**, 1405
initializer-list, **202**, 206–209, 212, 214–216, 267, 338, **1399**
integer-literal, **15**, 22, 408, **1385**
integer-suffix, **16**, **1386**
iteration-statement, 134, **134**, 137, **1393**
- jump-statement*, **137**, **1393**
- labeled-statement*, 24, **131**, **1392**
lambda-capture, 89, 91, **91**, **1389**
lambda-declarator, 31, 87, **87**, 88, 92, 196, 352, **1389**
lambda-expression, 27, 29, 64, 86, 87, **87**, 88–95, 115, 127, 146, 281, 316, 347, 350, 381, **1389**, 1404, 1412, 1430
lambda-introducer, **87**, 92, 115, **1389**
linkage-specification, 24, 48, 71, 140, 143, 172, **172**, 174, **1396**, 1405
literal, **15**, 22, 84, **1385**
- literal-operator-id*, 22, 24, 86, 310, **310**, 311, 316, 332, **1401**
logical-and-expression, **123**, **1392**
logical-or-expression, **123**, **1392**
long-long-suffix, **16**, **1386**
long-suffix, **16**, **1386**
lparen, **406**, **1403**
- mem-initializer*, 37, 64, 208, 213, 268, **268**, 269–271, 275, 338, **1400**
mem-initializer-id, 268, **268**, 269, 338, **1400**
mem-initializer-list, 268, **268**, 269, 338, **1400**
member-declaration, 41, 157, 164, 165, 169, 198, 222, **222**, 223, 232, 255, 263, 352, **1399**
member-declarator, 84, 185, 222, **222**, 223, 229, 362, **1399**
member-declarator-list, 142, 149, 157, 188, **222**, 223, **1399**
member-specification, 36, **221**, 222, 223, 228, 232, 246, 252, 255, 263, 282, **1399**, 1404
multiplicative-expression, **119**, **1391**
- named-namespace-definition*, 160, **160**, 161, **1396**
namespace-alias, 160, **163**, 164, **1396**
namespace-alias-definition, 46, 163, 164, **164**, **1396**
namespace-body, 32, 33, 160, **160**, 161, **1396**
namespace-definition, 32, 140, 160, **160**, 161, 171, **1396**
namespace-name, 34, 45, 46, 160, **160**, 161, 164, 169, **1396**
nested-name-specifier, 39–41, 44–46, 86, **86**, 87, 151, 157, 158, 160, 164, 166, 188, 191, 220, 226, 228, 237, 238, 249, 253, 263, 322, 341, 352, 359–361, 382, 389, **1389**
nested-namespace-definition, **160**, 161, **1396**
nested-requirement, 98, **98**, 99, **1390**
new-declarator, 111, **111**, **1391**
new-expression, 27, 28, 49, 54, 55, 66, 111, **111**, 112–116, 128, 154, 157, 200, 213, 232, 256, 264, 398, 400, 402, 467–471, **1391**, 1421
new-initializer, 111, **111**, 112, 114, 204, 256, 259, **1391**
new-line, **407**, **1403**
new-placement, **111**, 113, 115, **1391**
new-type-id, 62, 111, **111**, 112, 154, 157, 352, 361, **1391**
nodeclspec-function-declaration, 140, **140**, 141, **1393**
noexcept-expression, **117**, **1391**
noexcept-specifier, 36, 88, 223, 263, 267, 333, 355, 363, 364, 366, 369, 380, 401, 402, **402**, 403, 404, **1402**
nondigit, **13**, 410, **1385**
nonzero-digit, **15**, **1386**
noptr-abstract-declarator, **186**, **1398**
noptr-abstract-pack-declarator, **187**, **1398**
noptr-declarator, **186**, **1397**

- noptr-new-declarator*, **111**, **112**, **1391**
- octal-digit*, **15**, **1386**
- octal-escape-sequence*, **17**, **1387**
- octal-literal*, **15**, **1386**
- opaque-enum-declaration*, **25**, **30**, **157**, **157**, **158**, **162**, **176**, **222**, **1395**
- operator*, **308**, **1400**
- operator-function-id*, **24**, **86**, **308**, **308**, **316**, **332**, **370**, **1400**
- parameter-declaration*, **25**, **87**, **88**, **144**, **154**, **157**, **177**, **193**, **193**, **195**, **196**, **317**, **320**, **338**, **352**, **391**, **1398**
- parameter-declaration-clause*, **31**, **33**, **35–37**, **88**, **92**, **97**, **188**, **193**, **193**, **195**, **196**, **225**, **281**, **311**, **396**, **1398**
- parameter-declaration-list*, **193**, **383**, **389**, **1398**
- parameters-and-qualifiers*, **186**, **1397**
- partial-concept-id*, **317**, **318**, **319**, **333**, **353**, **366**, **369**, **1401**
- pathname*, **1236**
- pm-expression*, **118**, **118**, **1391**
- pointer-literal*, **21**, **1388**
- postfix-expression*, **35**, **38**, **41**, **45**, **46**, **99**, **100**, **102**, **226**, **289**, **290**, **309**, **357**, **364**, **402**, **624**, **1390**
- pp-number*, **13**, **408**, **1385**, **1419**, **1421**
- pp-tokens*, **407**, **408**, **419**, **1403**
- preferred-separator*, **1236**, **1236**, **1237**, **1240**, **1241**, **1243**
- preprocessing-file*, **406**, **1402**
- preprocessing-op-or-punc*, **15**, **15**, **1385**
- preprocessing-token*, **11**, **12**, **407**, **412**, **1384**, **1403**
- primary-expression*, **84**, **85**, **289**, **1388**
- pseudo-destructor-name*, **40**, **99**, **102**, **1390**
- ptr-abstract-declarator*, **186**, **1398**
- ptr-declarator*, **186**, **255**, **263**, **1397**
- ptr-operator*, **186**, **1397**
- pure-specifier*, **222**, **223**, **245**, **1400**
- q-char*, **12**, **1385**
- q-char-sequence*, **12**, **13**, **1385**
- qualified-concept-name*, **317**, **318**, **319**, **347**, **1401**
- qualified-id*, **8**, **38**, **40**, **41**, **44**, **45**, **86**, **86**, **87**, **100**, **109**, **110**, **201**, **226–228**, **237**, **245**, **249**, **255**, **264**, **317**, **322**, **340**, **351–353**, **359–361**, **363**, **370**, **382**, **389**, **576**, **578–580**, **586**, **689**, **866**, **874**, **882**, **1238**, **1388**
- qualified-namespace-specifier*, **164**, **164**, **1396**
- r-char*, **11**, **19**, **1387**
- r-char-sequence*, **10**, **19**, **1387**
- raw-string*, **19**, **20**, **1387**
- ref-qualifier*, **5**, **103**, **118**, **167**, **186**, **189**, **191**, **193**, **194**, **199**, **201**, **227**, **284**, **288**, **304**, **312**, **348**, **423**, **1398**
- relational-expression*, **121**, **1391**
- relative-path*, **1236**, **1237**
- replacement-list*, **407**, **411**, **1403**
- requirement*, **96**, **97**, **1390**
- requirement-body*, **96**, **96**, **97**, **1389**
- requirement-parameter-list*, **96**, **97**, **1389**
- requirement-seq*, **96**, **1389**
- requires-clause*, **4**, **5**, **85**, **87–89**, **96**, **130**, **185**, **194**, **242**, **285**, **286**, **315**, **316**, **328**, **330**, **333**, **341**, **347**, **353**, **366**, **369**, **1401**, **1424**
- requires-expression*, **96**, **96**, **97**, **98**, **491**, **1389**, **1424**
- return-type-requirement*, **98**, **98**, **1390**
- root-directory*, **1233**, **1236**, **1237**, **1244**, **1246**
- root-name*, **1233**, **1236**, **1236**, **1237**, **1240**, **1244**, **1246**
- s-char*, **19**, **1387**
- s-char-sequence*, **10**, **19**, **1387**
- selection-statement*, **131**, **132**, **132**, **1393**
- shift-expression*, **120**, **1391**
- sign*, **19**, **1387**, **1421**
- simple-capture*, **27**, **91**, **91**, **92**, **95**, **1389**
- simple-declaration*, **140**, **140**, **141**, **185**, **352**, **370**, **1393**
- simple-escape-sequence*, **17**, **1386**
- simple-requirement*, **97**, **97**, **98**, **1390**
- simple-template-id*, **30**, **41**, **45**, **152**, **153**, **218**, **294**, **316**, **321**, **322**, **323**, **325**, **341**, **343**, **344**, **352**, **354**, **361**, **365**, **370**, **375**, **384**, **393**, **396**, **1401**, **1426**
- simple-type-specifier*, **101**, **138**, **151**, **151**, **152**, **153**, **157**, **188**, **351**, **361**, **362**, **1395**
- statement*, **131**, **132**, **135**, **138**, **397**, **1392**
- statement-seq*, **132**, **1392**
- static_assert-declaration*, **425**
- static_assert-declaration*, **25**, **140**, **141**, **222**, **232**, **1393**
- storage-class-specifier*, **142**, **142**, **143**, **223**, **252**, **1394**, **1422**
- string-literal*, **19**, **20**, **21**, **141**, **172**, **182**, **210**, **310**, **413**, **1387**
- template-argument*, **22**, **37**, **39**, **41**, **45**, **194**, **247**, **317–321**, **321**, **322–328**, **332**, **334**, **338**, **340**, **350**, **354**, **355**, **363**, **365**, **371**, **375**, **377–379**, **383**, **385**, **393–395**, **1402**
- template-argument-list*, **321**, **321**, **322**, **324**, **333**, **338**, **339**, **344**, **355**, **361**, **1402**
- template-declaration*, **33**, **140**, **141**, **145**, **251**, **315**, **315**, **316**, **350**, **1401**
- template-head*, **4**, **5**, **315**, **315**, **327**, **328**, **333**, **335**, **347**, **1401**
- template-id*, **24**, **39**, **41**, **86**, **163**, **165**, **201**, **307**, **316**, **321**, **321**, **322**, **323**, **325**, **332**, **333**, **337**, **340**, **344**, **350**, **357**, **361**, **365**, **370**, **375**, **378**, **379**, **1401**
- template-name*, **35**, **41**, **151**, **152**, **294**, **317**, **321**, **321**, **323**, **332**, **333**, **341**, **350**, **355**, **370**, **395**, **396**, **1401**, **1426**

- template-parameter*, 25, 31, 33, 34, 88, 132, 151, 154, 157, 196, 306, 311, 316, **316**, 317–320, 322–328, 332, 347, 350–352, 354–357, 361, 363, 376, 378, 379, 383, 385, 389, 393, 395, **1401**
- template-parameter-list*, 4, 33, 87, 88, 195, 311, 315, **315**, 316–320, 323, 330, 338, 344, 347, 376, **1401**
- text-line*, **406**, **1403**
- throw-expression*, 124, 125, **125**, 128, 280, 281, 398, 400, 402, 404, **1392**
- token*, **12**, 175, **1384**, 1397
- trailing-return-type*, 84, 87–89, 98, 154, **186**, 193, 195, 352, **1397**
- translation-unit*, **46**, **1388**
- try-block*, 146, 280, 281, 397, **397**, 398, 490, **1402**
- type-id*, 3, 62, 63, 77, 99, 105, 110–112, 117, 154, 157, 176, 186, **186**, 187, 194, 321, 324, 325, 350, 352, 361, 362, **1398**
- type-name*, 31, 40, 44, 45, 102, 139, 142, **151**, 152, 153, 188, 264, 322, 333, 355, **1395**, 1415
- type-parameter*, 153, 194, 317, **317**, 320, 338, 352, 358, 393, **1401**
- type-parameter-key*, 317, **317**, **1401**
- type-requirement*, 97, **97**, **1390**
- type-specifier*, 60, 87, 98, 131, 136, 141, 142, 149, **149**, 151, 154, 156, 157, 191, 193, 221, 223, **1394**, 1410
- type-specifier-seq*, 111, 149, **149**, 154, 157, 158, **1394**
- typedef-name*, 8, 34, 86, 141, 142, 144, **144**, 145, 152, 153, 169, 182, 183, 189, 190, 194, 221, 255, 263, 317, 332, 487, 653, 665, 667, 668, 672, 770, 775, 970, 1071, 1153, 1278, 1384, **1394**
- typename-specifier*, 101, 149, 322, 351, **351**, **1402**
- ud-suffix*, 22, **22**, 23, 310, **1388**
- unary-expression*, **109**, 264, 362, **1390**
- unary-operator*, **109**, **1390**
- universal-character-name*, 9, 10, **10**, 11, 13, 18, 21, **1384**
- unnamed-namespace-definition*, **160**, 162, **1396**
- unqualified-id*, 38, 44, 45, 86, **86**, 87, 109, 110, 136, 162, 164, 188, 201, 226, 228, 317, 321, 340, 357, 370, **1388**, 1426
- unsigned-suffix*, **16**, **1386**
- user-defined-character-literal*, **22**, 23, **1388**
- user-defined-floating-literal*, 22, **22**, **1388**
- user-defined-integer-literal*, 22, **22**, **1388**
- user-defined-literal*, **21**, 22, **1388**
- user-defined-string-literal*, 22, **22**, 23, 310, **1388**
- using-declaration*, 25, 38, 39, 41, 140, 158, 160, 164, **164**, 165–169, 188, 198, 220, 222, 238, 246, 279, 284, 288, 298, 311, 322, 337, 338, 342, 353, 431, **1396**, 1422, 1432
- using-declarator*, 30, 41, 164, **164**, 167–169, 338, **1396**
- using-declarator-list*, **164**, **1396**
- using-directive*, 25, 30, 32, 34, 35, 39–41, 44, 46, 87, 140, 161, 169, **169**, 170, 171, 284, **1396**
- virt-specifier*, **222**, 223, 241, **1400**
- virt-specifier-seq*, 198, **222**, 223, **1400**

Index of library headers

[<algorithm>](#), 998
[<any>](#), 560
[<array>](#), 893
[<assert.h>](#), 432, 506, 1428
[<atomic>](#), 1316

[<bit>](#), 1065
[<bitset>](#), 565

[<cassert>](#), 432, 506, 858, 1428
[<cctype>](#), 815
[<cerrno>](#), 443, 507
[<cfenv>](#), 1056
[<charconv>](#), 767
[<chrono>](#), 672
[<cinttypes>](#), 1275, 1276
[<climits>](#), 1434
[<locale>](#), 428, 1429
[<cmath>](#), 1135, 1143
[<codecvt>](#), 1443
[<compare>](#), 121, 481
[<complex>](#), 1057
[<complex.h>](#), 1428, 1431
[<condition_variable>](#), 1364
[<csetjmp>](#), 443, 488, 489, 1429
[<csignal>](#), 488, 489
[<cstdlibarg>](#), 193, 443, 488, 489
[<cstdlibdef>](#), 111, 119, 1428, 1429
[<cstdlibint>](#), 464
[<cstdlibio>](#), 1153, 1154, 1213, 1273, 1275, 1429
[<cstdliblib>](#), 74, 431, 451, 465, 488, 583, 818, 1053, 1104, 1143, 1428, 1429, 1432
[<cstring>](#), 428, 816, 1429, 1434, 1438
[<ctime>](#), 488, 764, 821, 1429
[<ctype.h>](#), 816
[<cuchar>](#), 444, 818, 1428
[<wchar>](#), 444, 817, 818, 1428, 1429
[<wctype>](#), 444, 816

[<deque>](#), 893

[<errno.h>](#), 507
[<exception>](#), 476
[<execution>](#), 766

[<filesystem>](#), 1229
[<forward_list>](#), 894
[<fstream>](#), 1210
[<functional>](#), 625
[<future>](#), 1370

[<initializer_list>](#), 480
[<inttypes.h>](#), 1276
[<iomanip>](#), 1179
[<ios>](#), 1155

[<iosfwd>](#), 1151
[<iostream>](#), 1153
[<iso646.h>](#), 1428, 1431
[<istream>](#), 1178
[<iterator>](#), 975, 1440

[<limits>](#), 456
[<list>](#), 894
[<locale>](#), 820, 821
[<locale.h>](#), 858

[<map>](#), 919
[<memory>](#), 570
[<memory_resource>](#), 610
[<mutex>](#), 1346

[<new>](#), 466
[<numeric>](#), 1123

[<optional>](#), 537
[<ostream>](#), 1178

[<queue>](#), 956

[<random>](#), 1067
[<ratio>](#), 669
[<regex>](#), 1279

[<scoped_allocator>](#), 619
[<set>](#), 920
[<setjmp.h>](#), 489
[<shared_mutex>](#), 1346
[<signal.h>](#), 490
[](#), 964
[<sstream>](#), 1201
[<stack>](#), 957
[<stdalign.h>](#), 1428, 1431
[<stdarg.h>](#), 489
[<stdbool.h>](#), 1428, 1431
[<stddef.h>](#), 17, 20
[<stdexcept>](#), 503
[<stdio.h>](#), 1275
[<stdlib.h>](#), 1432
[<streambuf>](#), 1170
[<string>](#), 775
[<string.h>](#), 817
[<string_view>](#), 806
[<stringstream>](#), 1432
[<syncstream>](#), 1223
[<system_error>](#), 508

[<tgmath.h>](#), 1428, 1431
[<thread>](#), 1341
[<time.h>](#), 764
[<tuple>](#), 527

<type_traits>, 646, 1440

<typeindex>, 764

<typeinfo>, 473

<uchar.h>, 818

<unordered_map>, 936

<unordered_set>, 937

<utility>, 518, 1432

<valarray>, 1104

<variant>, 549

<vector>, 895

<wchar.h>, 818

<wctype.h>, 816

Index of library names

complex
 literals, 1065
 _Exit, 451, 465
 _IOFBF, 1273
 _IOLBF, 1273
 _IONBF, 1273
 __alignas_is_defined, 1431
 __bool_true_false_are_defined, 1431
 __cpp_lib_addressof_constexpr, 454
 __cpp_lib_allocator_traits_is_always_equal, 454
 __cpp_lib_any, 454
 __cpp_lib_apply, 454
 __cpp_lib_array_constexpr, 454
 __cpp_lib_as_const, 454
 __cpp_lib_atomic_is_always_lock_free, 455
 __cpp_lib_atomic_ref, 455
 __cpp_lib_bit_cast, 455
 __cpp_lib_bool_constant, 455
 __cpp_lib_boyer_moore_searcher, 455
 __cpp_lib_byte, 455
 __cpp_lib_chrono, 455
 __cpp_lib_clamp, 455
 __cpp_lib_complex_udls, 455
 __cpp_lib_concepts, 455
 __cpp_lib_constexpr_swap_algorithms, 455
 __cpp_lib_enable_shared_from_this, 455
 __cpp_lib_exchange_function, 455
 __cpp_lib_execution, 455
 __cpp_lib_filesystem, 455
 __cpp_lib_gcd_lcm, 455
 __cpp_lib_generic_associative_lookup, 455
 __cpp_lib_hardware_interference_size, 455
 __cpp_lib_has_unique_object_representations, 455
 __cpp_lib_hypot, 455
 __cpp_lib_incomplete_container_elements, 455
 __cpp_lib_integer_sequence, 455
 __cpp_lib_integral_constant_callable, 455
 __cpp_lib_invoke, 455
 __cpp_lib_is_aggregate, 455
 __cpp_lib_is_final, 455
 __cpp_lib_is_invocable, 455
 __cpp_lib_is_null_pointer, 455
 __cpp_lib_is_swappable, 455
 __cpp_lib_laundry, 455
 __cpp_lib_list_remove_return_type, 455
 __cpp_lib_logical_traits, 455
 __cpp_lib_make_from_tuple, 455
 __cpp_lib_make_reverse_iterator, 455
 __cpp_lib_make_unique, 455
 __cpp_lib_map_try_emplace, 455
 __cpp_lib_math_special_functions, 455
 __cpp_lib_memory_resource, 455
 __cpp_lib_node_extract, 455
 __cpp_lib_nonmember_container_access, 455
 __cpp_lib_not_fn, 455
 __cpp_lib_null_iterators, 455
 __cpp_lib_optional, 455
 __cpp_lib_parallel_algorithm, 455
 __cpp_lib_quoted_string_io, 455
 __cpp_lib_raw_memory_algorithms, 455
 __cpp_lib_result_of_sfinae, 455
 __cpp_lib_robust_nonmodifying_seq_ops, 455
 __cpp_lib_sample, 456
 __cpp_lib_scoped_lock, 456
 __cpp_lib_shared_mutex, 456
 __cpp_lib_shared_ptr_arrays, 456
 __cpp_lib_shared_ptr_weak_type, 456
 __cpp_lib_shared_timed_mutex, 456
 __cpp_lib_string_udls, 456
 __cpp_lib_string_view, 456
 __cpp_lib_to_chars, 456
 __cpp_lib_transformation_trait_aliases, 456
 __cpp_lib_transparent_operators, 456
 __cpp_lib_tuple_element_t, 456
 __cpp_lib_tuples_by_type, 456
 __cpp_lib_type_trait_variable_templates, 456
 __cpp_lib_uncaught_exceptions, 456
 __cpp_lib_unordered_map_try_emplace, 456
 __cpp_lib_variant, 456
 __cpp_lib_void_t, 456
 _1, 638
 a
 cauchy_distribution, 1098
 extreme_value_distribution, 1095
 uniform_int_distribution, 1088
 uniform_real_distribution, 1089
 weibull_distribution, 1094
 abbrev
 sys_info, 749
 abort, 74, 137, 431, 451, 465, 472, 477
 abs, 451, 1135, 1143, 1275
 complex, 1063
 duration, 695
 valarray, 1116
 absolute, 1261
 accumulate, 1126
 acos, 1135
 complex, 1063

- valarray, 1116
- acosf, 1135
- acosh, 1135
 - complex, 1063
- acoshf, 1135
- acoshl, 1135
- acosl, 1135
- acq_rel
 - memory_order, 1320
- acquire
 - memory_order, 1320
- add_const, 663
- add_cv, 663
- add_lvalue_reference, 663
- add_pointer, 664
- add_rvalue_reference, 663
- add_volatile, 663
- addressof, 581
- adjacent_difference, 1133
- adjacent_find, 1022
- adopt_lock, 1354
- adopt_lock_t, 1354
- advance, 980
- align, 577
- align_val_t, 466
- aligned_alloc, 451, 583, 1429
- aligned_storage, 665, 666
- aligned_union, 665
- alignment_of, 660
- all
 - bitset, 569
- all_of, 1019
- allocate
 - allocator, 581
 - allocator_traits, 580
 - memory_resource, 611
 - polymorphic_allocator, 613
 - scoped_allocator_adaptor, 622
- allocate_shared, 598–600
- allocator, 580
 - allocate, 581
 - deallocate, 581
 - difference_type, 580
 - is_always_equal, 580
 - operator!=, 581
 - operator=, 580
 - operator==, 581
 - propagate_on_container_move_assignment, 580
 - size_type, 580
 - value_type, 580
- allocator_arg, 578
- allocator_arg_t, 578
- allocator_traits, 578
 - allocate, 580
 - const_pointer, 579
 - const_void_pointer, 579
 - construct, 580
 - deallocate, 580
 - destroy, 580
 - difference_type, 579
 - is_always_equal, 580
 - max_size, 580
 - pointer, 579
 - propagate_on_container_copy_assignment, 579
 - propagate_on_container_move_assignment, 579
 - propagate_on_container_swap, 580
 - rebind_alloc, 580
 - select_on_container_copy_construction, 580
 - size_type, 579
 - void_pointer, 579
- allocator_type
 - basic_string, 779
- alpha
 - gamma_distribution, 1094
- always_noconv
 - codecvt, 834
- ambiguous
 - local_info, 749
- ambiguous_local_time, 748
 - constructor, 748
- any
 - constructor, 561, 562
 - destructor, 562
 - emplace, 563
 - has_value, 563
 - operator=, 562
 - reset, 563
 - swap, 563
 - type, 563
- any (member)
 - bitset, 569
- any_cast, 564
- any_of, 1019
- append
 - basic_string, 789, 790
 - path, 1241
- apply, 533
 - valarray, 1113
- arg, 1064
 - complex, 1063
- argument_type
 - zombie, 443
- array, 895–897
 - begin, 896
 - data, 897
 - end, 896
 - fill, 897
 - get, 897
 - max_size, 896
 - size, 896, 897
 - swap, 897

as_bytes, 969
 as_const, 522
 as_writable_bytes, 969
 asctime, 764
 asin, 1135
 complex, 1063
 valarray, 1116
 asinf, 1135
 asinh, 1135
 complex, 1064
 asinhf, 1135
 asinhl, 1135
 asinl, 1135
 assert, 506
 assertion_level
 contract_violation, 476
 assign
 basic_regex, 1294
 basic_string, 790, 791
 directory_entry, 1254
 error_code, 513
 error_condition, 515
 path, 1240
 Assignable, 496
 assoc_laguerre, 1144
 assoc_laguerref, 1144
 assoc_laguerrel, 1144
 assoc_legendre, 1144
 assoc_legendref, 1144
 assoc_legendrel, 1144
 async, 1380
 at
 basic_string, 788
 basic_string_view, 810
 map, 925
 unordered_map, 942
 at_quick_exit, 431, 451, 466
 atan, 1135
 complex, 1063
 valarray, 1116
 atan2, 1135
 valarray, 1116
 atan2f, 1135
 atan2l, 1135
 atanf, 1135
 atanh, 1135
 complex, 1064
 atanhf, 1135
 atanh1, 1135
 atanl, 1135
 atexit, 74, 431, 451, 465
 atof, 451
 atoi, 451
 atol, 451
 atoll, 451
 atomic, 1328
 compare_exchange_strong, 1329
 compare_exchange_weak, 1329
 constructor, 1328
 exchange, 1329
 is_always_lock_free, 1329
 is_lock_free, 1329
 load, 1329
 operator *type*, 1329
 operator=, 1329
 store, 1329
 value_type, 1328
 atomic<*floating-point*>, 1333
 compare_exchange_strong, 1329
 compare_exchange_weak, 1329
 constructor, 1328
 exchange, 1329
 fetch_add, 1334
 fetch_sub, 1334
 is_always_lock_free, 1329
 is_lock_free, 1329
 load, 1329
 operator *floating-point*, 1329
 operator+=, 1334
 operator-=, 1334
 operator=, 1329
 store, 1329
 atomic<*integral*>, 1331
 compare_exchange_strong, 1329
 compare_exchange_weak, 1329
 constructor, 1328
 exchange, 1329
 fetch_add, 1332
 fetch_and, 1332
 fetch_or, 1332
 fetch_sub, 1332
 fetch_xor, 1332
 is_always_lock_free, 1329
 is_lock_free, 1329
 load, 1329
 operator *integral*, 1329
 operator++, 1336
 operator+=, 1333
 operator-=, 1333
 operator--, 1336
 operator=, 1329
 operator&=, 1333
 operator^=, 1333
 operator|=, 1333
 store, 1329
 atomic<shared_ptr<T>>, 606
 compare_exchange_strong, 607, 608
 compare_exchange_weak, 607, 608
 constructor, 607
 exchange, 607
 load, 607
 operator shared_ptr<T>, 607
 operator=, 607
 store, 607
 atomic<T*>, 1334, 1335
 compare_exchange_strong, 1329
 compare_exchange_weak, 1329
 constructor, 1328

exchange, 1329
 fetch_add, 1335
 fetch_sub, 1335
 is_always_lock_free, 1329
 is_lock_free, 1329
 load, 1329
 operator T*, 1329
 operator++, 1336
 operator+=", 1333–1335
 operator-=", 1333–1335
 operator--, 1336
 operator=, 1329
 store, 1329
 atomic<weak_ptr<T>>, 608
 compare_exchange_strong, 610
 compare_exchange_weak, 609
 constructor, 609
 exchange, 609
 load, 609
 operator weak_ptr<T>, 609
 operator=, 609
 store, 609
 atomic_bool, 1320
 ATOMIC_BOOL_LOCK_FREE, 1321
 atomic_char, 1320
 atomic_char16_t, 1320
 ATOMIC_CHAR16_T_LOCK_FREE, 1321
 atomic_char32_t, 1320
 ATOMIC_CHAR32_T_LOCK_FREE, 1321
 ATOMIC_CHAR_LOCK_FREE, 1321
 atomic_compare_exchange_strong, 1329
 shared_ptr, 1442
 atomic_compare_exchange_strong_explicit, 1329
 shared_ptr, 1442
 atomic_compare_exchange_weak, 1329
 shared_ptr, 1442
 atomic_compare_exchange_weak_explicit, 1329
 shared_ptr, 1442
 atomic_exchange, 1329
 shared_ptr, 1442
 atomic_exchange_explicit, 1329
 shared_ptr, 1442
 atomic_fetch_add, 1332, 1334, 1335
 atomic_fetch_add_explicit, 1332, 1334, 1335
 atomic_fetch_and, 1332
 atomic_fetch_and_explicit, 1332
 atomic_fetch_or, 1332
 atomic_fetch_or_explicit, 1332
 atomic_fetch_sub, 1332, 1334, 1335
 atomic_fetch_sub_explicit, 1332, 1334, 1335
 atomic_fetch_xor, 1332
 atomic_fetch_xor_explicit, 1332
 atomic_flag
 clear, 1337
 test_and_set, 1337
 atomic_flag_clear, 1337
 atomic_flag_clear_explicit, 1337
 atomic_flag_test_and_set, 1337
 atomic_flag_test_and_set_explicit, 1337
 atomic_int, 1320
 atomic_int16_t, 1320
 atomic_int32_t, 1320
 atomic_int64_t, 1320
 atomic_int8_t, 1320
 atomic_int_fast16_t, 1320
 atomic_int_fast32_t, 1320
 atomic_int_fast64_t, 1320
 atomic_int_fast8_t, 1320
 atomic_int_least16_t, 1320
 atomic_int_least32_t, 1320
 atomic_int_least64_t, 1320
 atomic_int_least8_t, 1320
 ATOMIC_INT_LOCK_FREE, 1321
 atomic_intmax_t, 1320
 atomic_intptr_t, 1320
 atomic_is_lock_free, 1329
 shared_ptr, 1441
 atomic_llong, 1320
 ATOMIC_LLONG_LOCK_FREE, 1321
 atomic_load, 1329
 shared_ptr, 1441
 atomic_load_explicit, 1329
 shared_ptr, 1441
 atomic_long, 1320
 ATOMIC_LONG_LOCK_FREE, 1321
 ATOMIC_POINTER_LOCK_FREE, 1321
 atomic_ptrdiff_t, 1320
 atomic_ref, 1322
 compare_exchange_strong, 1323
 compare_exchange_weak, 1323
 constructor, 1323
 exchange, 1323
 is_always_lock_free, 1323
 is_lock_free, 1323
 load, 1323
 operator *type*, 1323
 operator=, 1323
 required_alignment, 1323
 store, 1323
 value_type, 1322
 atomic_ref<floating-point>, 1325
 compare_exchange_strong, 1323
 compare_exchange_weak, 1323
 constructor, 1323
 exchange, 1323
 fetch_add, 1326
 fetch_sub, 1326
 is_always_lock_free, 1323
 is_lock_free, 1323
 load, 1323
 operator *floating-point*, 1323
 operator+=", 1326
 operator-=", 1326
 operator=, 1323
 required_alignment, 1323

- store, 1323
- atomic_ref<*integral*>, 1324
 - compare_exchange_strong, 1323
 - compare_exchange_weak, 1323
 - constructor, 1323
 - exchange, 1323
 - fetch_add, 1325
 - fetch_and, 1325
 - fetch_or, 1325
 - fetch_sub, 1325
 - fetch_xor, 1325
 - is_always_lock_free, 1323
 - is_lock_free, 1323
 - load, 1323
 - operator *integral*, 1323
 - operator++, 1327
 - operator+=", 1325
 - operator-=", 1325
 - operator--, 1327, 1328
 - operator=, 1323
 - operator&=", 1325
 - operator^=", 1325
 - operator|=, 1325
 - required_alignment, 1323
 - store, 1323
- atomic_ref<T*>, 1326
 - compare_exchange_strong, 1323
 - compare_exchange_weak, 1323
 - constructor, 1323
 - exchange, 1323
 - fetch_add, 1327
 - fetch_sub, 1327
 - is_always_lock_free, 1323
 - is_lock_free, 1323
 - load, 1323
 - operator T*, 1323
 - operator++, 1327
 - operator+=", 1327
 - operator-=", 1327
 - operator--, 1327, 1328
 - operator=, 1323
 - required_alignment, 1323
 - store, 1323
- atomic_schar, 1320
- atomic_short, 1320
- ATOMIC_SHORT_LOCK_FREE, 1321
- atomic_signal_fence, 1338
- atomic_size_t, 1320
- atomic_store, 1329
 - shared_ptr, 1442
- atomic_store_explicit, 1329
 - shared_ptr, 1442
- atomic_thread_fence, 1337
- atomic_uchar, 1320
- atomic_uint, 1320
- atomic_uint16_t, 1320
- atomic_uint32_t, 1320
- atomic_uint64_t, 1320
- atomic_uint8_t, 1320
- atomic_uint_fast16_t, 1320
- atomic_uint_fast32_t, 1320
- atomic_uint_fast64_t, 1320
- atomic_uint_fast8_t, 1320
- atomic_uint_least16_t, 1320
- atomic_uint_least32_t, 1320
- atomic_uint_least64_t, 1320
- atomic_uint_least8_t, 1320
- atomic_uintmax_t, 1320
- atomic_uintptr_t, 1320
- atomic_ullong, 1320
- atomic_ulong, 1320
- atomic_ushort, 1320
- ATOMIC_VAR_INIT, 1329
- atomic_wchar_t, 1320
- ATOMIC_WCHAR_T_LOCK_FREE, 1321
- auto_ptr
 - zombie, 442
- auto_ptr_ref
 - zombie, 442
- b
 - cauchy_distribution, 1098
 - extreme_value_distribution, 1095
 - uniform_int_distribution, 1088
 - uniform_real_distribution, 1089
 - weibull_distribution, 1094
- back
 - basic_string, 788
 - basic_string_view, 811
- back_insert_iterator, 984
 - constructor, 984
 - operator*, 985
 - operator++, 985
 - operator=, 984, 985
- back_inserter, 985
- bad
 - basic_ios, 1167
- bad_alloc, 114, 467, 471, 472
 - constructor, 471
 - operator=, 471
 - what, 471
- bad_any_cast, 560
 - what, 560
- bad_array_new_length, 471
 - constructor, 472
 - what, 472
- bad_cast, 104, 473, 474
 - constructor, 474
 - operator=, 474
 - what, 474
- bad_exception, 477
 - constructor, 477
 - operator=, 477
 - what, 477
- bad_function_call, 639
 - constructor, 639
 - what, 639
- bad_optional_access

- constructor, 546
 - what, 546
- bad_typeid, 104, 473, 475
 - constructor, 475
 - operator=, 475
 - what, 475
- bad_variant_access, 559
 - constructor, 559
 - what, 559
- bad_weak_ptr, 593
 - constructor, 593
 - what, 593
- base
 - move_iterator, 988
 - reverse_iterator, 982
- basic_common_reference, 665
- basic_filebuf, 1151, 1211
 - close, 1213
 - constructor, 1212
 - destructor, 1213
 - imbue, 1216
 - is_open, 1213
 - open, 1213
 - operator=, 1213
 - overflow, 1215
 - pbackfail, 1215
 - seekoff, 1215
 - seekpos, 1216
 - setbuf, 1215
 - showmanyc, 1214
 - swap, 1213
 - sync, 1216
 - uflow, 1215
 - underflow, 1214
- basic_filebuf<char>, 1210
- basic_filebuf<wchar_t>, 1210
- basic_fstream, 1151, 1220
 - close, 1223
 - constructor, 1221, 1222
 - is_open, 1222
 - open, 1222
 - operator=, 1222
 - rdbuf, 1222
 - swap, 1222
- basic_fstream<char>, 1210
- basic_fstream<wchar_t>, 1210
- basic_ifstream, 1151, 1216
 - close, 1218
 - constructor, 1217, 1218
 - is_open, 1218
 - open, 1218
 - operator=, 1218
 - rdbuf, 1218
 - swap, 1218
- basic_ifstream<char>, 1210
- basic_ifstream<wchar_t>, 1210
- basic_ios, 1151, 1164
 - bad, 1167
 - clear, 1167
 - constructor, 1165
 - copyfmt, 1166
 - destructor, 1165
 - eof, 1167
 - exceptions, 1167
 - fail, 1167
 - fill, 1166
 - good, 1167
 - imbue, 1165
 - init, 1165, 1181
 - move, 1166
 - narrow, 1166
 - operator bool, 1167
 - operator!, 1167
 - rdbuf, 1165
 - rdstate, 1167
 - set_rdbuf, 1167
 - setstate, 1167
 - swap, 1167
 - tie, 1165
 - widen, 1166
- basic_ios<char>, 1155
- basic_ios<wchar_t>, 1155
- basic_iostream, 1189
 - constructor, 1189
 - destructor, 1189
 - operator=, 1190
 - swap, 1190
- basic_istream, 1151, 1179
 - constructor, 1181
 - destructor, 1181
 - gcount, 1185
 - get, 1185, 1186
 - getline, 1186, 1187
 - ignore, 1187
 - operator=, 1181
 - operator>>, 1182–1184, 1189
 - peek, 1187
 - putback, 1187
 - read, 1187
 - readsome, 1187
 - seekg, 1188
 - swap, 1181
 - sync, 1188
 - tellg, 1188
 - unget, 1188
- basic_istream::sentry, 1181
 - constructor, 1182
 - destructor, 1182
 - operator bool, 1182
- basic_istream<char>, 1178
- basic_istream<wchar_t>, 1178
- basic_istreambuf_iterator, 1151
- basic_istreamstream, 1151, 1206
 - constructor, 1207
 - operator=, 1207
 - rdbuf, 1207
 - str, 1207
 - swap, 1207

basic_istream<char>, 1201
 basic_istream<wchar_t>, 1201
 basic_ofstream, 1151, 1218
 close, 1220
 constructor, 1219, 1220
 is_open, 1220
 open, 1220
 operator=, 1220
 rdbuf, 1220
 swap, 1220
 basic_ofstream<char>, 1210
 basic_ofstream<wchar_t>, 1210
 basic_ostream, 1151, 1190, 1299
 constructor, 1191, 1192
 destructor, 1192
 flush, 1196
 init, 1191
 operator<<, 1193–1195, 1197
 operator=, 1192
 put, 1196
 seekp, 1193
 swap, 1192
 tellp, 1192
 write, 1196
 basic_ostream::sentry, 1192
 constructor, 1192
 destructor, 1192
 operator bool, 1192
 basic_ostream<char>, 1179
 basic_ostream<wchar_t>, 1179
 basic_ostreambuf_iterator, 1151
 basic_ostringstream, 1151, 1207
 constructor, 1208
 operator=, 1208
 rdbuf, 1209
 str, 1209
 swap, 1209
 basic_ostringstream<char>, 1201
 basic_ostringstream<wchar_t>, 1201
 basic_osyncstream, 1151, 1225
 constructor, 1226
 destructor, 1226
 operator=, 1227
 set_emit_on_sync, 1227
 basic_regex, 1279, 1290, 1313
 assign, 1294
 constructor, 1292, 1293
 flag_type, 1294
 getloc, 1294
 imbue, 1294
 mark_count, 1294
 operator=, 1293
 swap, 1294, 1295
 basic_streambuf, 1151, 1171
 constructor, 1172, 1173
 destructor, 1173
 eback, 1174
 egptr, 1175
 epptr, 1175
 gbump, 1175
 getloc, 1173
 gptr, 1175
 imbue, 1175
 in_avail, 1173
 operator=, 1174
 overflow, 1177
 pbackfail, 1177
 pbase, 1175
 pbump, 1175
 pptr, 1175
 pubimbue, 1173
 pubseekoff, 1173
 pubseekpos, 1173
 pubsetbuf, 1173
 pubsync, 1173
 sbumpc, 1174
 seekoff, 1175
 seekpos, 1175
 setbuf, 1175, 1206
 setg, 1175
 setp, 1175
 sgetc, 1174
 sgetn, 1174
 showmanyc, 1176
 snextc, 1173
 sputbackc, 1174
 sputc, 1174
 sputn, 1174
 sungetc, 1174
 swap, 1174
 sync, 1176
 uflow, 1177
 underflow, 1176
 xsgetn, 1176
 xspn, 1177
 basic_streambuf<char>, 1170
 basic_streambuf<wchar_t>, 1170
 basic_string, 779, 800, 1202, 1443
 allocator_type, 779
 append, 789, 790
 assign, 790, 791
 at, 788
 back, 788
 begin, 786
 c_str, 795
 capacity, 787
 cbegin, 786
 cend, 787
 clear, 788
 compare, 799, 800
 const_iterator, 779
 const_pointer, 779
 const_reference, 779
 const_reverse_iterator, 779
 constructor, 784, 785
 copy, 795
 crbegin, 787
 crend, 787

data, 795
 difference_type, 779
 empty, 788
 end, 787
 ends_with, 800
 erase, 792, 793
 find, 796
 find_first_not_of, 798
 find_first_of, 797
 find_last_not_of, 798, 799
 find_last_of, 797
 front, 788
 get_allocator, 795
 getline, 803, 804
 insert, 791, 792
 iterator, 779
 length, 787
 max_size, 787
 operator basic_string_view, 795
 operator!=, 802
 operator+, 800, 801
 operator+=", 788, 789
 operator<, 802
 operator<<, 803
 operator<=", 802
 operator=, 786
 operator==, 801
 operator>, 802
 operator>=", 803
 operator>>, 803
 operator[], 788
 pointer, 779
 pop_back, 793
 push_back, 790
 rbegin, 787
 reference, 779
 rend, 787
 replace, 793–795
 reserve, 787, 1443
 resize, 787
 reverse_iterator, 779
 rfind, 796
 shrink_to_fit, 788
 size, 787
 size_type, 779
 starts_with, 800
 substr, 799
 swap, 795, 803
 traits_type, 779
 value_type, 779
 basic_string_view, 807
 at, 810
 back, 811
 begin, 810
 cbegin, 810
 cend, 810
 compare, 811, 812
 const_iterator, 807, 809
 const_pointer, 807
 const_reference, 807
 const_reverse_iterator, 807
 constructor, 809
 copy, 811
 crbegin, 810
 crend, 810
 data, 811
 difference_type, 807
 empty, 810
 end, 810
 ends_with, 812
 find, 812
 find_first_not_of, 813
 find_first_of, 813
 find_last_not_of, 813
 find_last_of, 813
 front, 810
 iterator, 807
 length, 810
 max_size, 810
 operator!=, 814
 operator<, 814
 operator<<, 815
 operator<=", 815
 operator==, 814
 operator>, 814
 operator>=", 815
 operator[], 810
 pointer, 807
 rbegin, 810
 reference, 807
 remove_prefix, 811
 remove_suffix, 811
 rend, 810
 reverse_iterator, 807
 rfind, 813
 size, 810
 size_type, 807
 starts_with, 812
 substr, 811
 swap, 811
 traits_type, 807
 value_type, 807
 basic_stringbuf, 1151, 1202
 constructor, 1203
 operator=, 1204
 overflow, 1205
 pbackfail, 1204
 seekoff, 1205
 seekpos, 1206
 str, 1204
 swap, 1204
 underflow, 1204
 basic_stringbuf<char>, 1201
 basic_stringbuf<wchar_t>, 1201
 basic_stringstream, 1151, 1209
 constructor, 1210
 operator=, 1210
 rdbuf, 1210

- str, 1210
- swap, 1210
- basic_stringstream<char>, 1201
- basic_stringstream<wchar_t>, 1201
- basic_syncbuf, 1151, 1223
 - constructor, 1224
 - destructor, 1224
 - emit, 1225
 - get_allocator, 1225
 - get_wrapped, 1225
 - operator=, 1224
 - set_emit_on_sync, 1225
 - swap, 1225
 - sync, 1225
- before
 - type_info, 474
- before_begin
 - forward_list, 904
- begin, 480
 - array, 896
 - basic_string, 786
 - basic_string_view, 810
 - directory_iterator, 1258
 - initializer_list, 480
 - match_results, 1302
 - path, 1246
 - recursive_directory_iterator, 1261
 - span, 968
 - sys_info, 749
 - tzdb_list, 746
 - unordered associative containers, 891
 - valarray, 1123
- begin(C&), 996
- begin(initializer_list<E>), 480
- begin(T (&)[N]), 996
- bernoulli_distribution, 1089
 - constructor, 1089
 - p, 1089
- beta, 1145
 - gamma_distribution, 1094
- betaf, 1145
- betal, 1145
- bidirectional_iterator_tag, 979
- big
 - endian, 669
- binary_function
 - zombie, 442
- binary_negate
 - zombie, 442
- binary_search, 1041
- bind, 637–638
- bind1st
 - zombie, 442
- bind2nd
 - zombie, 442
- binder1st
 - zombie, 442
- binder2nd
 - zombie, 442
- binomial_distribution, 1089
 - constructor, 1090
 - p, 1090
 - t, 1090
- bit_and, 634
 - operator(), 634
- bit_and<>, 634
 - operator(), 634
- bit_cast, 1066
- bit_not
 - operator(), 635
- bit_not<>, 635
 - operator(), 635
- bit_or, 635
 - operator(), 635
- bit_or<>, 635
 - operator(), 635
- bit_xor, 635
 - operator(), 635
- bit_xor<>, 635
 - operator(), 635
- bitset, 565
 - all, 569
 - any, 569
 - constructor, 566, 567
 - count, 569
 - flip, 568
 - none, 569
 - operator!=, 569
 - operator<<, 569, 570
 - operator<<=, 568
 - operator==, 569
 - operator>>, 569, 570
 - operator>>=, 568
 - operator[], 569
 - operator&, 570
 - operator&=, 567
 - operator~, 570
 - operator~=, 567
 - operator~, 568
 - operator|, 570
 - operator|=, 567
 - reset, 568
 - set, 568
 - size, 569
 - test, 569
 - to_string, 569
 - to_ullong, 568
 - to_ulong, 568
- bool_constant, 653
- boolalpha, 1168
- Boolean, 498
- boyer_moore_horspool_searcher, 644
 - constructor, 644
 - operator(), 645
- boyer_moore_searcher, 643
 - constructor, 644
 - operator(), 644
- bsearch, 451, 1053

- btowc, 817
- bucket
 - unordered associative containers, 890
- bucket_count
 - unordered associative containers, 890
- bucket_size
 - unordered associative containers, 891
- BUFSIZ, 1273
- byte, 450
 - operator<<, 453
 - operator<<=, 453
 - operator>>, 453
 - operator>>=, 453
 - operator&, 454
 - operator&=, 454
 - operator^, 454
 - operator^=, 454
 - operator~, 454
 - operator|, 454
 - operator|=, 453
 - to_integer, 454
- byte_string
 - wstring_convert, 1445

- c16rtomb, 818
- c32rtomb, 818
- c_str
 - basic_string, 795
 - path, 1242
- ccos
 - complex, 1063
- ccosh
 - complex, 1063
- call_once, 1363
- calloc, 451, 583, 1429
- canonical, 1262
- capacity
 - basic_string, 787
 - vector, 915
- casin
 - complex, 1063
- casinh
 - complex, 1064
- catan
 - complex, 1063
- catanh
 - complex, 1064
- category
 - error_code, 513
 - error_condition, 515
 - locale, 823
- cauchy_distribution, 1098
 - a, 1098
 - b, 1098
 - constructor, 1098
- cbefore_begin
 - forward_list, 904
- cbegin
 - basic_string, 786
 - basic_string_view, 810
 - span, 968
 - tzdb_list, 746
 - unordered associative containers, 891
- cbegin(const C&), 996
- cbqrt, 1135
- cbqrtf, 1135
- cbqrtl, 1135
- ceil, 1135
 - duration, 694
 - time_point, 699
- ceil2, 1066
- ceilf, 1135
- ceill, 1135
- cend
 - basic_string, 787
 - basic_string_view, 810
 - span, 968
 - tzdb_list, 746
 - unordered associative containers, 891
- cend(const C&), 996
- cerr, 1154
- CHAR_BIT, 463
- char_class_type
 - regex_traits, 1288
- CHAR_MAX, 463
- CHAR_MIN, 463
- char_traits, 772–774
 - char_type, 772
 - int_type, 772
 - off_type, 772
 - pos_type, 772
 - state_type, 772
- char_type
 - char_traits, 772
- chars_format, 767
 - fixed, 767
 - general, 767
 - hex, 767
 - scientific, 767
- chi_squared_distribution, 1097
 - constructor, 1097
 - n, 1097
- choose, 672
 - earliest, 672
 - latest, 672
- chrono, 672
- cin, 1154
- clamp, 1051
- classic
 - locale, 827
- classic_table
 - ctype<char>, 833
- clear
 - atomic_flag, 1337
 - basic_ios, 1167
 - basic_string, 788
 - error_code, 513
 - error_condition, 515

- forward_list, 905
 - path, 1241
 - unordered associative containers, 890
- clearerr, 1273
- clock, 764
- clock_cast, 711
- clock_t, 764
- clock_time_conversion, 708
 - operator(), 709, 710
- CLOCKS_PER_SEC, 764
- clog, 1154
- close
 - basic_filebuf, 1213
 - basic_fstream, 1223
 - basic_ifstream, 1218
 - basic_ofstream, 1220
 - messages, 857
- code
 - future_error, 1372
 - system_error, 517
- codecvt, 833
 - always_noconv, 834
 - do_always_noconv, 836
 - do_encoding, 836
 - do_in, 835
 - do_length, 836
 - do_max_length, 836
 - do_out, 835
 - do_unshift, 836
 - encoding, 834
 - in, 834
 - length, 834
 - max_length, 834
 - out, 834
 - unshift, 834
- codecvt_byname, 836
- codecvt_mode, 1443
- codecvt_utf16, 1443, 1444
- codecvt_utf8, 1443, 1444
- codecvt_utf8_utf16, 1443, 1444
- collate, 845
 - compare, 846
 - do_compare, 846
 - do_hash, 846
 - do_transform, 846
 - hash, 846
 - transform, 846
- collate_byname, 846
- combine
 - locale, 826
- comment
 - contract_violation, 476
- Common, 495
- common_comparison_category, 487
- common_comparison_category_t, 481
- common_reference, 665
- common_reference_t, 646
- common_type, 666, 688, 689, 692
- CommonReference, 495
- comp_ellint_1, 1145
- comp_ellint_1f, 1145
- comp_ellint_1l, 1145
- comp_ellint_2, 1145
- comp_ellint_2f, 1145
- comp_ellint_2l, 1145
- comp_ellint_3, 1145
- comp_ellint_3f, 1145
- comp_ellint_3l, 1145
- compare
 - basic_string, 799, 800
 - basic_string_view, 811, 812
 - collate, 846
 - path, 1243, 1244
 - sub_match, 1295
- compare_3way, 1052
- compare_exchange_strong
 - atomic, 1329
 - atomic<floating-point>, 1329
 - atomic<integral>, 1329
 - atomic<shared_ptr<T>>, 607, 608
 - atomic<T*>, 1329
 - atomic<weak_ptr<T>>, 610
 - atomic_ref, 1323
 - atomic_ref<floating-point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- compare_exchange_weak
 - atomic, 1329
 - atomic<floating-point>, 1329
 - atomic<integral>, 1329
 - atomic<shared_ptr<T>>, 607, 608
 - atomic<T*>, 1329
 - atomic<weak_ptr<T>>, 609
 - atomic_ref, 1323
 - atomic_ref<floating-point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- complex, 1059
 - constructor, 1061
 - imag, 1061
 - operator!=, 1062
 - operator"i, 1065
 - operator"if, 1065
 - operator"il, 1065
 - operator*, 1062
 - operator==, 1061
 - operator+, 1062
 - operator+=, 1061
 - operator-, 1062
 - operator-=, 1061
 - operator/, 1062
 - operator/=: 1061
 - operator<<, 1062
 - operator==, 1062
 - operator>>, 1062
 - real, 1061
 - value_type, 1059
- concat

- path, 1241
- <concepts>, 492
- condition_variable, 1365
 - constructor, 1365
 - destructor, 1366
 - notify_all, 1366
 - notify_one, 1366
 - wait, 1366
 - wait_for, 1367, 1368
 - wait_until, 1366, 1367
- condition_variable_any, 1368
 - constructor, 1368
 - destructor, 1369
 - notify_all, 1369
 - notify_one, 1369
 - wait, 1369
 - wait_for, 1370
 - wait_until, 1369, 1370
- conj, 1064
 - complex, 1063
- conjunction, 668
- const_iterator
 - basic_string, 779
 - basic_string_view, 807, 809
- const_local_iterator
 - unordered associative containers, 883
- const_mem_fun1_ref_t
 - zombie, 442
- const_mem_fun1_t
 - zombie, 442
- const_mem_fun_ref_t
 - zombie, 442
- const_mem_fun_t
 - zombie, 442
- const_pointer
 - allocator_traits, 579
 - basic_string, 779
 - basic_string_view, 807
 - scoped_allocator_adaptor, 620
- const_pointer_cast
 - shared_ptr, 602
- const_reference
 - basic_string, 779
 - basic_string_view, 807
- const_reverse_iterator
 - basic_string, 779
 - basic_string_view, 807
- const_void_pointer
 - allocator_traits, 579
 - scoped_allocator_adaptor, 620
- construct
 - allocator_traits, 580
 - polymorphic_allocator, 613, 614
 - scoped_allocator_adaptor, 622–624
- Constructible, 498
- consume
 - memory_order, 1320
- contains
 - ordered associative containers, 880
 - unordered associative containers, 890
- contract_violation, 475
 - assertion_level, 476
 - comment, 476
 - file_name, 475
 - function_name, 476
 - line_number, 475
- converted
 - wstring_convert, 1445
- ConvertibleTo, 494
- copy, 1027
 - basic_string, 795
 - basic_string_view, 811
 - path, 1262
- copy_backward, 1027
- copy_file, 1264
- copy_if, 1027
- copy_n, 1027
- copy_options, 1250
- copy_symlink, 1264
- Copyable, 500
- CopyConstructible, 498
- copyfmt
 - basic_ios, 1166
- copysign, 1135
- copysignf, 1135
- copysignl, 1135
- cos, 1135
 - complex, 1064
 - valarray, 1116
- cosf, 1135
- cosh, 1135
 - complex, 1064
 - valarray, 1116
- coshf, 1135
- coshl, 1135
- cosl, 1135
- count, 1023
 - bitset, 569
 - duration, 691
 - unordered associative containers, 890
- count_if, 1023
- cout, 1154
- crbegin
 - basic_string, 787
 - basic_string_view, 810
 - span, 968
- crbegin(const C& c), 997
- create_directories, 1265
- create_directory, 1265
- create_directory_symlink, 1265
- create_hard_link, 1265
- create_symlink, 1266
- cref
 - reference_wrapper, 629
- crend
 - basic_string, 787
 - basic_string_view, 810
 - span, 968

crend(const C& c), 997
 cshift
 valarray, 1113
 ctime, 764
 ctype, 828
 do_is, 829
 do_narrow, 830
 do_scan_not, 830
 do_tolower, 830
 do_toupper, 830
 do_widen, 830
 is, 829
 narrow, 829
 scan_is, 829
 scan_not, 829
 tolower, 829
 toupper, 829
 widen, 829
 ctype<char>, 831
 classic_table, 833
 constructor, 832
 ctype<char>, 832
 destructor, 832
 do_narrow, 833
 do_tolower, 833
 do_toupper, 833
 do_widen, 833
 is, 832
 narrow, 832
 scan_is, 832
 scan_not, 832
 table, 832
 tolower, 832
 toupper, 832
 widen, 832
 ctype_base, 828
 do_scan_is, 830
 ctype_byname, 831
 curr_symbol
 moneypunct, 856
 current_exception, 478
 current_path, 1266
 current_zone, 747
 tzdb, 745
 cv_status, 1364
 cyl_bessel_i, 1145
 cyl_bessel_if, 1145
 cyl_bessel_il, 1145
 cyl_bessel_j, 1146
 cyl_bessel_jf, 1146
 cyl_bessel_jl, 1146
 cyl_bessel_k, 1146
 cyl_bessel_kf, 1146
 cyl_bessel_kl, 1146
 cyl_neumann, 1146
 cyl_neumannf, 1146
 cyl_neumannl, 1146

 data
 array, 897
 basic_string, 795
 basic_string_view, 811
 span, 968
 vector, 916
 data(C& c), 997
 data(initializer_list<E>), 997
 data(T (&array) [N]), 997
 date
 leap, 756
 date_order
 time_get, 848
 day, 711
 constructor, 712
 from_stream, 713
 month_day, 722
 ok, 712
 operator unsigned, 712
 operator""d, 713
 operator+, 713
 operator++, 712
 operator+=", 712
 operator-, 713
 operator--, 712
 operator-=", 712
 operator<, 713
 operator<<, 713
 operator==, 713
 to_stream, 713
 year_month_day, 729
 year_month_day_last, 731
 days, 672
 DBL_DECIMAL_DIG, 463
 DBL_DIG, 463
 DBL_EPSILON, 463
 DBL_HAS_SUBNORM, 463
 DBL_MANT_DIG, 463
 DBL_MAX, 463
 DBL_MAX_10_EXP, 463
 DBL_MAX_EXP, 463
 DBL_MIN, 463
 DBL_MIN_10_EXP, 463
 DBL_MIN_EXP, 463
 DBL_TRUE_MIN, 463
 deallocate
 allocator, 581
 allocator_traits, 580
 memory_resource, 611
 polymorphic_allocator, 613
 scoped_allocator_adaptor, 622
 dec, 1169, 1194
 decay, 665
DECAY_COPY, 1341
 DECIMAL_DIG, 463
 decimal_point
 moneypunct, 856
 numpunct, 844
 declare_no_pointers, 577
 declare_reachable, 576

declval, 522
 default_delete
 constructor, 584, 585
 operator(), 585
 default_error_condition
 error_category, 511
 error_code, 513
 default_random_engine, 1084
 default_searcher, 643
 constructor, 643
 operator(), 643
 default_zone
 zoned_traits<const time_zone*>, 751
 DefaultConstructible, 498
 defaultfloat, 1170
 defer_lock, 1354
 defer_lock_t, 1354
 delete
 operator, 444, 468–471, 584
 denorm_absent, 457
 denorm_indeterminate, 457
 denorm_min
 numeric_limits, 460
 denorm_present, 457
 densities
 piecewise_constant_distribution, 1102
 piecewise_linear_distribution, 1104
 depth
 recursive_directory_iterator, 1260
 deque, 898
 constructor, 900
 shrink_to_fit, 900
 DerivedFrom, 494
 destroy, 583
 allocator_traits, 580
 polymorphic_allocator, 614
 scoped_allocator_adaptor, 624
 destroy_at, 583
 destroy_n, 583
 destroying_delete, 466
 destroying_delete_t, 466
 Destructible, 497
 detach
 thread, 1345
 difference_type
 allocator, 580
 allocator_traits, 579
 basic_string, 779
 basic_string_view, 807
 iterator_traits, 978
 pointer_traits, 576
 scoped_allocator_adaptor, 620
 difftime, 764
 digits
 numeric_limits, 458
 digits10
 numeric_limits, 458
 directory_entry, 1253
 assign, 1254
 constructor, 1254
 exists, 1255
 file_size, 1256
 hard_link_count, 1256
 is_block_file, 1255
 is_character_file, 1255
 is_directory, 1255
 is_fifo, 1255
 is_other, 1255
 is_regular_file, 1255
 is_socket, 1255
 is_symlink, 1256
 last_write_time, 1256
 operator const filesystem::path&, 1255
 operator!=, 1256
 operator<, 1256
 operator<=, 1256
 operator==, 1256
 operator>, 1256
 operator>=, 1257
 path, 1255
 refresh, 1255
 replace_filename, 1254
 status, 1256
 symlink_status, 1256
 directory_iterator, 1257
 constructor, 1258
 increment, 1258
 operator++, 1258
 operator=, 1258
 directory_options, 1251
 disable_recursion_pending
 recursive_directory_iterator, 1261
 discard_block_engine, 1080, 1081
 constructor, 1081
 discrete_distribution, 1100
 constructor, 1100, 1101
 probabilities, 1101
 disjunction, 668
 distance, 980
 div, 451, 1275
 div_t, 451
 divides, 630
 operator(), 630
 divides<>, 630
 operator(), 630
 do_allocate
 memory_resource, 611
 monotonic_buffer_resource, 619
 synchronized_pool_resource, 617
 unsynchronized_pool_resource, 617
 do_always_noconv
 codecvt, 836
 do_close
 message, 858
 do_compare
 collate, 846
 do_curr_symbol
 moneypunct, 856

do_date_order
 time_get, 849
do_deallocate
 memory_resource, 611
 monotonic_buffer_resource, 619
 synchronized_pool_resource, 617
 unsynchronized_pool_resource, 617
do_decimal_point
 moneypunct, 856
 numpunct, 845
do_encoding
 codecvt, 836
do_falsename
 numpunct, 845
do_frac_digits
 moneypunct, 856
do_get
 messages, 858
 money_get, 852
 num_get, 838, 840
 time_get, 850
do_get_date
 time_get, 849
do_get_monthname
 time_get, 849
do_get_time
 time_get, 849
do_get_weekday
 time_get, 849
do_get_year
 time_get, 850
do_grouping
 moneypunct, 856
 numpunct, 845
do_hash
 collate, 846
do_in
 codecvt, 835
do_is
 ctype, 829
do_is_equal
 memory_resource, 611
 monotonic_buffer_resource, 619
 synchronized_pool_resource, 617
 unsynchronized_pool_resource, 617
do_length
 codecvt, 836
do_max_length
 codecvt, 836
do_narrow, 832
 ctype, 830
 ctype<char>, 833
do_neg_format
 moneypunct, 856
do_negative_sign
 moneypunct, 856
do_open
 messages, 857
do_out
 codecvt, 835
do_pos_format
 moneypunct, 856
do_positive_sign
 moneypunct, 856
do_put
 money_put, 854
 num_put, 841, 843
 time_put, 851
do_scan_is
 ctype_base, 830
do_scan_not
 ctype, 830
do_thousands_sep
 moneypunct, 856
 numpunct, 845
do_tolower
 ctype, 830
 ctype<char>, 833
do_toupper
 ctype, 830
 ctype<char>, 833
do_transform
 collate, 846
do_truename
 numpunct, 845
do_unshift
 codecvt, 836
do_widen, 832
 ctype, 830
 ctype<char>, 833
domain_error, 503, 504
 constructor, 504
double_t, 1135
duration, 689
 abs, 695
 ceil, 694
 constructor, 690
 count, 691
 duration_cast, 693
 floor, 694
 from_stream, 696
 max, 692
 min, 692
 operator!=, 693
 operator"h, 694
 operator"min, 694
 operator"ms, 695
 operator"ns, 695
 operator"s, 694
 operator"us, 695
 operator*, 692
 operator*=, 691
 operator+, 691, 698
 operator++, 691
 operator+=", 691
 operator-, 691, 698
 operator-=, 691
 operator--, 691

- operator/, 692
- operator/=: 691
- operator<, 693
- operator<<, 695
- operator<=: 693
- operator==, 693
- operator>, 693
- operator>=: 693
- operator%, 692, 693
- operator%=: 691
- round, 694
- to_stream, 696
- zero, 692
- duration_cast, 693
- duration_values, 688
 - max, 688
 - min, 688
 - zero, 688
- dynamic_pointer_cast
 - shared_ptr, 601
- E2BIG, 507
- EACCES, 507
- EADDRINUSE, 507
- EADDRNOTAVAIL, 507
- EAFNOSUPPORT, 507
- EAGAIN, 507
- EALREADY, 507
- earliest
 - choose, 672
- eback
 - basic_streambuf, 1174
- EBADF, 507
- EBADMSG, 507
- EBUSY, 507
- ec
 - from_chars_result, 767
 - to_chars_result, 767
- ECANCELED, 507
- ECHILD, 507
- ECONNABORTED, 507
- ECONNREFUSED, 507
- ECONNRESET, 507
- EDEADLK, 507
- EDESTADDRREQ, 507
- EDOM, 507
- EEXIST, 507
- EFAULT, 507
- EFBIG, 507
- egptr
 - basic_streambuf, 1175
- EHOSTUNREACH, 507
- EIDRM, 507
- EILSEQ, 507
- EINPROGRESS, 507
- EINTR, 507
- EINVAL, 507
- EIO, 507
- EISCONN, 507
- EISDIR, 507
- element_type
 - pointer_traits, 576
- ellint_1, 1147
- ellint_1f, 1147
- ellint_1l, 1147
- ellint_2, 1147
- ellint_2f, 1147
- ellint_2l, 1147
- ellint_3, 1147
- ellint_3f, 1147
- ellint_3l, 1147
- ELOOP, 507
- EMFILE, 507
- emit
 - basic_syncbuf, 1225
- emit_on_flush, 1197
- EMLINK, 507
- emplace
 - any, 563
 - deque, 900
 - optional, 544
 - priority_queue, 961
 - variant, 555
- emplace_after
 - forward_list, 905
- emplace_front
 - forward_list, 904
- empty, 979
 - basic_string, 788
 - basic_string_view, 810
 - match_results, 1302
 - path, 1245
 - span, 968
- empty(C& c), 997
- empty(initializer_list<E>), 997
- empty(T (&array)[N]), 997
- EMSGSIZE, 507
- enable_if, 665
- enable_shared_from_this, 605
 - constructor, 605
 - operator=, 606
 - shared_from_this, 606
 - weak_from_this, 606
- ENAMETOOLONG, 507
- encoding
 - codecvt, 834
- end, 480
 - array, 896
 - basic_string, 787
 - basic_string_view, 810
 - directory_iterator, 1258
 - initializer_list, 480
 - match_results, 1302
 - path, 1247
 - recursive_directory_iterator, 1261
 - span, 968
 - sys_info, 749
 - tzdb_list, 746

- unordered associative containers, 891
- valarray, 1123
- end(C&), 996
- end(initializer_list<E>), 481
- end(T (&)[N]), 996
- endian, 669
 - big, 669
 - little, 669
 - native, 669
- endl, 1194, 1196
- ends, 1196
- ends_with
 - basic_string, 800
 - basic_string_view, 812
- ENETDOWN, 507
- ENETRESET, 507
- ENETUNREACH, 507
- ENFILE, 507
- ENOBUFS, 507
- ENODATA, 507
- ENODEV, 507
- ENOENT, 507
- ENOEXEC, 507
- ENOLCK, 507
- ENOLINK, 507
- ENOMEM, 507
- ENOMSG, 507
- ENOPROTOPT, 507
- ENOSPC, 507
- ENOSR, 507
- ENOSTR, 507
- ENOSYS, 507
- ENOTCONN, 507
- ENOTDIR, 507
- ENOTEMPTY, 507
- ENOTRECOVERABLE, 507
- ENOTSOCK, 507
- ENOTSUP, 507
- ENOTTY, 507
- entropy
 - random_device, 1085
- ENXIO, 507
- EOF, 1273
- eof
 - basic_ios, 1167
- EOPNOTSUPP, 507
- EOVERFLOW, 507
- EOWNERDEAD, 507
- EPERM, 507
- EPIPE, 507
- ep_ptr
 - basic_streambuf, 1175
- EPROTO, 507
- EPROTONOSUPPORT, 507
- EPROTOTYPE, 507
- epsilon
 - numeric_limits, 459
- eq
 - char_traits, 796–798

- equal, 1024
 - istreambuf_iterator, 995
 - strong_equality, 482
 - strong_ordering, 486
- equal_range, 1041
 - unordered associative containers, 890
- equal_to, 631
 - operator(), 631
- equal_to<>, 631
 - operator(), 631
- EqualityComparable, 499
- EqualityComparableWith, 499
- equivalent, 1266
 - error_category, 511, 512
 - partial_ordering, 483
 - strong_equality, 482
 - strong_ordering, 486
 - weak_equality, 482
 - weak_ordering, 484
- ERANGE, 507
- erase
 - basic_string, 792, 793
 - deque, 901
 - list, 911
 - unordered associative containers, 890
 - vector, 917
- erase_after
 - forward_list, 905
 - tzdb_list, 746
- erased
 - forward_list, 905
- erf, 1135
- erfc, 1135
- erfcf, 1135
- erfcl, 1135
- erff, 1135
- erfl, 1135
- EROFS, 507
- errc, 508
 - make_error_code, 514
 - make_error_condition, 515
- errno, 507
- error_category, 508, 510
 - constructor, 511
 - default_error_condition, 511
 - destructor, 511
 - equivalent, 511, 512
 - message, 511
 - name, 511
 - operator!=, 511
 - operator<, 511
 - operator==, 511
- error_code, 508, 512
 - assign, 513
 - category, 513
 - clear, 513
 - constructor, 513
 - default_error_condition, 513
 - message, 513

- operator bool, 514
- operator!=, 515
- operator<, 516
- operator<<, 514
- operator=, 513
- operator==, 515
- value, 513
- error_condition, 508, 514
 - assign, 515
 - category, 515
 - clear, 515
 - constructor, 514
 - message, 515
 - operator bool, 515
 - operator!=, 515
 - operator<, 516
 - operator=, 515
 - operator==, 515
 - value, 515
- error_type, 1287, 1288
- ESPIPE, 507
- ESRCH, 507
- ETIME, 507
- ETIMEDOUT, 507
- ETXTBSY, 507
- EWOLDBLOCK, 507
- exception, 476
 - constructor, 476, 477
 - destructor, 477
 - operator=, 477
 - what, 477
- exception_ptr, 478
- exceptions
 - basic_ios, 1167
- exchange, 521
 - atomic, 1329
 - atomic<floating-point>, 1329
 - atomic<integral>, 1329
 - atomic<shared_ptr<T>>, 607
 - atomic<T*>, 1329
 - atomic<weak_ptr<T>>, 609
 - atomic_ref, 1323
 - atomic_ref<floating-point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- exclusive_scan, 1130
- EXDEV, 507
- execution
 - par, 767
 - par_unseq, 767
 - seq, 767
- execution::parallel_policy, 766
- execution::parallel_unsequenced_policy, 766
- execution::sequenced_policy, 766
- exists, 1267
 - directory_entry, 1255
- exit, 71, 73, 137, 431, 451, 465, 472
- EXIT_FAILURE, 451
- EXIT_SUCCESS, 451
- exp, 1135
 - complex, 1064
 - valarray, 1116
- exp2, 1135
- exp2f, 1135
- exp2l, 1135
- expf, 1135
- expint, 1147
- expintf, 1147
- expintl, 1147
- expired
 - weak_ptr, 604
- expl, 1135
- expm1, 1135
- expm1f, 1135
- expm1l, 1135
- exponential_distribution, 1092
 - constructor, 1093
 - lambda, 1093
- extension
 - path, 1244
- extent, 660
- extreme_value_distribution, 1095
 - a, 1095
 - b, 1095
 - constructor, 1095
- fabs, 1135
- fabsf, 1135
- fabsl, 1135
- facet
 - locale, 824
- fail
 - basic_ios, 1167
- failed
 - ostreambuf_iterator, 996
- false_type, 653
- falsename
 - numpunct, 845
- fclose, 1214, 1273
- fdim, 1135
- fdimf, 1135
- fdiml, 1135
- FE_ALL_EXCEPT, 1056
- FE_DFL_ENV, 1056
- FE_DIVBYZERO, 1056
- FE_DOWNWARD, 1056
- FE_INEXACT, 1056
- FE_INVALID, 1056
- FE_OVERFLOW, 1056
- FE_TONEAREST, 1056
- FE_TOWARDZERO, 1056
- FE_UNDERFLOW, 1056
- FE_UPWARD, 1056
- feclearexcept, 1056
- fegetenv, 1056
- fegetexceptflag, 1056
- fegetround, 1056

feholdexcept, 1056
 fenv_t, 1056
 feof, 1273
 feraiseexcept, 1056
 ferrord, 1273
 fesetenv, 1056
 fesetexceptflag, 1056
 fesetround, 1056
 fetch_add
 atomic<floating-point>, 1334
 atomic<integral>, 1332
 atomic<T*>, 1335
 atomic_ref<floating-point>, 1326
 atomic_ref<integral>, 1325
 atomic_ref<T*>, 1327
 fetch_and
 atomic<integral>, 1332
 atomic_ref<integral>, 1325
 fetch_or
 atomic<integral>, 1332
 atomic_ref<integral>, 1325
 fetch_sub
 atomic<floating-point>, 1334
 atomic<integral>, 1332
 atomic<T*>, 1335
 atomic_ref<floating-point>, 1326
 atomic_ref<integral>, 1325
 atomic_ref<T*>, 1327
 fetch_xor
 atomic<integral>, 1332
 atomic_ref<integral>, 1325
 fetestexcept, 1056
 feupdateenv, 1056
 fexcept_t, 1056
 fflush, 1273
 fgetc, 1273
 fgetpos, 1273
 fgets, 1273
 fgetwc, 817
 fgetws, 817
 FILE, 1273
 file_clock, 706
 now, 706
 file_name
 contract_violation, 475
 file_size, 1267
 directory_entry, 1256
 file_status, 1252
 constructor, 1252
 permissions, 1252
 type, 1252
 file_time, 672
 from_stream, 707
 operator<<, 707
 to_stream, 707
 file_type, 1249
 filebuf, 1151, 1210
 filename
 path, 1244
 FILENAME_MAX, 1273
 filesystem_error, 1248
 constructor, 1248, 1249
 path1, 1249
 path2, 1249
 what, 1249
 fill, 1030
 array, 897
 basic_ios, 1166
 fill_n, 1030
 find, 1021
 basic_string, 796
 basic_string_view, 812
 unordered associative containers, 890
 find_end, 1021
 find_first_not_of
 basic_string, 798
 basic_string_view, 813
 find_first_of, 1022
 basic_string, 797
 basic_string_view, 813
 find_if, 1021
 find_if_not, 1021
 find_last_not_of
 basic_string, 798, 799
 basic_string_view, 813
 find_last_of
 basic_string, 797
 basic_string_view, 813
 first
 local_info, 749
 span, 967
 first_argument_type
 zombie, 443
 fisher_f_distribution, 1098
 constructor, 1099
 m, 1099
 n, 1099
 fixed, 1169
 fixed
 chars_format, 767
 flag_type
 basic_regex, 1294
 flags
 ios_base, 828, 1160
 flip
 bitset, 568
 vector<bool>, 919
 float_denorm_style, 456, 457
 numeric_limits, 460
 float_round_style, 456
 float_t, 1135
 floor, 1135
 duration, 694
 time_point, 699
 floor2, 1066
 floorf, 1135
 floorl, 1135
 FLT_DECIMAL_DIG, 463

FLT_DIG, 463
 FLT_EPSILON, 463
 FLT_EVAL_METHOD, 463
 FLT_HAS_SUBNORM, 463
 FLT_MANT_DIG, 463
 FLT_MAX, 463
 FLT_MAX_10_EXP, 463
 FLT_MAX_EXP, 463
 FLT_MIN, 463
 FLT_MIN_10_EXP, 463
 FLT_MIN_EXP, 463
 FLT_RADIX, 463
 FLT_ROUNDS, 463
 FLT_TRUE_MIN, 463
 flush, 1160, 1182, 1192, 1197
 basic_ostream, 1196
 flush_emit, 1197
 fma, 1135
 fmaf, 1135
 fmal, 1135
 fmax, 1135
 fmaxf, 1135
 fmaxl, 1135
 fmin, 1135
 fminf, 1135
 fminl, 1135
 fmod, 1135
 fmodf, 1135
 fmodl, 1135
 fmtflags
 ios_base, 1158, 1198
 fopen, 1213, 1273
 FOPEN_MAX, 1273
 for_each, 1020
 for_each_n, 1020
 format, 758–760
 match_results, 1303
 format_default, 1285, 1287
 format_first_only, 1285, 1287, 1307
 format_no_copy, 1285, 1287, 1307
 format_sed, 1285, 1287
 forward, 521
 forward_as_tuple, 533
 forward_iterator_tag, 979
 forward_list
 before_begin, 904
 cbefore_begin, 904
 clear, 905
 constructor, 903, 904
 emplace_after, 905
 emplace_front, 904
 erase_after, 905
 erased, 905
 front, 904
 insert_after, 904, 905
 merge, 907
 pop, 904
 push_front, 904
 remove, 906
 remove_if, 906
 resize, 905
 reverse, 907
 sort, 907
 splice_after, 905, 906
 unique, 906
 FP_FAST_FMA, 1135
 FP_FAST_FMAF, 1135
 FP_FAST_FMAL, 1135
 FP_ILOGB0, 1135
 FP_ILOGBNAN, 1135
 FP_INFINITE, 1135
 FP_NAN, 1135
 FP_NORMAL, 1135
 FP_SUBNORMAL, 1135
 FP_ZERO, 1135
 fpclassify, 1135
 fpos, 1155, 1162, 1163
 state, 1163
 fpos_t, 1273
 fprintf, 1273
 fputc, 1273
 fputs, 1273
 fputwc, 817
 fputws, 817
 frac_digits
 moneypunct, 856
 fread, 1273
 free, 451, 584
 freeze
 ostrstream, 1439
 strstream, 1440
 strstreambuf, 1435
 freopen, 1273
 frexp, 1135
 frexpf, 1135
 frexpl, 1135
 from_bytes
 wstring_convert, 1445
 from_chars, 769
 from_chars_result, 767
 ec, 767
 ptr, 767
 from_stream
 day, 713
 duration, 696
 file_time, 707
 gps_time, 706
 local_time, 708
 month, 715
 month_day, 723
 sys_time, 700
 tai_time, 704
 utc_time, 702
 weekday, 720
 year, 718
 year_month, 727
 year_month_day, 730
 from_sys

- utc_clock, 701
- from_time_t
 - system_clock, 700
- from_utc
 - gps_clock, 705
 - tai_clock, 703
- front
 - basic_string, 788
 - basic_string_view, 810
 - forward_list, 904
 - tzdb_list, 746
- front_insert_iterator, 985
 - constructor, 985
 - operator*, 985
 - operator++, 986
 - operator=, 985
- front_inserter, 986
- fscanf, 1273
- fseek, 1213, 1273
- fsetpos, 1273
- fstream, 1151, 1210
- ftell, 1273
- function, 639
 - constructor, 640, 641
 - destructor, 642
 - invocation, 642
 - operator bool, 642
 - operator!=, 642
 - operator(), 642
 - operator=, 641
 - operator==, 642
 - swap, 642
 - target, 642
 - target_type, 642
- function_name
 - contract_violation, 476
- future, 1375
 - constructor, 1376
 - get, 1376
 - operator=, 1376
 - share, 1376
 - valid, 1377
 - wait, 1377
 - wait_for, 1377
 - wait_until, 1377
- future_category, 1371
- future_errc, 1370
 - make_error_code, 1371
 - make_error_condition, 1371
- future_error, 1372
 - code, 1372
 - constructor, 1372
 - what, 1372
- fwide, 817
- fwprintf, 817
- fwrite, 1273
- fwscanf, 817
- gamma_distribution, 1093
 - alpha, 1094
 - beta, 1094
 - constructor, 1094
- gbump
 - basic_streambuf, 1175
- gcd, 1134
- gcount
 - basic_istream, 1185
- general
 - chars_format, 767
 - GENERALIZED_NONCOMMUTATIVE_SUM*, 1055
 - GENERALIZED_SUM*, 1055
- generate, 1031
 - seed_seq, 1086
- generate_canonical, 1087
- generate_n, 1031
- generic_category, 510, 512
- generic_string
 - path, 1243
- generic_u16string
 - path, 1243
- generic_u32string
 - path, 1243
- generic_u8string
 - path, 1243
- generic_wstring
 - path, 1243
- geometric_distribution, 1090
 - constructor, 1091
 - p, 1091
- get
 - array, 897
 - basic_istream, 1185, 1186
 - future, 1376
 - messages, 857
 - money_get, 852
 - num_get, 838
 - pair, 526
 - reference_wrapper, 629
 - shared_future, 1379
 - shared_ptr, 597
 - time_get, 848
 - tuple, 535
 - unique_ptr, 588
 - variant, 557
- get_allocator
 - basic_string, 795
 - basic_syncbuf, 1225
 - match_results, 1303
- get_date
 - time_get, 848
- get_default_resource, 615
- get_deleter
 - shared_ptr, 602
 - unique_ptr, 588
- get_future
 - packaged_task, 1382
 - promise, 1374
- get_id

this_thread, 1345
 thread, 1345
 get_if, 557
 get_info
 time_zone, 750
 zoned_time, 755
 get_local_time
 zoned_time, 755
 get_money, 1199
 get_monthname
 time_get, 848
 get_new_handler, 445, 472
 get_pointer_safety, 577
 get_sys_time
 zoned_time, 755
 get_temporary_buffer
 zombie, 442
 get_terminate, 445, 478
 get_time, 1200
 time_get, 848
 get_time_zone
 zoned_time, 755
 get_tzdb, 746
 get_tzdb_list, 746
 get_unexpected
 zombie, 442
 get_weekday
 time_get, 848
 get_wrapped
 basic_syncbuf, 1225
 get_year
 time_get, 848
 getc, 1273
 getchar, 1273
 getenv, 451, 488, 489
 getline
 basic_istream, 1186, 1187
 basic_string, 803, 804
 getloc, 1290
 basic_regex, 1294
 basic_streambuf, 1173
 ios_base, 1161
 gets
 zombie, 442
 getwc, 817
 getwchar, 817
 global
 locale, 827
 gmtime, 764
 good
 basic_ios, 1167
 gps_clock, 704
 from_utc, 705
 now, 705
 to_utc, 705
 gps_seconds, 672
 gps_time, 672
 from_stream, 706
 operator<<, 705
 to_stream, 705
 gptr
 basic_streambuf, 1175
 greater, 632
 operator(), 632
 partial_ordering, 483
 strong_ordering, 486
 weak_ordering, 484
 greater<>, 632
 operator(), 632
 greater_equal, 632
 operator(), 633
 greater_equal<>, 633
 operator(), 633
 grouping
 moneypunct, 856
 numpunct, 845
 gslice, 1118
 constructor, 1119
 size, 1119
 start, 1119
 stride, 1119
 gslice_array, 1119, 1120
 operator*=: 1120
 operator+=: 1120
 operator-=: 1120
 operator/=: 1120
 operator<<=: 1120
 operator=: 1120
 operator>>=: 1120
 operator%=: 1120
 operator&=: 1120
 operator^=: 1120
 operator|=: 1120
 value_type, 1119
 hard_link_count, 1267
 directory_entry, 1256
 hardware_concurrency
 thread, 1345
 hardware_constructive_interference_size, 473
 hardware_destructive_interference_size, 473
 has_denorm_loss
 numeric_limits, 460
 has_extension
 path, 1245
 has_facet
 locale, 827
 has_filename
 path, 1245
 has_infinity
 numeric_limits, 460
 has_parent_path
 path, 1245
 has_quiet_NaN
 numeric_limits, 460
 has_relative_path

- path, 1245
- has_root_directory
 - path, 1245
- has_root_name
 - path, 1245
- has_root_path
 - path, 1245
- has_signaling_NaN
 - numeric_limits, 460
- has_stem
 - path, 1245
- has_unique_object_representations, 659, 660
- has_value
 - any, 563
 - optional, 545
- has_virtual_destructor, 659
- hash, 645
 - collate, 846
 - error_code, 516
 - monostate, 559
 - optional, 549
 - pmr::string, 805
 - pmr::u16string, 805
 - pmr::u32string, 805
 - pmr::wstring, 805
 - shared_ptr, 606
 - string, 805
 - string_view, 815
 - thread::id, 1343
 - type_index, 765
 - u16string, 805
 - u16string_view, 815
 - u32string, 805
 - u32string_view, 815
 - unique_ptr, 606
 - variant, 559
 - wstring, 805
 - wstring_view, 815
- hash_code, 570
 - type_index, 765
 - type_info, 474
- hash_function
 - unordered associative containers, 886
- hash_value
 - path, 1247
- hasher
 - unordered associative containers, 883
- hermite, 1147
- hermitef, 1147
- hermitel, 1147
- hex, 1169
- hex
 - chars_format, 767
- hexfloat, 1169
- high_resolution_clock, 707
- holds_alternative, 557
- hours, 672
 - time_of_day<sub-second duration>, 743
 - time_of_day<hours>, 740
 - time_of_day<minutes>, 741
 - time_of_day<seconds>, 742
- HUGE_VAL, 1135
- HUGE_VALF, 1135
- HUGE_VALL, 1135
- hypot, 1135
 - 3-argument form, 1144
- hypotf, 1135
- hypotl, 1135
- id
 - locale, 825
- identity, 635
- ifstream, 1151, 1210
- ignore, 533
 - basic_istream, 1187
- ilogb, 1135
- ilogbf, 1135
- ilogbl, 1135
- imag, 1064
 - complex, 1061, 1063
- imaxabs, 1275
- imaxdiv, 1275
- imaxdiv_t, 1275
- imbue, 1290
 - basic_filebuf, 1216
 - basic_ios, 1165
 - basic_regex, 1294
 - basic_streambuf, 1175
 - ios_base, 1161
- in
 - codecvt, 834
- in_avail
 - basic_streambuf, 1173
- includes, 1044
- inclusive_scan, 1131
- increment
 - directory_iterator, 1258
 - recursive_directory_iterator, 1261
- independent_bits_engine, 1081, 1082
- index
 - variant, 556
 - weekday_indexed, 721
 - year_month_weekday, 734
- index_sequence, 519
- index_sequence_for, 519
- indirect_array, 1121
 - operator*=, 1122
 - operator+=", 1122
 - operator-=", 1122
 - operator/=", 1122
 - operator<<=", 1122
 - operator=", 1122
 - operator>>=", 1122
 - operator[], 1122
 - operator%=", 1122
 - operator&=", 1122
 - operator^=", 1122
 - operator|=, 1122

- value_type, 1121
- INFINITY, 1135
- infinity
 - numeric_limits, 460
- init
 - basic_ios, 1165, 1181
 - basic_ostream, 1191
- initializer_list, 480
 - begin, 480
 - constructor, 480
 - end, 480
 - size, 480
- inner_allocator
 - scoped_allocator_adaptor, 622
- inner_allocator_type
 - scoped_allocator_adaptor, 621
- inner_product, 1128
- inplace_merge, 1044
- input_iterator_tag, 979
- insert
 - basic_string, 791, 792
 - deque, 900
 - list, 910
 - map, 925
 - multimap, 930
 - unordered associative containers, 887
 - unordered_map, 943
 - unordered_multimap, 948
 - vector, 916
- insert_after
 - forward_list, 904, 905
- insert_iterator, 986
 - constructor, 986
 - operator*, 986
 - operator++, 987
 - operator=, 986
- insert_or_assign
 - map, 926
 - unordered_map, 943
- inserter, 987
- int16_t, 464
- int32_t, 464
- int64_t, 464
- int8_t, 464
- int_fast16_t, 464
- int_fast32_t, 464
- int_fast64_t, 464
- int_fast8_t, 464
- int_least16_t, 464
- int_least32_t, 464
- int_least64_t, 464
- int_least8_t, 464
- INT_MAX, 463
- INT_MIN, 463
- int_type
 - char_traits, 772
 - wstring_convert, 1446
- integer_sequence, 522
 - value_type, 522
- Integral, 495
- integral_constant, 653
 - value_type, 652
- internal, 1169
- intervals
 - piecewise_constant_distribution, 1102
 - piecewise_linear_distribution, 1104
- intmax_t, 464
- intptr_t, 464
- invalid_argument, 503, 504, 566, 567
 - constructor, 504
- Invocable, 501
- INVOKE, 627, 628
- invoke, 628
- io_errc, 1155
 - make_error_code, 1170
 - make_error_condition, 1170
- io_state
 - zombie, 443
- ios, 1151, 1155
- ios_base, 1156
 - constructor, 1162
 - destructor, 1162
 - failure, 1158
 - flags, 1160
 - fmtflags, 1158
 - getloc, 1161
 - imbue, 1161
 - Init, 1160
 - iostate, 1158
 - iword, 1161
 - openmode, 1158
 - precision, 1160
 - pword, 1162
 - register_callback, 1162
 - seekdir, 1158
 - setf, 1160
 - sync_with_stdio, 1161
 - unsetf, 1160
 - width, 1160, 1161
 - xalloc, 1161
- ios_base::failure, 1158
 - constructor, 1158
- ios_base::Init, 1160
 - constructor, 1160
 - destructor, 1160
- iostate
 - ios_base, 1158
- iostream_category, 1170
- iota, 1134
- is
 - ctype, 829
 - ctype<char>, 832
- is_absolute
 - path, 1245
- is_abstract, 655
- is_aggregate, 655
- is_always_equal
 - allocator, 580

- allocator_traits, 580
- scoped_allocator_adaptor, 621
- is_always_lock_free
 - atomic, 1329
 - atomic<floating_point>, 1329
 - atomic<integral>, 1329
 - atomic<T*>, 1329
 - atomic_ref, 1323
 - atomic_ref<floating_point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- is_arithmetic, 654
- is_array, 653
- is_assignable, 656
- is_base_of, 661
- is_bind_expression, 637
- is_block_file, 1267
 - directory_entry, 1255
- is_bounded
 - numeric_limits, 461
- is_character_file, 1267
 - directory_entry, 1255
- is_class, 653
- is_clock, 689
- is_clock_v, 672
- is_compound, 654
- is_const, 654
- is_constructible, 655, 660
- is_convertible, 661, 662
- is_copy_assignable, 656
- is_copy_constructible, 655
- is_default_constructible, 655
- is_destructible, 657
- is_directory, 1268
 - directory_entry, 1255
- is_empty
 - class, 655
 - function, 1268
- is_enum, 653
- is_eq, 481
- is_equal
 - memory_resource, 611
- is_error_code_enum, 508
- is_error_condition_enum, 508
- is_exact
 - numeric_limits, 459
- is_execution_policy, 766
- is_fifo, 1268
 - directory_entry, 1255
- is_final, 655
- is_floating_point, 653
- is_function, 653
- is_fundamental, 654
- is_geq, 481
- is_gt, 481
- is_gteq, 481
- is_heap, 1048, 1049
- is_heap_until, 1049
- is_iec559
 - numeric_limits, 461
- is_integer
 - numeric_limits, 459
- is_integral, 653
- is_invocable, 661
- is_invocable_r, 661
- is_leap
 - year, 717
- is_literal_type, 1440
 - zombie, 442
- is_literal_type_v
 - zombie, 442
- is_lock_free
 - atomic, 1329
 - atomic<floating_point>, 1329
 - atomic<integral>, 1329
 - atomic<T*>, 1329
 - atomic_ref, 1323
 - atomic_ref<floating_point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- is_lt, 481
- is_lteq, 481
- is_lvalue_reference, 653
- is_member_function_pointer, 653
- is_member_object_pointer, 653
- is_member_pointer, 654
- is_modulo
 - numeric_limits, 461
- is_move_assignable, 656
- is_move_constructible, 655
- is_neq, 481
- is_nothrow_assignable, 659
- is_nothrow_constructible, 658
- is_nothrow_convertible, 661
- is_nothrow_convertible_v, 646
- is_nothrow_copy_assignable, 659
- is_nothrow_copy_constructible, 658
- is_nothrow_default_constructible, 658
- is_nothrow_destructible, 659
- is_nothrow_invocable, 662
- is_nothrow_invocable_r, 662
- is_nothrow_move_assignable, 659
- is_nothrow_move_constructible, 659
- is_nothrow_swappable, 659
- is_nothrow_swappable_with, 659
- is_null_pointer, 653
- is_object, 654
- is_open
 - basic_filebuf, 1213
 - basic_fstream, 1222
 - basic_ifstream, 1218
 - basic_ofstream, 1220
- is_other, 1268
 - directory_entry, 1255
- is_partitioned, 1041
- is_permutation, 1025
- is_placeholder, 637
- is_pointer, 653

is_polymorphic, 655
 is_reference, 654
 is_regular_file, 1268, 1269
 directory_entry, 1255
 is_relative
 path, 1245
 is_rvalue_reference, 653
 is_scalar, 654
 is_signed
 class, 655
 numeric_limits, 459
 is_socket, 1269
 directory_entry, 1255
 is_sorted, 1039
 is_sorted_until, 1039
 is_standard_layout, 654
 is_swappable, 657
 is_swappable_with, 657
 is_symlink, 1269
 directory_entry, 1256
 is_trivial, 654
 is_trivially_assignable, 658
 is_trivially_constructible, 657
 is_trivially_copy_assignable, 658
 is_trivially_copy_constructible, 658
 is_trivially_copyable, 654
 is_trivially_default_constructible, 658
 is_trivially_destructible, 658
 is_trivially_move_assignable, 658
 is_trivially_move_constructible, 658
 is_union, 653
 is_unsigned, 655
 is_void, 653
 is_volatile, 654
 isalnum, 815, 827
 isalpha, 815, 827
 isblank, 815, 827
 iscntrl, 815, 827
 isctype
 regex_traits, 1289
 regular expression traits, 1314
 isdigit, 815, 827
 isfinite, 1135
 isgraph, 815, 827
 isgreater, 1135
 isgreaterequal, 1135
 isinf, 1135
 isless, 1135
 islessequal, 1135
 islessgreater, 1135
 islower, 815, 827
 isnan, 1135
 isnormal, 1135
 ispow2, 1066
 isprint, 815, 827
 ispunct, 815, 827
 isspace, 815, 827
 istream, 1151, 1178
 istream_iterator, 990
 constructor, 991
 destructor, 991
 operator!=, 992
 operator*, 992
 operator++, 992
 operator->, 992
 operator==, 992
 istreambuf_iterator, 993
 constructor, 994, 995
 equal, 995
 operator!=, 995
 operator*, 995
 operator++, 995
 operator==, 995
 istringstream, 1151, 1201
 istrstream, 1437
 constructor, 1438
 rdbuf, 1438
 str, 1438
 isunordered, 1135
 isupper, 815, 827
 iswalnum, 816
 iswalpha, 816
 iswblank, 816
 iswcntrl, 816
 iswctype, 816
 iswdigit, 816
 iswgraph, 816
 iswlower, 816
 iswprint, 816
 iswpunct, 816
 iswspace, 816
 iswupper, 816
 iswxdigit, 816
 isxdigit, 815, 827
 iter_swap, 1029
 iterator, 1440
 basic_string, 779
 basic_string_view, 807
 iterator_category
 iterator_traits, 978
 iterator_traits, 978
 difference_type, 978
 iterator_category, 978
 pointer, 978
 reference, 978
 value_type, 978
 iword
 ios_base, 1161

 jmp_buf, 489
 join
 thread, 1345
 joinable
 thread, 1344

 k
 negative_binomial_distribution, 1091
 key_eq

- unordered associative containers, 886
- key_equal
 - unordered associative containers, 883
- key_type
 - unordered associative containers, 883
- kill_dependency, 1321
- knuth_b, 1084

- L_tmpnam, 1273
- labs, 451
- laguerre, 1148
- laguerref, 1148
- laguerrel, 1148
- lambda
 - exponential_distribution, 1093
- last
 - span, 967
- last_spec, 711
- last_write_time, 1269
 - directory_entry, 1256
- latest
 - choose, 672
- launder, 472
- LC_ALL, 858
- LC_COLLATE, 858
- LC_CTYPE, 858
- LC_MONETARY, 858
- LC_NUMERIC, 858
- LC_TIME, 858
- lcm, 1134
- lconv, 858
- LDBL_DECIMAL_DIG, 463
- LDBL_DIG, 463
- LDBL_EPSILON, 463
- LDBL_HAS_SUBNORM, 463
- LDBL_MANT_DIG, 463
- LDBL_MAX, 463
- LDBL_MAX_10_EXP, 463
- LDBL_MAX_EXP, 463
- LDBL_MIN, 463
- LDBL_MIN_10_EXP, 463
- LDBL_MIN_EXP, 463
- LDBL_TRUE_MIN, 463
- ldexp, 1135
- ldexpf, 1135
- ldexpl, 1135
- ldiv, 451
- ldiv_t, 451
- leap, 755
 - date, 756
 - operator!=, 757
 - operator<, 756, 757
 - operator<=, 757
 - operator==, 756, 757
 - operator>, 757
 - operator>=, 757
- left, 1169
- legendre, 1148
- legendref, 1148

- legendrel, 1148
- length
 - basic_string, 787
 - basic_string_view, 810
 - char_traits, 786
 - codecvt, 834
 - match_results, 1302
 - regex_traits, 1289
 - sub_match, 1295
- length_error, 503, 504, 779
 - constructor, 504, 505
- less, 632
 - operator(), 632
 - partial_ordering, 483
 - strong_ordering, 486
 - weak_ordering, 484
- less<>, 632
 - operator(), 632
- less_equal, 633
 - operator(), 633
- less_equal<>, 633
 - operator(), 633
- lexically_normal
 - path, 1245
- lexically_proximate
 - path, 1246
- lexically_relative
 - path, 1246
- lexicographical_compare, 1051
- lexicographical_compare_3way, 1052, 1053
- lgamma, 1135
- lgammaf, 1135
- lgammal, 1135
- line_number
 - contract_violation, 475
- linear_congruential_engine, 1077
 - constructor, 1077, 1078
- link, 757
 - name, 758
 - operator<, 758
 - operator==, 758
 - target, 758
- list, 907
 - constructor, 909, 910
 - splice, 911
- little
 - endian, 669
- llabs, 451
- lldiv, 451
- lldiv_t, 451
- LLONG_MAX, 463
- LLONG_MIN, 463
- llrint, 1135
- llrintf, 1135
- llrintl, 1135
- llround, 1135
- llroundf, 1135
- llroundl, 1135
- load

- atomic, 1329
- atomic<floating-point>, 1329
- atomic<integral>, 1329
- atomic<shared_ptr<T>>, 607
- atomic<T*>, 1329
- atomic<weak_ptr<T>>, 609
- atomic_ref, 1323
- atomic_ref<floating-point>, 1323
- atomic_ref<integral>, 1323
- atomic_ref<T*>, 1323
- load_factor
 - unordered associative containers, 891
- local_days, 672
- local_info, 749
 - ambiguous, 749
 - first, 749
 - nonexistent, 749
 - operator<<, 750
 - result, 749
 - second, 749
 - unique, 749
- local_iterator
 - unordered associative containers, 883
- local_seconds, 672
- local_t, 672
- local_time, 672, 708
 - from_stream, 708
 - operator<<, 708
 - to_stream, 708
- locale, 1290, 1294, 1313
 - category, 823
 - classic, 827
 - combine, 826
 - constructor, 825, 826
 - destructor, 826
 - facet, 824
 - global, 827
 - has_facet, 827
 - id, 825
 - name, 826
 - operator!=, 826
 - operator(), 826
 - operator=, 826
 - operator==, 826
 - use_facet, 827
- localeconv, 858
- localtime, 764
- locate_zone, 746
 - tzdb, 745
 - zoned_traits<const time_zone*>, 751
- lock, 1363
 - shared_lock, 1361
 - unique_lock, 1358
 - weak_ptr, 604
- lock_guard, 1354
 - constructor, 1354, 1355
 - destructor, 1355
- log, 1135
 - complex, 1064
 - valarray, 1116
- log10, 1135
 - complex, 1064
 - valarray, 1116
- log10f, 1135
- log10l, 1135
- log1p, 1135
- log1pf, 1135
- log1pl, 1135
- log2, 1135
- log2f, 1135
- log2l, 1135
- log2p1, 1066
- logb, 1135
- logbf, 1135
- logbl, 1135
- logf, 1135
- logic_error, 503
 - constructor, 503, 504
- logical_and, 633
 - operator(), 633
- logical_and<>, 633
 - operator(), 633
- logical_not, 634
 - operator(), 634
- logical_not<>, 634
 - operator(), 634
- logical_or, 634
 - operator(), 634
- logical_or<>, 634
 - operator(), 634
- logl, 1135
- lognormal_distribution, 1096
 - constructor, 1097
 - m, 1097
 - s, 1097
- LONG_MAX, 463
- LONG_MIN, 463
- longjmp, 489
- lookup_classname
 - regex_traits, 1289
 - regular expression traits, 1314
- lookup_collatename
 - regex_traits, 1289
 - regular expression traits, 1314
- lower_bound, 1040
- lowest
 - numeric_limits, 458
- lrint, 1135
- lrintf, 1135
- lrintl, 1135
- lround, 1135
- lroundf, 1135
- lroundl, 1135
- m
 - fisher_f_distribution, 1099
 - lognormal_distribution, 1097
- make12

time_of_day<sub-second duration>, 743
 time_of_day<hours>, 740
 time_of_day<minutes>, 741
 time_of_day<seconds>, 742
 make24
 time_of_day<sub-second duration>, 743
 time_of_day<hours>, 740
 time_of_day<minutes>, 741
 time_of_day<seconds>, 742
 make_any, 564
 make_error_code
 errc, 514
 future_errc, 1371
 io_errc, 1170
 make_error_condition
 errc, 515
 future_errc, 1371
 io_errc, 1170
 make_exception_ptr, 479
 make_from_tuple, 534
 make_heap, 1048
 make_index_sequence, 519
 make_integer_sequence, 522
 make_move_iterator, 990
 make_optional, 548, 549
 make_pair, 526
 make_preferred
 path, 1241
 make_ready_at_thread_exit
 packaged_task, 1383
 make_reverse_iterator, 984
 make_shared, 598–600
 make_signed, 663
 make_tuple, 532
 make_unique, 591
 make_unsigned, 664
 malloc, 451, 583, 1429
 map, 921
 constructor, 925
 contains, 880
 insert, 925
 insert_or_assign, 926
 operator<, 925
 operator==, 925
 try_emplace, 925, 926
 mark_count
 basic_regex, 1294
 mask_array, 1120
 operator*==, 1121
 operator+==, 1121
 operator-==, 1121
 operator/=, 1121
 operator<<=, 1121
 operator=, 1121
 operator>>=, 1121
 operator[], 1121
 operator%==, 1121
 operator&=, 1121
 operator^=, 1121
 operator|=, 1121
 value_type, 1120
 match_any, 1285, 1286
 match_continuous, 1285, 1286, 1310
 match_default, 1285
 match_flag_type, 1285, 1286, 1315
 match_not_bol, 1285, 1286
 match_not_bow, 1285, 1286
 match_not_eol, 1285, 1286
 match_not_eow, 1285, 1286
 match_not_null, 1285, 1286, 1310
 match_prev_avail, 1285, 1287, 1310
 match_results, 1299, 1308, 1310
 begin, 1302
 constructor, 1301
 empty, 1302
 end, 1302
 format, 1303
 get_allocator, 1303
 length, 1302
 matched, 1300
 max_size, 1302
 operator!=, 1304
 operator=, 1301
 operator==, 1304
 operator[], 1302
 position, 1302
 prefix, 1302
 ready, 1302
 size, 1302
 str, 1302
 suffix, 1302
 swap, 1303, 1304
 MATH_ERREXCEPT, 1135
 math_errhandling, 1135
 MATH_ERRNO, 1135
 max, 1050
 duration, 692
 duration_values, 688
 numeric_limits, 458
 time_point, 698
 valarray, 1113
 year, 717
 max_align_t, 450, 453
 max_bucket_count
 unordered associative containers, 890
 max_digits10
 numeric_limits, 459
 max_element, 1051
 max_exponent
 numeric_limits, 459
 max_exponent10
 numeric_limits, 460
 max_length
 codecvt, 834
 max_load_factor
 unordered associative containers, 891
 max_size
 allocator_traits, 580

- array, 896
- basic_string, 787
- basic_string_view, 810
- match_results, 1302
- scoped_allocator_adaptor, 622
- MB_CUR_MAX, 451
- MB_LEN_MAX, 463
- mblen, 451, 818
- mbrlen, 817, 819
- mbrstowcs, 819
- mbrtoc16, 818
- mbrtoc32, 818
- mbrtowc, 817, 819
- mbsinit, 817, 818
- mbsrtowcs, 817
- mbstate_t, 817, 818
- mbstowcs, 451, 818
- mbtowc, 451, 819
- mean
 - normal_distribution, 1096
 - poisson_distribution, 1092
 - student_t_distribution, 1100
- mem_fn, 639
- mem_fun
 - zombie, 443
- mem_fun1_ref_t
 - zombie, 442
- mem_fun1_t
 - zombie, 442
- mem_fun_ref
 - zombie, 443
- mem_fun_ref_t
 - zombie, 442
- mem_fun_t
 - zombie, 443
- memchr, 816
- memcmp, 816
- memcpy, 816
- memmove, 816
- memory_order, 1320
 - acq_rel, 1320
 - acquire, 1320
 - consume, 1320
 - relaxed, 1320
 - release, 1320
 - seq_cst, 1320
- memory_order_acq_rel, 1320
- memory_order_acquire, 1320
- memory_order_consume, 1320
- memory_order_relaxed, 1320
- memory_order_release, 1320
- memory_order_seq_cst, 1320
- memory_resource, 610
 - allocate, 611
 - deallocate, 611
 - destructor, 611
 - do_allocate, 611
 - do_deallocate, 611
 - do_is_equal, 611
 - is_equal, 611
 - operator!=, 611
 - operator=, 610
 - operator==, 611
- memset, 816
- merge, 1043
 - forward_list, 907
 - list, 912
- mersenne_twister_engine, 1078
 - constructor, 1079
- message
 - do_close, 858
 - error_category, 511
 - error_code, 513
 - error_condition, 515
- messages, 857
 - close, 857
 - do_get, 858
 - do_open, 857
 - get, 857
 - open, 857
- messages_byname, 858
- microseconds, 672
- milliseconds, 672
- min, 1049
 - duration, 692
 - duration_values, 688
 - numeric_limits, 458
 - time_point, 698
 - valarray, 1113
 - year, 717
- min_element, 1050
- min_exponent
 - numeric_limits, 459
- min_exponent10
 - numeric_limits, 459
- minmax, 1050
- minmax_element, 1051
- minstd_rand, 1083
- minstd_rand0, 1083
- minus, 629
 - operator(), 629
- minus<>, 630
 - operator(), 630
- minutes, 672
 - time_of_day<sub-second duration>, 743
 - time_of_day<minutes>, 741
 - time_of_day<seconds>, 742
- mismatch, 1023
- mktime, 764
- modf, 1135
- modff, 1135
- modfl, 1135
- modulus, 630
 - operator(), 630
- modulus<>, 630
 - operator(), 631
- money_get, 852
 - do_get, 852

- get, 852
- money_put, 853
 - do_put, 854
 - put, 854
- money_punct, 854
 - curr_symbol, 856
 - decimal_point, 856
 - do_curr_symbol, 856
 - do_decimal_point, 856
 - do_frac_digits, 856
 - do_grouping, 856
 - do_neg_format, 856
 - do_negative_sign, 856
 - do_pos_format, 856
 - do_positive_sign, 856
 - do_thousands_sep, 856
 - frac_digits, 856
 - grouping, 856
 - negative_sign, 856
 - positive_sign, 856
 - thousands_sep, 856
- money_punct_byname, 856
- monostate, 559
- monotonic_buffer_resource, 618
 - constructor, 618, 619
 - destructor, 619
 - do_allocate, 619
 - do_deallocate, 619
 - do_is_equal, 619
 - release, 619
 - upstream_resource, 619
- month, 713
 - constructor, 714
 - from_stream, 715
 - month_day, 722
 - month_day_last, 723
 - month_weekday, 724
 - month_weekday_last, 725
 - ok, 714
 - operator unsigned, 714
 - operator+, 715
 - operator++, 714
 - operator+=", 714
 - operator-, 715
 - operator--, 714
 - operator-=", 714
 - operator<, 715
 - operator<<, 715
 - operator==, 715
 - to_stream, 715
 - year_month, 726
 - year_month_day, 729
 - year_month_day_last, 731
 - year_month_weekday, 733
 - year_month_weekday_last, 735
- month_day, 722
 - constructor, 722
 - day, 722
 - from_stream, 723
- month, 722
 - ok, 722
 - operator<, 723
 - operator<<, 723
 - operator==, 722
 - to_stream, 723
- month_day_last, 723
 - constructor, 723
 - month, 723
 - ok, 723
 - operator<, 724
 - operator<<, 724
 - operator==, 724
 - year_month_day_last, 731
- month_weekday, 724
 - constructor, 724
 - month, 724
 - ok, 724
 - operator<<, 724
 - operator==, 724
 - weekday_indexed, 724
- month_weekday_last, 725
 - constructor, 725
 - month, 725
 - ok, 725
 - operator<<, 725
 - operator==, 725
 - weekday_last, 725
- months, 672
- Movable, 500
- move
 - algorithm, 1028
 - basic_ios, 1166
 - function, 521
- move_backward, 1028
- move_if_noexcept, 522
- move_iterator, 987
 - base, 988
 - constructor, 988
 - operator!=, 989
 - operator*, 989
 - operator+, 989, 990
 - operator++, 989
 - operator+=", 989
 - operator-, 989, 990
 - operator==, 989
 - operator->, 989
 - operator--, 989
 - operator<, 990
 - operator<=, 990
 - operator=, 988
 - operator==, 989
 - operator>, 990
 - operator>=, 990
 - operator [], 989
- MoveConstructible, 498
- mt19937, 1083
- mt19937_64, 1083
- multimap, 926

- constructor, 929
 - contains, 880
 - insert, 930
 - operator<, 929
 - operator==, 929
- multiplies, 630
 - operator(), 630
- multiplies<>, 630
 - operator(), 630
- multiset, 933
 - constructor, 936
 - contains, 880
 - operator<, 936
 - operator==, 936
- mutex, 1348
 - shared_lock, 1362
 - unique_lock, 1359
- n
 - chi_squared_distribution, 1097
 - fisher_f_distribution, 1099
- name
 - error_category, 511
 - link, 758
 - locale, 826
 - time_zone, 750
 - type_index, 765
 - type_info, 474
- NAN, 1135
- nan, 1135
- nanf, 1135
- nanl, 1135
- nanoseconds, 672
- narrow
 - basic_ios, 1166
 - ctype, 829
 - ctype<char>, 832
- native
 - endian, 669
 - path, 1242
- NDEBUG, 432
- nearbyint, 1135
- nearbyintf, 1135
- nearbyintl, 1135
- negate, 631
 - operator(), 631
- negate<>, 631
 - operator(), 631
- negation, 669
- negative_binomial_distribution, 1091
 - constructor, 1091
 - k, 1091
 - p, 1092
- negative_sign
 - money_punct, 856
- nested_exception, 479
 - constructor, 479
 - nested_ptr, 479
 - rethrow_if_nested, 479
 - rethrow_nested, 479
 - throw_with_nested, 479
- nested_ptr
 - nested_exception, 479
- new
 - operator, 444, 467–471, 584
- new_delete_resource, 614
- new_handler, 472
- next, 980
- next_permutation, 1053
- nextafter, 1135
- nextafterf, 1135
- nextafterl, 1135
- nexttoward, 1135
- nexttowardf, 1135
- nexttowardl, 1135
- noboolalpha, 1168
- node_type
 - unordered associative containers, 884
- noemit_on_flush, 1197
- none
 - bitset, 569
- none_of, 1019
- nonequal
 - strong_equality, 482
- nonequivalent
 - strong_equality, 482
 - weak_equality, 482
- nonexistent
 - local_info, 749
- nonexistent_local_time, 747
 - constructor, 747
- norm, 1064
 - complex, 1063
- normal_distribution, 1095
 - constructor, 1096
 - mean, 1096
 - stddev, 1096
- noshowbase, 1168
- noshowpoint, 1168
- noshowpos, 1168
- noskipws, 1168
- not1
 - zombie, 443
- not2
 - zombie, 443
- not_equal_to, 632
 - operator(), 632
- not_equal_to<>, 632
 - operator(), 632
- not_fn, 636
- nothrow, 466
- nothrow_t, 466
- notify_all
 - condition_variable, 1366
 - condition_variable_any, 1369
- notify_all_at_thread_exit, 1364
- notify_one
 - condition_variable, 1366

condition_variable_any, 1369
 nunitbuf, 1169
 nouppercase, 1168
 now
 file_clock, 706
 gps_clock, 705
 tai_clock, 703
 utc_clock, 701
 nth_element, 1039
 NULL, 450–452, 764, 817, 858, 1273
 null_memory_resource, 615
 nullopt, 546
 nullopt_t, 546
 nullptr_t, 450, 452
 num_get, 837
 do_get, 838, 840
 get, 838
 num_put, 841
 do_put, 841, 843
 put, 841
 numeric_limits, 456, 457
 denorm_min, 460
 digits, 458
 digits10, 458
 epsilon, 459
 float_denorm_style, 460
 has_denorm_loss, 460
 has_infinity, 460
 has_quiet_NaN, 460
 has_signaling_NaN, 460
 infinity, 460
 is_bounded, 461
 is_exact, 459
 is_iec559, 461
 is_integer, 459
 is_modulo, 461
 is_signed, 459
 lowest, 458
 max, 458
 max_digits10, 459
 max_exponent, 459
 max_exponent10, 460
 min, 458
 min_exponent, 459
 min_exponent10, 459
 quiet_NaN, 460
 radix, 459
 round_error, 459
 round_style, 461
 signaling_NaN, 460
 tinyness_before, 461
 traps, 461
 numeric_limits<bool>, 462
 numpunct, 844
 decimal_point, 844
 do_decimal_point, 845
 do_falsename, 845
 do_grouping, 845
 do_thousands_sep, 845
 do_truename, 845
 falsename, 845
 grouping, 845
 thousands_sep, 844
 truename, 845
 numpunct_byname, 845
 oct, 1169
 off_type
 char_traits, 772
 offset
 sys_info, 749
 offsetof, 450, 453, 1429
 ofstream, 1151, 1210
 ok
 day, 712
 month, 714
 month_day, 722
 month_day_last, 723
 month_weekday, 724
 month_weekday_last, 725
 weekday, 719
 weekday_indexed, 721
 weekday_last, 722
 year, 717
 year_month, 726
 year_month_day, 729
 year_month_day_last, 732
 year_month_weekday, 734
 year_month_weekday_last, 736
 once_flag, 1363
 open
 basic_filebuf, 1213
 basic_fstream, 1222
 basic_ifstream, 1218
 basic_ofstream, 1220
 messages, 857
 open_mode
 zombie, 443
 openmode
 ios_base, 1158
 operator *floating-point*
 atomic<*floating-point*>, 1329
 atomic_ref<*floating-point*>, 1323
 operator *integral*
 atomic<*integral*>, 1329
 atomic_ref<*integral*>, 1323
 operator *type*
 atomic, 1329
 atomic_ref, 1323
 operator basic_string
 sub_match, 1295
 operator basic_string_view
 basic_string, 795
 operator bool
 basic_ios, 1167
 basic_istream::sentry, 1182
 basic_ostream::sentry, 1192
 error_code, 514

- error_condition, 515
- function, 642
- optional, 545
- shared_lock, 1362
- shared_ptr, 598
- unique_lock, 1359
- unique_ptr, 588
- operator const filesystem::path&
 - directory_entry, 1255
- operator int
 - year, 717
- operator local_days
 - year_month_day, 729
 - year_month_day_last, 731
 - year_month_weekday, 734
 - year_month_weekday_last, 736
- operator local_time
 - zoned_time, 755
- operator partial_ordering
 - strong_ordering, 486
 - weak_ordering, 485
- operator precision
 - time_of_day<sub-second duration>, 743
 - time_of_day<hours>, 740
 - time_of_day<minutes>, 741
 - time_of_day<seconds>, 742
- operator shared_ptr<T>
 - atomic<shared_ptr<T>>, 607
- operator string_type
 - path, 1242
- operator strong_equality
 - strong_ordering, 486
- operator sys_days
 - year_month_day, 729
 - year_month_day_last, 731
 - year_month_weekday, 734
 - year_month_weekday_last, 736
- operator sys_time
 - zoned_time, 755
- operator T*
 - atomic<T*>, 1329
 - atomic_ref<T*>, 1323
- operator T&
 - reference_wrapper, 629
- operator unsigned
 - day, 712
 - month, 714
 - weekday, 719
- operator weak_equality
 - partial_ordering, 484
 - strong_equality, 483
 - strong_ordering, 486
 - weak_ordering, 485
- operator weak_ordering
 - strong_ordering, 487
- operator weak_ptr<T>
 - atomic<weak_ptr<T>>, 609
- operator!
 - basic_ios, 1167
 - valarray, 1112
- operator!=, 429, 1432
 - allocator, 581
 - basic_string, 802
 - basic_string_view, 814
 - bitset, 569
 - complex, 1062
 - directory_entry, 1256
 - duration, 693
 - error_category, 511
 - error_code, 515
 - error_condition, 515
 - function, 642
 - istream_iterator, 992
 - istreambuf_iterator, 995
 - leap, 757
 - locale, 826
 - match_results, 1304
 - memory_resource, 611
 - monostate, 559
 - move_iterator, 989
 - optional, 546–548
 - pair, 525
 - partial_ordering, 484
 - path, 1247
 - polymorphic_allocator, 614
 - queue, 959
 - regex_iterator, 1309
 - regex_token_iterator, 1313
 - reverse_iterator, 983
 - scoped_allocator_adaptor, 624
 - shared_ptr, 600
 - span, 968
 - stack, 963
 - strong_equality, 483
 - strong_ordering, 487
 - sub_match, 1296–1299
 - sys_time, 757
 - thread::id, 1343
 - time_point, 698
 - tuple, 536
 - type_index, 765
 - type_info, 474
 - unique_ptr, 591, 592
 - valarray, 1115
 - variant, 558
 - weak_equality, 482
 - weak_ordering, 485
 - zoned_time, 755
- operator""d
 - day, 713
- operator""h
 - duration, 694
- operator""i
 - complex, 1065
- operator""if
 - complex, 1065
- operator""il
 - complex, 1065

operator""min
 duration, 694
 operator""ms
 duration, 695
 operator""ns
 duration, 695
 operator""s
 duration, 694
 string, 806
 u16string, 806
 u32string, 806
 wstring, 806
 operator""sv
 string_view, 815
 u16string_view, 815
 u32string_view, 815
 wstring_view, 815
 operator""us
 duration, 695
 operator""y
 year, 718
 operator()
 bit_and, 634
 bit_and<>, 634
 bit_not, 635
 bit_not<>, 635
 bit_or, 635
 bit_or<>, 635
 bit_xor, 635
 bit_xor<>, 635
 boyer_moore_horspool_searcher, 645
 boyer_moore_searcher, 644
 clock_time_conversion, 709, 710
 default_delete, 585
 default_searcher, 643
 divides, 630
 divides<>, 630
 equal_to, 631
 equal_to<>, 631
 function, 642
 greater, 632
 greater<>, 632
 greater_equal, 633
 greater_equal<>, 633
 less, 632
 less<>, 632
 less_equal, 633
 less_equal<>, 633
 locale, 826
 logical_and, 633
 logical_and<>, 633
 logical_not, 634
 logical_not<>, 634
 logical_or, 634
 logical_or<>, 634
 minus, 629
 minus<>, 630
 modulus, 630
 modulus<>, 631
 multiplies, 630
 multiplies<>, 630
 negate, 631
 negate<>, 631
 not_equal_to, 632
 not_equal_to<>, 632
 owner_less, 605
 packaged_task, 1383
 plus, 629
 plus<>, 629
 random_device, 1085
 reference_wrapper, 629
 span, 968
 operator*
 back_insert_iterator, 985
 complex, 1062
 duration, 692
 front_insert_iterator, 985
 insert_iterator, 986
 istream_iterator, 992
 istreambuf_iterator, 995
 move_iterator, 989
 optional, 545
 ostream_iterator, 993
 ostreambuf_iterator, 996
 regex_iterator, 1310
 regex_token_iterator, 1313
 reverse_iterator, 982
 shared_ptr, 597
 unique_ptr, 588
 valarray, 1114
 operator*=
 complex, 1061
 duration, 691
 gslice_array, 1120
 indirect_array, 1122
 mask_array, 1121
 slice_array, 1117
 valarray, 1112
 operator+
 basic_string, 800, 801
 complex, 1062
 day, 713
 duration, 691, 698
 month, 715
 move_iterator, 989, 990
 reverse_iterator, 982, 983
 time_point, 698
 valarray, 1112, 1114
 weekday, 719, 720
 year, 717
 year_month, 727
 year_month_day, 729, 730
 year_month_day_last, 732
 year_month_weekday, 734
 year_month_weekday_last, 736
 operator++
 atomic<integral>, 1336
 atomic<T*>, 1336

- atomic_ref<*integral*>, 1327
- atomic_ref<T*>, 1327
- back_insert_iterator, 985
- day, 712
- directory_iterator, 1258
- duration, 691
- front_insert_iterator, 986
- insert_iterator, 987
- istream_iterator, 992
- istreambuf_iterator, 995
- month, 714
- move_iterator, 989
- ostream_iterator, 993
- ostreambuf_iterator, 996
- recursive_directory_iterator, 1261
- regex_iterator, 1310
- regex_token_iterator, 1313
- reverse_iterator, 982
- time_point, 697
- weekday, 719
- year, 716
- operator+=
 - atomic<*floating-point*>, 1334
 - atomic<*integral*>, 1333
 - atomic<T*>, 1333–1335
 - atomic_ref<*floating-point*>, 1326
 - atomic_ref<*integral*>, 1325
 - atomic_ref<T*>, 1327
 - basic_string, 788, 789
 - complex, 1061
 - day, 712
 - duration, 691
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - month, 714
 - move_iterator, 989
 - path, 1241
 - reverse_iterator, 983
 - slice_array, 1117
 - time_point, 697
 - valarray, 1112
 - weekday, 719
 - year, 716
 - year_month, 726
 - year_month_day, 728, 729
 - year_month_day_last, 731
 - year_month_weekday, 733
 - year_month_weekday_last, 735
- operator-
 - complex, 1062
 - day, 713
 - duration, 691, 698
 - month, 715
 - move_iterator, 989, 990
 - reverse_iterator, 982, 983
 - time_point, 698
 - valarray, 1112, 1114
 - weekday, 720
 - year, 717
 - year_month, 727
 - year_month_day, 730
 - year_month_day_last, 732
 - year_month_weekday, 734
 - year_month_weekday_last, 736
- operator--
 - day, 712
 - month, 714
 - time_point, 697
 - weekday, 719
 - year, 716
- operator-=
 - atomic<*floating-point*>, 1334
 - atomic<*integral*>, 1333
 - atomic<T*>, 1333–1335
 - atomic_ref<*floating-point*>, 1326
 - atomic_ref<*integral*>, 1325
 - atomic_ref<T*>, 1327
 - complex, 1061
 - day, 712
 - duration, 691
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - month, 714
 - move_iterator, 989
 - reverse_iterator, 983
 - slice_array, 1117
 - time_point, 697
 - valarray, 1112
 - weekday, 719
 - year, 717
 - year_month, 726
 - year_month_day, 728, 729
 - year_month_day_last, 731
 - year_month_weekday, 733
 - year_month_weekday_last, 735
- operator->
 - istream_iterator, 992
 - move_iterator, 989
 - optional, 545
 - regex_iterator, 1310
 - regex_token_iterator, 1313
 - reverse_iterator, 982
 - shared_ptr, 597
 - unique_ptr, 588
- operator--
 - atomic<*integral*>, 1336
 - atomic<T*>, 1336
 - atomic_ref<*integral*>, 1327, 1328
 - atomic_ref<T*>, 1327, 1328
 - duration, 691
 - move_iterator, 989
 - reverse_iterator, 982
- operator/
 - calendar types, 736–739
 - complex, 1062
 - duration, 692

- path, 1248
- valarray, 1114
- operator/=
 - complex, 1061
 - duration, 691
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - path, 1240, 1241
 - slice_array, 1117
 - valarray, 1112
- operator<
 - basic_string, 802
 - basic_string_view, 814
 - day, 713
 - directory_entry, 1256
 - duration, 693
 - error_category, 511
 - error_code, 516
 - error_condition, 516
 - leap, 756, 757
 - link, 758
 - monostate, 559
 - month, 715
 - month_day, 723
 - month_day_last, 724
 - move_iterator, 990
 - optional, 546–548
 - pair, 525
 - partial_ordering, 484
 - path, 1247
 - queue, 959
 - reverse_iterator, 983
 - shared_ptr, 600, 601
 - span, 969
 - stack, 963
 - strong_ordering, 487
 - sub_match, 1296–1299
 - sys_time, 757
 - thread::id, 1343
 - time_point, 698
 - time_zone, 751
 - tuple, 536
 - type_index, 765
 - unique_ptr, 591, 592
 - valarray, 1115
 - variant, 558
 - weak_ordering, 485
 - year, 717
 - year_month, 726
 - year_month_day, 729
 - year_month_day_last, 732
- operator<<
 - basic_ostream, 1193–1195, 1197
 - basic_string, 803
 - basic_string_view, 815
 - bitset, 569, 570
 - byte, 453
 - complex, 1062
 - day, 713
 - duration, 695
 - error_code, 514
 - file_time, 707
 - gps_time, 705
 - local_info, 750
 - local_time, 708
 - month, 715
 - month_day, 723
 - month_day_last, 724
 - month_weekday, 724
 - month_weekday_last, 725
 - path, 1247
 - shared_ptr, 602
 - sub_match, 1299
 - sys_days, 700
 - sys_info, 749
 - sys_time, 700
 - tai_time, 703
 - thread::id, 1343
 - time_of_day<sub-second duration>, 744
 - time_of_day<hours>, 743
 - time_of_day<minutes>, 744
 - time_of_day<seconds>, 744
 - unique_ptr, 593
 - utc_time, 702
 - valarray, 1114
 - weekday, 720
 - weekday_indexed, 721
 - weekday_last, 722
 - year, 717
 - year_month, 727
 - year_month_day, 730
 - year_month_day_last, 732
 - year_month_weekday, 734
 - year_month_weekday_last, 736
 - zoned_time, 755
- operator<<=
 - bitset, 568
 - byte, 453
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - slice_array, 1117
 - valarray, 1112
- operator<=, 429, 1432
 - basic_string, 802
 - basic_string_view, 815
 - directory_entry, 1256
 - duration, 693
 - leap, 757
 - monostate, 559
 - move_iterator, 990
 - optional, 547, 548
 - pair, 525
 - partial_ordering, 484
 - path, 1247
 - queue, 959
 - reverse_iterator, 983

shared_ptr, 601
 span, 969
 stack, 963
 strong_ordering, 487
 sub_match, 1296–1299
 sys_time, 757
 thread::id, 1343
 time_point, 698
 tuple, 536
 type_index, 765
 unique_ptr, 592
 valarray, 1115
 variant, 558
 weak_ordering, 485
 operator<=>
 partial_ordering, 484
 strong_equality, 483
 strong_ordering, 487
 weak_equality, 482
 weak_ordering, 485, 486
 operator=
 allocator, 580
 any, 562
 atomic, 1329
 atomic<floating-point>, 1329
 atomic<integral>, 1329
 atomic<shared_ptr<T>>, 607
 atomic<T*>, 1329
 atomic<weak_ptr<T>>, 609
 atomic_ref, 1323
 atomic_ref<floating-point>, 1323
 atomic_ref<integral>, 1323
 atomic_ref<T*>, 1323
 back_insert_iterator, 984, 985
 bad_alloc, 471
 bad_cast, 474
 bad_exception, 477
 bad_typeid, 475
 basic_filebuf, 1213
 basic_fstream, 1222
 basic_ifstream, 1218
 basic_iostream, 1190
 basic_istream, 1181
 basic_istreamstream, 1207
 basic_ofstream, 1220
 basic_ostream, 1192
 basic_ostreamstream, 1208
 basic_osyncstream, 1227
 basic_regex, 1293
 basic_streambuf, 1174
 basic_string, 786
 basic_stringbuf, 1204
 basic_stringstream, 1210
 basic_syncbuf, 1224
 directory_iterator, 1258
 enable_shared_from_this, 606
 error_code, 513
 error_condition, 515
 exception, 477
 front_insert_iterator, 985
 function, 641
 future, 1376
 gslice_array, 1120
 indirect_array, 1122
 insert_iterator, 986
 locale, 826
 mask_array, 1121
 match_results, 1301
 memory_resource, 610
 move_iterator, 988
 optional, 541–543
 ostream_iterator, 993
 ostreambuf_iterator, 996
 packaged_task, 1382
 pair, 524, 525
 path, 1240
 promise, 1374
 recursive_directory_iterator, 1260
 reference_wrapper, 628
 reverse_iterator, 982
 shared_future, 1378, 1379
 shared_lock, 1361
 shared_ptr, 596, 597
 slice_array, 1117, 1118
 span, 967
 thread, 1344
 tuple, 531, 532
 unique_lock, 1357
 unique_ptr, 588, 590
 valarray, 1109, 1110
 variant, 553, 554
 weak_ptr, 604
 zoned_time, 754, 755
 operator==
 allocator, 581
 basic_string, 801
 basic_string_view, 814
 bitset, 569
 complex, 1062
 day, 713
 directory_entry, 1256
 duration, 693
 error_category, 511
 error_code, 515
 error_condition, 515
 function, 642
 istream_iterator, 992
 istreambuf_iterator, 995
 leap, 756, 757
 link, 758
 locale, 826
 match_results, 1304
 memory_resource, 611
 monostate, 559
 month, 715
 month_day, 722
 month_day_last, 724
 month_weekday, 724

month_weekday_last, 725
 move_iterator, 989
 optional, 546–548
 pair, 525
 partial_ordering, 484
 path, 1247
 polymorphic_allocator, 614
 queue, 958
 regex_iterator, 1309
 regex_token_iterator, 1311, 1313
 reverse_iterator, 983
 scoped_allocator_adaptor, 624
 shared_ptr, 600
 span, 968
 stack, 963
 strong_equality, 483
 strong_ordering, 487
 sub_match, 1296–1299
 sys_time, 756, 757
 thread::id, 1343
 time_point, 698
 time_zone, 751
 tuple, 535
 type_index, 765
 type_info, 474
 unique_ptr, 591, 592
 valarray, 1115
 variant, 558
 weak_equality, 482
 weak_ordering, 485
 weekday, 719
 weekday_indexed, 721
 weekday_last, 722
 year, 717
 year_month, 726
 year_month_day, 729
 year_month_day_last, 732
 year_month_weekday, 734
 year_month_weekday_last, 736
 zoned_time, 755
 operator>, 429, 1432
 basic_string, 802
 basic_string_view, 814
 directory_entry, 1256
 duration, 693
 leap, 757
 monostate, 559
 move_iterator, 990
 optional, 546–548
 pair, 525
 partial_ordering, 484
 path, 1247
 queue, 959
 reverse_iterator, 983
 shared_ptr, 601
 span, 969
 stack, 963
 strong_ordering, 487
 sub_match, 1296–1299
 sys_time, 757
 thread::id, 1343
 time_point, 698
 tuple, 536
 type_index, 765
 unique_ptr, 592
 valarray, 1115
 variant, 558
 weak_ordering, 485
 operator>=, 429, 1432
 basic_string, 803
 basic_string_view, 815
 directory_entry, 1257
 duration, 693
 leap, 757
 monostate, 559
 move_iterator, 990
 optional, 547, 548
 pair, 525
 partial_ordering, 484
 path, 1248
 queue, 959
 reverse_iterator, 983
 shared_ptr, 601
 span, 969
 stack, 963
 strong_ordering, 487
 sub_match, 1296–1299
 sys_time, 757
 thread::id, 1343
 time_point, 698
 tuple, 536
 type_index, 765
 unique_ptr, 592
 valarray, 1115
 variant, 558
 weak_ordering, 485
 operator>>
 basic_istream, 1182–1184, 1189
 basic_string, 803
 bitset, 569, 570
 byte, 453
 complex, 1062
 path, 1247
 valarray, 1114
 operator>>=
 bitset, 568
 byte, 453
 gslice_array, 1120
 indirect_array, 1122
 mask_array, 1121
 slice_array, 1117
 valarray, 1112
 operator[]
 basic_string, 788
 basic_string_view, 810
 bitset, 569
 indirect_array, 1122
 map, 925

- mask_array, 1121
- match_results, 1302
- move_iterator, 989
- reverse_iterator, 982
- shared_ptr, 597
- span, 968
- unique_ptr, 591
- unordered_map, 942
- valarray, 1110–1112
- weekday, 719
- operator%
 - duration, 692, 693
 - valarray, 1114
- operator%=
 - duration, 691
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - slice_array, 1117
 - valarray, 1112
- operator&
 - bitset, 570
 - byte, 454
 - valarray, 1114
- operator&=
 - atomic<integral>, 1333
 - atomic_ref<integral>, 1325
 - bitset, 567
 - byte, 454
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - slice_array, 1117
 - valarray, 1112
- operator&&
 - valarray, 1115
- operator^
 - bitset, 570
 - byte, 454
 - valarray, 1114
- operator^=
 - atomic<integral>, 1333
 - atomic_ref<integral>, 1325
 - bitset, 567
 - byte, 454
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - slice_array, 1117
 - valarray, 1112
- operator~
 - bitset, 568
 - byte, 454
 - valarray, 1112
- operator|
 - bitset, 570
 - byte, 454
 - valarray, 1114
- operator|=
 - atomic<integral>, 1333
 - atomic_ref<integral>, 1325
 - bitset, 567
 - byte, 453
 - gslice_array, 1120
 - indirect_array, 1122
 - mask_array, 1121
 - slice_array, 1117
 - valarray, 1112
- operator||
 - valarray, 1115
- optional, 538
 - constructor, 539, 540
 - destructor, 541
 - emplace, 544
 - has_value, 545
 - operator bool, 545
 - operator!=, 546–548
 - operator*, 545
 - operator->, 545
 - operator<, 546–548
 - operator<=, 547, 548
 - operator=, 541–543
 - operator==, 546–548
 - operator>, 546–548
 - operator>=, 547, 548
 - reset, 546
 - swap, 544
 - value, 545
 - value_or, 545
 - value_type, 538
- options
 - recursive_directory_iterator, 1260
 - synchronized_pool_resource, 617
 - unsynchronized_pool_resource, 617
- ostream, 1151, 1179
- ostream_iterator, 992
 - constructor, 993
 - destructor, 993
 - operator*, 993
 - operator++, 993
 - operator=, 993
- ostreambuf_iterator, 995
 - constructor, 996
 - failed, 996
 - operator*, 996
 - operator++, 996
 - operator=, 996
- ostringstream, 1151, 1201
- ostrstream, 1438
 - constructor, 1438
 - freeze, 1439
 - pcount, 1439
 - rdbuf, 1439
 - str, 1439
- osyncstream, 1151, 1223
- out
 - codecvt, 834
- out_of_range, 503, 505, 566–569, 779

- constructor, 505
- outer_allocator
 - scoped_allocator_adaptor, 622
- outer_allocator_type
 - scoped_allocator_adaptor, 620
- output_iterator_tag, 979
- overflow
 - basic_filebuf, 1215
 - basic_streambuf, 1177
 - basic_stringbuf, 1205
 - strstreambuf, 1435
- overflow_error, 503, 506, 566, 568
 - constructor, 506
- owner_before
 - shared_ptr, 598
 - weak_ptr, 604
- owner_less, 604
 - operator(), 605
- owns_lock
 - shared_lock, 1362
 - unique_lock, 1359

- P
 - bernoulli_distribution, 1089
 - binomial_distribution, 1090
 - geometric_distribution, 1091
 - negative_binomial_distribution, 1092
- packaged_task, 1381
 - constructor, 1382
 - destructor, 1382
 - get_future, 1382
 - make_ready_at_thread_exit, 1383
 - operator(), 1383
 - operator=, 1382
 - reset, 1383
 - swap, 1382, 1383
 - valid, 1382
- pair, 523, 531, 532
 - constructor, 523, 524
 - get, 526
 - operator!=, 525
 - operator<, 525
 - operator<=, 525
 - operator=, 524, 525
 - operator==, 525
 - operator>, 525
 - operator>=, 525
 - swap, 525
- par, 767
- par_unseq, 767
- param
 - seed_seq, 1086
- parent_path
 - path, 1244
- parse, 761–763
- partial_order, 488
- partial_ordering, 483
 - equivalent, 483
 - greater, 483
 - less, 483
- operator weak_equality, 484
- operator!=, 484
- operator<, 484
- operator<=, 484
- operator<=>, 484
- operator==, 484
- operator>, 484
- operator>=, 484
- unordered, 483
- partial_sort, 1037
- partial_sort_copy, 1038
- partial_sum, 1129
- partition, 1042
- partition_copy, 1042
- partition_point, 1043
- path, 1233
 - append, 1241
 - assign, 1240
 - begin, 1246
 - c_str, 1242
 - clear, 1241
 - compare, 1243, 1244
 - concat, 1241
 - constructor, 1239
 - directory_entry, 1255
 - empty, 1245
 - end, 1247
 - extension, 1244
 - filename, 1244
 - generic_string, 1243
 - generic_u16string, 1243
 - generic_u32string, 1243
 - generic_u8string, 1243
 - generic_wstring, 1243
 - has_extension, 1245
 - has_filename, 1245
 - has_parent_path, 1245
 - has_relative_path, 1245
 - has_root_directory, 1245
 - has_root_name, 1245
 - has_root_path, 1245
 - has_stem, 1245
 - is_absolute, 1245
 - is_relative, 1245
 - iterator, 1246
 - lexically_normal, 1245
 - lexically_proximate, 1246
 - lexically_relative, 1246
 - make_preferred, 1241
 - native, 1242
 - operator string_type, 1242
 - operator!=, 1247
 - operator+=, 1241
 - operator/, 1248
 - operator/=, 1240, 1241
 - operator<, 1247
 - operator<<, 1247
 - operator<=, 1247

- operator=, 1240
- operator==, 1247
- operator>, 1247
- operator>=, 1248
- operator>>, 1247
- parent_path, 1244
- preferred_separator, 1236
- relative_path, 1244
- remove_filename, 1242
- replace_extension, 1242
- replace_filename, 1242
- root_directory, 1244
- root_name, 1244
- root_path, 1244
- stem, 1244
- string, 1243
- swap, 1242
- u16string, 1243
- u32string, 1243
- u8string, 1243
- value_type, 1236
- wstring, 1243
- path1
 - filesystem_error, 1249
- path2
 - filesystem_error, 1249
- pbackfail
 - basic_filebuf, 1215
 - basic_streambuf, 1177
 - basic_stringbuf, 1204
 - strstreambuf, 1436
- pbase
 - basic_streambuf, 1175
- pbump
 - basic_streambuf, 1175
- pcount
 - ostrstream, 1439
 - strstream, 1440
 - strstreambuf, 1435
- peek
 - basic_istream, 1187
- perm_options, 1251
- permissions, 1269
 - file_status, 1252
- perms, 1251
- perrow, 1273
- piecewise_constant_distribution, 1101
 - constructor, 1102
 - densities, 1102
 - intervals, 1102
- piecewise_construct, 526
- piecewise_construct_t, 526
- piecewise_linear_distribution, 1102, 1103
 - constructor, 1103, 1104
 - densities, 1104
 - intervals, 1104
- placeholders, 638
- plus, 629
 - operator(), 629
- plus<>, 629
 - operator(), 629
- pointer
 - allocator_traits, 579
 - basic_string, 779
 - basic_string_view, 807
 - iterator_traits, 978
 - scoped_allocator_adaptor, 620
- pointer_to
 - pointer_traits, 576
- pointer_to_binary_function
 - zombie, 443
- pointer_to_unary_function
 - zombie, 443
- pointer_traits, 575
 - difference_type, 576
 - element_type, 576
 - pointer_to, 576
 - rebind, 576
 - to_address, 576
- poisson_distribution, 1092
 - constructor, 1092
 - mean, 1092
- polar
 - complex, 1063
- polymorphic_allocator, 611
 - allocate, 613
 - construct, 613, 614
 - constructor, 612
 - deallocate, 613
 - destroy, 614
 - operator!=, 614
 - operator==, 614
 - resource, 614
 - select_on_container_copy_construction, 614
 - value_type, 611
- pool_options, 615
 - largest_required_pool_block, 617
 - max_blocks_per_chunk, 616
- pop
 - forward_list, 904
 - priority_queue, 961
 - recursive_directory_iterator, 1261
- pop_back
 - basic_string, 793
- pop_heap, 1048
- pos_type
 - char_traits, 772
- position
 - match_results, 1302
- positive_sign
 - moneypunct, 856
- pow, 1065, 1135
 - complex, 1064
 - valarray, 1116
- powf, 1135
- powl, 1135
- pptr

- basic_streambuf, 1175
- precision
 - ios_base, 828, 1160
- Predicate, 501
- preferred_separator
 - path, 1236
- prefix
 - match_results, 1302
- prev, 980
- prev_permutation, 1053
- PRIdFASTN, 1275
- PRIdLEASTN, 1275
- PRIdMAX, 1275
- PRIdN, 1275
- PRIdPTR, 1275
- PRiFASTN, 1275
- PRiLEASTN, 1275
- PRiMAX, 1275
- PRiN, 1275
- PRiPTR, 1275
- printf, 1273
- PRioFASTN, 1275
- PRioLEASTN, 1275
- PRioMAX, 1275
- PRioN, 1275
- PRioPTR, 1275
- priority_queue, 959
 - constructor, 960, 961
 - emplace, 961
 - swap, 961
- PRiUFASTN, 1275
- PRiULEASTN, 1275
- PRiUMAX, 1275
- PRiUN, 1275
- PRiUPTR, 1275
- PRiXFASTN, 1275
- PRiXFASTN, 1275
- PRiXLEASTN, 1275
- PRiXLEASTN, 1275
- PRiXMAX, 1275
- PRiXMAX, 1275
- PRiXN, 1275
- PRiXN, 1275
- PRiXPTR, 1275
- PRiXPTR, 1275
- probabilities
 - discrete_distribution, 1101
- proj
 - complex, 1063
- promise, 1373
 - constructor, 1374
 - destructor, 1374
 - get_future, 1374
 - operator=, 1374
 - set_exception, 1374
 - set_exception_at_thread_exit, 1375
 - set_value, 1374
 - set_value_at_thread_exit, 1375
 - swap, 1374, 1375
- propagate_on_container_copy_assignment
 - allocator_traits, 579
 - scoped_allocator_adaptor, 621
- propagate_on_container_move_assignment
 - allocator, 580
 - allocator_traits, 579
 - scoped_allocator_adaptor, 621
- propagate_on_container_swap
 - allocator_traits, 580
 - scoped_allocator_adaptor, 621
- proximate, 1270
- proxy
 - istreambuf_iterator, 994
- ptr
 - from_chars_result, 767
 - to_chars_result, 767
- ptr_fun
 - zombie, 443
- ptrdiff_t, 450
- pubimbue
 - basic_streambuf, 1173
- pubseekoff
 - basic_streambuf, 1173
- pubseekpos
 - basic_streambuf, 1173
- pubsetbuf
 - basic_streambuf, 1173
- pubsync
 - basic_streambuf, 1173
- push
 - priority_queue, 961
- push_back
 - basic_string, 790
 - deque, 900
- push_front
 - deque, 900
 - forward_list, 904
- push_heap, 1047
- put
 - basic_ostream, 1196
 - money_put, 854
 - num_put, 841
 - time_put, 851
- put_money, 1199
- put_time, 1200
- putback
 - basic_istream, 1187
- putc, 1273
- putchar, 1273
- putenv, 489
- puts, 1273
- putwc, 817
- putwchar, 817
- pword
 - ios_base, 1162
- qsort, 451, 1053
- queue, 957
 - swap, 959

quick_exit, 431, 451, 466
 quiet_NaN
 numeric_limits, 460
 quoted, 1200, 1201

 radix
 numeric_limits, 459
 raise, 489
 rand, 451, 1104
 discouraged, 1104
 RAND_MAX, 451
 random_access_iterator_tag, 979
 random_device, 1084
 constructor, 1084
 entropy, 1085
 operator(), 1085
 random_shuffle
 zombie, 443
 range_error, 503, 505
 constructor, 505, 506
 rank, 660
 ranlux24, 1084
 ranlux24_base, 1084
 ranlux48, 1084
 ranlux48_base, 1084
 ratio, 669, 670
 ratio_equal, 671
 ratio_greater, 671
 ratio_greater_equal, 671
 ratio_less, 671
 ratio_less_equal, 671
 ratio_not_equal, 671
 raw_storage_iterator
 zombie, 443
 rbegin
 basic_string, 787
 basic_string_view, 810
 span, 968
 rbegin(C&), 996
 rbegin(initializer_list<E>), 997
 rbegin(T (&array)[N]), 997
 rdbuf
 basic_fstream, 1222
 basic_ifstream, 1218
 basic_ios, 1165
 basic_istream, 1207
 basic_ofstream, 1220
 basic_ostringstream, 1209
 basic_stringstream, 1210
 istream, 1438
 ostream, 1439
 stringstream, 1440
 wbuffer_convert, 1447
 rdstate
 basic_ios, 1167
 read
 basic_istream, 1187
 read_symlink, 1270
 readsome
 basic_istream, 1187
 ready
 match_results, 1302
 real, 1064
 complex, 1061, 1063
 realloc, 451, 583, 1429
 rebind
 pointer_traits, 576
 rebind_alloc
 allocator_traits, 580
 recursion_pending
 recursive_directory_iterator, 1261
 recursive_directory_iterator, 1259
 constructor, 1259, 1260
 depth, 1260
 disable_recursion_pending, 1261
 increment, 1261
 operator++, 1261
 operator=, 1260
 options, 1260
 pop, 1261
 recursion_pending, 1261
 recursive_mutex, 1348
 recursive_timed_mutex, 1350
 reduce, 1127
 ref
 reference_wrapper, 629
 reference
 basic_string, 779
 basic_string_view, 807
 iterator_traits, 978
 reference_wrapper, 628
 constructor, 628
 cref, 629
 get, 629
 operator T&, 629
 operator(), 629
 operator=, 628
 ref, 629
 refresh
 directory_entry, 1255
 regex, 1279
 regex_constants, 1285
 error_type, 1287, 1288
 match_flag_type, 1285
 syntax_option_type, 1285
 regex_error, 1288, 1290, 1314, 1315
 constructor, 1288
 regex_iterator, 1308
 constructor, 1309
 increment, 1310
 operator!=, 1309
 operator*, 1310
 operator++, 1310
 operator->, 1310
 operator==, 1309
 regex_match, 1304, 1305
 regex_replace, 1307, 1308
 regex_search, 1306, 1307

- regex_token_iterator, 1310
 - constructor, 1312
 - end-of-sequence, 1311
 - operator!=, 1313
 - operator*, 1313
 - operator++, 1313
 - operator->, 1313
 - operator==, 1311, 1313
- regex_traits, 1288
 - char_class_type, 1288
 - isctype, 1289
 - length, 1289
 - lookup_classname, 1289
 - lookup_collatename, 1289
 - transform, 1289
 - transform_primary, 1289
 - translate, 1289
 - translate_nocase, 1289
 - value, 1290
- register_callback
 - ios_base, 1162
- Regular, 500
- regular expression traits
 - isctype, 1314
 - lookup_classname, 1314
 - lookup_collatename, 1314
 - transform_primary, 1314
- RegularInvocable, 501
- rehash
 - unordered associative containers, 891
- reinterpret_pointer_cast
 - shared_ptr, 602
- rel_ops, 518
- Relation, 501, 502
- relative, 1270
- relative_path
 - path, 1244
- relaxed
 - memory_order, 1320
- release
 - memory_order, 1320
 - monotonic_buffer_resource, 619
 - shared_lock, 1362
 - synchronized_pool_resource, 617
 - unique_lock, 1359
 - unique_ptr, 589
 - unsynchronized_pool_resource, 617
- reload_tzdb, 747
- remainder, 1135
- remainderf, 1135
- remainderl, 1135
- remote_version, 747
- remove, 1031, 1273
 - forward_list, 906
 - list, 912
 - path, 1270
- remove_all, 1271
- remove_all_extents, 664
- remove_const, 663
- remove_copy, 1032
- remove_copy_if, 1032
- remove_cv, 663
- remove_cvref, 665
- remove_extent, 664
- remove_filename
 - path, 1242
- remove_if, 1031
 - forward_list, 906
- remove_pointer, 664
- remove_prefix
 - basic_string_view, 811
- remove_reference, 663
- remove_suffix
 - basic_string_view, 811
- remove_volatile, 663
- remquo, 1135
- remquof, 1135
- remquol, 1135
- rename, 1271, 1273
- rend
 - basic_string, 787
 - basic_string_view, 810
 - span, 968
- rend(C&), 997
- rend(initializer_list<E>), 997
- rend(T (&array)[N]), 997
- rep
 - system_clock, 700
- replace, 1030
 - basic_string, 793–795
- replace_copy, 1030
- replace_copy_if, 1030
- replace_extension
 - path, 1242
- replace_filename
 - directory_entry, 1254
 - path, 1242
- replace_if, 1030
- required_alignment
 - atomic_ref, 1323
 - atomic_ref<floating-point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- reserve
 - basic_string, 787, 1443
 - unordered associative containers, 891
 - vector, 915
- reset
 - any, 563
 - bitset, 568
 - optional, 546
 - packaged_task, 1383
 - shared_ptr, 597
 - unique_ptr, 589, 591
 - weak_ptr, 604
- resetiosflags, 1197
- resize
 - basic_string, 787

- deque, 900
- forward_list, 905
- list, 910
- valarray, 1114
- vector, 916
- resize_file, 1271
- resource
 - polymorphic_allocator, 614
- result
 - local_info, 749
- result_of
 - zombie, 443
- result_of_t
 - zombie, 443
- rethrow_exception, 478
- rethrow_if_nested
 - nested_exception, 479
- rethrow_nested
 - nested_exception, 479
- return_temporary_buffer
 - zombie, 443
- reverse, 1033
 - forward_list, 907
 - list, 912
- reverse_copy, 1034
- reverse_iterator, 980
 - base, 982
 - basic_string, 779
 - basic_string_view, 807
 - constructor, 981, 982
 - make_reverse_iterator non-member
 - function, 984
 - operator!=, 983
 - operator*, 982
 - operator+, 982, 983
 - operator++, 982
 - operator+=", 983
 - operator-, 982, 983
 - operator-=, 983
 - operator->, 982
 - operator--., 982
 - operator<, 983
 - operator<=, 983
 - operator=, 982
 - operator==, 983
 - operator>, 983
 - operator>=, 983
 - operator[], 982
- rewind, 1273
- rfind
 - basic_string, 796
 - basic_string_view, 813
- riemann_zeta, 1148
- riemann_zetaf, 1148
- riemann_zetal, 1148
- right, 1169
- rint, 1135
- rintf, 1135
- rintl, 1135

- root_directory
 - path, 1244
- root_name
 - path, 1244
- root_path
 - path, 1244
- rotate, 1034
- rotate_copy, 1034
- round, 1135
 - duration, 694
 - time_point, 699
- round_error
 - numeric_limits, 459
- round_indeterminate, 457
- round_style
 - numeric_limits, 461
- round_to_nearest, 457
- round_toward_infinity, 457
- round_toward_neg_infinity, 457
- round_toward_zero, 457
- roundf, 1135
- roundl, 1135
- runtime_error, 503, 505
 - constructor, 505

- s
 - lognormal_distribution, 1097
- Same, 494
- sample, 1034
- save
 - sys_info, 749
- sbumpc
 - basic_streambuf, 1174
- scalbln, 1135
- scalblnf, 1135
- scalblnl, 1135
- scalbn, 1135
- scalbnf, 1135
- scalbnl, 1135
- scan_is
 - ctype, 829
 - ctype<char>, 832
- scan_not
 - ctype, 829
 - ctype<char>, 832
- scanf, 1273
- SCHAR_MAX, 463
- SCHAR_MIN, 463
- scientific, 1169
- scientific
 - chars_format, 767
- SCNdFASTN, 1275
- SCNdLEASTN, 1275
- SCNdMAX, 1275
- SCNdN, 1275
- SCNdPTR, 1275
- SCNiFASTN, 1275
- SCNiLEASTN, 1275
- SCNiMAX, 1275

SCNiN, 1275
 SCNiPTR, 1275
 SCNoFASTN, 1275
 SCNoLEASTN, 1275
 SCNoMAX, 1275
 SCNoN, 1275
 SCNoPTR, 1275
 SCNuFASTN, 1275
 SCNuLEASTN, 1275
 SCNuMAX, 1275
 SCNuN, 1275
 SCNuPTR, 1275
 SCNxFASTN, 1275
 SCNxLEASTN, 1275
 SCNxMAX, 1275
 SCNxN, 1275
 SCNxPTR, 1275
 scoped_allocator_adaptor, 620
 allocate, 622
 const_pointer, 620
 const_void_pointer, 620
 construct, 622–624
 constructor, 621, 622
 deallocate, 622
 destroy, 624
 difference_type, 620
 inner_allocator, 622
 inner_allocator_type, 621
 is_always_equal, 621
 max_size, 622
 operator!=, 624
 operator==, 624
 outer_allocator, 622
 outer_allocator_type, 620
 pointer, 620
 propagate_on_container_copy_–
 assignment, 621
 propagate_on_container_move_–
 assignment, 621
 propagate_on_container_swap, 621
 select_on_container_copy_construction, 624
 size_type, 620
 value_type, 620
 void_pointer, 620
 scoped_lock, 1355
 constructor, 1355
 destructor, 1355
 search, 1025, 1026
 search_n, 1026
 second
 local_info, 749
 second_argument_type
 zombie, 443
 seconds, 672
 time_of_day<sub-second duration>, 743
 time_of_day<seconds>, 742
 seed_seq, 1085
 constructor, 1085, 1086
 generate, 1086
 param, 1086
 size, 1086
 SEEK_CUR, 1273
 seek_dir
 zombie, 443
 SEEK_END, 1273
 SEEK_SET, 1273
 seekdir
 ios_base, 1158
 seekg
 basic_istream, 1188
 seekoff
 basic_filebuf, 1215
 basic_streambuf, 1175
 basic_stringbuf, 1205
 strstreambuf, 1436
 seekp
 basic_ostream, 1193
 seekpos
 basic_filebuf, 1216
 basic_streambuf, 1175
 basic_stringbuf, 1206
 strstreambuf, 1437
 select_on_container_copy_construction
 allocator_traits, 580
 polymorphic_allocator, 614
 scoped_allocator_adaptor, 624
 Semiregular, 500
 sentry
 basic_istream, 1181
 basic_ostream, 1192
 constructor, 1182
 destructor, 1182
 seq, 767
 seq_cst
 memory_order, 1320
 set, 930
 constructor, 933
 contains, 880
 operator<, 933
 operator==, 933
 set (member)
 bitset, 568
 set_default_resource, 615
 set_difference, 1046
 set_emit_on_sync
 basic_osyncstream, 1227
 basic_syncbuf, 1225
 set_exception
 promise, 1374
 set_exception_at_thread_exit
 promise, 1375
 set_intersection, 1045
 set_new_handler, 445, 472
 set_rdbuf
 basic_ios, 1167

set_symmetric_difference, 1047
 set_terminate, 445, 477
 set_unexpected
 zombie, 443
 set_union, 1045
 set_value
 promise, 1374
 set_value_at_thread_exit
 promise, 1375
 setbase, 1198
 setbuf, 1273
 basic_filebuf, 1215
 basic_streambuf, 1175, 1206
 strstreambuf, 1437
 setenv, 489
 setf
 ios_base, 1160
 setfill, 1198
 setg
 basic_streambuf, 1175
 setiosflags, 1198
 setjmp, 443, 489
 setlocale, 428, 858
 setp
 basic_streambuf, 1175
 setprecision, 1198
 setstate
 basic_ios, 1167
 setvbuf, 1273
 setw, 1198
 sgetc
 basic_streambuf, 1174
 sgetn
 basic_streambuf, 1174
 share
 future, 1376
 shared_from_this
 enable_shared_from_this, 606
 shared_future, 1377
 constructor, 1378
 destructor, 1378
 get, 1379
 operator=, 1378, 1379
 valid, 1379
 wait, 1379
 wait_for, 1379
 wait_until, 1379
 shared_lock, 1359
 constructor, 1360, 1361
 destructor, 1361
 lock, 1361
 mutex, 1362
 operator bool, 1362
 operator=, 1361
 owns_lock, 1362
 release, 1362
 swap, 1362
 try_lock, 1361
 try_lock_for, 1362
 try_lock_until, 1361
 unlock, 1362
 shared_mutex, 1352
 shared_ptr, 593, 606, 1441
 atomic_compare_exchange_strong, 1442
 atomic_compare_exchange_strong_implicit, 1442
 atomic_compare_exchange_weak, 1442
 atomic_compare_exchange_weak_explicit, 1442
 atomic_exchange, 1442
 atomic_exchange_explicit, 1442
 atomic_is_lock_free, 1441
 atomic_load, 1441
 atomic_load_explicit, 1441
 atomic_store, 1442
 atomic_store_explicit, 1442
 const_pointer_cast, 602
 constructor, 595, 596
 destructor, 596
 dynamic_pointer_cast, 601
 get, 597
 get_deleter, 602
 operator bool, 598
 operator!=, 600
 operator*, 597
 operator->, 597
 operator<, 600, 601
 operator<<, 602
 operator<=, 601
 operator=, 596, 597
 operator==, 600
 operator>, 601
 operator>=, 601
 operator[], 597
 owner_before, 598
 reinterpret_pointer_cast, 602
 reset, 597
 static_pointer_cast, 601
 swap, 597, 601
 use_count, 597
 shared_timed_mutex, 1353
 shift
 valarray, 1113
 shift_left, 1035
 shift_right, 1036
 showbase, 1168
 showmanyc
 basic_filebuf, 1214
 basic_streambuf, 1176, 1214
 showpoint, 1168
 showpos, 1168
 shrink_to_fit
 basic_string, 788
 deque, 900
 vector, 915
 SHRT_MAX, 463
 SHRT_MIN, 463

shuffle, 1035
 shuffle_order_engine, 1082
 constructor, 1083
 sig_atomic_t, 489
 SIG_DFL, 489
 SIG_ERR, 489
 SIG_IGN, 489
 SIGABRT, 489
 SIGFPE, 489
 SIGILL, 489
 SIGINT, 489
 signal, 489
 signaling_NaN
 numeric_limits, 460
 signbit, 1135
 SignedIntegral, 495
 SIGSEGV, 489
 SIGTERM, 489
 sin, 1135
 complex, 1064
 valarray, 1116
 sinf, 1135
 sinh, 1135
 complex, 1064
 valarray, 1116
 sinhf, 1135
 sinhl, 1135
 sinl, 1135
 size
 array, 896, 897
 basic_string, 787
 basic_string_view, 810
 bitset, 569
 gslice, 1119
 initializer_list, 480
 match_results, 1302
 seed_seq, 1086
 slice, 1117
 span, 968
 valarray, 1113
 size(C& c), 997
 size(T (&array)[N]), 997
 size_bytes
 span, 968
 size_t, 111, 450, 451, 764, 816–818, 1273
 size_type
 allocator, 580
 allocator_traits, 579
 basic_string, 779
 basic_string_view, 807
 scoped_allocator_adaptor, 620
 skipws, 1168
 sleep_for
 this_thread, 1346
 sleep_until
 this_thread, 1346
 slice, 1116
 constructor, 1116
 size, 1117
 start, 1117
 stride, 1117
 slice_array, 1117
 operator*=: 1117
 operator+=: 1117
 operator-=: 1117
 operator/=: 1117
 operator<<=: 1117
 operator=: 1118
 operator>>=: 1117
 operator%=: 1117
 operator&=: 1117
 operator^=: 1117
 operator|=: 1117
 value_type, 1117
 snnextc
 basic_streambuf, 1173
 snprintf, 1273
 sort, 1037
 forward_list, 907
 list, 912
 sort_heap, 1048
 space, 1271
 span, 964
 begin, 968
 cbegin, 968
 cend, 968
 constructor, 966, 967
 crbegin, 968
 crend, 968
 data, 968
 empty, 968
 end, 968
 first, 967
 last, 967
 rbegin, 968
 rend, 968
 size, 968
 size_bytes, 968
 subspan, 967
 sph_bessel, 1148
 sph_besself, 1148
 sph_bessell, 1148
 sph_legendre, 1149
 sph_legendref, 1149
 sph_legendrel, 1149
 sph_neumann, 1149
 sph_neumannf, 1149
 sph_neumannl, 1149
 splice
 list, 911
 splice_after
 forward_list, 905, 906
 sprintf, 1273
 sputbackc
 basic_streambuf, 1174
 sputc
 basic_streambuf, 1174
 sputn

- basic_streambuf, 1174
- sqrt, 1135
 - complex, 1064
 - valarray, 1116
- sqrtf, 1135
- sqrtl, 1135
- rand, 451, 1104
- sscanf, 1273
- stable_partition, 1042
- stable_sort, 1037
- stack, 962
 - constructor, 962, 963
 - swap, 963
- start
 - gslice, 1119
 - slice, 1117
- starts_with
 - basic_string, 800
 - basic_string_view, 812
- state
 - fpos, 1163
 - wbuffer_convert, 1447
 - wstring_convert, 1446
- state_type
 - char_traits, 772
 - wbuffer_convert, 1447
 - wstring_convert, 1446
- static_pointer_cast
 - shared_ptr, 601
- status, 1271, 1272
 - directory_entry, 1256
- status_known, 1273
- stddev
 - normal_distribution, 1096
- stderr, 1273
- stdin, 1273
- stdout, 1273
- steady_clock, 707
- stem
 - path, 1244
- stod, 804, 805
- stof, 804, 805
- stoi, 804, 805
- stol, 804, 805
- stold, 804, 805
- stoll, 804, 805
- store
 - atomic, 1329
 - atomic<floating-point>, 1329
 - atomic<integral>, 1329
 - atomic<shared_ptr<T>>, 607
 - atomic<T*>, 1329
 - atomic<weak_ptr<T>>, 609
 - atomic_ref, 1323
 - atomic_ref<floating-point>, 1323
 - atomic_ref<integral>, 1323
 - atomic_ref<T*>, 1323
- stoss
 - zombie, 443
- stoul, 804, 805
- stoull, 804, 805
- str
 - basic_istream, 1207
 - basic_ostringstream, 1209
 - basic_stringbuf, 1204
 - basic_stringstream, 1210
 - istream, 1438
 - match_results, 1302
 - ostream, 1439
 - stringstream, 1440
 - stringstreambuf, 1435
 - sub_match, 1295
- strcat, 816
- strchr, 816
- strcmp, 816
- strcoll, 816
- strcpy, 816
- strcspn, 816
- streambuf, 1151, 1170
- streamoff, 1156, 1163
- streamsize, 1156
- strerror, 816
- strftime, 764, 851
- StrictTotallyOrdered, 500
- stride
 - gslice, 1119
 - slice, 1117
- string
 - operator"s, 806
 - path, 1243
- string_view
 - operator"sv, 815
- stringbuf, 1151, 1201
- stringstream, 1151, 1201
- strlen, 816, 1434, 1438
- strncat, 816
- strncmp, 816
- strncpy, 816
- strong_equal, 488
- strong_equality, 482
 - equal, 482
 - equivalent, 482
 - nonequal, 482
 - nonequivalent, 482
 - operator weak_equality, 483
 - operator!=, 483
 - operator<=>, 483
 - operator==, 483
- strong_order, 487
- strong_ordering, 486
 - equal, 486
 - equivalent, 486
 - greater, 486
 - less, 486
 - operator partial_ordering, 486
 - operator strong_equality, 486
 - operator weak_equality, 486
 - operator weak_ordering, 487

- operator!=, 487
- operator<, 487
- operator<=, 487
- operator<=>, 487
- operator==, 487
- operator>, 487
- operator>=, 487
- strpbrk, 816
- strrchr, 816
- strspn, 816
- strstr, 816
- strstream, 1439
 - constructor, 1439
 - destructor, 1439, 1440
 - freeze, 1440
 - pcount, 1440
 - rdbuf, 1440
 - str, 1440
- strstreambuf, 1432
 - constructor, 1434, 1435
 - destructor, 1435
 - freeze, 1435
 - overflow, 1435
 - pbackfail, 1436
 - pcount, 1435
 - seekoff, 1436
 - seekpos, 1437
 - setbuf, 1437
 - str, 1435
 - underflow, 1436
- strtod, 451
- strtou, 451
- strtoimax, 1275
- strtok, 816
- strtol, 451
- strtold, 451
- strtoll, 451
- strtoul, 451
- strtoull, 451
- strtoumax, 1275
- strxfrm, 816
- student_t_distribution, 1099
 - constructor, 1100
 - mean, 1100
- sub_match, 1295
 - compare, 1295
 - constructor, 1295
 - length, 1295
 - operator basic_string, 1295
 - operator!=, 1296–1299
 - operator<, 1296–1299
 - operator<<, 1299
 - operator<=, 1296–1299
 - operator==, 1296–1299
 - operator>, 1296–1299
 - operator>=, 1296–1299
 - str, 1295
- subseconds
 - time_of_day<sub-second duration>, 743
- subspan
 - span, 967
- substr
 - basic_string, 799
 - basic_string_view, 811
- subtract_with_carry_engine, 1079
 - constructor, 1080
- suffix
 - match_results, 1302
- sum
 - valarray, 1113
- sungetc
 - basic_streambuf, 1174
- swap, 520, 536
 - any, 563
 - array, 897
 - basic_filebuf, 1213
 - basic_fstream, 1222
 - basic_ifstream, 1218
 - basic_ios, 1167
 - basic_iostream, 1190
 - basic_istream, 1181
 - basic_istreamstream, 1207
 - basic_ofstream, 1220
 - basic_ostream, 1192
 - basic_ostreamstream, 1209
 - basic_regex, 1294, 1295
 - basic_streambuf, 1174
 - basic_string, 795, 803
 - basic_string_view, 811
 - basic_stringbuf, 1204
 - basic_stringstream, 1210
 - basic_syncbuf, 1225
 - function, 642
 - match_results, 1303, 1304
 - optional, 544, 548
 - packaged_task, 1382, 1383
 - pair, 525
 - path, 1242, 1247
 - priority_queue, 961
 - promise, 1374, 1375
 - queue, 959
 - shared_lock, 1362
 - shared_ptr, 597, 601
 - stack, 963
 - thread, 1344, 1345
 - tuple, 532
 - unique_lock, 1359
 - unique_ptr, 589
 - valarray, 1113, 1116
 - variant, 556, 559
 - vector, 916
 - vector<bool>, 919
 - weak_ptr, 604
- swap(unique_ptr&, unique_ptr&), 591
- swap_ranges, 1028
- Swappable, 496
- SwappableWith, 496
- swprintf, 817

swscanf, 817
 symlink_status, 1273
 directory_entry, 1256
 sync
 basic_filebuf, 1216
 basic_istream, 1188
 basic_streambuf, 1176
 basic_syncbuf, 1225
 sync_with_stdio
 ios_base, 1161
 syncbuf, 1151, 1223
 synchronized_pool_resource, 615
 constructor, 617
 destructor, 617
 do_allocate, 617
 do_deallocate, 617
 do_is_equal, 617
 options, 617
 release, 617
 upstream_resource, 617
 syntax_option_type, 1285
 awk, 1285, 1286
 basic, 1285, 1286
 collate, 1285, 1286, 1315
 ECMAScript, 1285, 1286
 egrep, 1285, 1286
 extended, 1285, 1286
 grep, 1285, 1286
 icase, 1285, 1286
 multiline, 1286
 nosubs, 1285, 1286
 optimize, 1285, 1286
 sys_days, 672
 operator<<, 700
 sys_info, 748
 abbrev, 749
 begin, 749
 end, 749
 offset, 749
 operator<<, 749
 save, 749
 sys_seconds, 672
 sys_time, 672
 from_stream, 700
 operator!=, 757
 operator<, 757
 operator<<, 700
 operator<=, 757
 operator==, 756, 757
 operator>, 757
 operator>=, 757
 to_stream, 700
 system, 451, 488
 system_category, 510, 512
 system_clock, 699
 from_time_t, 700
 rep, 700
 to_time_t, 700
 system_error, 508, 516
 code, 517
 constructor, 516, 517
 what, 517
 t
 binomial_distribution, 1090
 table
 ctype<char>, 832
 tai_clock, 703
 from_utc, 703
 now, 703
 to_utc, 703
 tai_seconds, 672
 tai_time, 672
 from_stream, 704
 operator<<, 703
 to_stream, 704
 tan, 1135
 complex, 1064
 valarray, 1116
 tanf, 1135
 tanh, 1135
 complex, 1064
 valarray, 1116
 tanhf, 1135
 tanhl, 1135
 tanl, 1135
 target
 function, 642
 link, 758
 target_type
 function, 642
 tellg
 basic_istream, 1188
 tellp
 basic_ostream, 1192
 temp_directory_path, 1273
 terminate, 465, 466, 477, 478
 terminate_handler, 444, 477
 test
 bitset, 569
 test_and_set
 atomic_flag, 1337
 tgamma, 1135
 tgammaf, 1135
 tgammal, 1135
 this_thread
 get_id, 1345
 sleep_for, 1346
 sleep_until, 1346
 yield, 1346
 thousands_sep
 moneypunct, 856
 numpunct, 844
 thread, 1342
 constructor, 1344
 destructor, 1344
 detach, 1345
 get_id, 1345

hardware_concurrency, 1345
 id, 1342
 join, 1345
 joinable, 1344
 operator=, 1344
 swap, 1344, 1345
 thread::id, 1342
 constructor, 1343
 operator!=, 1343
 operator<, 1343
 operator<<, 1343
 operator<=, 1343
 operator==, 1343
 operator>, 1343
 operator>=, 1343
 throw_with_nested
 nested_exception, 479
 tie, 533
 basic_ios, 1165
 time, 764
 time_get, 847
 date_order, 848
 do_date_order, 849
 do_get, 850
 do_get_date, 849
 do_get_monthname, 849
 do_get_time, 849
 do_get_weekday, 849
 do_get_year, 850
 get, 848
 get_date, 848
 get_monthname, 848
 get_time, 848
 get_weekday, 848
 get_year, 848
 time_get_byname, 850
 time_of_day, 740
 time_of_day<sub-second duration>, 742
 constructor, 743
 hours, 743
 make12, 743
 make24, 743
 minutes, 743
 operator precision, 743
 operator<<, 744
 seconds, 743
 subseconds, 743
 to_duration, 743
 time_of_day<hours>, 740
 constructor, 740
 hours, 740
 make12, 740
 make24, 740
 operator precision, 740
 operator<<, 743
 to_duration, 740
 time_of_day<minutes>, 741
 constructor, 741
 hours, 741
 make12, 741
 make24, 741
 minutes, 741
 operator precision, 741
 operator<<, 744
 to_duration, 741
 time_of_day<seconds>, 741
 constructor, 742
 hours, 742
 make12, 742
 make24, 742
 minutes, 742
 operator precision, 742
 operator<<, 744
 seconds, 742
 to_duration, 742
 time_point, 696
 ceil, 699
 constructor, 697
 floor, 699
 max, 698
 min, 698
 operator!=, 698
 operator+, 698
 operator++, 697
 operator+==, 697
 operator-, 698
 operator--, 697
 operator-=, 697
 operator<, 698
 operator<=, 698
 operator==, 698
 operator>, 698
 operator>=, 698
 round, 699
 time_point_cast, 699
 time_since_epoch, 697
 time_point_cast, 699
 time_put, 850
 do_put, 851
 put, 851
 time_put_byname, 851
 time_since_epoch
 time_point, 697
 time_t, 764
 TIME_UTC, 764
 time_zone, 750
 get_info, 750
 name, 750
 operator<, 751
 operator==, 751
 to_local, 751
 to_sys, 750, 751
 timed_mutex, 1350
 timespec, 764
 timespec_get, 764
 tinyness_before
 numeric_limits, 461
 tm, 764, 817

TMP_MAX, 1273
 tmpfile, 1273
 tmpnam, 1273
 to_address, 576
 pointer_traits, 576
 to_bytes
 wstring_convert, 1446
 to_chars, 768
 to_chars_result, 767
 ec, 767
 ptr, 767
 to_duration
 time_of_day<sub-second duration>, 743
 time_of_day<hours>, 740
 time_of_day<minutes>, 741
 time_of_day<seconds>, 742
 to_integer
 byte, 454
 to_local
 time_zone, 751
 to_stream
 day, 713
 duration, 696
 file_time, 707
 gps_time, 705
 local_time, 708
 month, 715
 month_day, 723
 sys_time, 700
 tai_time, 704
 utc_time, 702
 weekday, 720
 year, 717
 year_month, 727
 year_month_day, 730
 zoned_time, 755
 to_string, 805
 bitset, 569
 to_sys
 time_zone, 750, 751
 utc_clock, 701
 to_time_t
 system_clock, 700
 to_ullong
 bitset, 568
 to_ulong
 bitset, 568
 to_utc
 gps_clock, 705
 tai_clock, 703
 to_wstring, 805
 tolower, 815, 828
 ctype, 829
 ctype<char>, 832
 toupper, 815, 827
 ctype, 829
 ctype<char>, 832
 towctrans, 816
 tolower, 816
 toupper, 816
 traits_type
 basic_string, 779
 basic_string_view, 807
 transform, 1029
 collate, 846
 regex_traits, 1289
 transform_exclusive_scan, 1131
 transform_inclusive_scan, 1132
 transform_primary
 regex_traits, 1289
 transform_reduce, 1128, 1129
 translate
 regex_traits, 1289
 translate_nocase
 regex_traits, 1289
 traps
 numeric_limits, 461
 treat_as_floating_point, 688
 treat_as_floating_point_v, 672
 true_type, 653
 truename
 numpunct, 845
 trunc, 1135
 truncf, 1135
 truncL, 1135
 try_emplace
 map, 925, 926
 unordered_map, 943
 try_lock, 1362
 shared_lock, 1361
 unique_lock, 1358
 try_lock_for
 shared_lock, 1362
 unique_lock, 1358
 try_lock_until
 shared_lock, 1361
 unique_lock, 1358
 try_to_lock, 1354
 try_to_lock_t, 1354
 tuple, 527, 528, 897
 constructor, 530, 531
 forward_as_tuple, 533
 get, 535
 make_tuple, 532
 operator!=, 536
 operator<, 536
 operator<=, 536
 operator=, 531, 532
 operator==, 535
 operator>, 536
 operator>=, 536
 swap, 532
 tie, 533
 tuple_cat, 533
 tuple_element, 526, 534, 897
 tuple_size, 526, 534, 897
 in general, 534
 type

- any, 563
- file_status, 1252
- type_identity, 665
- type_identity_t, 646
- type_index, 764
 - constructor, 765
 - hash_code, 765
 - name, 765
 - operator!=, 765
 - operator<, 765
 - operator<=, 765
 - operator==, 765
 - operator>, 765
 - operator>=, 765
- type_info, 104, 473
 - before, 474
 - hash_code, 474
 - name, 474
 - operator!=, 474
 - operator==, 474
- tzdb, 745
 - current_zone, 745
 - locate_zone, 745
- tzdb_list, 745
 - begin, 746
 - cbegin, 746
 - cend, 746
 - end, 746
 - erase_after, 746
 - front, 746
- u16string
 - operator"s, 806
 - path, 1243
- u16string_view
 - operator"sv, 815
- u32string
 - operator"s, 806
 - path, 1243
- u32string_view
 - operator"sv, 815
- u8path, 1248
- u8string
 - path, 1243
- UCHAR_MAX, 463
- uflow
 - basic_filebuf, 1215
 - basic_streambuf, 1177
- uint16_t, 464
- uint32_t, 464
- uint64_t, 464
- uint8_t, 464
- uint_fast16_t, 464
- uint_fast32_t, 464
- uint_fast64_t, 464
- uint_fast8_t, 464
- uint_least16_t, 464
- uint_least32_t, 464
- uint_least64_t, 464
- uint_least8_t, 464
- UINT_MAX, 463
- uintmax_t, 464
- uintptr_t, 464
- ULLONG_MAX, 463
- ULONG_MAX, 463
- unary_function
 - zombie, 443
- unary_negate
 - zombie, 443
- uncaught_exception
 - zombie, 443
- uncaught_exceptions, 405, 478
- undeclare_no_pointers, 577
- undeclare_reachable, 577
- underflow
 - basic_filebuf, 1214
 - basic_streambuf, 1176
 - basic_stringbuf, 1204
 - strstreambuf, 1436
- underflow_error, 503, 506
 - constructor, 506
- underlying_type, 665
- unexpected
 - zombie, 443
- unexpected_handler
 - zombie, 443
- unget
 - basic_istream, 1188
- ungetc, 1273
- ungetwc, 817
- uniform_int_distribution, 1087
 - a, 1088
 - b, 1088
 - constructor, 1088
- uniform_real_distribution, 1088
 - a, 1089
 - b, 1089
 - constructor, 1089
- uninitialized_copy, 582
- uninitialized_copy_n, 582
- uninitialized_default_construct, 581
- uninitialized_default_construct_n, 582
- uninitialized_fill, 583
- uninitialized_fill_n, 583
- uninitialized_move, 582
- uninitialized_move_n, 583
- uninitialized_value_construct, 582
- uninitialized_value_construct_n, 582
- unique, 1032
 - forward_list, 906
 - list, 912
 - local_info, 749
- unique_copy, 1033
- unique_lock, 1355
 - constructor, 1356, 1357
 - destructor, 1357
 - lock, 1358
 - mutex, 1359

- operator bool, 1359
- operator=, 1357
- owns_lock, 1359
- release, 1359
- swap, 1359
- try_lock, 1358
- try_lock_for, 1358
- try_lock_until, 1358
- unlock, 1358
- unique_ptr, 585, 589, 596
 - constructor, 586, 587, 590
 - destructor, 587
 - get, 588
 - get_deleter, 588
 - operator bool, 588
 - operator!=, 591, 592
 - operator*, 588
 - operator->, 588
 - operator<, 591, 592
 - operator<<, 593
 - operator<=, 592
 - operator=, 588, 590
 - operator==, 591, 592
 - operator>, 592
 - operator>=, 592
 - operator[], 591
 - release, 589
 - reset, 589, 591
 - swap, 589
- unitbuf, 1169
- unlock
 - shared_lock, 1362
 - unique_lock, 1358
- unordered
 - partial_ordering, 483
- unordered_map, 936, 938
 - at, 942
 - begin, 891
 - bucket, 890
 - bucket_count, 890
 - bucket_size, 891
 - cbegin, 891
 - cend, 891
 - clear, 890
 - const_local_iterator, 883
 - constructor, 942
 - contains, 890
 - count, 890
 - end, 891
 - equal_range, 890
 - erase, 890
 - find, 890
 - hash_function, 886
 - hasher, 883
 - insert, 887, 943
 - insert_or_assign, 943
 - key_eq, 886
 - key_equal, 883
 - key_type, 883
 - load_factor, 891
 - local_iterator, 883
 - max_bucket_count, 890
 - max_load_factor, 891
 - node_type, 883
 - rehash, 891
 - reserve, 891
- unordered_multimap, 936, 944
 - begin, 891
 - bucket, 890
 - bucket_count, 890
 - bucket_size, 891
 - cbegin, 891
 - cend, 891
 - clear, 890
 - const_local_iterator, 883
 - constructor, 947, 948
 - contains, 890
 - count, 890
 - end, 891
 - equal_range, 890
 - erase, 890
 - find, 890
 - hash_function, 886
 - hasher, 883
 - insert, 887, 948
 - key_eq, 886
 - key_equal, 883
 - key_type, 883
 - load_factor, 891
 - local_iterator, 883
 - max_bucket_count, 890
 - max_load_factor, 891
 - node_type, 883
 - rehash, 891
 - reserve, 891
- unordered_multiset, 937, 952
 - begin, 891
 - bucket, 890
 - bucket_count, 890
 - bucket_size, 891
 - cbegin, 891
 - cend, 891
 - clear, 890
 - const_local_iterator, 883
 - constructor, 955, 956
 - contains, 890
 - count, 890
 - end, 891
 - equal_range, 890
 - erase, 890
 - find, 890
 - hash_function, 886
 - hasher, 883
 - insert, 887
 - key_eq, 886
 - key_equal, 883

- key_type, 883
- load_factor, 891
- local_iterator, 883
- max_bucket_count, 890
- max_load_factor, 891
- node_type, 883
- rehash, 891
- reserve, 891
- unordered_set, 937, 948
 - begin, 891
 - bucket, 890
 - bucket_count, 890
 - bucket_size, 891
 - cbegin, 891
 - cend, 891
 - clear, 890
 - const_local_iterator, 883
 - constructor, 951, 952
 - contains, 890
 - count, 890
 - end, 891
 - equal_range, 890
 - erase, 890
 - find, 890
 - hash_function, 886
 - hasher, 883
 - insert, 887
 - key_eq, 886
 - key_equal, 883
 - key_type, 883
 - load_factor, 891
 - local_iterator, 883
 - max_bucket_count, 890
 - max_load_factor, 891
 - node_type, 883
 - rehash, 891
 - reserve, 891
- unsetf
 - ios_base, 1160
- unshift
 - codecvt, 834
- UnsignedIntegral, 495
- unsynchronized_pool_resource, 615
 - constructor, 617
 - destructor, 617
 - do_allocate, 617
 - do_deallocate, 617
 - do_is_equal, 617
 - options, 617
 - release, 617
 - upstream_resource, 617
- upper_bound, 1040
- uppercase, 1168
- upstream_resource
 - monotonic_buffer_resource, 619
 - synchronized_pool_resource, 617
 - unsynchronized_pool_resource, 617
- use_count
 - shared_ptr, 597
 - weak_ptr, 604
- use_facet
 - locale, 827
- uses_allocator, 578
 - promise, 1373
- uses_allocator<tuple>, 536
- USHRT_MAX, 463
- utc_clock, 701
 - from_sys, 701
 - now, 701
 - to_sys, 701
- utc_seconds, 672
- utc_time, 672
 - from_stream, 702
 - operator<<, 702
 - to_stream, 702
- va_arg, 489
- va_copy, 489
- va_end, 443, 489
- va_list, 443, 489
- va_start, 489
- valarray, 1107, 1120
 - apply, 1113
 - constructor, 1109
 - cshift, 1113
 - destructor, 1109
 - max, 1113
 - min, 1113
 - operator!, 1112
 - operator!=, 1115
 - operator*, 1114
 - operator**, 1112
 - operator+, 1112, 1114
 - operator+=, 1112
 - operator-, 1112, 1114
 - operator-=, 1112
 - operator/, 1114
 - operator/=: 1112
 - operator<, 1115
 - operator<<, 1114
 - operator<<=: 1112
 - operator<=: 1115
 - operator=: 1109, 1110
 - operator==, 1115
 - operator>, 1115
 - operator>=: 1115
 - operator>>, 1114
 - operator>>=: 1112
 - operator[], 1110–1112
 - operator%, 1114
 - operator%=: 1112
 - operator&, 1114
 - operator&=: 1112
 - operator&&, 1115
 - operator^, 1114
 - operator^=: 1112
 - operator~, 1112
 - operator|, 1114

- operator|=, 1112
- operator||, 1115
- resize, 1114
- shift, 1113
- size, 1113
- sum, 1113
- swap, 1113, 1116
- valid
 - future, 1377
 - packaged_task, 1382
 - shared_future, 1379
- value
 - error_code, 513
 - error_condition, 515
 - optional, 545
 - regex_traits, 1290
- value_or
 - optional, 545
- value_type
 - allocator, 580
 - atomic, 1328
 - atomic_ref, 1322
 - basic_string, 779
 - basic_string_view, 807
 - complex, 1059
 - gslice_array, 1119
 - indirect_array, 1121
 - integer_sequence, 522
 - integral_constant, 652
 - iterator_traits, 978
 - mask_array, 1120
 - optional, 538
 - path, 1236
 - polymorphic_allocator, 611
 - scoped_allocator_adaptor, 620
 - slice_array, 1117
- valueless_by_exception
 - variant, 556
- variant, 551
 - constructor, 552, 553
 - destructor, 553
 - emplace, 555
 - get, 557
 - get_if, 557
 - holds_alternative, 557
 - index, 556
 - operator!=, 558
 - operator<, 558
 - operator<=, 558
 - operator=, 553, 554
 - operator==, 558
 - operator>, 558
 - operator>=, 558
 - swap, 556
 - valueless_by_exception, 556
 - visit, 558
- variant_alternative, 556, 557
- variant_size, 556
- vector, 913
 - constructor, 915
 - operator<, 915
 - operator==, 915
 - vector<bool>, 917
 - flip, 919
 - swap, 919
 - vfprintf, 1273
 - vfscanf, 1273
 - vwprintf, 817
 - vwscanf, 817
 - visit, 558
 - void_pointer
 - allocator_traits, 579
 - scoped_allocator_adaptor, 620
 - vprintf, 1273
 - vscanf, 1273
 - vsnprintf, 1273
 - vsprintf, 1273
 - vsscanf, 1273
 - vswprintf, 817
 - vswscanf, 817
 - vwprintf, 817
 - vwscanf, 817
- wait
 - condition_variable, 1366
 - condition_variable_any, 1369
 - future, 1377
 - shared_future, 1379
- wait_for
 - condition_variable, 1367, 1368
 - condition_variable_any, 1370
 - future, 1377
 - shared_future, 1379
- wait_until
 - condition_variable, 1366, 1367
 - condition_variable_any, 1369, 1370
 - future, 1377
 - shared_future, 1379
- wbuffer_convert, 1447
 - constructor, 1448
 - destructor, 1448
 - rdbuf, 1447
 - state, 1447
 - state_type, 1447
- wcerr, 1154
- WCHAR_MAX, 817
- WCHAR_MIN, 817
- wcin, 1154
- wclog, 1154
- wcout, 1154
- wcrtombs, 819
- wcrtomb, 817, 819
- wcscat, 817
- wcschr, 817
- wcscmp, 817
- wcscoll, 817
- wcscpy, 817
- wcscspn, 817

wcsftime, 817
 wcslen, 817
 wcsncat, 817
 wcsncmp, 817
 wcsncpy, 817
 wcsrchr, 817
 wcsrtombs, 817
 wcssp, 817
 wcsstr, 817
 wcstod, 817
 wcstof, 817
 wcstoimax, 1275
 wcstok, 817
 wcstol, 817
 wcstold, 817
 wcstoll, 817
 wcstombs, 451, 818
 wcstoul, 817
 wcstoull, 817
 wcstoumax, 1275
 wcsxfrm, 817
 wctob, 817
 wctomb, 451, 819
 wctrans, 816
 wctrans_t, 816
 wctype, 816
 wctype_t, 816
 weak_equal, 488
 weak_equality, 482
 equivalent, 482
 nonequivalent, 482
 operator!=, 482
 operator<=>, 482
 operator==, 482
 weak_from_this
 enable_shared_from_this, 606
 weak_order, 488
 weak_ordering, 484
 equivalent, 484
 greater, 484
 less, 484
 operator partial_ordering, 485
 operator weak_equality, 485
 operator!=, 485
 operator<, 485
 operator<=, 485
 operator<=>, 485, 486
 operator==, 485
 operator>, 485
 operator>=, 485
 weak_ptr, 596, 602, 606
 constructor, 603
 destructor, 603
 expired, 604
 lock, 604
 operator=, 604
 owner_before, 604
 reset, 604
 swap, 604
 use_count, 604
 weakly_canonical, 1273
 weekday, 718
 constructor, 718, 719
 from_stream, 720
 ok, 719
 operator unsigned, 719
 operator+, 719, 720
 operator++, 719
 operator+=", 719
 operator-, 720
 operator--, 719
 operator-=, 719
 operator<<, 720
 operator==, 719
 operator[], 719
 to_stream, 720
 weekday_indexed, 721
 weekday_last, 722
 year_month_weekday, 734
 year_month_weekday_last, 735
 weekday_indexed, 720
 constructor, 721
 index, 721
 month_weekday, 724
 ok, 721
 operator<<, 721
 operator==, 721
 weekday, 721
 year_month_weekday, 734
 weekday_last, 721
 constructor, 722
 month_weekday_last, 725
 ok, 722
 operator<<, 722
 operator==, 722
 weekday, 722
 year_month_weekday_last, 736
 weeks, 672
 weibull_distribution, 1094
 a, 1094
 b, 1094
 constructor, 1094
 WEOF, 816, 817
 wfilebuf, 1151, 1210
 wfstream, 1151, 1210
 what
 bad_alloc, 471
 bad_any_cast, 560
 bad_array_new_length, 472
 bad_cast, 474
 bad_exception, 477
 bad_function_call, 639
 bad_optional_access, 546
 bad_typeid, 475
 bad_variant_access, 559
 bad_weak_ptr, 593
 exception, 477

- filesystem_error, 1249
- future_error, 1372
- system_error, 517
- wide_string
 - wstring_convert, 1446
- widen
 - basic_ios, 1166
 - ctype, 829
 - ctype<char>, 832
- width
 - ios_base, 828, 1160, 1161
- wifstream, 1151, 1210
- wint_t, 816, 817
- wios, 1155
- wistream, 1151, 1178
- wistringstream, 1151, 1201
- wmemchr, 817
- wmemcmp, 817
- wmemcpy, 817
- wmemmove, 817
- wmemset, 817
- wofstream, 1151, 1210
- wostream, 1151, 1179
- wostringstream, 1151, 1201
- wosyncstream, 1151, 1223
- wprintf, 817
- wregex, 1279
- write
 - basic_ostream, 1196
- ws, 1183, 1188
- wscanf, 817
- wstreambuf, 1151, 1170
- wstring
 - operator"s, 806
 - path, 1243
- wstring_convert, 1444
 - byte_string, 1445
 - constructor, 1446
 - converted, 1445
 - destructor, 1447
 - from_bytes, 1445
 - int_type, 1446
 - state, 1446
 - state_type, 1446
 - to_bytes, 1446
 - wide_string, 1446
- wstring_view
 - operator"sv, 815
- wstringbuf, 1151, 1201
- wstringstream, 1151, 1201
- wsyncbuf, 1151, 1223
- xalloc
 - ios_base, 1161
- xsgn
 - basic_streambuf, 1176
- xsgn
 - basic_streambuf, 1177
- year, 715
 - constructor, 716
 - from_stream, 718
 - is_leap, 717
 - max, 717
 - min, 717
 - ok, 717
 - operator int, 717
 - operator"y, 718
 - operator+, 717
 - operator++, 716
 - operator+=", 716
 - operator-, 717
 - operator--, 716
 - operator-=, 717
 - operator<, 717
 - operator<<, 717
 - operator==, 717
 - to_stream, 717
 - year_month, 726
 - year_month_day, 729
 - year_month_day_last, 731
 - year_month_weekday, 733
 - year_month_weekday_last, 735
- year_month, 725
 - constructor, 726
 - from_stream, 727
 - month, 726
 - ok, 726
 - operator+, 727
 - operator+=", 726
 - operator-, 727
 - operator-=, 726
 - operator<, 726
 - operator<<, 727
 - operator==, 726
 - to_stream, 727
 - year, 726
- year_month_day, 727
 - constructor, 728
 - day, 729
 - from_stream, 730
 - month, 729
 - ok, 729
 - operator local_days, 729
 - operator sys_days, 729
 - operator+, 729, 730
 - operator+=", 728, 729
 - operator-, 730
 - operator-=, 728, 729
 - operator<, 729
 - operator<<, 730
 - operator==, 729
 - to_stream, 730
 - year, 729
- year_month_day_last, 730
 - constructor, 731
 - day, 731
 - month, 731

month_day_last, 731
 ok, 732
 operator local_days, 731
 operator sys_days, 731
 operator+, 732
 operator+=", 731
 operator-, 732
 operator-=", 731
 operator<, 732
 operator<<, 732
 operator==, 732
 year, 731
 year_month_weekday, 732
 constructor, 733
 index, 734
 month, 733
 ok, 734
 operator local_days, 734
 operator sys_days, 734
 operator+, 734
 operator+=", 733
 operator-, 734
 operator-=", 733
 operator<<, 734
 operator==, 734
 weekday, 734
 weekday_indexed, 734
 year, 733
 year_month_weekday_last, 734
 constructor, 735
 month, 735
 ok, 736
 operator local_days, 736
 operator sys_days, 736
 operator+, 736
 operator+=", 735
 operator-, 736
 operator-=", 735
 operator<<, 736
 operator==, 736
 weekday, 735
 weekday_last, 736
 year, 735
 years, 672
 yield
 this_thread, 1346

 zero
 duration, 692
 duration_values, 688
 zoned_time, 751
 constructor, 753–754
 get_info, 755
 get_local_time, 755
 get_sys_time, 755
 get_time_zone, 755
 operator local_time, 755
 operator sys_time, 755
 operator!=", 755
 operator<<, 755
 operator=", 754, 755
 operator==, 755
 to_stream, 755
 zoned_traits, 751
 zoned_traits<const time_zone*>
 default_zone, 751
 locate_zone, 751

Index of implementation-defined behavior

The entries in this index are rough descriptions; exact specifications are at the indicated page in the general text.

`#pragma`, 416

additional execution policies supported by parallel algorithms, 766, 1019

additional `file_type` enumerators for file systems supporting additional types of file, 1250

additional formats for `time_get::do_get_date`, 849

additional supported forms of preprocessing directive, 407

algorithms for producing the standard random number distributions, 1087

alignment, 57

alignment additional values, 57

alignment of bit-fields within a class object, 229

allocation of bit-fields within a class object, 229

any use of an invalid pointer other than to perform indirection or deallocate, 54

argument for violation handler, 181

argument values to construct

`basic_ios::failure`, 1167

assignability of placeholder objects, 638

behavior of `iostream` classes when

`traits::pos_type` is not `streampos` or

when `traits::off_type` is not

`streamoff`, 1151

behavior of non-standard attributes, 175

bits in a byte, 48

choice of larger or smaller value of floating literal, 19

concatenation of some types of string literals, 20

consistency of build level and violation

continuation mode, 29

conversions between pointers and integers, 107

converting characters from source character set to execution character set, 9

converting function pointer to object pointer and vice versa, 107

default configuration of a pool, 617

default `next_buffer_size` for a

`monotonic_buffer_resource`, 618

default number of buckets in `unordered_map`, 942

default number of buckets in

`unordered_multimap`, 947, 948

default number of buckets in

`unordered_multiset`, 955, 956

default number of buckets in `unordered_set`, 952

defining `main` in freestanding environment, 71

definition and meaning of `__STDC__`, 418, 1414

definition and meaning of `__STDC_VERSION__`, 418

definition of `NULL`, 452, 1429

derived type for `typeid`, 104

diagnostic message, 3

dynamic initialization of static inline variables before `main`, 73

dynamic initialization of static variables before `main`, 72, 73

dynamic initialization of thread-local variables before entry, 73

effect of calling associated Laguerre polynomials with `n` \geq 128 or `m` \geq 128, 1144

effect of calling associated Legendre polynomials with `l` \geq 128, 1144

effect of calling `basic_filebuf::setbuf` with nonzero arguments, 1215

effect of calling `basic_filebuf::sync` when a get area exists, 1216

effect of calling `basic_streambuf::setbuf` with nonzero arguments, 1206

effect of calling cylindrical Bessel functions of the first kind with `nu` \geq 128, 1146

effect of calling cylindrical Neumann functions with `nu` \geq 128, 1146

effect of calling Hermite polynomials with `n` \geq 128, 1147

effect of calling `ios_base::sync_with_stdio` after any input or output operation on standard streams, 1161

effect of calling irregular modified cylindrical Bessel functions with `nu` \geq 128, 1146

effect of calling Laguerre polynomials with `n` \geq 128, 1148

effect of calling Legendre polynomials with `l` \geq 128, 1148

effect of calling regular modified cylindrical Bessel functions with `nu` \geq 128, 1146

effect of calling spherical associated Legendre functions with `l` \geq 128, 1149

effect of calling spherical Bessel functions with `n` \geq 128, 1148

effect of calling spherical Neumann functions with `n` \geq 128, 1149

effect of `filesystem::copy`, 1262

effect on C locale of calling `locale::global`, 827

encoding of universal character name not in execution character set, 18

- `error_category` for errors originating outside the operating system, 448
- exception type when `random_device` constructor fails, 1085
- exception type when `random_device::operator()` fails, 1085
- exception type when `shared_ptr` constructor fails, 595
- exceptions thrown by standard library functions that have a potentially-throwing exception specification, 448
- execution character set and execution wide-character set, 10
- exit status, 466
- extended signed integer types, 60
- file type of the file argument of `filesystem::status`, 1272
- formatted character sequence generated by `time_put::do_put` in C locale, 851
- forward progress guarantees for implicit threads of parallel algorithms (if not defined for `thread`), 1017
- growth factor for `monotonic_buffer_resource`, 619
- headers for freestanding implementation, 431
- how `random_device::operator()` generates values, 1085
- interactive device, 7
- interpretation of the path character sequence with format `path::auto_format`, 1249
- largest supported value to configure the largest allocation satisfied directly by a pool, 617
- largest supported value to configure the maximum number of blocks to replenish a pool, 616
- linkage of `main`, 71
- linkage of names from C standard library, 432
- linkage of objects between C++ and other languages, 174
- locale names, 825
- lvalue-to-rvalue conversion of an invalid pointer value, 76
- manner of search for included source file, 410
- mapping from name to catalog when calling `messages::do_open`, 857
- mapping from physical source file characters to basic source character set, 10, 1421
- mapping header name to header or external source file, 13
- mapping of pointer to integer, 107
- mapping physical source file characters to basic source character set, 9
- mapping to message when calling `messages::do_get`, 858
- maximum depth of recursive template instantiations, 369
- maximum size of an allocated object, 112, 472
- meaning of `'`, `\`, `/*`, or `//` in a *q-char-sequence* or an *h-char-sequence*, 13
- meaning of `asm` declaration, 172
- meaning of attribute declaration, 141
- meaning of dot-dot in *root-directory*, 1237
- mechanism for selecting the build level, 181
- negative value of character literal in preprocessor, 409
- nesting limit for `#include` directives, 410
- NTCTS in `basic_ostream<charT, traits>&operator<<(nullptr_t)`, 1195
- number of placeholders for bind expressions, 626, 638
- number of threads in a program under a freestanding implementation, 66
- numeric values of character literals in `#if` directives, 409
- operating system on which implementation depends, 1228
- parameters to `main`, 71
- passing argument of class type through ellipsis, 101
- physical source file characters, 9
- presence and meaning of `native_handle_type` and `native_handle`, 1339
- range defined for character literals, 18
- rank of extended signed integer type, 63
- representation of `char`, 60
- required alignment for `atomic_ref` type's operations, 1322, 1324–1326
- required libraries for freestanding implementation, 6
- resource limits on a message catalog, 858
- result of `filesystem::file_size`, 1267
- result of inexact floating-point conversion, 78
- result of right shift of negative value, 120
- return value of `bad_alloc::what`, 471
- return value of `bad_any_cast::what`, 560
- return value of `bad_array_new_length::what`, 472
- return value of `bad_cast::what`, 474
- return value of `bad_exception::what`, 477
- return value of `bad_function_call::what`, 639
- return value of `bad_optional_access::what`, 546
- return value of `bad_typeid::what`, 475
- return value of `bad_variant_access::what`, 559
- return value of `bad_weak_ptr::what`, 593
- return value of `char_traits<char16_t>::eof`, 774
- return value of `char_traits<char32_t>::eof`, 774

- return value of `exception::what`, 477
- return value of `type_info::name()`, 474
- search locations for "" header, 410
- search locations for <> header, 410
- semantics of an access through a volatile glvalue, 150
- semantics of linkage specification on templates, 316
- semantics of linkage specifiers, 172
- semantics of non-standard escape sequences, 18
- semantics of parallel algorithms invoked with implementation-defined execution policies, 1019
- semantics of `token` parameter and default token value used by `random_device` constructors, 1085
- sequence of places searched for a header, 410
- set of character types that iostreams templates can be instantiated for, 824, 1151
- signedness of `char`, 60, 151
- `sizeof` applied to fundamental types other than `char`, `signed char`, and `unsigned char`, 110
- source location of precondition violation, 181
- specification of violation handler, 181
- stack unwinding before call to `std::terminate`, 401, 404
- start-up and termination in freestanding environment, 71
- string resulting from `__func__`, 199
- support for extended alignment, 666
- support for extended alignments, 57
- supported multibyte character encoding rules, 773, 775
- supported *root-names* in addition to any operating system dependent *root-names*, 1236, 1237
- text of `__DATE__` when date of translation is not available, 417
- text of `__TIME__` when time of translation is not available, 417
- threads and program points at which deferred dynamic initialization is performed, 73
- type of a directory-like file, 1257, 1259
- type of `array::const_iterator`, 896
- type of `array::iterator`, 896
- type of `basic_string::const_iterator`, 779
- type of `basic_string::iterator`, 779
- type of `basic_string_view::const_iterator`, 807, 809
- type of `default_random_engine`, 1084
- type of `deque::const_iterator`, 898
- type of `deque::iterator`, 898
- type of filesystem trivial clock, 1232
- type of `forward_list::const_iterator`, 902
- type of `forward_list::iterator`, 902
- type of `list::const_iterator`, 908
- type of `list::iterator`, 908
- type of `map::const_iterator`, 922
- type of `map::iterator`, 922
- type of `multimap::const_iterator`, 927
- type of `multimap::iterator`, 927
- type of `multiset::const_iterator`, 933
- type of `multiset::iterator`, 933
- type of `ptrdiff_t`, 119, 453
- type of `regex_constants::error_type`, 1287
- type of `regex_constants::match_flag_type`, 1286
- type of `set::const_iterator`, 930
- type of `set::iterator`, 930
- type of `size_t`, 453
- type of `span::const_iterator`, 964
- type of `span::iterator`, 964
- type of `streamoff`, 773
- type of `streampos`, 773
- type of `syntax_option_type`, 1285
- type of `u16streampos`, 774
- type of `u32streampos`, 774
- type of `unordered_map::const_iterator`, 938
- type of `unordered_map::const_local_iterator`, 939
- type of `unordered_map::iterator`, 938
- type of `unordered_map::local_iterator`, 939
- type of `unordered_multimap::const_iterator`, 944
- type of `unordered_multimap::const_local_iterator`, 944
- type of `unordered_multimap::iterator`, 944
- type of `unordered_multimap::local_iterator`, 944
- type of `unordered_multiset::const_iterator`, 952
- type of `unordered_multiset::const_local_iterator`, 953
- type of `unordered_multiset::iterator`, 952
- type of `unordered_multiset::local_iterator`, 952
- type of `unordered_set::const_iterator`, 949
- type of `unordered_set::const_local_iterator`, 949
- type of `unordered_set::iterator`, 949
- type of `unordered_set::local_iterator`, 949
- type of `vector::const_iterator`, 913
- type of `vector::iterator`, 913
- type of `vector<bool>::const_iterator`, 917
- type of `vector<bool>::iterator`, 917
- type of `wstreampos`, 775
- underlying type for enumeration, 159
- value of bit-field that cannot represent assigned value, 126

- incremented value, [103](#)
- initializer, [205](#)
- value of character literal outside range of corresponding type, [18](#)
- value of `ctype<char>::table_size`, [832](#)
- value of *has-attribute-expression* for non-standard attributes, [408](#)
- value of multicharacter literal, [17](#)
- value of `pow(0,0)`, [1064](#)
- value of result of inexact integer to floating-point conversion, [78](#)
- value of result of unsigned to signed conversion, [78](#)
- value of wide-character literal containing multiple characters, [18](#)
- value of wide-character literal with single c-char that is not in execution wide-character set, [17](#)
- value representation of floating-point types, [61](#)
- value representation of pointer types, [62](#)
- values of a trivially copyable type, [58](#)
- values of various `ATOMIC..._LOCK_FREE` macros, [1321](#)

- whether `<cfenv>` functions can be used to manage floating-point status, [1057](#)
- whether a given `atomic` type's operations are always lock free, [606](#), [608](#), [1328](#), [1329](#), [1331](#), [1333](#), [1334](#)
- whether a given `atomic_ref` type's operations are always lock free, [1322](#), [1324–1326](#)
- whether an implementation has relaxed or strict pointer safety, [57](#)
- whether functions from Annex K of the C standard library are declared when C++ headers are included, [431](#)
- whether `get_pointer_safety` returns `pointer_safety::relaxed` or `pointer_safety::preferred` if the implementation has relaxed pointer safety, [577](#)
- whether locale object is global or per-thread, [823](#)
- whether `pragma FENV_ACCESS` is supported, [1057](#)
- whether `rand` may introduce a data race, [1104](#)
- whether sequence pointers are copied by `basic_filebuf` move constructor, [1212](#)
- whether sequence pointers are copied by `basic_stringbuf` move constructor, [1203](#)
- whether source of translation units must be available to locate template definitions, [10](#)
- whether stack is unwound before calling the function `std::terminate` when a `noexcept` specification is violated, [404](#)
- whether the lifetime of a parameter ends when the callee returns or at the end of the enclosing full-expression, [100](#)
- whether the thread that executes `main` and the threads created by `std::thread` provide concurrent forward progress guarantees, [70](#)
- whether `time_get::do_get_year` accepts two-digit year numbers, [850](#)
- whether values are rounded or truncated to the required precision when converting between `time_t` values and `time_point` objects, [700](#)
- whether `variant` supports over-aligned types, [551](#)
- which functions in the C++ standard library may be recursively reentered, [447](#)
- which non-standard-layout objects containing no data are considered empty, [50](#)
- which scalar types have unique object representations, [660](#)